

Product Confirmation Letter

SPECIFICATION FOR APPROVED

version:REV.A0

Customer : _____

Customer's P/N : _____

Description : **antenna**

Spceification : **R1035631JB**

Drawing No. : _____

rendering	
DRAWING	
DATE	2022/1/14

admit	
CUSTOMER APPROVAL	
DATE:	

Dongguan Rongao Electronics Co., Ltd
No. 121 Dongmen Middle Road, Chang'an Town, Dongguan City,
1911-1913, Baihui Center

Phone: 0769-82649971 Fax: 0769-82649970

SPECIFICATION FOR APPROVAL

**RoHS
COMPLIANT**




[illegible]

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

CUSTOMER	0	CUSTOMER No.	0	REF No.		PAGE
ITEM	antenna		DRAWING No.			1/3
DESCRIPTION	R1035631JB		ISSUE DATE	2022/1/14	VERSION	A0

1、 DIMENSION(mm):

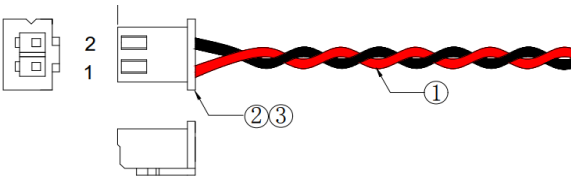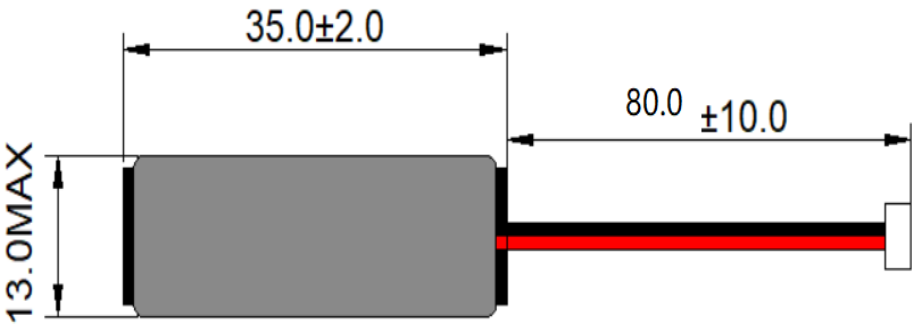

2.TEMPERATURE RATING:

Operating Temperature	
Storage Temperature	

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

CUSTOMER	0	CUSTOMER No.	0	REF No.		PAGE
ITEM	antenna		DRAWING No.			2/3
DESCRIPTION	R1035631JB		ISSUE DATE	2022/1/14	VERSION	A0

3、ELECTRICAL REQUIREMENTS:

ITEM	SPEC	TOLERANCE	TEST FREQUENCY	TEST EQUIPMENT
L(S-F)	630uH	±5%	100KHz/0.25V	3250
DCR	1Ω	Max	At 25℃	CH-502
Q	30	Min	100KHz/1V	3250

4、MATERIAL LIST:

No.	Material	Specification	Supply's name	Remark
1	CORE	Ni/Zn Ferrite Core	TDG/ACM	
2	Wire	2UEWB 0.25*106TS ref	YLSL	
3	TAPE	ML TAPE	YH	
4	TUBE	UL TUBE	CY	

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

PAGE:3/3

CUSTOMER	0			LOT No.			
CUSTOMER No.	0			QUANTITY	30PCS	DATE	2022/1/14
DRAWING No.				DIMENSION(UNIT: mm)			
ITEM	R1035631JB						
DESCRIPTION	antenna						
TEST FREQ	1KHz/0.25V						
TEMPERATURE	25 ℃	HUMIDITY	75%				

5.TESTING DATA:

ELECTRONICAL TEST DATA					OREALL DIMENSION (UNIT: mm)								
	L 2-4 (uH)	DCR (Ω)											
SPEC	630± 5%uH	1 Max											
1	635	0.79											
2	630	0.79											
3	628	0.80											
4	635	0.80											
5	640	0.79											
6													
7													
8													
9													
10													
$\overline{X}$	633.60	0.79											
R	12.00	0.01											

TEST EQUIPMENT:	ALL JUDGE	☒ OK ☐ NG
-----------------	-----------	--

L ☒3250
DCR ☒CH-502
IDC ☒3250+1310