


4.6 Dwell Time

4.6.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.6.2 Test Setup

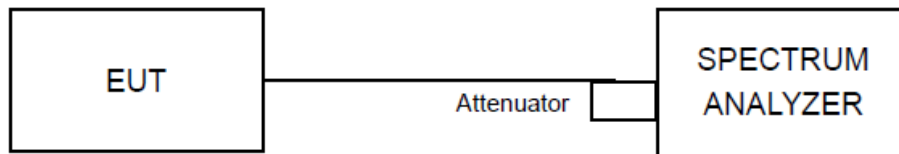

4.6.3 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.



4.6.4 Deviation of Test Standard

No deviation.


4.6.5 Test Results


TestMode	Antenna	Channel	BurstWidth	TotalHops	Result	Limit	Verdict
DH1	Ant1	Hop	0.40	330	0.13	≤ 0.4	PASS
DH3	Ant1	Hop	1.65	160	0.264	≤ 0.4	PASS
DH5	Ant1	Hop	2.90	80	0.232	≤ 0.4	PASS
2DH1	Ant1	Hop	0.39	330	0.13	≤ 0.4	PASS
2DH3	Ant1	Hop	1.65	150	0.247	≤ 0.4	PASS
2DH5	Ant1	Hop	2.89	100	0.289	≤ 0.4	PASS
3DH1	Ant1	Hop	0.39	330	0.129	≤ 0.4	PASS
3DH3	Ant1	Hop	1.64	190	0.312	≤ 0.4	PASS
3DH5	Ant1	Hop	2.90	80	0.232	≤ 0.4	PASS

DH1_Ant1_Hop

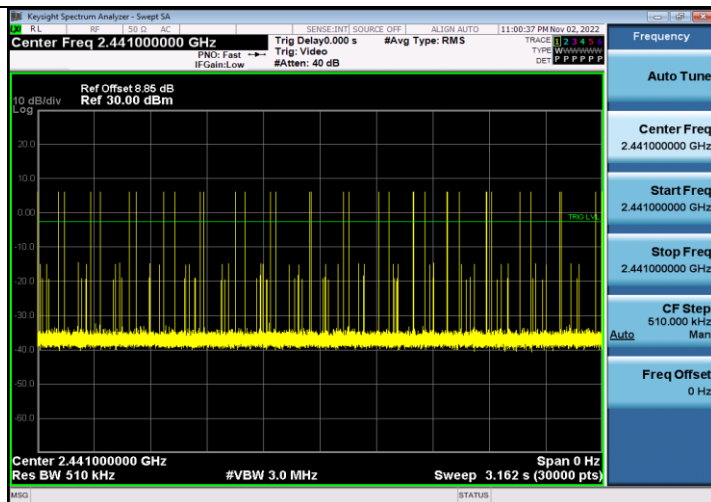
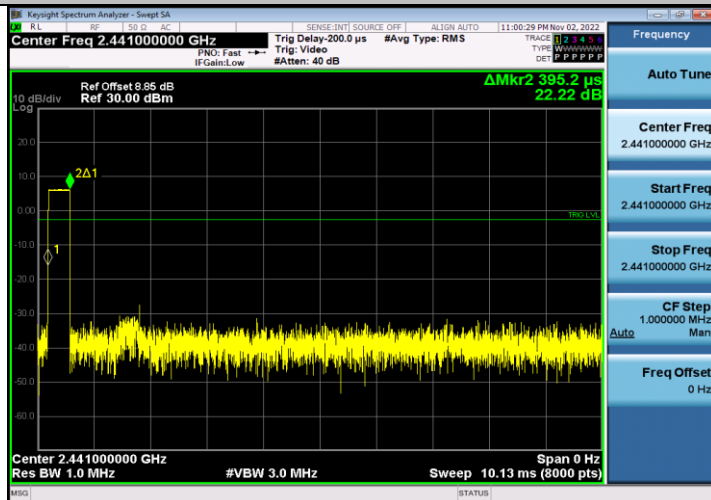


DH3_Ant1_Hop


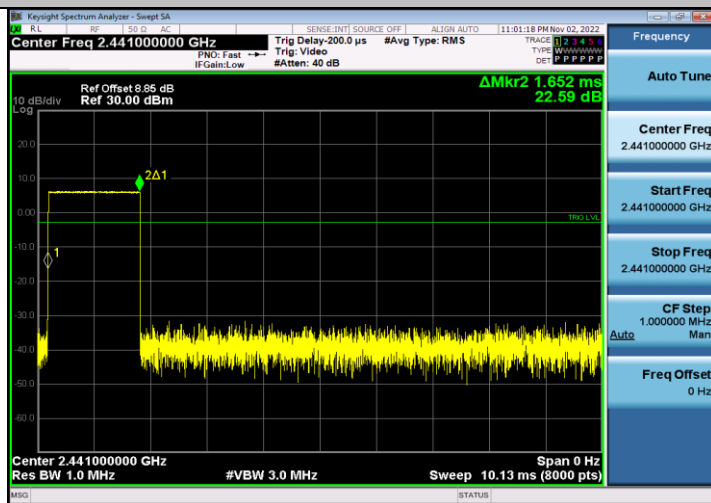


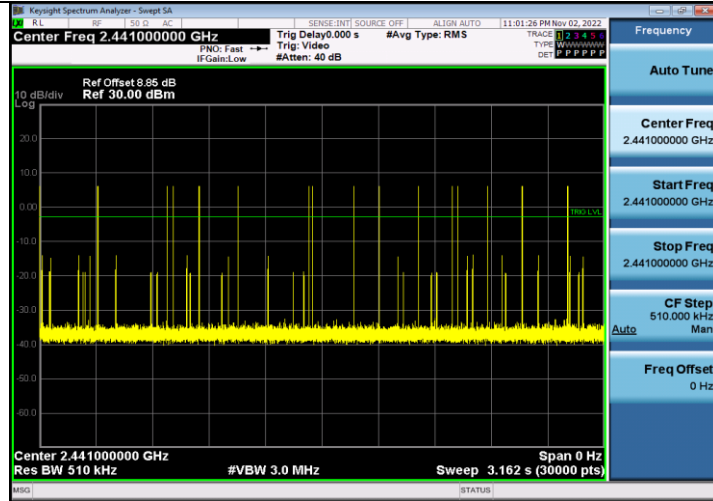


DH5_Ant1_Hop

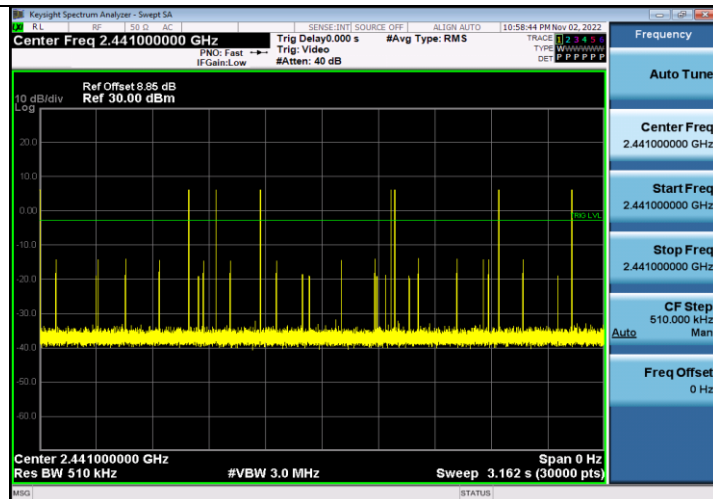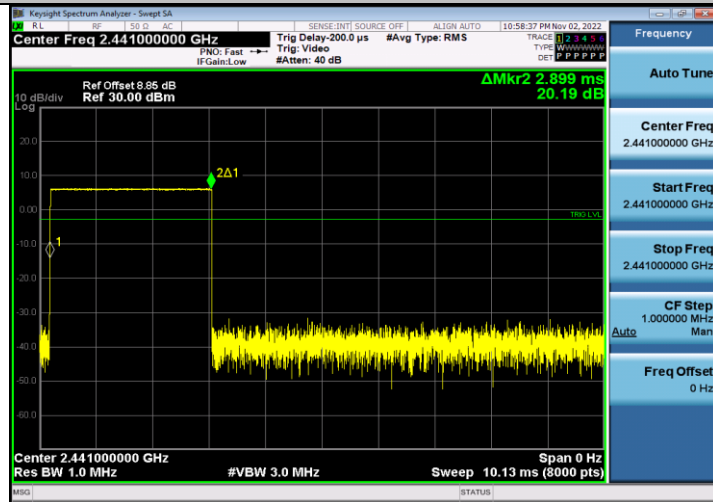


2DH1_Ant1_Hop

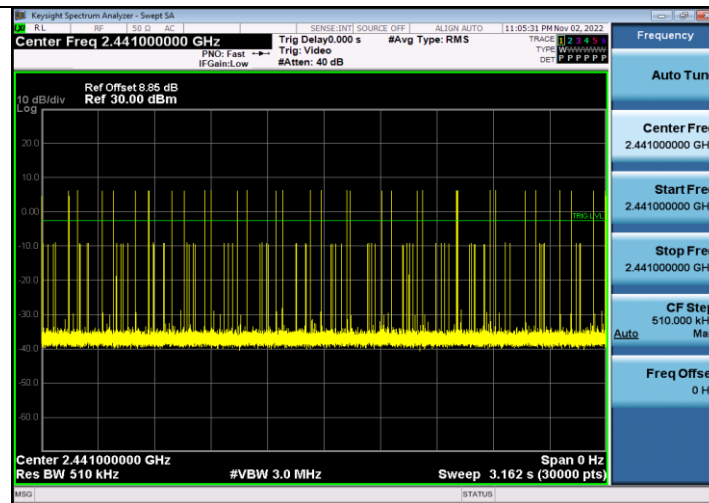
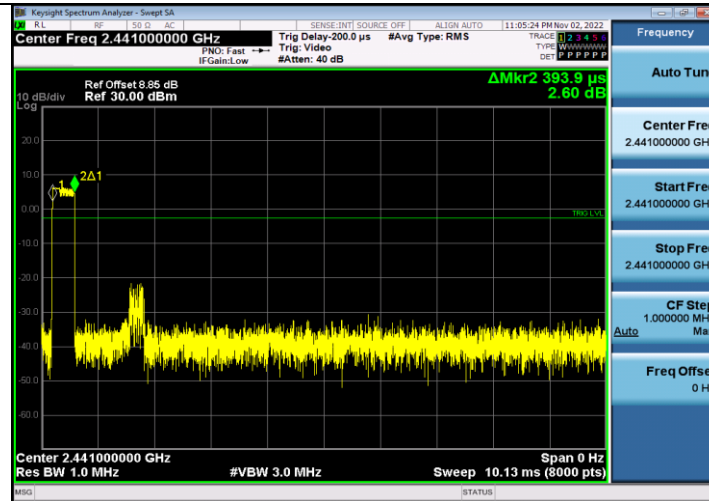


2DH3_Ant1_Hop


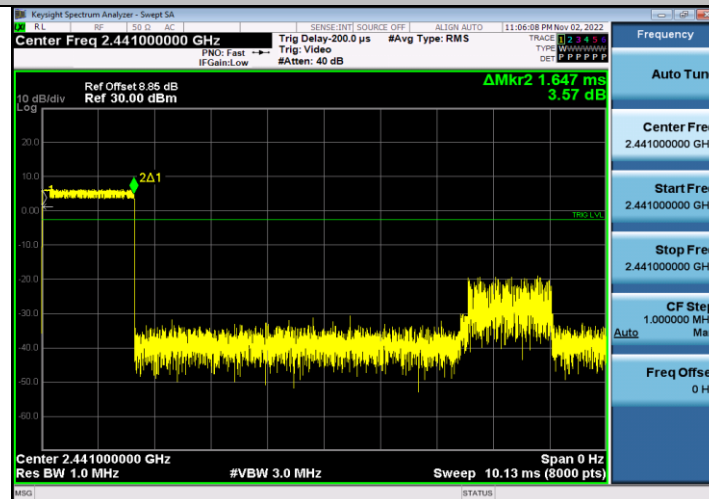


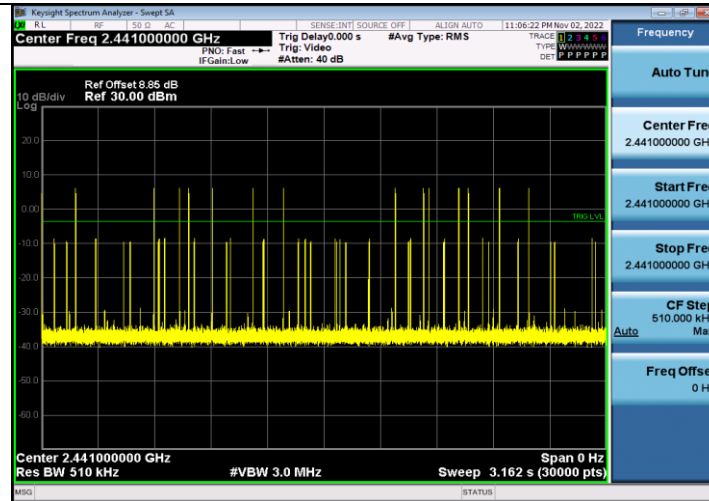


2DH5_Ant1_Hop

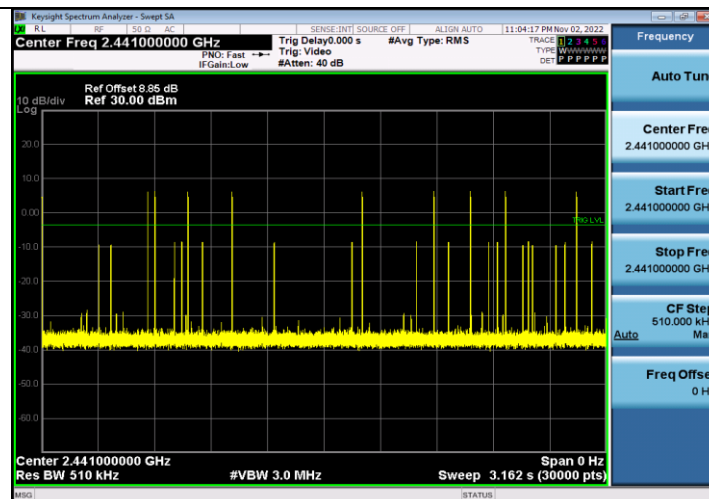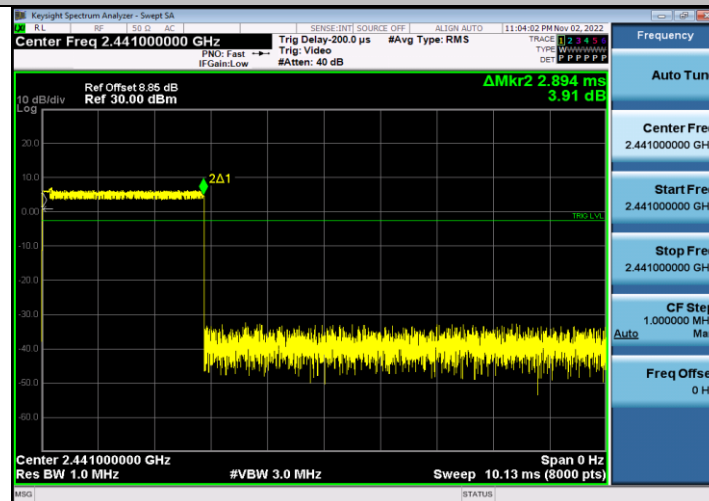


3DH1_Ant1_Hop

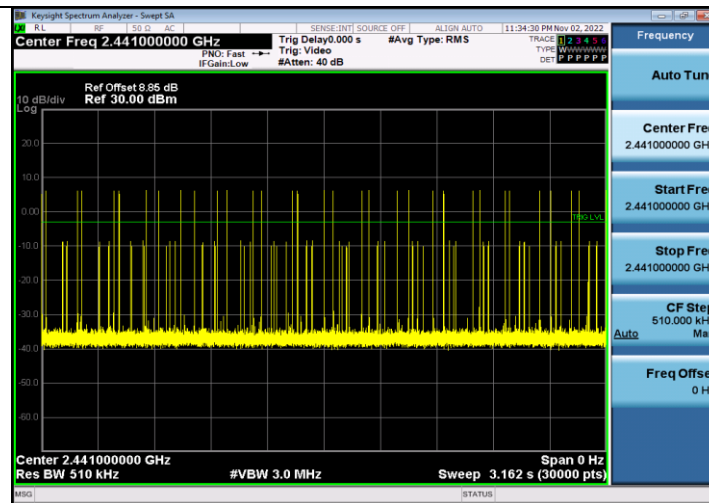
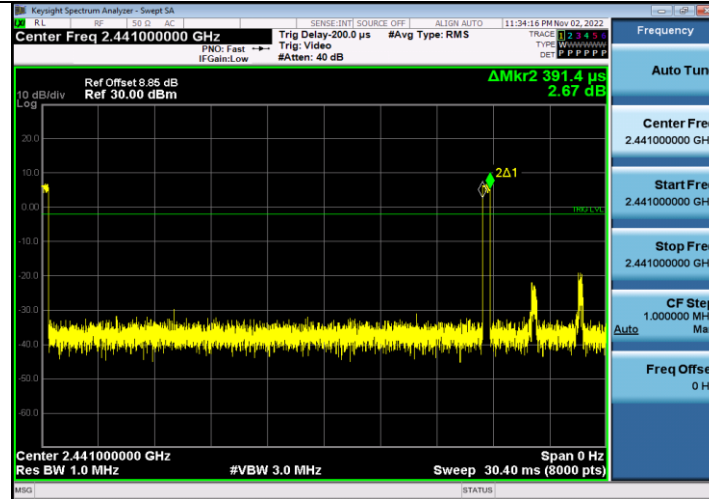


3DH3_Ant1_Hop

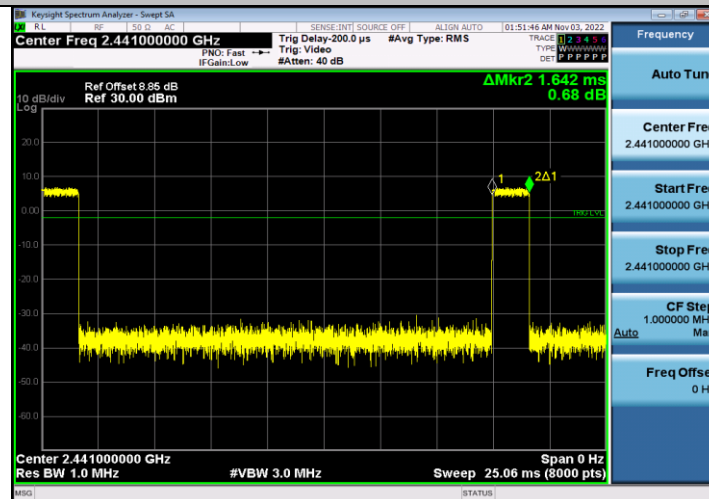

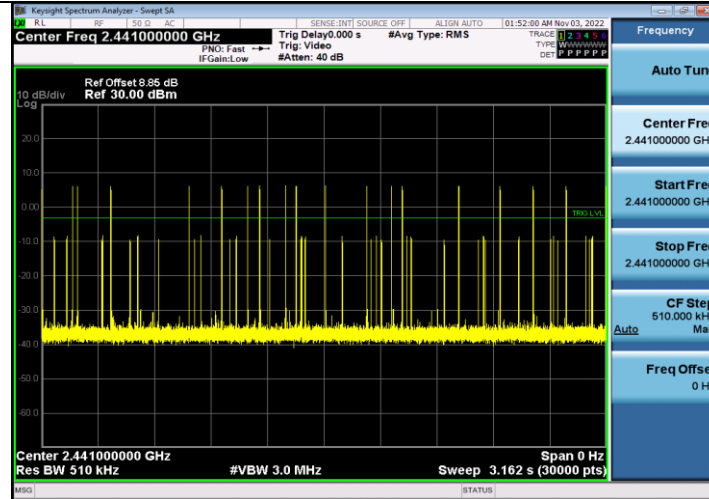

3DH5_Ant1_Hop

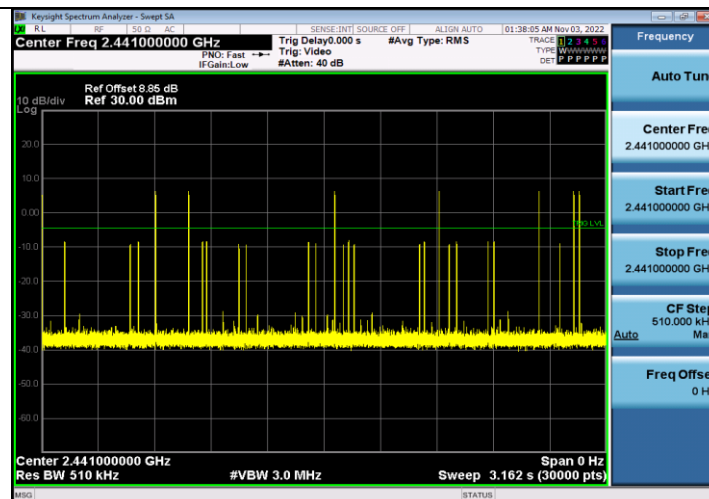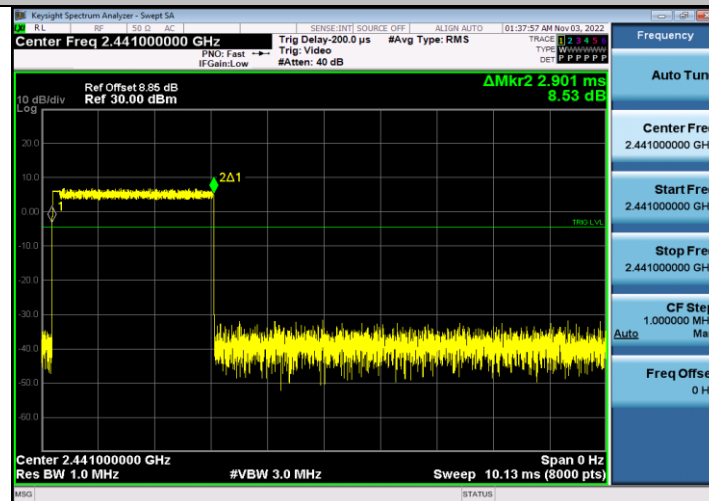


4.7 Conducted Band Edges Measurement

4.7.1 Limit

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

4.7.2 Test Setup

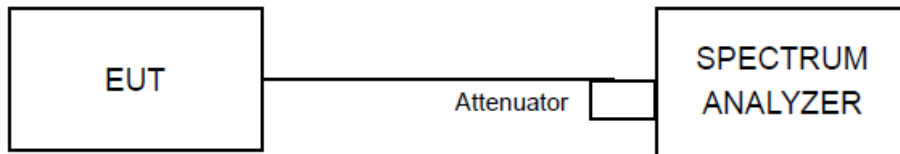

4.7.3 Test Procedures

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.


4.7.4 Deviation of Test Standard

No deviation.


4.7.5 Test Result

TestMode	Antenna	ChName	Channel	RefLevel	Result	Limit	Verdict
DH5	Ant1	Low	2402	7.76	-48.29	≤ -12.24	PASS
		High	2480	6.35	-49.51	≤ -13.65	PASS
		Low	Hop_2402	7.08	-51.21	≤ -12.92	PASS
		High	Hop_2480	6.11	-50.8	≤ -13.89	PASS
2DH5	Ant1	Low	2402	7.09	-40.05	≤ -12.91	PASS
		High	2480	5.69	-49.83	≤ -14.31	PASS
		Low	Hop_2402	3.60	-51.05	≤ -16.4	PASS
		High	Hop_2480	5.29	-50.38	≤ -14.71	PASS
3DH5	Ant1	Low	2402	6.92	-39.34	≤ -13.08	PASS
		High	2480	5.75	-50.46	≤ -14.25	PASS
		Low	Hop_2402	3.53	-50.87	≤ -16.47	PASS
		High	Hop_2480	5.83	-50.09	≤ -14.17	PASS


DH5_Ant1_Low_2402

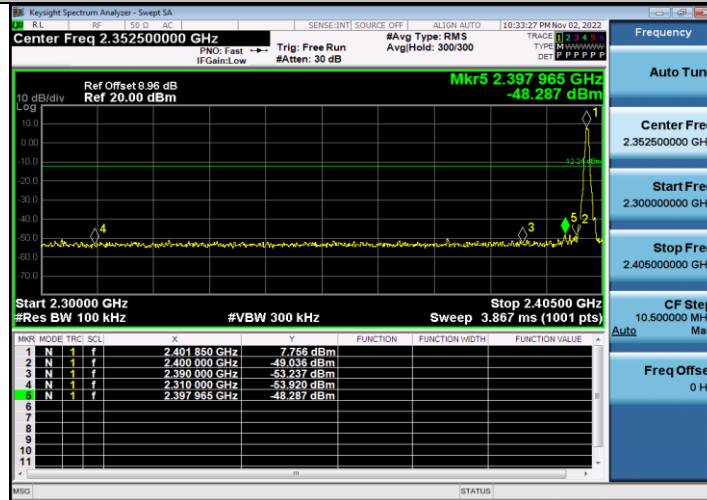


DH5_Ant1_High_2480

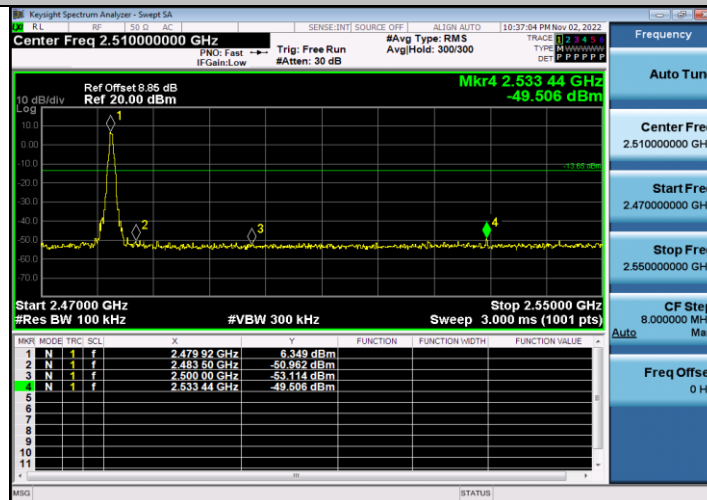


DH5_Ant1_Low_Hop_2402

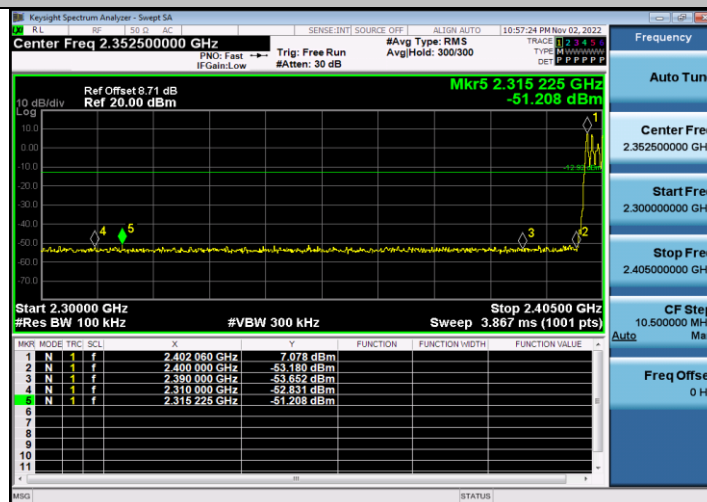


DH5_Ant1_High_Hop_2480

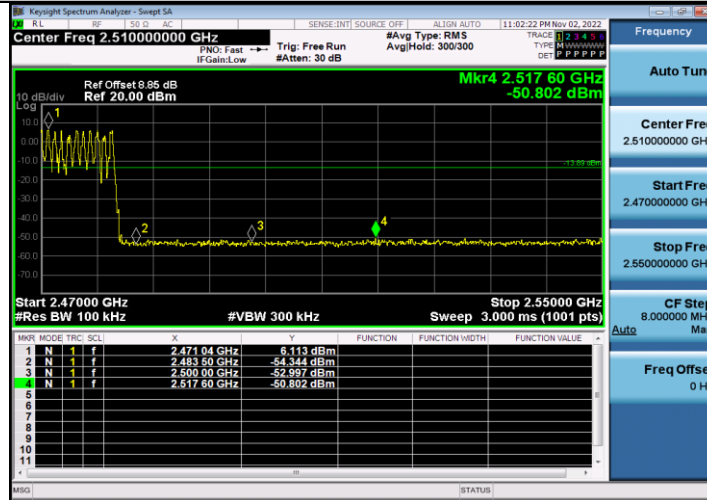


2DH5_Ant1_Low_2402

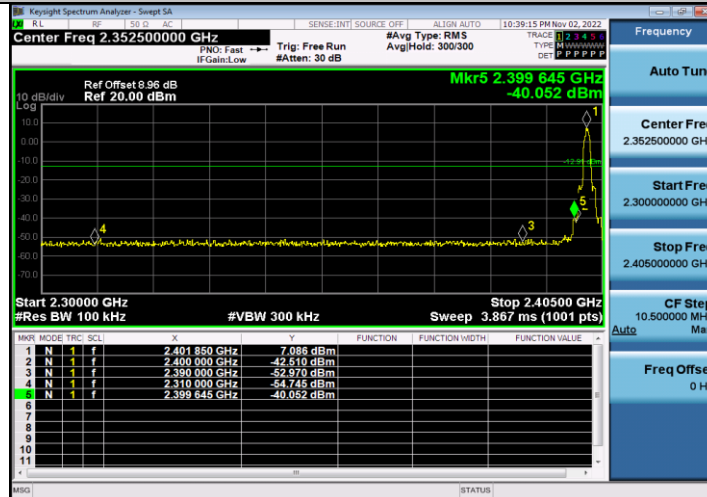


2DH5_Ant1_High_2480

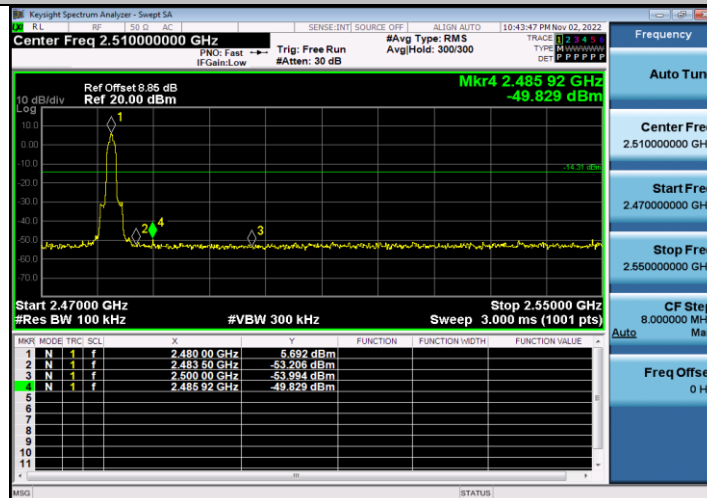


2DH5_Ant1_Low_Hop_2402

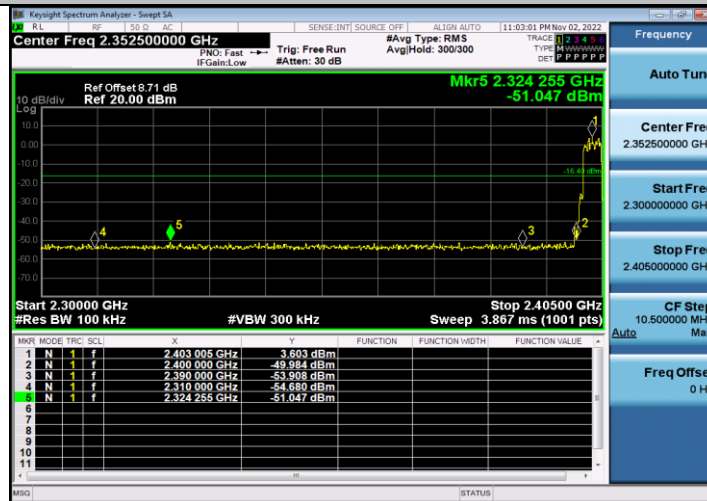


2DH5_Ant1_High_Hop_2480

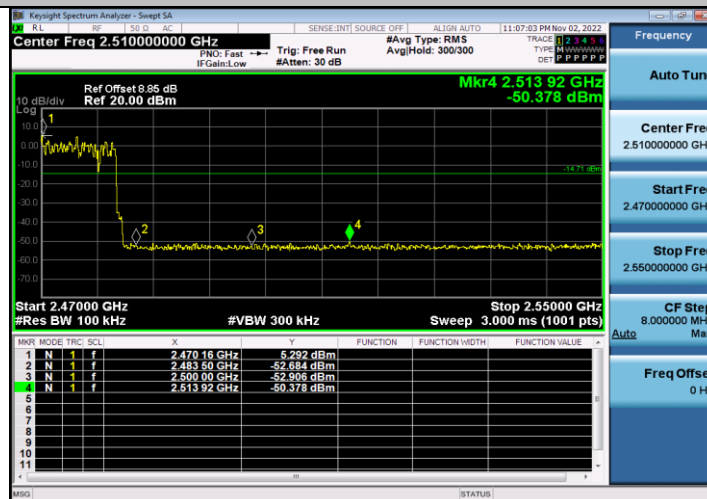


3DH5_Ant1_Low_2402

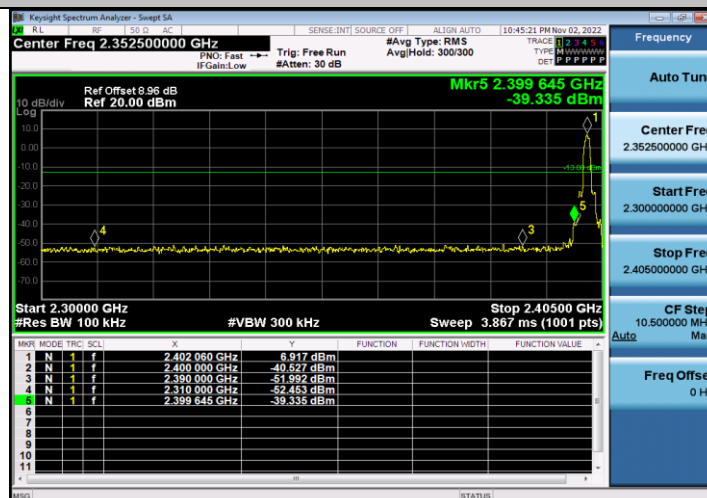


3DH5_Ant1_High_2480

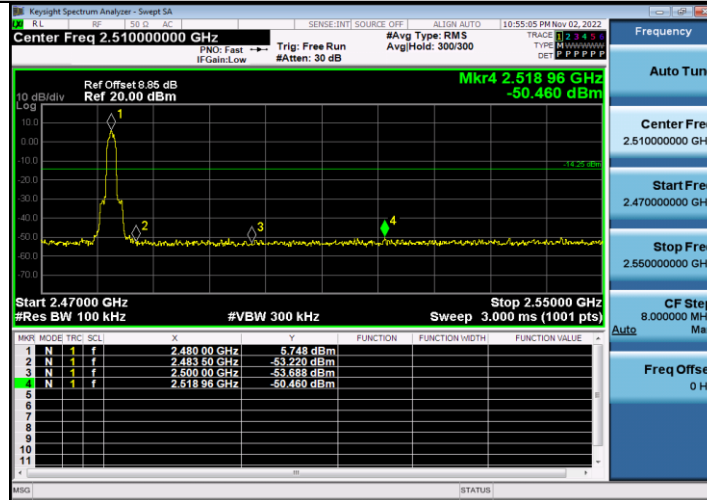

3DH5_Ant1_Low_Hop_2402

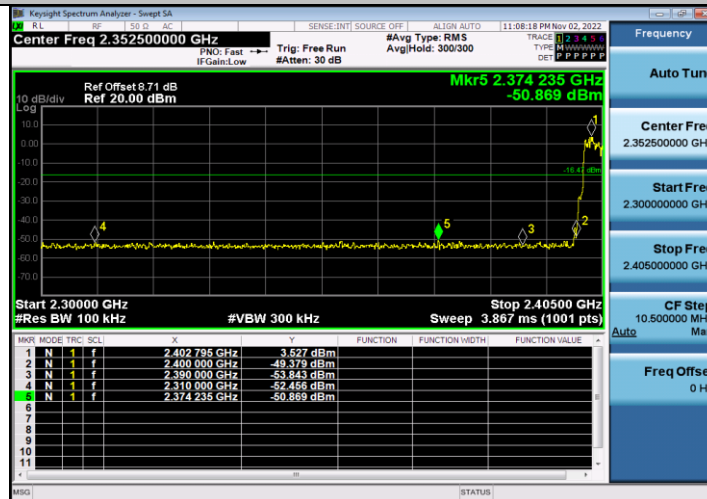

3DH5_Ant1_High_Hop_2480

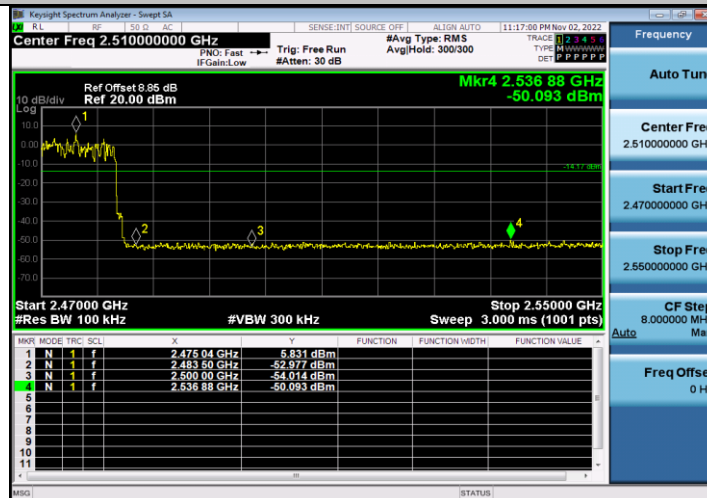


4.8 Conducted Spurious Emissions

4.8.1 Limit

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 Test Setup

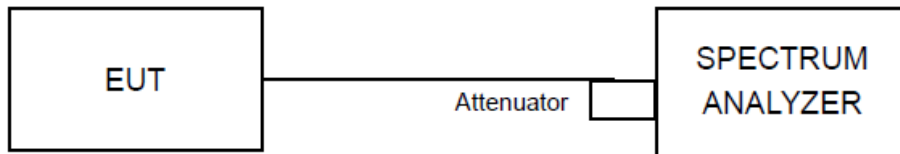

4.8.3 Test Procedures

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 Deviation of Test Standard

No deviation.


4.8.5 Test Result

TestMode	Antenna	Channel	FreqRange	RefLevel	Result	Limit	Verdict
DH5	Ant1	2402	Reference	7.46	7.46	---	PASS
			30~1000	7.46	-63.44	<=-12.54	PASS
			1000~26500	7.46	-29.42	<=-12.54	PASS
		2441	Reference	5.87	5.87	---	PASS
			30~1000	5.87	-63.36	<=-14.13	PASS
			1000~26500	5.87	-36.34	<=-14.13	PASS
		2480	Reference	6.47	6.47	---	PASS
			30~1000	6.47	-63.73	<=-13.53	PASS
			1000~26500	6.47	-36.17	<=-13.53	PASS
2DH5	Ant1	2402	Reference	7.10	7.10	---	PASS
			30~1000	7.10	-63.3	<=-12.9	PASS
			1000~26500	7.10	-35.76	<=-12.9	PASS
		2441	Reference	5.30	5.30	---	PASS
			30~1000	5.30	-64.41	<=-14.71	PASS
			1000~26500	5.30	-40.91	<=-14.71	PASS
		2480	Reference	5.72	5.72	---	PASS
			30~1000	5.72	-64.02	<=-14.28	PASS
			1000~26500	5.72	-34.57	<=-14.28	PASS
3DH5	Ant1	2402	Reference	7.21	7.21	---	PASS
			30~1000	7.21	-62.83	<=-12.79	PASS
			1000~26500	7.21	-37.04	<=-12.79	PASS
		2441	Reference	5.77	5.77	---	PASS
			30~1000	5.77	-63.11	<=-14.23	PASS
			1000~26500	5.77	-39.64	<=-14.23	PASS
		2480	Reference	6.28	6.28	---	PASS
			30~1000	6.28	-63.84	<=-13.72	PASS
			1000~26500	6.28	-39.14	<=-13.72	PASS


DH5_Ant1_2402_0~Reference



DH5_Ant1_2402_30~1000

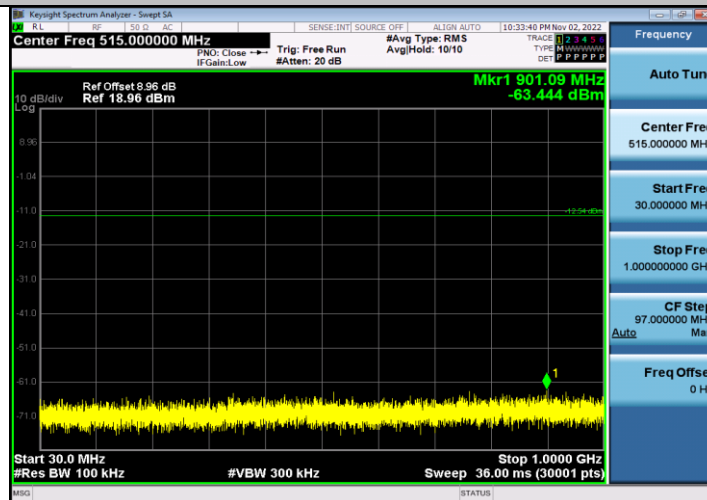


DH5_Ant1_2402_1000~26500

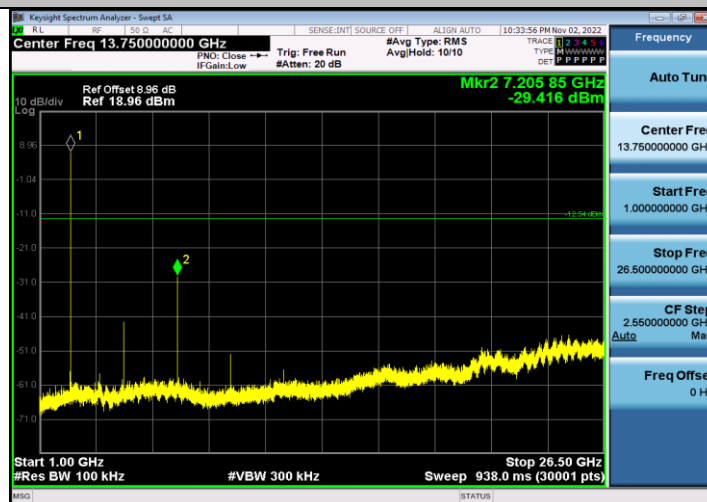


DH5_Ant1_2441_0~Reference



DH5_Ant1_2441_30~1000

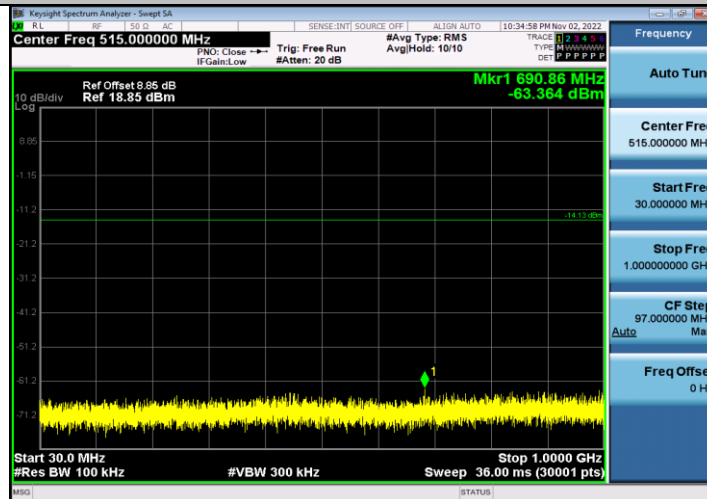


DH5_Ant1_2441_1000~26500

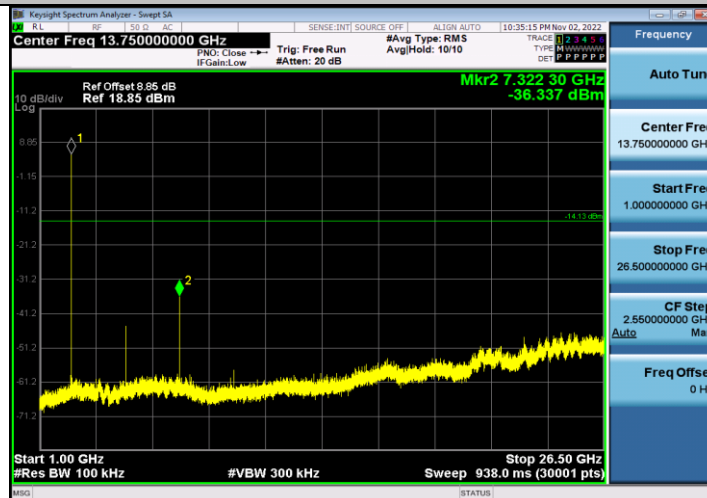


DH5_Ant1_2480_0~Reference



DH5_Ant1_2480_30~1000

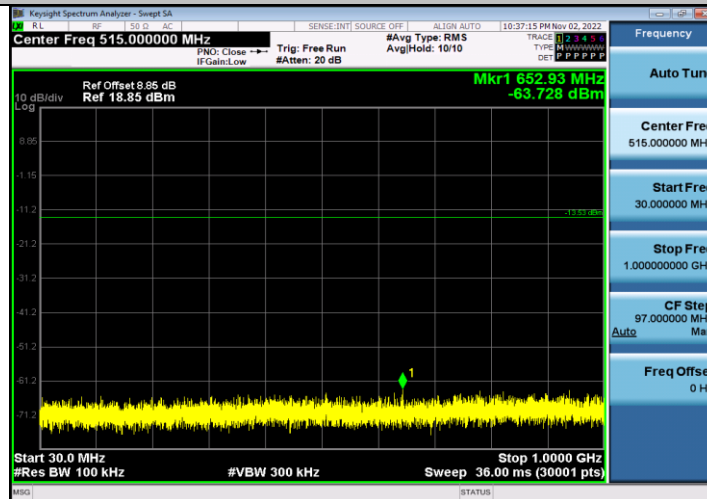


DH5_Ant1_2480_1000~26500

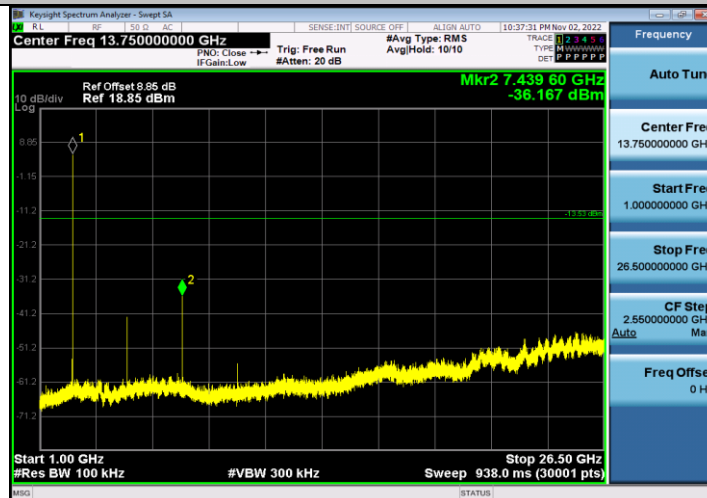

2DH5_Ant1_2402_0~Reference



2DH5_Ant1_2402_30~1000

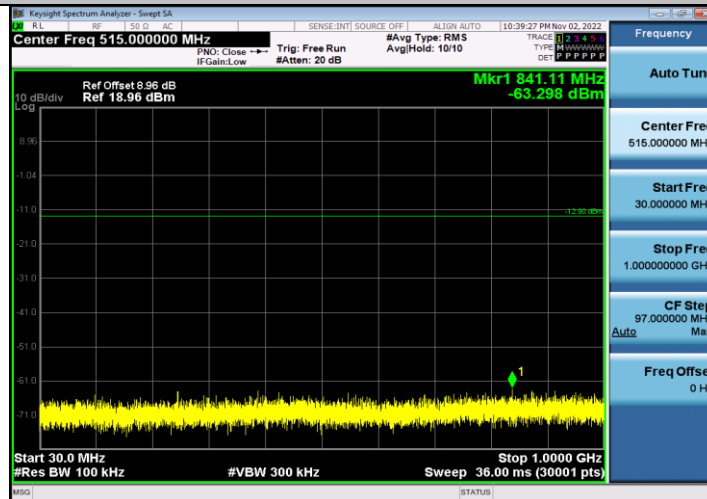

2DH5_Ant1_2402_1000~26500

