


TEST REPORT

FCC ID.	2AUCLLM-1001	
Test Report No.	TCT221205E903	
Date of issue	Dec. 27, 2022	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name	FX Technology Limited	
Address	2 Stone Buildings, Lincoln's Inn, London WC2A 3TH, United Kingdom	
Manufacturer's name ...	FX Technology Limited	
Address	2 Stone Buildings, Lincoln's Inn, London WC2A 3TH, United Kingdom	
Standard(s)	FCC CFR Title 47 Part 15 Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013	
Product Name	Linxdot Concentrator Module	
Trade Mark	Linxdot	
Model/Type reference	LM-1001	
Rating(s)	DC 3.3V	
Date of receipt of test item	Dec. 05, 2022	
Date (s) of performance of test	Jun. 08, 2022 - Dec. 27, 2022	
Tested by (+signature) ...	Aaron MO	
Check by (+signature)	Beryl ZHAO	
Approved by (+signature) :	Tomsin	

**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
1.3. Operation Frequency	4
2. Test Result Summary	5
3. General Information.....	6
3.1. Test environment and mode.....	6
3.2. Description of Support Units.....	6
4. Facilities and Accreditations	7
4.1. Facilities	7
4.2. Location	7
4.3. Measurement Uncertainty.....	7
5. Test Results and Measurement Data	8
5.1. Antenna requirement	8
5.2. Conducted Emission.....	9
5.3. Conducted Output Power	13
5.4. 20dB Occupy Bandwidth	15
5.5. Carrier Frequencies Separation	18
5.6. Hopping Channel Number	21
5.7. Dwell Time.....	24
5.8. Pseudorandom Frequency Hopping Sequence.....	27
5.9. Conducted Band Edge Measurement.....	28
5.10. Conducted Spurious Emission Measurement.....	30
5.11. Radiated Spurious Emission Measurement	32
Appendix A: Photographs of Test Setup	
Appendix B: Photographs of EUT	

1. General Product Information

1.1. EUT description

Product Name.....:	Linxdot Concentrator Module
Model/Type reference.....:	LM-1001
Sample Number.....:	TCT221205E903-0101
Operation Frequency	125KHz: 902.3MHz~914.9MHz
Number of Channel	64 for FHSS
Modulation Type	LoRa
Modulation Technology	Hybrid system
Antenna Type.....:	External Antenna
Antenna Gain.....:	2dBi
Rating(s).....:	DC 3.3V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

None.

1.3. Operation Frequency

125KHz for FHSS

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	902.3MHz	16	905.5MHz	32	908.7MHz	48	911.9MHz
1	902.5MHz	17	905.7MHz	33	908.9MHz	49	912.1MHz
2	902.7MHz	18	905.9MHz	34	909.1MHz	50	912.3MHz
3	902.9MHz	19	906.1MHz	35	909.3MHz	51	912.5MHz
4	903.1MHz	20	906.3MHz	36	909.5MHz	52	912.7MHz
5	903.3MHz	21	906.5MHz	37	909.7MHz	53	912.9MHz
6	903.5MHz	22	906.7MHz	38	909.9MHz	54	913.1MHz
7	903.7MHz	23	906.9MHz	39	910.1MHz	55	913.3MHz
8	903.9MHz	24	907.1MHz	40	910.3MHz	56	913.5MHz
9	904.1MHz	25	907.3MHz	41	910.5MHz	57	913.7MHz
10	904.3MHz	26	907.5MHz	42	910.7MHz	58	913.9MHz
11	904.5MHz	27	907.7MHz	43	910.9MHz	59	914.1MHz
12	904.7MHz	28	907.9MHz	44	911.1MHz	60	914.3MHz
13	904.9MHz	29	908.1MHz	45	911.3MHz	61	914.5MHz
14	905.1MHz	30	908.3MHz	46	911.5MHz	62	914.7MHz
15	905.3MHz	31	908.5MHz	47	911.7MHz	63	914.9MHz

Remark: Channel 0, 32 & 63 have been tested

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)	PASS
Occupied Bandwidth	§15.247 (a)	PASS
Carrier Frequencies Separation	§15.247 (a)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (f)	PASS
Radiated Emission	§15.205/§15.209	PASS
Band Edge	§15.247(d)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. General Information

3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25.3 °C	24.1 °C
Humidity:	56 % RH	52 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
Software Information:	Xshell	
Power Level:	27	
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel	
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.		

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Test backplane	R01	/	/	LD-1002

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339


4.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB


5. Test Results and Measurement Data

5.1. Antenna requirement

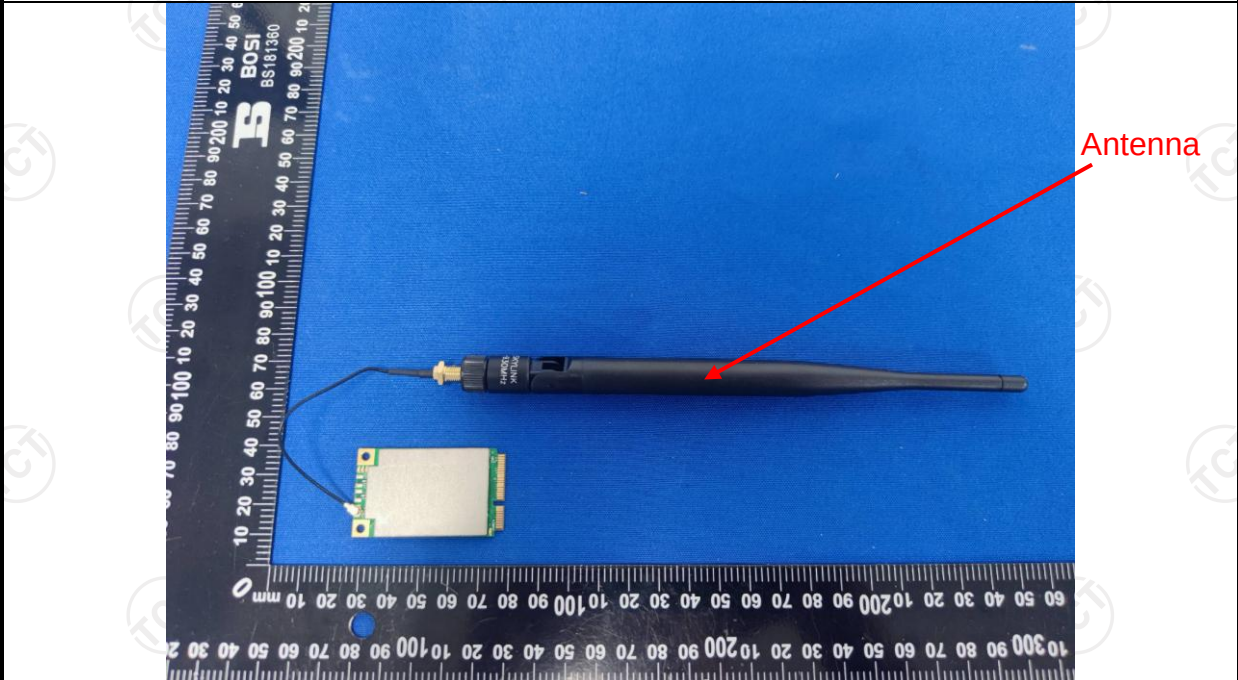Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is external antenna which permanently attached, and the best case gain of the antenna is 2dBi.	
	

5.2. Conducted Emission

5.2.1. Test Specification

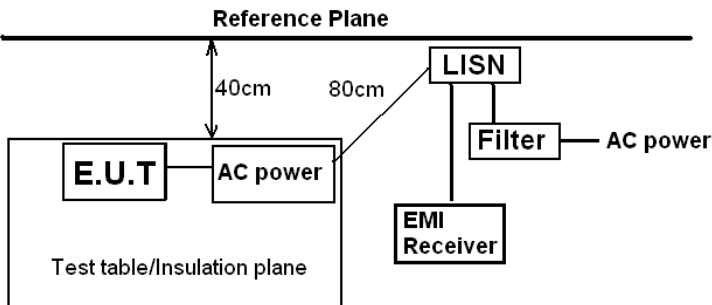Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane  Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Transmitting Mode														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.														
Test Result:	PASS														


5.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jul. 03, 2023
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Feb. 24, 2023
Line-5	TCT	CE-05	/	Jul. 03, 2024
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

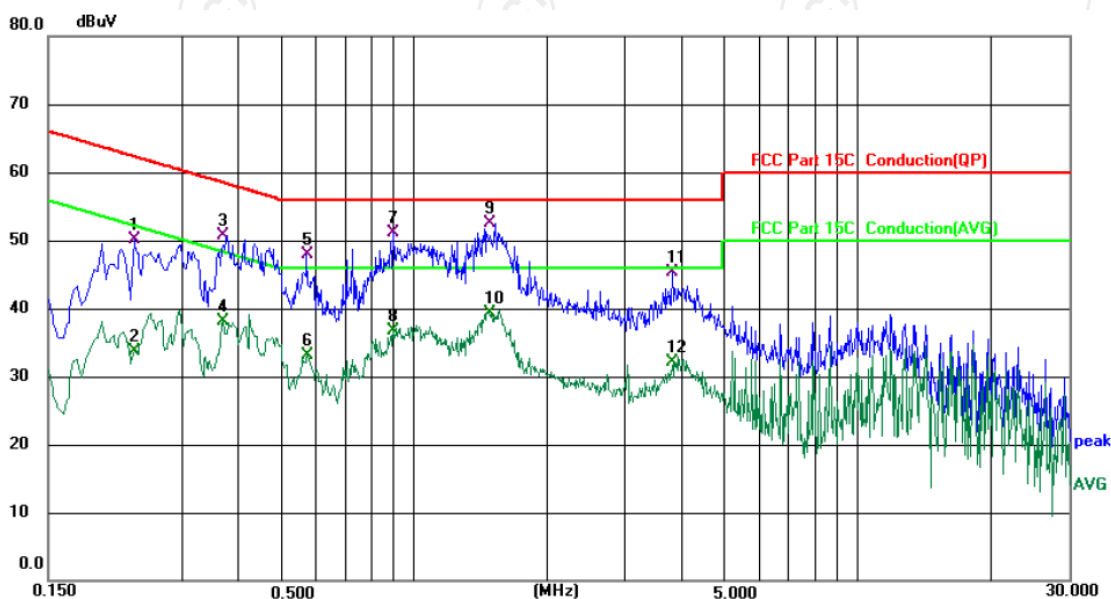

Site 844 Shielding Room

Phase: L1

Temperature: 25.3 (°C)

Humidity: 56 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1		0.2340	39.79	10.27	50.06	62.31	-12.25	QP	
2		0.2340	23.53	10.27	33.80	52.31	-18.51	AVG	
3		0.3700	40.43	10.21	50.64	58.50	-7.86	QP	
4		0.3700	27.93	10.21	38.14	48.50	-10.36	AVG	
5		0.5740	37.82	10.11	47.93	56.00	-8.07	QP	
6		0.5740	23.00	10.11	33.11	46.00	-12.89	AVG	
7		0.9020	41.08	10.11	51.19	56.00	-4.81	QP	
8		0.9020	26.55	10.11	36.66	46.00	-9.34	AVG	
9	*	1.4780	42.38	10.07	52.45	56.00	-3.55	QP	
10		1.4780	29.28	10.07	39.35	46.00	-6.65	AVG	
11		3.8300	35.26	10.05	45.31	56.00	-10.69	QP	
12		3.8300	22.10	10.05	32.15	46.00	-13.85	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

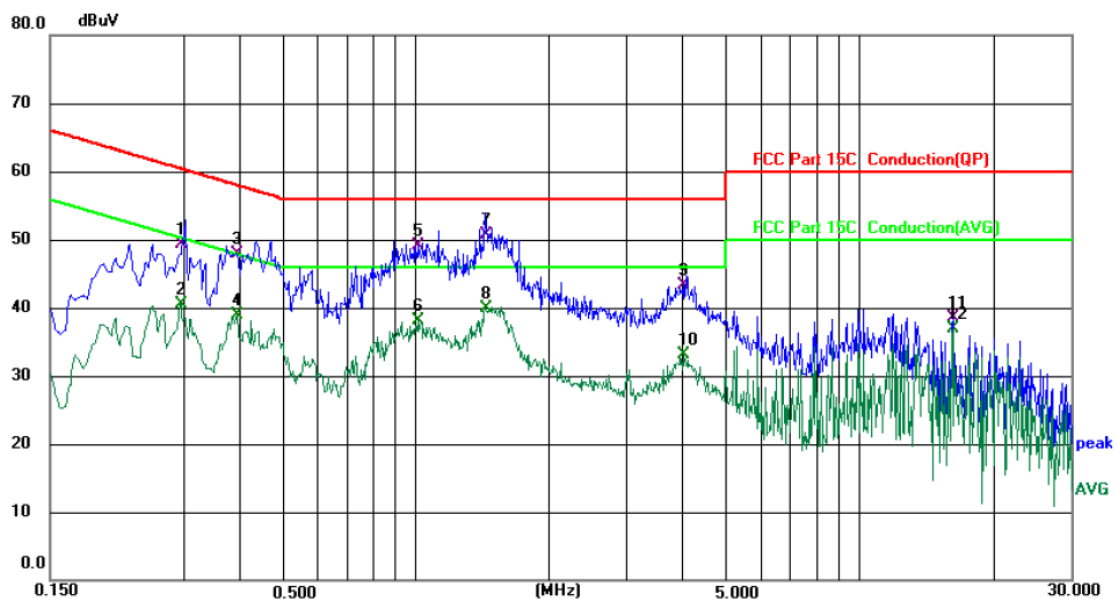

Site 844 Shielding Room

Phase: *N*

Temperature: 25.3 (°C)

Humidity: 56 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2939	39.09	10.24	49.33	60.41	-11.08	QP	
2		0.2939	30.31	10.24	40.55	50.41	-9.86	AVG	
3		0.3940	37.75	10.20	47.95	57.98	-10.03	QP	
4		0.3940	28.66	10.20	38.86	47.98	-9.12	AVG	
5		1.0140	38.98	10.11	49.09	56.00	-6.91	QP	
6		1.0140	28.00	10.11	38.11	46.00	-7.89	AVG	
7	*	1.4379	40.68	10.12	50.80	56.00	-5.20	QP	
8		1.4379	29.78	10.12	39.90	46.00	-6.10	AVG	
9		4.0140	33.19	10.15	43.34	56.00	-12.66	QP	
10		4.0140	22.96	10.15	33.11	46.00	-12.89	AVG	
11		16.2300	28.15	10.43	38.58	60.00	-21.42	QP	
12		16.2300	26.56	10.43	36.99	50.00	-13.01	AVG	

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Note2:

Measurements were conducted in all three channels (high, middle, low) and the worst case Mode (Highest channel) was submitted only.

5.3. Conducted Output Power

5.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	KDB 558074 D01 v05r02
Limit:	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
Test Setup:	 The diagram illustrates the test setup. On the left is a green box labeled 'Power Meter'. A cable connects it to a small white box labeled 'Attenuator'. Another cable connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The RF output of EUT was connected to the Power Meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Read the value and record the results in the test report.
Test Result:	PASS

5.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Agilent	E4418B	MY45100357	Jul. 04, 2023
Power Sensor	Agilent	8481A	MY41091497	Jul. 04, 2023

5.3.3. Test Data

For FHSS

125KHz			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	20.96	30.00	PASS
Middle	21.47	30.00	PASS
Highest	21.78	30.00	PASS

5.4. 20dB Occupy Bandwidth

5.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)
Test Method:	KDB 558074 D01 v05r02
Limit:	For frequency hopping systems operating in the 902-928 MHz band: The maximum allowed 20 dB bandwidth of the hopping channel is 250 kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test Result:	PASS

5.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023

5.4.3. Test data


For FHSS:

Test channel	20dB Occupy Bandwidth (kHz)		
	125KHz	Limit	Conclusion
Lowest	135.8	$\leq 250k$	PASS
Middle	135.1	$\leq 250k$	PASS
Highest	135.8	$\leq 250k$	PASS


Test plots as follows:

125KHz


Lowest channel

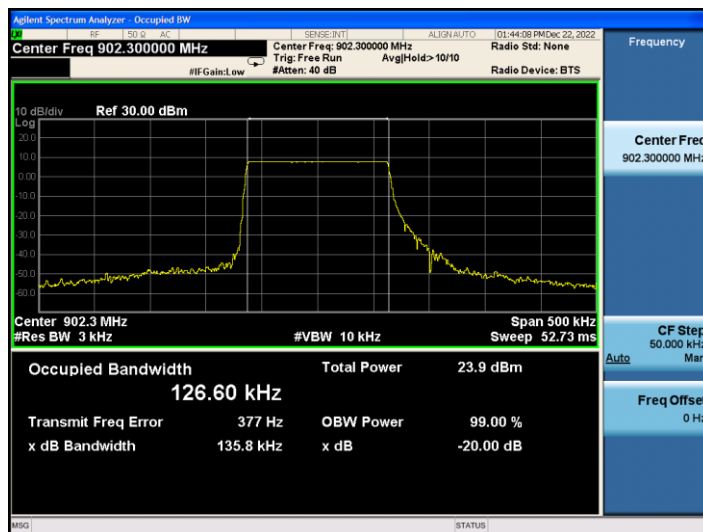

Middle channel

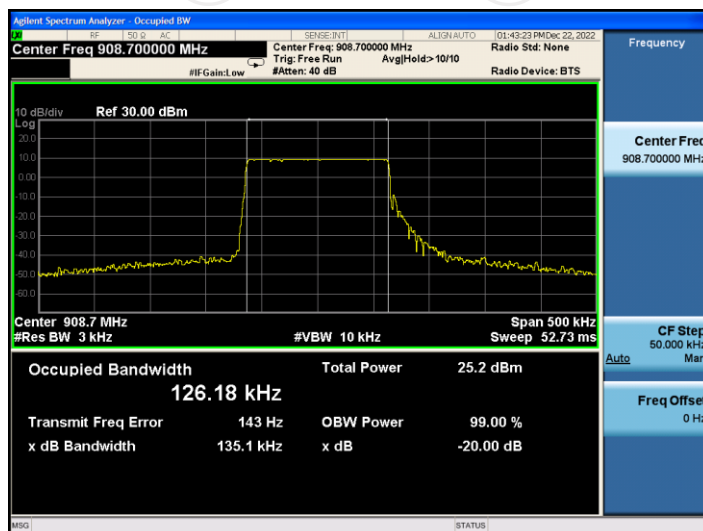

Highest channel

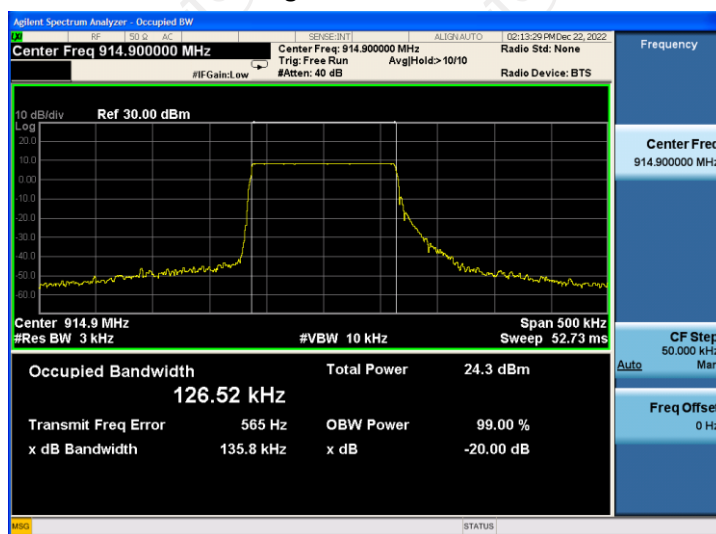

5.5. Carrier Frequencies Separation

5.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)
Test Method:	KDB 558074 D01 v05r02
Limit:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Enable the EUT hopping function. 4. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold. 5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

5.5.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023

5.5.3. Test data


For FHSS:

125KHz			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	201.0	136.0	PASS
Middle	196.5	136.0	PASS
Highest	198.5	136.0	PASS


Test plots as follows:

125KHz


Lowest channel

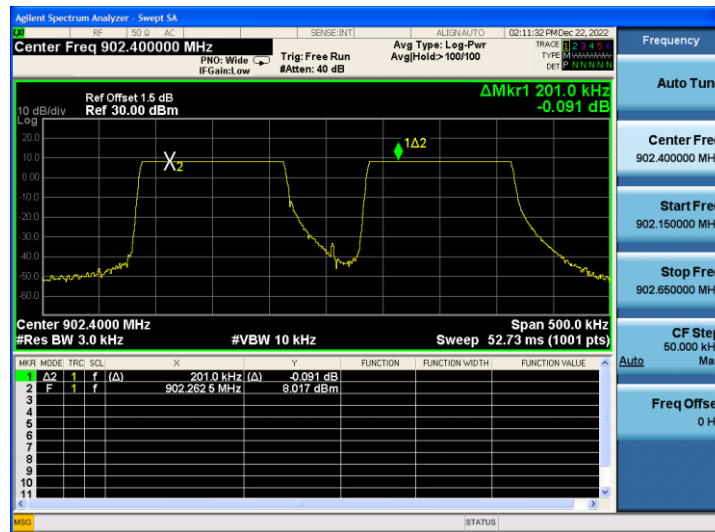

Middle channel

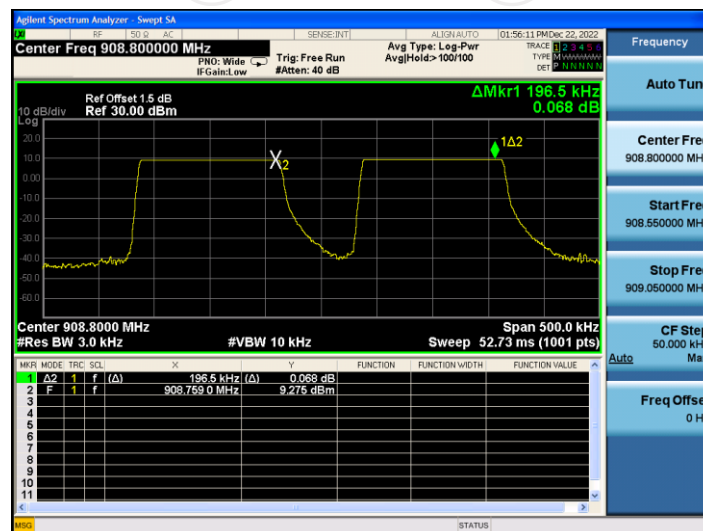


Highest channel

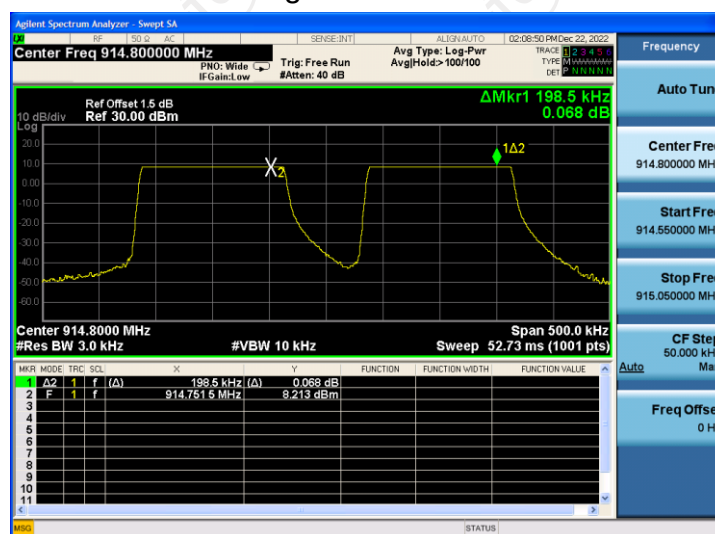

5.6. Hopping Channel Number

5.6.1. Test Specification

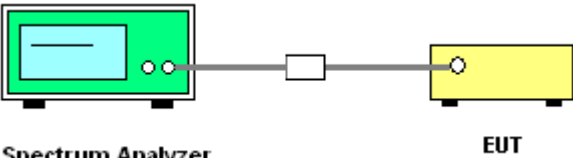Test Requirement:	FCC Part15 C Section 15.247 (a)
Test Method:	KDB 558074 D01 v05r02
Limit:	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.
Test Setup:	 The diagram shows a green Spectrum Analyzer connected to a yellow EUT (Equipment Under Test) via a white attenuator. The Spectrum Analyzer is on the left, and the EUT is on the right. A cable connects the two, passing through the attenuator.
Test Mode:	Hopping mode
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Enable the EUT hopping function. 4. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold. 5. The number of hopping frequency used is defined as the number of total channel. 6. Record the measurement data in report.
Test Result:	PASS

5.6.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023


5.6.3. Test data

For FHSS:

Mode	Hopping channel numbers	Limit	Result
125KHz	64	50	PASS

Test plots as follows:

125KHz

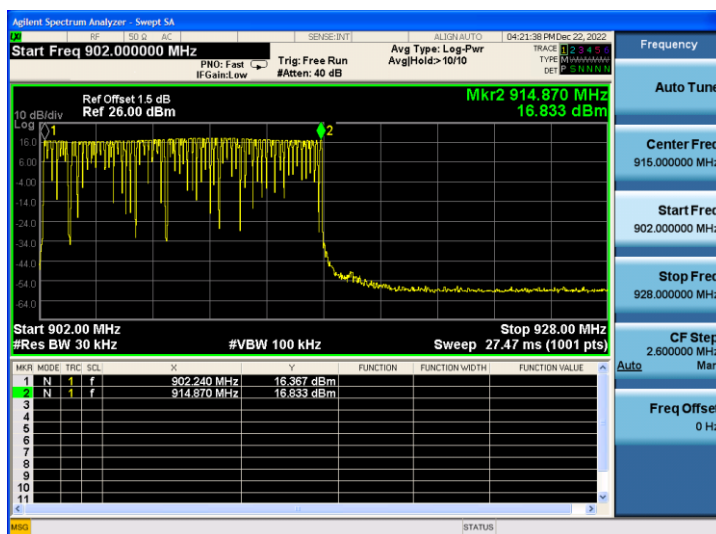

5.7. Dwell Time

5.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (f)
Test Method:	KDB 558074 D01 v05r02
Limit:	For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.
Test Setup:	 The diagram shows a Spectrum Analyzer (green box) connected to an EUT (yellow box) via a cable and an attenuator (white box). The Spectrum Analyzer is labeled 'Spectrum Analyzer' and the EUT is labeled 'EUT'.
Test Mode:	Hopping mode
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Enable the EUT hopping function. 4. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report.
Test Result:	PASS

5.7.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023



5.7.3. Test Data

For FHSS:

Mode	Dwell time (ms)	Limit (second)	Result
125KHz	330.00	0.4	PASS

Test plots as follows:

125KHz

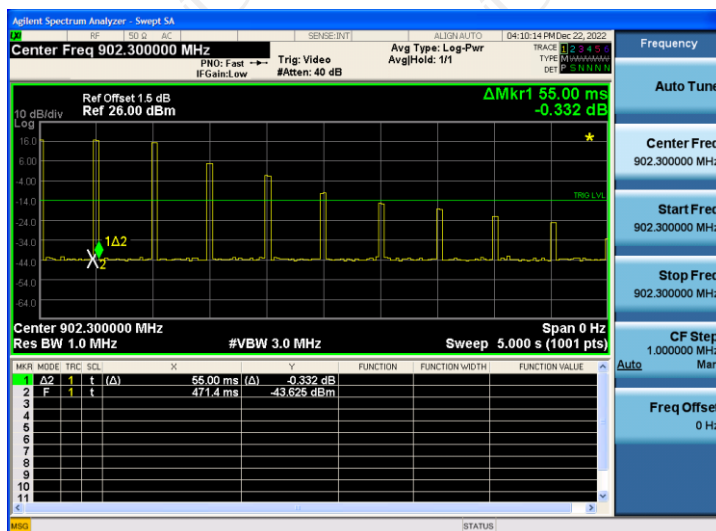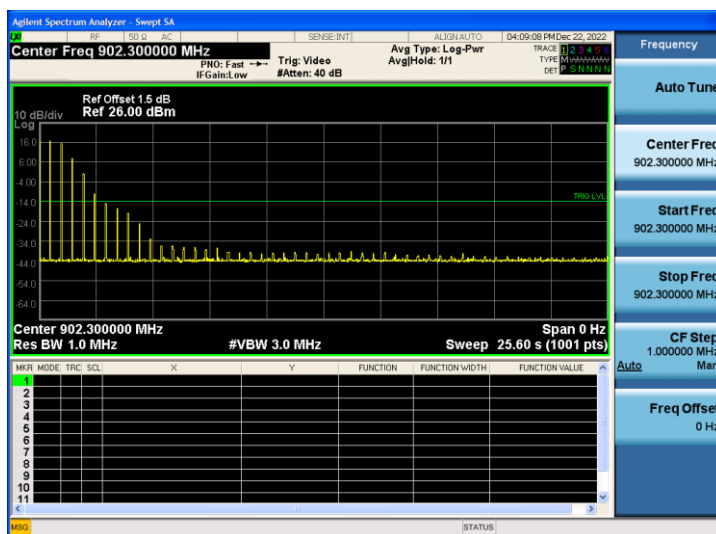

5.8. Pseudorandom Frequency Hopping Sequence

Test Requirement:

FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

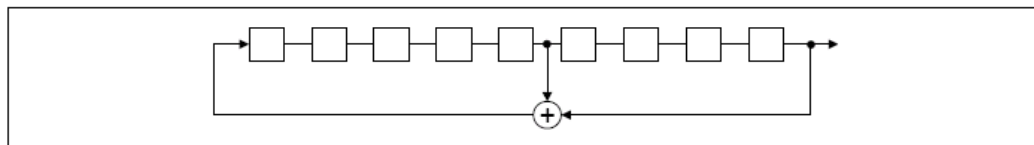

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

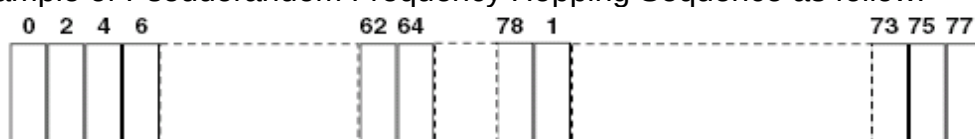

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

5.9. Conducted Band Edge Measurement

5.9.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB 558074 D01 v05r02
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 The diagram shows a Spectrum Analyzer (represented by a green box with a screen) connected to an EUT (represented by a yellow box) via a cable. The Spectrum Analyzer is labeled 'Spectrum Analyzer' and the EUT is labeled 'EUT'.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set to the maximum power setting and enable the EUT transmit continuously. 2. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 3. Enable hopping function of the EUT and then repeat step 2 and 3. 4. Measure and record the results in the test report.
Test Result:	PASS

5.9.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023


5.9.3. Test Data

125KHz

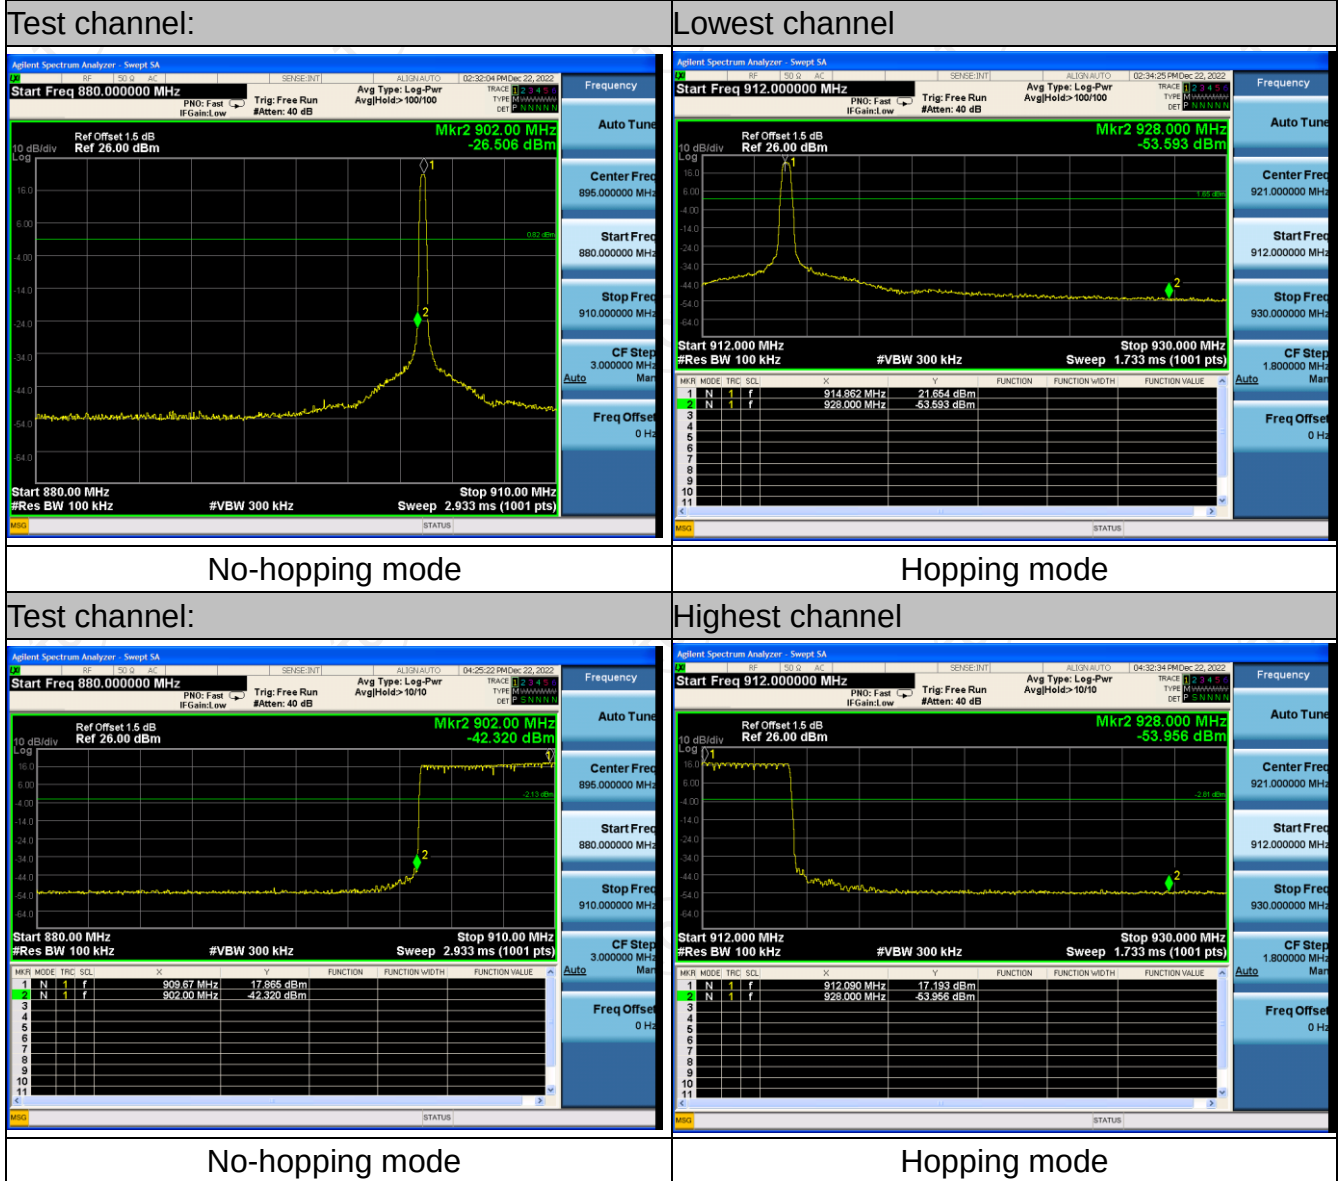

5.10. Conducted Spurious Emission Measurement

5.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB 558074 D01 v05r02
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer (represented by a green box) is connected to an EUT (represented by a yellow box) through an attenuator (represented by a small white box). The connection is made via RF cables.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS


5.10.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023


5.10.3. Test Data

125KHz


Lowest Channel

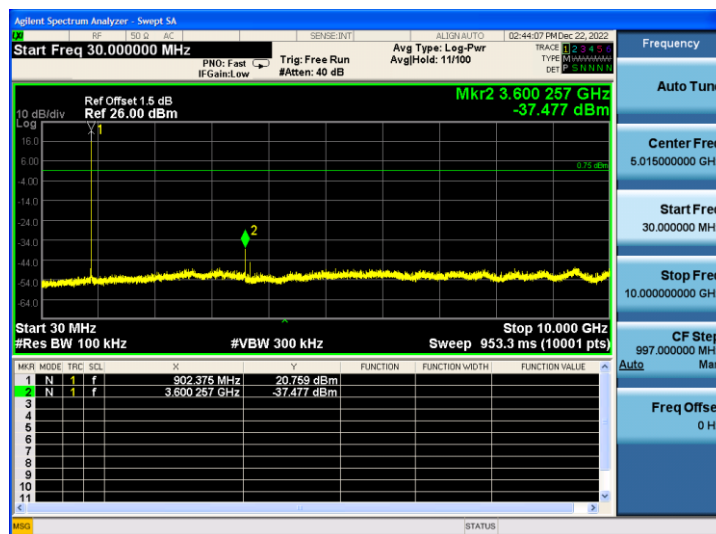

Middle Channel

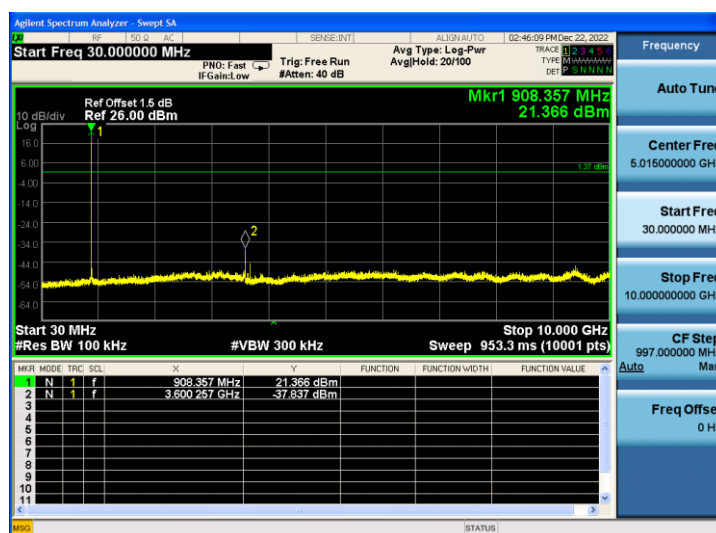



Highest Channel

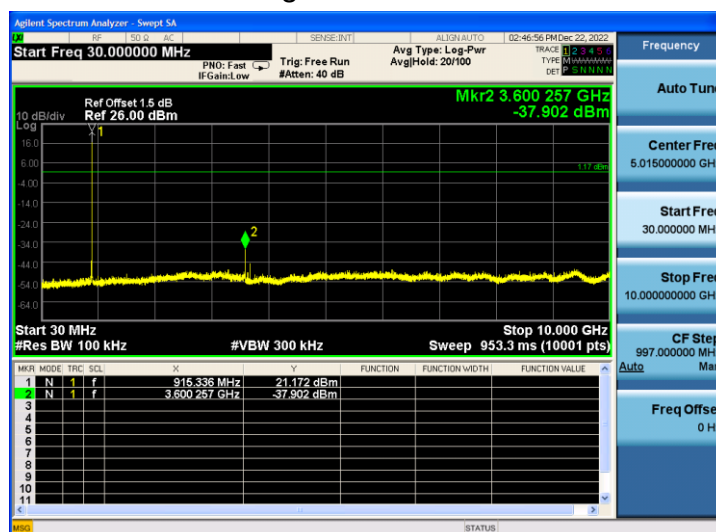


5.11. Radiated Spurious Emission Measurement

5.11.1. Test Specification

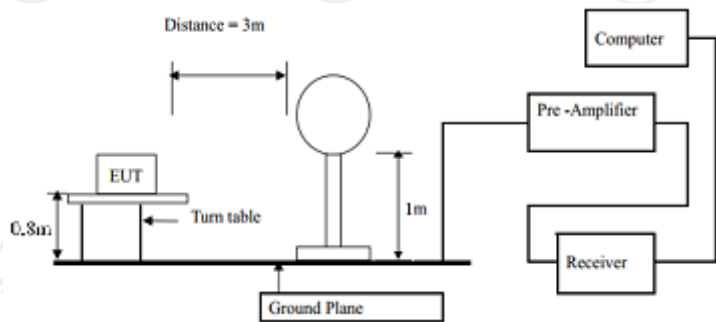Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz		500	3	Average
			5000	3	Peak
	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

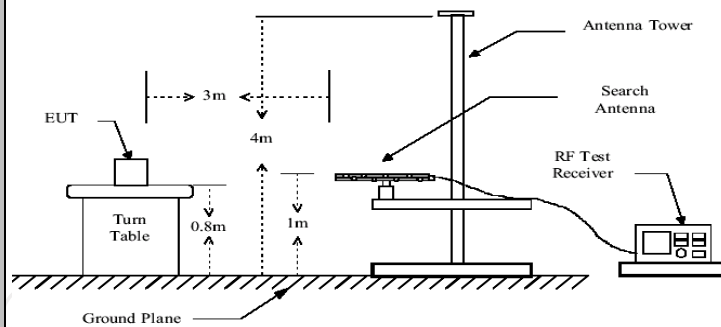

Above 1GHz

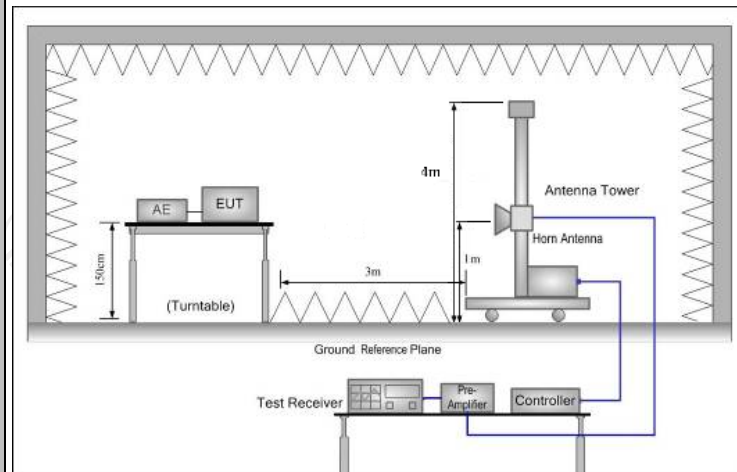

Test Mode:

Transmitting mode with modulation

Test Procedure:

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2013 Measurement Guidelines.
2. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission

	and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS

5.11.2. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jul. 03, 2023
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 03, 2023
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Feb. 24, 2023
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Feb. 24, 2023
Pre-amplifier	HP	8447D	2727A05017	Jul. 03, 2023
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 11, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Apr. 10, 2023
Antenna Mast	Keleto	RE-AM	/	/
Coaxial cable	SKET	RC-18G-N-M	/	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.11.3. Test Data

Please refer to following diagram for individual

Below 1GHz

Horizontal:

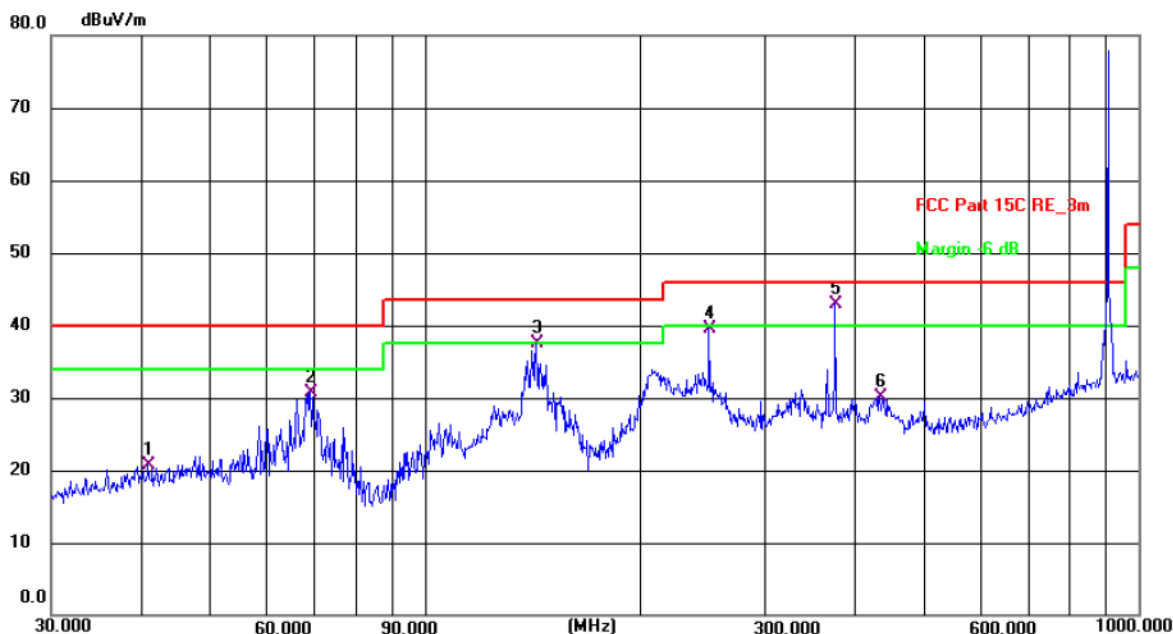

Site #2 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 24.1(C) Humidity: 52 %

Limit: FCC Part 15C RE_3m

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	40.9881	6.77	14.00	20.77	40.00	-19.23	QP	P	
2	69.1141	19.37	11.26	30.63	40.00	-9.37	QP	P	
3	143.3261	24.15	13.28	37.43	43.50	-6.07	QP	P	
4	250.3012	26.90	12.62	39.52	46.00	-6.48	QP	P	
5 *	375.9385	26.50	16.39	42.89	46.00	-3.11	QP	P	
6	434.0651	12.14	17.98	30.12	46.00	-15.88	QP	P	

Vertical:

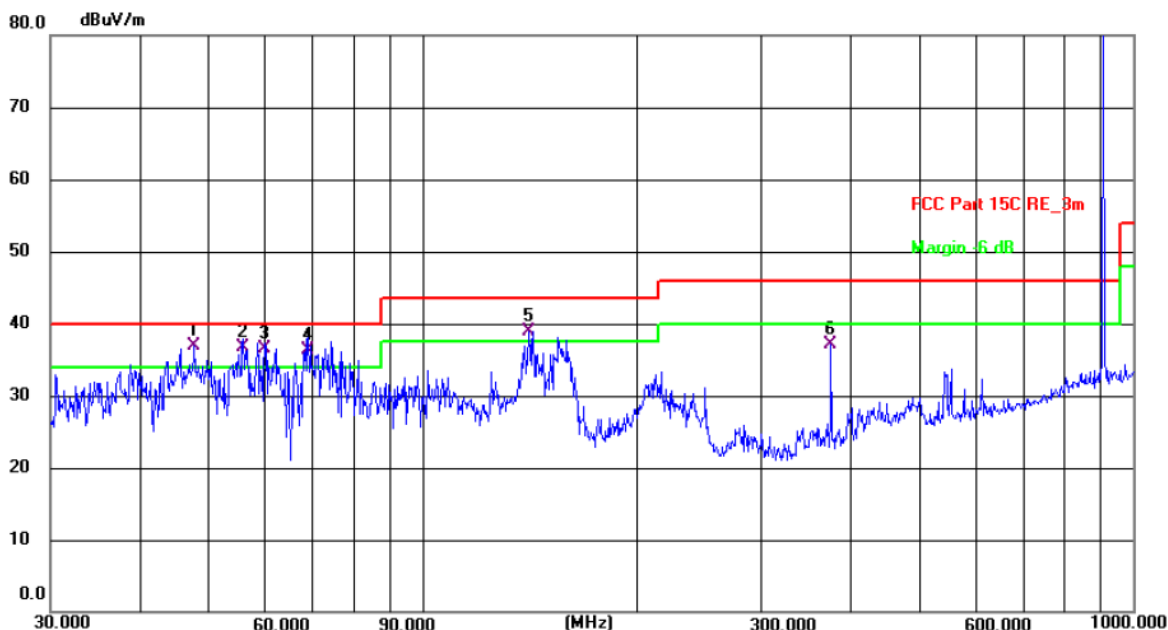

Site #2 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24.1(C) Humidity: 52 %

Limit: FCC Part 15C RE_3m

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	47.8260	22.97	13.84	36.81	40.00	-3.19	QP	P	
2 !	56.0007	23.40	13.39	36.79	40.00	-3.21	QP	P	
3 !	60.0690	23.45	13.12	36.57	40.00	-3.43	QP	P	
4 !	69.1140	25.11	11.26	36.37	40.00	-3.63	QP	P	
5 !	141.3296	25.68	13.26	38.94	43.50	-4.56	QP	P	
6	375.9384	20.79	16.39	37.18	46.00	-8.82	QP	P	

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and the worst case Mode (Highest channel) was submitted only.

3. Freq. = Emission frequency in MHz

Measurement (dBuV/m) = Reading level (dBuV) + Corr. Factor (dB)

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Limit (dBuV/m) = Limit stated in standard


Margin (dB) = Measurement (dBuV/m) – Limits (dBuV/m)

* is meaning the worst frequency has been tested in the test frequency range

Test Result of Radiated Spurious at Band edges

Lowest channel 902.3:

Horizontal:

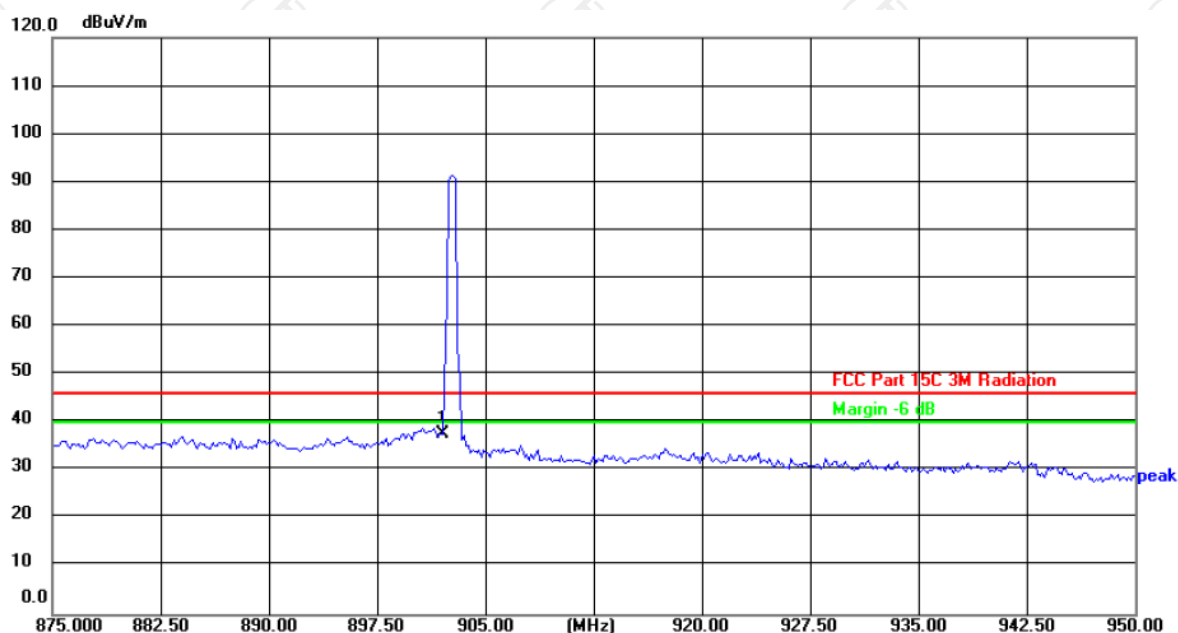

Site: #3 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 24(°C)


Humidity: 52 %

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	902.0000	35.92	1.81	37.73	46.00	-8.27	peak	P	

Vertical:

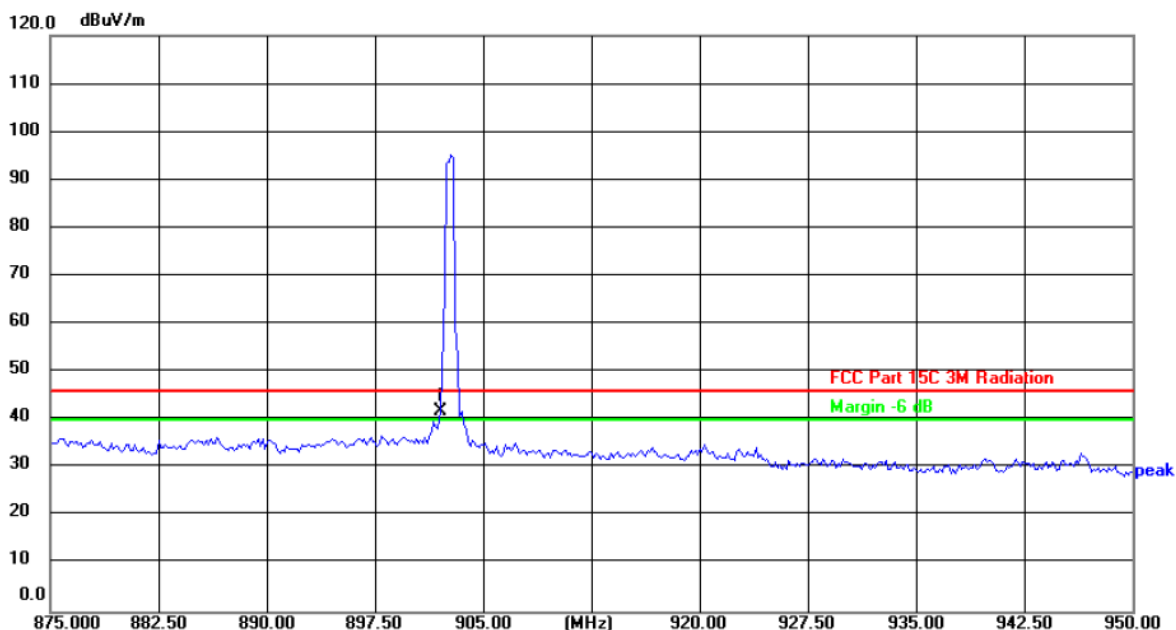

Site: #3 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24(°C)

Humidity: 52 %


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	902.0000	39.92	1.81	41.73	46.00	-4.27	peak	P	

Highest channel 914.9:

Horizontal:

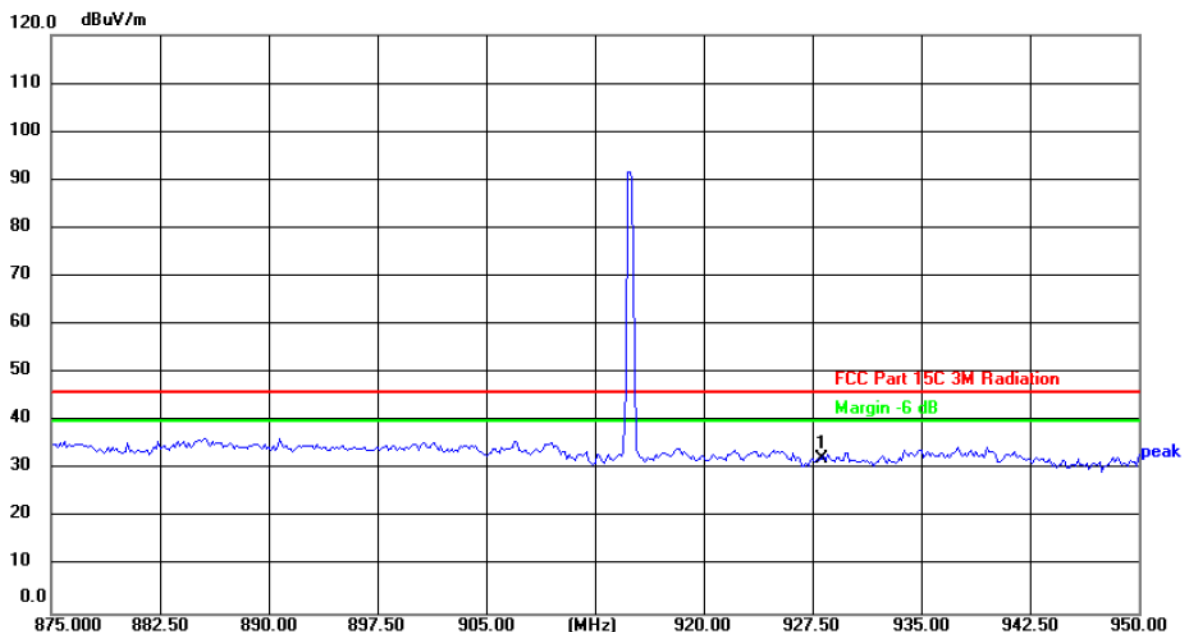

Site: #3 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 24(°C)


Humidity: 52 %

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	928.0000	30.37	1.83	32.20	46.00	-13.80	peak	P	

Vertical:

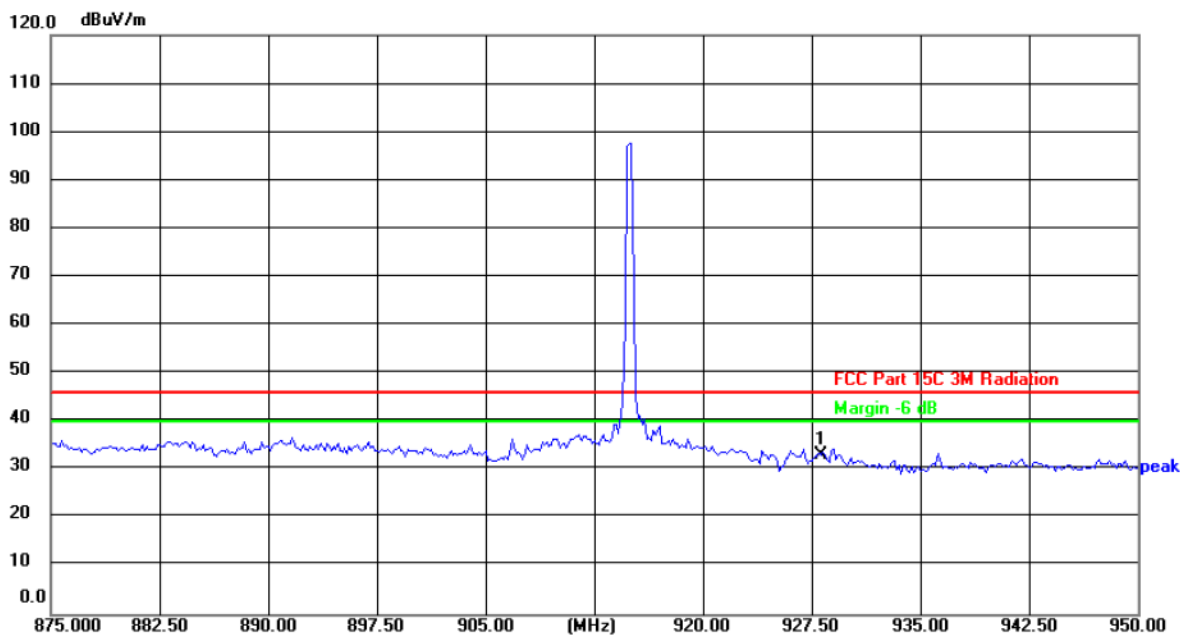

Site: #3 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24(°C)

Humidity: 52 %

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	928.0000	31.34	1.83	33.17	46.00	-12.83	peak	P	

Above 1GHz

125KHz

Low channel: 902.3 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
1804.6	H	47.16	---	0.66	47.82	---	74	54	-6.18
2706.9	H	36.85	---	9.50	46.35	---	74	54	-7.65
---	H	---	---	---	---	---	---	---	---
1804.6	V	46.59	---	0.66	47.25	---	74	54	-6.75
2706.9	V	36.03	---	9.50	45.53	---	74	54	-8.47
---	V	---	---	---	---	---	---	---	---

Middle channel: 908.7 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
1817.4	H	45.32	---	0.99	46.31	---	74	54	-7.69
2726.1	H	35.71	---	9.87	45.58	---	74	54	-8.42
---	H	---	---	---	---	---	---	---	---
1817.4	V	47.98	---	0.99	48.97	---	74	54	-5.03
2726.1	V	36.27	---	9.87	46.14	---	74	54	-7.86
---	V	---	---	---	---	---	---	---	---

High channel: 914.9 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
1829.8	H	47.60	---	1.33	48.93	---	74	54	-5.07
2744.7	H	35.42	---	10.22	45.64	---	74	54	-8.36
---	H	---	---	---	---	---	---	---	---
1829.8	V	46.81	---	1.33	48.14	---	74	54	-5.86
2744.7	V	35.06	---	10.22	45.28	---	74	54	-8.72
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

Appendix A: Photographs of Test Setup

Refer to the Appendix

Appendix B: Photographs of EUT

Refer to the Appendix

*******END OF REPORT*******