

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Mobile Phone

ISSUED TO
vivo Mobile Communication Co., Ltd.

No.168 Jinghai East Rd., Chang'an, Dongguan, Guangdong, China



Tested by: Ye Hongji
Ye Hongji

Date: Jun 28, 2021

Approved by: Wei Yanquan
(Chief Engineer)

Date: Jun 28, 2021

Report No.: BL-SZ2150618-601
EUT Name: Mobile Phone
Model Name: V2057
Brand Name: vivo
Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)
FCC ID: 2AUCY-V2058

Test conclusion: Pass
Test Date: May 27, 2021 ~ Jun. 16, 2021
Date of Issue: Jun. 28, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jun. 28, 2021</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Measurement Uncertainty	12
4.4	Description of Test Setup	13
4.4.1	For Antenna Port Test	13
4.4.2	For AC Power Supply Port Test	13
4.4.3	For Radiated Test (Below 30 MHz)	14
4.4.4	For Radiated Test (30 MHz-1 GHz)	14
4.4.5	For Radiated Test (Above 1 GHz)	15
4.5	Measurement Results Explanation Example	16
4.5.1	For conducted test items:	16

5	TEST ITEMS	17
5.1	Antenna Requirements	17
5.1.1	Relevant Standards	17
5.1.2	Antenna Anti-Replacement Construction	17
5.1.3	Antenna Gain	17
5.2	Frequency Hopping Systems	18
5.2.1	Relevant Standards	18
5.2.2	Description of the systems	18
5.3	Number of Hopping Frequencies	20
5.3.1	Limit	20
5.3.2	Test Setup	20
5.3.3	Test Procedure	20
5.3.4	Test Result	20
5.4	Peak Output Power	21
5.4.1	Test Limit	21
5.4.2	Test Setup	21
5.4.3	Test Procedure	21
5.4.4	Test Result	21
5.5	Occupied Bandwidth	22
5.5.1	Limit	22
5.5.2	Test Setup	22
5.5.3	Test Procedure	22
5.5.4	Test Result	22
5.6	Carrier Frequency Separation	23
5.6.1	Limit	23
5.6.2	Test Setup	23
5.6.3	Test Procedure	23
5.6.4	Test Result	23
5.7	Time of Occupancy (Dwell time)	24
5.7.1	Limit	24
5.7.2	Test Setup	24
5.7.3	Test Procedure	24
5.7.4	Test Result	25

5.8	Conducted Spurious Emission & Authorized-band band-edge.....	26
5.8.1	Limit.....	26
5.8.2	Test Setup	26
5.8.3	Test Procedure	26
5.8.4	Test Result	26
5.9	Conducted Emission.....	27
5.9.1	Limit.....	27
5.9.2	Test Setup	27
5.9.3	Test Procedure	27
5.9.4	Test Result	27
5.10	Radiated Spurious Emission.....	28
5.10.1	Limit.....	28
5.10.2	Test Setup	28
5.10.3	Test Procedure	28
5.10.4	Test Result	29
5.11	Band Edge (Restricted-band band-edge)	30
5.11.1	Limit.....	30
5.11.2	Test Setup	30
5.11.3	Test Procedure	30
5.11.4	Test Result	30
ANNEX A	TEST RESULT	31
A.1	Number of Hopping Frequency.....	31
A.2	Peak Output Power	32
A.3	20 dB and 99% bandwidth	35
A.4	Hopping Frequency Separation	40
A.5	Average Time of Occupancy	41
A.6	Conducted Spurious Emissions & Authorized-band band-edge.....	44
A.7	Conducted Emissions.....	51
A.8	Radiated Spurious Emission.....	53
A.9	Band Edge (Restricted-band band-edge)	71
ANNEX B	TEST SETUP PHOTOS	74
ANNEX C	EUT EXTERNAL PHOTOS	74
ANNEX D	EUT INTERNAL PHOTOS.....	74

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	vivo Mobile Communication Co., Ltd.
Address	No.168 Jinghai East Rd., Chang'an, Dongguan, Guangdong, China

2.2 Manufacturer Information

Manufacturer	vivo Mobile Communication Co., Ltd.
Address	No.168 Jinghai East Rd., Chang'an, Dongguan, Guangdong, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	V2057
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	MP_0.1
Software Version	PD2103BF_EX_A_3.6.4
Dimensions (Approx.)	163.96*75.3*8.495mm
Weight (Approx.)	193g

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR)
-----------------------------------	--------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	-2.5 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.6 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	Mediatek BT Tool		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 7
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

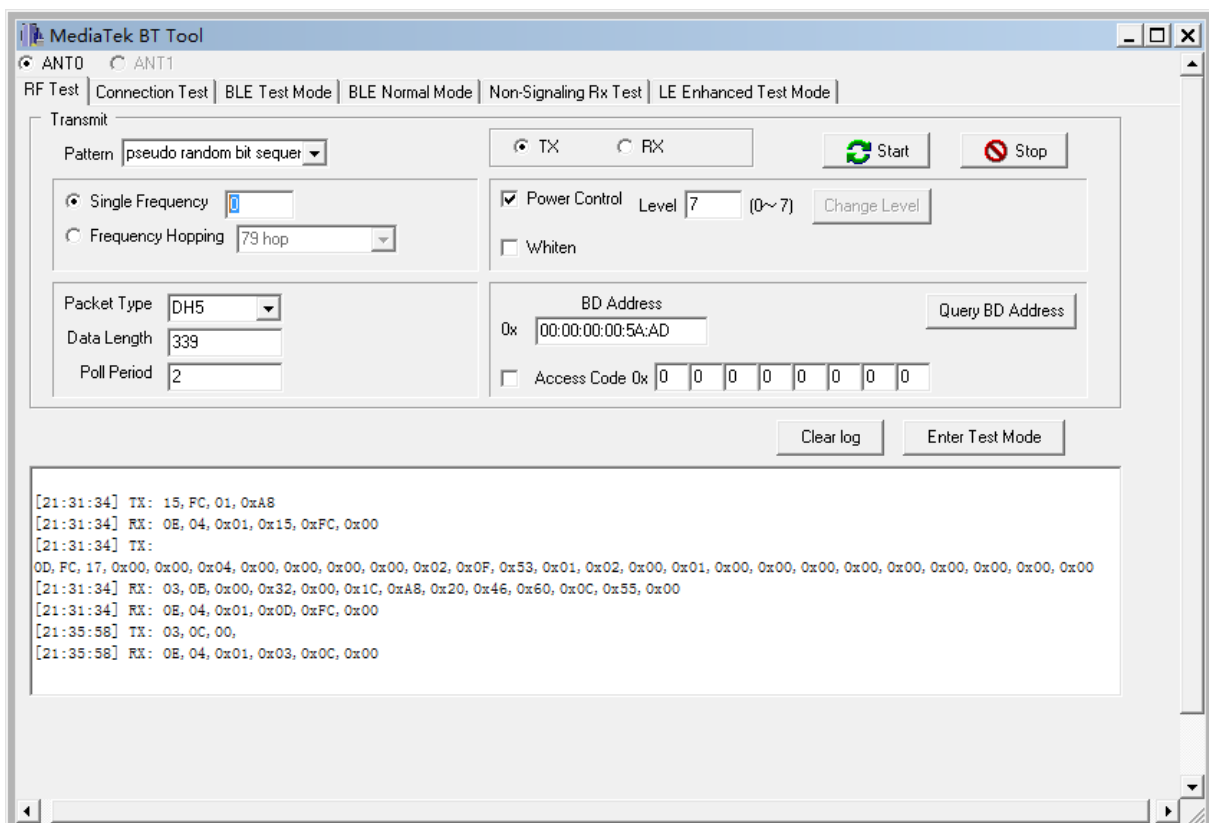

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note ⁴: The only difference between the EUT (test samples in this report) and testing sample of report BL-SZ2150617-601, which was issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 23, 2021 as below:

1. With different model name(change the model name from V2058 to V2057).
2. With different battery.
3. With different adapter.
4. Change the memory capacity from 8+128GB to 4+128GB(The component is pin-for-pin compatible).
5. With different rear camera(change the rear camera from 64M to 48M).
6. Minor change of the charging circuit(No change of schematic and PCB Layout, just change and move one charging chip from main board to sub-board. The charging specification is from 33W change to 18W. And the component is pin-for-pin compatible).
7. No change in radio parameters has occurred.

There's no change to radio bands' electric/radio characteristics. So all test data originate from the report BL-SZ2150617-601, which was issued by Shenzhen BALUN Technology Co., Ltd. on Jun. 23, 2021.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.87 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2020.06.08	2021.06.07
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.06.01	2022.05.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.01	2022.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.21 dB
Power Spectral Density, conducted	± 1.25 dB
Unwanted Emissions, conducted	± 1.26 dB
All emissions, radiated	± 3.86 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

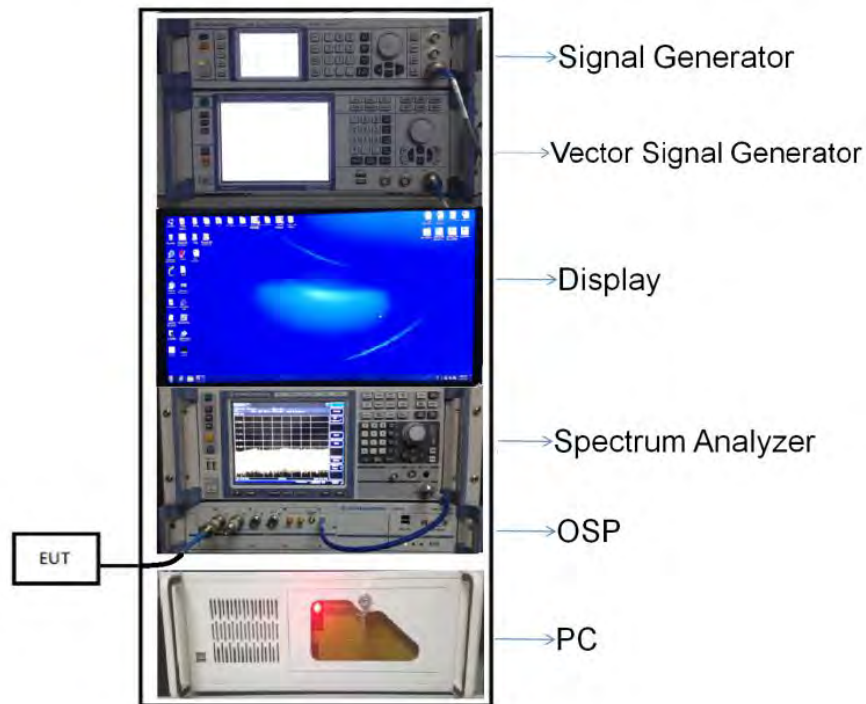


(Diagram 1)

4.4.2 For AC Power Supply Port Test

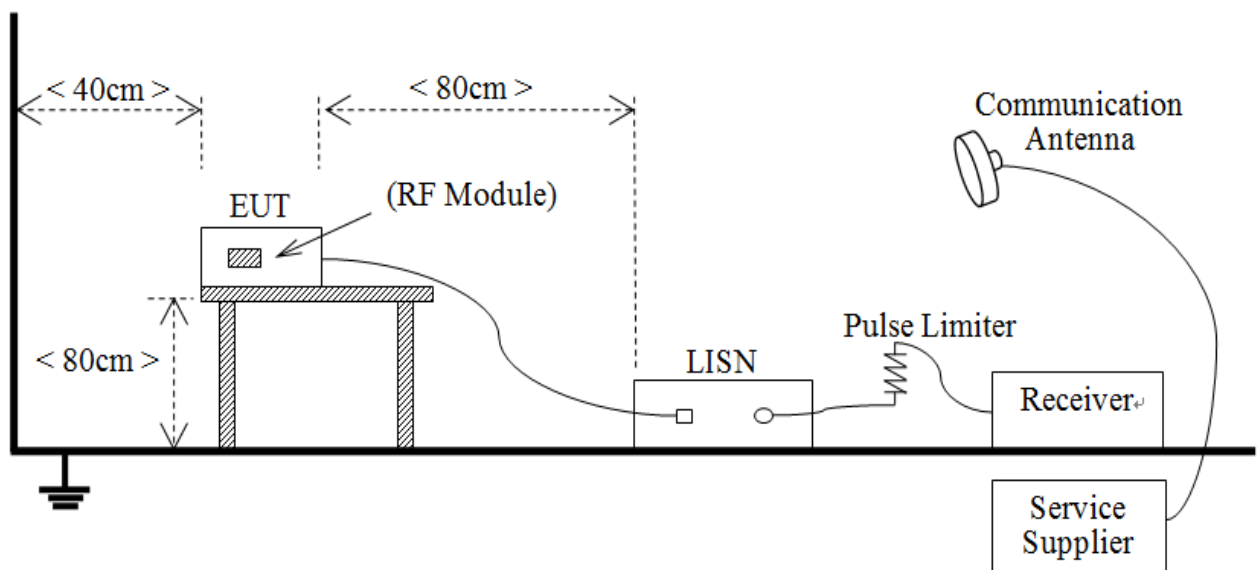


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

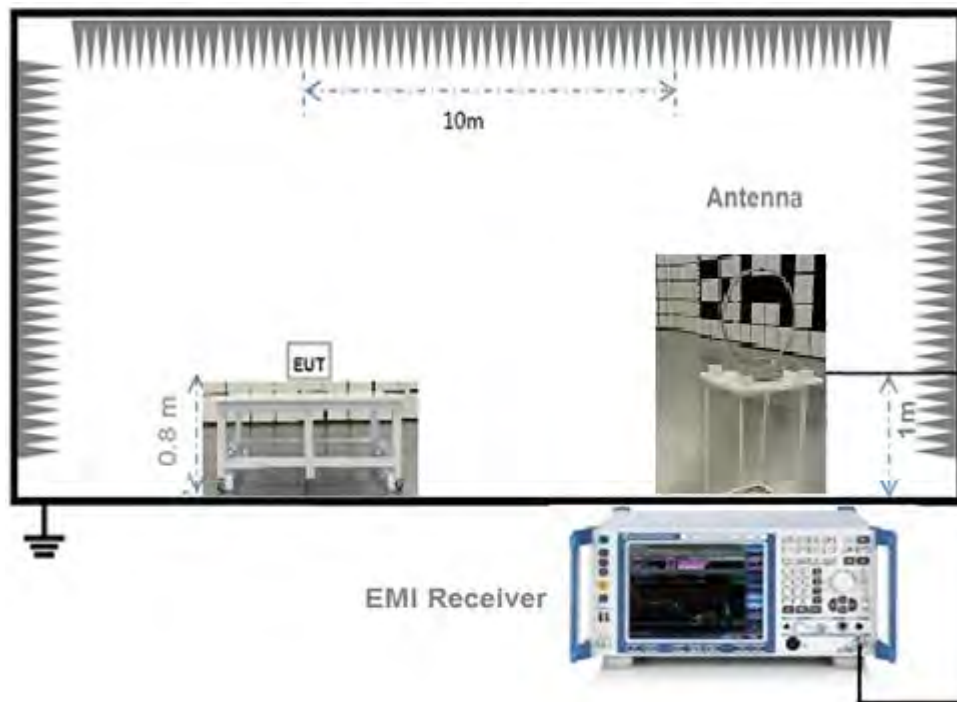


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

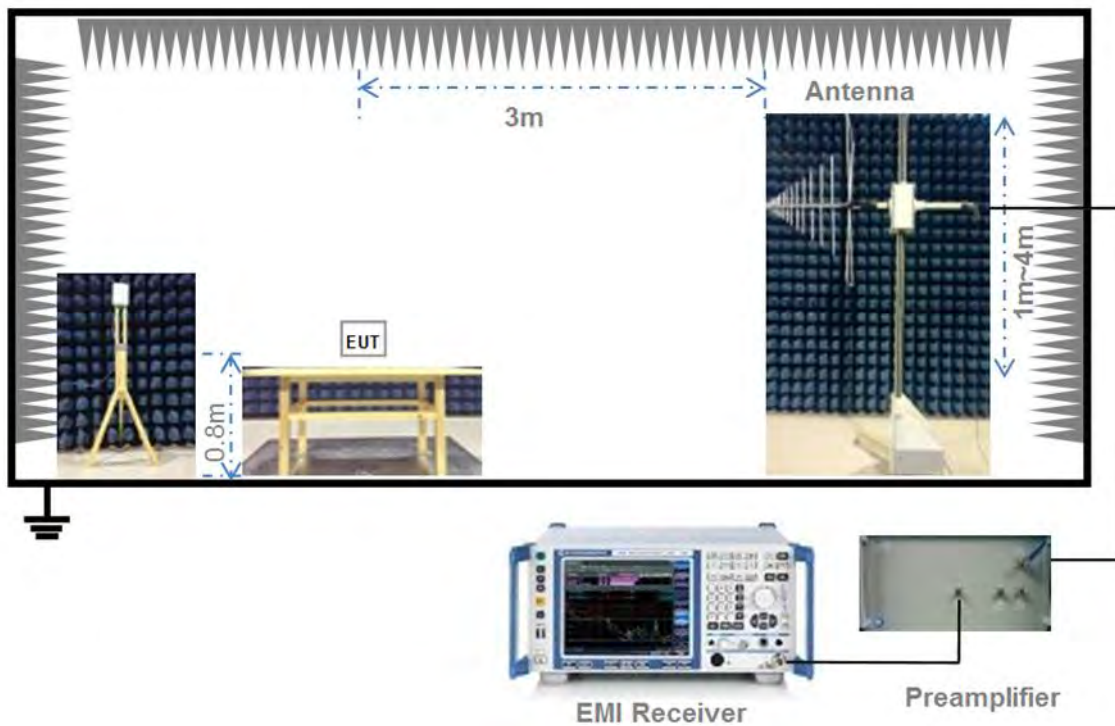

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

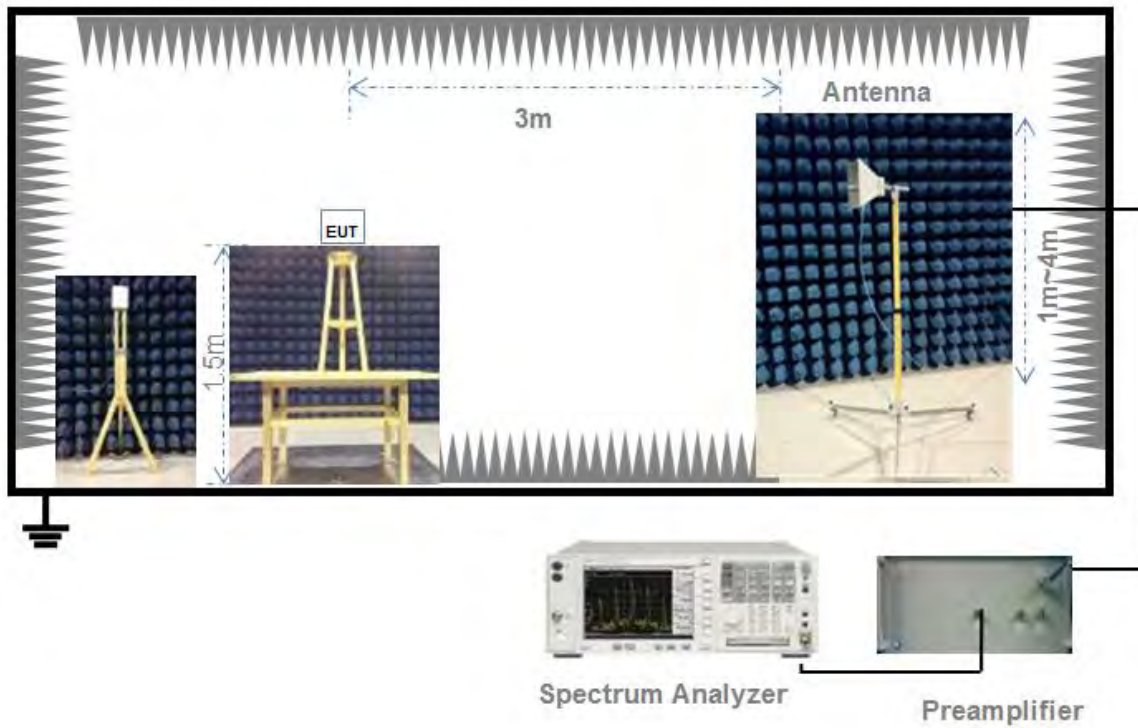

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

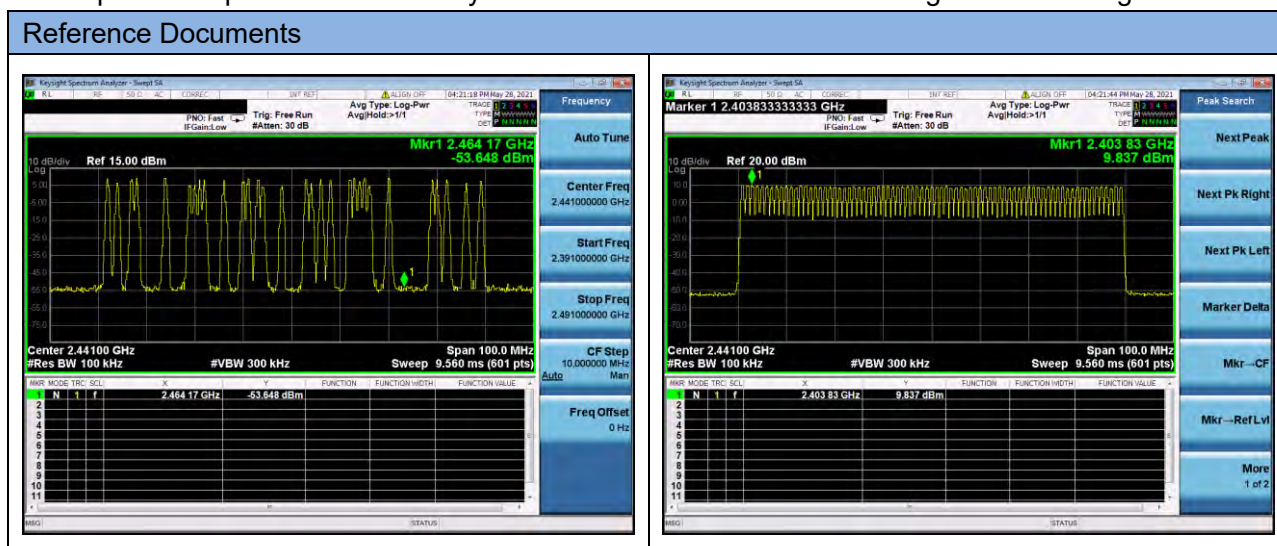

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots

GFSK 2.4 GHz ~ 2.4415 GHz

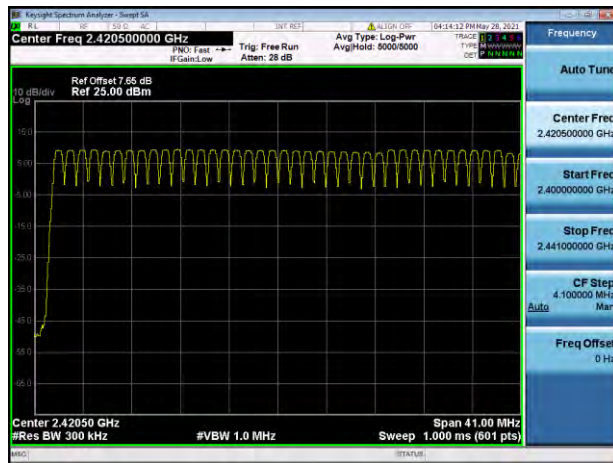


GFSK 2.4415 GHz ~ 2.4835 GHz



8-DPSK 2.4 GHz ~ 2.4415 GHz



8-DPSK 2.4415 GHz ~ 2.4835 GHz

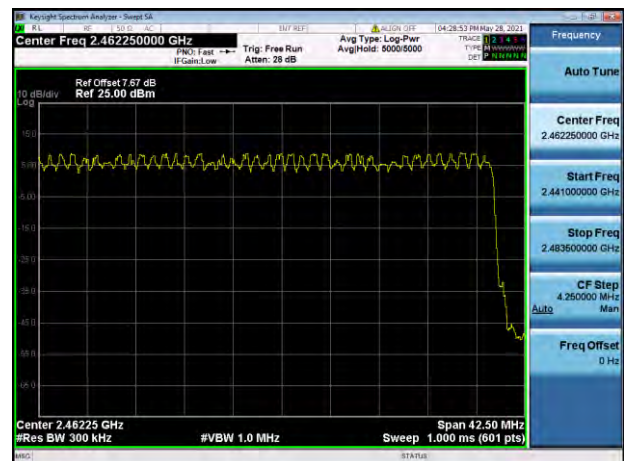

A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	9.654	9.23	21	125	Pass
Middle	8.962	7.87			Pass
High	9.414	8.74			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	9.645	9.22	9.254	8.42	21	125	Pass
Middle	8.777	7.55	8.801	7.59			Pass
High	8.633	7.30	8.611	7.26			Pass

Test plots


GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

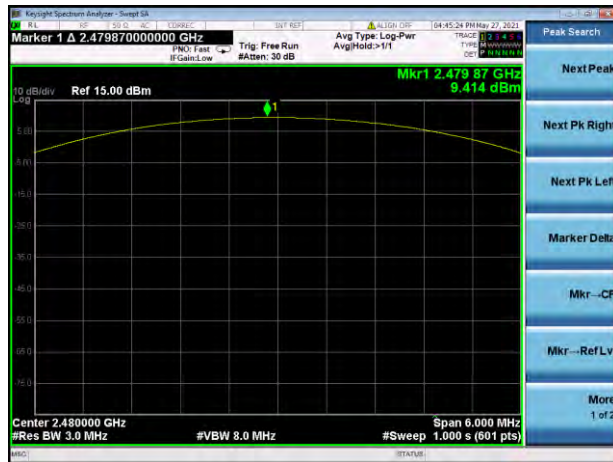

$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.870000	0.761160
Middle	0.870000	0.762570
High	0.870000	0.768940
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.275000	1.144600
Middle	1.280000	1.149500
High	1.270000	1.148000
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.270000	1.148300
Middle	1.270000	1.149100
High	1.265000	1.151300

20 dB Bandwidth

GFSK MIDDLE CHANNEL



π/4-DQPSK MIDDLE CHANNEL



Spectrum Analyzer Settings:

- Center Freq: 2.480000000 GHz
- Span: 3.000 MHz
- Res BW: 30 kHz
- VBW: 91 kHz
- #Sweep: 500.0 ms (601 pts)
- Avg Type: Log-Pwr
- Ref Offset: 7.6 dB
- Ref Level: 15.00 dBm
- Marker 1: 2.480180 GHz (-14.55 dBm)
- Marker 2: 2.479365 GHz (-14.55 dBm)

MNR	MODE	TYP	FCL	F	F	FUNCTION	FUNCTION METHOD	FUNCTION VALUE
1	N	1	f	(A)	2.480180 GHz	(A)	5.975 dBm	
2	Δ	3		(A)	1.270 MHz	(A)	0.416 dB	
3	F	1	r	(A)	2.479365 GHz	(A)	-14.550 dBm	

Copyright Spectrum Analyzer - Image SA

Center Freq 2.402000000 GHz

Ref Offset 7.61 dB
Ref 15.00 dBm

ΔMkr2 1.270 MHz
0.156 dB

Trig: Free Run
Atten: 18 dB

Avg Type: Log-Pwr
Avg/Noise: 20.00

Frequency

Auto Tune

Center Freq
2.402000000 GHz

Start Freq
2.400500000 GHz

Stop Freq
2.403500000 GHz

CF Step
300.000 MHz

Auto

Freq Offset
0 Hz

Scale Type
Log

Span 3.000 MHz
#Res BW 30 kHz
VBW 91 kHz
#Sweep 500.0 ms (601 pts)

ROW	MODE	TYPE	NAME	F	P	FUNCTION	FUNCTION INSTR	FUNCTION VALUE
1	N	1	f	(A)	2.402 180 GHz	(A)	-6.484 dBm	
2	Δf	1	(A)		1.270 MHz	(A)	0.156 dB	
3	P	1	f	(A)	2.401 355 GHz	(A)	-11.823 dBm	
4								
5								
6								
7								
8								
9								
10								
11								

File <TMPIMAGE.PNG> saved

(STATUS)

Keysight Spectrum Analyzer - Image 08

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010

Spectrum Analyzer - Seng DA

Center Freq 2.480000000 GHz

Ref Offset 7.6 dB
Ref 15.00 dBm

ΔMkr2 1.025 MHz
0.096 dB

Center 2.480000 GHz
#Res BW 30 kHz


VBW 91 kHz

Span 3.000 MHz
#Sweep 500.0 ms (601 pts)

MN	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	-1.1	(A)	2.480 160 GHz (A)	0.491 dBm
2	A3		(A)	1.265 MHz (A)	0.096 dB
3	F	1	f	2.479 355 GHz (Δ)	-13.820 dBm

99% Bandwidth


GFSK LOW CHANNEL

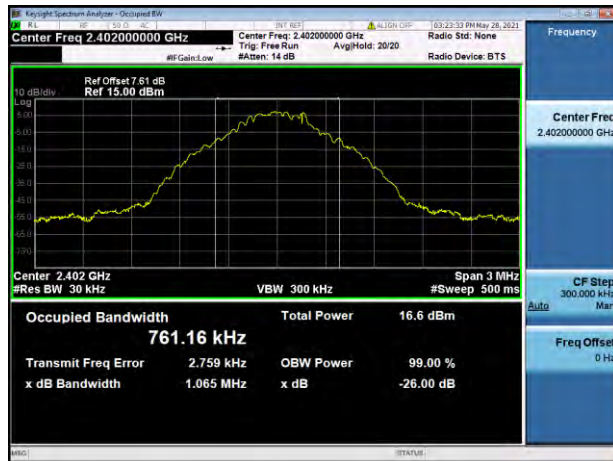


GFSK MIDDLE CHANNEL




GFSK HIGH CHANNEL

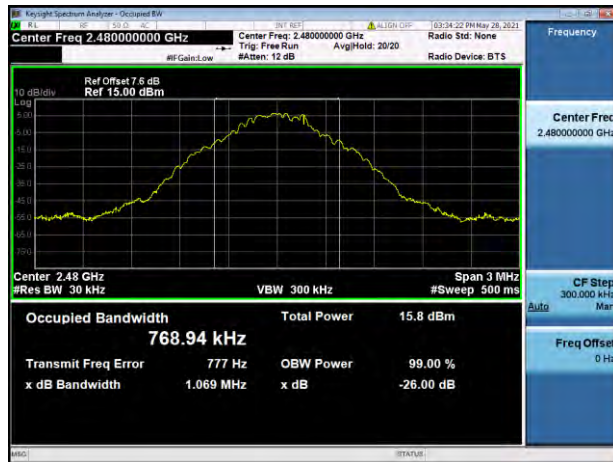


$\pi/4$ -DQPSK LOW CHANNEL

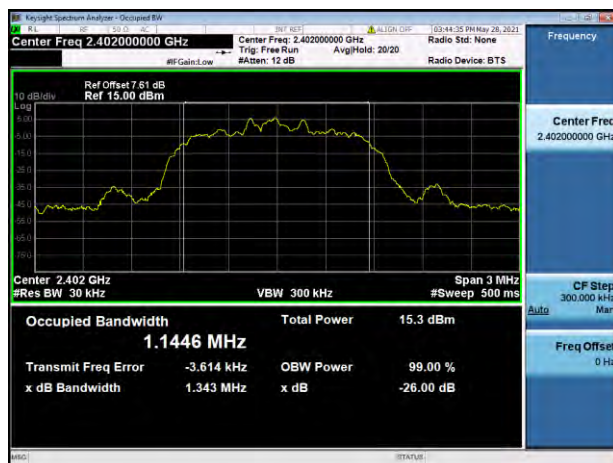


$\pi/4$ -DQPSK MIDDLE CHANNEL

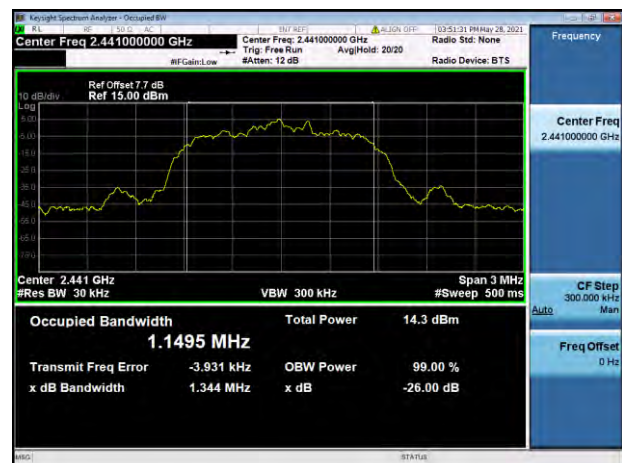


$\pi/4$ -DQPSK HIGH CHANNEL

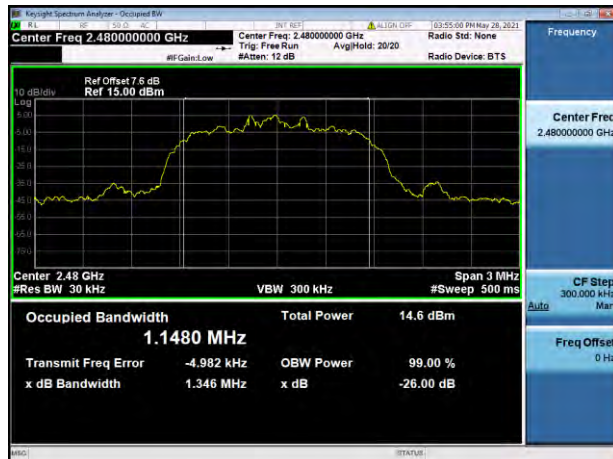


8-DPSK LOW CHANNEL

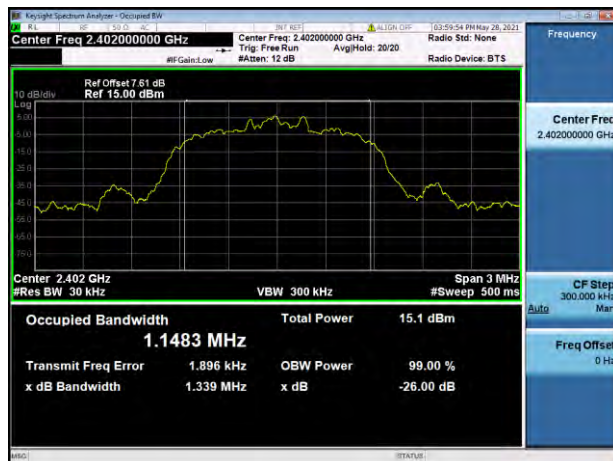

8-DPSK MIDDLE CHANNEL

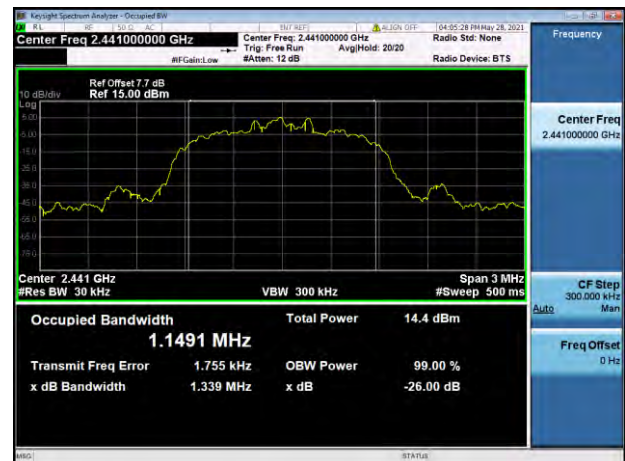

8-DPSK HIGH CHANNEL

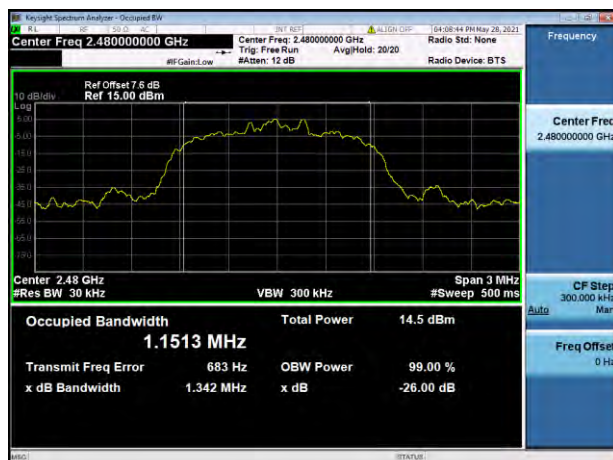


A.4 Hopping Frequency Separation

Test Data


Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.0033	0.580000	Pass
8-DPSK	1.0033	0.846667	Pass

Test Plots

GFSK

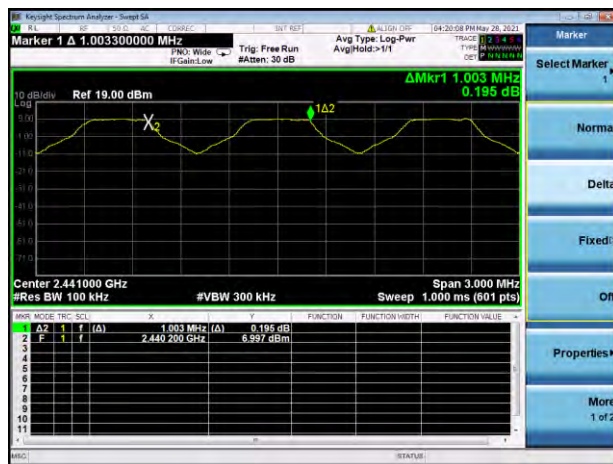

8-DPSK

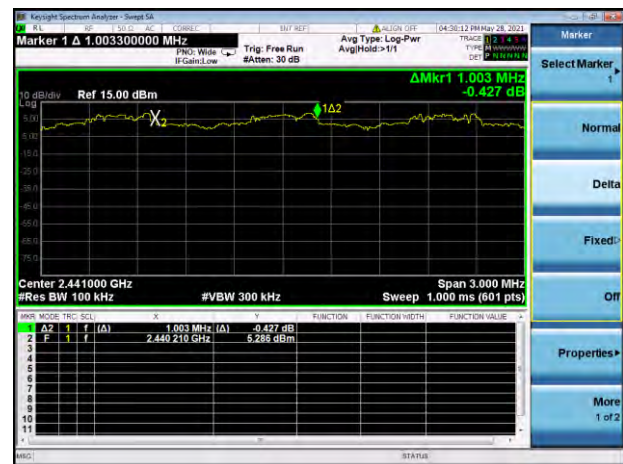


A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37120	118.784	0.4	Pass
DH 3	1.62500	260.000	0.4	Pass
DH 5	2.86400	305.493	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38330	122.656	0.4	Pass
DH 3	1.62500	260.000	0.4	Pass
DH 5	2.89900	309.227	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37410	59.856	0.4	Pass
DH 3	1.62400	129.920	0.4	Pass
DH 5	2.85300	152.160	0.4	Pass

Test Plots


GFSK DH1

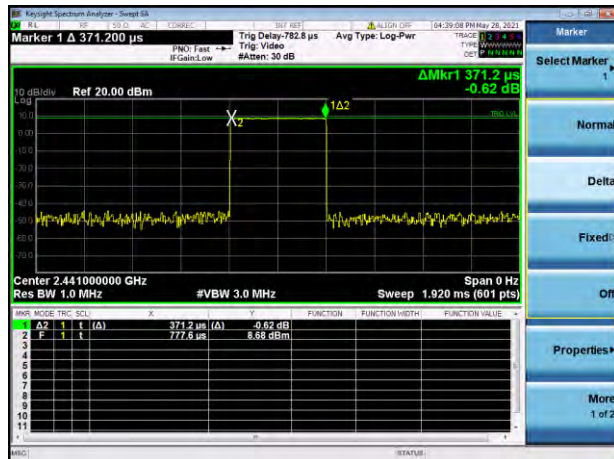


GFSK DH3

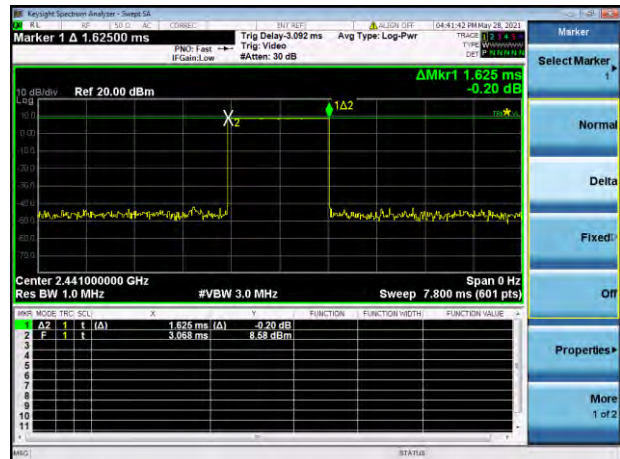


GFSK DH5

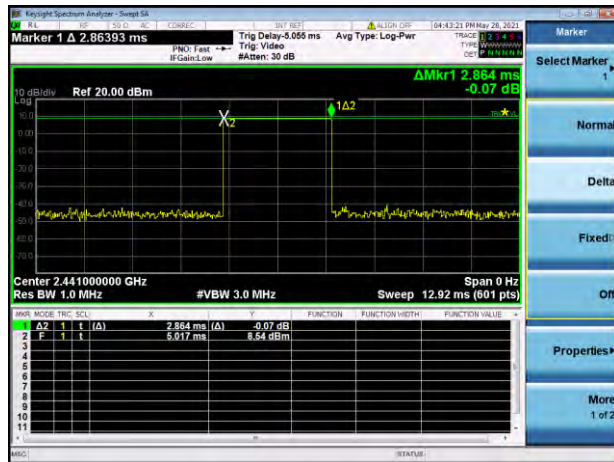


8-DPSK DH1

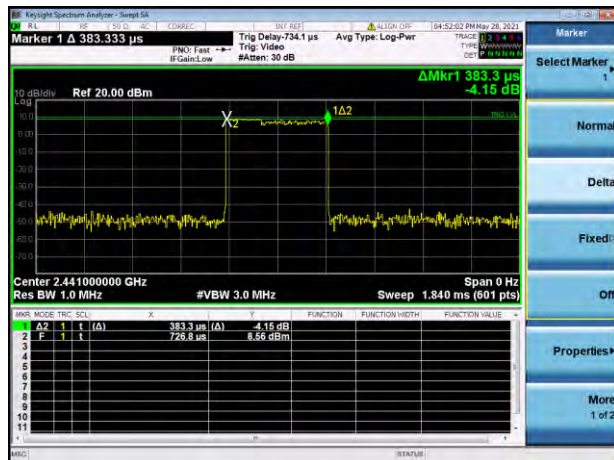


8-DPSK DH3

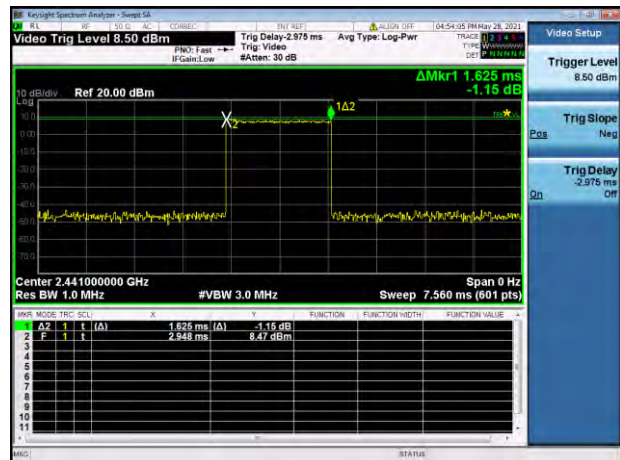


8-DPSK DH5

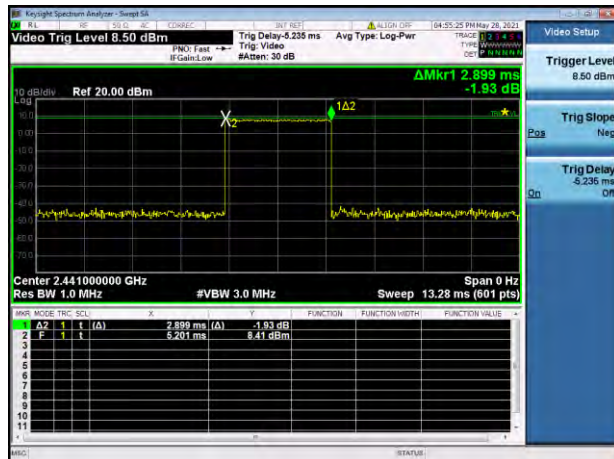


AFH Mode DH1

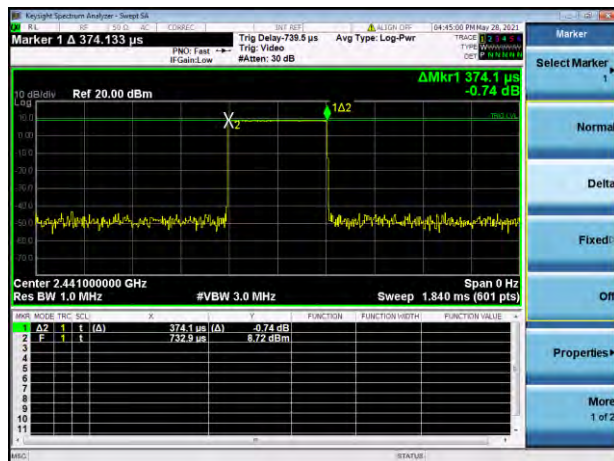

AFH Mode DH3

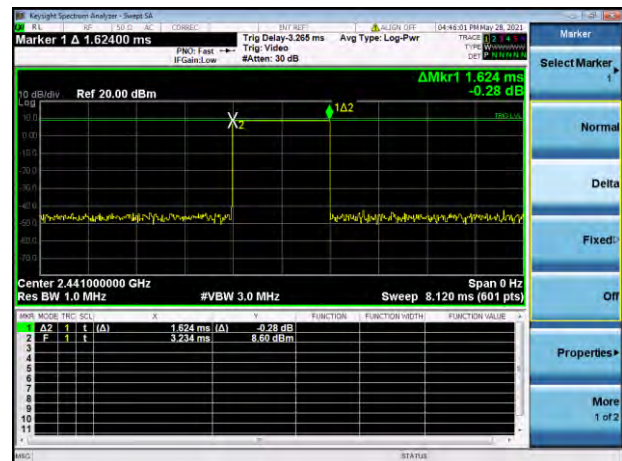

AFH Mode DH5

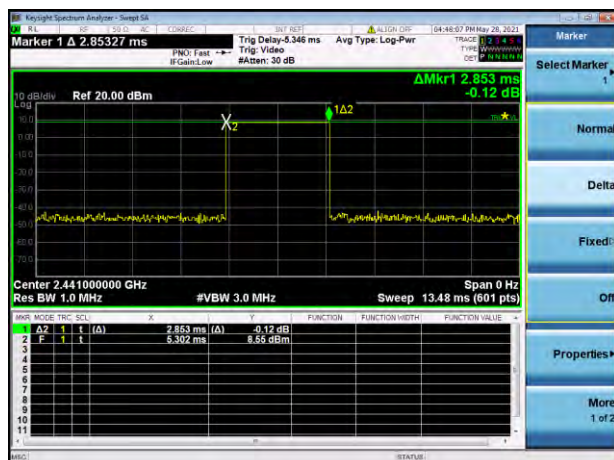


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data


GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.851	9.688	-10.312	Pass
Middle	-37.282	8.935	-11.065	Pass
High	-38.213	8.879	-11.121	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.318	8.962	-11.038	Pass
Middle	-36.189	8.200	-11.800	Pass
High	-36.272	8.268	-11.732	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-36.493	9.351	-10.649	Pass
8-DPSK	-35.519	8.363	-11.637	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL

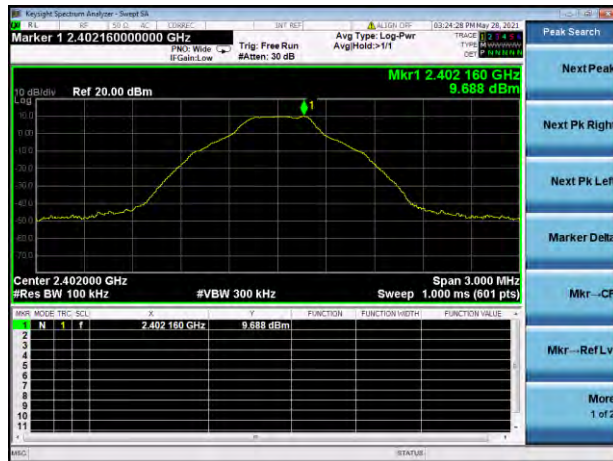


GFSK LOW CHANNEL, BAND EDGE

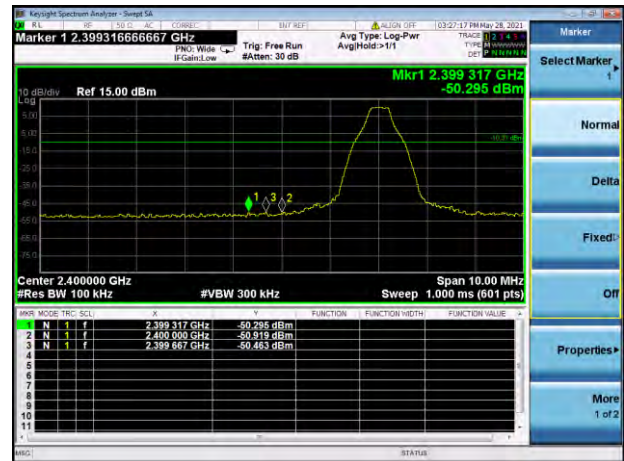


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

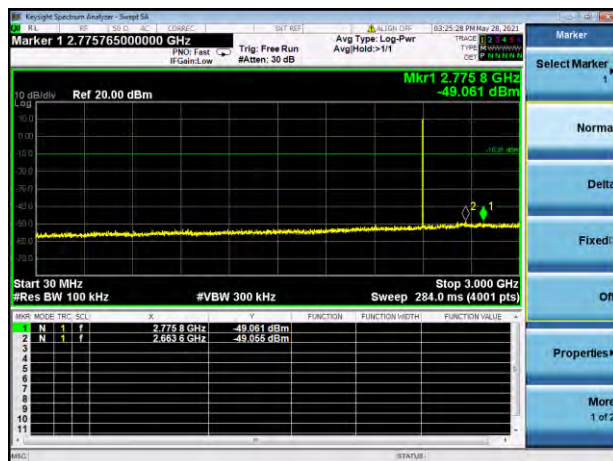


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

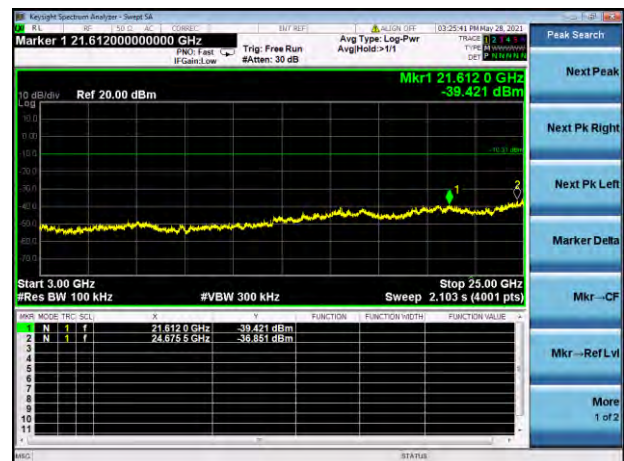


GFSK MIDDLE CHANNEL, CARRIER LEVEL

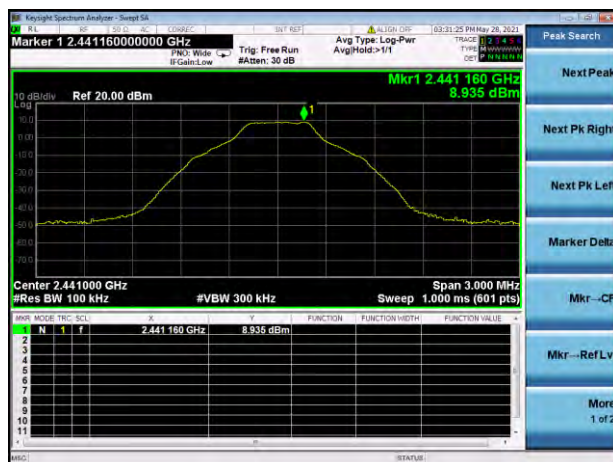


GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

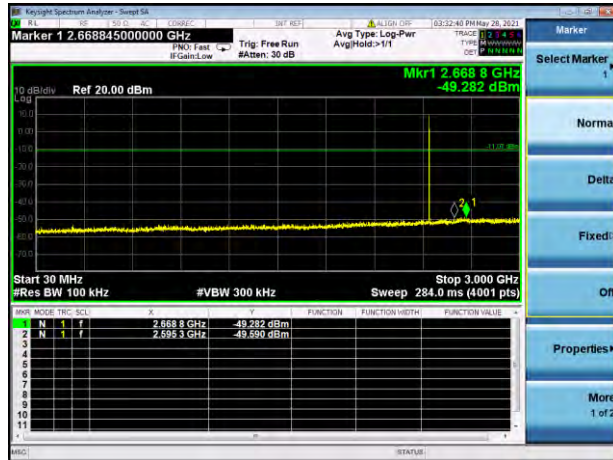


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

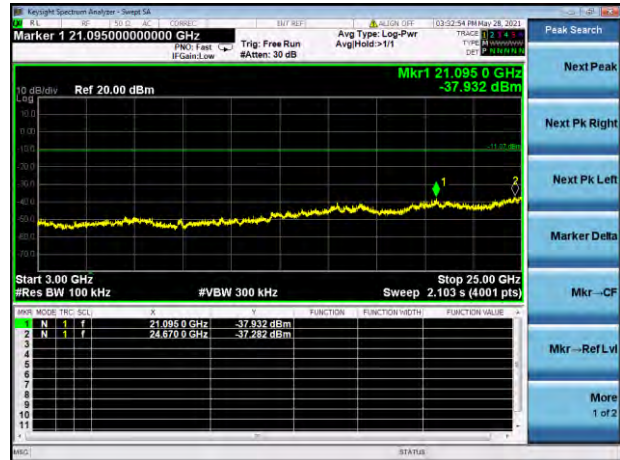


GFSK HIGH CHANNEL, CARRIER LEVEL

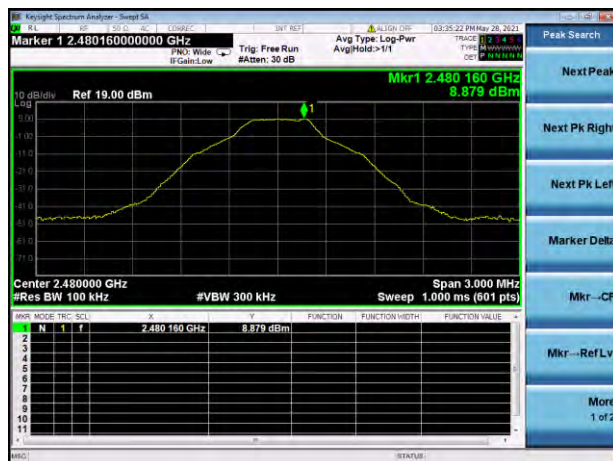


GFSK HIGH CHANNEL, BAND EDGE

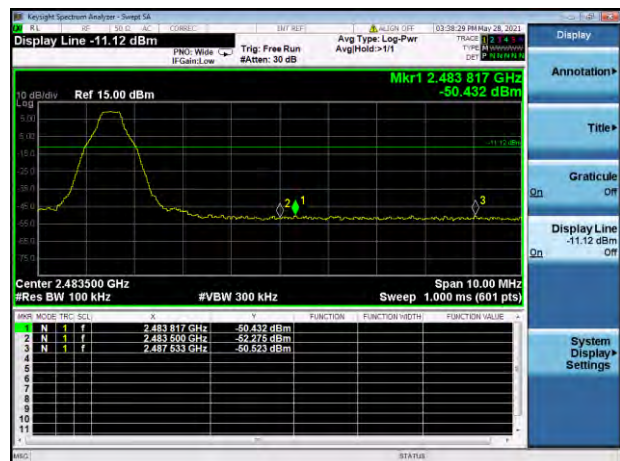


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

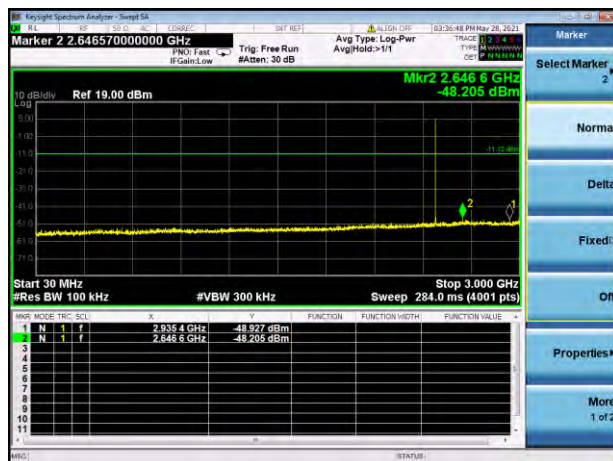


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

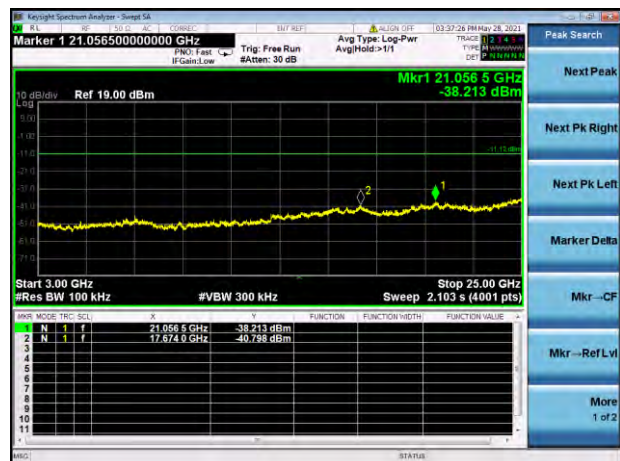

8-DPSK LOW CHANNEL, CARRIER LEVEL

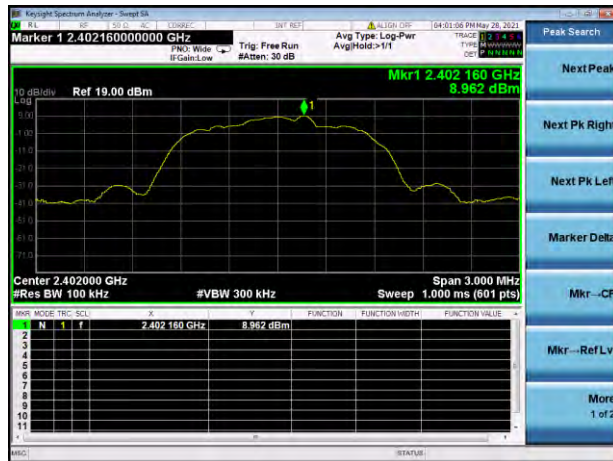


8-DPSK LOW CHANNEL, BAND EDGE

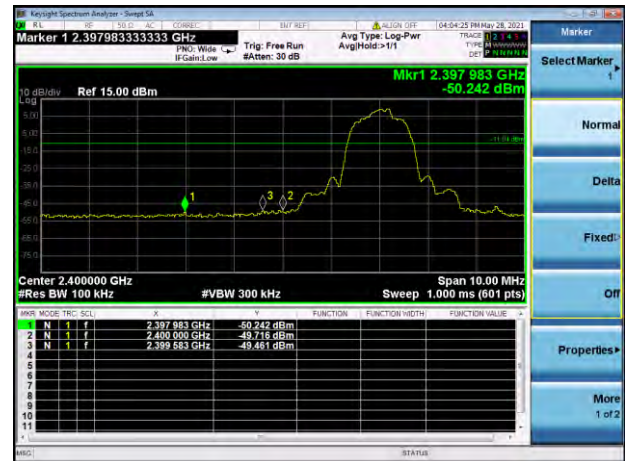


8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz




8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

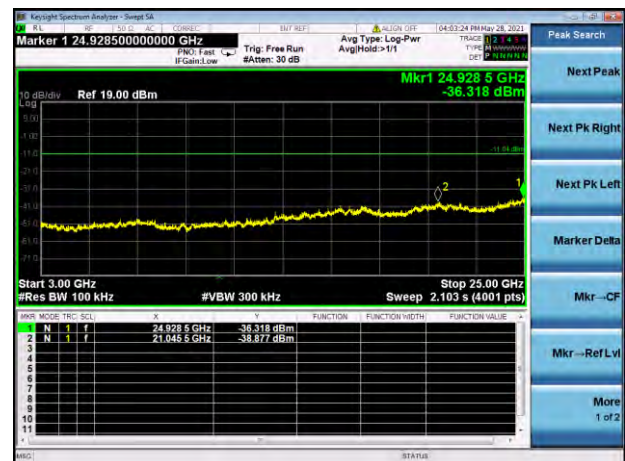


8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

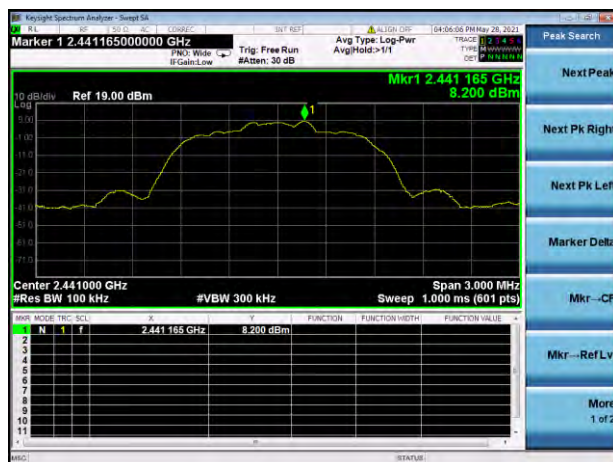


8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

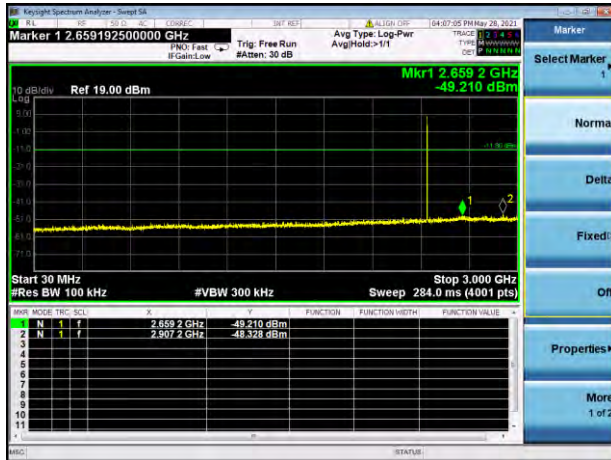

8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

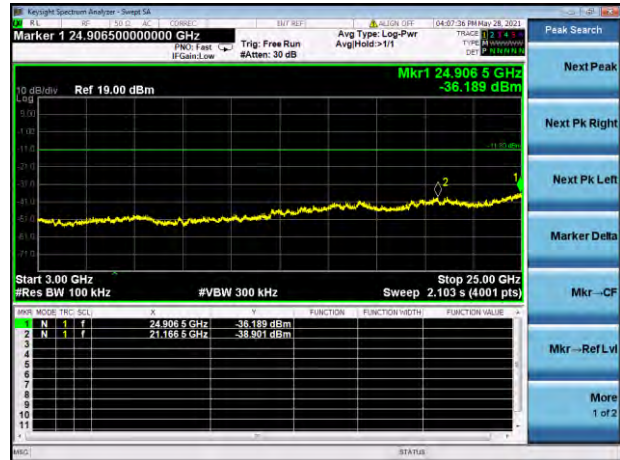


8-DPSK HIGH CHANNEL, CARRIER LEVEL

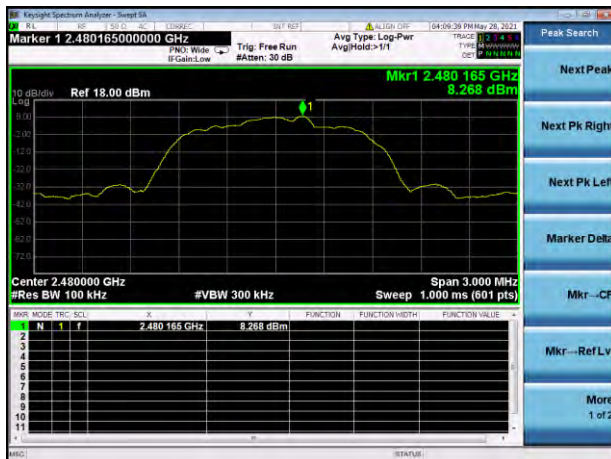


8-DPSK HIGH CHANNEL, BAND EDGE




8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

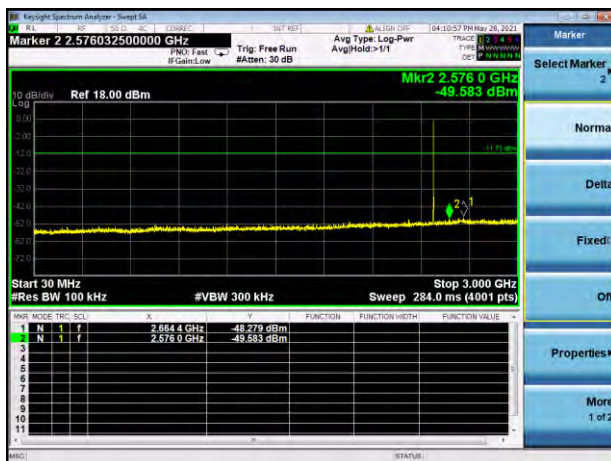

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

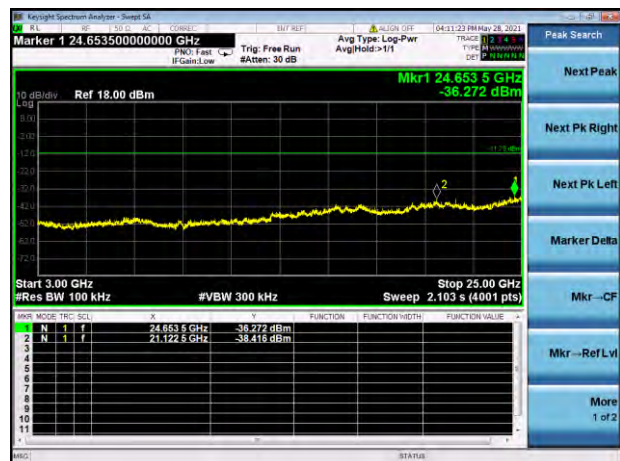


GFSK HOPPING, CARRIER LEVEL

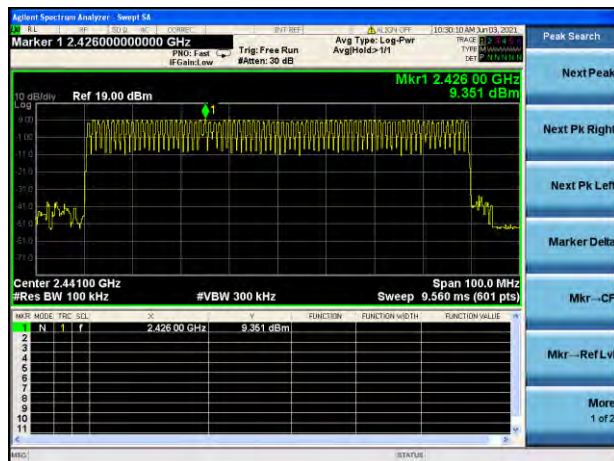


GFSK HOPPING BAND EDGE (LOW)




GFSK HOPPING BAND EDGE (HIGH)

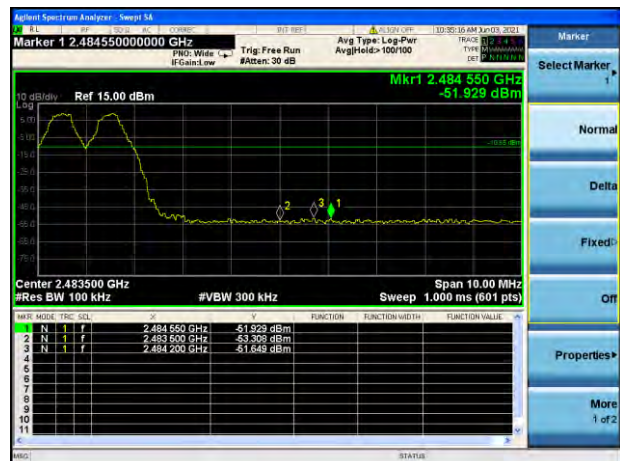


GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

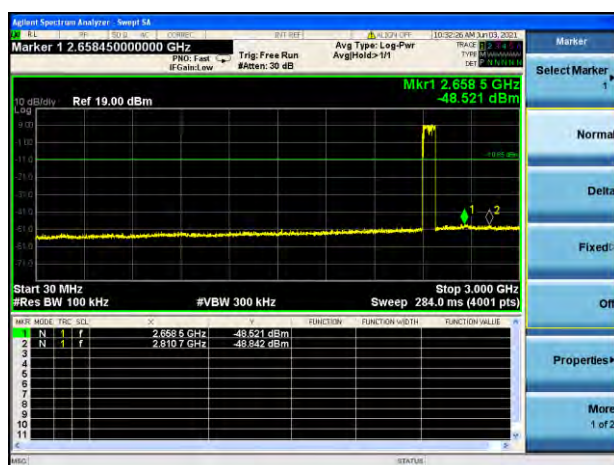

GFSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

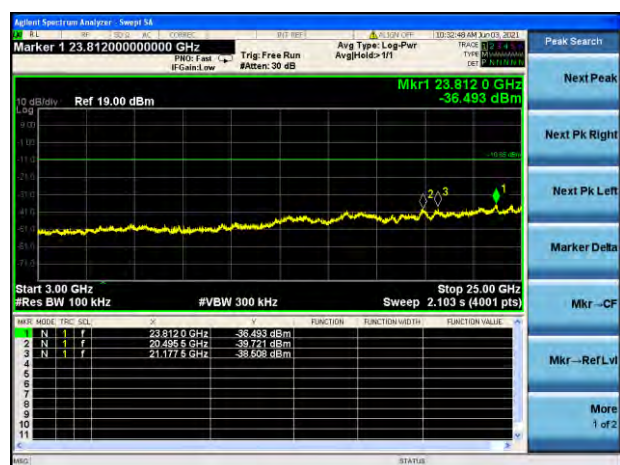

8-DPSK HOPPING, CARRIER LEVEL

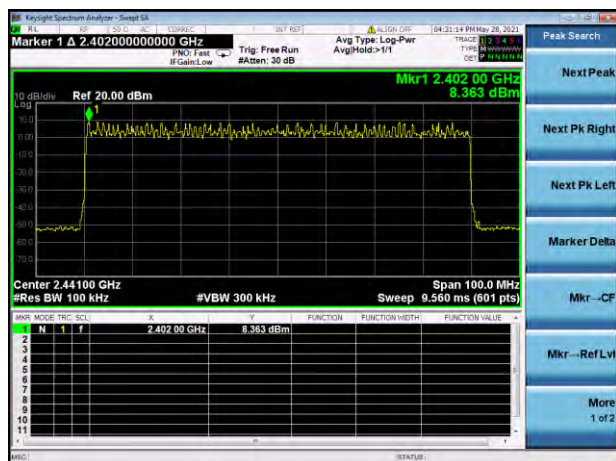


8-DPSK Hopping BAND EDGE (LOW)




8-DPSK Hopping BAND EDGE (HIGH)



8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

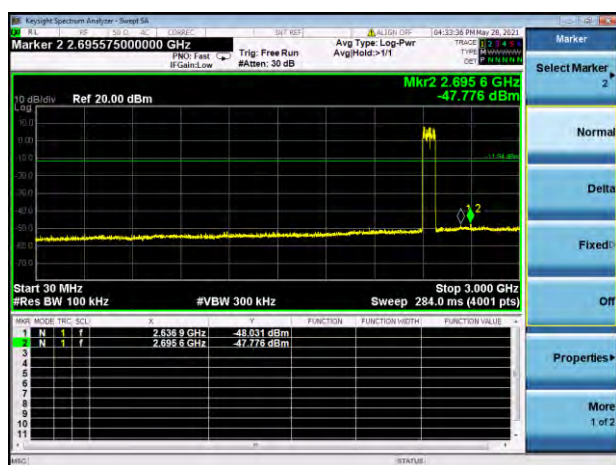

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

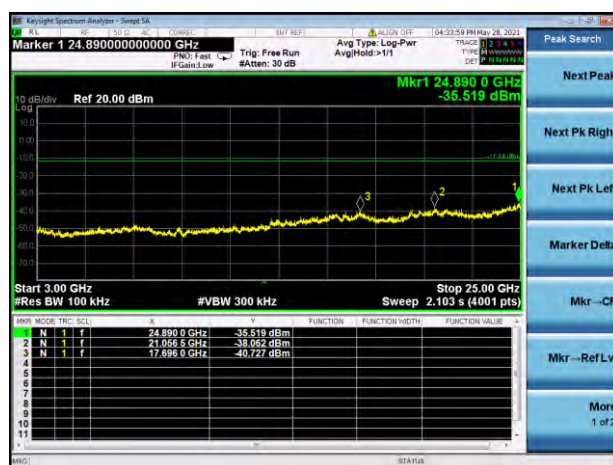


A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.
 Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (240 VAC, 50 Hz) shown here.
 Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

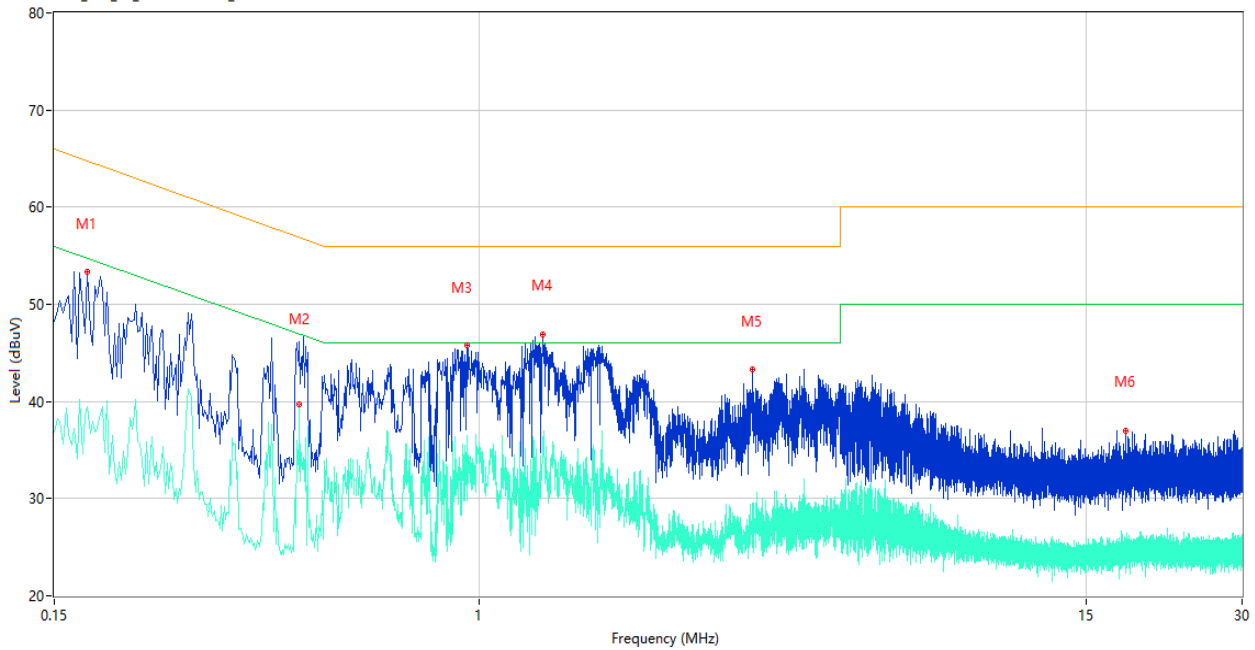

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.174	53.30	10.39	64.77	-11.47	Peak	L	Pass
1**	0.174	39.42	10.39	54.77	-15.35	AV	L	Pass
2	0.448	46.17	10.30	56.91	-10.74	Peak	L	Pass
2**	0.448	39.69	10.30	46.91	-7.22	AV	L	Pass
3	0.944	45.83	10.24	56.00	-10.17	Peak	L	Pass
3**	0.944	36.43	10.24	46.00	-9.57	AV	L	Pass
4	1.326	46.89	10.24	56.00	-9.11	Peak	L	Pass
4**	1.326	36.39	10.24	46.00	-9.61	AV	L	Pass
5	3.380	43.35	10.28	56.00	-12.65	Peak	L	Pass
5**	3.380	29.06	10.28	46.00	-16.94	AV	L	Pass
6	17.848	36.95	10.49	60.00	-23.05	Peak	L	Pass
6**	17.848	24.89	10.49	50.00	-25.11	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_ Class B

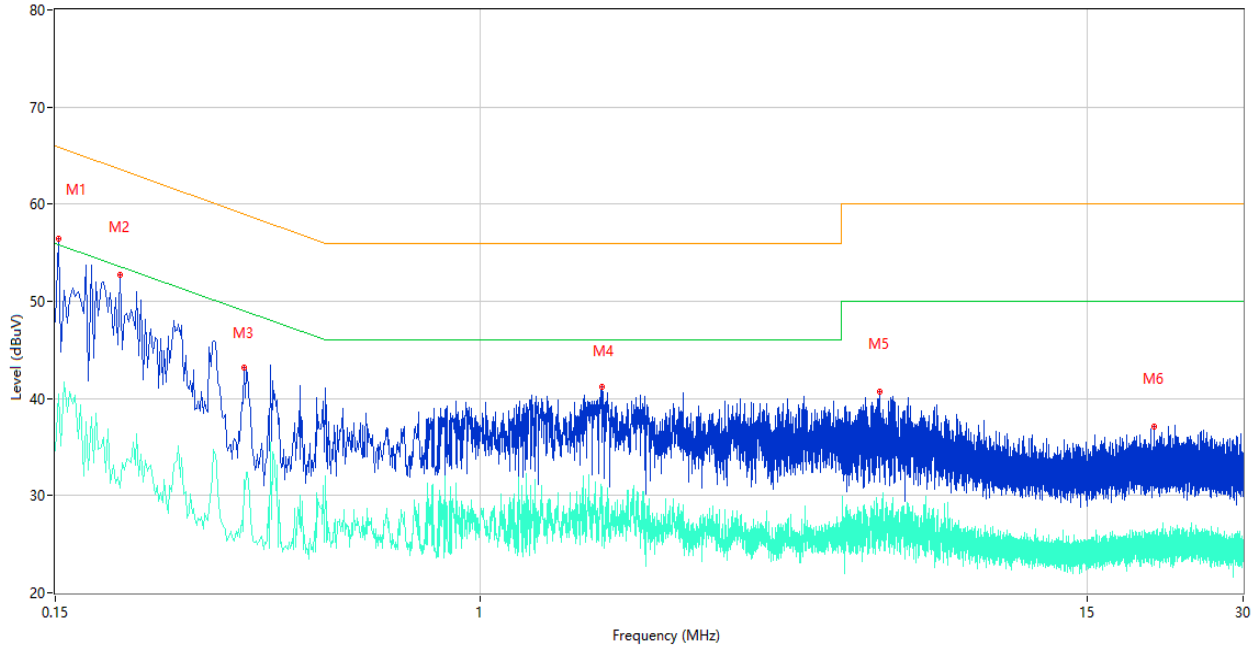

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.152	56.48	10.41	65.89	-9.41	Peak	N	Pass
1**	0.152	40.42	10.41	55.89	-15.47	AV	N	Pass
2	0.200	52.72	10.38	63.61	-10.89	Peak	N	Pass
2**	0.200	30.75	10.38	53.61	-22.86	AV	N	Pass
3	0.348	43.23	10.32	59.01	-15.78	Peak	N	Pass
3**	0.348	31.66	10.32	49.01	-17.35	AV	N	Pass
4	1.718	41.17	10.27	56.00	-14.83	Peak	N	Pass
4**	1.718	30.93	10.27	46.00	-15.07	AV	N	Pass
5	5.938	40.76	10.33	60.00	-19.24	Peak	N	Pass
5**	5.938	27.27	10.33	50.00	-22.73	AV	N	Pass
6	20.148	37.08	10.56	60.00	-22.92	Peak	N	Pass
6**	20.148	24.45	10.56	50.00	-25.55	AV	N	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of “--” in the table which means not application.


Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT H

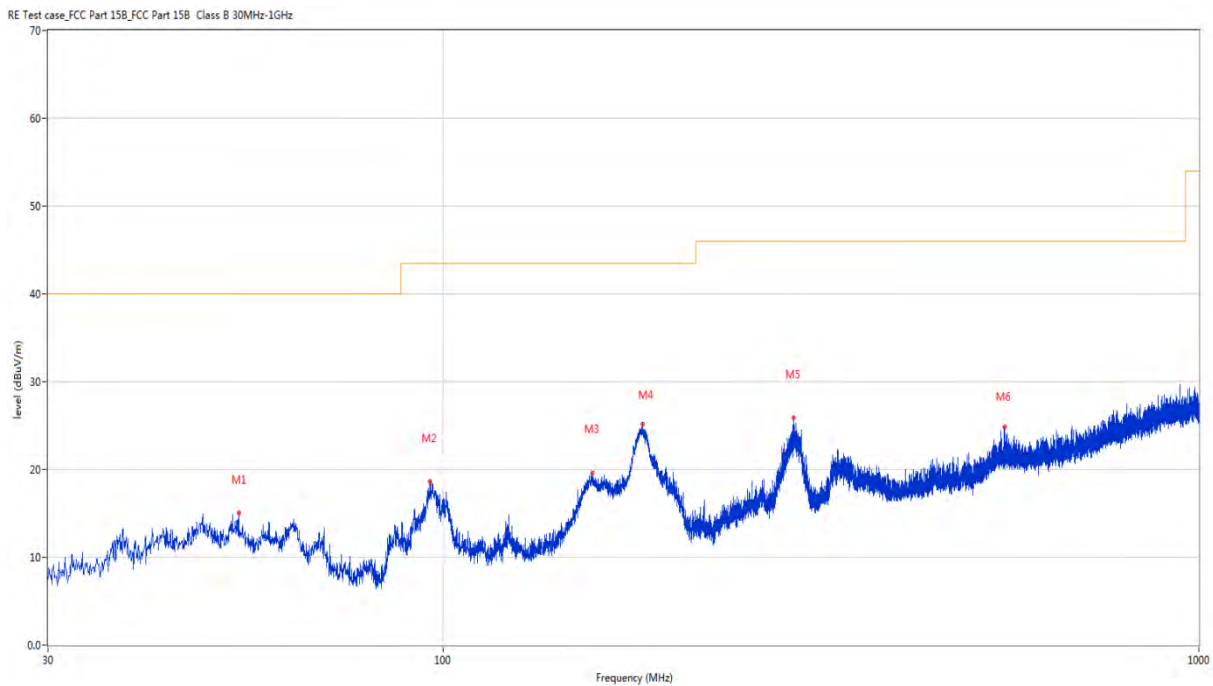

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.620	15.05	-22.94	40.0	-24.95	Peak	306.80	200	Horizontal	Pass
2	95.960	18.62	-24.73	43.5	-24.88	Peak	277.30	200	Horizontal	Pass
3	157.458	19.57	-27.62	43.5	-23.93	Peak	44.70	200	Horizontal	Pass
4	183.551	25.16	-25.30	43.5	-18.34	Peak	90.30	200	Horizontal	Pass
5	291.075	25.92	-21.60	46.0	-20.08	Peak	103.40	100	Horizontal	Pass
6	553.024	24.81	-15.59	46.0	-21.19	Peak	124.70	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

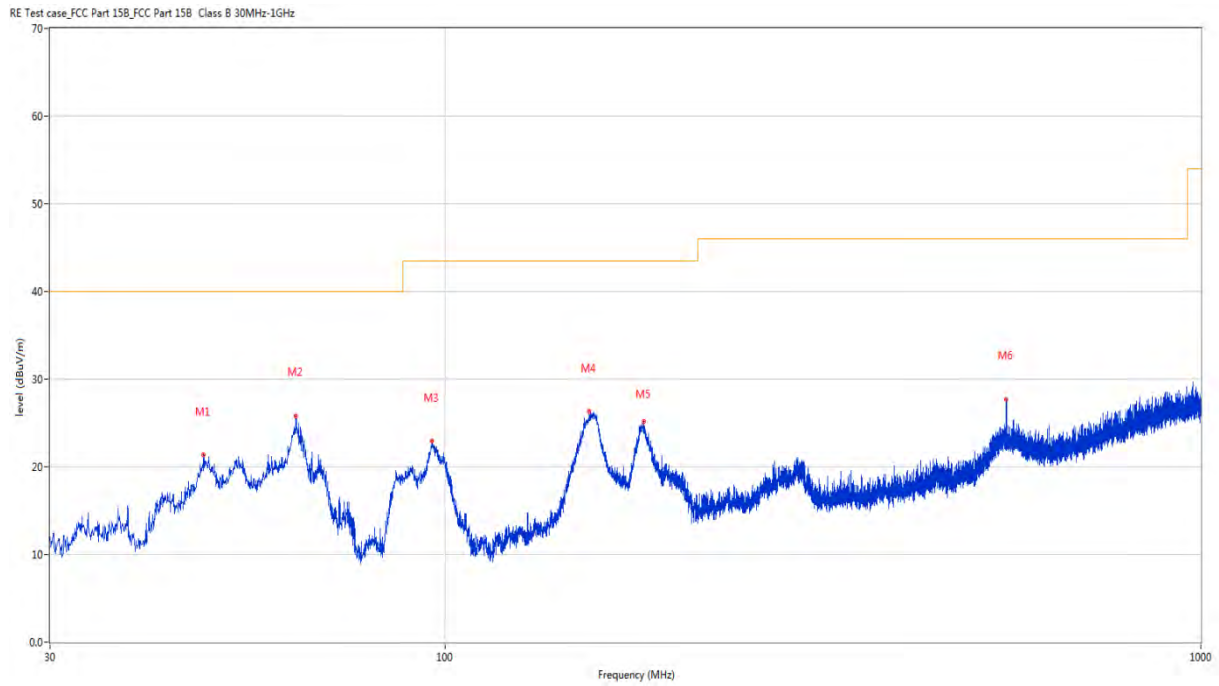


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.897	21.35	-22.66	40.0	-18.65	Peak	184.30	100	Vertical	Pass
2	63.416	25.82	-24.83	40.0	-14.18	Peak	149.90	100	Vertical	Pass
3	96.105	22.97	-24.74	43.5	-20.53	Peak	0.00	200	Vertical	Pass
4	154.936	26.30	-27.37	43.5	-17.20	Peak	285.50	100	Vertical	Pass
5	183.018	25.20	-25.28	43.5	-18.30	Peak	64.20	100	Vertical	Pass
6	552.976	27.67	-15.59	46.0	-18.33	Peak	350.00	100	Vertical	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.


GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

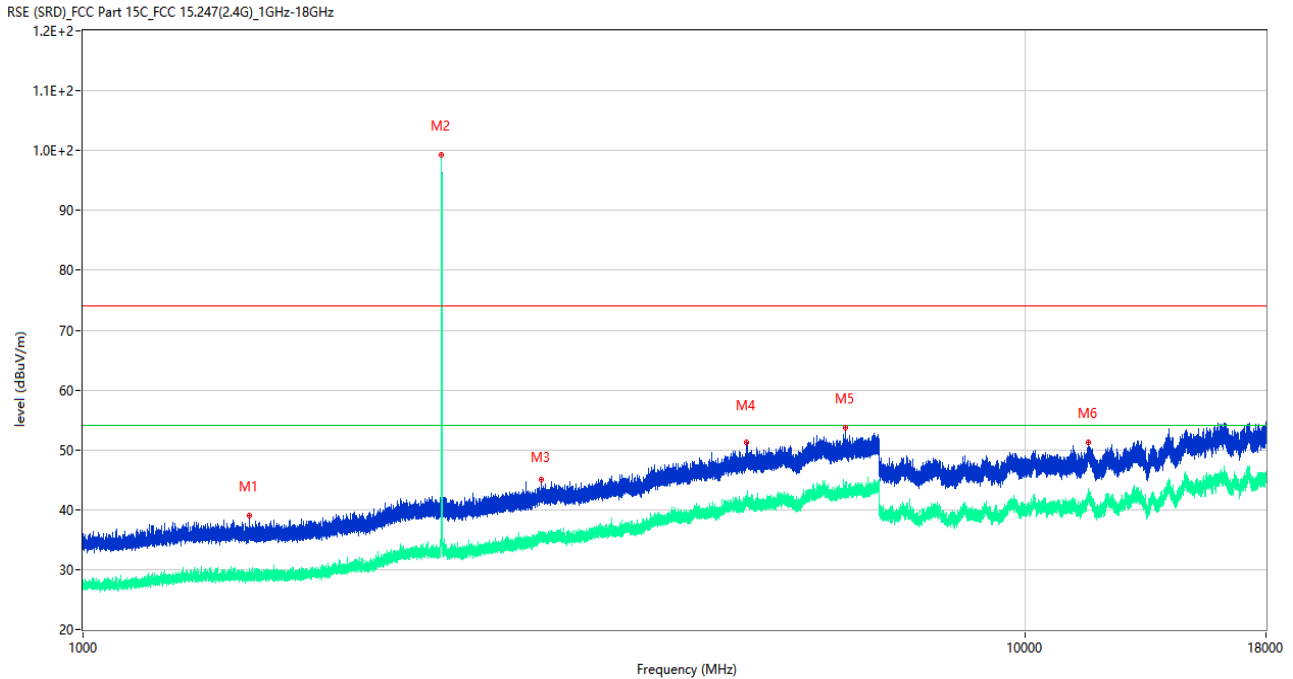

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.500	38.99	-17.68	74.0	-35.01	Peak	324.00	150	Horizontal	Pass
1**	1500.500	29.11	-17.68	54.0	-24.89	AV	324.00	150	Horizontal	Pass
2	2402.100	99.22	-13.34	74.0	25.22	Peak	93.00	150	Horizontal	N/A
2**	2402.100	98.87	-13.34	54.0	44.87	AV	93.00	150	Horizontal	N/A
3	3064.400	45.09	-9.36	74.0	-28.91	Peak	179.00	150	Horizontal	Pass
3**	3064.400	36.25	-9.36	54.0	-17.75	AV	179.00	150	Horizontal	Pass
4	5052.400	51.20	-2.96	74.0	-22.80	Peak	360.00	150	Horizontal	Pass
4**	5052.400	42.34	-2.96	54.0	-11.66	AV	360.00	150	Horizontal	Pass
5	6449.200	53.78	-1.74	74.0	-20.22	Peak	70.00	150	Horizontal	Pass
5**	6449.200	43.14	-1.74	54.0	-10.86	AV	70.00	150	Horizontal	Pass
6	11671.012	51.19	2.47	74.0	-22.81	Peak	43.00	150	Horizontal	Pass
6**	11671.012	42.74	2.47	54.0	-11.26	AV	43.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

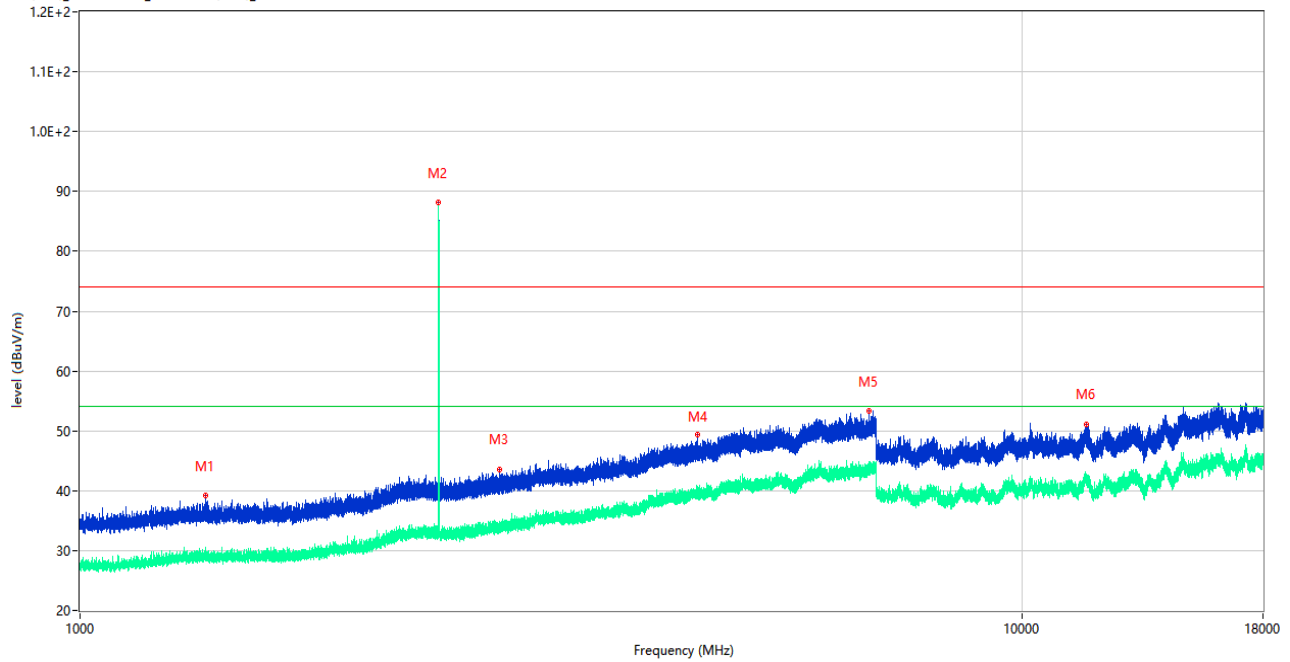

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1360.100	39.23	-17.59	74.0	-34.77	Peak	300.00	150	Vertical	Pass
1**	1360.100	29.01	-17.59	54.0	-24.99	AV	300.00	150	Vertical	Pass
2	2402.000	88.09	-13.35	74.0	14.09	Peak	359.00	150	Vertical	N/A
2**	2402.000	87.51	-13.35	54.0	33.51	AV	359.00	150	Vertical	N/A
3	2786.400	43.54	-11.08	74.0	-30.46	Peak	282.00	150	Vertical	Pass
3**	2786.400	33.98	-11.08	54.0	-20.02	AV	282.00	150	Vertical	Pass
4	4526.400	49.29	-4.15	74.0	-24.71	Peak	297.00	150	Vertical	Pass
4**	4526.400	39.80	-4.15	54.0	-14.20	AV	297.00	150	Vertical	Pass
5	6865.800	53.33	-1.03	74.0	-20.67	Peak	16.00	150	Vertical	Pass
5**	6865.800	43.37	-1.03	54.0	-10.63	AV	16.00	150	Vertical	Pass
6	11695.450	50.99	2.34	74.0	-23.01	Peak	183.00	150	Vertical	Pass
6**	11695.450	42.02	2.34	54.0	-11.98	AV	183.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

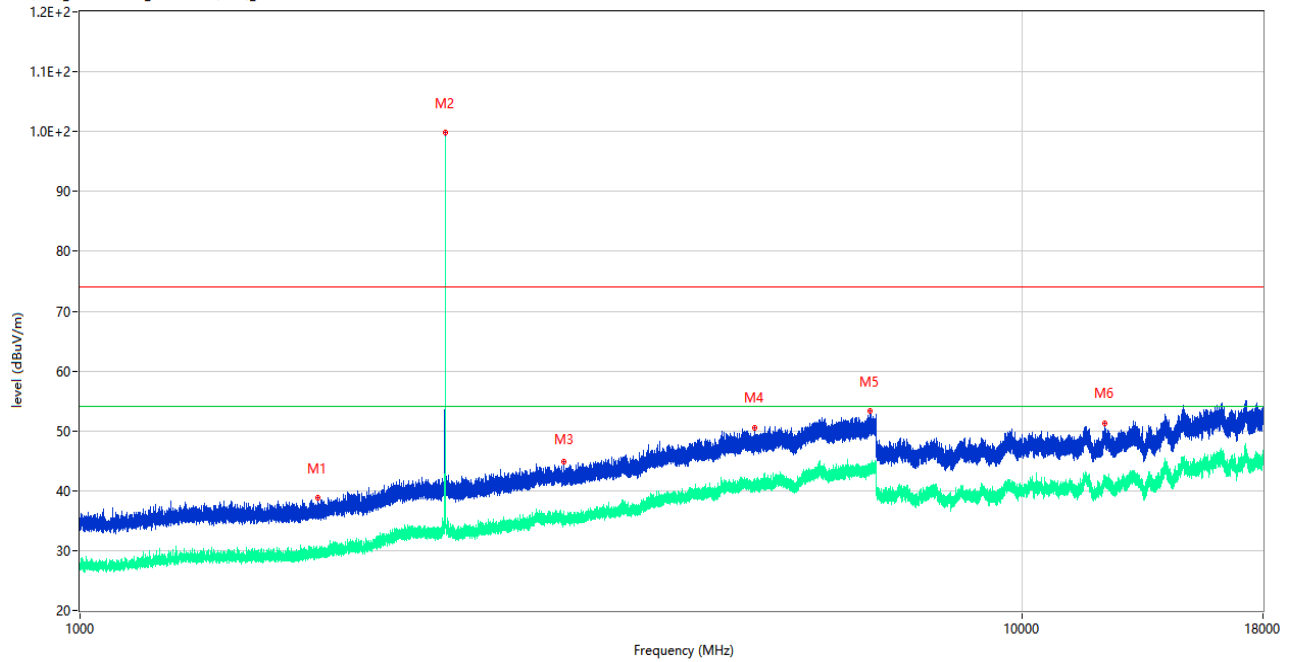

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1789.900	38.77	-17.19	74.0	-35.23	Peak	3.00	150	Horizontal	Pass
1**	1789.900	30.02	-17.19	54.0	-23.98	AV	3.00	150	Horizontal	Pass
2	2440.900	99.76	-12.47	74.0	25.76	Peak	76.00	150	Horizontal	N/A
2**	2440.900	98.87	-12.47	54.0	44.87	AV	76.00	150	Horizontal	N/A
3	3264.600	44.80	-8.83	74.0	-29.20	Peak	46.00	150	Horizontal	Pass
3**	3264.600	35.77	-8.83	54.0	-18.23	AV	46.00	150	Horizontal	Pass
4	5205.000	50.43	-3.35	74.0	-23.57	Peak	356.00	150	Horizontal	Pass
4**	5205.000	40.77	-3.35	54.0	-13.23	AV	356.00	150	Horizontal	Pass
5	6887.000	53.30	-0.55	74.0	-20.70	Peak	360.00	150	Horizontal	Pass
5**	6887.000	43.62	-0.55	54.0	-10.38	AV	360.00	150	Horizontal	Pass
6	12229.625	51.31	2.62	74.0	-22.69	Peak	71.00	150	Horizontal	Pass
6**	12229.625	42.36	2.62	54.0	-11.64	AV	71.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

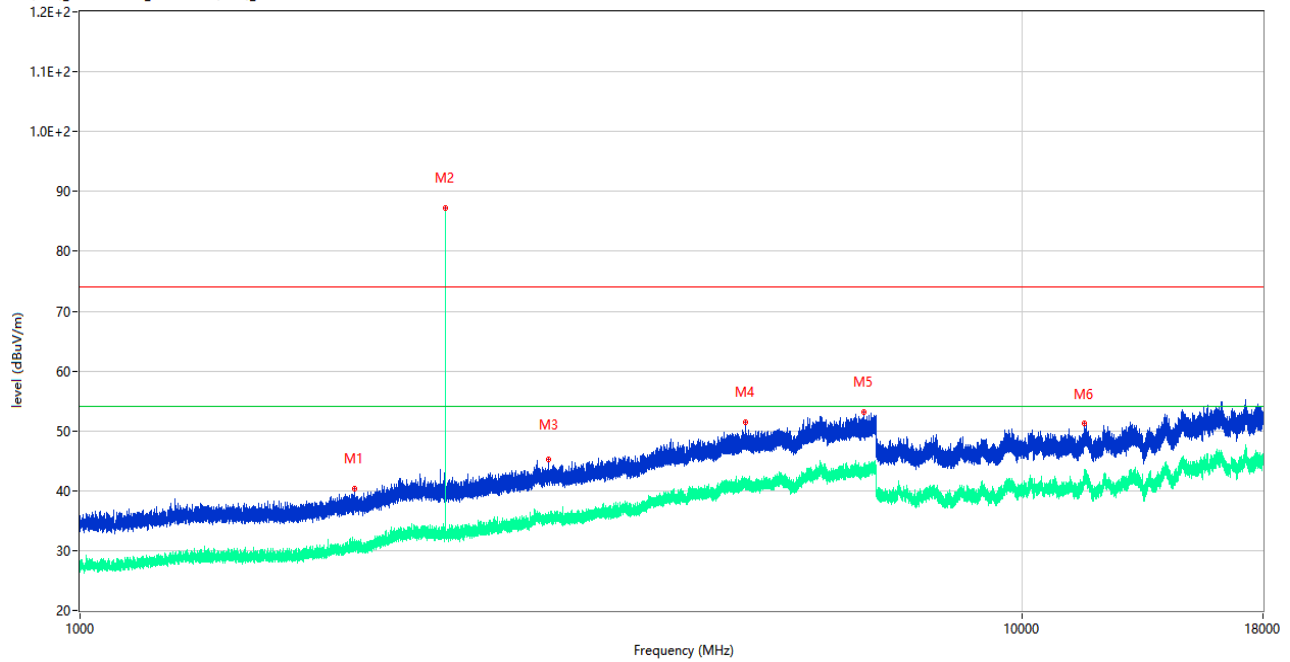

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1956.200	40.36	-16.00	74.0	-33.64	Peak	315.00	150	Vertical	Pass
1**	1956.200	31.43	-16.00	54.0	-22.57	AV	315.00	150	Vertical	Pass
2	2441.000	87.22	-12.47	74.0	13.22	Peak	42.00	150	Vertical	N/A
2**	2441.000	86.33	-12.47	54.0	32.33	AV	42.00	150	Vertical	N/A
3	3140.200	45.19	-8.69	74.0	-28.81	Peak	121.00	150	Vertical	Pass
3**	3140.200	35.58	-8.69	54.0	-18.42	AV	121.00	150	Vertical	Pass
4	5085.800	51.41	-3.15	74.0	-22.59	Peak	356.00	150	Vertical	Pass
4**	5085.800	40.59	-3.15	54.0	-13.41	AV	356.00	150	Vertical	Pass
5	6797.000	53.07	-1.26	74.0	-20.93	Peak	3.00	150	Vertical	Pass
5**	6797.000	43.43	-1.26	54.0	-10.57	AV	3.00	150	Vertical	Pass
6	11621.276	51.34	2.24	74.0	-22.66	Peak	71.00	150	Vertical	Pass
6**	11621.276	41.76	2.24	54.0	-12.24	AV	71.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD) FCC Part 15C_FCC_15.247(2.4G)_1GHz-18GHz

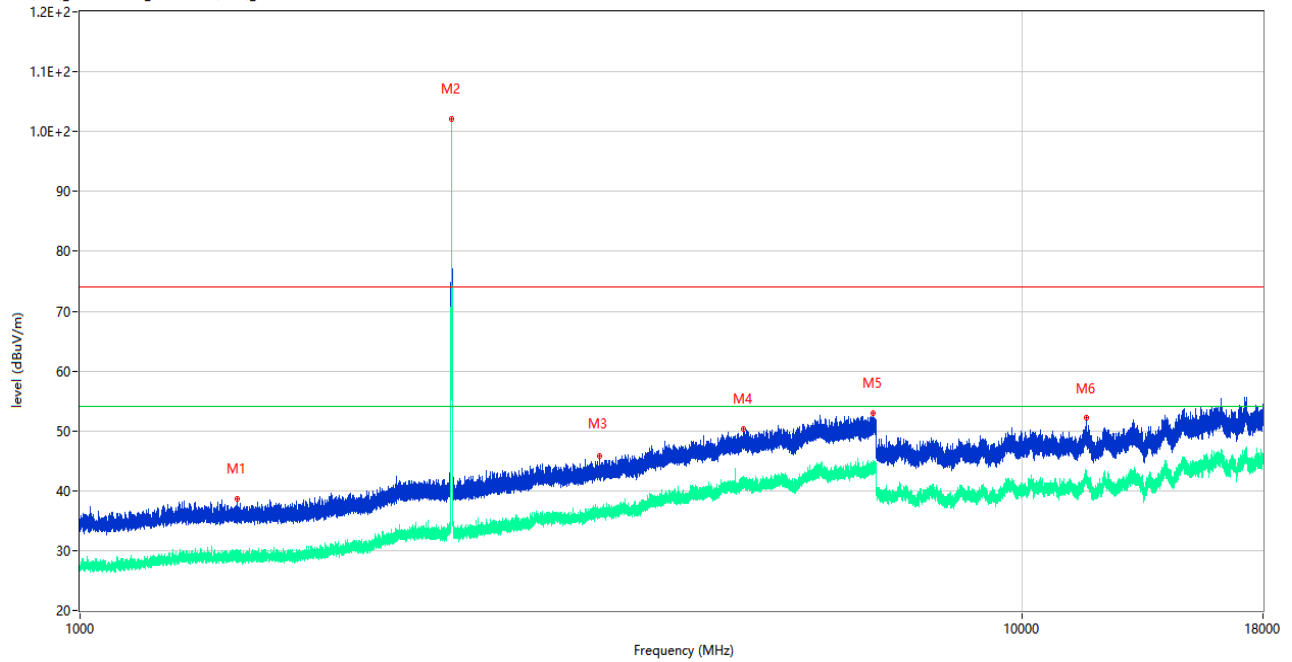

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1470.000	38.60	-17.68	74.0	-35.40	Peak	266.00	150	Horizontal	Pass
1**	1470.000	29.91	-17.68	54.0	-24.09	AV	266.00	150	Horizontal	Pass
2	2479.800	102.11	-12.83	74.0	28.11	Peak	87.00	150	Horizontal	N/A
2**	2479.800	101.07	-12.83	54.0	47.07	AV	87.00	150	Horizontal	N/A
3	3559.000	45.86	-7.77	74.0	-28.14	Peak	22.00	150	Horizontal	Pass
3**	3559.000	35.49	-7.77	54.0	-18.51	AV	22.00	150	Horizontal	Pass
4	5061.600	50.33	-2.86	74.0	-23.67	Peak	14.00	150	Horizontal	Pass
4**	5061.600	41.10	-2.86	54.0	-12.90	AV	14.00	150	Horizontal	Pass
5	6941.400	52.88	-0.39	74.0	-21.12	Peak	280.00	150	Horizontal	Pass
5**	6941.400	43.36	-0.39	54.0	-10.64	AV	280.00	150	Horizontal	Pass
6	11690.563	52.27	2.38	74.0	-21.73	Peak	146.00	150	Horizontal	Pass
6**	11690.563	41.94	2.38	54.0	-12.06	AV	146.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

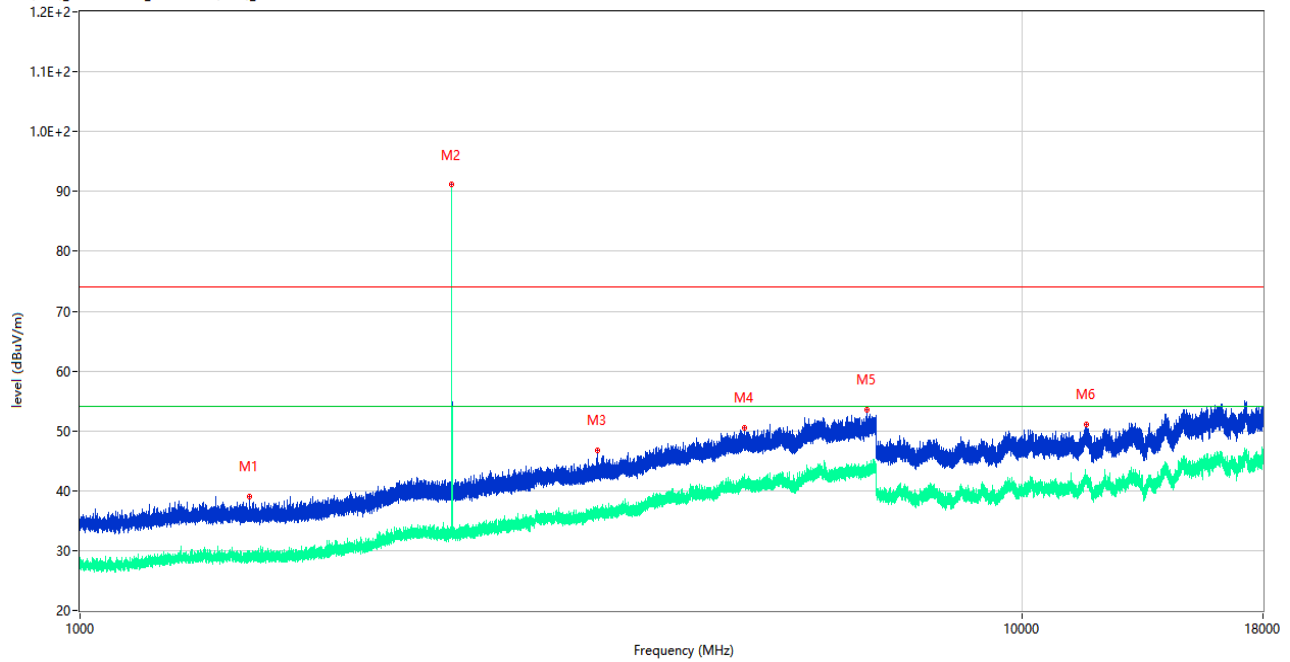

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1512.200	38.96	-17.81	74.0	-35.04	Peak	160.00	150	Vertical	Pass
1**	1512.200	29.37	-17.81	54.0	-24.63	AV	160.00	150	Vertical	Pass
2	2479.900	91.18	-12.83	74.0	17.18	Peak	155.00	150	Vertical	N/A
2**	2479.900	90.43	-12.83	54.0	36.43	AV	155.00	150	Vertical	N/A
3	3537.000	46.77	-7.28	74.0	-27.23	Peak	223.00	150	Vertical	Pass
3**	3537.000	36.21	-7.28	54.0	-17.79	AV	223.00	150	Vertical	Pass
4	5067.600	50.46	-2.93	74.0	-23.54	Peak	349.00	150	Vertical	Pass
4**	5067.600	40.95	-2.93	54.0	-13.05	AV	349.00	150	Vertical	Pass
5	6836.000	53.54	-1.12	74.0	-20.46	Peak	209.00	150	Vertical	Pass
5**	6836.000	43.33	-1.12	54.0	-10.67	AV	209.00	150	Vertical	Pass
6	11687.113	51.16	2.41	74.0	-22.84	Peak	43.00	150	Vertical	Pass
6**	11687.113	41.30	2.41	54.0	-12.70	AV	43.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

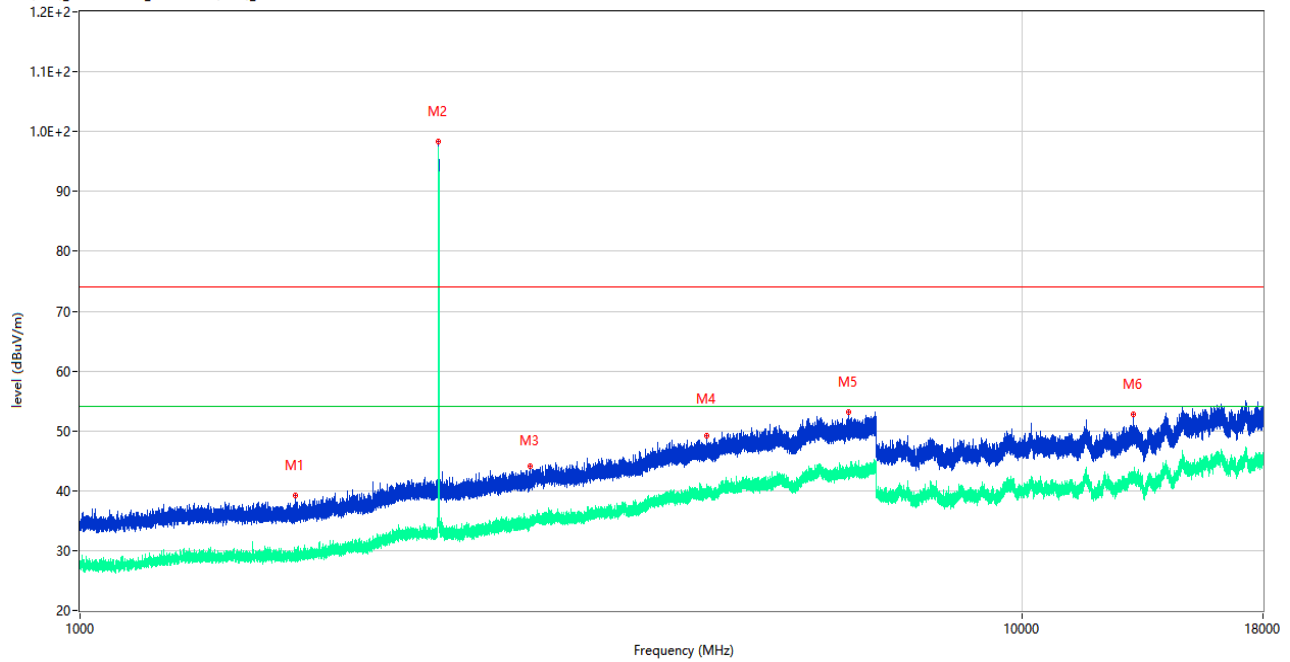

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1692.000	39.17	-17.72	74.0	-34.83	Peak	167.00	150	Horizontal	Pass
1**	1692.000	28.74	-17.72	54.0	-25.26	AV	167.00	150	Horizontal	Pass
2	2402.000	98.37	-13.35	74.0	24.37	Peak	78.00	150	Horizontal	N/A
2**	2402.000	97.13	-13.35	54.0	43.13	AV	78.00	150	Horizontal	N/A
3	3006.200	44.06	-9.48	74.0	-29.94	Peak	123.00	150	Horizontal	Pass
3**	3006.200	34.53	-9.48	54.0	-19.47	AV	123.00	150	Horizontal	Pass
4	4627.000	49.26	-4.28	74.0	-24.74	Peak	204.00	150	Horizontal	Pass
4**	4627.000	39.86	-4.28	54.0	-14.14	AV	204.00	150	Horizontal	Pass
5	6532.400	53.14	-1.72	74.0	-20.86	Peak	160.00	150	Horizontal	Pass
5**	6532.400	42.49	-1.72	54.0	-11.51	AV	160.00	150	Horizontal	Pass
6	13120.650	52.86	2.91	74.0	-21.14	Peak	360.00	150	Horizontal	Pass
6**	13120.650	42.06	2.91	54.0	-11.94	AV	360.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

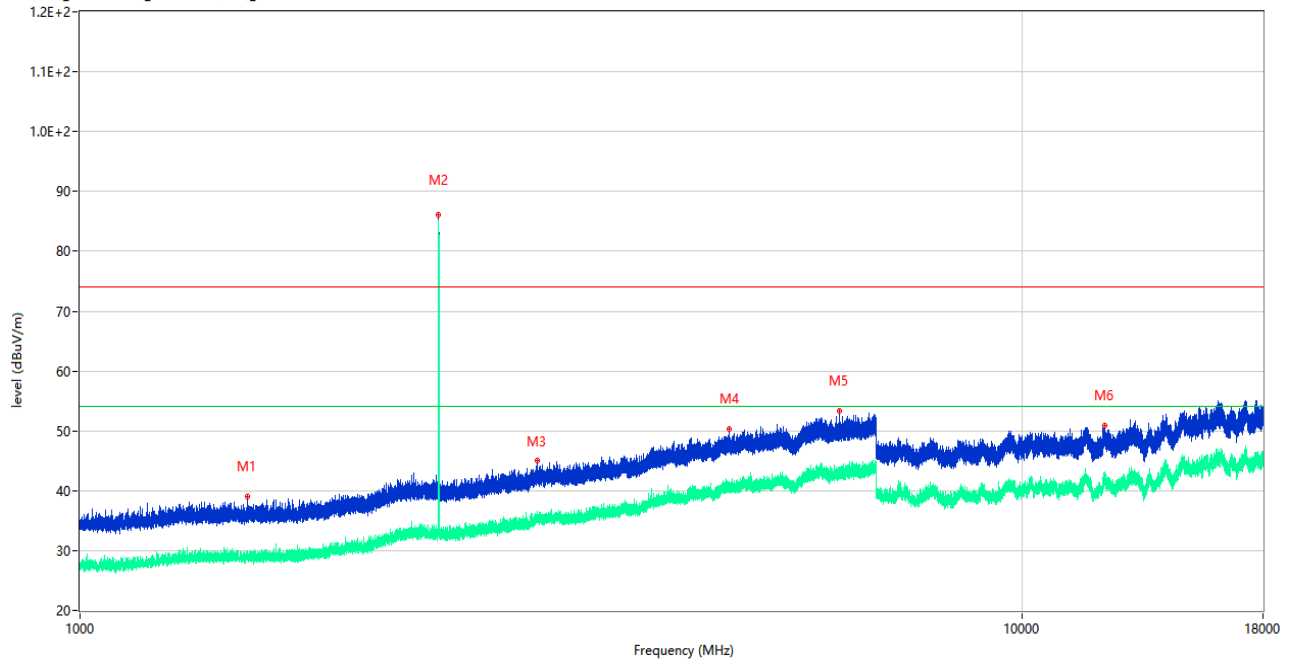

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1507.000	39.11	-17.79	74.0	-34.89	Peak	284.00	150	Vertical	Pass
1**	1507.000	28.56	-17.79	54.0	-25.44	AV	284.00	150	Vertical	Pass
2	2401.800	86.05	-13.35	74.0	12.05	Peak	353.00	150	Vertical	N/A
2**	2401.800	84.49	-13.35	54.0	30.49	AV	353.00	150	Vertical	N/A
3	3056.000	44.96	-9.14	74.0	-29.04	Peak	316.00	150	Vertical	Pass
3**	3056.000	34.97	-9.14	54.0	-19.03	AV	316.00	150	Vertical	Pass
4	4885.000	50.36	-3.64	74.0	-23.64	Peak	203.00	150	Vertical	Pass
4**	4885.000	40.99	-3.64	54.0	-13.01	AV	203.00	150	Vertical	Pass
5	6396.000	53.36	-1.79	74.0	-20.64	Peak	196.00	150	Vertical	Pass
5**	6396.000	41.96	-1.79	54.0	-12.04	AV	196.00	150	Vertical	Pass
6	12222.725	50.88	2.60	74.0	-23.12	Peak	23.00	150	Vertical	Pass
6**	12222.725	41.43	2.60	54.0	-12.57	AV	23.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

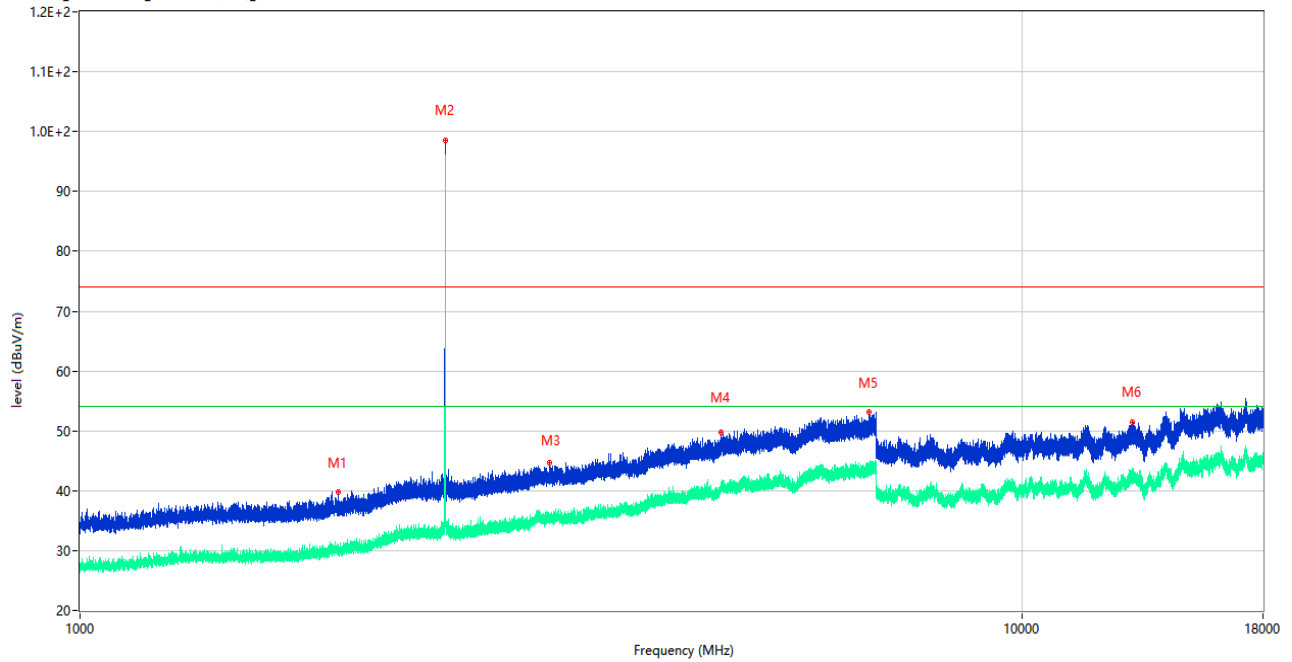

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1878.100	39.86	-16.32	74.0	-34.14	Peak	39.00	150	Horizontal	Pass
1**	1878.100	29.88	-16.32	54.0	-24.12	AV	39.00	150	Horizontal	Pass
2	2441.000	98.49	-12.47	74.0	24.49	Peak	74.00	150	Horizontal	N/A
2**	2441.000	96.02	-12.47	54.0	42.02	AV	74.00	150	Horizontal	N/A
3	3146.200	44.61	-8.74	74.0	-29.39	Peak	213.00	150	Horizontal	Pass
3**	3146.200	35.50	-8.74	54.0	-18.50	AV	213.00	150	Horizontal	Pass
4	4788.600	49.83	-3.68	74.0	-24.17	Peak	27.00	150	Horizontal	Pass
4**	4788.600	39.96	-3.68	54.0	-14.04	AV	27.00	150	Horizontal	Pass
5	6876.000	53.10	-0.92	74.0	-20.90	Peak	161.00	150	Horizontal	Pass
5**	6876.000	43.11	-0.92	54.0	-10.89	AV	161.00	150	Horizontal	Pass
6	13079.175	51.45	2.92	74.0	-22.55	Peak	105.00	150	Horizontal	Pass
6**	13079.175	43.39	2.92	54.0	-10.61	AV	105.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

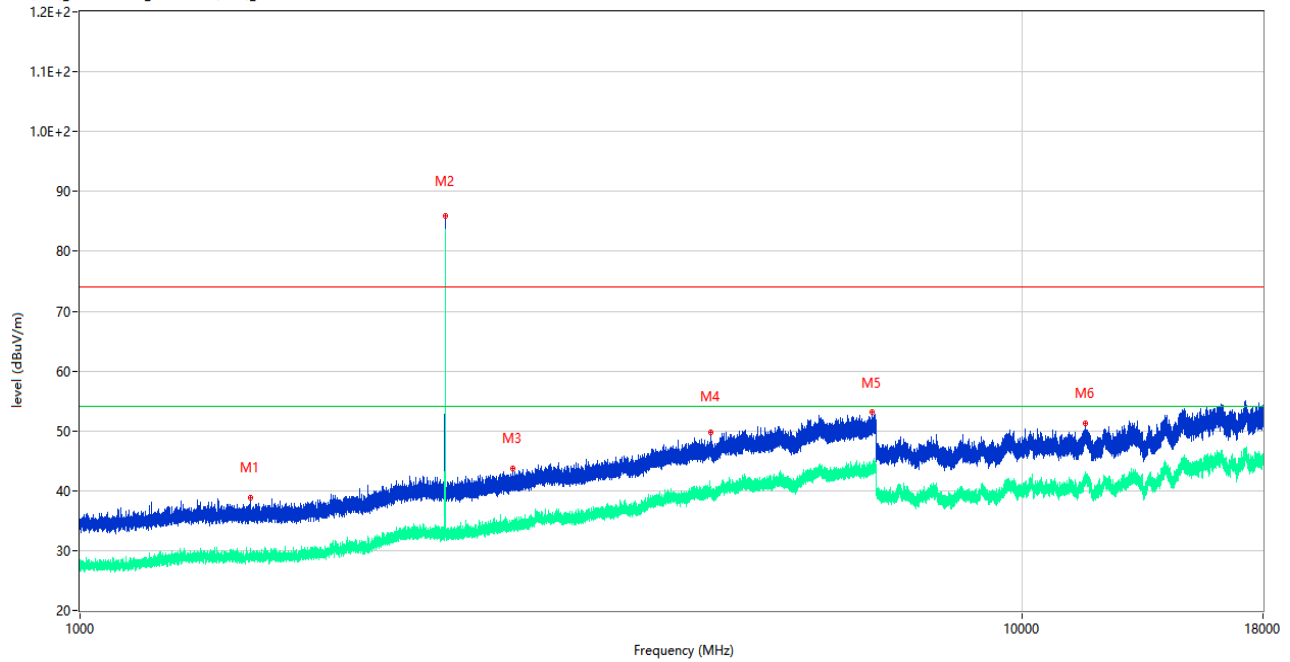

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1517.300	38.76	-17.74	74.0	-35.24	Peak	192.00	150	Vertical	Pass
1**	1517.300	28.91	-17.74	54.0	-25.09	AV	192.00	150	Vertical	Pass
2	2441.100	85.99	-12.47	74.0	11.99	Peak	38.00	150	Vertical	N/A
2**	2441.100	83.53	-12.47	54.0	29.53	AV	38.00	150	Vertical	N/A
3	2879.000	43.68	-10.33	74.0	-30.32	Peak	358.00	150	Vertical	Pass
3**	2879.000	34.33	-10.33	54.0	-19.67	AV	358.00	150	Vertical	Pass
4	4666.200	49.82	-4.43	74.0	-24.18	Peak	78.00	150	Vertical	Pass
4**	4666.200	39.56	-4.43	54.0	-14.44	AV	78.00	150	Vertical	Pass
5	6925.200	53.21	-0.36	74.0	-20.79	Peak	190.00	150	Vertical	Pass
5**	6925.200	43.57	-0.36	54.0	-10.43	AV	190.00	150	Vertical	Pass
6	11652.325	51.30	2.55	74.0	-22.70	Peak	231.00	150	Vertical	Pass
6**	11652.325	43.16	2.55	54.0	-10.84	AV	231.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

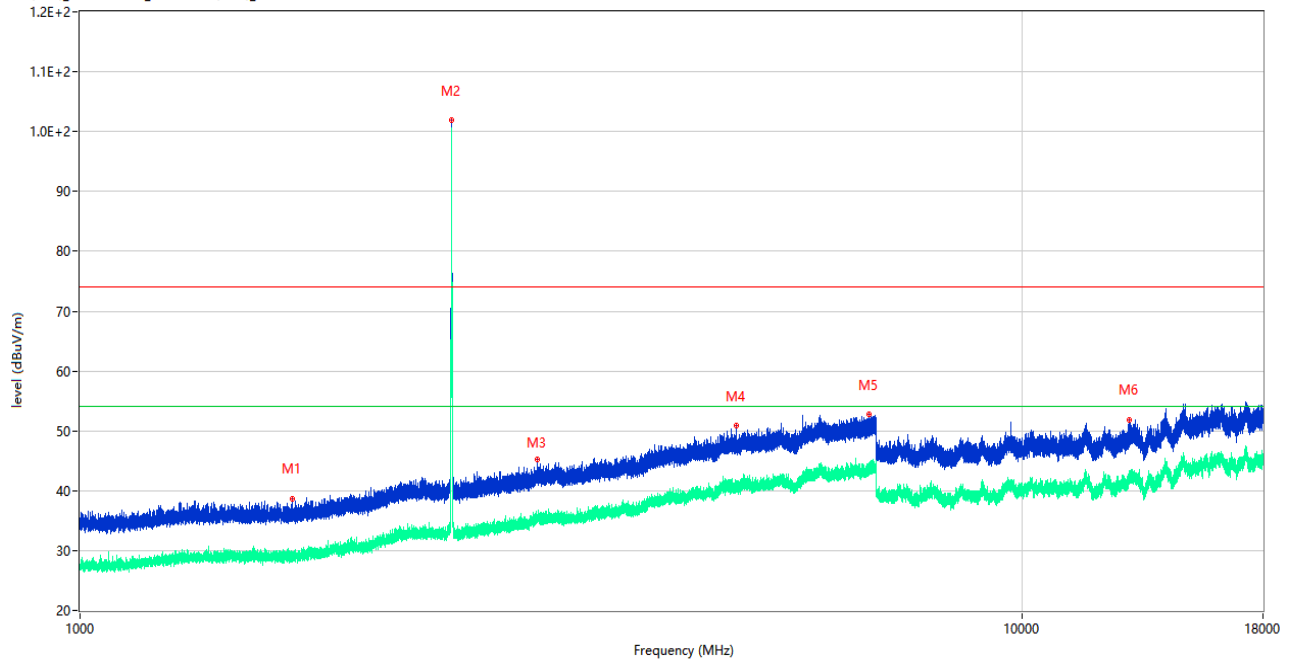

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1678.800	38.64	-17.58	74.0	-35.36	Peak	360.00	150	Horizontal	Pass
1**	1678.800	29.50	-17.58	54.0	-24.50	AV	360.00	150	Horizontal	Pass
2	2480.000	101.91	-12.83	74.0	27.91	Peak	81.00	150	Horizontal	N/A
2**	2480.000	100.57	-12.83	54.0	46.57	AV	81.00	150	Horizontal	N/A
3	3059.800	45.21	-9.31	74.0	-28.79	Peak	337.00	150	Horizontal	Pass
3**	3059.800	35.46	-9.31	54.0	-18.54	AV	337.00	150	Horizontal	Pass
4	4970.400	50.88	-3.90	74.0	-23.12	Peak	174.00	150	Horizontal	Pass
4**	4970.400	40.01	-3.90	54.0	-13.99	AV	174.00	150	Horizontal	Pass
5	6876.000	52.83	-0.92	74.0	-21.17	Peak	19.00	150	Horizontal	Pass
5**	6876.000	43.32	-0.92	54.0	-10.68	AV	19.00	150	Horizontal	Pass
6	12990.713	51.79	2.83	74.0	-22.21	Peak	360.00	150	Horizontal	Pass
6**	12990.713	41.99	2.83	54.0	-12.01	AV	360.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

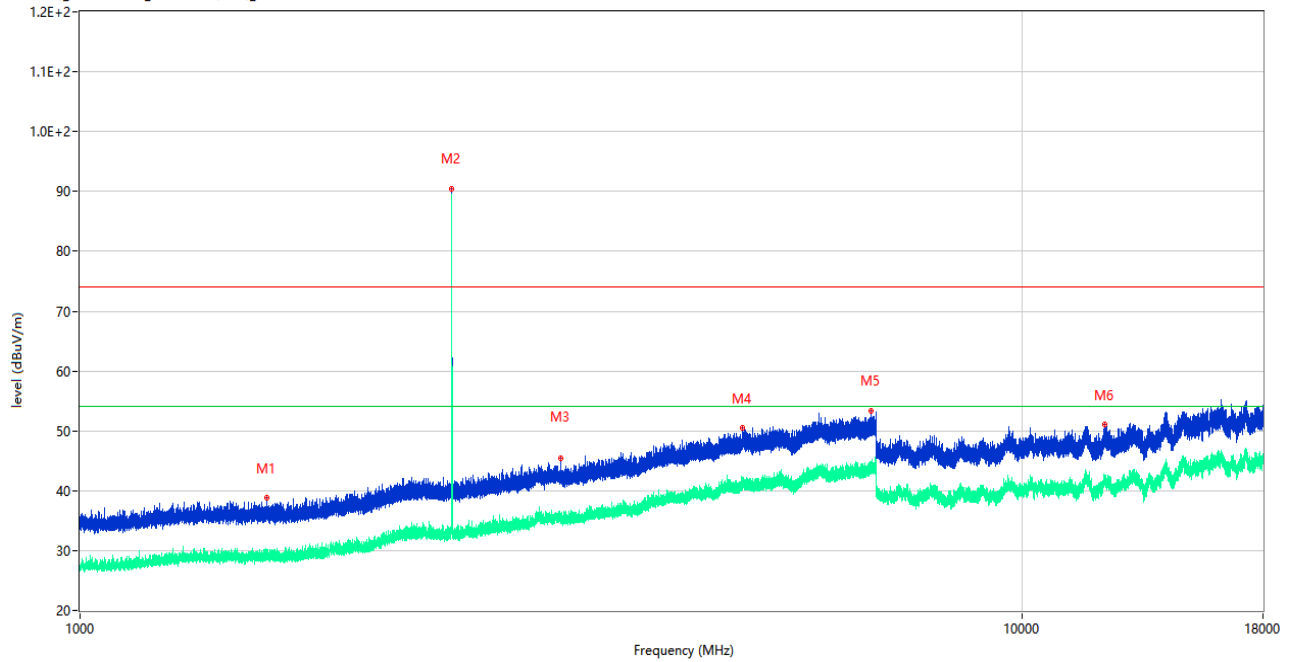


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1577.700	38.82	-17.51	74.0	-35.18	Peak	106.00	150	Vertical	Pass
1**	1577.700	29.60	-17.51	54.0	-24.40	AV	106.00	150	Vertical	Pass
2	2480.300	90.43	-12.83	74.0	16.43	Peak	150.00	150	Vertical	N/A
2**	2480.300	87.17	-12.83	54.0	33.17	AV	150.00	150	Vertical	N/A
3	3235.800	45.34	-8.78	74.0	-28.66	Peak	153.00	150	Vertical	Pass
3**	3235.800	34.83	-8.78	54.0	-19.17	AV	153.00	150	Vertical	Pass
4	5046.600	50.59	-2.90	74.0	-23.41	Peak	279.00	150	Vertical	Pass
4**	5046.600	41.76	-2.90	54.0	-12.24	AV	279.00	150	Vertical	Pass
5	6915.600	53.38	-0.18	74.0	-20.62	Peak	34.00	150	Vertical	Pass
5**	6915.600	43.30	-0.18	54.0	-10.70	AV	34.00	150	Vertical	Pass
6	12218.125	51.02	2.59	74.0	-22.98	Peak	129.00	150	Vertical	Pass
6**	12218.125	41.87	2.59	54.0	-12.13	AV	129.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

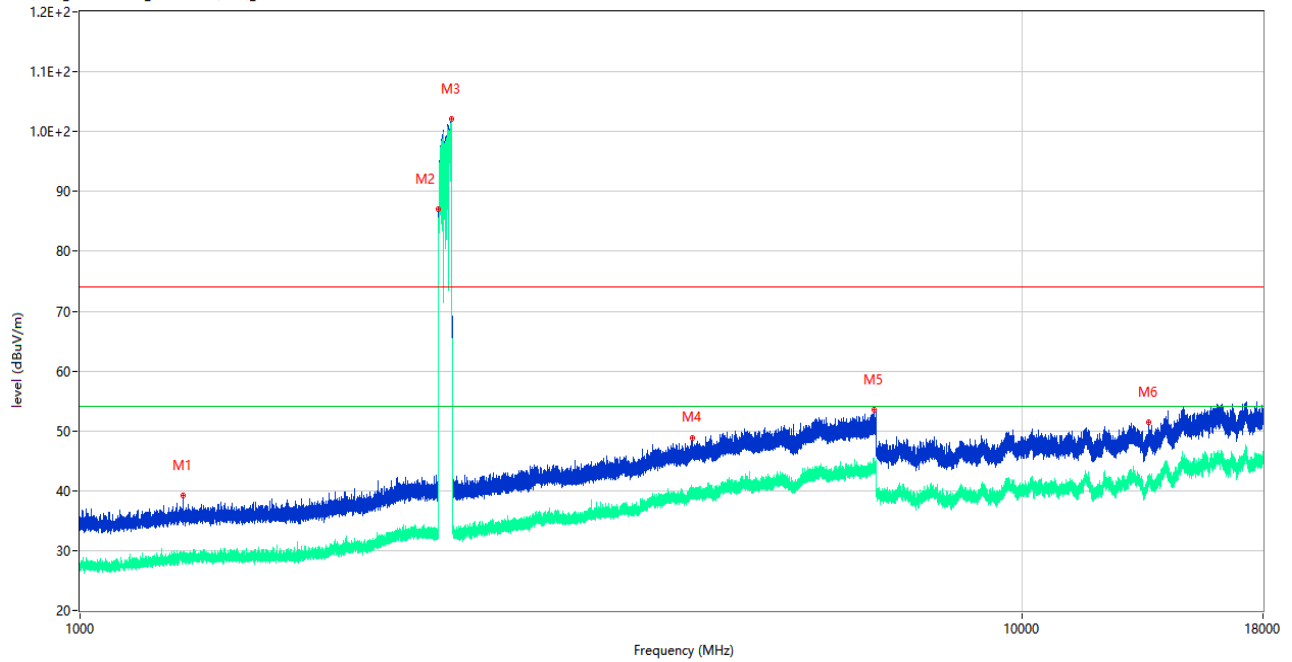

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1286.000	39.23	-17.59	74.0	-34.77	Peak	229.00	150	Horizontal	Pass
1**	1286.000	28.85	-17.59	54.0	-25.15	AV	229.00	150	Horizontal	Pass
2	2402.600	87.02	-13.33	74.0	13.02	Peak	167.00	150	Horizontal	N/A
2**	2402.600	85.30	-13.33	54.0	31.30	AV	167.00	150	Horizontal	N/A
3	2477.800	102.04	-12.72	74.0	28.04	Peak	83.00	150	Horizontal	N/A
3**	2477.800	100.52	-12.72	54.0	46.52	AV	83.00	150	Horizontal	N/A
4	4464.400	48.85	-4.08	74.0	-25.15	Peak	238.00	150	Horizontal	Pass
4**	4464.400	39.64	-4.08	54.0	-14.36	AV	238.00	150	Horizontal	Pass
5	6957.000	53.47	-0.57	74.0	-20.53	Peak	53.00	150	Horizontal	Pass
5**	6957.000	43.33	-0.57	54.0	-10.67	AV	53.00	150	Horizontal	Pass
6	13628.063	51.45	1.31	74.0	-22.55	Peak	188.00	150	Horizontal	Pass
6**	13628.063	41.21	1.31	54.0	-12.79	AV	188.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

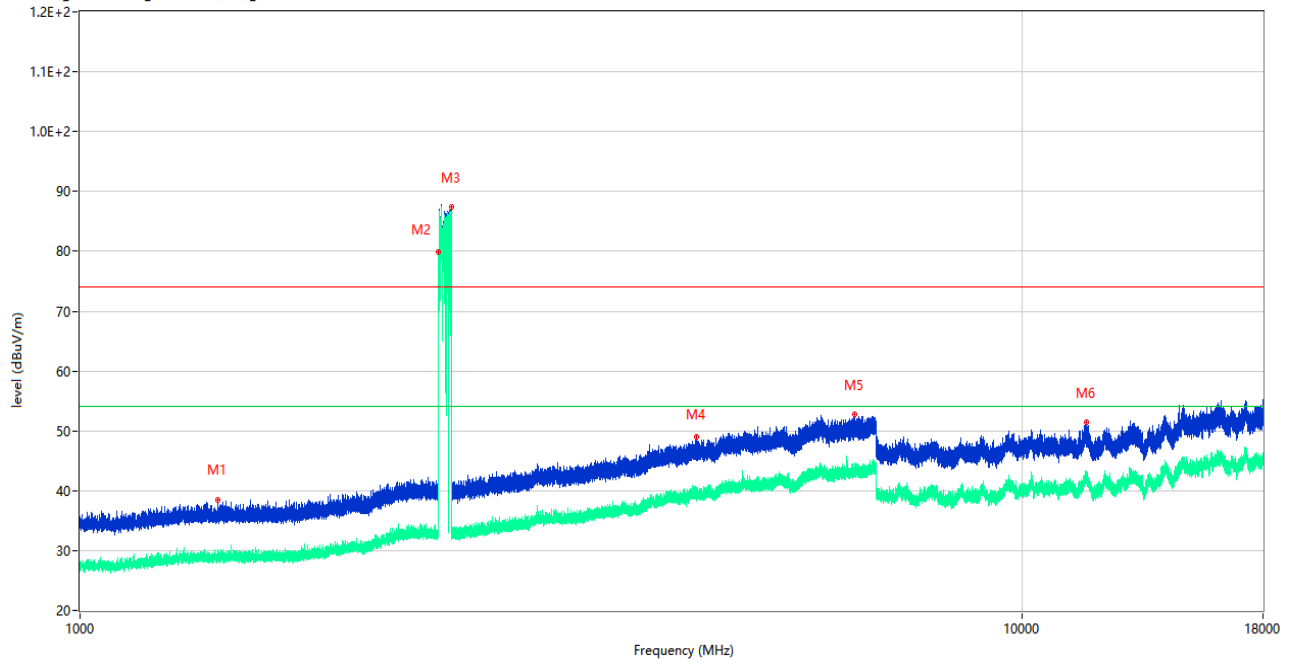

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1400.900	38.46	-17.52	74.0	-35.54	Peak	188.00	150	Vertical	Pass
1**	1400.900	30.22	-17.52	54.0	-23.78	AV	188.00	150	Vertical	Pass
2	2401.900	79.93	-13.35	74.0	5.93	Peak	222.00	150	Vertical	N/A
2**	2401.900	78.56	-13.35	54.0	24.56	AV	222.00	150	Vertical	N/A
3	2476.400	87.38	-12.77	74.0	13.38	Peak	160.00	150	Vertical	N/A
3**	2476.400	83.16	-12.77	54.0	29.16	AV	160.00	150	Vertical	N/A
4	4505.800	48.93	-4.31	74.0	-25.07	Peak	136.00	150	Vertical	Pass
4**	4505.800	38.87	-4.31	54.0	-15.13	AV	136.00	150	Vertical	Pass
5	6641.600	52.78	-1.16	74.0	-21.22	Peak	105.00	150	Vertical	Pass
5**	6641.600	43.48	-1.16	54.0	-10.52	AV	105.00	150	Vertical	Pass
6	11688.263	51.38	2.40	74.0	-22.62	Peak	155.00	150	Vertical	Pass
6**	11688.263	41.47	2.40	54.0	-12.53	AV	155.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

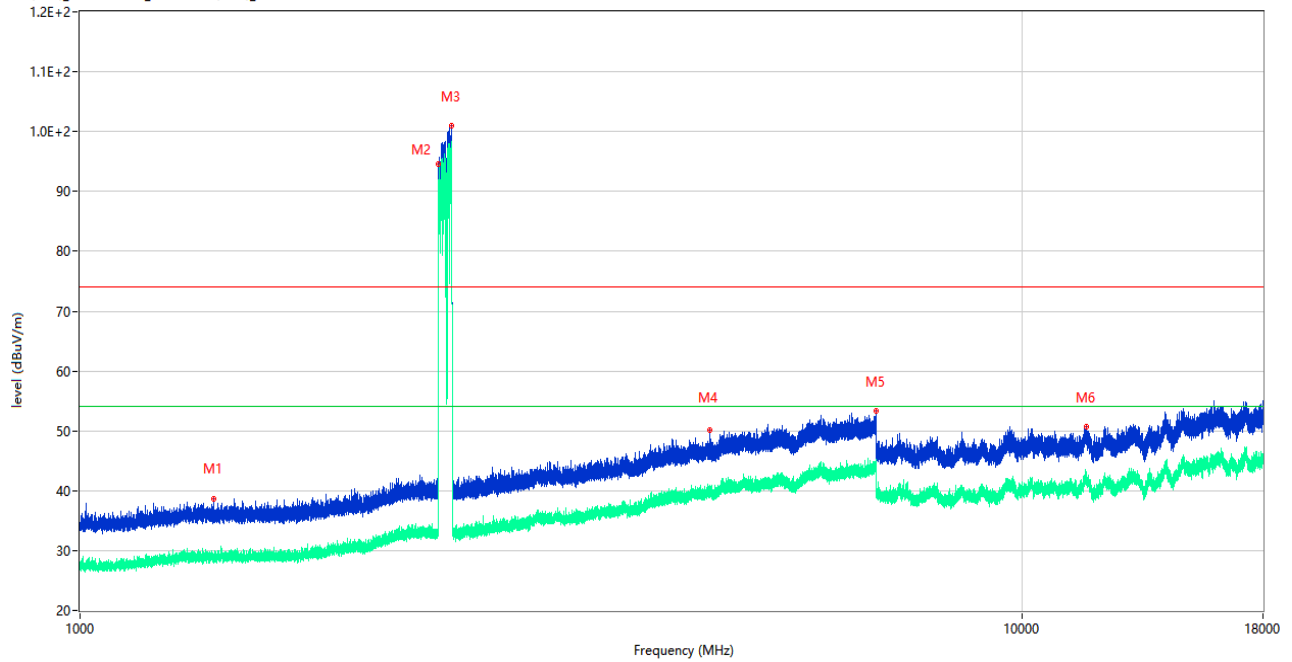

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1387.600	38.55	-17.45	74.0	-35.45	Peak	327.00	150	Horizontal	Pass
1**	1387.600	28.90	-17.45	54.0	-25.10	AV	327.00	150	Horizontal	Pass
2	2402.600	94.57	-13.33	74.0	20.57	Peak	92.00	150	Horizontal	N/A
2**	2402.600	91.33	-13.33	54.0	37.33	AV	92.00	150	Horizontal	N/A
3	2479.900	100.96	-12.83	74.0	26.96	Peak	120.00	150	Horizontal	N/A
3**	2479.900	98.01	-12.83	54.0	44.01	AV	120.00	150	Horizontal	N/A
4	4656.200	50.09	-4.20	74.0	-23.91	Peak	92.00	150	Horizontal	Pass
4**	4656.200	39.85	-4.20	54.0	-14.15	AV	92.00	150	Horizontal	Pass
5	6990.200	53.32	-0.42	74.0	-20.68	Peak	360.00	150	Horizontal	Pass
5**	6990.200	43.73	-0.42	54.0	-10.27	AV	360.00	150	Horizontal	Pass
6	11700.338	50.61	2.30	74.0	-23.39	Peak	344.00	150	Horizontal	Pass
6**	11700.338	42.35	2.30	54.0	-11.65	AV	344.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

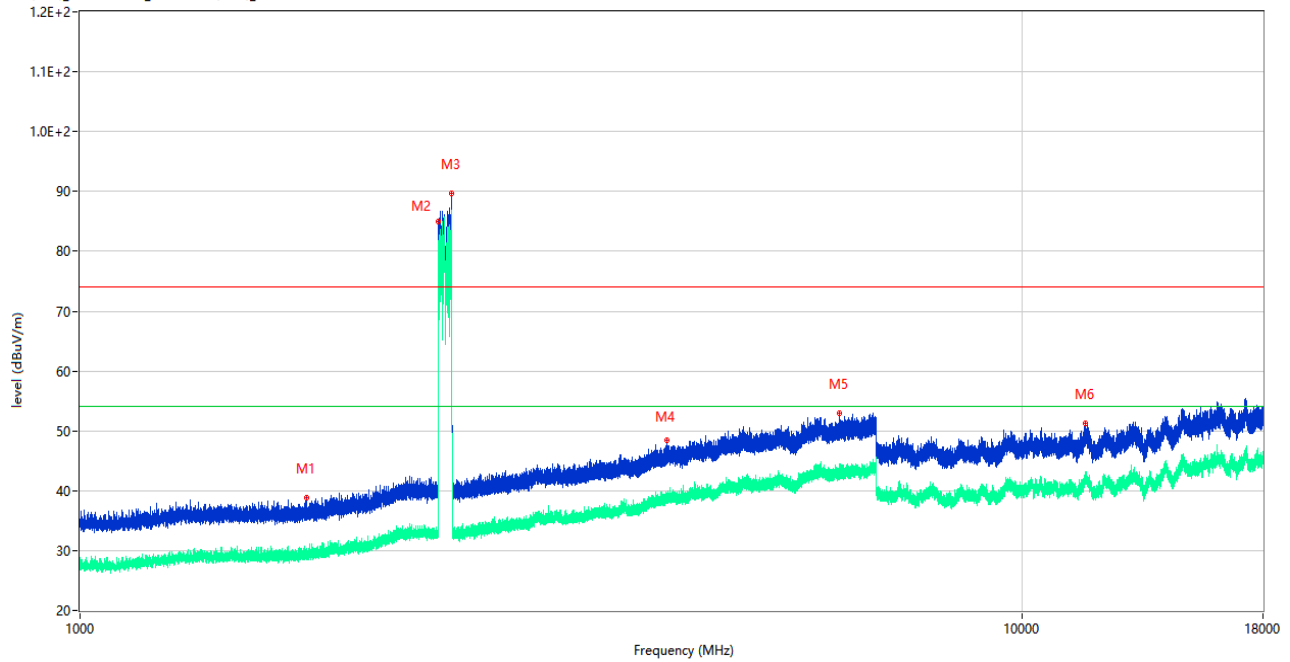

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1739.100	38.85	-17.47	74.0	-35.15	Peak	0.00	150	Vertical	Pass
1**	1739.100	29.82	-17.47	54.0	-24.18	AV	0.00	150	Vertical	Pass
2	2402.000	84.99	-13.35	74.0	10.99	Peak	0.00	150	Vertical	N/A
2**	2402.000	81.62	-13.35	54.0	27.62	AV	0.00	150	Vertical	N/A
3	2477.900	89.62	-12.72	74.0	15.62	Peak	151.00	150	Vertical	N/A
3**	2477.900	85.74	-12.72	54.0	31.74	AV	151.00	150	Vertical	N/A
4	4192.800	48.40	-5.28	74.0	-25.60	Peak	157.00	150	Vertical	Pass
4**	4192.800	38.47	-5.28	54.0	-15.53	AV	157.00	150	Vertical	Pass
5	6394.800	53.03	-1.80	74.0	-20.97	Peak	314.00	150	Vertical	Pass
5**	6394.800	42.26	-1.80	54.0	-11.74	AV	314.00	150	Vertical	Pass
6	11666.987	51.25	2.49	74.0	-22.75	Peak	241.00	150	Vertical	Pass
6**	11666.987	42.39	2.49	54.0	-11.61	AV	241.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	52.609	31.47	74	21.391	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	52.365	31.40	74	21.635	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	52.370	31.47	74	21.630	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	51.768	31.40	74	22.232	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	52.136	31.47	74	21.864	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	51.755	31.40	74	22.245	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	51.739	31.47	74	22.261	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	51.717	31.40	74	22.283	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL, PEAK

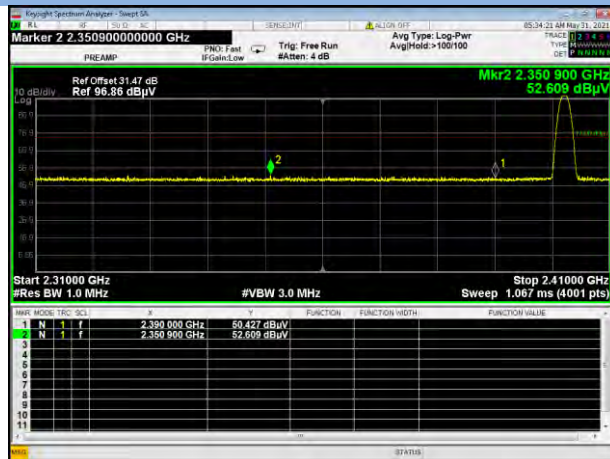


GFSK HIGH CHANNEL, PEAK

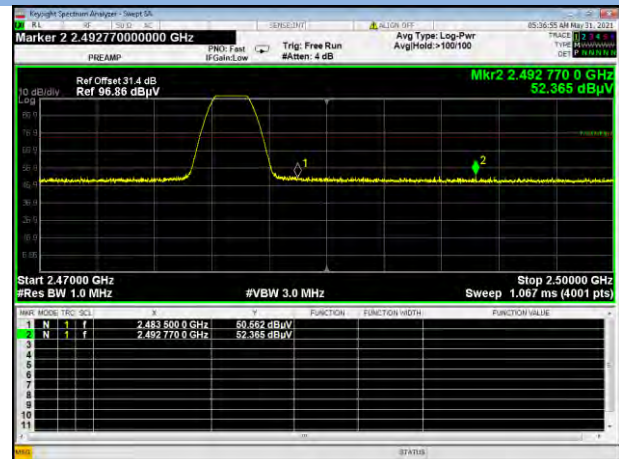

8-DPSK LOW CHANNEL, PEAK

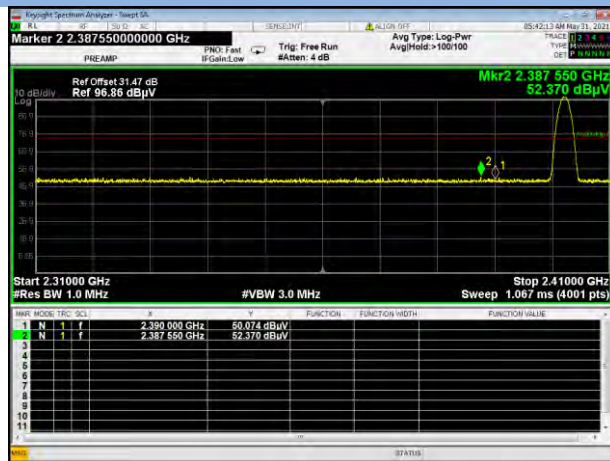


8-DPSK HIGH CHANNEL, PEAK

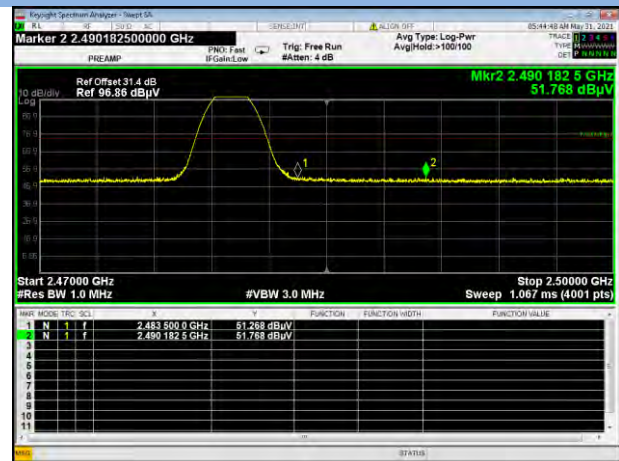


Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

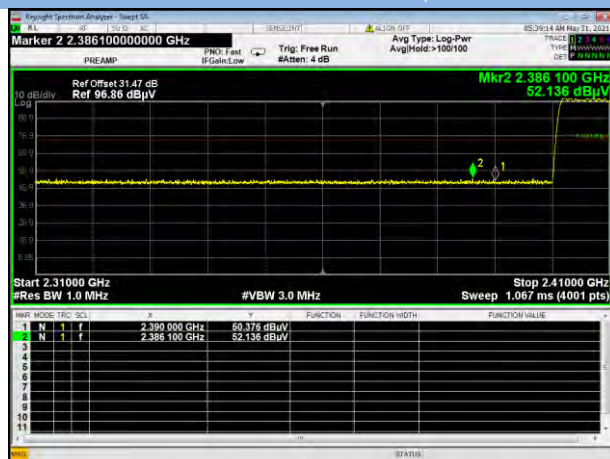

GFSK HIGH FREQUENCY BAND, PEAK

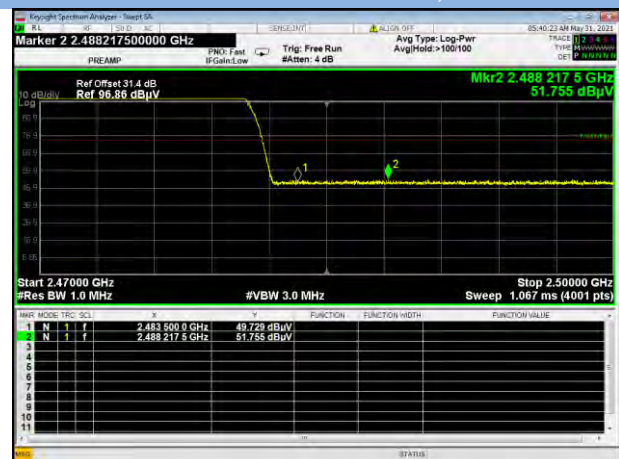

8-DPSK LOW FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, PEAK



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2150618-AR.pdf”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2150618-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2150618-AI.PDF”.

--END OF REPORT--