



TEST REPORT

Report No. : CHTEW19090080 Report verification : 

Project No..... : SHT1908021801EW

FCC ID..... : 2AUHIMBL-L6

Applicant's name..... : Shenzhen Maibaole Industrial Co., Ltd.

Address..... : Seven Floor,Po Yun Logistics Center Building(Three), Xixiang Street, Baoan District, Shenzhen, China

Manufacturer..... : Shenzhen Maibaole Industrial Co., Ltd.

Address..... : Seven Floor,Po Yun Logistics Center Building(Three), Xixiang Street, Baoan District, Shenzhen, China

Test item description : Intelligent commercial cash register

Trade Mark : MBLCBM

Model/Type reference..... : MBL-L6

Listed Model(s) : MBL-E200, MBL-E300, MBL-E400, MBL-E500, MBL-M7, MBL-M9, MBL-B7, MBL-B9, MBL-M6

Standard : 47 CFR FCC Part 15 Subpart B

Date of receipt of test sample..... : Aug.30, 2019

Date of testing..... : Aug.30, 2019- Sept.10, 2019

Date of issue..... : Sept.11, 2019

Result..... : Pass

Compiled by
(position+printed name+signature)... : File administrators Echo Wei

Echo Wei

Supervised by
(position+printed name+signature)... : Project Engineer Edward Pan

Edward Pan

Approved by
(position+printed name+signature)... : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION.....</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION.....</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY.....</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	EUT operation mode	5
3.4.	Configuration of Tested System	5
3.5.	Support unit used in test configuration	5
<u>4.</u>	<u>TEST ENVIRONMENT.....</u>	<u>6</u>
4.1.	Address of the test laboratory	6
4.2.	Test Facility	6
4.3.	Environmental conditions	7
4.4.	Statement of the measurement uncertainty	7
4.5.	Equipments Used during the Test	8
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>9</u>
5.1.	Conducted Emissions Test	9
5.2.	Radiated Emissions Test	12
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT.....</u>	<u>16</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....</u>	<u>17</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2019-09-11	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Emissions	15.107(a)	PASS	Kang Yang
Radiated Emissions	15.109(a)	PASS	Tony Duan

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Shenzhen Maibaole Industrial Co., Ltd.
Address:	Seven Floor,Po Yun Logistics Center Building(Three), Xixiang Street, Baoan District, Shenzhen, China
Manufacturer:	Shenzhen Maibaole Industrial Co., Ltd.
Address:	Seven Floor,Po Yun Logistics Center Building(Three), Xixiang Street, Baoan District, Shenzhen, China

3.2. Product Description

Name of EUT:	Intelligent commercial cash register
Trade Mark:	MBLCBM
Model No.:	MBL-L6
Listed Model(s)	MBL-E200, MBL-E300, MBL-E400, MBL-E500, MBL-M7, MBL-M9, MBL-B7, MBL-B9, MBL-M6
Power supply:	DC 12V
Adapter information:	Model:ADP-90H12 Input:100-240Va.c.,50/60Hz,1.5A MAX Output: 12Vd.c.,7A

3.3. EUT operation mode

Test mode	LAN mode	USB Playing Video	VGA mode	Print mode	AC Adapter
1	√				
2		√			√
3			√		√
4				√	√

Pre-scan all of above modes. Only show VGA mode which is the worst case on the report.

3.4. Configuration of Tested System

N/A.

3.5. Support unit used in test configuration

Item	Equipment	Manufacturer	Model No.	FCC ID / FCC DoC	Data Cable	Power Cord
1	Monitor	DELL	E1912Hf	FCC DoC	N/A	Unshielded 1.8m
2	Keyboard	DELL	SK8115	FCC DoC	Unshielded, 1.5m	N/A
3	Mouse	DELL	MS111-T	FCC DoC	Unshielded, 1.5m	N/A

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

IC-Registration No.: 5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emissions	30~1000MHz	4.90 dB	(1)
Radiated Emissions	1~18GHz	4.96 dB	(1)
Conducted Disturbance	0.15~30MHz	3.02 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

● Conducted Emission						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
●	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
●	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
●	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
○	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
○	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
○	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
○	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
○	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
○	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26

● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
●	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
●	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions Test

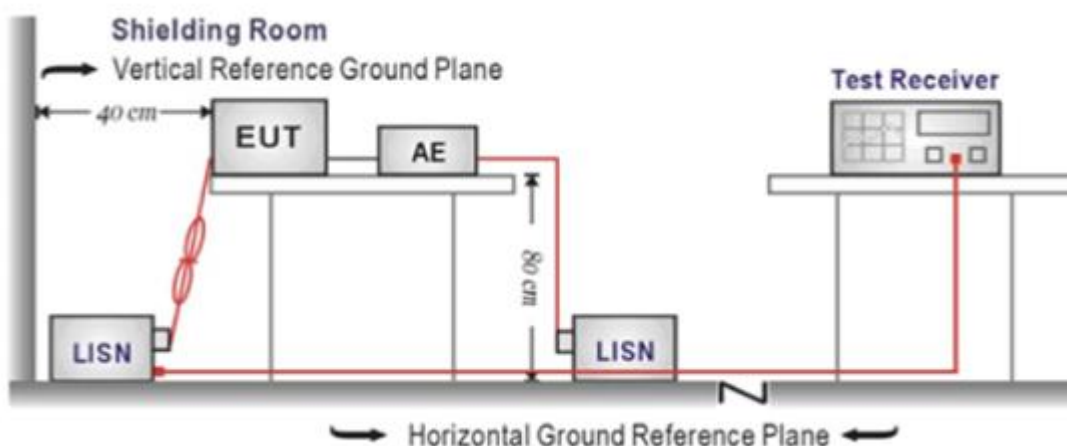
LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

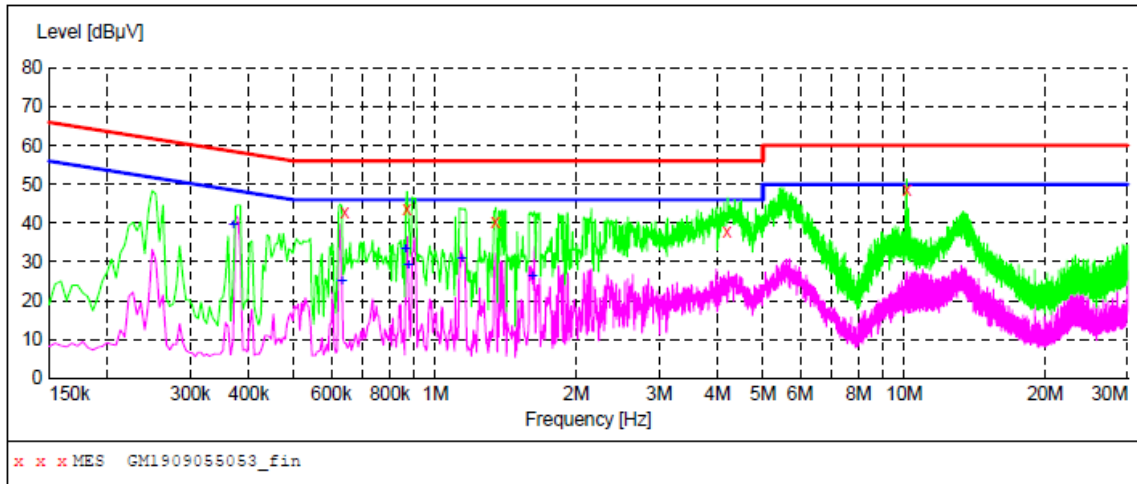
Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:

L

**MEASUREMENT RESULT: "GM1909055053_fin"**

9/5/2019 1:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.640500	42.70	9.9	56	13.3	QP	L1	GND
0.870000	43.60	9.9	56	12.4	QP	L1	GND
1.342500	40.50	9.9	56	15.5	QP	L1	GND
4.186500	37.70	9.9	56	18.3	QP	L1	GND
10.131000	48.70	10.1	60	11.3	QP	L1	GND

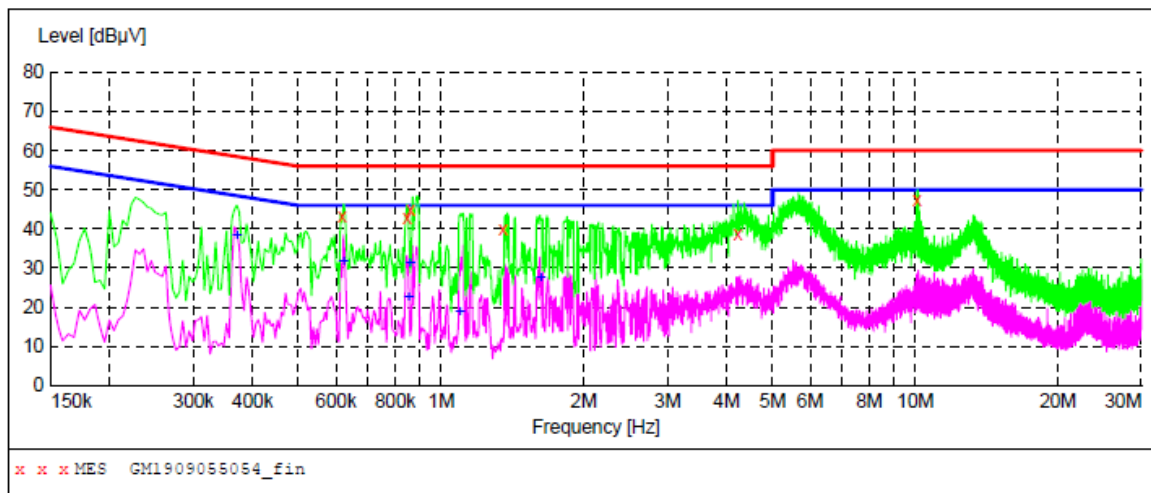
MEASUREMENT RESULT: "GM1909055053_fin2"

9/5/2019 1:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.370500	39.30	9.9	49	9.2	AV	L1	GND
0.631500	24.80	9.9	46	21.2	AV	L1	GND
0.865500	33.10	9.9	46	12.9	AV	L1	GND
0.874500	29.00	9.9	46	17.0	AV	L1	GND
1.140000	30.70	9.9	46	15.3	AV	L1	GND
1.612500	26.20	9.9	46	19.8	AV	L1	GND

Test Line:

N

**MEASUREMENT RESULT: "GM1909055054_fin"**

9/5/2019 1:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.618000	43.30	9.9	56	12.7	QP	N	GND
0.847500	42.70	9.9	56	13.3	QP	N	GND
0.861000	44.80	9.9	56	11.2	QP	N	GND
1.347000	39.80	9.9	56	16.2	QP	N	GND
4.227000	38.50	9.9	56	17.5	QP	N	GND
10.095000	47.50	10.1	60	12.5	QP	N	GND

MEASUREMENT RESULT: "GM1909055054_fin2"

9/5/2019 1:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.370500	38.30	9.9	49	10.2	AV	N	GND
0.622500	31.50	9.9	46	14.5	AV	N	GND
0.852000	22.60	9.9	46	23.4	AV	N	GND
0.861000	31.10	9.9	46	14.9	AV	N	GND
1.095000	18.60	9.9	46	27.4	AV	N	GND
1.621500	27.30	9.9	46	18.7	AV	N	GND

5.2. Radiated Emissions Test

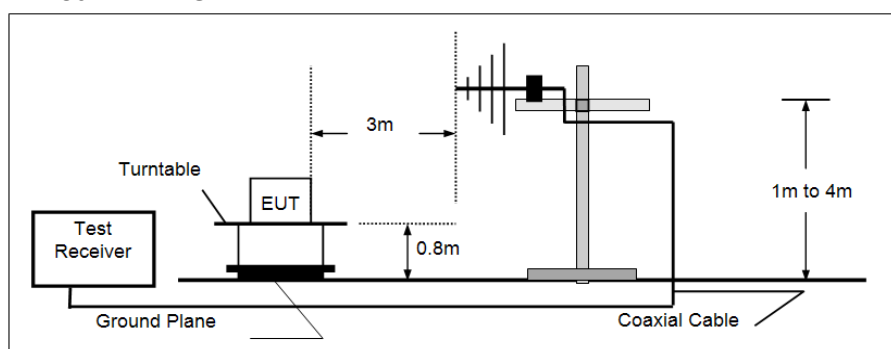
LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109

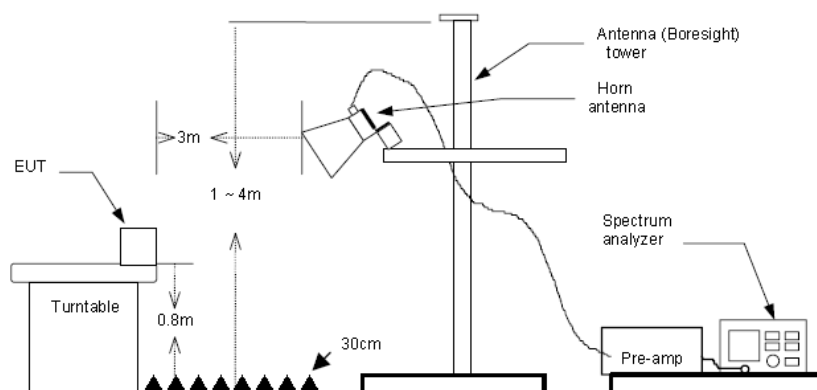
Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

➤ 30MHz ~ 1GHz



➤ Above 1GHz



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz,
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 3.3

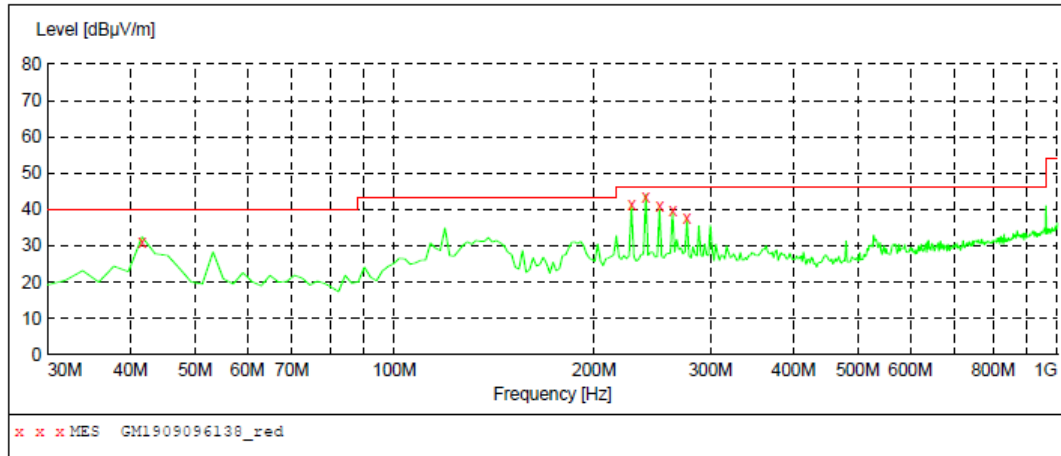
TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Polarization:

Horizontal

**MEASUREMENT RESULT: "GM1909096138_red"**

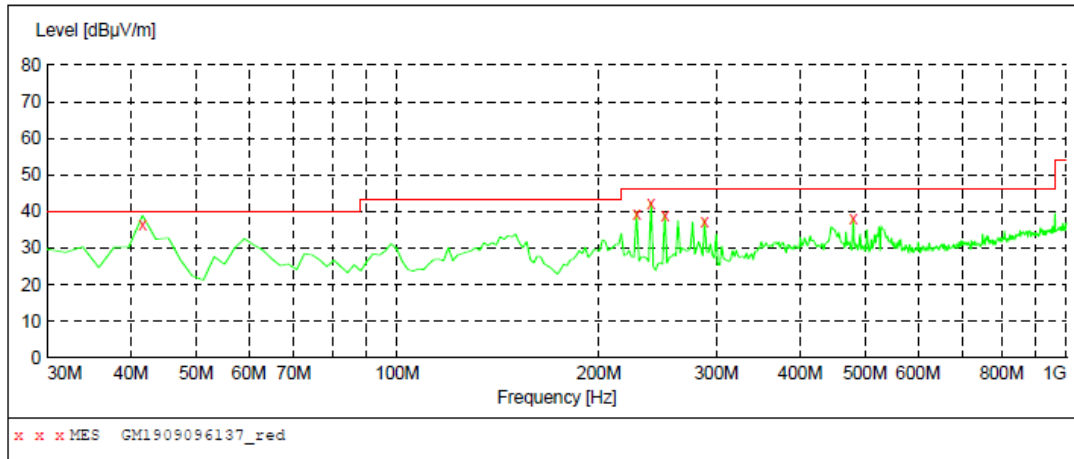
9/10/2019 4:49AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	35.30	-5.2	40.0	4.7	QP	300.0	254.00	HORIZONTAL
227.880000	42.00	-5.0	46.0	4.0	QP	100.0	63.00	HORIZONTAL
239.520000	42.60	-4.5	46.0	3.4	QP	100.0	76.00	HORIZONTAL
251.160000	40.90	-4.2	46.0	5.1	QP	100.0	341.00	HORIZONTAL
262.800000	39.00	-3.7	46.0	7.0	QP	100.0	355.00	HORIZONTAL
276.380000	38.30	-3.2	46.0	7.7	QP	100.0	341.00	HORIZONTAL

Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1198.125	46.64	-5.85	40.79	74.00	33.21	Horizontal	PK
1724.375	49.08	-6.03	43.05	74.00	30.95	Horizontal	PK
2000.000	54.80	-4.70	50.10	74.00	23.90	Horizontal	PK
2667.500	42.85	-0.03	42.82	74.00	31.18	Horizontal	PK
3742.500	34.74	1.76	36.50	74.00	37.50	Horizontal	PK
5108.125	31.84	8.81	40.65	74.00	33.35	Horizontal	PK

Polarization:

Vertical

**MEASUREMENT RESULT: "GM1909096137_red"**

9/10/2019 4:39AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	36.50	-5.2	40.0	3.5	QP	100.0	215.00	VERTICAL
227.880000	40.50	-5.0	46.0	5.5	QP	100.0	297.00	VERTICAL
239.520000	42.80	-4.5	46.0	3.2	QP	100.0	359.00	VERTICAL
251.160000	42.00	-4.2	46.0	4.0	QP	100.0	191.00	VERTICAL
288.020000	42.20	-2.7	46.0	3.8	QP	100.0	174.00	VERTICAL
480.080000	42.50	2.0	46.0	3.5	QP	100.0	244.00	VERTICAL

Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1196.875	50.28	-5.86	44.42	74.00	29.58	Vertical	PK
1702.500	50.98	-6.09	44.89	74.00	29.11	Vertical	PK
2000.000	51.73	-4.70	47.03	74.00	26.97	Vertical	PK
2700.000	41.28	0.59	41.87	74.00	32.13	Vertical	PK
3173.125	37.42	0.70	38.12	74.00	35.88	Vertical	PK
5252.500	31.81	8.70	40.51	74.00	33.49	Vertical	PK

6. TEST SETUP PHOTOS OF THE EUT

Conducted Emissions (AC Mains)



Radiated Emissions



7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No.: CHTEW19090079

-----End of Report-----