
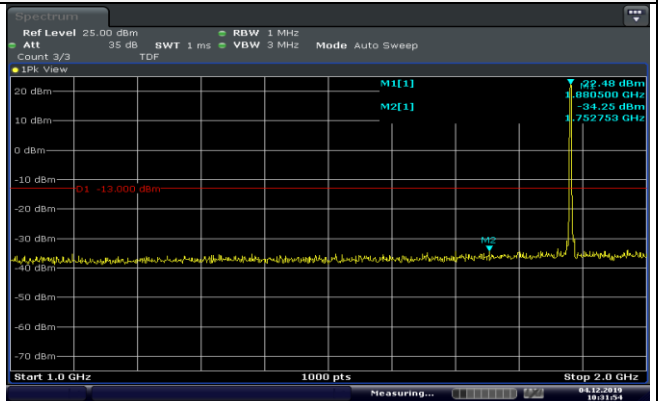



LTE FDD Band 2-1.4MHz Channel Bandwidth

Mid Channel

QPSK

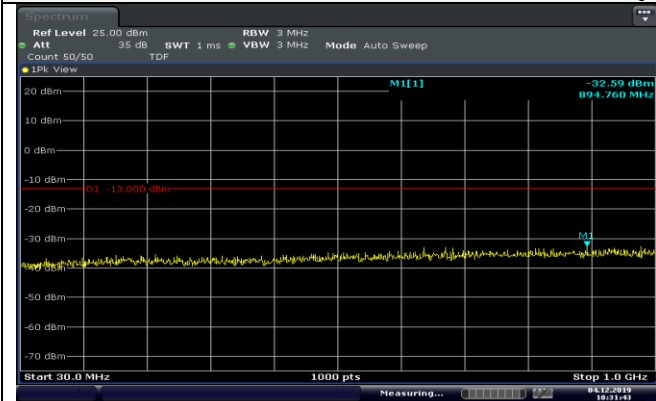

30MHz~1 GHz

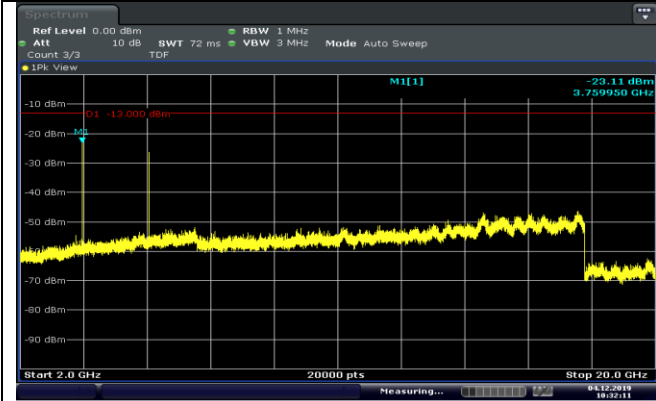



1 GHz ~2GHz

2GHz ~20GHz
1RB#0


LTE FDD Band 2-1.4MHz Channel Bandwidth

High Channel

QPSK

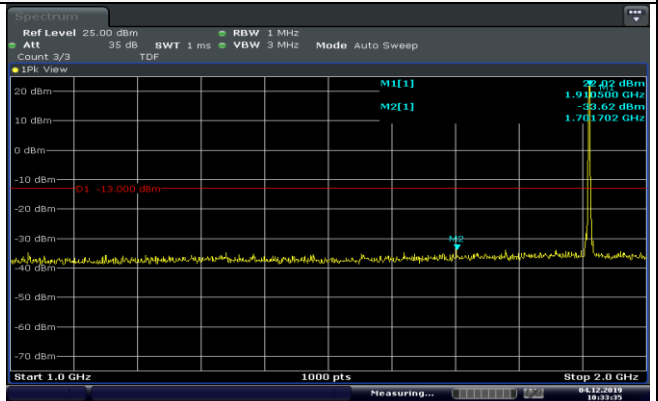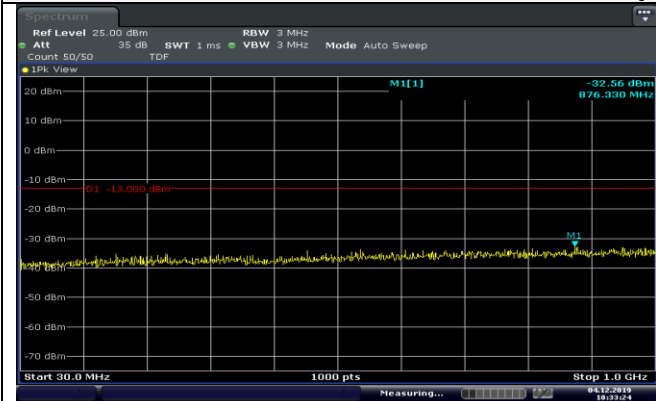


30MHz~1 GHz

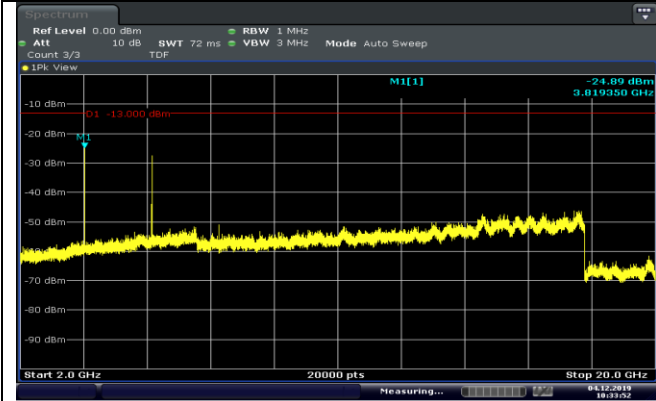


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-3MHz Channel Bandwidth
Low Channel
QPSK

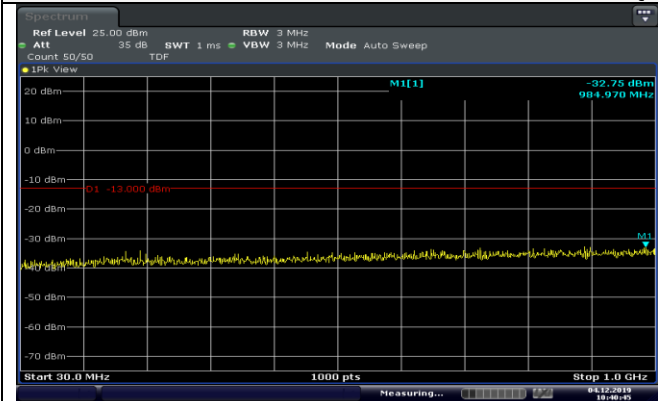


Date: 4.DEC.2019 10:40:45

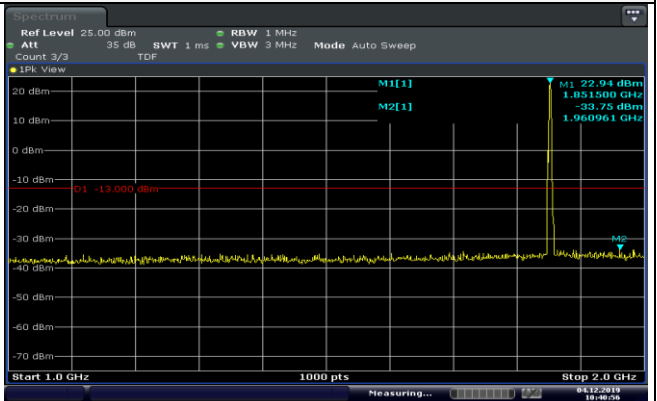

Date: 4.DEC.2019 10:40:57

30MHz~1 GHz



1 GHz ~2GHz

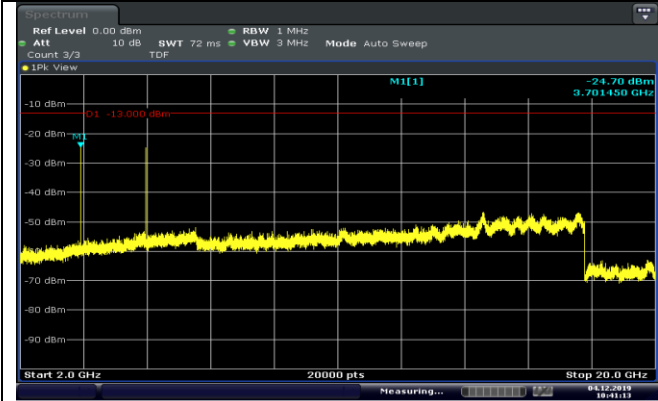


Date: 4.DEC.2019 10:41:13

2GHz ~20GHz
1RB#0

LTE FDD Band 2-3MHz Channel Bandwidth
Mid Channel
QPSK

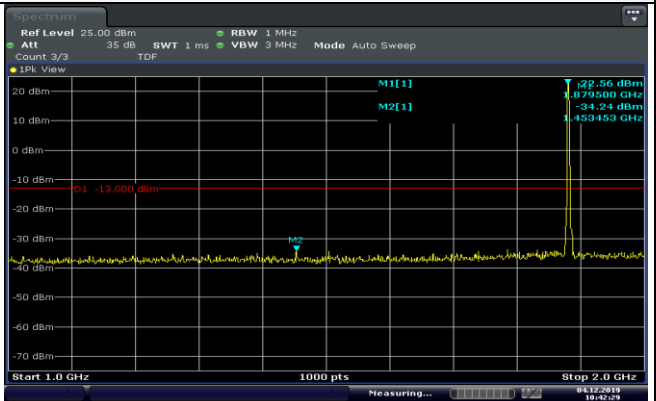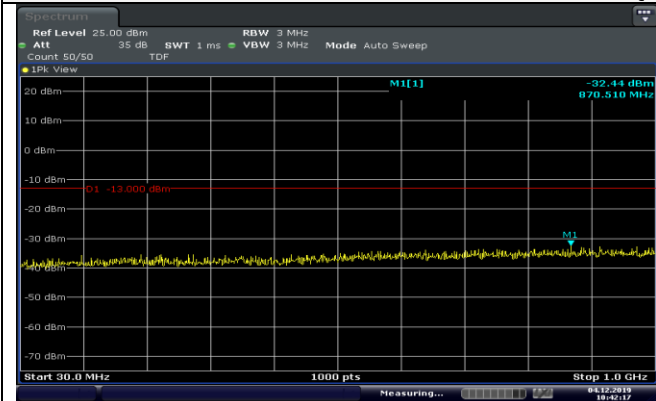



30MHz~1 GHz

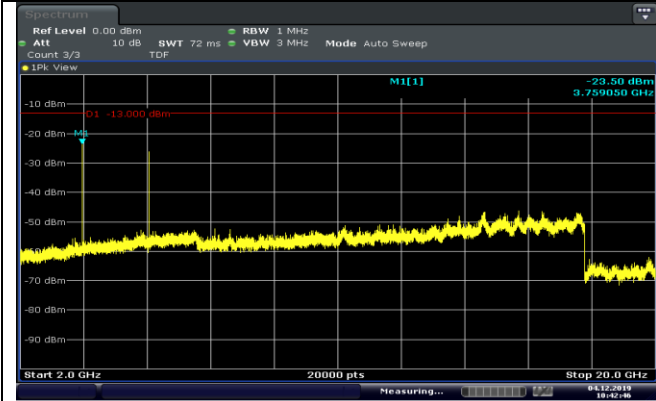


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-3MHz Channel Bandwidth
High Channel
QPSK

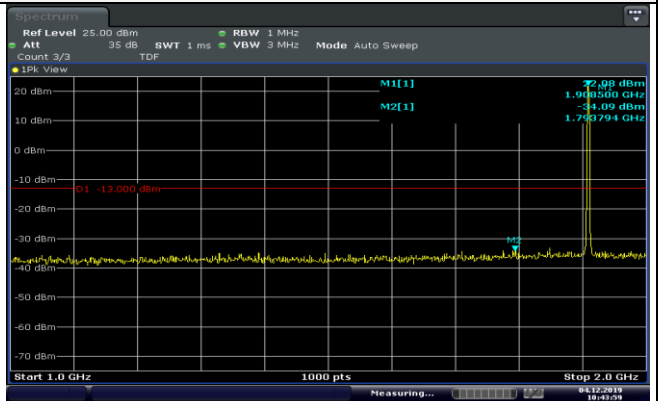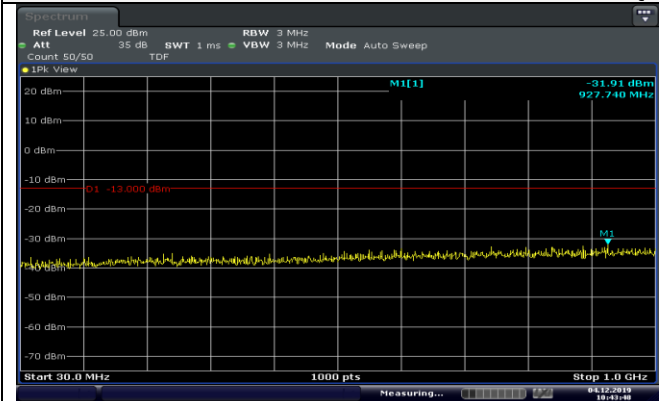

30MHz~1 GHz

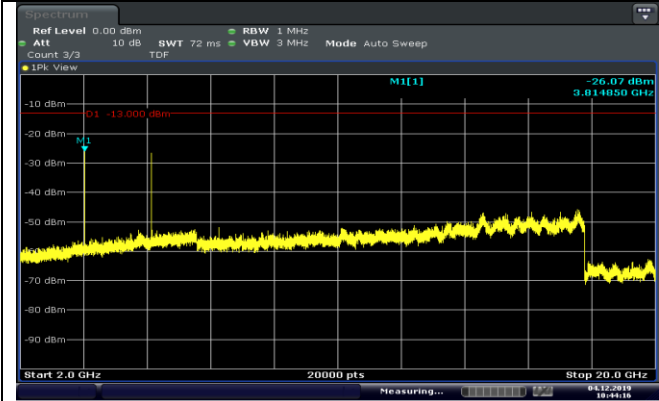


1 GHz ~2GHz

2GHz ~20GHz
1RB#0



LTE FDD Band 2-5MHz Channel Bandwidth

Low Channel

QPSK

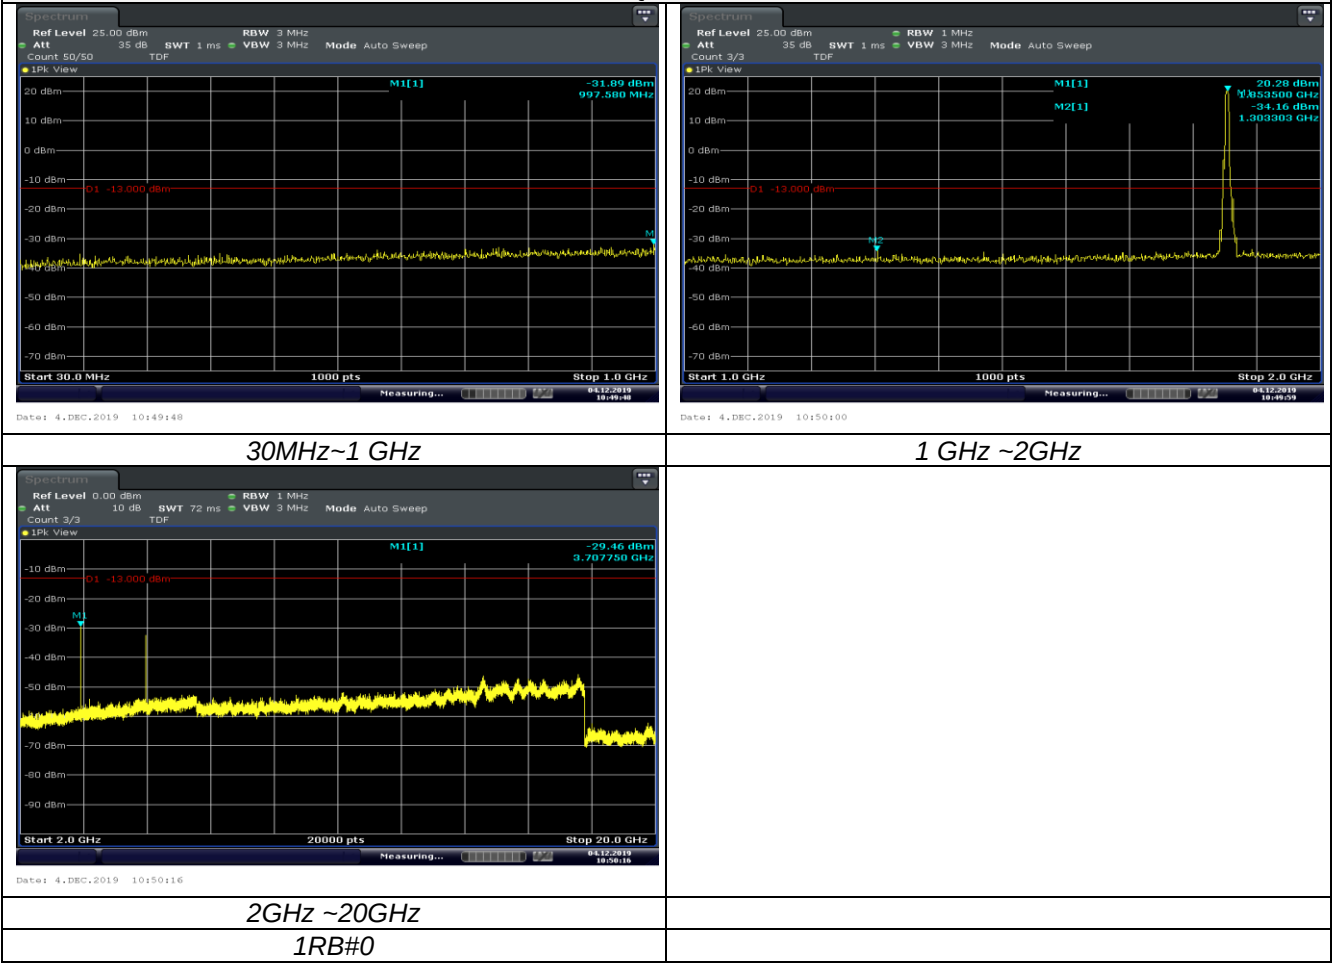

LTE FDD Band 2-5MHz Channel Bandwidth
Mid Channel
QPSK

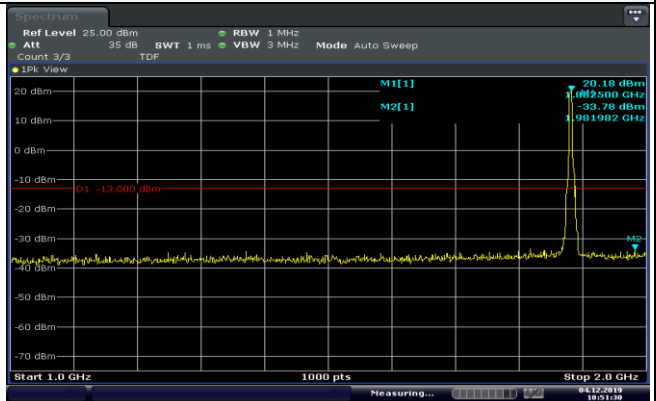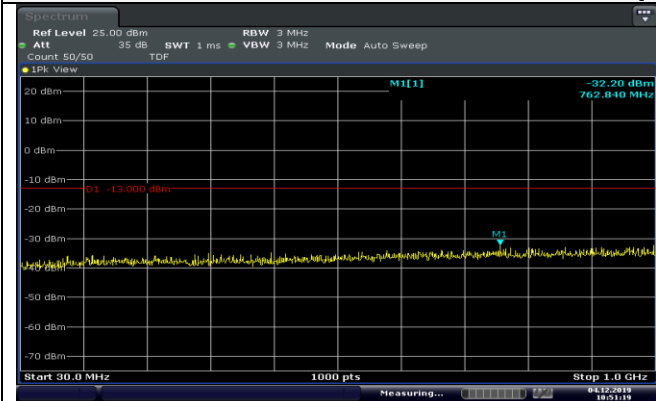



30MHz~1 GHz



1 GHz ~2GHz


2GHz ~20GHz
1RB#0

LTE FDD Band 2-5MHz Channel Bandwidth
High Channel
QPSK

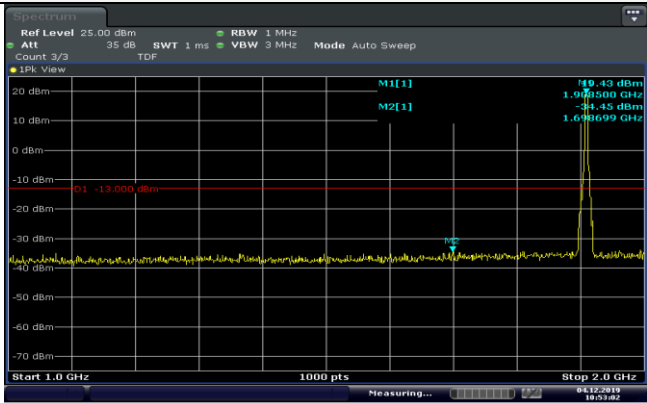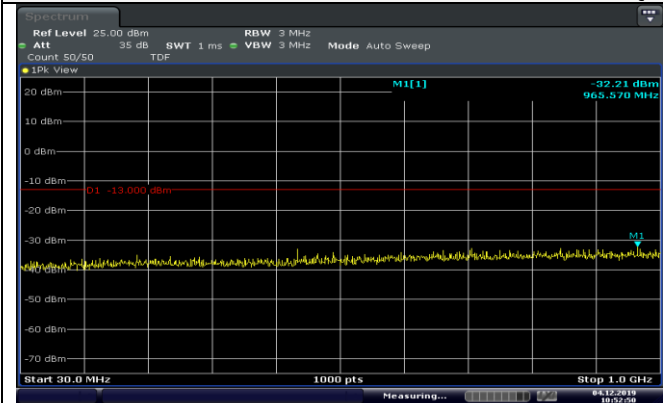


30MHz~1 GHz

1 GHz ~2GHz

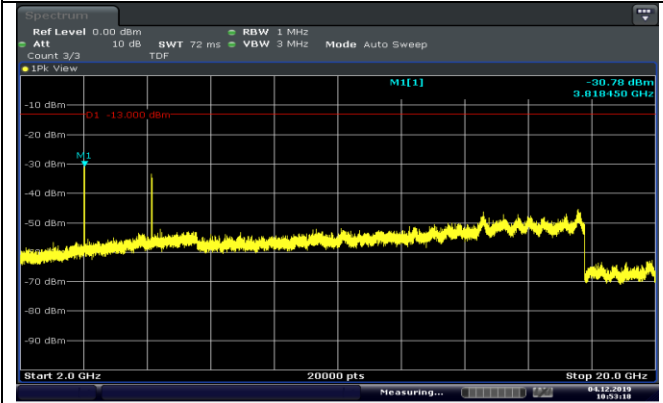


2GHz ~20GHz
1RB#0

LTE FDD Band 2-10MHz Channel Bandwidth
Low Channel
QPSK

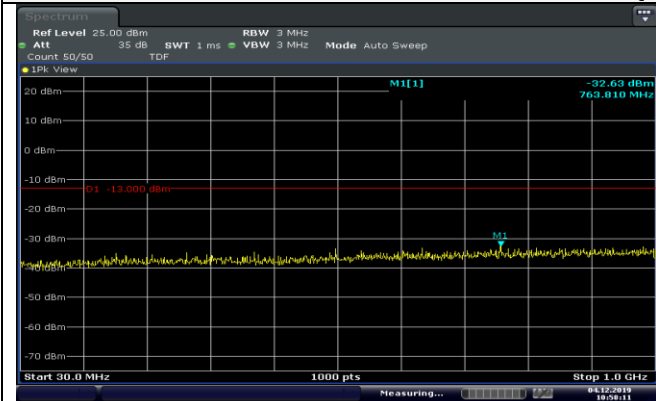


Date: 4.DEC.2019 10:58:11

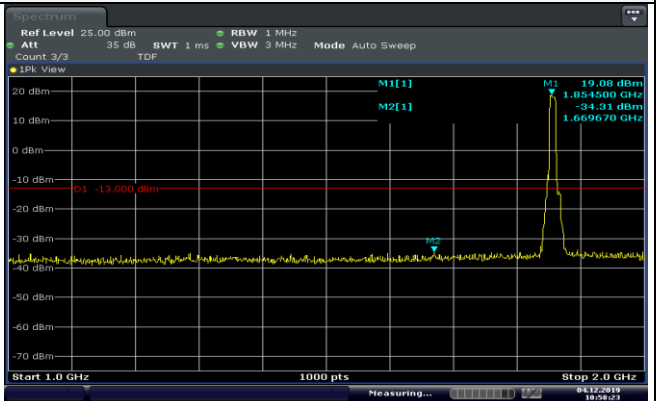

Date: 4.DEC.2019 10:58:23

30MHz~1 GHz

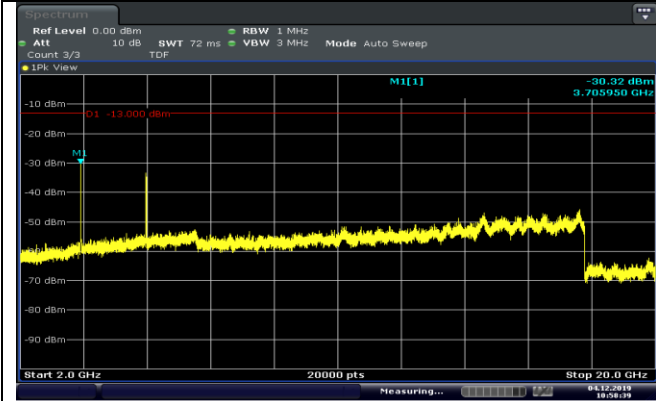


Date: 4.DEC.2019 10:58:40



1 GHz ~2GHz




2GHz ~20GHz
1RB#0



LTE FDD Band 2-10MHz Channel Bandwidth
Mid Channel
QPSK

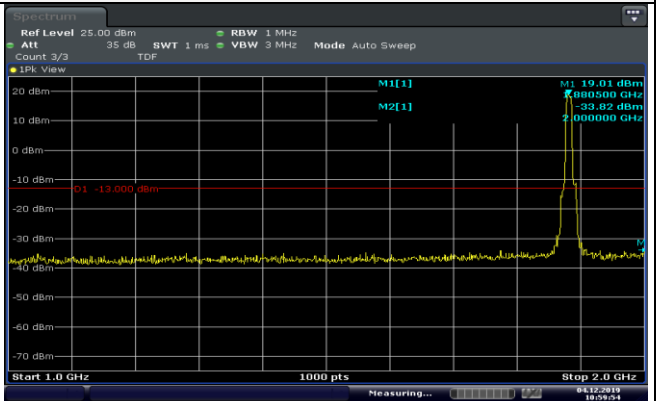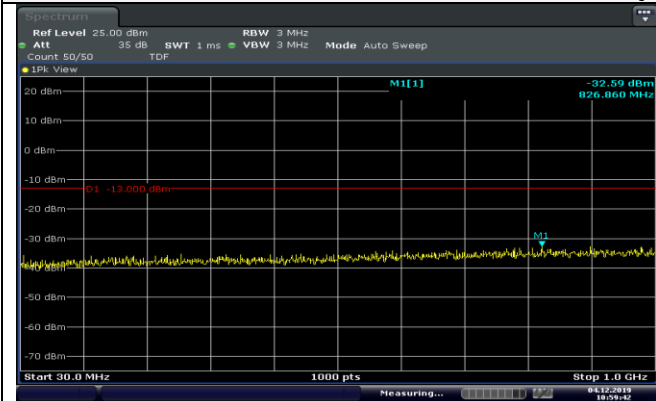



30MHz~1 GHz

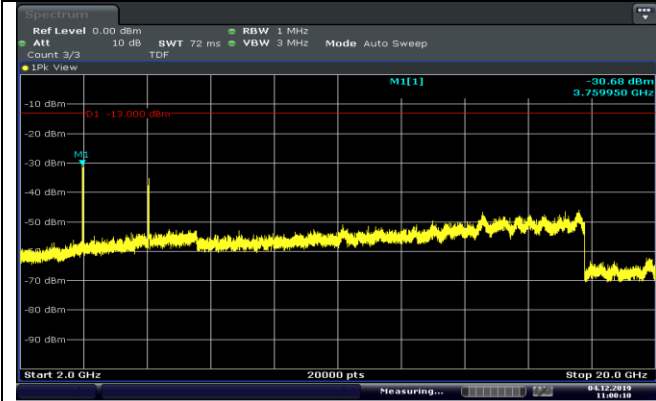


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-10MHz Channel Bandwidth
High Channel
QPSK

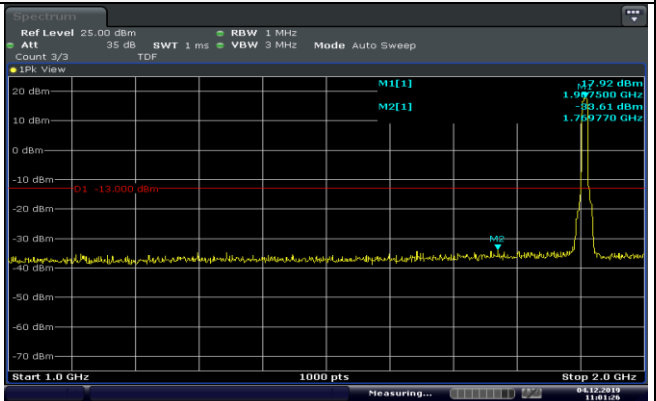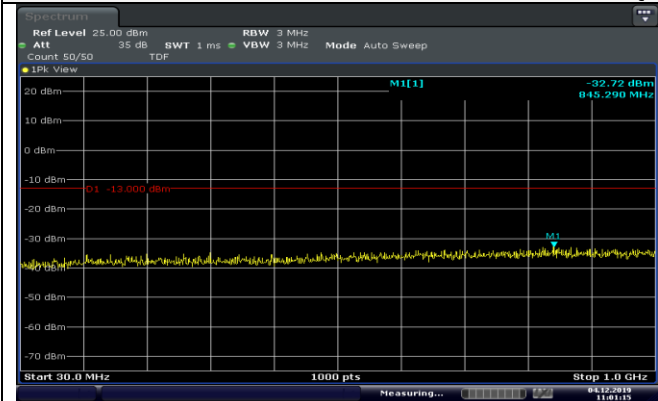



30MHz~1 GHz

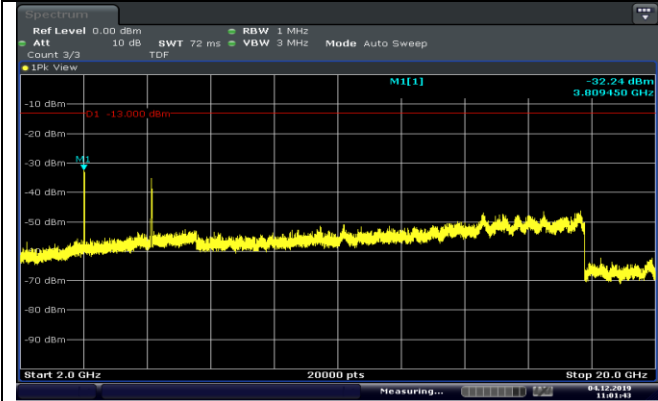


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-15MHz Channel Bandwidth
Low Channel
QPSK

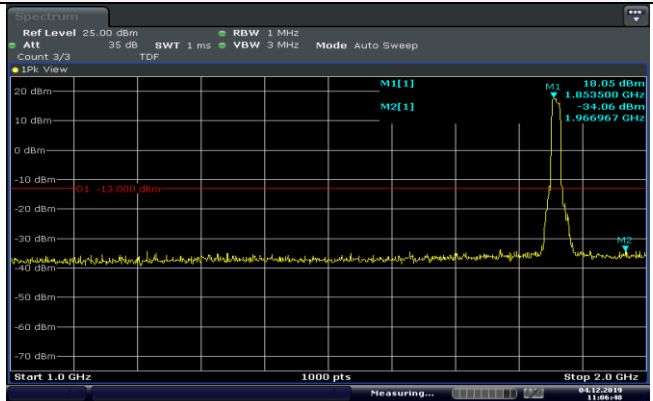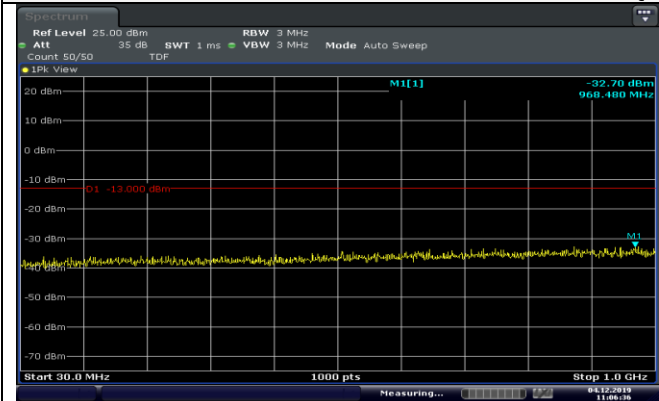



30MHz~1 GHz

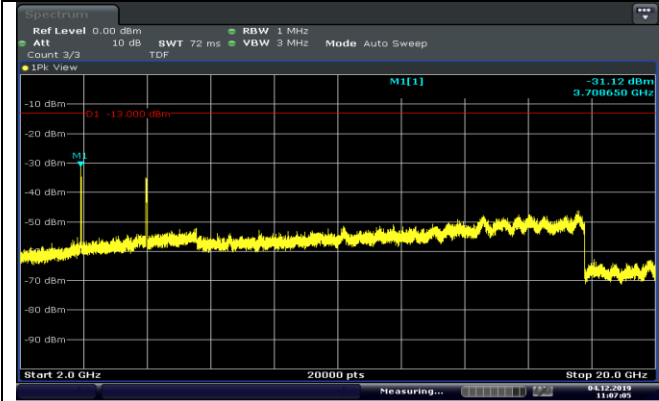


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-15MHz Channel Bandwidth
Mid Channel
QPSK

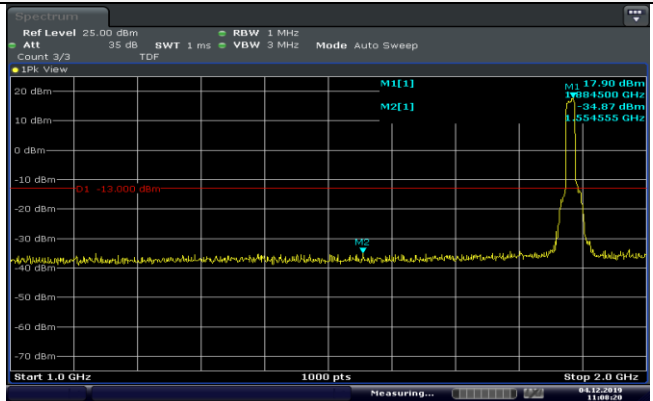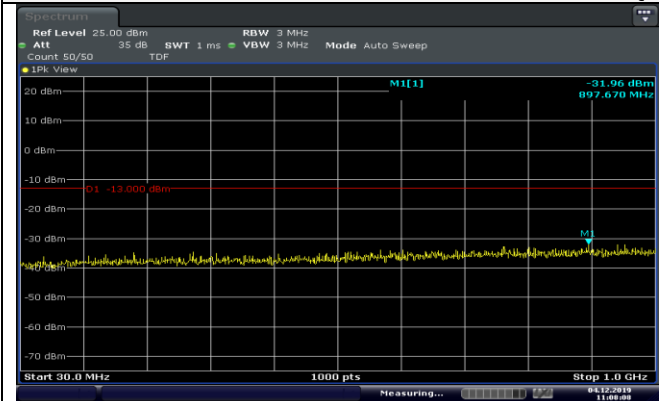


30MHz~1 GHz

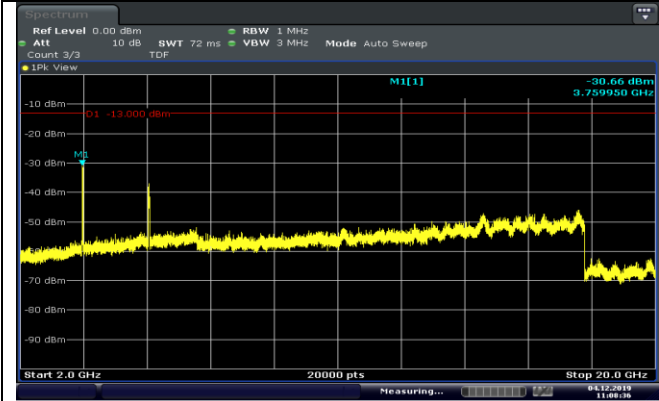


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-15MHz Channel Bandwidth
High Channel
QPSK

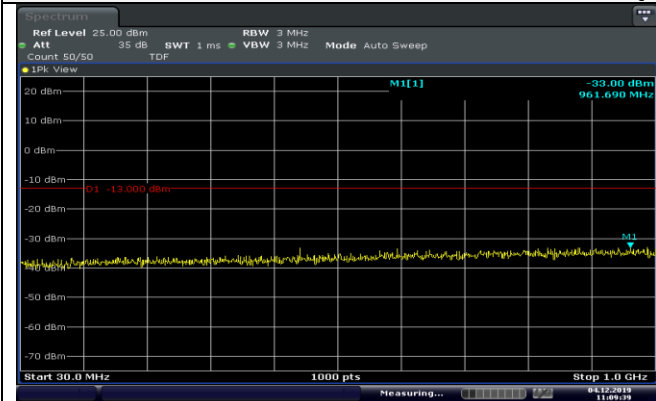


Date: 4.DEC.2019 11:09:39

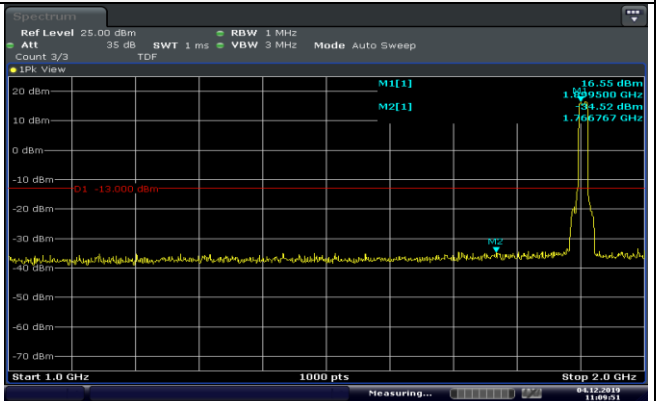

Date: 4.DEC.2019 11:09:51

30MHz~1 GHz


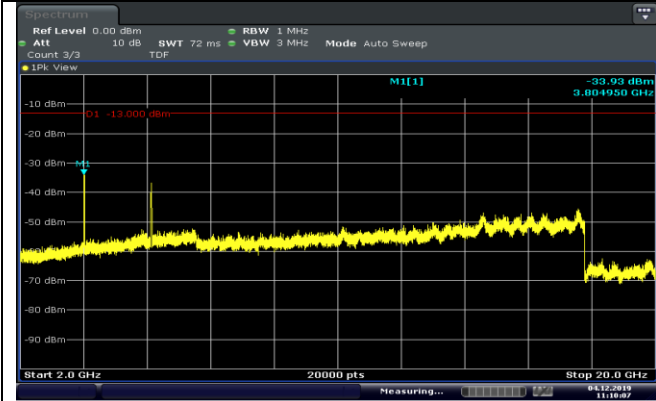


Date: 4.DEC.2019 11:10:08


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-20MHz Channel Bandwidth
Low Channel
QPSK

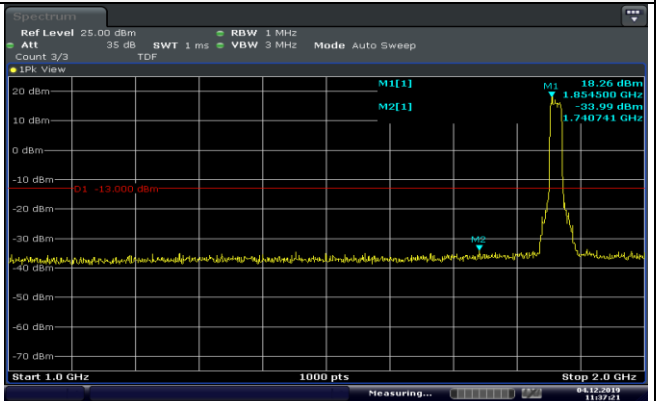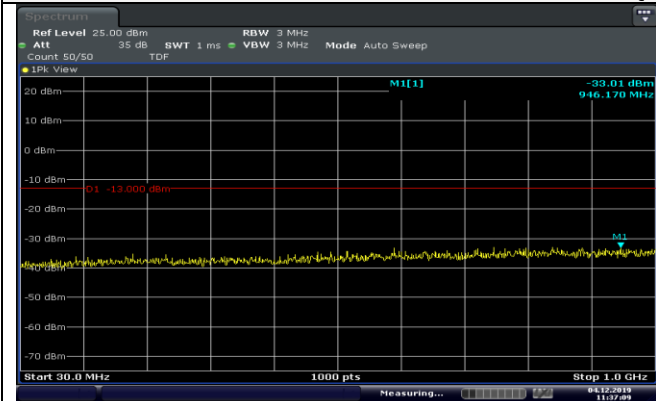



30MHz~1 GHz

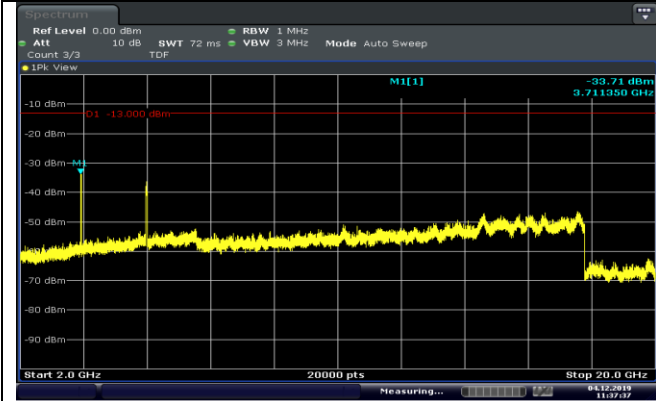


1 GHz ~2GHz

2GHz ~20GHz
1RB#0

LTE FDD Band 2-20MHz Channel Bandwidth
Mid Channel
QPSK

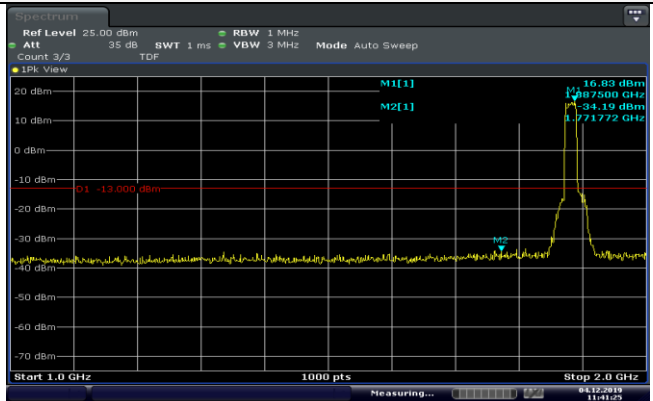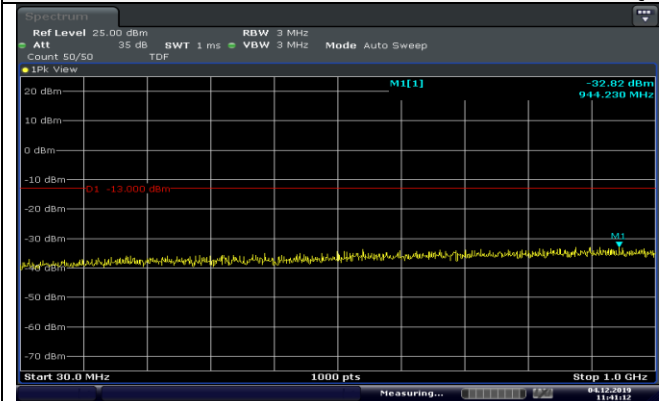

30MHz~1 GHz

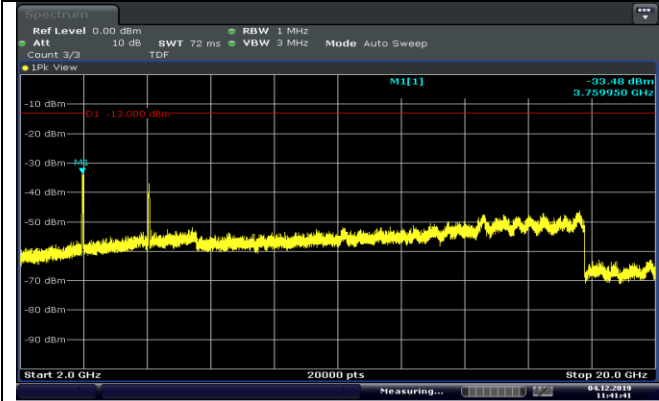



1 GHz ~2GHz

2GHz ~20GHz
1RB#0


LTE FDD Band 2-20MHz Channel Bandwidth

High Channel

QPSK

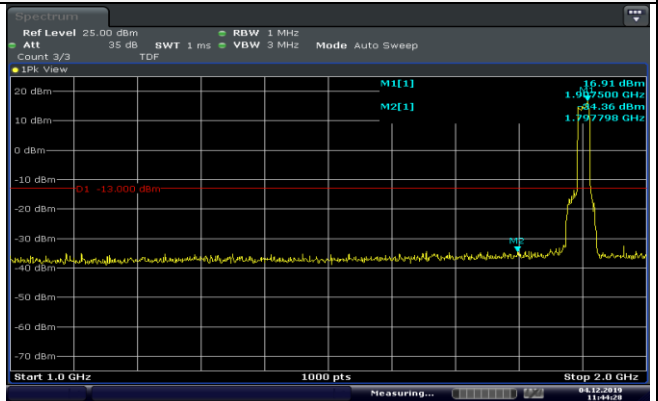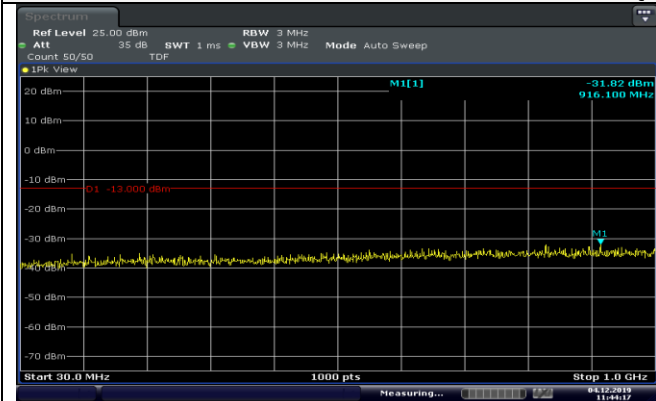

30MHz~1 GHz

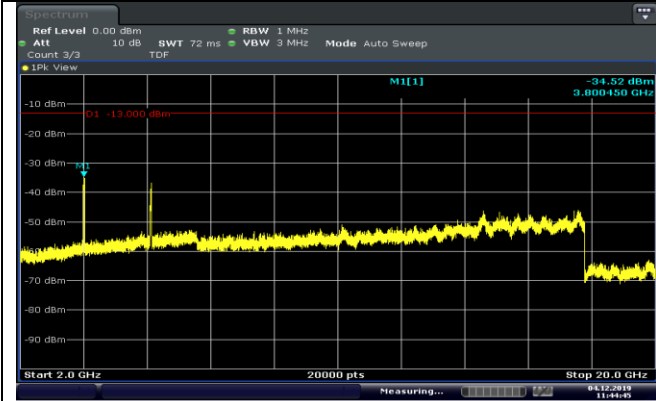

1 GHz ~2GHz

2GHz ~20GHz

1RB#0

Radiated Measurement:*Remark:*

1. We were tested all RB Configuration for the model DL3 , the Mode refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.4	-44.79	4.39	3.00	12.34	-36.84	-13.00	23.84	H
5552.1	-47.38	5.31	3.00	13.52	-39.17	-13.00	26.17	H
3701.4	-48.35	4.39	3.00	12.34	-40.40	-13.00	27.40	V
5552.1	-50.21	5.31	3.00	13.52	-42.00	-13.00	29.00	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-46.75	4.39	3.00	12.34	-38.80	-13.00	25.80	H
5640.0	-48.69	5.31	3.00	13.52	-40.48	-13.00	27.48	H
3760.0	-48.52	4.39	3.00	12.34	-40.57	-13.00	27.57	V
5640.0	-51.66	5.31	3.00	13.52	-43.45	-13.00	30.45	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3806.6	-46.28	4.39	3.00	12.34	-38.33	-13.00	25.33	H
5709.9	-48.51	5.31	3.00	13.52	-40.30	-13.00	27.30	H
3806.6	-47.36	4.39	3.00	12.34	-39.41	-13.00	26.41	V
5709.9	-50.26	5.31	3.00	13.52	-42.05	-13.00	29.05	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3703.0	-46.45	4.39	3.00	12.34	-38.50	-13.00	25.50	H
5554.5	-48.56	5.31	3.00	13.52	-40.35	-13.00	27.35	H
3703.0	-47.68	4.39	3.00	12.34	-39.73	-13.00	26.73	V
5554.5	-50.55	5.31	3.00	13.52	-42.34	-13.00	29.34	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-47.03	4.39	3.00	12.34	-39.08	-13.00	26.08	H
5640.0	-48.68	5.31	3.00	13.52	-40.47	-13.00	27.47	H
3760.0	-46.35	4.39	3.00	12.34	-38.40	-13.00	25.40	V
5640.0	-49.62	5.31	3.00	13.52	-41.41	-13.00	28.41	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3817.0	-47.26	4.39	3.00	12.34	-39.31	-13.00	26.31	H
5725.5	-48.59	5.31	3.00	13.52	-40.38	-13.00	27.38	H
3817.0	-46.62	4.39	3.00	12.34	-38.67	-13.00	25.67	V
5725.5	-49.67	5.31	3.00	13.52	-41.46	-13.00	28.46	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705.0	-47.63	4.39	3.00	12.34	-39.68	-13.00	26.68	H
5557.5	-48.05	5.31	3.00	13.52	-39.84	-13.00	26.84	H
3705.0	-46.16	4.39	3.00	12.34	-38.21	-13.00	25.21	V
5557.5	-50.17	5.31	3.00	13.52	-41.96	-13.00	28.96	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-47.76	4.39	3.00	12.34	-39.81	-13.00	26.81	H
5640.0	-48.37	5.31	3.00	13.52	-40.16	-13.00	27.16	H
3760.0	-46.25	4.39	3.00	12.34	-38.30	-13.00	25.30	V
5640.0	-50.63	5.31	3.00	13.52	-42.42	-13.00	29.42	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.0	-47.35	4.39	3.00	12.34	-39.40	-13.00	26.40	H
5722.5	-48.57	5.31	3.00	13.52	-40.36	-13.00	27.36	H
3815.0	-46.36	4.39	3.00	12.34	-38.41	-13.00	25.41	V
5722.5	-50.41	5.31	3.00	13.52	-42.20	-13.00	29.20	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.0	-47.58	4.39	3.00	12.34	-39.63	-13.00	26.63	H
5565.0	-48.61	5.31	3.00	13.52	-40.40	-13.00	27.40	H
3710.0	-46.56	4.39	3.00	12.34	-38.61	-13.00	25.61	V
5565.0	-50.47	5.31	3.00	13.52	-42.26	-13.00	29.26	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-46.36	4.39	3.00	12.34	-38.41	-13.00	25.41	H
5640.0	-47.23	5.31	3.00	13.52	-39.02	-13.00	26.02	H
3760.0	-48.44	4.39	3.00	12.34	-40.49	-13.00	27.49	V
5640.0	-51.27	5.31	3.00	13.52	-43.06	-13.00	30.06	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810.0	-46.68	4.39	3.00	12.34	-38.73	-13.00	25.73	H
5715.0	-47.35	5.31	3.00	13.52	-39.14	-13.00	26.14	H
3810.0	-48.51	4.39	3.00	12.34	-40.56	-13.00	27.56	V
5715.0	-51.41	5.31	3.00	13.52	-43.20	-13.00	30.20	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-46.75	4.39	3.00	12.34	-38.80	-13.00	25.80	H
5572.5	-47.46	5.31	3.00	13.52	-39.25	-13.00	26.25	H
3715.0	-48.64	4.39	3.00	12.34	-40.69	-13.00	27.69	V
5572.5	-51.59	5.31	3.00	13.52	-43.38	-13.00	30.38	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-46.63	4.39	3.00	12.34	-38.68	-13.00	25.68	H
5640.0	-47.71	5.31	3.00	13.52	-39.50	-13.00	26.50	H
3760.0	-48.17	4.39	3.00	12.34	-40.22	-13.00	27.22	V
5640.0	-51.65	5.31	3.00	13.52	-43.44	-13.00	30.44	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3805.0	-46.85	4.39	3.00	12.34	-38.90	-13.00	25.90	H
5707.5	-47.63	5.31	3.00	13.52	-39.42	-13.00	26.42	H
3805.0	-48.37	4.39	3.00	12.34	-40.42	-13.00	27.42	V
5707.5	-51.29	5.31	3.00	13.52	-43.08	-13.00	30.08	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-46.76	4.39	3.00	12.34	-38.81	-13.00	25.81	H
5572.5	-47.82	5.31	3.00	13.52	-39.61	-13.00	26.61	H
3715.0	-48.67	4.39	3.00	12.34	-40.72	-13.00	27.72	V
5572.5	-51.35	5.31	3.00	13.52	-43.14	-13.00	30.14	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.0	-46.67	4.39	3.00	12.34	-38.72	-13.00	25.72	H
5580.0	-47.75	5.31	3.00	13.52	-39.54	-13.00	26.54	H
3720.0	-48.68	4.39	3.00	12.34	-40.73	-13.00	27.73	V
5580.0	-51.62	5.31	3.00	13.52	-43.41	-13.00	30.41	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_High Channel


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.0	-46.86	4.39	3.00	12.34	-38.91	-13.00	25.91	H
5700.0	-48.35	5.31	3.00	13.52	-40.14	-13.00	27.14	H
3800.0	-47.31	4.39	3.00	12.34	-39.36	-13.00	26.36	V
5700.0	-51.83	5.31	3.00	13.52	-43.62	-13.00	30.62	V

3.6 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §24.235, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

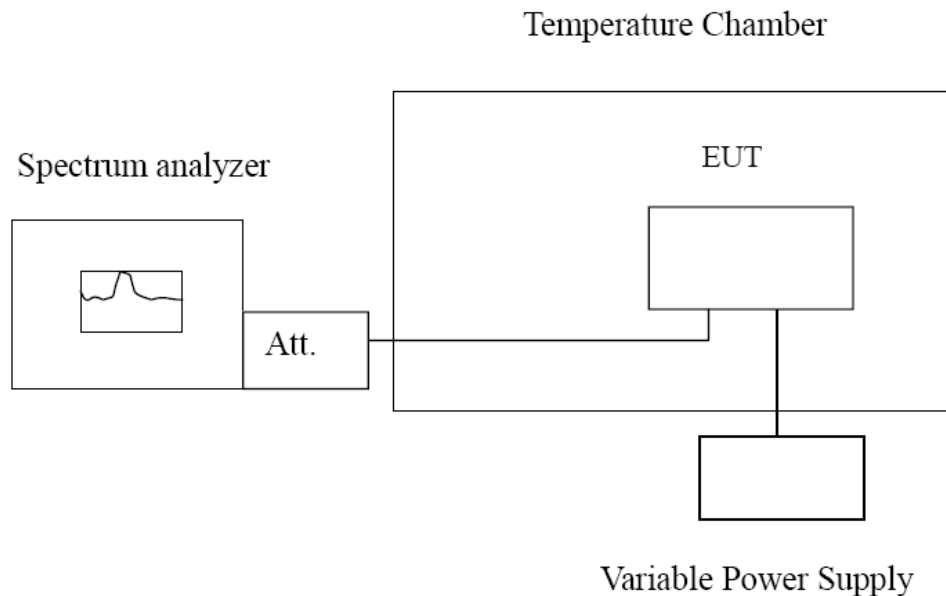

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.

TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case.

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths) at 1RB#0 for Mid channel


Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
3.40	7.86	8.82	0.0042	0.0047	2.50
3.80	6.75	7.91	0.0036	0.0042	2.50
4.20	6.67	8.37	0.0035	0.0045	2.50

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	5.76	8.72	0.0031	0.0046	2.50
-20°	6.41	8.68	0.0034	0.0046	2.50
-10°	5.37	8.42	0.0029	0.0045	2.50
0°	4.62	8.69	0.0025	0.0046	2.50
10°	6.61	8.51	0.0035	0.0045	2.50
20°	6.08	8.43	0.0032	0.0045	2.50
30°	5.37	8.62	0.0029	0.0046	2.50
40°	5.68	8.37	0.0030	0.0045	2.50
50°	5.06	8.46	0.0027	0.0045	2.50

4 Test Setup Photos of the EUT

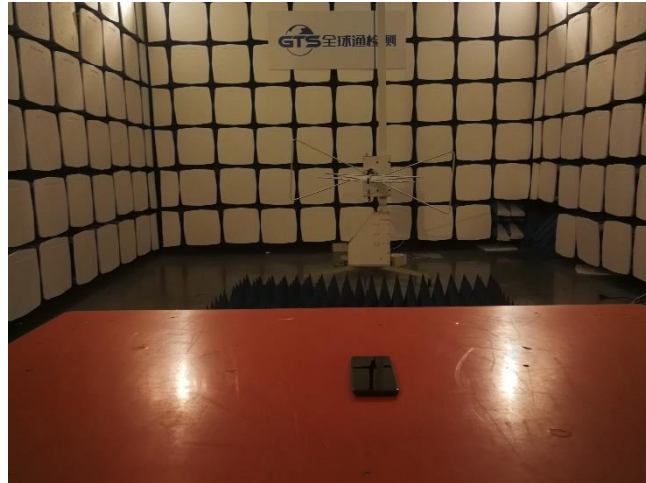

5 External and Internal Photos of the EUT

External Photos of EUT

Please refer to separated files for External Photos of the EUT.

Internal Photos of EUT

Please refer to separated files for Internal Photos of the EUT.

******* End of Report *******