

TEST REPORT

Applicant	Otis Science and Technology Development (Shanghai) Co., Ltd.
Address	Floor 3, Building 2, No. 200, Zhangheng Road, China (Shanghai) Pilot Free Trade Zone, Shanghai, China

Manufacturer or Supplier	Otis Science and Technology Development (Shanghai) Co., Ltd.
Address	Floor 3, Building 2, No. 200, Zhangheng Road, China (Shanghai) Pilot Free Trade Zone, Shanghai, China
Product	4G IoT Wireless Gateway
Brand Name	Otis ONE®
Model	GW0300B
Additional Model & Model Difference	N/A
Date of tests	Apr. 20, 2021 ~ May 12, 2021

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Jun. 30, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps.bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4 DESCRIPTION OF SUPPORT UNITS	10
4 TEST TYPES AND RESULTS.....	11
4.1. RADIATED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2. 6DB BANDWIDTH MEASUREMENT.....	30
4.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	30
4.2.2 TEST INSTRUMENTS.....	30
4.2.3 TEST PROCEDURE.....	30
4.2.4 DEVIATION FROM TEST STANDARD	31
4.2.5 TEST SETUP.....	31
4.2.6 EUT OPERATING CONDITIONS	31
4.2.7 TEST RESULTS	32
4.3. CONDUCTED OUTPUT POWER.....	37
4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	37
4.3.2 TEST SETUP.....	37
4.3.3 TEST INSTRUMENTS.....	37
4.3.4 TEST PROCEDURES	38
4.3.5 DEVIATION FROM TEST STANDARD	38
4.3.6 EUT OPERATING CONDITIONS	38
4.3.7 TEST RESULTS	39

4.4.	POWER SPECTRAL DENSITY MEASUREMENT.....	41
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	41
4.4.2	TEST SETUP.....	41
4.4.3	TEST INSTRUMENTS.....	41
4.4.4	TEST PROCEDURE.....	41
4.4.5	DEVIATION FROM TEST STANDARD	41
4.4.6	EUT OPERATING CONDITION	42
4.4.7	TEST RESULTS	42
4.5.	OUT OF BAND EMISSION MEASUREMENT.....	44
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT.....	44
4.5.2	TEST SETUP.....	44
4.5.3	TEST INSTRUMENTS.....	44
4.5.4	TEST PROCEDURE.....	44
4.5.5	DEVIATION FROM TEST STANDARD	45
4.5.6	EUT OPERATING CONDITION	45
4.5.7	TEST RESULTS	46
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	52
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	53



Test Report No.: RF2104WDG0210-1

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2104WDG0210-1	Original release	Jun. 30, 2021

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	DC supply
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Meet the requirement of limit.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	3.05dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	4.00dB
	1GHz ~ 18GHz	5.17dB
	18GHz ~ 40GHz	5.07dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	4G IoT Wireless Gateway
BRAND	Otis ONE®
MODEL NO.	GW0300B
ADDITIONAL NO.	N/A
FCC ID	2AUTDGW0300B
NOMINAL VOLTAGE	DC 9-36V or DC 3.2V from Li-ion Battery
MODULATION TECHNOLOGY	DSSS, OFDM
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
PEAK OUTPUT POWER	457.088mW (Maximum)
ANTENNA TYPE	Sucker Antenna, with 3dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	Refer to user's manual

NOTES:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
2. Please refer to the EUT photo document (Reference No.: 2104WDG0210-1) for detailed product photo.
3. The EUT provides completed transmitters and receivers:

MODULATION MODE	FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX
802.11n (HT40)	1TX/1RX

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	DC 12V with WIFI function

Where **RE<1G**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by DC 12V Max..

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1	DSSS	DBPSK	1.0

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 55%RH	DC 12V	Jelly
RE≥1G	25deg. C, 55%RH	DC 12V	Jelly
PLC	25deg. C, 49%RH	DC 12V	Wink
APCM	25deg. C, 60%RH	DC 12V	Jeffery

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	Latitude 5280	77K2GH2	N/A
2	Adapter	N/A	NBS18C120150D5	LP02857415 48001408	N/A
3	Gateway	N/A	N/A	80210308000039	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Cable: Unshielded, Detachable, 1.5m; DC Cable: Unshielded, Non-detachable, 1.5m
2	DC Cable: Unshielded, Detachable, 1.2m
3	DC Cable: Unshielded, Detachable, 1.2m
Other	RS422 Cable: Shielded, Detachable, 3.0m; CAN Cable: Shielded, Detachable, 3.0m RJ45 Cable: Unshielded, Detachable, 1.0m

4 TEST TYPES AND RESULTS

4.1. RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 07,22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 13, 21
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 29,21
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 14,22
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	May 29,21
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 29,21
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 09, 22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22,21
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 08,22
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Mar. 03,22
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Below 30MHz test setup

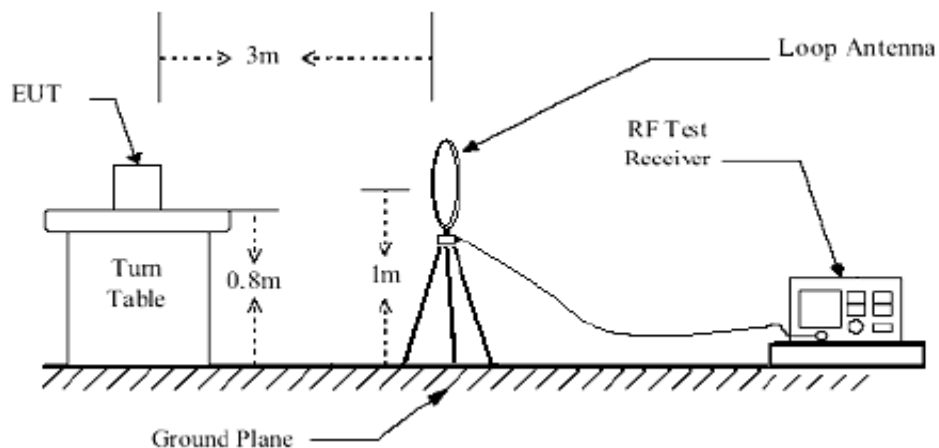


Below 1GHz test setup

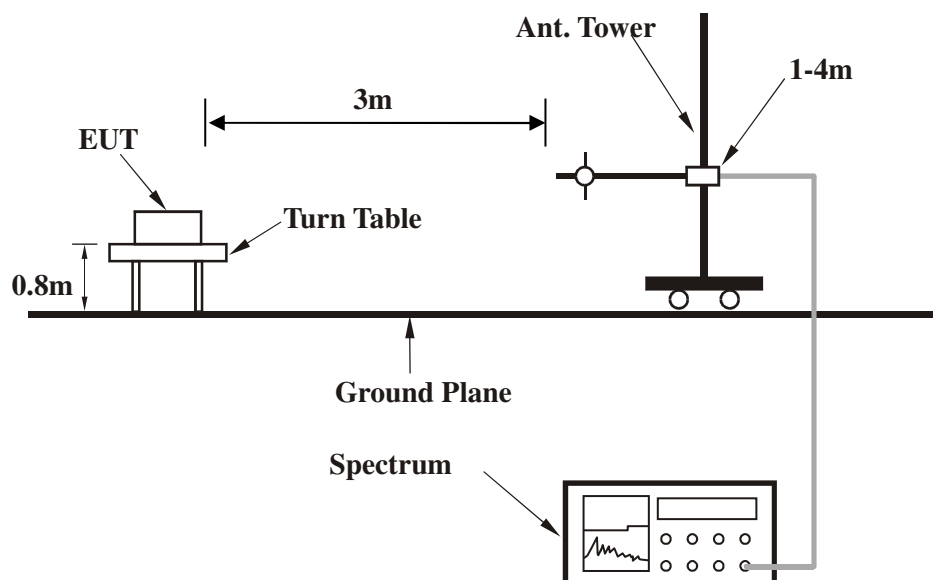

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

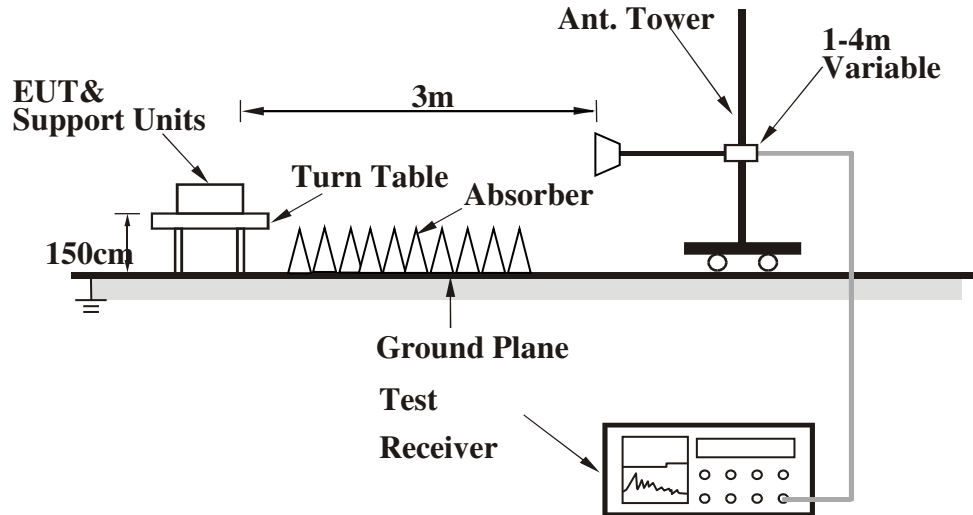

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.54	24.86 QP	40.00	-15.14	1.00 H	185	49.52	-24.66
2	159.02	22.60 QP	43.50	-20.90	1.00 H	108	39.63	-17.03
3	239.86	27.97 QP	46.00	-18.03	1.00 H	130	45.37	-17.40
4	269.39	35.52 QP	46.00	-10.48	1.00 H	30	51.03	-15.51
5	449.71	31.63 QP	46.00	-14.37	1.00 H	160	42.08	-10.45
6	479.25	33.43 QP	46.00	-12.57	1.00 H	192	43.35	-9.92

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

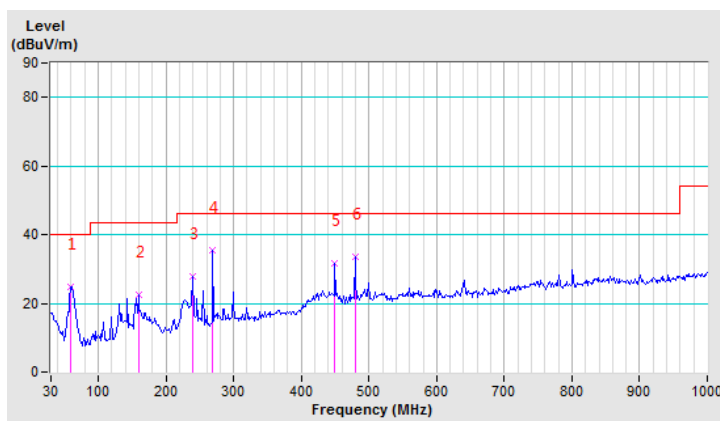


CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.64	31.99 QP	40.00	-8.01	1.00 V	188	56.73	-24.74
2	131.04	27.28 QP	43.50	-16.22	1.00 V	10	46.22	-18.94
3	239.86	19.64 QP	46.00	-26.36	1.00 V	131	37.04	-17.40
4	269.39	22.02 QP	46.00	-23.98	1.00 V	30	37.53	-15.51
5	389.09	22.37 QP	46.00	-23.63	1.00 V	160	34.05	-11.68
6	640.91	32.25 QP	46.00	-13.75	1.00 V	192	37.95	-5.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

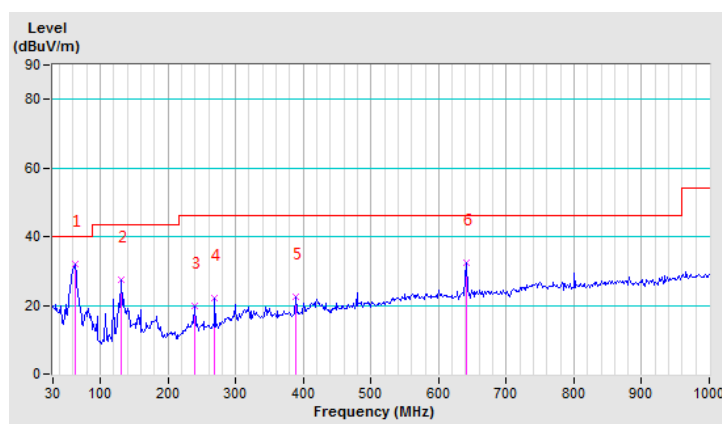

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.48 PK	74.00	-26.52	1.00 H	107	42.42	5.06
2	2390.00	35.24 AV	54.00	-18.76	1.00 H	107	30.18	5.06
3	*2412.00	101.68 PK			1.00 H	107	96.49	5.19
4	*2412.00	92.72 AV			1.00 H	107	87.53	5.19
5	4824.00	54.15 PK	74.00	-19.85	1.00 H	201	43.46	10.69
6	4824.00	44.69 AV	54.00	-9.31	1.00 H	201	34.00	10.69
7	#7236.00	57.15 PK	74.00	-16.85	1.00 H	175	40.20	16.95
8	#7236.00	45.57 AV	54.00	-8.43	1.00 H	175	28.62	16.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.23 PK	74.00	-4.77	1.00 V	211	64.17	5.06
2	2390.00	40.21 AV	54.00	-13.79	1.00 V	211	35.15	5.06
3	*2412.00	107.50 PK			1.00 V	211	102.31	5.19
4	*2412.00	98.87 AV			1.00 V	211	93.68	5.19
5	4824.00	55.31 PK	74.00	-18.69	1.00 V	208	44.62	10.69
6	4824.00	45.75 AV	54.00	-8.25	1.00 V	208	35.06	10.69
7	#7236.00	58.58 PK	74.00	-15.42	1.00 V	201	41.63	16.95
8	#7236.00	47.32 AV	54.00	-6.68	1.00 V	201	30.37	16.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.25 PK			1.00 H	26	91.93	5.32
2	*2437.00	89.54 AV			1.00 H	26	84.22	5.32
3	4874.00	55.28 PK	74.00	-18.72	1.00 H	130	44.38	10.90
4	4874.00	40.19 AV	54.00	-13.81	1.00 H	130	29.29	10.90
5	7311.00	54.96 PK	74.00	-19.04	1.00 H	78	37.80	17.16
6	7311.00	43.87 AV	54.00	-10.13	1.00 H	78	26.71	17.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.27 PK			1.00 V	258	97.95	5.32
2	*2437.00	93.58 AV			1.00 V	258	88.26	5.32
3	4874.00	56.25 PK	74.00	-17.75	1.00 V	60	45.35	10.90
4	4874.00	42.15 AV	54.00	-11.85	1.00 V	60	31.25	10.90
5	7311.00	56.25 PK	74.00	-17.75	1.00 V	281	39.09	17.16
6	7311.00	45.18 AV	54.00	-8.82	1.00 V	281	28.02	17.16

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.25 PK			1.00 H	98	90.80	5.45
2	*2462.00	89.75 AV			1.00 H	98	84.30	5.45
3	2483.50	48.57 PK	74.00	-25.43	1.00 H	98	43.00	5.57
4	2483.50	36.64 AV	54.00	-17.36	1.00 H	98	31.07	5.57
5	4924.00	52.25 PK	74.00	-21.75	1.00 H	116	41.16	11.09
6	4924.00	43.28 AV	54.00	-10.72	1.00 H	116	32.19	11.09
7	7386.00	56.47 PK	74.00	-17.53	1.00 H	104	39.11	17.36
8	7386.00	46.10 AV	54.00	-7.90	1.00 H	104	28.74	17.36
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.39 PK			1.00 V	206	95.94	5.45
2	*2462.00	92.73 AV			1.00 V	206	87.28	5.45
3	2483.50	50.16 PK	74.00	-23.84	1.00 V	206	44.59	5.57
4	2483.50	37.98 AV	54.00	-16.02	1.00 V	206	32.41	5.57
5	4924.00	53.26 PK	74.00	-20.74	1.00 V	215	42.17	11.09
6	4924.00	44.58 AV	54.00	-9.42	1.00 V	215	33.49	11.09
7	7386.00	57.62 PK	74.00	-16.38	1.00 V	91	40.26	17.36
8	7386.00	47.06 AV	54.00	-6.94	1.00 V	91	29.70	17.36

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.29 PK	74.00	-19.71	1.00 H	157	49.23	5.06
2	2390.00	42.29 AV	54.00	-11.71	1.00 H	157	37.23	5.06
3	*2412.00	96.47 PK			1.00 H	157	91.28	5.19
4	*2412.00	87.48 AV			1.00 H	157	82.29	5.19
5	4824.00	52.14 PK	74.00	-21.86	1.00 H	106	41.45	10.69
6	4824.00	39.58 AV	54.00	-14.42	1.00 H	106	28.89	10.69
7	#7236.00	58.75 PK	74.00	-15.25	1.00 H	106	41.80	16.95
8	#7236.00	41.02 AV	54.00	-12.98	1.00 H	106	24.07	16.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.84 PK	74.00	-15.16	1.00 V	209	53.78	5.06
2	2390.00	44.44 AV	54.00	-9.56	1.00 V	209	39.38	5.06
3	*2412.00	99.26 PK			1.00 V	209	94.07	5.19
4	*2412.00	88.59 AV			1.00 V	209	83.40	5.19
5	4824.00	53.26 PK	74.00	-20.74	1.00 V	90	42.57	10.69
6	4824.00	41.15 AV	54.00	-12.85	1.00 V	90	30.46	10.69
7	#7236.00	60.26 PK	74.00	-13.74	1.00 V	90	43.31	16.95
8	#7236.00	44.18 AV	54.00	-9.82	1.00 V	90	27.23	16.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.26 PK			1.00 H	55	92.94	5.32
2	*2437.00	93.14 AV			1.00 H	55	87.82	5.32
3	4874.00	53.28 PK	74.00	-20.72	1.00 H	47	42.38	10.90
4	4874.00	43.28 AV	54.00	-10.72	1.00 H	47	32.38	10.90
5	7311.00	56.48 PK	74.00	-17.52	1.00 H	58	39.32	17.16
6	7311.00	45.62 AV	54.00	-8.38	1.00 H	58	28.46	17.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.26 PK			1.00 V	123	96.94	5.32
2	*2437.00	92.58 AV			1.00 V	123	87.26	5.32
3	4874.00	55.10 PK	74.00	-18.90	1.00 V	79	44.20	10.90
4	4874.00	44.78 AV	54.00	-9.22	1.00 V	79	33.88	10.90
5	7311.00	57.25 PK	74.00	-16.75	1.00 V	60	40.09	17.16
6	7311.00	46.20 AV	54.00	-7.80	1.00 V	60	29.04	17.16

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	93.25 PK			1.00 H	257	87.80	5.45
2	*2462.00	86.47 AV			1.00 H	257	81.02	5.45
3	2483.50	62.15 PK	74.00	-11.85	1.00 H	257	56.58	5.57
4	2483.50	48.75 AV	54.00	-5.25	1.00 H	257	43.18	5.57
5	4924.00	55.57 PK	74.00	-18.43	1.00 H	25	44.48	11.09
6	4924.00	44.19 AV	54.00	-9.81	1.00 H	25	33.10	11.09
7	7386.00	56.95 PK	74.00	-17.05	1.00 H	113	39.59	17.36
8	7386.00	45.11 AV	54.00	-8.89	1.00 H	113	27.75	17.36
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.06 PK			1.00 V	159	93.61	5.45
2	*2462.00	88.24 AV			1.00 V	159	82.79	5.45
3	2483.50	64.54 PK	74.00	-9.46	1.00 V	159	58.97	5.57
4	2483.50	50.10 AV	54.00	-3.90	1.00 V	159	44.53	5.57
5	4924.00	56.48 PK	74.00	-17.52	1.00 V	176	45.39	11.09
6	4924.00	46.19 AV	54.00	-7.81	1.00 V	176	35.10	11.09
7	7386.00	57.48 PK	74.00	-16.52	1.00 V	108	40.12	17.36
8	7386.00	46.69 AV	54.00	-7.31	1.00 V	108	29.33	17.36

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n HT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.29 PK	74.00	-8.71	1.00 H	108	60.23	5.06
2	2390.00	50.10 AV	54.00	-3.90	1.00 H	108	45.04	5.06
3	*2412.00	98.56 PK			1.00 H	108	93.37	5.19
4	*2412.00	91.06 AV			1.00 H	108	85.87	5.19
5	4824.00	52.59 PK	74.00	-21.41	1.00 H	116	41.90	10.69
6	4824.00	42.18 AV	54.00	-11.82	1.00 H	116	31.49	10.69
7	#7236.00	54.78 PK	74.00	-19.22	1.00 H	116	37.83	16.95
8	#7236.00	43.48 AV	54.00	-10.52	1.00 H	116	26.53	16.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.31 PK	74.00	-6.69	1.00 V	128	62.25	5.06
2	2390.00	51.00 AV	54.00	-3.00	1.00 V	128	45.94	5.06
3	*2412.00	103.50 PK			1.00 V	128	98.31	5.19
4	*2412.00	93.31 AV			1.00 V	128	88.12	5.19
5	4824.00	53.28 PK	74.00	-20.72	1.00 V	164	42.59	10.69
6	4824.00	43.98 AV	54.00	-10.02	1.00 V	164	33.29	10.69
7	#7236.00	56.48 PK	74.00	-17.52	1.00 V	164	39.53	16.95
8	#7236.00	44.59 AV	54.00	-9.41	1.00 V	164	27.64	16.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.26 PK			1.00 H	158	95.94	5.32
2	*2437.00	92.25 AV			1.00 H	158	86.93	5.32
3	4874.00	54.26 PK	74.00	-19.74	1.00 H	47	43.36	10.90
4	4874.00	43.68 AV	54.00	-10.32	1.00 H	47	32.78	10.90
5	7311.00	56.48 PK	74.00	-17.52	1.00 H	41	39.32	17.16
6	7311.00	45.62 AV	54.00	-8.38	1.00 H	41	28.46	17.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.59 PK			1.00 V	77	93.27	5.32
2	*2437.00	95.47 AV			1.00 V	77	90.15	5.32
3	4874.00	53.62 PK	74.00	-20.38	1.00 V	48	42.72	10.90
4	4874.00	41.96 AV	54.00	-12.04	1.00 V	48	31.06	10.90
5	7311.00	55.68 PK	74.00	-18.32	1.00 V	98	38.52	17.16
6	7311.00	44.28 AV	54.00	-9.72	1.00 V	98	27.12	17.16

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.48 PK			1.00 H	78	92.03	5.45
2	*2462.00	93.56 AV			1.00 H	78	88.11	5.45
3	2483.50	65.57 PK	74.00	-8.43	1.00 H	78	60.00	5.57
4	2483.50	46.75 AV	54.00	-7.25	1.00 H	78	41.18	5.57
5	4924.00	55.65 PK	74.00	-18.35	1.00 H	315	44.56	11.09
6	4924.00	42.71 AV	54.00	-11.29	1.00 H	315	31.62	11.09
7	7386.00	57.62 PK	74.00	-16.38	1.00 H	55	40.26	17.36
8	7386.00	45.28 AV	54.00	-8.72	1.00 H	55	27.92	17.36
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.67 PK			1.00 V	146	96.22	5.45
2	*2462.00	90.37 AV			1.00 V	146	84.92	5.45
3	2483.50	67.29 PK	74.00	-6.71	1.00 V	146	61.72	5.57
4	2483.50	49.82 AV	54.00	-4.18	1.00 V	146	44.25	5.57
5	4924.00	56.58 PK	74.00	-17.42	1.00 V	15	45.49	11.09
6	4924.00	43.28 AV	54.00	-10.72	1.00 V	15	32.19	11.09
7	7386.00	58.69 PK	74.00	-15.31	1.00 V	35	41.33	17.36
8	7386.00	47.66 AV	54.00	-6.34	1.00 V	35	30.30	17.36

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n HT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.58 PK	74.00	-9.42	1.00 H	73	59.52	5.06
2	2390.00	48.62 AV	54.00	-5.38	1.00 H	73	43.56	5.06
3	*2422.00	97.48 PK			1.00 H	73	92.24	5.24
4	*2422.00	92.28 AV			1.00 H	73	87.04	5.24
5	4844.00	52.28 PK	74.00	-21.72	1.00 H	296	41.51	10.77
6	4844.00	41.18 AV	54.00	-12.82	1.00 H	296	30.41	10.77
7	7266.00	55.48 PK	74.00	-18.52	1.00 H	313	38.44	17.04
8	7266.00	45.47 AV	54.00	-8.53	1.00 H	313	28.43	17.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.58 PK	74.00	-7.42	1.00 V	210	61.52	5.06
2	2390.00	49.10 AV	54.00	-4.90	1.00 V	210	44.04	5.06
3	*2422.00	101.26 PK			1.00 V	210	96.02	5.24
4	*2422.00	88.72 AV			1.00 V	210	83.48	5.24
5	4844.00	53.26 PK	74.00	-20.74	1.00 V	210	42.49	10.77
6	4844.00	44.25 AV	54.00	-9.75	1.00 V	210	33.48	10.77
7	7266.00	56.58 PK	74.00	-17.42	1.00 V	294	39.54	17.04
8	7266.00	46.18 AV	54.00	-7.82	1.00 V	294	29.14	17.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.62 PK			1.00 H	70	93.30	5.32
2	*2437.00	91.02 AV			1.00 H	70	85.70	5.32
3	4874.00	52.18 PK	74.00	-21.82	1.00 H	335	41.28	10.90
4	4874.00	34.58 AV	54.00	-19.42	1.00 H	335	23.68	10.90
5	7311.00	56.96 PK	74.00	-17.04	1.00 H	271	39.80	17.16
6	7311.00	38.47 AV	54.00	-15.53	1.00 H	271	21.31	17.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.06 PK			1.00 V	252	95.74	5.32
2	*2437.00	92.18 AV			1.00 V	252	86.86	5.32
3	4874.00	53.26 PK	74.00	-20.74	1.00 V	279	42.36	10.90
4	4874.00	35.58 AV	54.00	-18.42	1.00 V	279	24.68	10.90
5	7311.00	57.69 PK	74.00	-16.31	1.00 V	260	40.53	17.16
6	7311.00	39.58 AV	54.00	-14.42	1.00 V	260	22.42	17.16

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.26 PK			1.00 H	20	87.86	5.40
2	*2452.00	83.25 AV			1.00 H	20	77.85	5.40
3	2483.50	61.48 PK	74.00	-12.52	1.00 H	20	55.91	5.57
4	2483.50	50.36 AV	54.00	-3.64	1.00 H	20	44.79	5.57
5	4904.00	43.66 PK	74.00	-30.34	1.00 H	45	32.65	11.01
6	4904.00	40.18 AV	54.00	-13.82	1.00 H	45	29.17	11.01
7	7356.00	54.69 PK	74.00	-19.31	1.00 H	56	37.40	17.29
8	7356.00	42.67 AV	54.00	-11.33	1.00 H	56	25.38	17.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.59 PK			1.00 V	256	92.19	5.40
2	*2452.00	85.15 AV			1.00 V	256	79.75	5.40
3	2483.50	63.40 PK	74.00	-10.60	1.00 V	256	57.83	5.57
4	2483.50	51.00 AV	54.00	-3.00	1.00 V	256	45.43	5.57
5	4904.00	54.26 PK	74.00	-19.74	1.00 V	28	43.25	11.01
6	4904.00	43.29 AV	54.00	-10.71	1.00 V	28	32.28	11.01
7	7356.00	56.25 PK	74.00	-17.75	1.00 V	98	38.96	17.29
8	7356.00	44.59 AV	54.00	-9.41	1.00 V	98	27.30	17.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.2. 6DB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	N/A
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 03,21
Power Meter	Anritsu	ML2495A	1139001	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24,22
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03,21
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 10,21
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Feb. 24,22
Signal Generator	Agilent	N5183A	MY50140980	Aug. 10,21
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 04,21
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A

NOTES: 1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


4.2.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

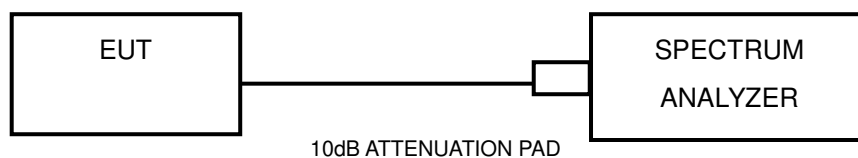

4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.2.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.08	0.5	PASS
6	2437	10.10	0.5	PASS
11	2462	10.11	0.5	PASS

802.11g


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.58	0.5	PASS
6	2437	16.58	0.5	PASS
11	2462	16.58	0.5	PASS


802.11n HT20


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.85	0.5	PASS
6	2437	17.85	0.5	PASS
11	2462	17.84	0.5	PASS


802.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.63	0.5	PASS
6	2437	36.64	0.5	PASS
9	2452	36.62	0.5	PASS

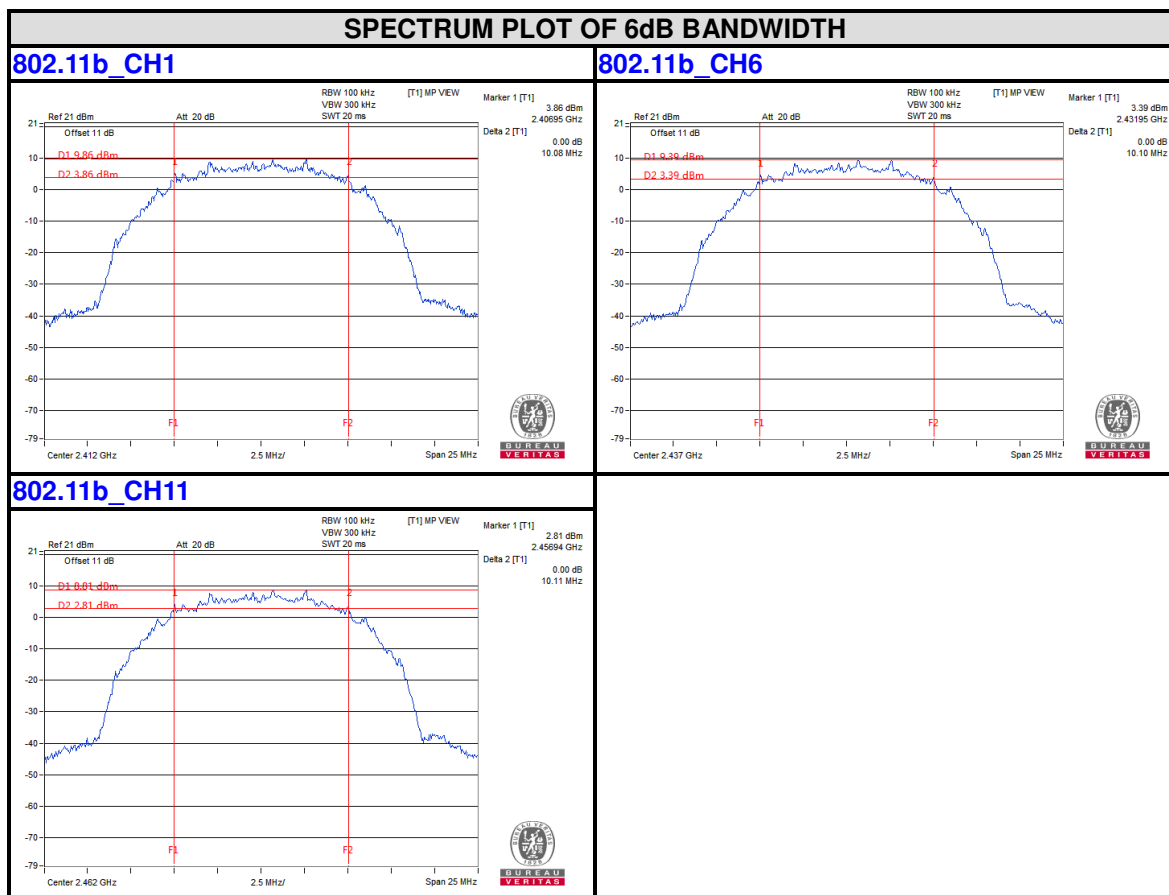

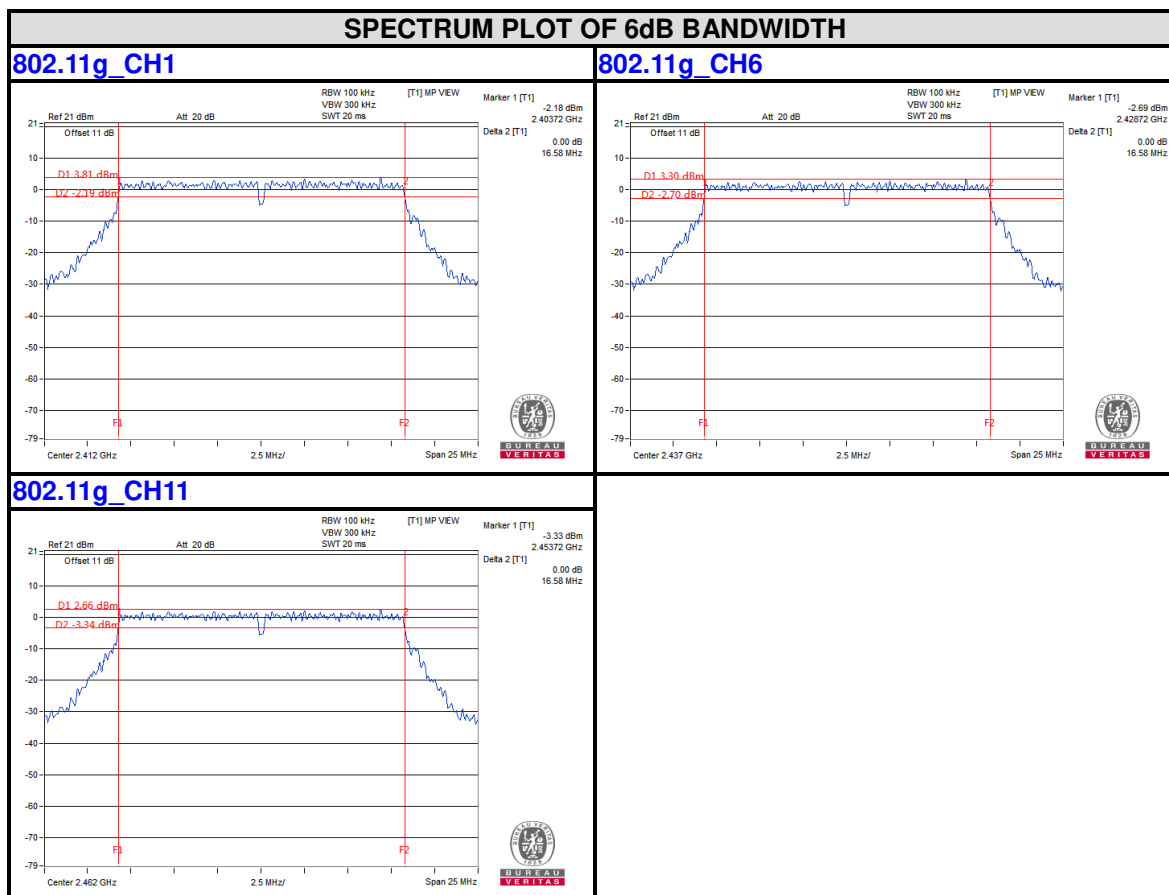

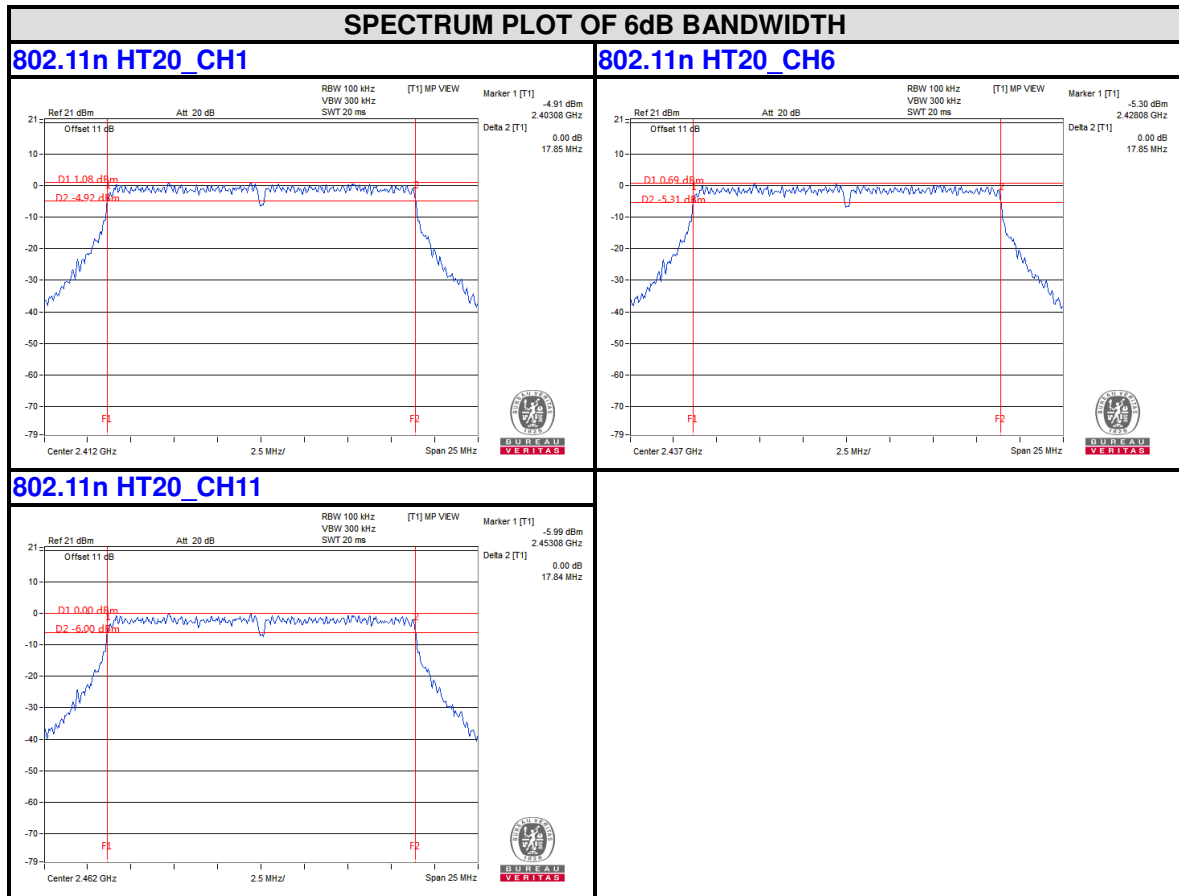

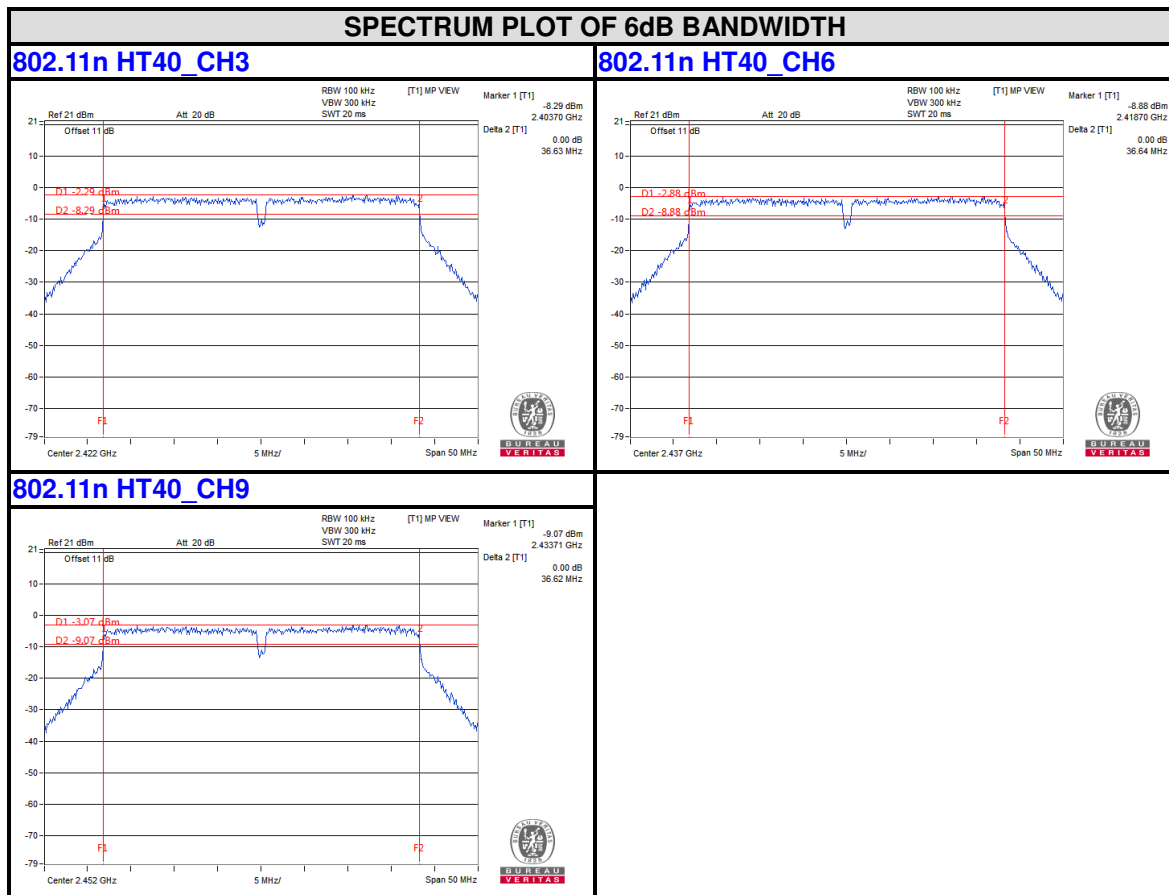


4.3. CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.3.2 TEST SETUP

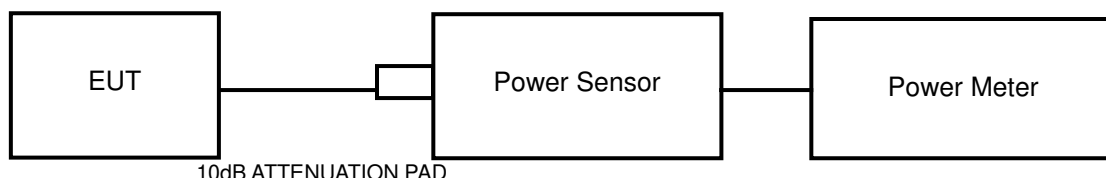

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	N/A
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 03,21
Power Meter	Anritsu	ML2495A	1139001	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24,22
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03,21
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 10,21
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Feb. 24,22
Signal Generator	Agilent	N5183A	MY50140980	Aug. 10,21
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 04,21
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.3.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	26.60	457.088	1	PASS
6	2437	26.34	430.527	1	PASS
11	2462	26.39	435.512	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	26.20	416.869	1	PASS
6	2437	25.88	387.258	1	PASS
11	2462	25.98	396.278	1	PASS

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	23.79	239.332	1	PASS
6	2437	23.52	224.905	1	PASS
11	2462	23.35	216.272	1	PASS

802.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
3	2422	24.18	261.818	1	PASS
6	2437	23.93	247.172	1	PASS
9	2452	24.08	255.859	1	PASS

AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	19.39	86.896
6	2437	19.10	81.283
11	2462	19.21	83.368

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	18.33	68.077
6	2437	18.11	64.714
11	2462	17.94	62.230

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	15.74	37.497
6	2437	15.42	34.834
11	2462	15.27	33.651

802.11n HT40


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
3	2422	15.80	38.019
6	2437	15.50	35.481
9	2452	15.72	37.325

4.4. POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.4.4 TEST PROCEDURE

- Set instrument center frequency to DTS channel center frequency.
- Set span to 1.5 times the DTS bandwidth.
- Set RBW to: 3KHz
- Set VBW $\geq 3 \times$ RBW.
- Detector = peak
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Use the peak marker function to determine the maximum amplitude level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITION

Same as item 4.3.6.

4.4.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-5.90	8.00	PASS
6	2437	-6.11	8.00	PASS
11	2462	-6.72	8.00	PASS

802.11g


Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.51	8.00	PASS
6	2437	-12.08	8.00	PASS
11	2462	-12.57	8.00	PASS

802.11n HT20

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.36	8.00	PASS
6	2437	-13.89	8.00	PASS
11	2462	-14.48	8.00	PASS

802.11n HT40

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-16.45	8.00	PASS
6	2437	-15.78	8.00	PASS
9	2452	-16.08	8.00	PASS

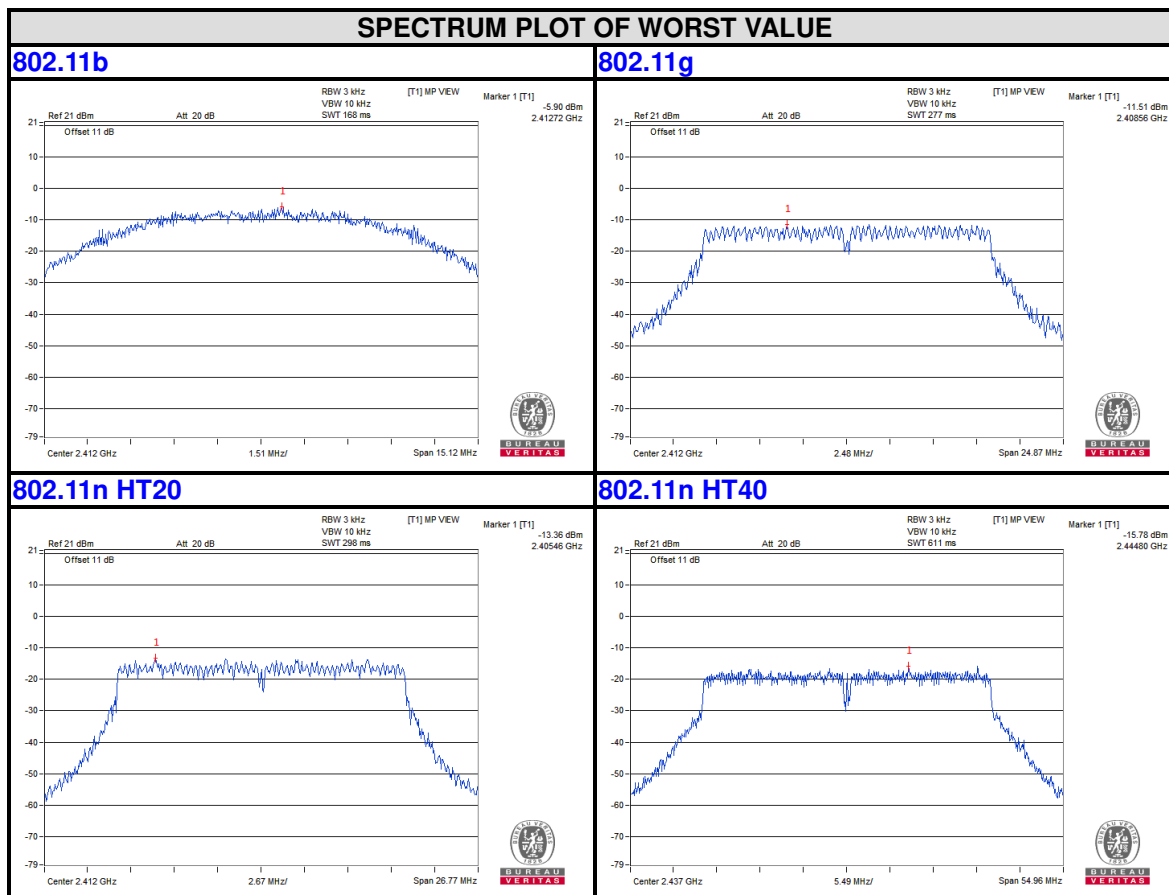

4.5. OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD


No deviation.

4.5.6 EUT OPERATING CONDITION


Same as item 4.3.6

4.5.7 TEST RESULTS

802.11b

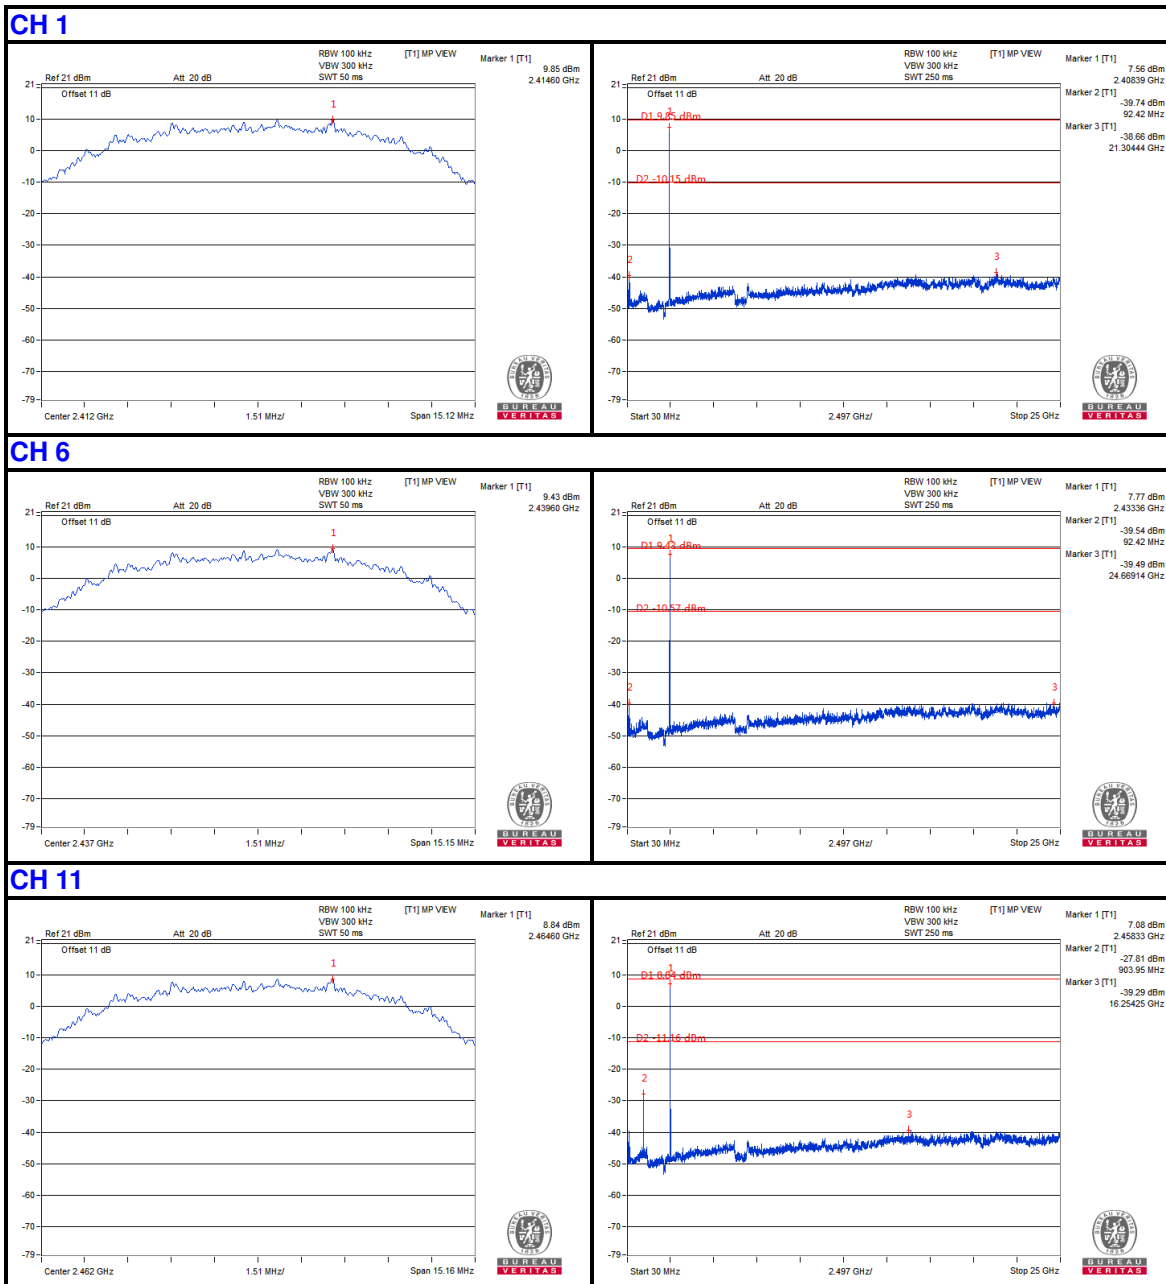


802.11g

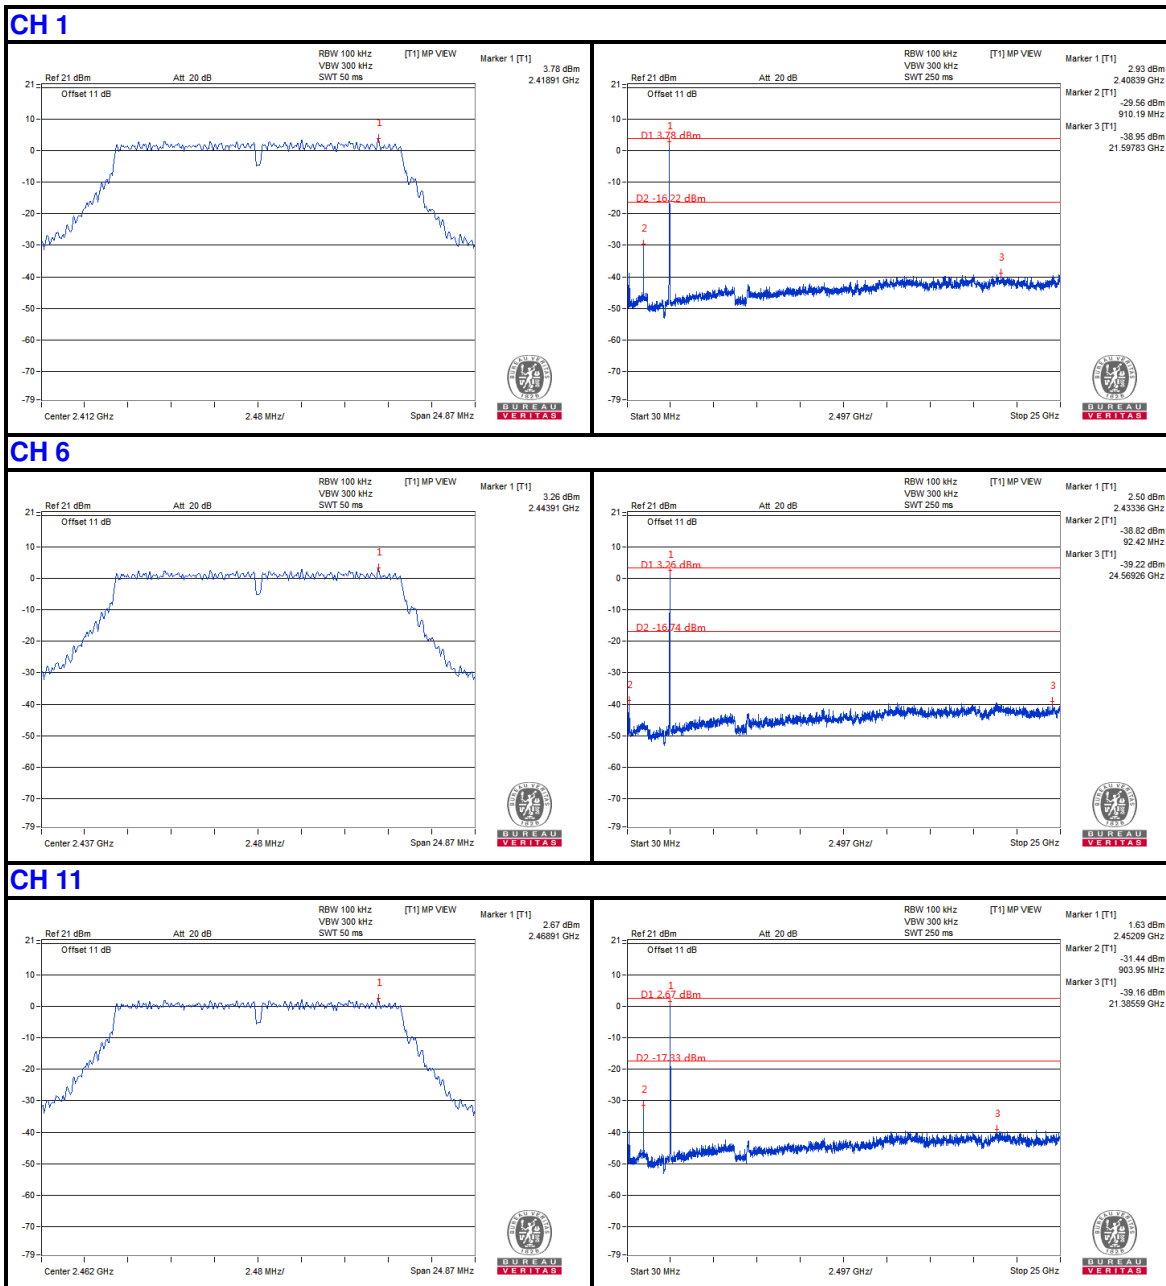


802.11n HT20


CH 1

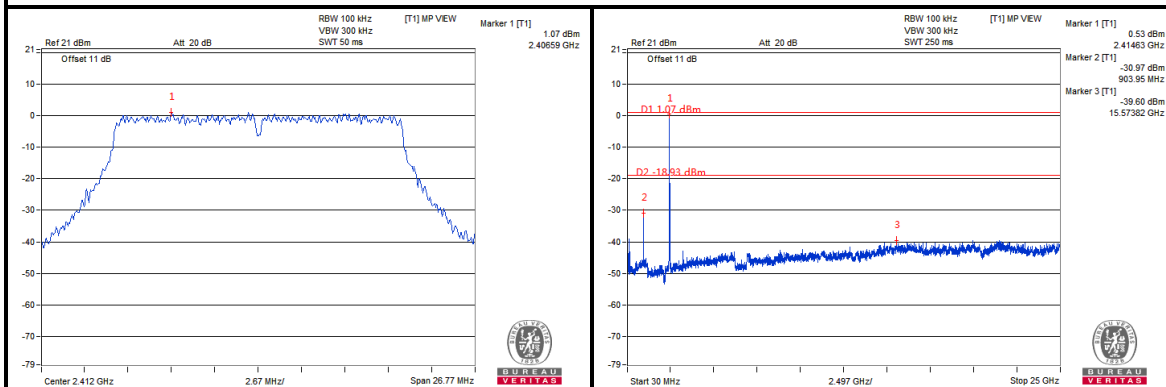

CH 6

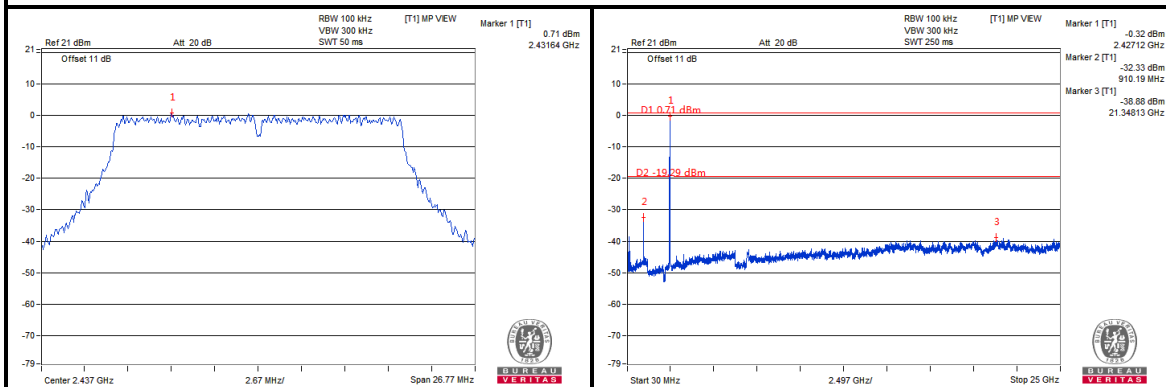


CH 11

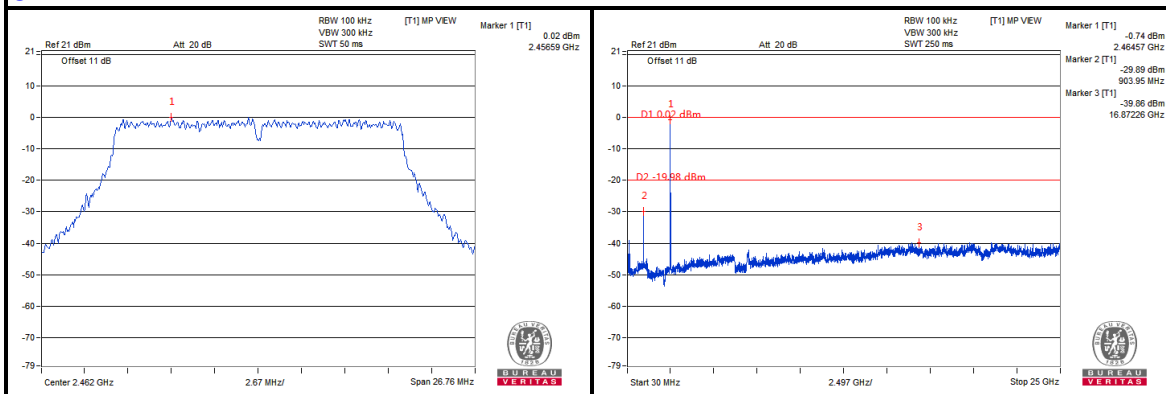


802.11n HT40


CH 3

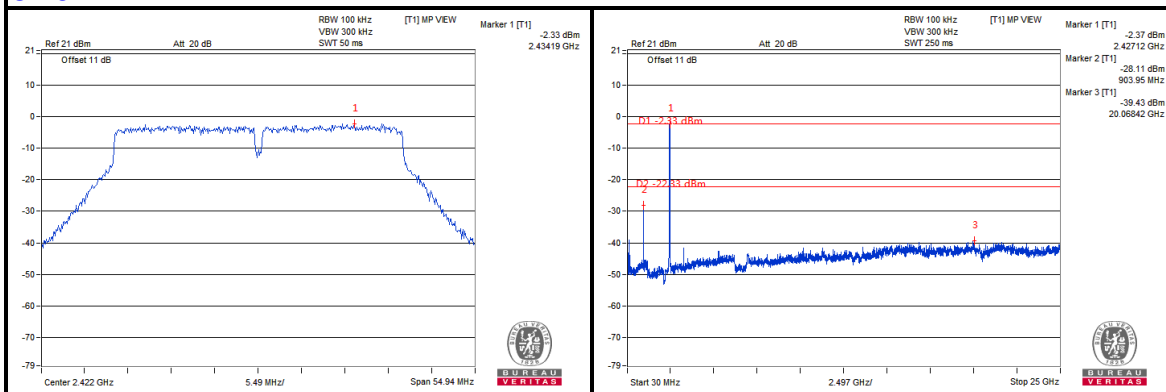


CH 6

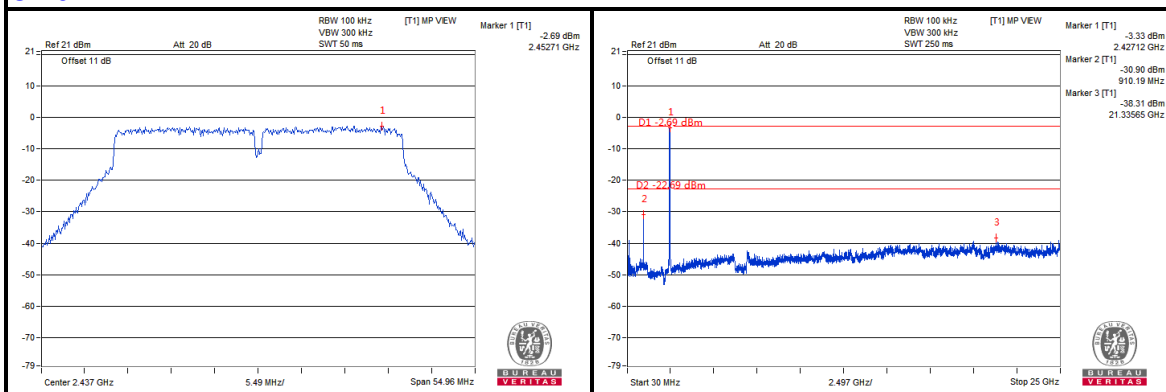


CH 9

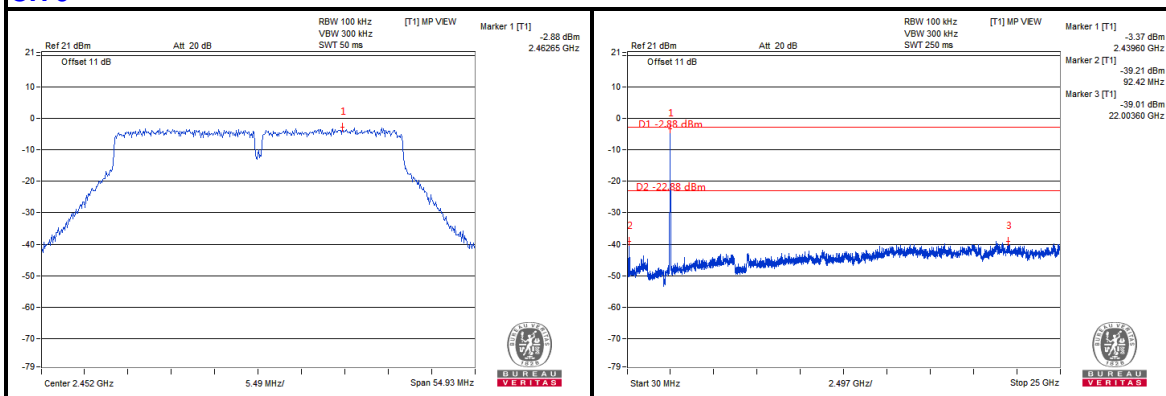


802.11b

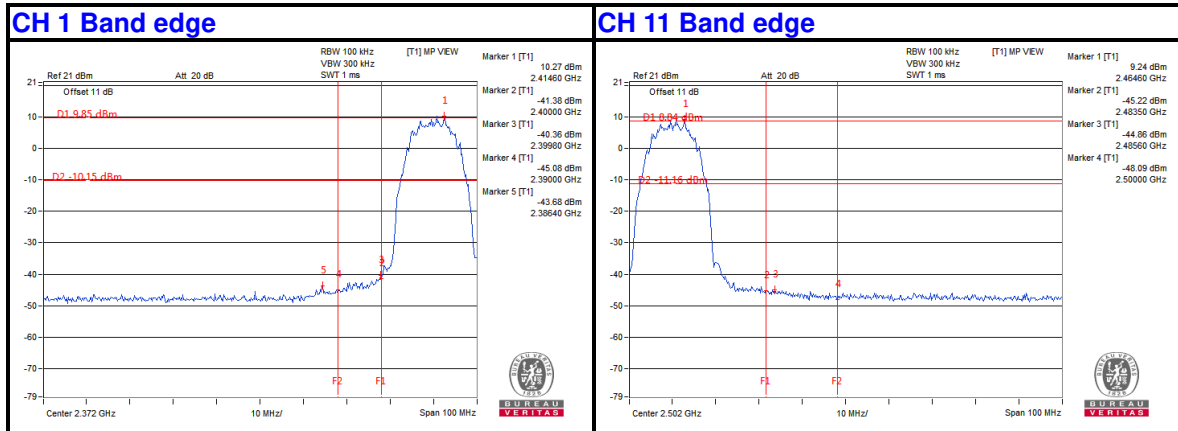


802.11g

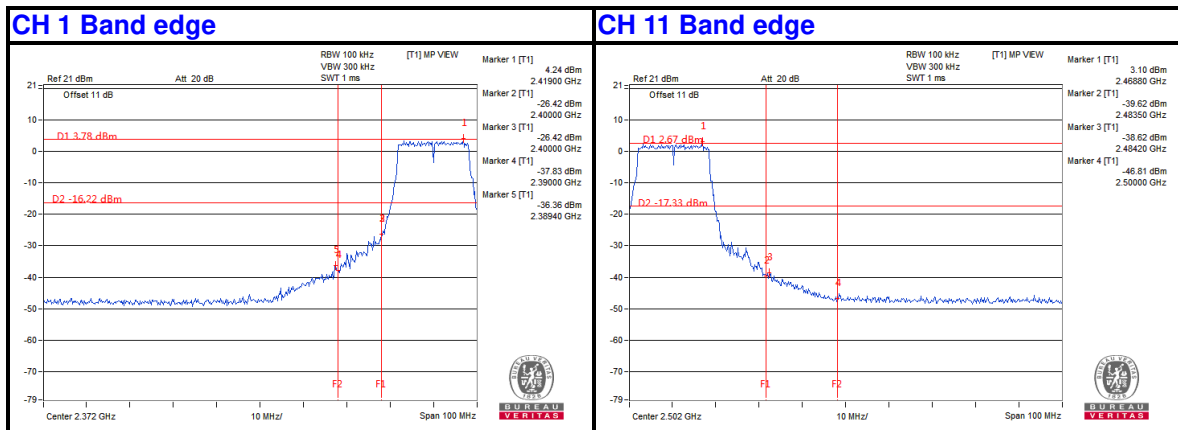

802.11n HT20

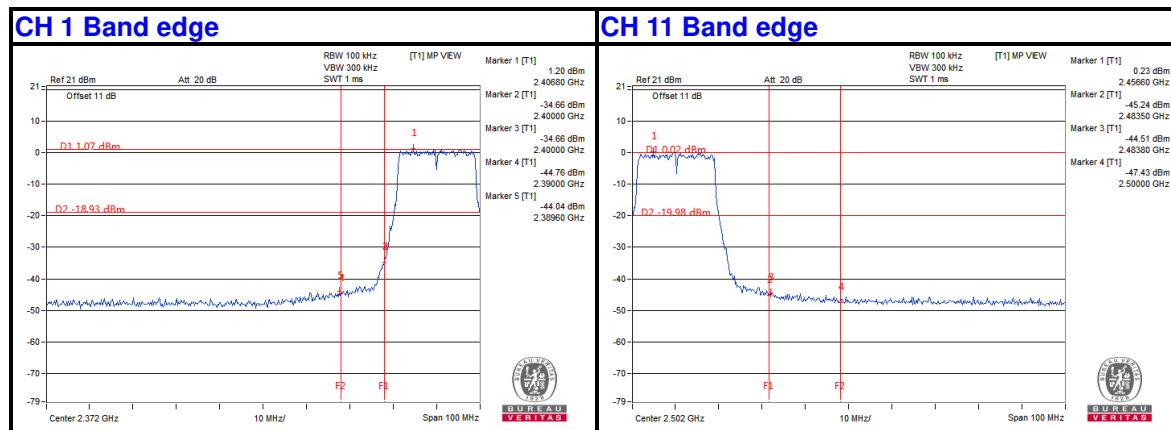

802.11n (HT40)

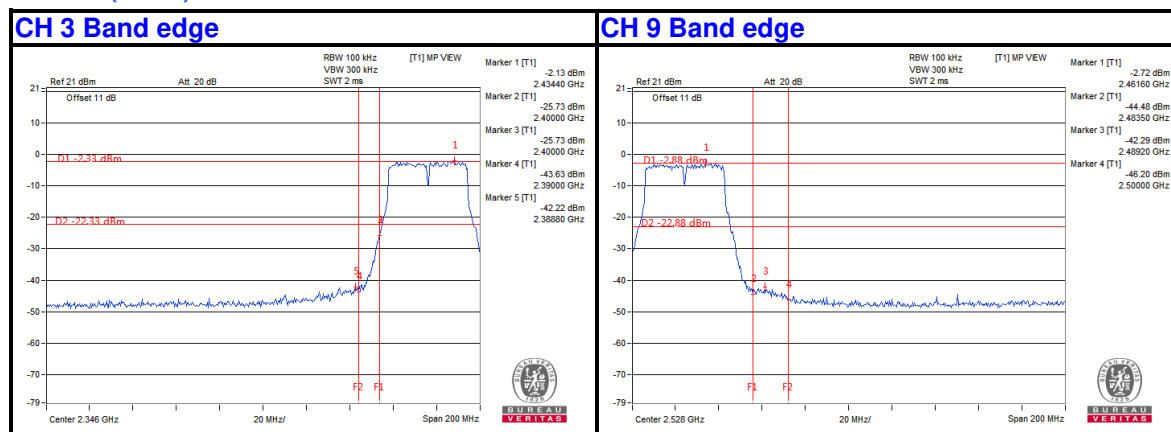



Test Report No.: RF2104WDG0210-1

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---