

### FCC REPORT

**Applicant:** TOA Canada Corporation

**Address of Applicant:** 3670 Odyssey Drive, Unit #1, Mississauga, ON L5M 0Y9, Canada

**Manufacturer:** Enping Sange Electronic Co., Ltd.

**Address of Manufacturer:** NO.F12 Civilian and foreign capital industry area, Enping city, Guangdong province China

**Equipment Under Test (EUT)**

Product Name: Bodypack transmitter

Model No.: S2.4-BTX-G3

Trade Mark: TRANTEC

**FCC ID:** 2AUTM-S24BTXG3

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249

**Date of sample receipt:** September 09, 2019

**Date of Test:** September 20- October 16, 2019

**Date of report issued:** October 16, 2019

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

| Version No. | Date             | Description |
|-------------|------------------|-------------|
| 00          | October 16, 2019 | Original    |
|             |                  |             |
|             |                  |             |
|             |                  |             |
|             |                  |             |

Prepared By:



Date:

October 16, 2019

Project Engineer

Check By:



Date:

October 16, 2019

Reviewer

## 3 Contents

|                                                      | Page |
|------------------------------------------------------|------|
| 1 COVER PAGE.....                                    | 1    |
| 2 VERSION .....                                      | 2    |
| 3 CONTENTS .....                                     | 3    |
| 4 TEST SUMMARY .....                                 | 4    |
| 4.1 MEASUREMENT UNCERTAINTY .....                    | 4    |
| 5 GENERAL INFORMATION .....                          | 5    |
| 5.1 GENERAL DESCRIPTION OF EUT .....                 | 5    |
| 5.2 TEST MODE .....                                  | 7    |
| 5.3 DESCRIPTION OF SUPPORT UNITS .....               | 7    |
| 5.4 TEST FACILITY.....                               | 7    |
| 5.5 TEST LOCATION .....                              | 7    |
| 6 TEST INSTRUMENTS LIST .....                        | 8    |
| 7 TEST RESULTS AND MEASUREMENT DATA.....             | 10   |
| 7.1 ANTENNA REQUIREMENT .....                        | 10   |
| 7.2 CONDUCTED EMISSIONS .....                        | 11   |
| 7.3 RADIATED EMISSION METHOD.....                    | 12   |
| 7.3.1 Field Strength of The Fundamental Signal ..... | 14   |
| 7.3.2 Spurious emissions.....                        | 15   |
| 7.3.3 Bandedge emissions.....                        | 20   |
| 7.4 20dB OCCUPY BANDWIDTH .....                      | 23   |
| 8 TEST SETUP PHOTO .....                             | 25   |
| 9 EUT CONSTRUCTIONAL DETAILS .....                   | 26   |

## 4 Test Summary

| Test Item                                | Section in CFR 47     | Result |
|------------------------------------------|-----------------------|--------|
| Antenna requirement                      | 15.203                | Pass   |
| AC Power Line Conducted Emission         | 15.207                | N/A    |
| Field strength of the fundamental signal | 15.249 (a)            | Pass   |
| Spurious emissions                       | 15.249 (a) (d)/15.209 | Pass   |
| Band edge                                | 15.249 (d)/15.205     | Pass   |
| 20dB Occupied Bandwidth                  | 15.215 (c)            | Pass   |

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.10:2013.*

### 4.1 Measurement Uncertainty

| Test Item                        | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission                | 9kHz ~ 30MHz    | $\pm 4.34\text{dB}$     | (1)   |
| Radiated Emission                | 30MHz ~ 1000MHz | $\pm 4.24\text{dB}$     | (1)   |
| Radiated Emission                | 1GHz ~ 26.5GHz  | $\pm 4.68\text{dB}$     | (1)   |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | $\pm 3.45\text{dB}$     | (1)   |

Note (1): The measurement uncertainty is for coverage factor of  $k=2$  and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

|                      |                              |
|----------------------|------------------------------|
| Product Name:        | Bodypack transmitter         |
| Model No.:           | S2.4-BTX-G3                  |
| Test model:          | S2.4-BTX-G3                  |
| <i>Remark: /</i>     |                              |
| Serial No.:          | S5015ME                      |
| Hardware Version:    | HV1.0                        |
| Software Version:    | SV1.0                        |
| Test sample(s) ID:   | GTS201909000191-1            |
| Sample(s) Status     | Engineered sample            |
| Operation Frequency: | 2404MHz~2474MHz              |
| Channel numbers:     | 32                           |
| Channel separation:  | 2MHz                         |
| Modulation type:     | GFSK                         |
| Antenna Type:        | Integral antenna             |
| Antenna gain:        | 1.0dBi(declare by applicant) |
| Power supply:        | DC 3V(2*1.5V AA battery)     |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2404MHz   | 9       | 2420MHz   | 17      | 2444MHz   | 25      | 2460MHz   |
| 2                                   | 2406MHz   | 10      | 2422MHz   | 18      | 2446MHz   | 26      | 2462MHz   |
| 3                                   | 2408MHz   | 11      | 2424MHz   | 19      | 2448MHz   | 27      | 2464MHz   |
| 4                                   | 2410MHz   | 12      | 2426MHz   | 20      | 2450MHz   | 28      | 2466MHz   |
| 5                                   | 2412MHz   | 13      | 2428MHz   | 21      | 2452MHz   | 29      | 2468MHz   |
| 6                                   | 2414MHz   | 14      | 2430MHz   | 22      | 2454MHz   | 30      | 2470MHz   |
| 7                                   | 2416MHz   | 15      | 2432MHz   | 23      | 2456MHz   | 31      | 2472MHz   |
| 8                                   | 2418MHz   | 16      | 2434MHz   | 24      | 2458MHz   | 32      | 2474MHz   |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2404MHz   |
| The middle channel  | 2434MHz   |
| The Highest channel | 2474MHz   |

## 5.2 Test mode

|                                                                                                                                                                                                                                                                     |                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                                                   | Keep the EUT in continuously transmitting mode. |
| <i>Remark: During the test, the dutycycle &gt;98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i> |                                                 |

### Pre-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

| Axis                   | X     | Y     | Z     |
|------------------------|-------|-------|-------|
| Field Strength(dBuV/m) | 96.12 | 96.33 | 96.25 |

### Final Test Mode:

According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup":  
Y axis (see the test setup photo)

## 5.3 Description of Support Units

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| /            | /           | /     | /             |

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

## 6 Test Instruments list

| Radiated Emission: |                                     |                                |                             |               |                     |                         |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                      | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber           | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | July. 03 2015       | July. 02 2020           |
| 2                  | Control Room                        | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | EMI Test Receiver                   | Rohde & Schwarz                | ESU26                       | GTS203        | June. 26 2019       | June. 25 2020           |
| 4                  | BiConiLog Antenna                   | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | June. 26 2019       | June. 25 2020           |
| 5                  | Double -ridged waveguide horn       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D                 | GTS208        | June. 26 2019       | June. 25 2020           |
| 6                  | Horn Antenna                        | ETS-LINDGREN                   | 3160                        | GTS217        | June. 26 2019       | June. 25 2020           |
| 7                  | EMI Test Software                   | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 8                  | Coaxial Cable                       | GTS                            | N/A                         | GTS213        | June. 26 2019       | June. 25 2020           |
| 9                  | Coaxial Cable                       | GTS                            | N/A                         | GTS211        | June. 26 2019       | June. 25 2020           |
| 10                 | Coaxial cable                       | GTS                            | N/A                         | GTS210        | June. 26 2019       | June. 25 2020           |
| 11                 | Coaxial Cable                       | GTS                            | N/A                         | GTS212        | June. 26 2019       | June. 25 2020           |
| 12                 | Amplifier(100kHz-3GHz)              | HP                             | 8347A                       | GTS204        | June. 26 2019       | June. 25 2020           |
| 13                 | Amplifier(2GHz-20GHz)               | HP                             | 84722A                      | GTS206        | June. 26 2019       | June. 25 2020           |
| 14                 | Amplifier (18-26GHz)                | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June. 26 2019       | June. 25 2020           |
| 15                 | Band filter                         | Amindeon                       | 82346                       | GTS219        | June. 26 2019       | June. 25 2020           |
| 16                 | Power Meter                         | Anritsu                        | ML2495A                     | GTS540        | June. 26 2019       | June. 25 2020           |
| 17                 | Power Sensor                        | Anritsu                        | MA2411B                     | GTS541        | June. 26 2019       | June. 25 2020           |
| 18                 | Wideband Radio Communication Tester | Rohde & Schwarz                | CMW500                      | GTS575        | June. 26 2019       | June. 25 2020           |
| 19                 | Splitter                            | Agilent                        | 11636B                      | GTS237        | June. 26 2019       | June. 25 2020           |
| 20                 | Loop Antenna                        | ZHINAN                         | ZN30900A                    | GTS534        | June. 26 2019       | June. 25 2020           |
| 21                 | Breitband hornantenne               | SCHWARZBECK                    | BBHA 9170                   | GTS579        | Oct. 20 2018        | Oct. 19 2019            |
| 22                 | Amplifier                           | TDK                            | PA-02-02                    | GTS574        | Oct. 20 2018        | Oct. 19 2019            |
| 23                 | Amplifier                           | TDK                            | PA-02-03                    | GTS576        | Oct. 20 2018        | Oct. 19 2019            |
| 24                 | PSA Series Spectrum Analyzer        | Rohde & Schwarz                | FSP                         | GTS578        | June. 26 2019       | June. 25 2020           |




| Conducted Emission |                          |                         |                      |               |                     |                         |
|--------------------|--------------------------|-------------------------|----------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment           | Manufacturer            | Model No.            | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | Shielding Room           | ZhongYu Electron        | 7.3(L)x3.1(W)x2.9(H) | GTS252        | May.15 2019         | May.14 2022             |
| 2                  | EMI Test Receiver        | R&S                     | ESCI 7               | GTS552        | June. 26 2019       | June. 25 2020           |
| 3                  | Coaxial Switch           | ANRITSU CORP            | MP59B                | GTS225        | June. 26 2019       | June. 25 2020           |
| 4                  | Artificial Mains Network | SCHWARZBECK MESS        | NSLK8127             | GTS226        | June. 26 2019       | June. 25 2020           |
| 5                  | Coaxial Cable            | GTS                     | N/A                  | GTS227        | N/A                 | N/A                     |
| 6                  | EMI Test Software        | AUDIX                   | E3                   | N/A           | N/A                 | N/A                     |
| 7                  | Thermo meter             | KTJ                     | TA328                | GTS233        | June. 26 2019       | June. 25 2020           |
| 8                  | Absorbing clamp          | Elektronik-Feinmechanik | MDS21                | GTS229        | June. 26 2019       | June. 25 2020           |
| 9                  | ISN                      | SCHWARZBECK             | NTFM 8158            | GTD565        | June. 26 2019       | June. 25 2020           |

| RF Conducted Test: |                                                |              |                  |            |                     |                         |
|--------------------|------------------------------------------------|--------------|------------------|------------|---------------------|-------------------------|
| Item               | Test Equipment                                 | Manufacturer | Model No.        | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | MXA Signal Analyzer                            | Agilent      | N9020A           | GTS566     | June. 26 2019       | June. 25 2020           |
| 2                  | EMI Test Receiver                              | R&S          | ESCI 7           | GTS552     | June. 26 2019       | June. 25 2020           |
| 3                  | Spectrum Analyzer                              | Agilent      | E4440A           | GTS533     | June. 26 2019       | June. 25 2020           |
| 4                  | MXG vector Signal Generator                    | Agilent      | N5182A           | GTS567     | June. 26 2019       | June. 25 2020           |
| 5                  | ESG Analog Signal Generator                    | Agilent      | E4428C           | GTS568     | June. 26 2019       | June. 25 2020           |
| 6                  | USB RF Power Sensor                            | DARE         | RPR3006W         | GTS569     | June. 26 2019       | June. 25 2020           |
| 7                  | RF Switch Box                                  | Shongyi      | RFSW3003328      | GTS571     | June. 26 2019       | June. 25 2020           |
| 8                  | Programmable Constant Temp & Humi Test Chamber | WEWON        | WHTH-150L-40-880 | GTS572     | June. 26 2019       | June. 25 2020           |

| General used equipment: |                                 |              |           |               |                     |                         |
|-------------------------|---------------------------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item                    | Test Equipment                  | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                       | Humidity/ Temperature Indicator | KTJ          | TA328     | GTS243        | June. 26 2019       | June. 25 2020           |
| 2                       | Barometer                       | ChangChun    | DYM3      | GTS255        | June. 26 2019       | June. 25 2020           |

## 7 Test results and Measurement Data


### 7.1 Antenna requirement


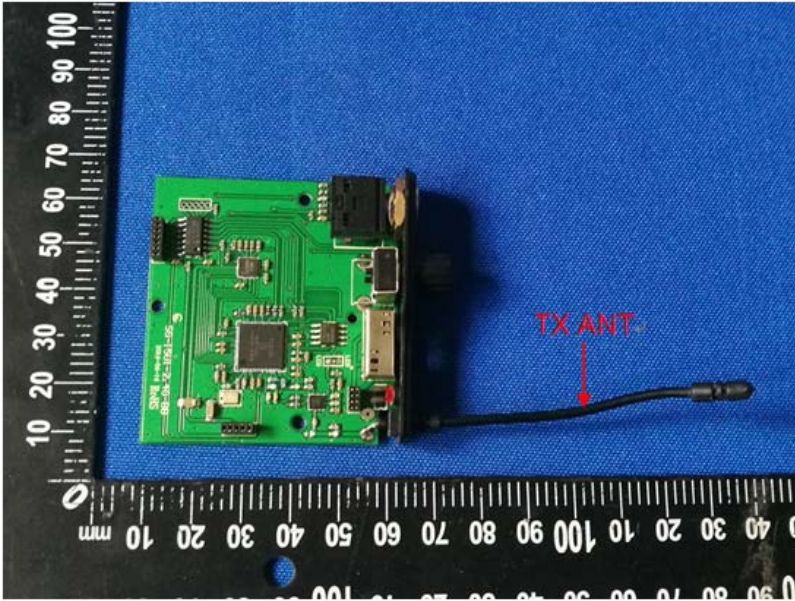
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | FCC Part15 C Section 15.203 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| <p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> |                             |
| EUT Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                             |
| <p>The antenna is Integral antenna, the best case gain of the antenna is 1.0dBi.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                             |

## 7.2 Conducted Emissions

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |              |     |           |          |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------------|-----|-----------|----------|
| Test Requirement:                                | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       |              |     |           |          |
| Test Method:                                     | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |              |     |           |          |
| Test Frequency Range:                            | 150KHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |              |     |           |          |
| Class / Severity:                                | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |              |     |           |          |
| Receiver setup:                                  | RBW=9KHz, VBW=30KHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |       |              |     |           |          |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |       | Limit (dBuV) |     |           |          |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       | Quasi-peak   |     | Average   |          |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       | 66 to 56*    |     | 56 to 46* |          |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |       | 56           |     | 46        |          |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |       | 60           |     | 50        |          |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |              |     |           |          |
| Test setup:                                      | <div><p style="text-align: center;"><b>Reference Plane</b></p><p><i>Remark:</i><br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |              |     |           |          |
| Test procedure:                                  | <div><div>1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</div></div> |       |              |     |           |          |
| Test Instruments:                                | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |              |     |           |          |
| Test mode:                                       | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |              |     |           |          |
| Test environment:                                | Temp.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 25 °C | Humid.:      | 52% | Press.:   | 1012mbar |
| Test voltage:                                    | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |              |     |           |          |
| Test results:                                    | Because the EUT employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Measurements to demonstrate compliance with the conducted limits are not required for devices.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |              |     |           |          |

## 7.3 Radiated Emission Method
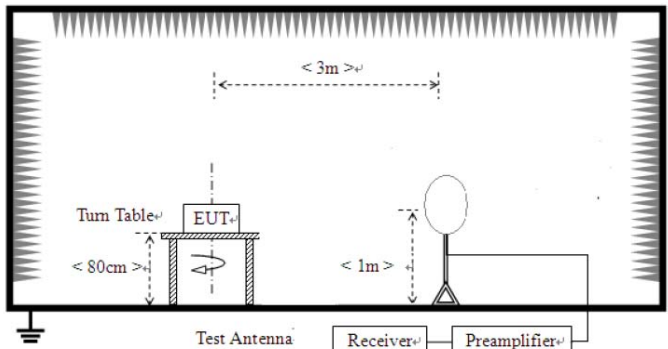
|                                                      |                                                                                                                                                                                                                                                                |            |                    |               |                  |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------|---------------|------------------|
| Test Requirement:                                    | FCC Part15 C Section 15.209                                                                                                                                                                                                                                    |            |                    |               |                  |
| Test Method:                                         | ANSI C63.10:2013                                                                                                                                                                                                                                               |            |                    |               |                  |
| Test Frequency Range:                                | 9kHz to 25GHz                                                                                                                                                                                                                                                  |            |                    |               |                  |
| Test site:                                           | Measurement Distance: 3m                                                                                                                                                                                                                                       |            |                    |               |                  |
| Receiver setup:                                      | Frequency                                                                                                                                                                                                                                                      | Detector   | RBW                | VBW           | Remark           |
|                                                      | 9kHz-150kHz                                                                                                                                                                                                                                                    | Quasi-peak | 200Hz              | 300Hz         | Quasi-peak Value |
|                                                      | 150kHz-30MHz                                                                                                                                                                                                                                                   | Quasi-peak | 9kHz               | 10kHz         | Quasi-peak Value |
|                                                      | 30MHz-1GHz                                                                                                                                                                                                                                                     | Quasi-peak | 120KHz             | 300KHz        | Quasi-peak Value |
|                                                      | Above 1GHz                                                                                                                                                                                                                                                     | Peak       | 1MHz               | 3MHz          | Peak Value       |
| Peak                                                 |                                                                                                                                                                                                                                                                | 1MHz       | 10Hz               | Average Value |                  |
| Limit:<br>(Field strength of the fundamental signal) | Frequency                                                                                                                                                                                                                                                      |            | Limit (dBuV/m @3m) |               | Remark           |
|                                                      | 2400MHz-2483.5MHz                                                                                                                                                                                                                                              |            | 94.00              |               | Average Value    |
|                                                      |                                                                                                                                                                                                                                                                |            | 114.00             |               | Peak Value       |
| Limit:<br>(Spurious Emissions)                       | Frequency                                                                                                                                                                                                                                                      |            | Limit (uV/m)       |               | Remark           |
|                                                      | 0.009MHz-0.490MHz                                                                                                                                                                                                                                              |            | 2400/F(kHz) @300m  |               | Quasi-peak Value |
|                                                      | 0.490MHz-1.705MHz                                                                                                                                                                                                                                              |            | 24000/F(kHz) @30m  |               | Quasi-peak Value |
|                                                      | 1.705MHz-30.0MHz                                                                                                                                                                                                                                               |            | 30 @30m            |               | Quasi-peak Value |
|                                                      | 30MHz-88MHz                                                                                                                                                                                                                                                    |            | 100 @3m            |               | Quasi-peak Value |
|                                                      | 88MHz-216MHz                                                                                                                                                                                                                                                   |            | 150 @3m            |               | Quasi-peak Value |
|                                                      | 216MHz-960MHz                                                                                                                                                                                                                                                  |            | 200 @3m            |               | Quasi-peak Value |
|                                                      | 960MHz-1GHz                                                                                                                                                                                                                                                    |            | 500 @3m            |               | Quasi-peak Value |
|                                                      | Above 1GHz                                                                                                                                                                                                                                                     |            | 500 @3m            |               | Average Value    |
| 5000 @3m                                             |                                                                                                                                                                                                                                                                |            | Peak Value         |               |                  |
| Limit:<br>(band edge)                                | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. |            |                    |               |                  |
| Test setup:                                          | For radiated emissions from 9kHz to 30MHz<br><br>For radiated emissions from 30MHz to 1GHz                                                                                 |            |                    |               |                  |
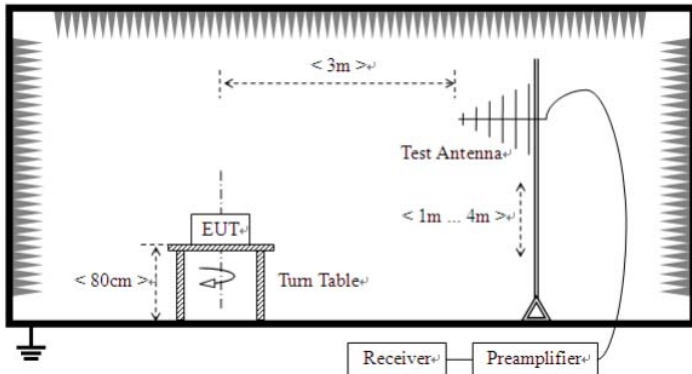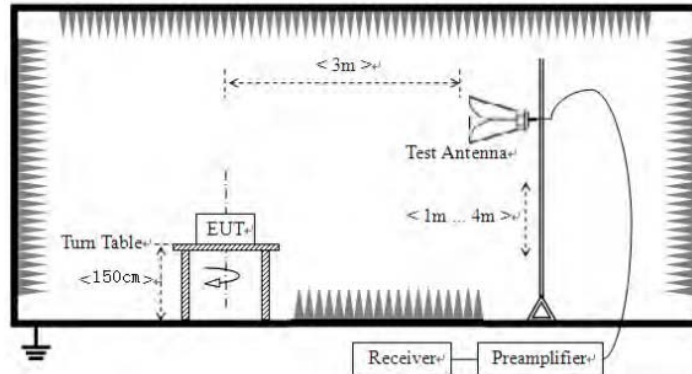
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   |  <p>For radiated emissions above 1GHz</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Procedure:   | <ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li></ol> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test environment: | Temp.: 25 °C    Humid.: 52%    Press.: 1012mbar                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test voltage:     | DC 3V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Measurement data:**
**7.3.1 Field Strength of The Fundamental Signal**
**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2404.00         | 92.02             | 27.58                 | 5.39            | 30.18                    | 94.81          | 114.00              | -19.19          | Vertical     |
| 2404.00         | 90.88             | 27.58                 | 5.39            | 30.18                    | 93.67          | 114.00              | -20.33          | Horizontal   |
| 2434.00         | 93.71             | 27.55                 | 5.43            | 30.06                    | 96.63          | 114.00              | -17.37          | Vertical     |
| 2434.00         | 87.64             | 27.55                 | 5.43            | 30.06                    | 90.56          | 114.00              | -23.44          | Horizontal   |
| 2474.00         | 90.26             | 27.52                 | 5.47            | 29.93                    | 93.32          | 114.00              | -20.68          | Vertical     |
| 2474.00         | 88.54             | 27.52                 | 5.47            | 29.93                    | 91.60          | 114.00              | -22.40          | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2404.00         | 81.17             | 27.58                 | 5.39            | 30.18                    | 83.96          | 94.00               | -10.04          | Vertical     |
| 2404.00         | 79.72             | 27.58                 | 5.39            | 30.18                    | 82.51          | 94.00               | -11.49          | Horizontal   |
| 2434.00         | 79.68             | 27.55                 | 5.43            | 30.06                    | 82.60          | 94.00               | -11.40          | Vertical     |
| 2434.00         | 76.91             | 27.55                 | 5.43            | 30.06                    | 79.83          | 94.00               | -14.17          | Horizontal   |
| 2474.00         | 83.69             | 27.52                 | 5.47            | 29.93                    | 86.75          | 94.00               | -7.25           | Vertical     |
| 2474.00         | 82.46             | 27.52                 | 5.47            | 29.93                    | 85.52          | 94.00               | -8.48           | Horizontal   |




## 7.3.2 Spurious emissions

### ■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


### ■ Below 1GHz

|                  |                   |               |            |
|------------------|-------------------|---------------|------------|
| Mode:            | Transmitting mode | Test by:      | Jason      |
| Temp./Hum.(%RH): | 26°C/56%RH        | Polarization: | Horizontal |

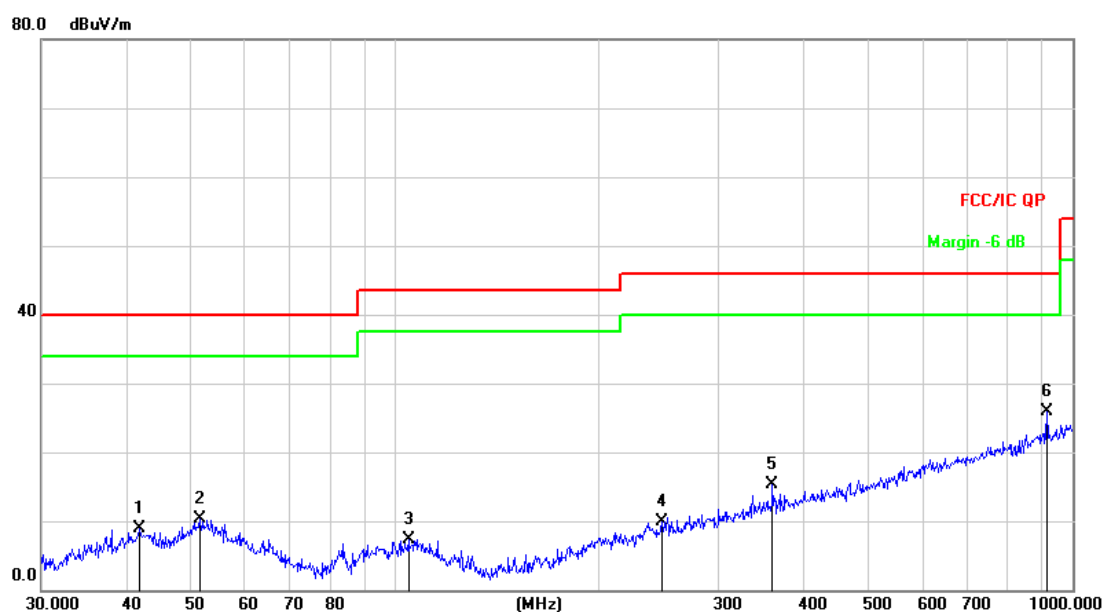

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   |     | 41.8596      | 23.96                    | -15.14                  | 8.82                       | 40.00         | -31.18     | QP       |
| 2   |     | 51.4807      | 24.98                    | -14.76                  | 10.22                      | 40.00         | -29.78     | QP       |
| 3   |     | 104.5361     | 23.45                    | -16.19                  | 7.26                       | 43.50         | -36.24     | QP       |
| 4   |     | 247.6819     | 23.81                    | -13.84                  | 9.97                       | 46.00         | -36.03     | QP       |
| 5   |     | 360.4476     | 25.68                    | -10.40                  | 15.28                      | 46.00         | -30.72     | QP       |
| 6   | *   | 916.0687     | 24.98                    | 0.89                    | 25.87                      | 46.00         | -20.13     | QP       |

|                 |                   |               |          |
|-----------------|-------------------|---------------|----------|
| Mode:           | Transmitting mode | Test by:      | Jason    |
| Temp./Hum.(%H): | 26°C/56%RH        | Polarization: | Vertical |

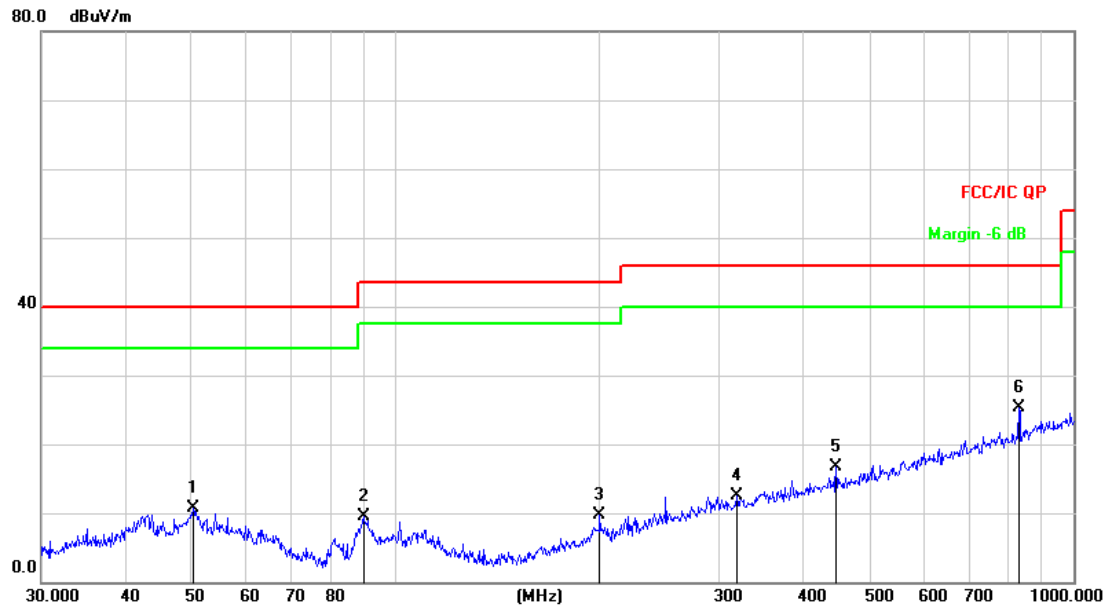

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   |     | 50.2324      | 25.44                    | -14.77                  | 10.67                      | 40.00         | -29.33     | QP       |
| 2   |     | 89.5899      | 27.87                    | -18.29                  | 9.58                       | 43.50         | -33.92     | QP       |
| 3   |     | 199.9856     | 25.33                    | -15.63                  | 9.70                       | 43.50         | -33.80     | QP       |
| 4   |     | 318.8170     | 24.12                    | -11.68                  | 12.44                      | 46.00         | -33.56     | QP       |
| 5   |     | 446.4141     | 25.16                    | -8.48                   | 16.68                      | 46.00         | -29.32     | QP       |
| 6   | *   | 830.4002     | 26.06                    | -0.70                   | 25.36                      | 46.00         | -20.64     | QP       |



## ■ Above 1GHz

|               |                |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4808.00         | 41.93             | 31.78                 | 8.60            | 32.09                    | 50.22          | 74.00               | -23.78          | Vertical     |
| 7212.00         | 34.17             | 36.15                 | 11.65           | 32.00                    | 49.97          | 74.00               | -24.03          | Vertical     |
| 9616.00         | 31.72             | 37.95                 | 14.14           | 31.62                    | 52.19          | 74.00               | -21.81          | Vertical     |
| 12020.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14424.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4808.00         | 45.75             | 31.78                 | 8.60            | 32.09                    | 54.04          | 74.00               | -19.96          | Horizontal   |
| 7212.00         | 37.89             | 36.15                 | 11.65           | 32.00                    | 53.69          | 74.00               | -20.31          | Horizontal   |
| 9616.00         | 33.41             | 37.95                 | 14.14           | 31.62                    | 53.88          | 74.00               | -20.12          | Horizontal   |
| 12020.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14424.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4808.00         | 27.92             | 31.78                 | 8.60            | 32.09                    | 36.21          | 54.00               | -17.79          | Vertical     |
| 7212.00         | 22.51             | 36.15                 | 11.65           | 32.00                    | 38.31          | 54.00               | -15.69          | Vertical     |
| 9616.00         | 23.20             | 37.95                 | 14.14           | 31.62                    | 43.67          | 54.00               | -10.33          | Vertical     |
| 12020.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14424.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4808.00         | 31.78             | 31.78                 | 8.60            | 32.09                    | 40.07          | 54.00               | -13.93          | Horizontal   |
| 7212.00         | 23.11             | 36.15                 | 11.65           | 32.00                    | 38.91          | 54.00               | -15.09          | Horizontal   |
| 9616.00         | 22.83             | 37.95                 | 14.14           | 31.62                    | 43.30          | 54.00               | -10.70          | Horizontal   |
| 12020.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14424.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

|               |                |
|---------------|----------------|
| Test channel: | Middle channel |
|---------------|----------------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4868.00         | 37.42             | 31.85                 | 8.67            | 32.12                    | 45.82          | 74.00               | -28.18          | Vertical     |
| 7302.00         | 32.27             | 36.37                 | 11.72           | 31.89                    | 48.47          | 74.00               | -25.53          | Vertical     |
| 9736.00         | 29.50             | 38.35                 | 14.25           | 31.62                    | 50.48          | 74.00               | -23.52          | Vertical     |
| 12170.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14604.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4868.00         | 38.73             | 31.85                 | 8.67            | 32.12                    | 47.13          | 74.00               | -26.87          | Horizontal   |
| 7302.00         | 31.83             | 36.37                 | 11.72           | 31.89                    | 48.03          | 74.00               | -25.97          | Horizontal   |
| 9736.00         | 27.91             | 38.35                 | 14.25           | 31.62                    | 48.89          | 74.00               | -25.11          | Horizontal   |
| 12170.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14604.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4868.00         | 26.85             | 31.85                 | 8.67            | 32.12                    | 35.25          | 54.00               | -18.75          | Vertical     |
| 7302.00         | 22.67             | 36.37                 | 11.72           | 31.89                    | 38.87          | 54.00               | -15.13          | Vertical     |
| 9736.00         | 21.39             | 38.35                 | 14.25           | 31.62                    | 42.37          | 54.00               | -11.63          | Vertical     |
| 12170.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14604.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4868.00         | 33.23             | 31.85                 | 8.67            | 32.12                    | 41.63          | 54.00               | -12.37          | Horizontal   |
| 7302.00         | 24.60             | 36.37                 | 11.72           | 31.89                    | 40.80          | 54.00               | -13.20          | Horizontal   |
| 9736.00         | 21.34             | 38.35                 | 14.25           | 31.62                    | 42.32          | 54.00               | -11.68          | Horizontal   |
| 12170.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14604.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

|               |                 |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4948.00         | 38.56             | 31.93                 | 8.73            | 32.16                    | 47.06          | 74.00               | -26.94          | Vertical     |
| 7422.00         | 33.50             | 36.59                 | 11.79           | 31.78                    | 50.10          | 74.00               | -23.90          | Vertical     |
| 9896.00         | 31.12             | 38.81                 | 14.38           | 31.88                    | 52.43          | 74.00               | -21.57          | Vertical     |
| 12370.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14844.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4948.00         | 39.87             | 31.93                 | 8.73            | 32.16                    | 48.37          | 74.00               | -25.63          | Horizontal   |
| 7422.00         | 32.16             | 36.59                 | 11.79           | 31.78                    | 48.76          | 74.00               | -25.24          | Horizontal   |
| 9896.00         | 32.03             | 38.81                 | 14.38           | 31.88                    | 53.34          | 74.00               | -20.66          | Horizontal   |
| 12370.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14844.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4948.00         | 29.52             | 31.93                 | 8.73            | 32.16                    | 38.02          | 54.00               | -15.98          | Vertical     |
| 7422.00         | 23.35             | 36.59                 | 11.79           | 31.78                    | 39.95          | 54.00               | -14.05          | Vertical     |
| 9896.00         | 22.18             | 38.81                 | 14.38           | 31.88                    | 43.49          | 54.00               | -10.51          | Vertical     |
| 12370.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14844.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4948.00         | 32.63             | 31.93                 | 8.73            | 32.16                    | 41.13          | 54.00               | -12.87          | Horizontal   |
| 7422.00         | 24.04             | 36.59                 | 11.79           | 31.78                    | 40.64          | 54.00               | -13.36          | Horizontal   |
| 9896.00         | 23.51             | 38.81                 | 14.38           | 31.88                    | 44.82          | 54.00               | -9.18           | Horizontal   |
| 12370.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14844.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

### 7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

|               |                |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 40.08             | 27.59                 | 5.38            | 30.18                    | 42.87          | 74.00               | -31.13          | Horizontal   |
| 2400.00         | 53.63             | 27.58                 | 5.39            | 30.18                    | 56.42          | 74.00               | -17.58          | Horizontal   |
| 2390.00         | 39.81             | 27.59                 | 5.38            | 30.18                    | 42.60          | 74.00               | -31.40          | Vertical     |
| 2400.00         | 52.93             | 27.58                 | 5.39            | 30.18                    | 55.72          | 74.00               | -18.28          | Vertical     |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 32.45             | 27.59                 | 5.38            | 30.18                    | 35.24          | 54.00               | -18.76          | Horizontal   |
| 2400.00         | 39.77             | 27.58                 | 5.39            | 30.18                    | 42.56          | 54.00               | -11.44          | Horizontal   |
| 2390.00         | 32.28             | 27.59                 | 5.38            | 30.18                    | 35.07          | 54.00               | -18.93          | Vertical     |
| 2400.00         | 41.69             | 27.58                 | 5.39            | 30.18                    | 44.48          | 54.00               | -9.52           | Vertical     |

|               |                 |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 43.84             | 27.53                 | 5.47            | 29.93                    | 46.91          | 74.00               | -27.09          | Horizontal   |
| 2500.00         | 45.06             | 27.55                 | 5.49            | 29.93                    | 48.17          | 74.00               | -25.83          | Horizontal   |
| 2483.50         | 43.66             | 27.53                 | 5.47            | 29.93                    | 46.73          | 74.00               | -27.27          | Vertical     |
| 2500.00         | 42.47             | 27.55                 | 5.49            | 29.93                    | 45.58          | 74.00               | -28.42          | Vertical     |

Average value:


| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 33.17             | 27.53                 | 5.47            | 29.93                    | 36.24          | 54.00               | -17.76          | Horizontal   |
| 2500.00         | 32.35             | 27.55                 | 5.49            | 29.93                    | 35.46          | 54.00               | -18.54          | Horizontal   |
| 2483.50         | 33.10             | 27.53                 | 5.47            | 29.93                    | 36.17          | 54.00               | -17.83          | Vertical     |
| 2500.00         | 34.54             | 27.55                 | 5.49            | 29.93                    | 37.65          | 54.00               | -16.35          | Vertical     |

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

GFSK


## 2402MHz Horizontal

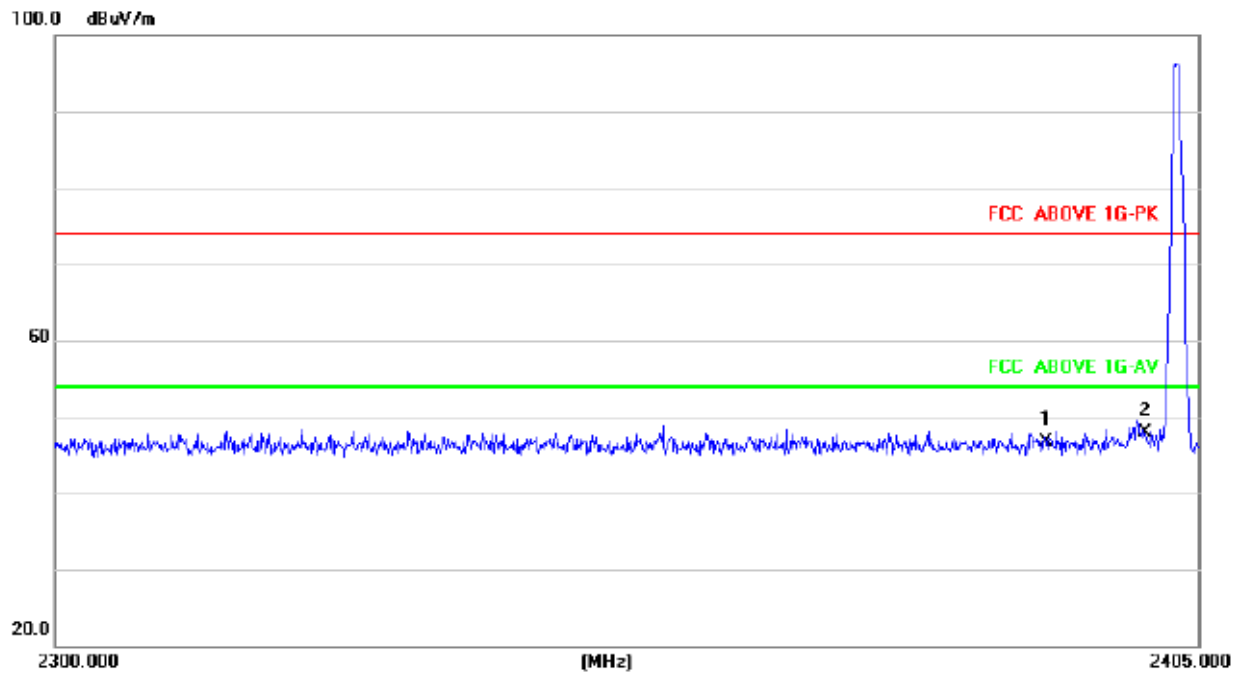


## 2402MHz Vertical

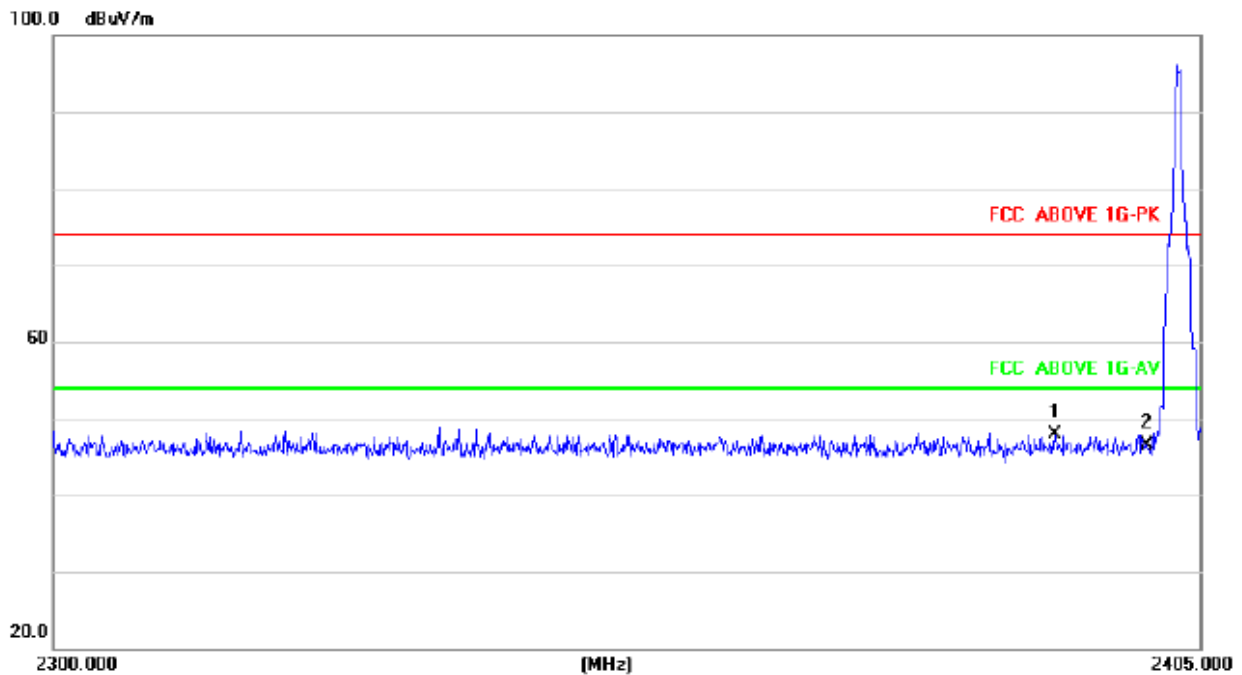


## 2480MHz Horizontal

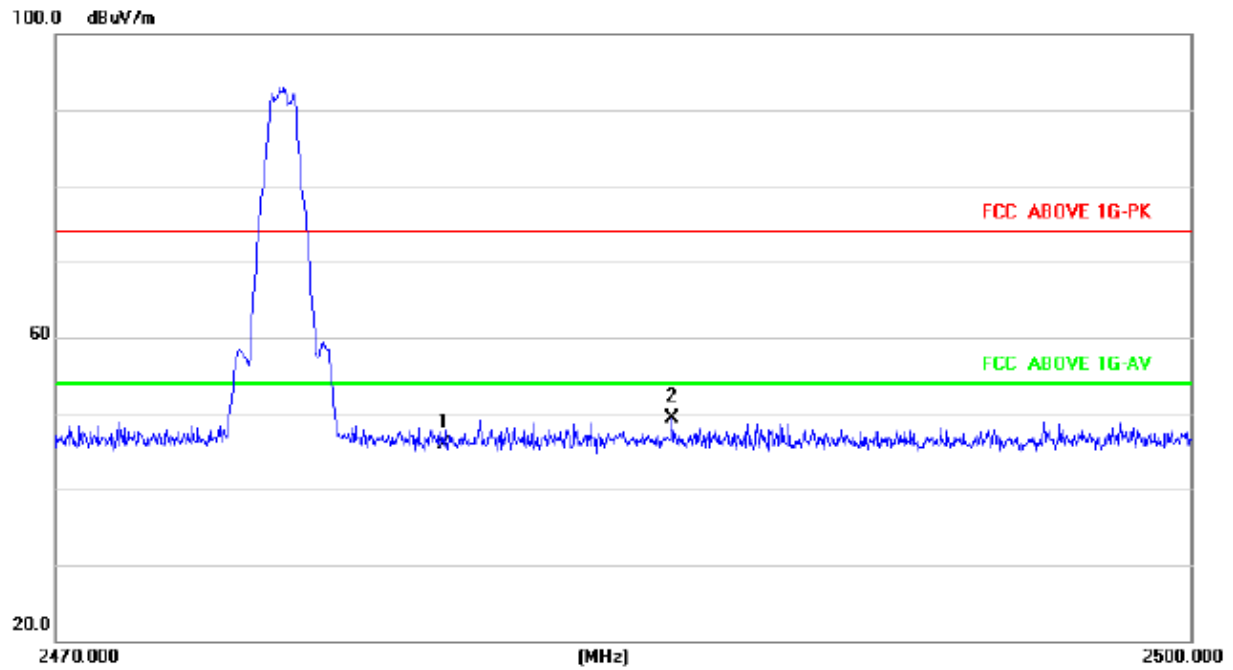

## 2480MHz Vertical

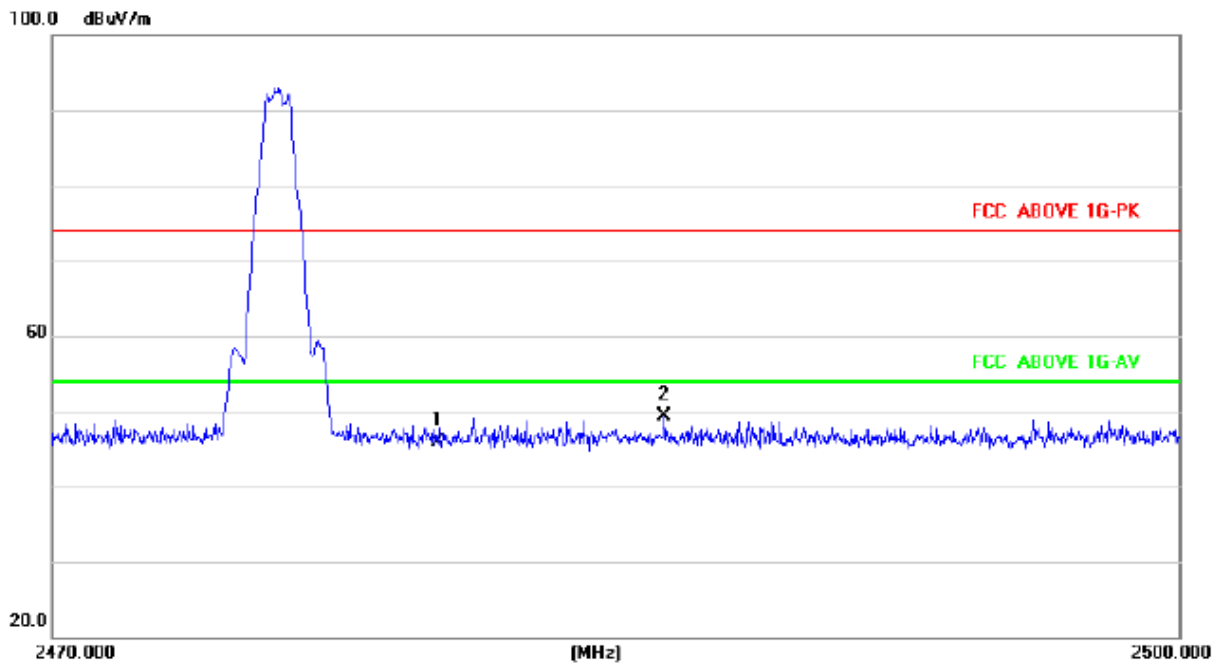

## 7.4 20dB Occupy Bandwidth

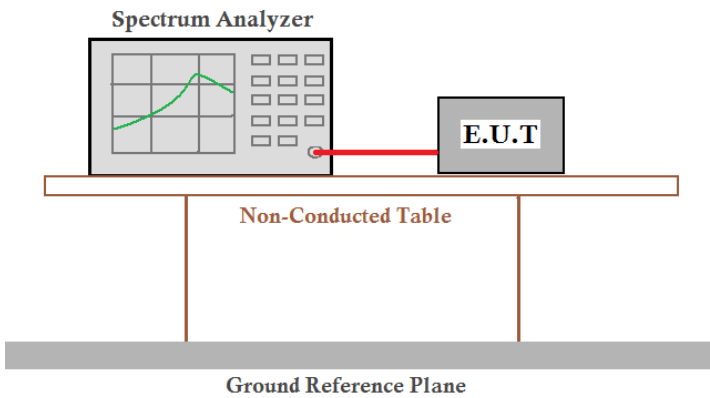
|                   |                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.249/15.215                                                                                                                                                                                                                                                                                                                  |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                    |
| Limit:            | Operation Frequency range 2400MHz~2483.5MHz                                                                                                                                                                                                                                                                                                         |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                    |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                    |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                |

### Measurement Data


| Test channel | 20dB bandwidth(MHz) | Result |
|--------------|---------------------|--------|
| Lowest       | 1.377               | Pass   |
| Middle       | 1.356               | Pass   |
| Highest      | 1.365               | Pass   |

Test plot as follows:


## GFSK

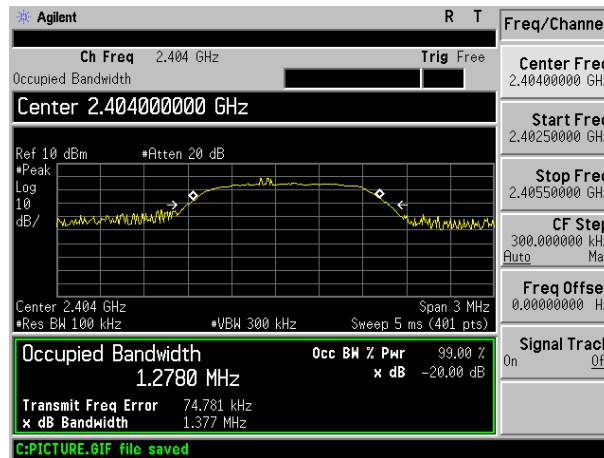

## Lowest channel

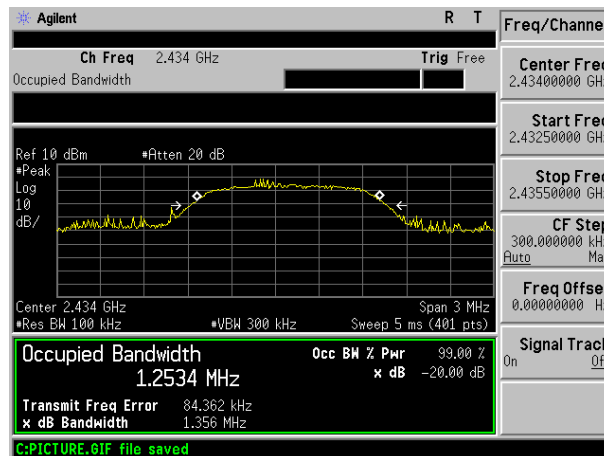



## Middle channel

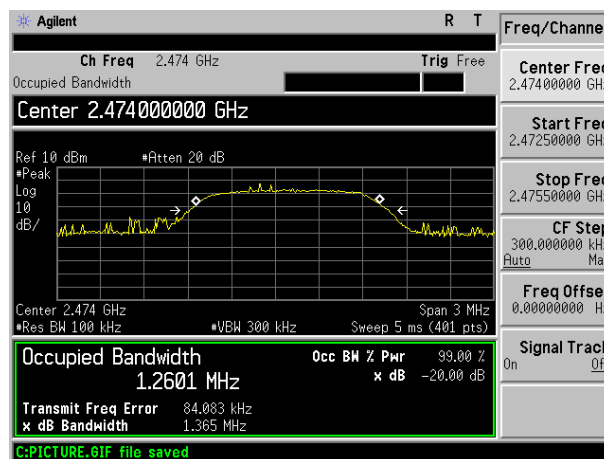

## Highest channel



## 8 Test Setup Photo

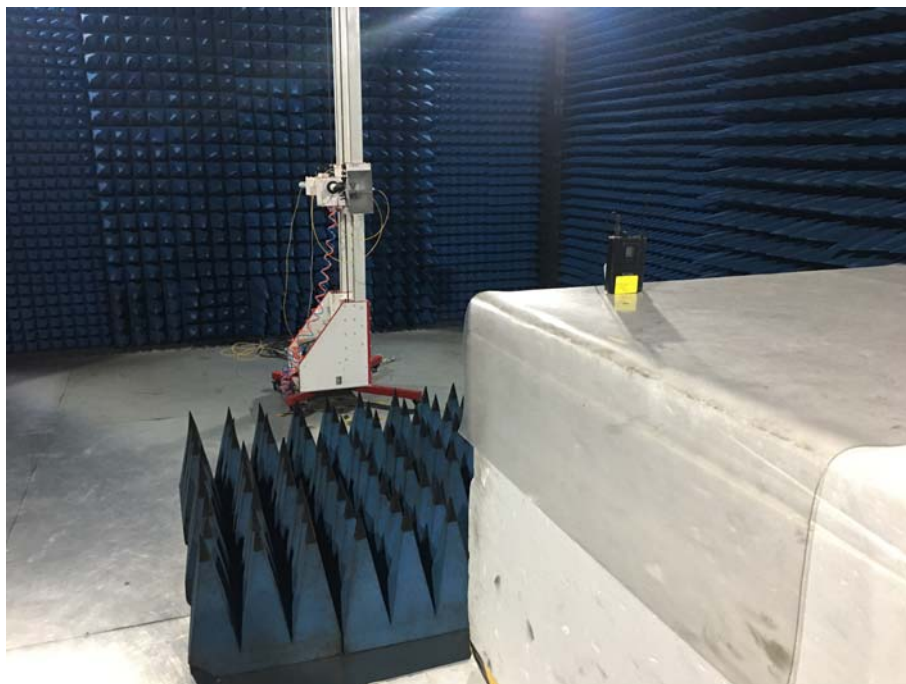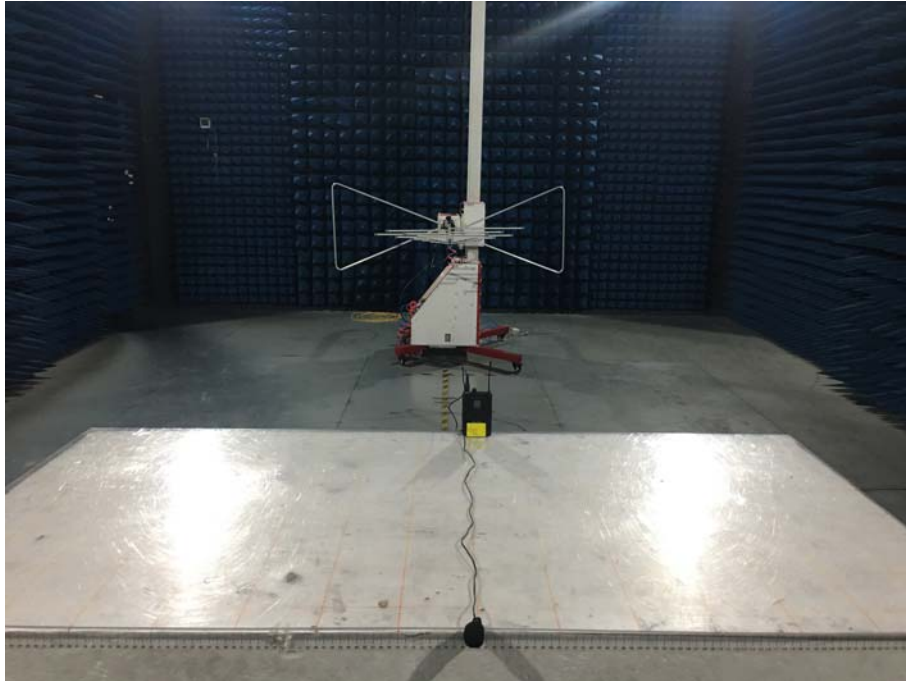

## 9 EUT Constructional Details
















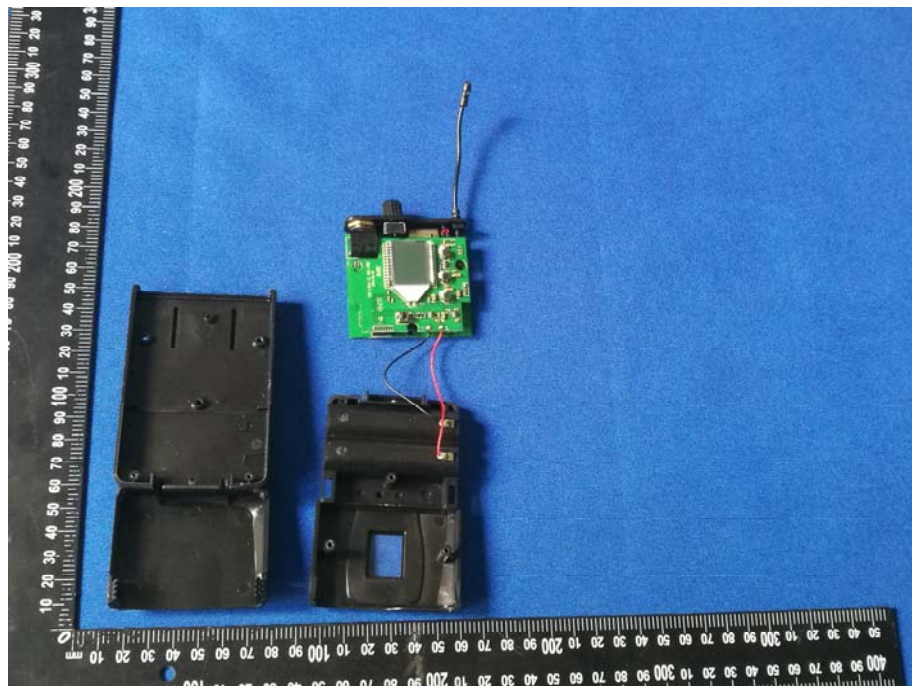

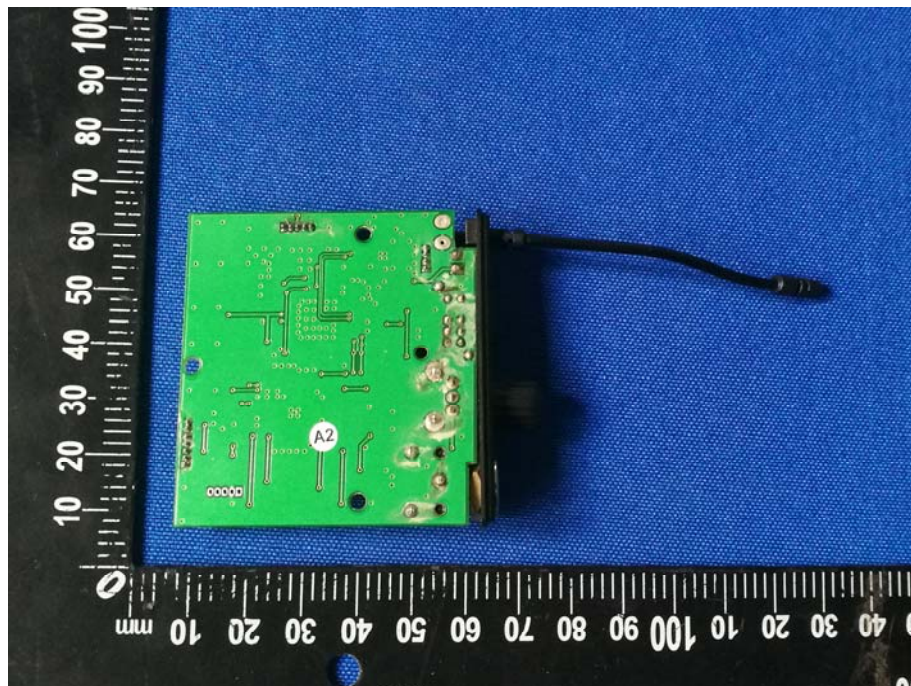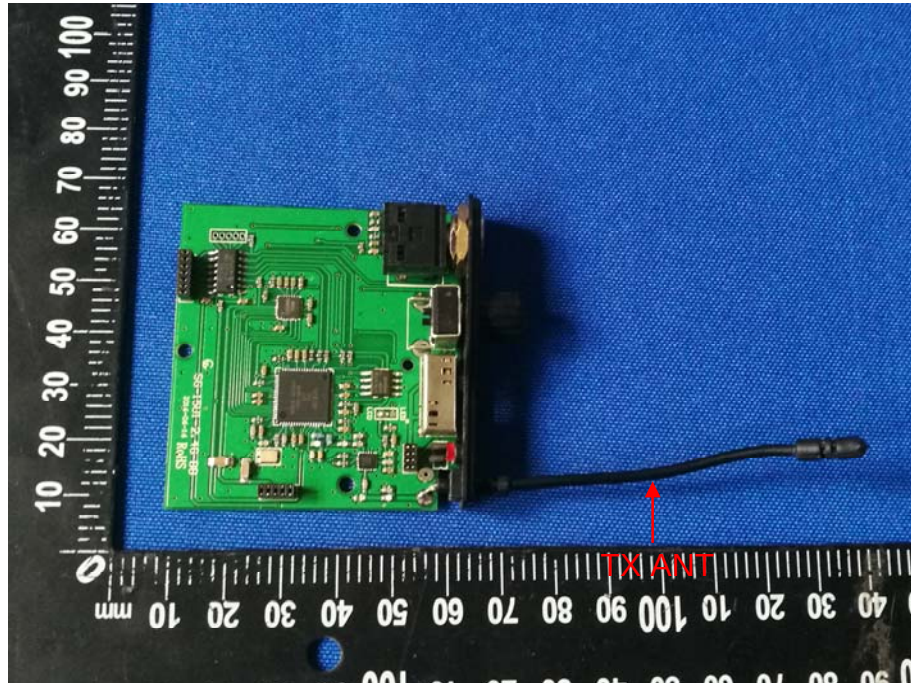



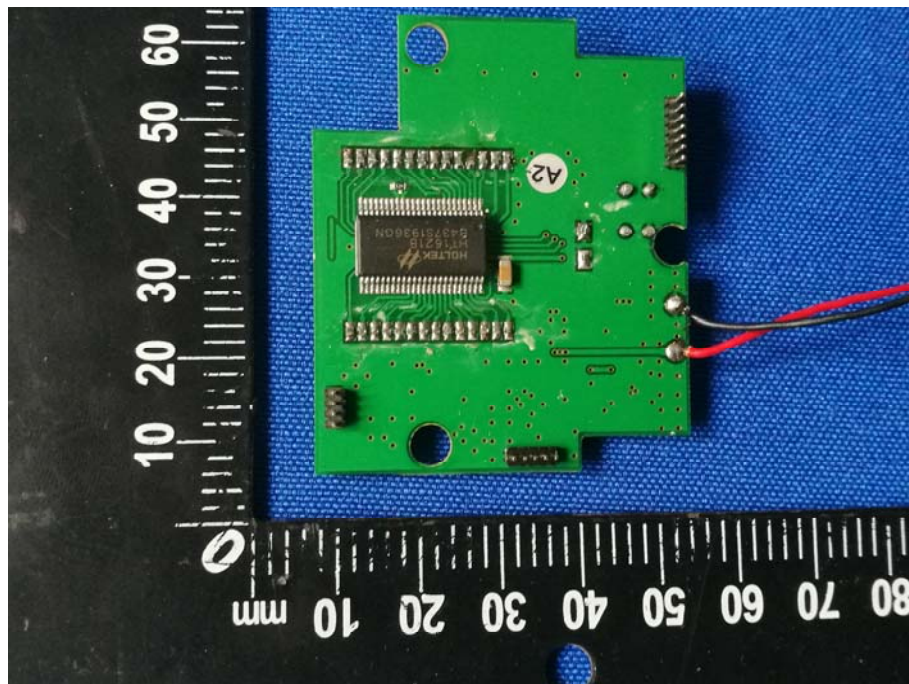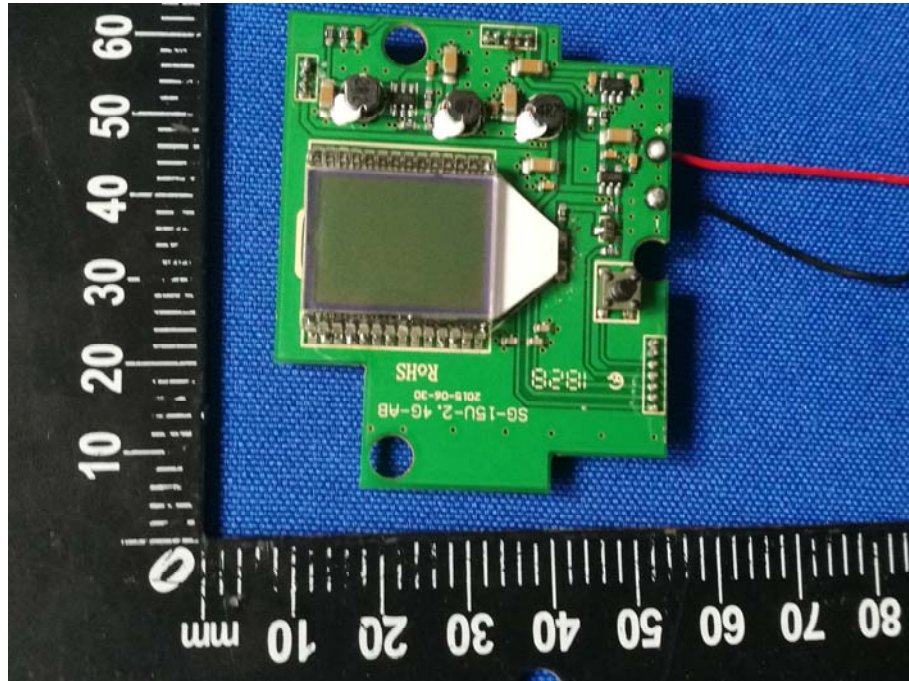

-----End-----