

FCC PART 15 SUBPART C TEST REPORT

Issued By: Dongguan New Testing Centre Co., Ltd

Add: 3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China, 523808.

A2LA Number:5426.01

Tel: 86-769-22212079

<http://www.ntc-cert.com>



Marking:

1. The test report is invalid without the official stamp of test center.
2. Nobody is allowed to photocopy or partly photocopy this test report without written permission of test center.
3. The test report is invalid without the signatures of approver, reviewer and testing engineer.
4. The test report is invalid if altered.
5. Objections to the test report must be submitted to NTC within 15 days.
6. The test report is valid for the tested samples only.
7. As for test verdict, "—" means is "no need for judgment" "N/A" means is "not applicable", "P" means "pass", "F" means "fail".

TABLE OF CONTENTS

Test Report Declare	3
1. Summary Of Test Results	4
2. General Test Information	4
2.1. Description of EUT	4
2.2. Assistant equipment used for test	6
2.3. Block diagram EUT configuration for test	6
2.4. Test environment conditions	7
2.5. Measurement uncertainty	8
3. Power Line Conducted Emission Test	9
3.1. Test equipment	9
3.2. Block diagram of test setup	9
3.3. Power line conducted emission limits (class B)	9
3.4. Test procedure	10
3.5. Test result	10
4. Radiated Emission Test	13
4.1. Test equipment	13
4.2. Block diagram of test setup	14
4.3. Limit	16
4.4. Test procedure	17
4.5. Test result	17
5. Maximum Peak Output Power	23
5.1. Applied procedures / limit	23
5.2. Test procedure	23
5.3. Deviation from standard	23
5.4. Test setup	23
5.5. Test Results	23
6. -6dB Bandwidth Test	26
6.1. Applied procedures / limit	26
6.2. Test procedure	26
6.3. Deviation from standard	26
6.4. Test setup	26
6.5. Test results	26
7. Power Spectral Density	29

7.1.	Applied procedures / limit	29
7.2.	Test procedure	29
7.3.	Deviation from standard.....	29
7.4.	Test setup	29
7.5.	Test results	29
8.	Band Edge	32
8.1.	Applied procedures / limit	32
8.2.	Test procedure	32
8.3.	Deviation from standard.....	32
8.4.	Test setup	32
8.5.	Test results	32
9.	Conducted Spurious Emissions.....	34
9.1.	Applied procedures / limit	34
9.2.	Test procedure	34
9.3.	Deviation from standard.....	34
9.4.	Test setup	34
9.5.	Test results	34
10.	Antenna Requirement	38
10.1.	Standard requirement	38
10.2.	EUT Antenna	38
11.	Test setup photograph	39
12.	Photos of the EUT	41

TEST REPORT DECLARE

FCC ID	:	2AUVL-RPP-001
Applicant	:	ESL VISION LLC
Address	:	1136 S 3600 W #400 Salt Lake City, UT 84104 United States
Equipment under Test	:	Power Pack
Model No	:	ESL-KNX-RPP-001
Trade Mark	:	ESL
Manufacturer	:	ESL VISION LLC
Address	:	1136 S 3600 W #400 Salt Lake City, UT 84104 United States

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C: 2017, ANSI C63.10:2013.

We Declare:

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	NTCER1912013		
Date of Test:	Nov.27, 2019 to Dec.06, 2019	Date of Report:	Dec.11, 2019

Prepared By:

Jeffrey Zhang

Jeffrey Zhang/Engineer

Approved By:

Neil Zhong

Neil Zhong/LAB Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

1. Summary Of Test Results

Description of Test Item	Standard	Results
Antenna Requirement	Section 15.247(c)	PASS
Conduction Emissions	Section 15.207(a)	PASS
Radiated Emissions	Section 15.247(d)	PASS
Maximum Peak Output Power	Section 15.247(b)	PASS
Band Edge Emissions	Section 15.247(d)	PASS
Power Spectral Density	Section 15.247(e)	PASS
6dB Bandwidth	Section 15.247(a)(2)	PASS
RF Exposure	Section 15.247(i)	PASS

2. General Test Information

2.1. Description of EUT

EUT* Name	:	Power Pack
Test model	:	ESL-KNX-RPP-001
EUT function description	:	Please reference user manual of this device
Power supply	:	AC 120-277V 50/60Hz
Trade mark	:	ESL
Operation frequency	:	2402-2480MHz
Number of channel	:	40
Modulation Technology	:	GFSK
Bluetooth version	:	4.1
H/W No.	:	SS2019021602
S/W No.	:	V1.0
Antenna Type	:	PCB antenna
Antenna Gain	:	0 dBi


Note: 1,EUT is the ab. of equipment under test.

Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	27	2456
01	2404	15	2432	28	2458
02	2406	16	2434	29	2460
03	2408	17	2436	30	2462
04	2410	18	2438	31	2464
05	2412	19	2440	32	2466
06	2414	20	2442	33	2468
07	2416	21	2444	34	2470
08	2418	22	2446	35	2472
09	2420	23	2448	36	2474
10	2422	24	2450	37	2476
11	2424	25	2452	38	2478
12	2426	26	2454	39	2480
13	2428	14	2430		

2.2. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	Other
Laptop	Lenovo	ThinkPad E450	FCC SDOC	/

2.3. Block diagram EUT configuration for test

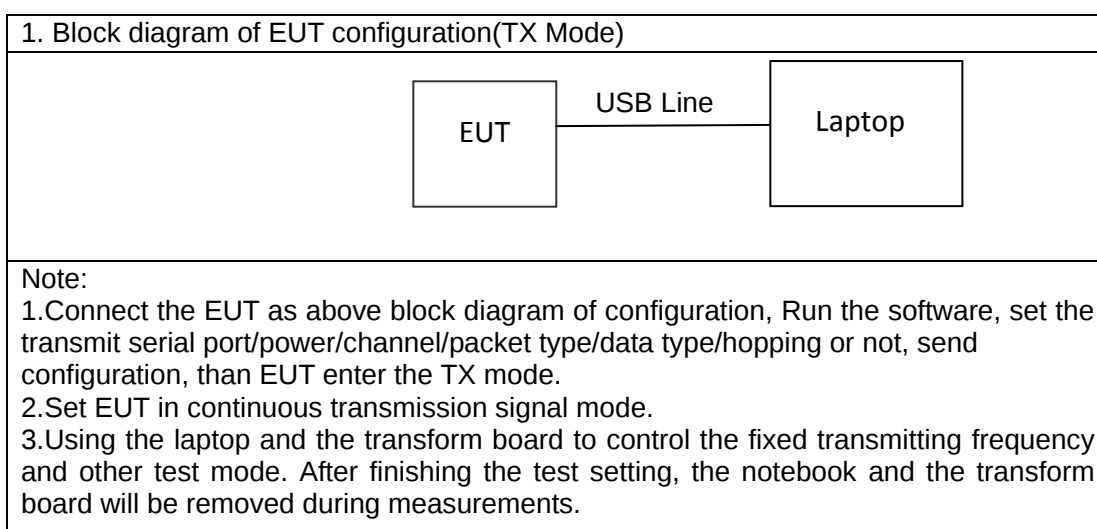

2.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

(1) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(2) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

(3) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.

(4) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2440 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode,

The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

2.5. Measurement uncertainty

Test Item	Uncertainty
Uncertainty For Conduction Emission Test	2.44dB
Uncertainty For Radiation Emission Test (30MHz – 1GHz)	3.14 dB (Polarize: V)
	3.16 dB (Polarize: H)
Uncertainty For Radiation Emission Test (1GHz – 18GHz)	4.27 dB (Polarize: V)
	4.51 dB (Polarize: H)
Uncertainty For Conducted RF Power	0.63dB
Stop Transmitting Time Test	±0.5%
Uncertainty For Frequency Error	5.8 x 10 ⁻⁸


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Power Line Conducted Emission Test

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESCS30	8341151006	2019-05-23	1 Year
2	LISN	R&S	ENV216	3650.6550.06	2019-05-13	1 Year
3	Pulse Limiter	R&S	ESH3-Z2	0357-8810.54	2019-05-13	1 Year
4	RF Cable	HUBER	SUCOFLEX100	30722/4E	2019-05-13	1 Year
5	MEASUREMENT SOFTWARE	FARAD	EZ-EMC(VER:1.1.4.2)	N/A	N/A	N/A

3.2. Block diagram of test setup

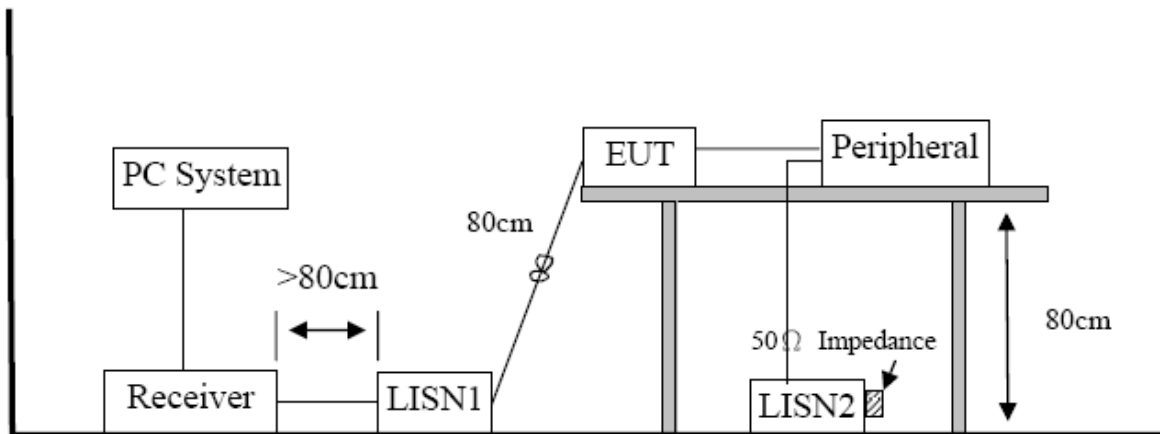

3.3. Power line conducted emission limits (class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

3.4. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

3.5. Test result


PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "-----" means Peak detection; "-----" means Average detection


Note3: Measurement = Reading Level + Factor, Margin= Measurement-Limit

Conducted Emission Test Result

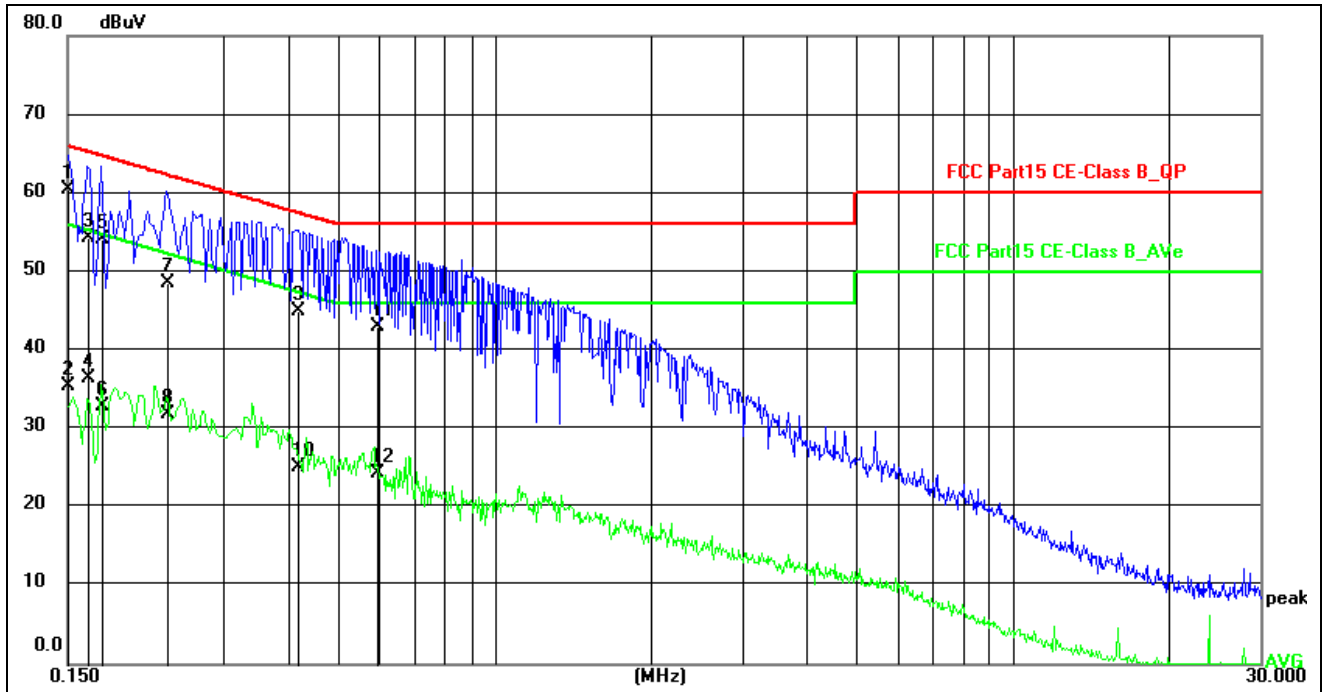

Site:	844 LAB	Phase:	L1	Temperature(C):	24(C)
Limit:	FCC Part15 CE-Class B_QP	Test Time:	2019/12/6 11:51:53	Humidity(%):	63%
EUT:	Power Pack	Power Rating:	AC120/60Hz		
M/N.:	ESL-KNX-RPP-001	Test Engineer:			
Mode:	Tx Mode				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1 *	0.1500	50.82	9.65	60.47	66.00	-5.53	QP	
2	0.1500	25.71	9.65	35.36	56.00	-20.64	AVG	
3	0.1633	44.70	9.66	54.36	65.29	-10.93	QP	
4	0.1633	26.80	9.66	36.46	55.29	-18.83	AVG	
5	0.1740	44.38	9.66	54.04	64.77	-10.73	QP	
6	0.1740	23.19	9.66	32.85	54.77	-21.92	AVG	
7	0.2340	38.77	9.68	48.45	62.31	-13.86	QP	
8	0.2340	22.28	9.68	31.96	52.31	-20.35	AVG	
9	0.4180	35.15	9.73	44.88	57.49	-12.61	QP	
10	0.4180	15.30	9.73	25.03	47.49	-22.46	AVG	
11	0.5940	33.26	9.77	43.03	56.00	-12.97	QP	
12	0.5940	14.55	9.77	24.32	46.00	-21.68	AVG	

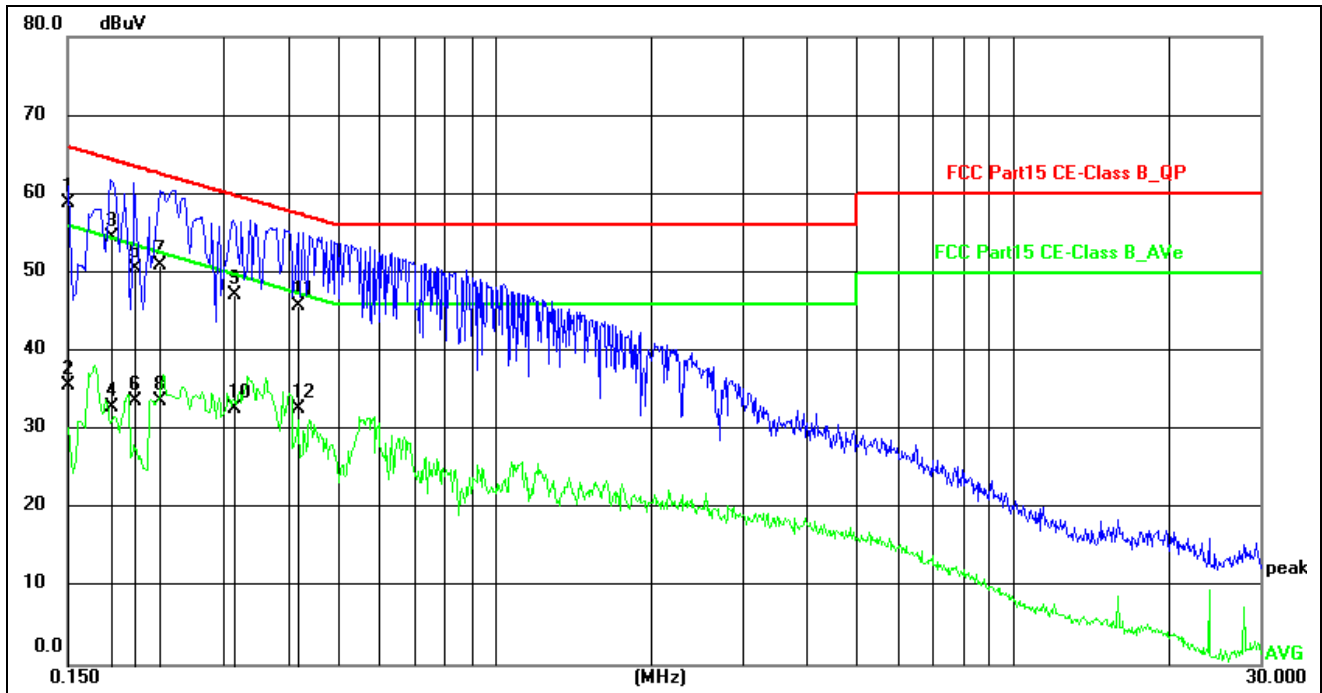

Site:	844 LAB	Phase:	N	Temperature(C):	24(C)
Limit:	FCC Part15 CE-Class B_QP	Test Time:		Humidity(%):	63%
EUT:	Power Pack	Power Rating:		AC120/60Hz	
M/N.:	ESL-KNX-RPP-001	Test Engineer:			
Mode:	Tx mode				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1 *	0.1500	49.17	9.61	58.78	66.00	-7.22	QP	
2	0.1500	26.01	9.61	35.62	56.00	-20.38	AVG	
3	0.1819	44.77	9.63	54.40	64.40	-10.00	QP	
4	0.1819	23.23	9.63	32.86	54.40	-21.54	AVG	
5	0.2020	40.96	9.64	50.60	63.53	-12.93	QP	
6	0.2020	24.04	9.64	33.68	53.53	-19.85	AVG	
7	0.2260	41.18	9.65	50.83	62.60	-11.77	QP	
8	0.2260	23.96	9.65	33.61	52.60	-18.99	AVG	
9	0.3140	37.49	9.65	47.14	59.86	-12.72	QP	
10	0.3140	23.09	9.65	32.74	49.86	-17.12	AVG	
11	0.4180	36.20	9.65	45.85	57.49	-11.64	QP	
12	0.4180	23.09	9.65	32.74	47.49	-14.75	AVG	


4. Radiated Emission Test

4.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R&S	ESR	7250-30406 7528	2019-04-30	1Year
2	Trilog Broadband Antenna	Schwarzbeck	VULB9168	00969	2019-06-14	2 Year
3	Pre-amplifier	R&S	8447F	3113A04553	2019-05-13	1Year
4	Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2019-05-23	1Year
5	Horn antenna	Schwarzbeck	BBHA9120D	453	2019-05-23	2Year
6	Double Ridged Horn Antenna	A.H. System	SAS-574	584	2019-05-23	1Year
7	Pre-amplifier	R&S	SCU18	105326	2019-05-23	1Year
8	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 3	2019-05-23	1Year
9	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 4	2019/5/14	1Year
10	RF Cable	ESCO	ETS-LINGR EN	RFC-SMS-1 00-SMS-340 -IN	2019-05-23	1Year
11	Measurement software	Farad	EZ-EMC(VE R:1.1.4.2)	N/A	N/A	N/A

4.2. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz to 30MHz:

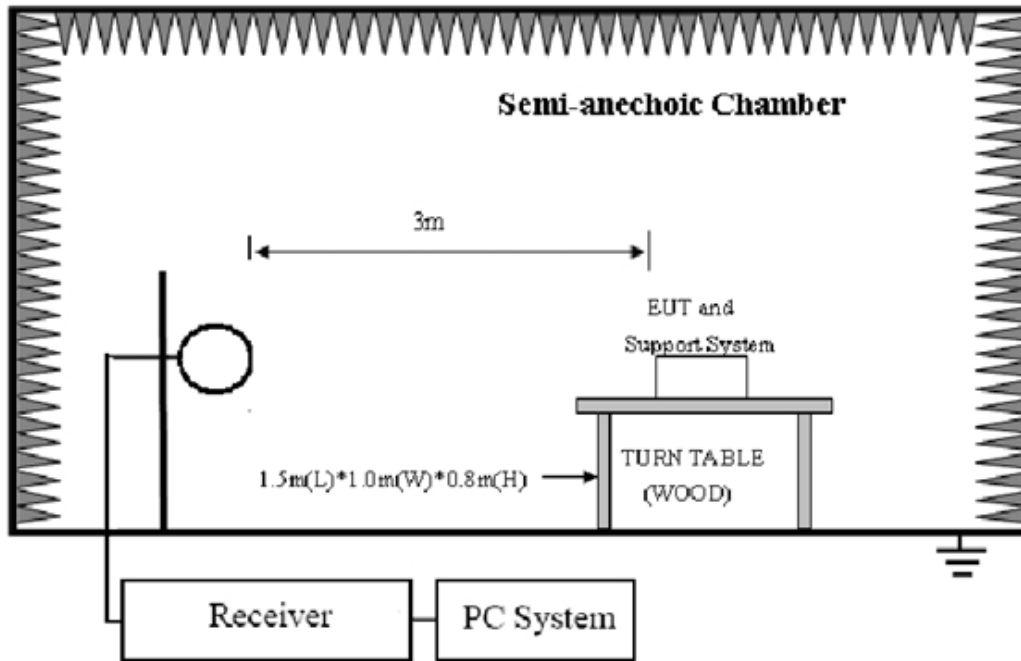

In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz:

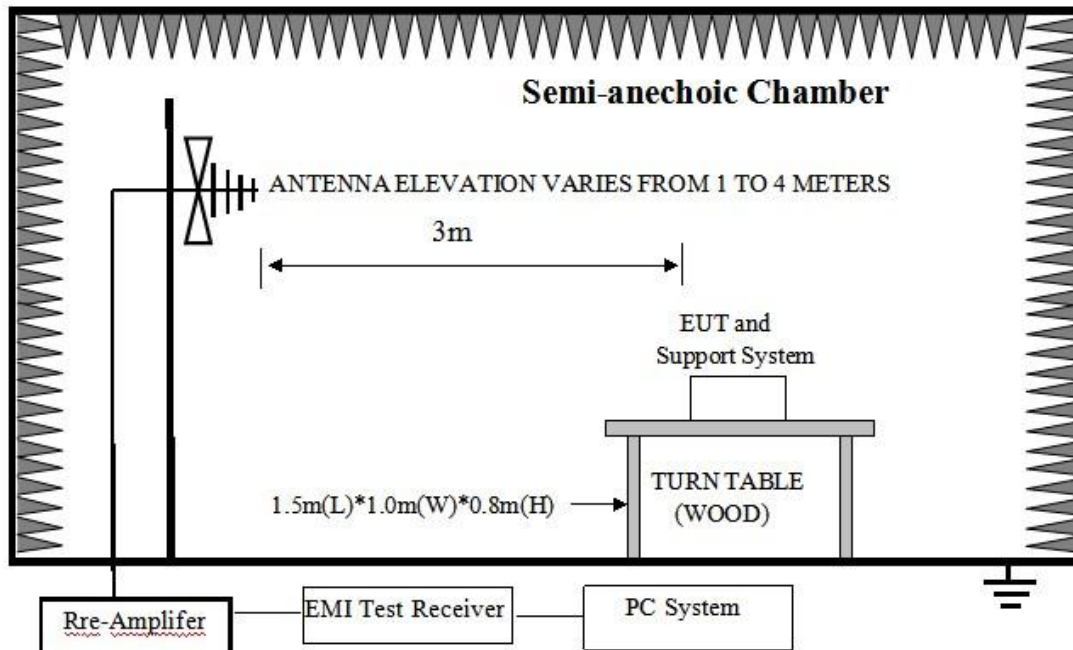

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz:

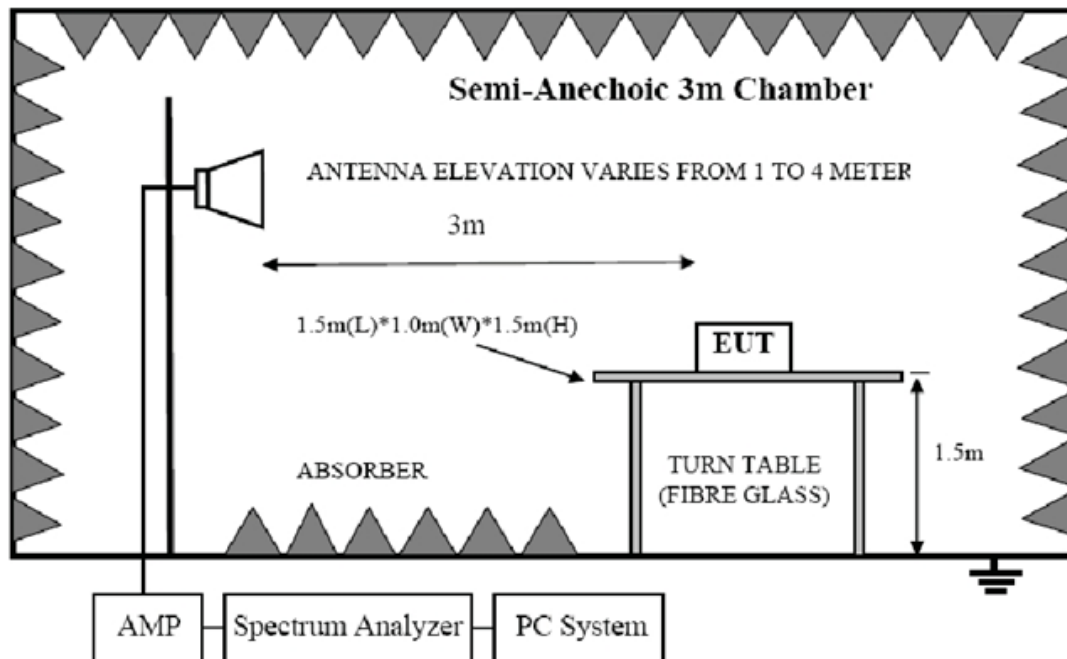

4.3. Limit

FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

FCC 15.109 Limit

Frequency (MHz)	Distance (Meters)	Field Strengths Limits dB(μV)/m
30--88	3	40.0
88--216	3	43.5
216--960	3	46.0
960--1000	3	54.0
Above 1GHz	3	Peak: 74.0
	3	Average: 54.0

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(3) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(4) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30m}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30m/3m)$$

(5) All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.109, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.109 limits.

4.4. Test procedure

Procedure of Preliminary Test

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 4.2 of this report.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

EUT height should be 0.8m for below 1GHz and 1.5m for above 1GHz at ground with absorbers.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 18GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The X, Y, Z three axial are tested and the report only the worst case.

The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW:

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure.

4.5. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9 KHz to 40GHz were comply with FCC PART 15.109 limits limit.


Note1: According exploratory test no any obvious emission were detected from 9KHz to 30MHz and

18GHz to 40GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


Note3: Level = Reading Level + Factor, Margin= Level-Limit

Radiated Emission Test Result

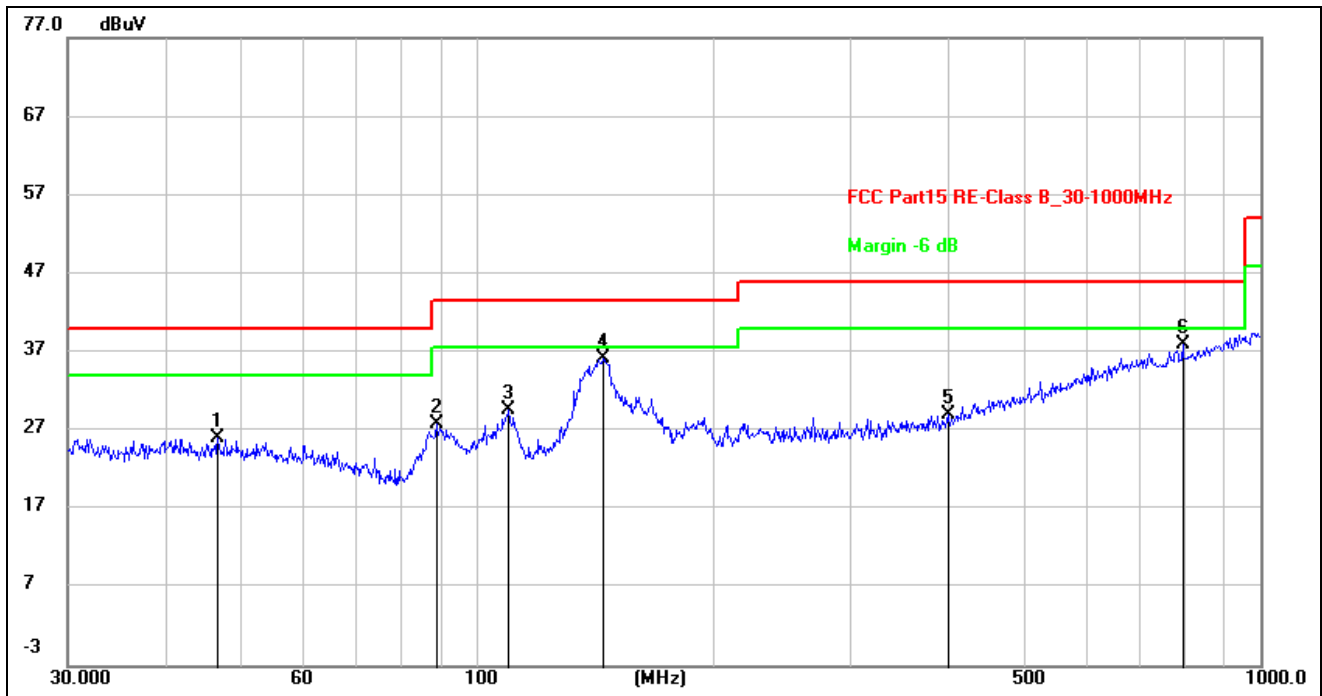

Site:	966 LAB	Antenna::Horizontal	Temperature(C):24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz		Humidity(%):60%
EUT:	Power Pack	Test Time:	2019/11/27 11:41:04
M/N.:	ESL-KNX-RPP-001	Power Rating:	AC 120V/60Hz
Mode:	Tx Mode	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	46.6663	11.77	14.40	26.17	40.00	-13.83	peak	200	37	
2	88.6524	17.34	10.46	27.80	43.50	-15.70	peak	200	340	
3	109.7959	17.35	12.25	29.60	43.50	-13.90	peak	200	355	
4 *	144.8417	21.13	15.09	36.22	43.50	-7.28	peak	200	320	
5	399.0302	12.29	16.73	29.02	46.00	-16.98	peak	100	29	
6	796.1829	14.27	23.69	37.96	46.00	-8.04	peak	100	121	

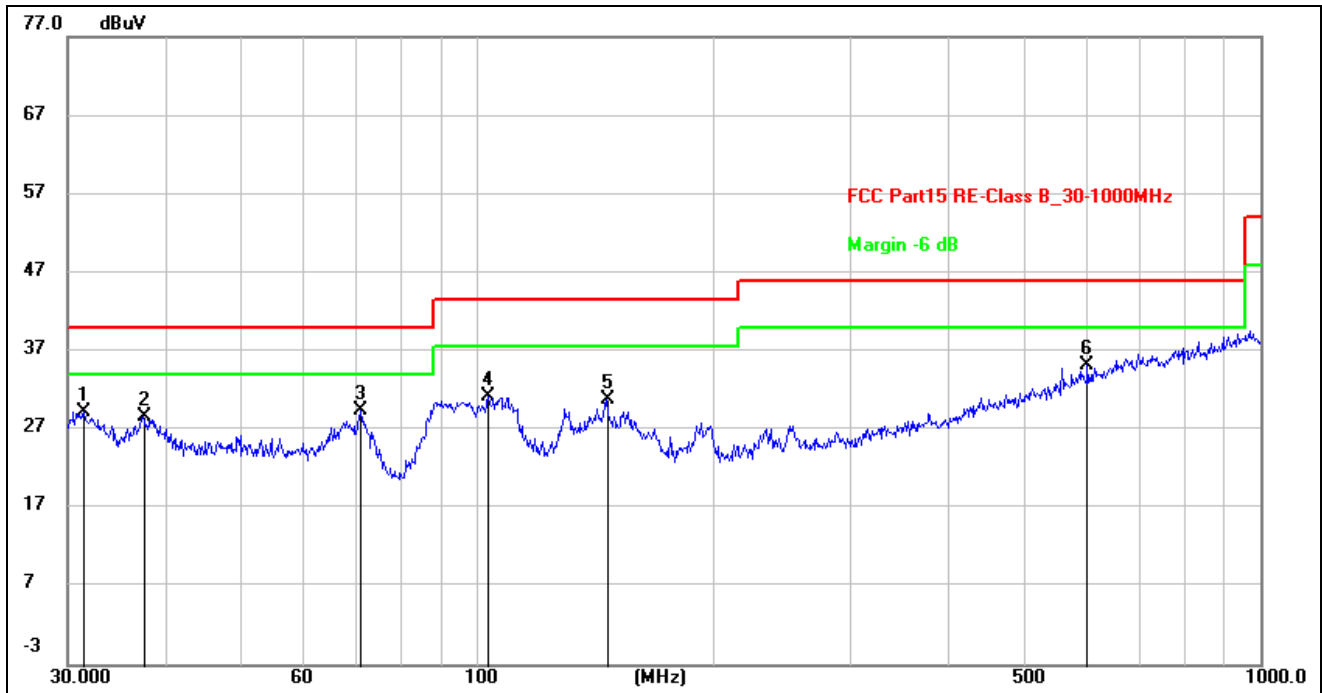

Site:	966 LAB	Antenna::Vertical	Temperature(C):24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz	Test Time:	Humidity(%):60%
EUT:	Power Pack	Power Rating:	2019/11/27 11:43:38
M/N.:	ESL-KNX-RPP-001		AC 120V/60Hz
Mode:	Tx mode		
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	31.5095	15.33	13.99	29.32	40.00	-10.68	peak	100	356	
2	37.4165	14.17	14.47	28.64	40.00	-11.36	peak	200	3	
3 *	71.0803	17.77	11.60	29.37	40.00	-10.63	peak	100	269	
4	103.4421	19.60	11.60	31.20	43.50	-12.30	peak	100	254	
5	146.3735	15.66	15.20	30.86	43.50	-12.64	peak	100	128	
6	601.4265	14.25	20.92	35.17	46.00	-10.83	peak	200	3	

EUT:	Power Pack	Model Name :	ESL-KNX-RPP-001
Temperature:	25 °C	Test Engineer	Jack
Pressure:	1010 hPa	Relative Humidity:	61%
Test Mode :	Tx mode (2402MHz)	Test Voltage :	AC 120V, 60Hz
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average, PK detector is for them all.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2390.00	46.06	4.68	50.74	74.00	-23.26	peak
2390.00	41.10	4.68	45.78	54.00	-8.22	AVG
2400.00	49.68	4.71	54.39	74.00	-19.61	peak
2400.00	40.12	4.71	44.83	54.00	-9.17	AVG
4804.00	46.51	5.06	51.57	74.00	-22.43	peak
4804.00	40.54	5.06	45.60	54.00	-8.40	AVG
7206.00	50.03	7.03	57.06	74.00	-16.94	peak
7206.00	32.47	7.03	39.50	54.00	-14.50	AVG

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2390.00	54.18	4.68	58.86	74.00	-15.14	peak
2390.00	30.68	4.68	35.36	54.00	-18.64	AVG
2400.00	50.19	4.71	54.90	74.00	-19.10	peak
2400.00	39.99	4.71	44.70	54.00	-9.30	AVG
4804.00	55.41	5.06	60.47	74.00	-13.53	peak
4804.00	36.27	5.06	41.33	54.00	-12.67	AVG
7206.00	46.87	7.03	53.90	74.00	-20.10	peak
7206.00	33.29	7.03	40.32	54.00	-13.68	AVG

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Lowest Channel: 2402 MHz

Data rate: 1Mbps

EUT:	Power Pack	Model Name :	ESL-KNX-RPP-001
Temperature:	25 °C	Test Engineer	Jack
Pressure:	1010 hPa	Relative Humidity:	61%
Test Mode :	Tx mode (2440MHz)	Test Voltage :	AC 120V, 60Hz
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average, PK detector is for them all.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
4880.00	47.70	5.14	52.84	74.00	-21.16	peak
4880.00	40.90	5.14	46.04	54.00	-7.96	AVG
7323.00	43.76	7.54	51.30	74.00	-22.70	peak
7323.00	33.68	7.54	41.22	54.00	-12.78	AVG

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
4880.00	48.40	5.14	53.54	74.00	-20.46	peak
4880.00	36.11	5.14	41.25	54.00	-12.75	AVG
7323.00	44.63	7.54	52.17	74.00	-21.83	peak
7323.00	33.03	7.54	40.57	54.00	-13.43	AVG

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Middle Channel: 2440 MHz

Data rate: 1Mbps

EUT:	Power Pack	Model Name :	ESL-KNX-RPP-001
Temperature:	25 °C	Test Engineer	Jack
Pressure:	1010 hPa	Relative Humidity:	61%
Test Mode :	Tx mode (2480MHz)	Test Voltage :	AC 120V, 60Hz
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average, PK detector is for them all.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2483.50	52.11	4.71	56.82	74.00	-17.18	peak
2483.50	39.27	4.71	43.98	54.00	-10.02	AVG
4960.00	48.97	5.22	54.19	74.00	-19.81	peak
4960.00	36.88	5.22	42.10	54.00	-11.90	AVG
7440.00	40.05	8.06	48.11	74.00	-25.89	peak
7440.00	30.92	8.06	38.98	54.00	-15.02	AVG

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector Type
2483.50	51.49	4.71	56.20	74.00	-17.80	peak
2483.50	42.18	4.71	46.89	54.00	-7.11	AVG
4960.00	46.26	5.22	51.48	74.00	-22.52	peak
4960.00	40.20	5.22	45.42	54.00	-8.58	AVG
7440.00	48.92	8.06	56.98	74.00	-17.02	peak
7440.00	31.96	8.06	40.02	54.00	-13.98	AVG

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

Highest channel: 2480 MHz

Data rate: 1Mbps

5. Maximum Peak Output Power

5.1. Applied procedures / limit

15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2. Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured, VBW $\geq$ RBW, Sweep = auto
Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. Also shall be performed at different modes of operation.

5.3. Deviation from standard

No deviation.


5.4. Test setup




5.5. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant 1	-4.03	30	Pass
NVNT	BLE	2440	Ant 1	-2.676	30	Pass
NVNT	BLE	2480	Ant 1	-2.298	30	Pass


Power NVNT BLE 2402MHz Ant1

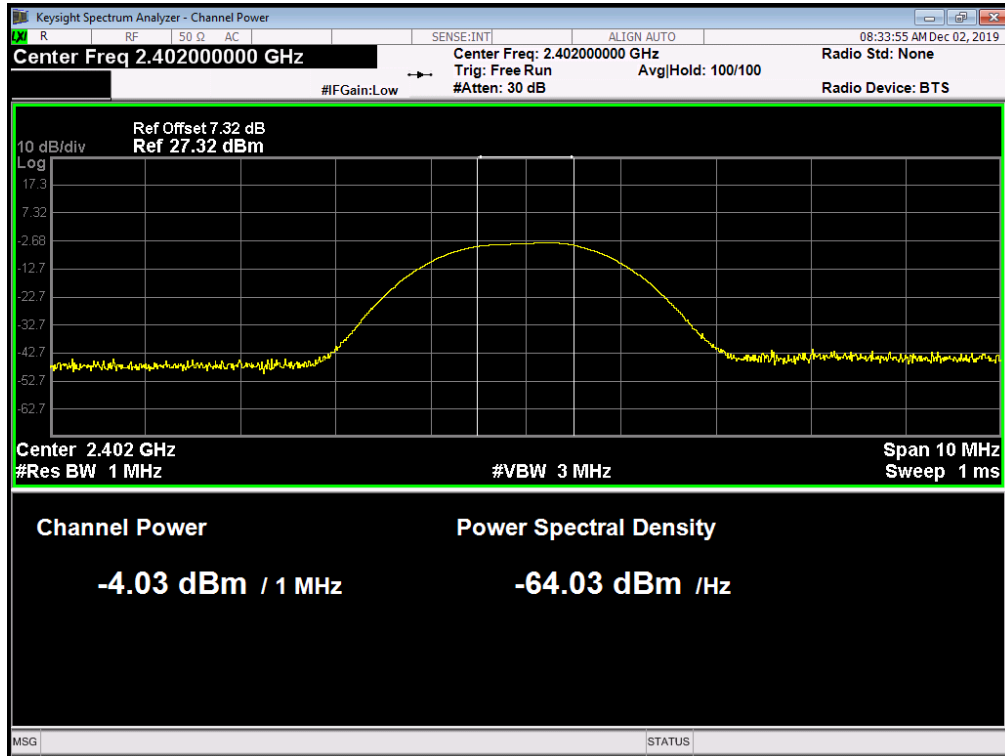

Power NVNT BLE 2440MHz Ant1

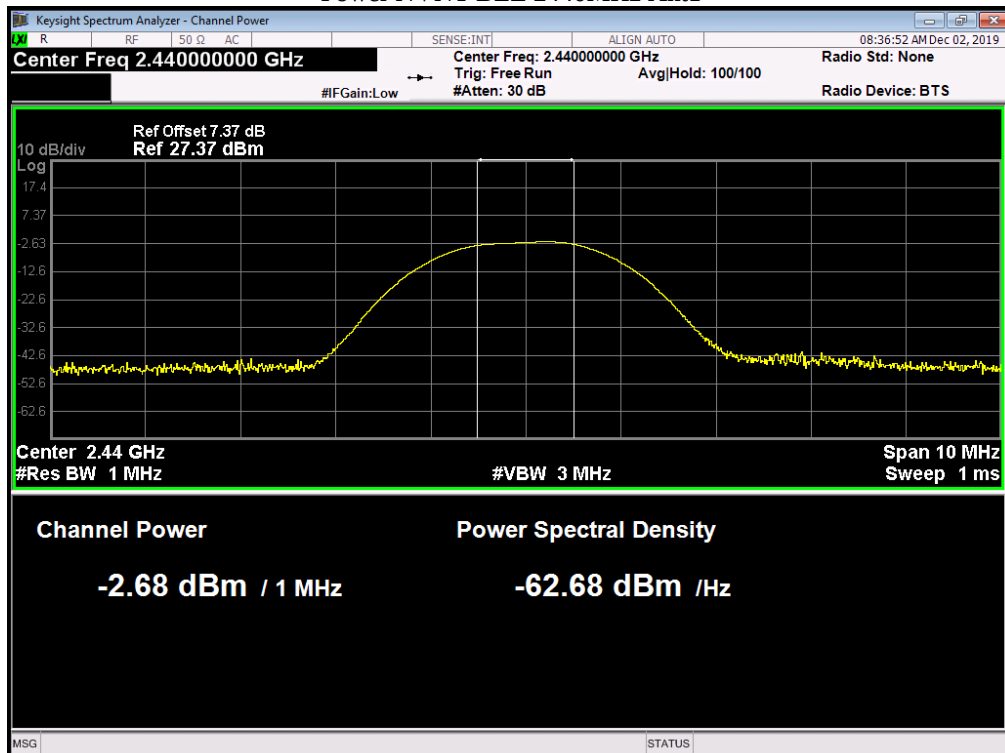

Power NVNT BLE 2480MHz Ant1

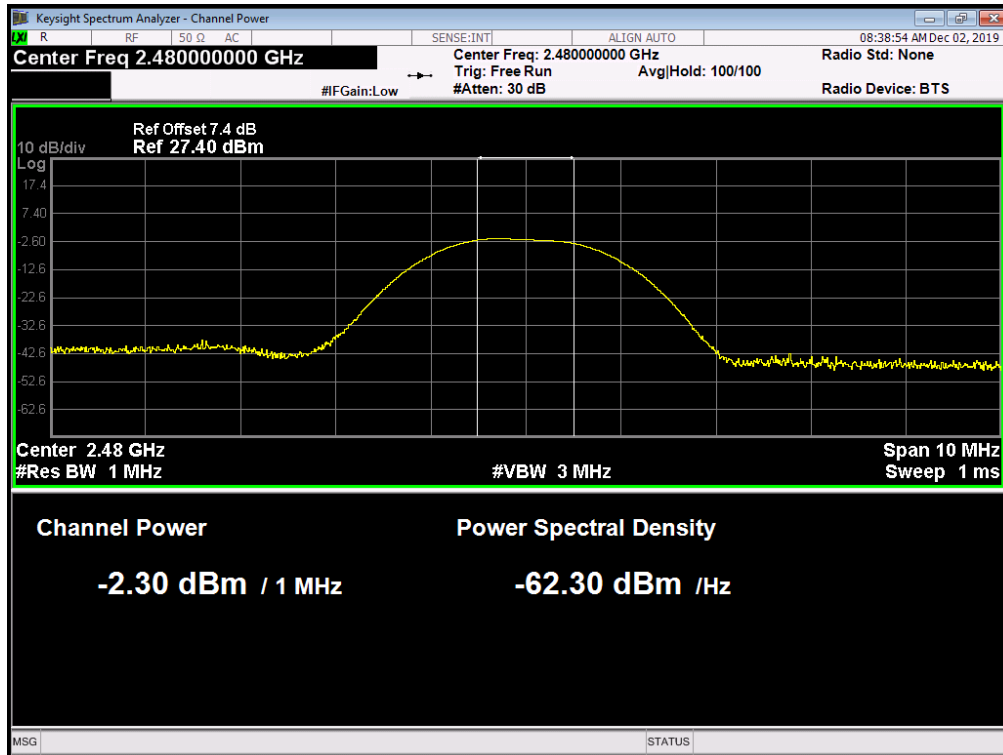

6. -6dB Bandwidth Test

6.1. Applied procedures / limit

Systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5 MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


6.2. Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW, Sweep = auto, Detector function = peak
Trace = max hold

6.3. Deviation from standard

No deviation.


6.4. Test setup

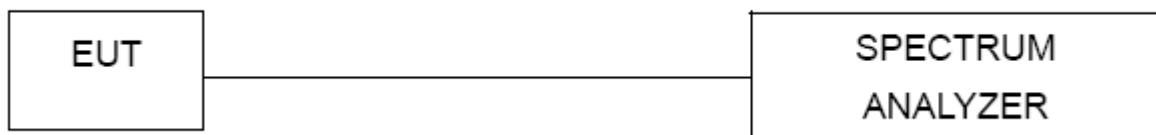


6.5. Test results

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant 1	1.0472	0.6273	0.5	Pass
NVNT	BLE	2440	Ant 1	1.0396	0.6269	0.5	Pass
NVNT	BLE	2480	Ant 1	1.0405	0.6745	0.5	Pass


OBW NVNT BLE 2402MHz Ant1

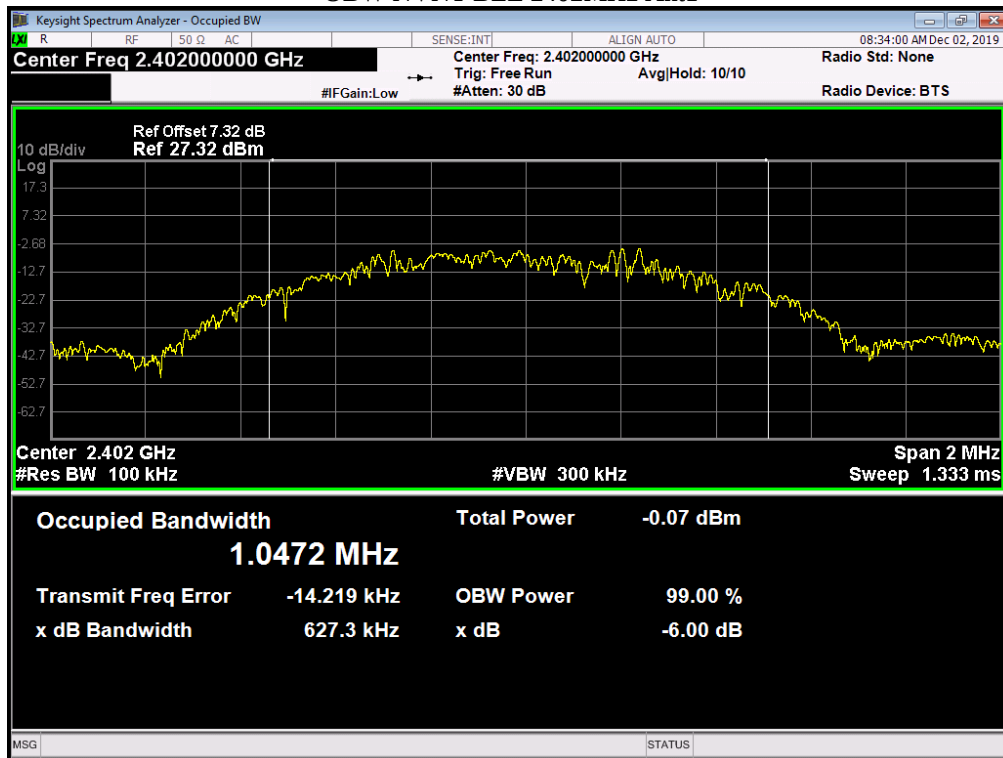

OBW NVNT BLE 2440MHz Ant1

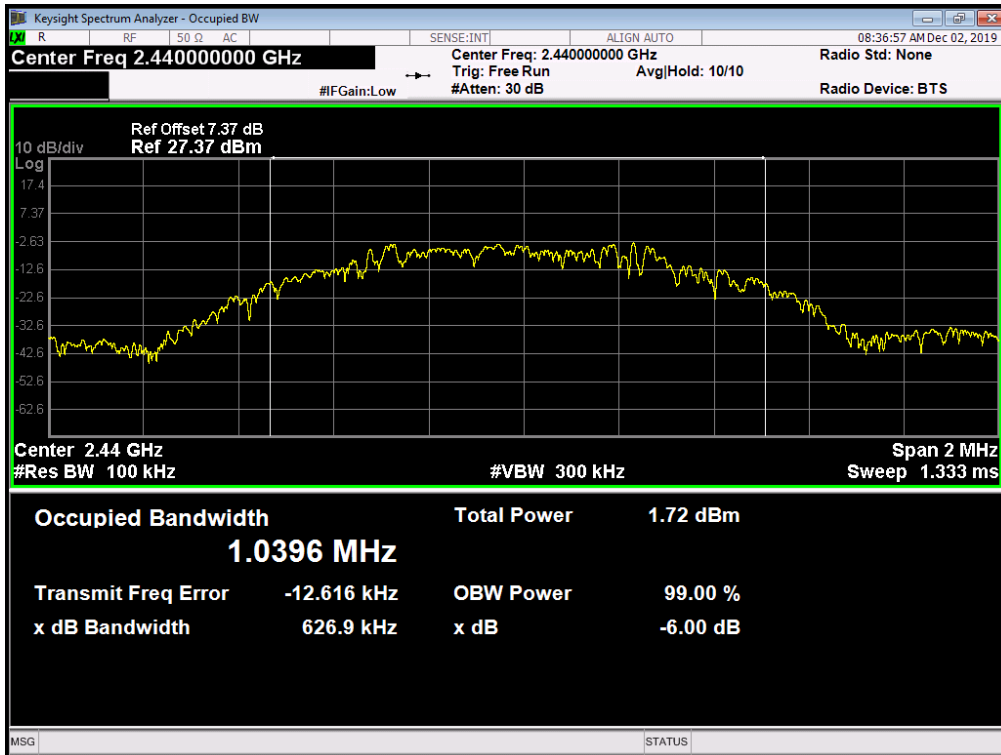

OBW NVNT BLE 2480MHz Ant1

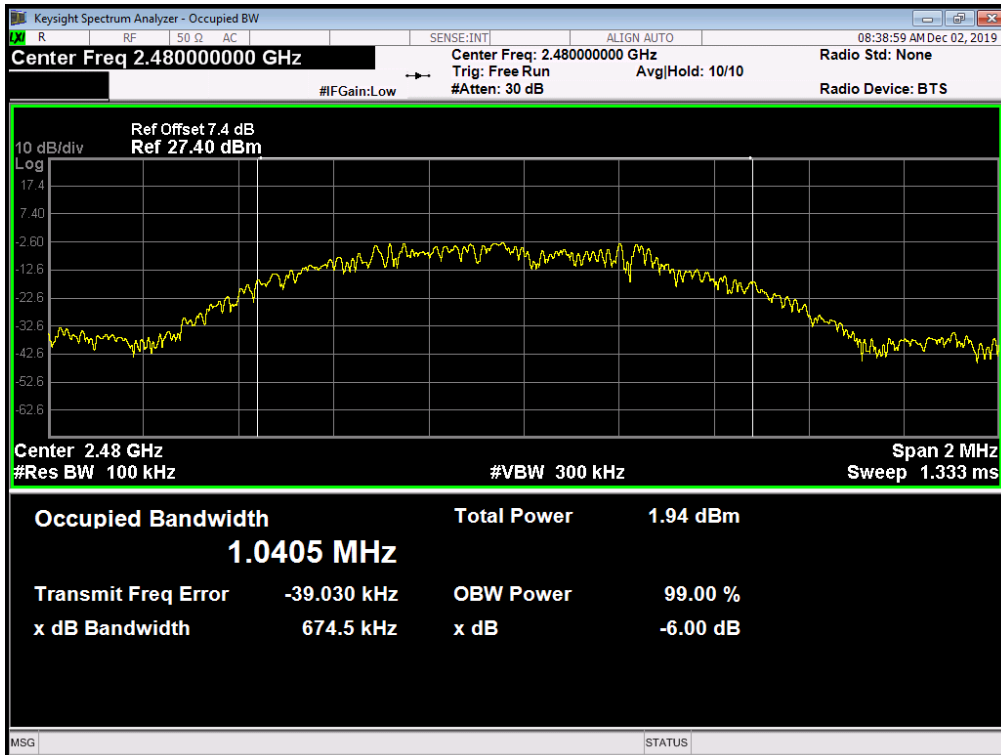

7. Power Spectral Density

7.1. Applied procedures / limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


7.2. Test procedure

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz , VBW= 10KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

7.3. Deviation from standard

No deviation.


7.4. Test setup

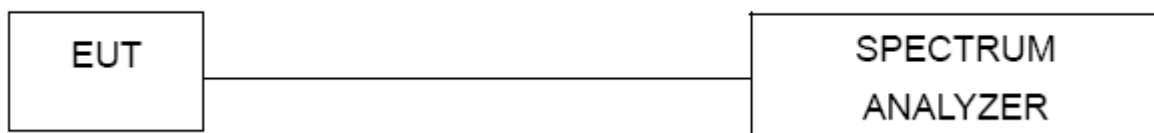


7.5. Test results

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant 1	-19.304	8	Pass
NVNT	BLE	2440	Ant 1	-18.077	8	Pass
NVNT	BLE	2480	Ant 1	-17.597	8	Pass


PSD NVNT BLE 2402MHz Ant1

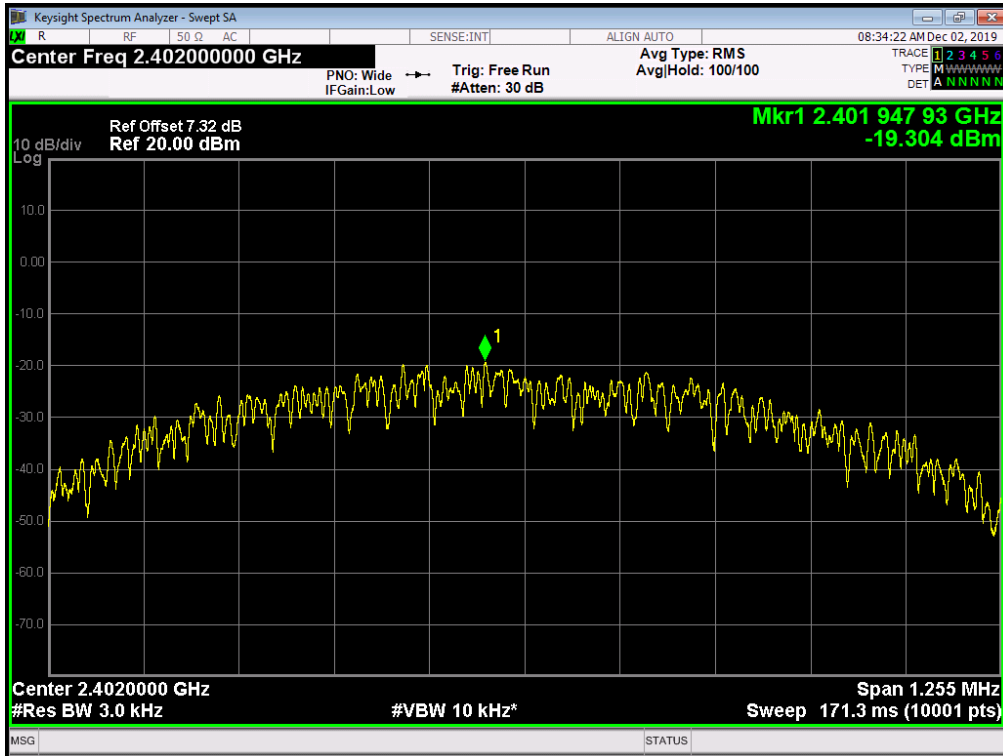

PSD NVNT BLE 2440MHz Ant1

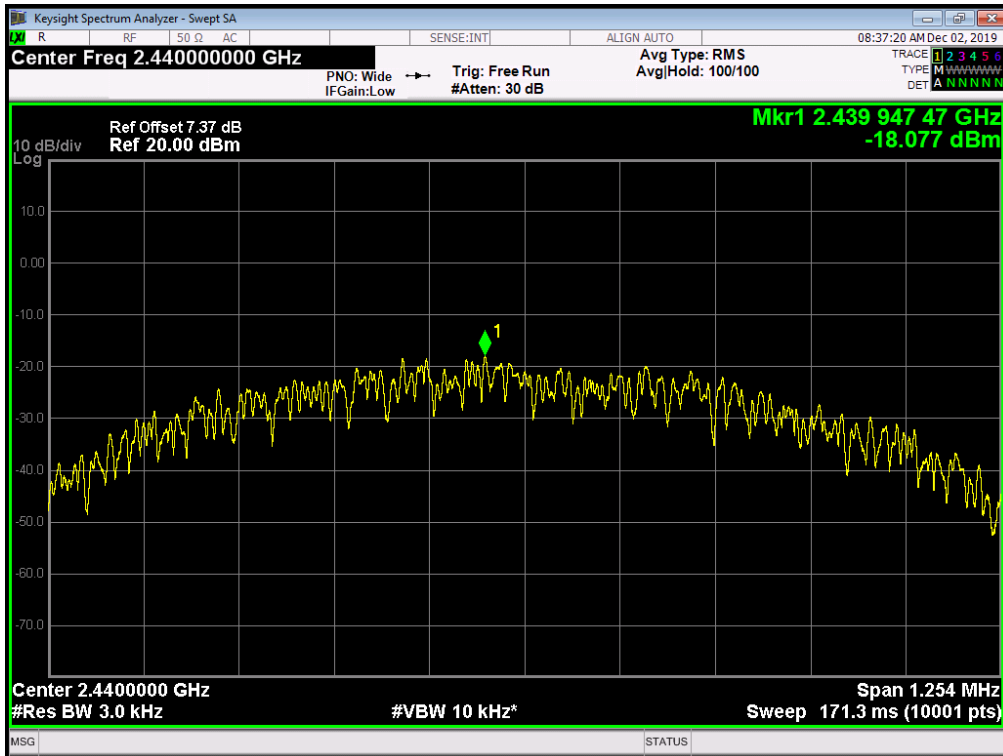

PSD NVNT BLE 2480MHz Ant1

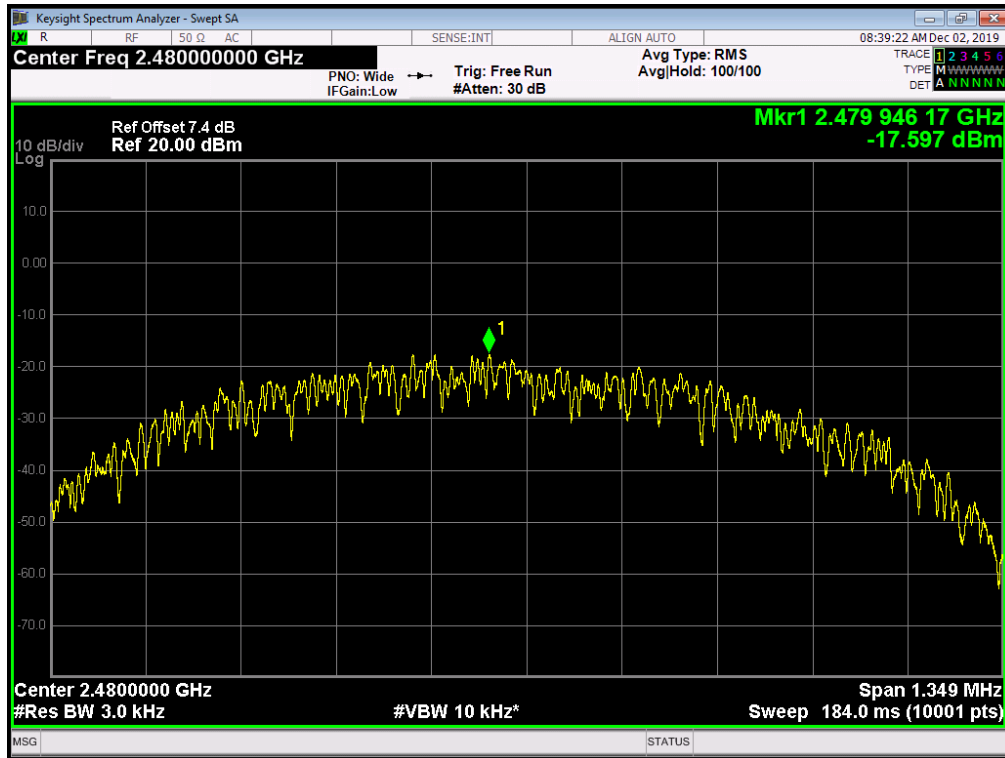

8. Band Edge

8.1. Applied procedures / limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


8.2. Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation, RBW $\geq$ 1% of the span, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold

8.3. Deviation from standard

No deviation.


8.4. Test setup

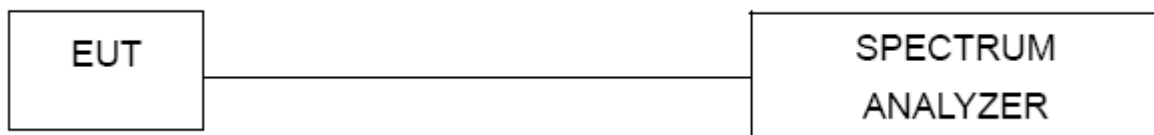


8.5. Test results

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-54.326	-20	Pass
NVNT	BLE	2480	Ant 1	-48.492	-20	Pass

Band Edge NVNT BLE 2402MHz Ant1 Emission

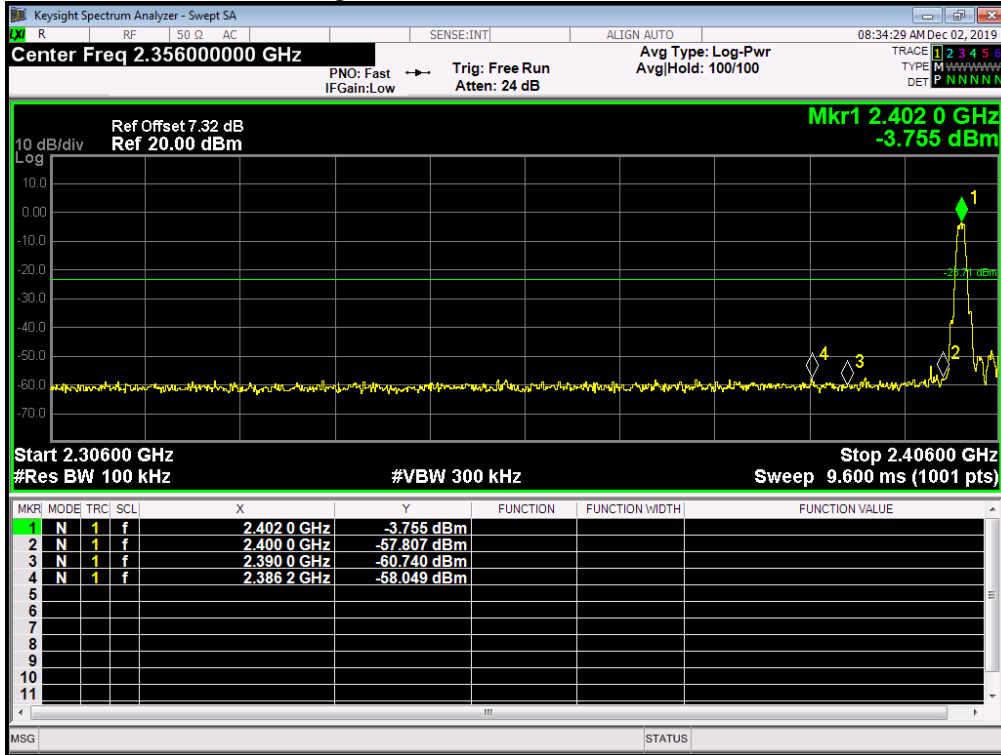

Band Edge NVNT BLE 2480MHz Ant1 Emission

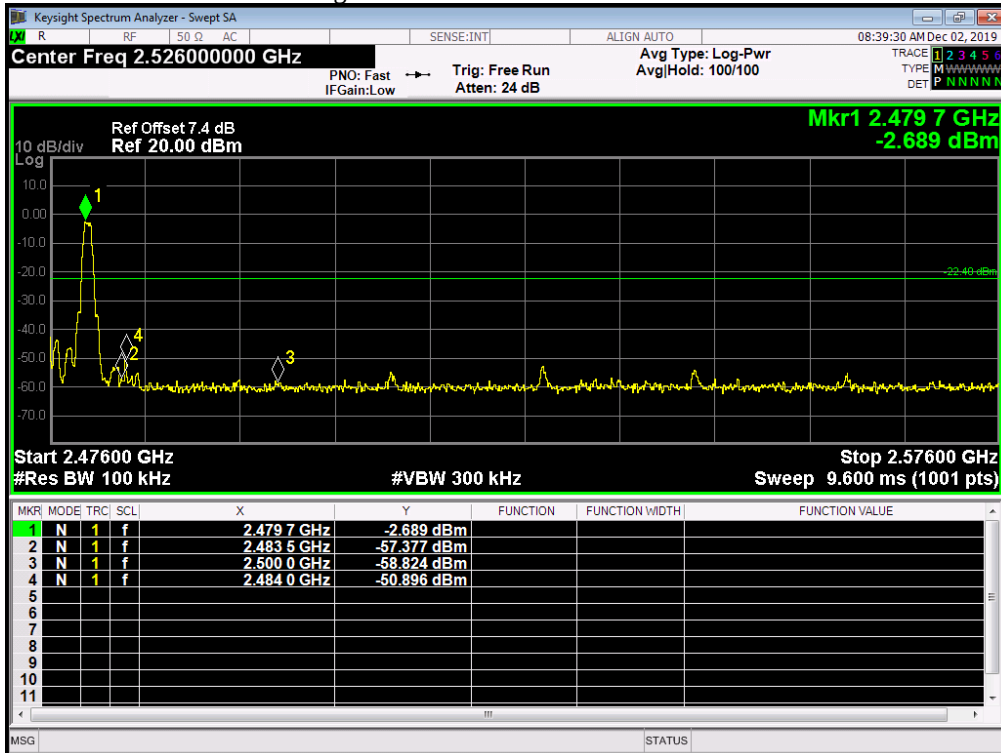

9. Conducted Spurious Emissions

9.1. Applied procedures / limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.2. Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span. RBW = 100 kHz
VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold
sweep points $\geq$ investigated frequency range/RBW.

9.3. Deviation from standard

No deviation.


9.4. Test setup




9.5. Test results

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant 1	-35.951	-20	Pass
NVNT	BLE	2440	Ant 1	-38.144	-20	Pass
NVNT	BLE	2480	Ant 1	-37.569	-20	Pass


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

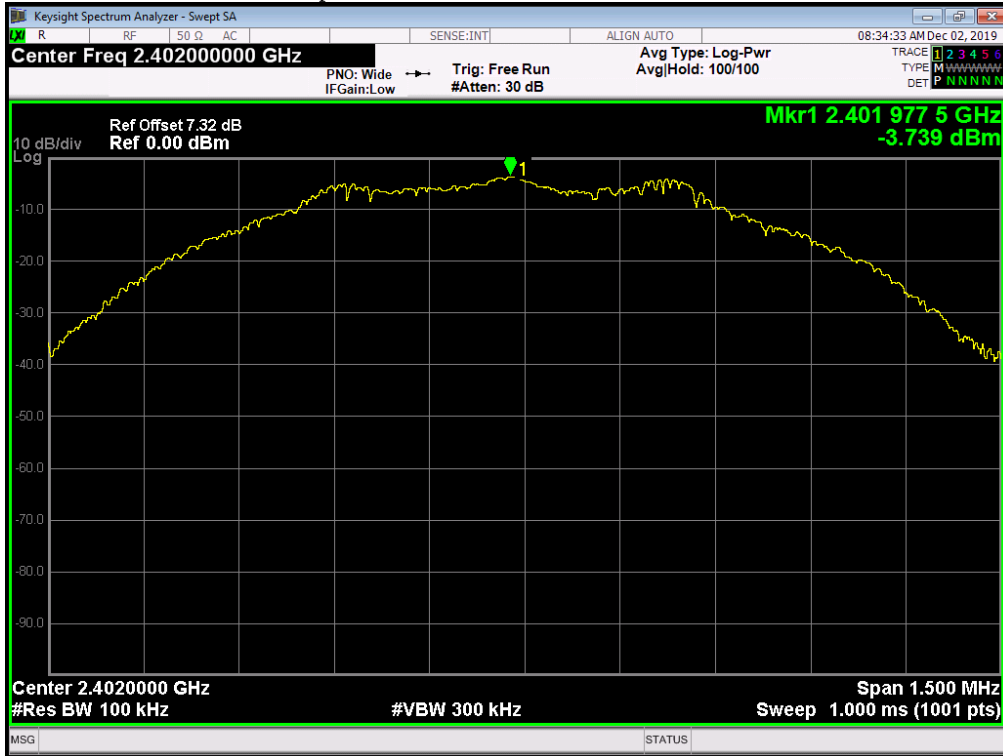


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

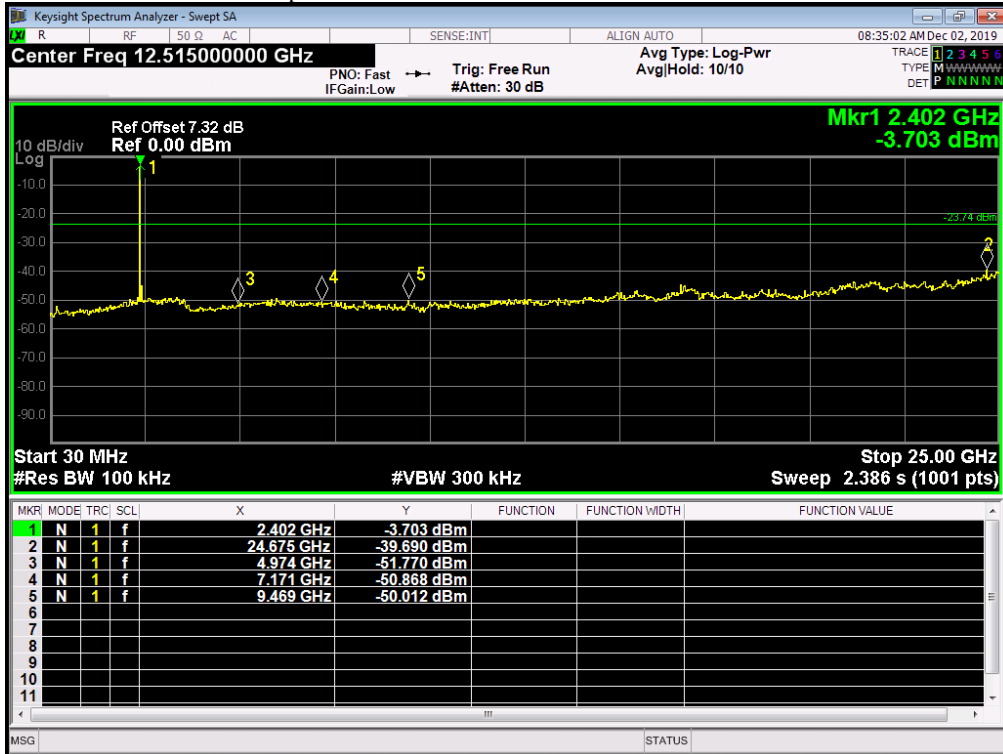


Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

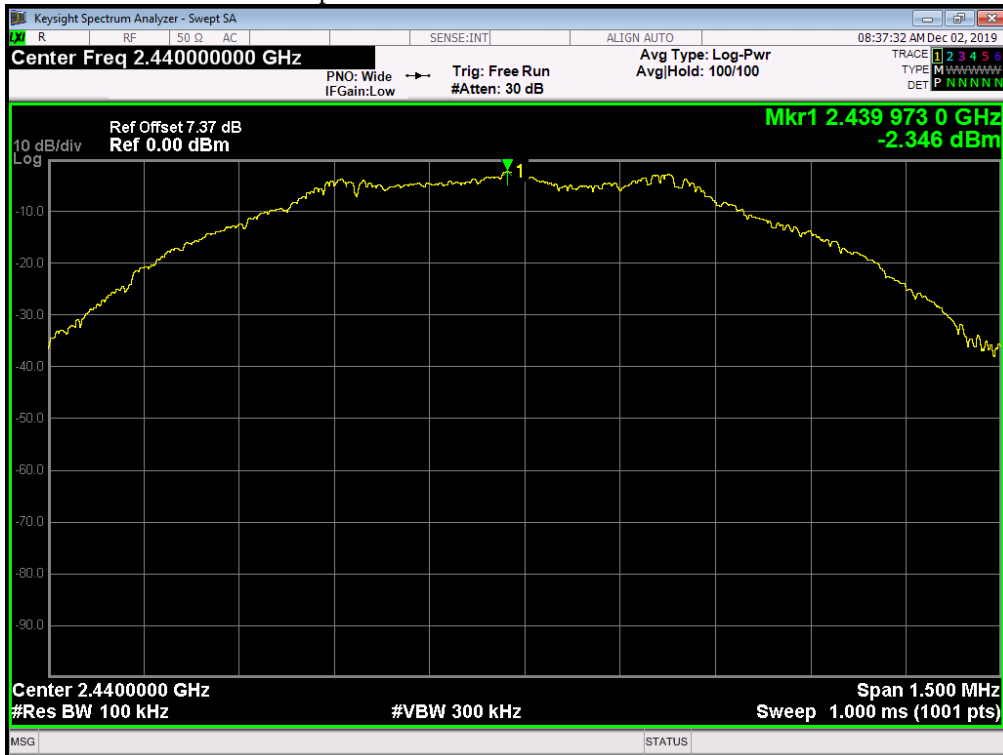


Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

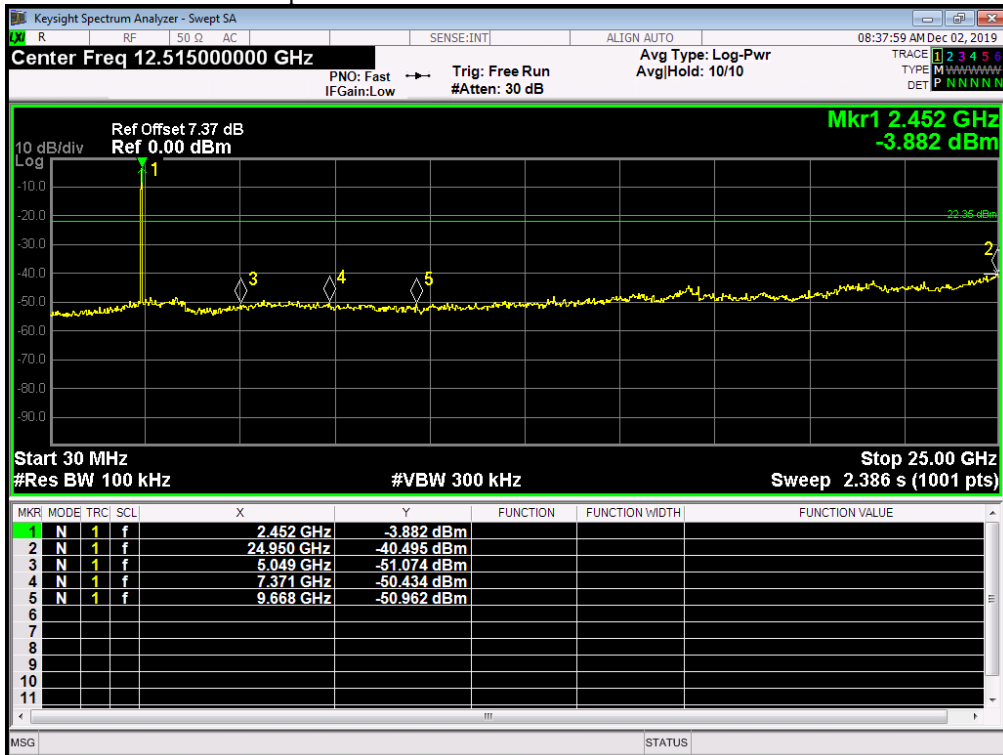

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

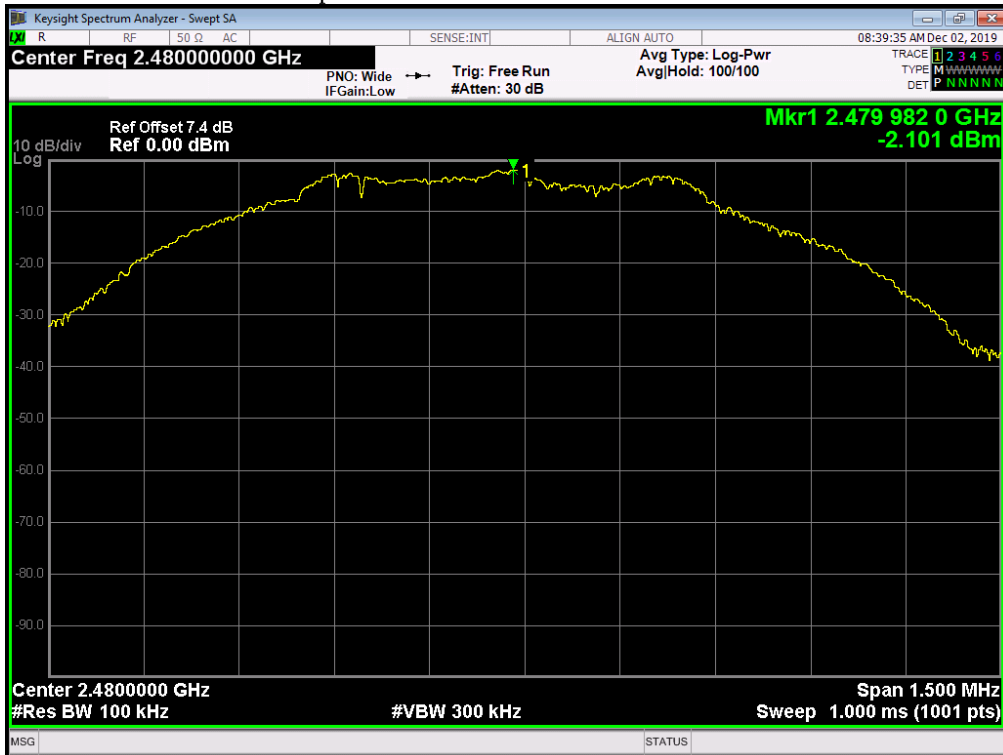

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

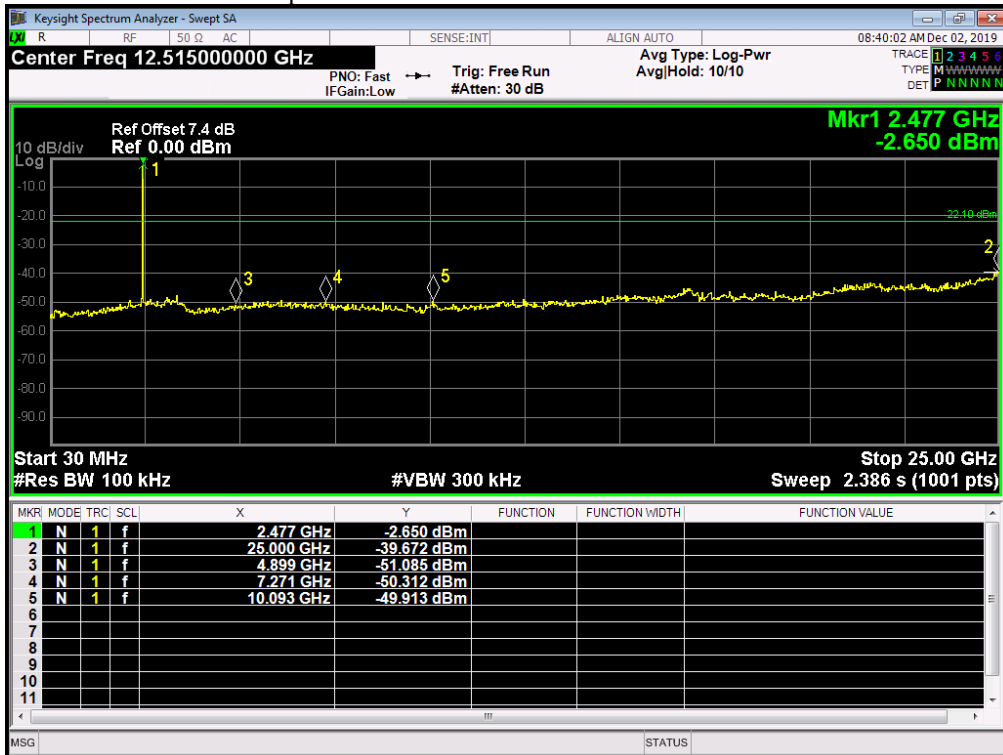

10. Antenna Requirement

10.1. Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

10.2. EUT Antenna


The antenna is Integral Antenna and no consideration of replacement. Antenna gain is Maximum 0 dBi from 2.4GHz to 2.5GHz.

11. Test setup photograph


Photos of power line conducted emission test





Photos of radiated emission test
30MHz – 1GHz


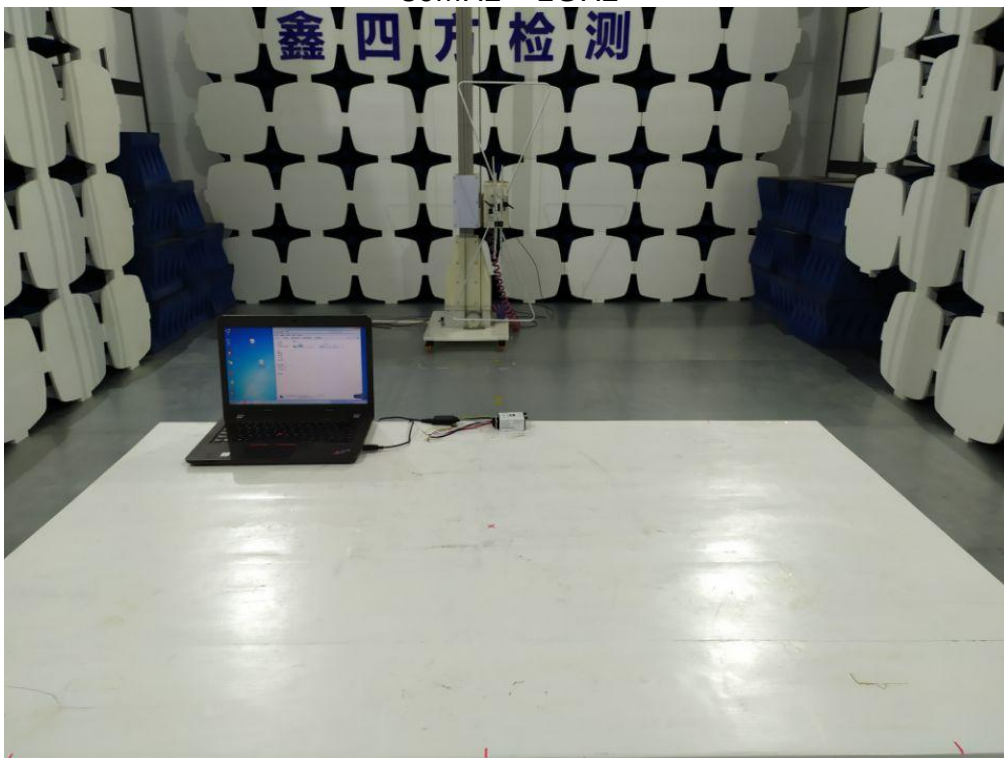




Photos of radiated emission test
Above 1GHz

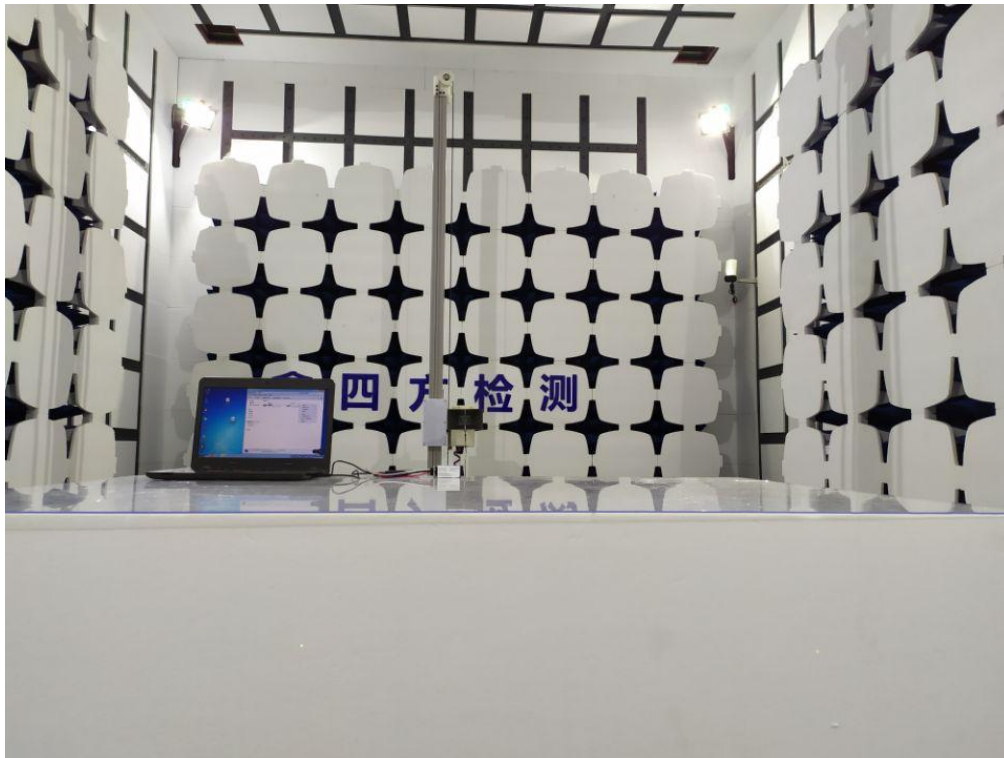


12. Photos of the EUT

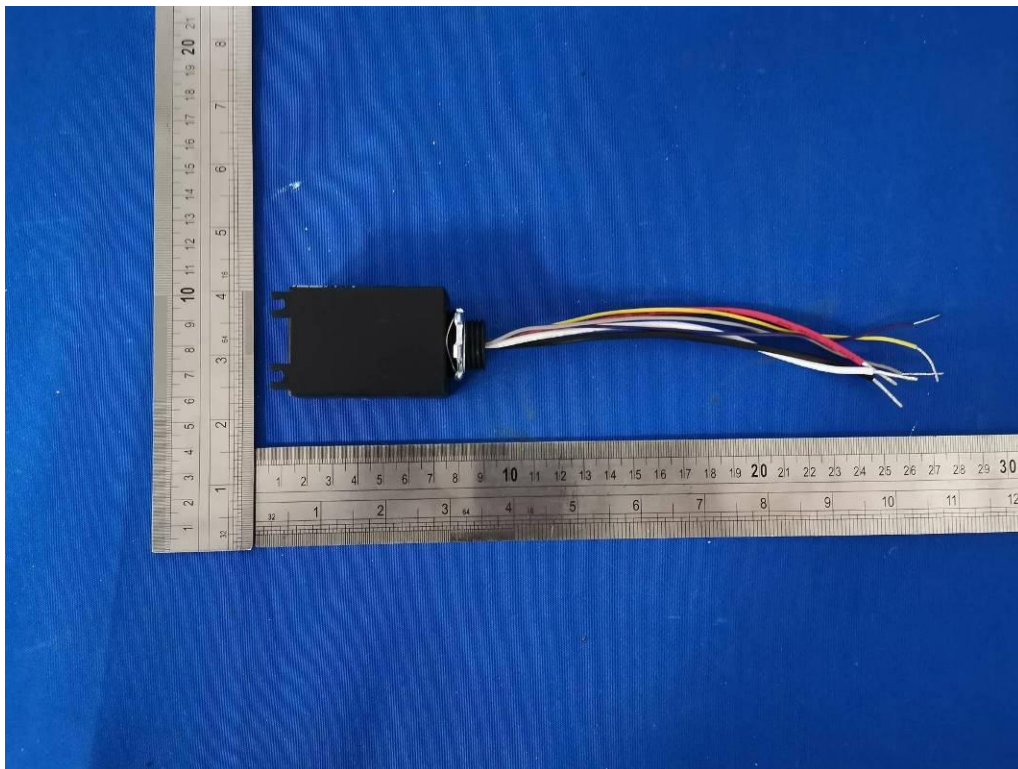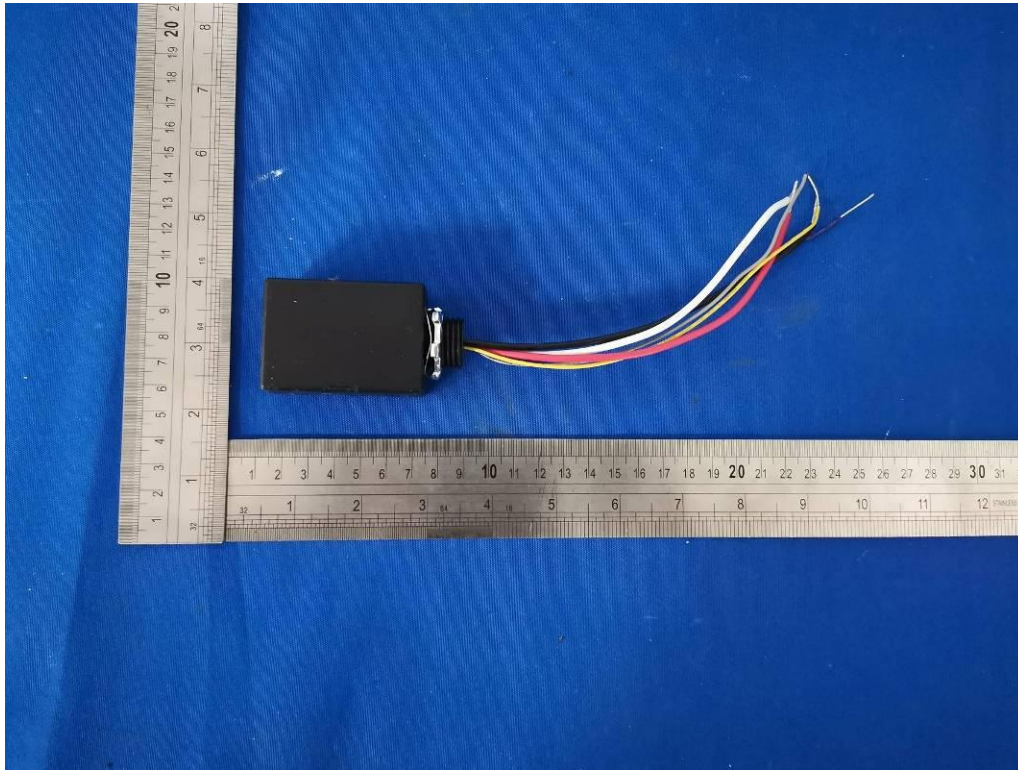

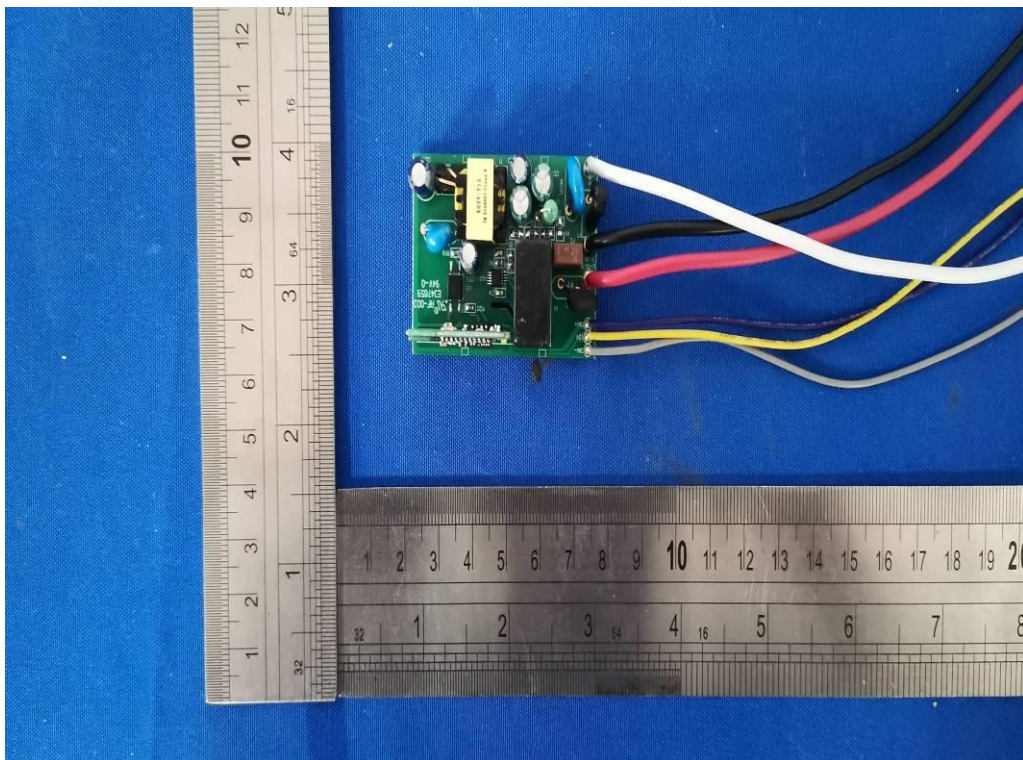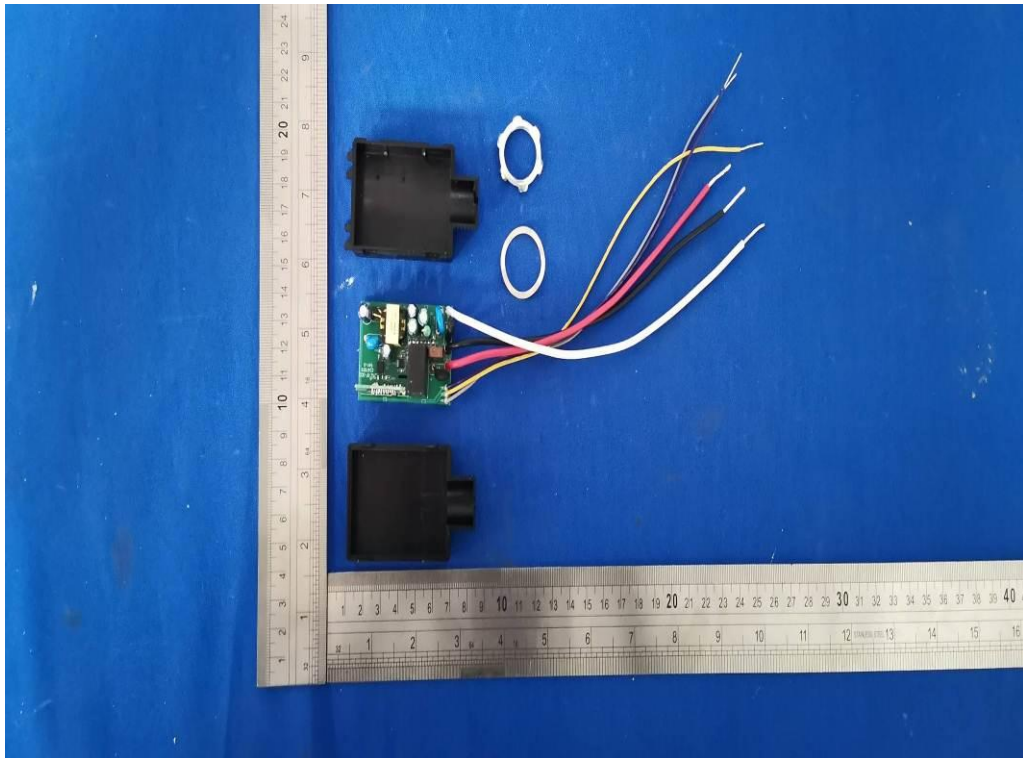

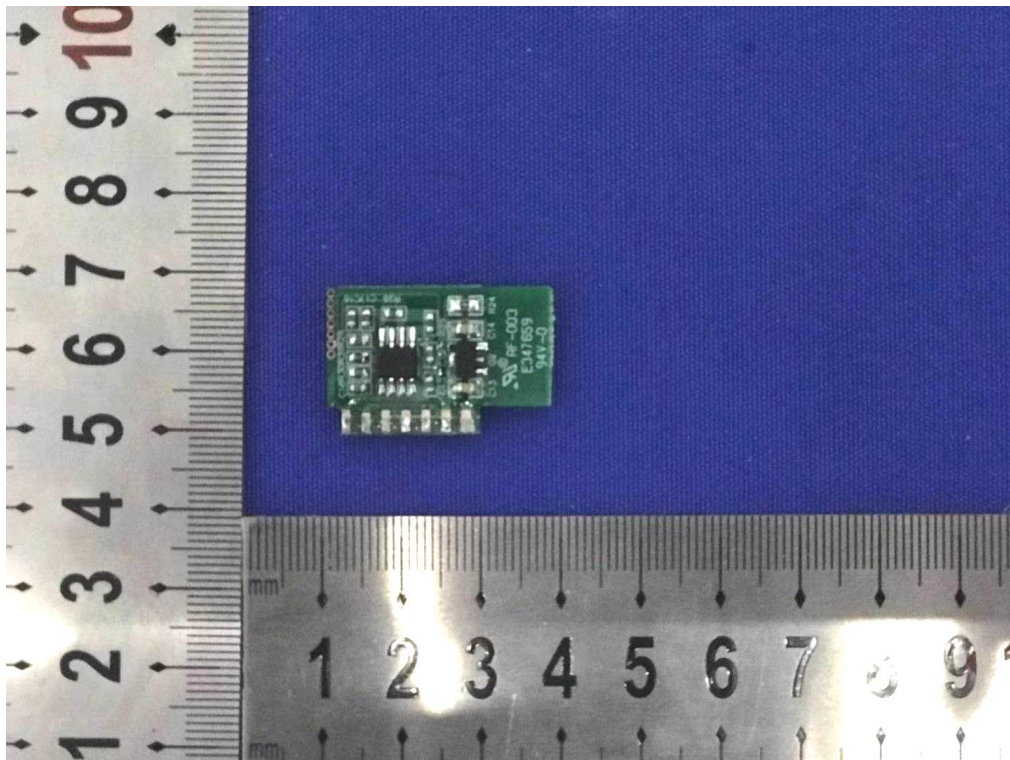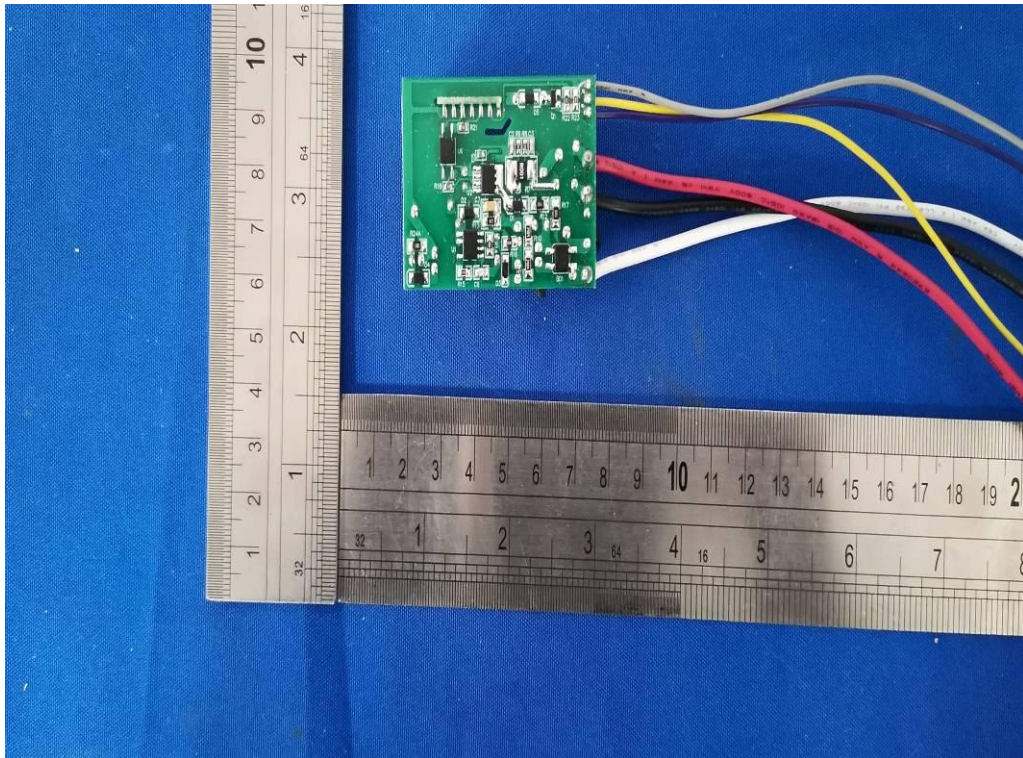

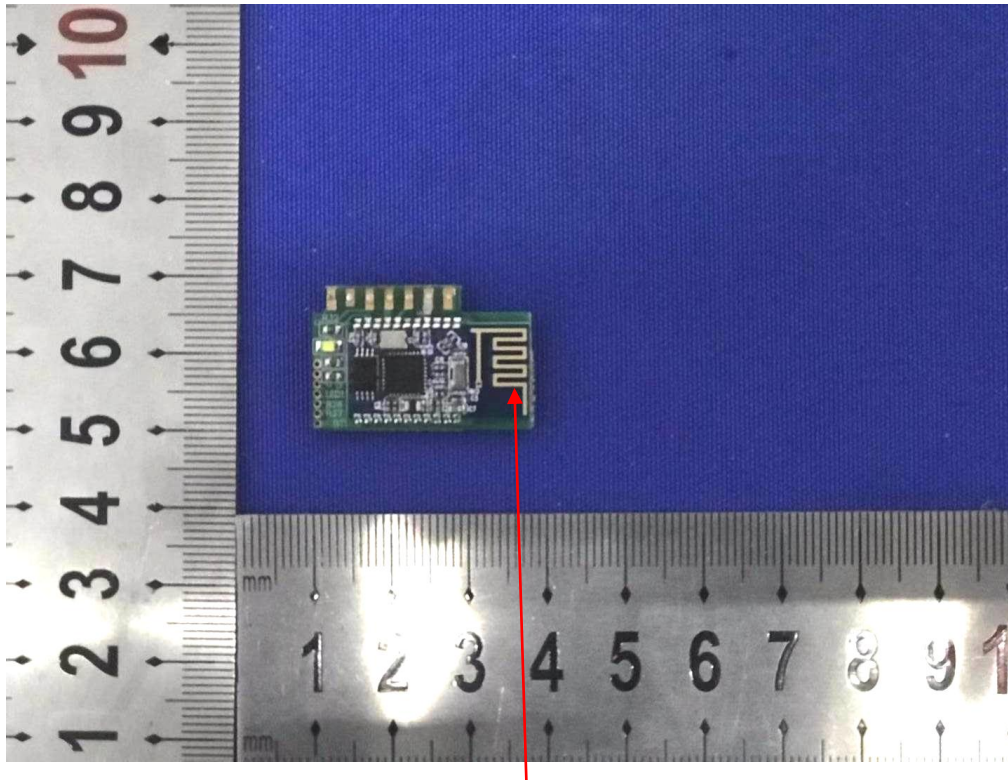

BT Antenna

--END OF REPORT--