



BUREAU
VERITAS

FCC TEST REPORT

Report No.: ACHJ-19JU1631LTSHPB-3

Product: SMART WIFI BULB

Test Model: MS-A19-9.5W-RGBCW

Serial Model: Refer to model list

Received: Jun.17, 2019

ISSUED: Dec.12, 2019

Applicant: Haining Mingshuai Technology Lighting Co.,Ltd

Address: Building 1, No.327 Chuangye Road, Chang'an Town, Haining City, Jiaxing, China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Location: No. 829, Xinzhan Road, Shanghai, P.R.China (201612)

This test report consists of 22 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, CNAS, or any government agency. The test results in the report only apply to the tested item. The test results in this report are traceable to the national or international standards.





BUREAU
VERITAS

Contents

1. TEST PROGRAM.....	3
2. Summary of Test Procedure and Test Results	4
3. Test Configuration of Equipment under Test	5
3.1 Manufacturer information.....	5
3.2 Feature of Equipment under Test.....	5
3.3 Model List	6
3.4 Measurement Uncertainty	6
4 Test of Conducted Emission	7
4.1 Test Limit	7
4.2 Test Procedures	8
4.3 Typical Test Setup	8
4.4 Measurement Equipment	9
4.5 Test Result and Data.....	10
4.6 Test Photographs	12
5 Test of Radiated Emission	13
5.1 Test Limit	13
5.2 Test Procedures	14
5.3 Typical Test Setup	14
5.4 Measurement Equipment	15
5.5 Test Result and Data (30MHz ~ 1GHz).....	16
5.6 Test Result and Data (1GHz ~ 18GHz)	18
5.7 Test Photographs (30MHz ~ 1000MHz)	20
5.8 Test Photographs (1000MHz ~ 18000MHz)	21
6 Photographs of EUT	22



1. TEST PROGRAM

PRODUCT: SMART WIFI BULB

TEST MODEL: MS-A19-9.5W-RGBCW

SERIES MODEL: Refer to model list

APPLICANT: Haining Mingshuai Technology Lighting Co.,Ltd

TESTED: Jun.20 to Jul.02, 2019

STANDARDS: 47 CFR FCC Part15, Subpart B, Class B

ANSI C63.4:2014

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

A handwritten signature in black ink, appearing to read 'Will YAN'.

Prepared by : _____, **Date:** Dec.12, 2019

Will YAN

Project Engineer

Approved by : _____, **Date:** Dec.12, 2019

Daniel SUN

RF Supervisor





BUREAU
VERITAS

2. Summary of Test Procedure and Test Results

EMISSION(47 CFR FCC Part15, Subpart B)		
Test Item	Normative References	Test Result
Conducted Emission	47 CFR FCC Part15, Subpart B 15.107	Meets the Class B requirements
Radiated Emission	47 CFR FCC Part15, Subpart B 15.109	Meets the Class B requirements

Special Comment: All tests were performed on 120Vac 60Hz.



BUREAU
VERITAS

3. Test Configuration of Equipment under Test

3.1 Manufacturer information

Manufacturer : Haining Mingshuai Technology Lighting Co.,Ltd

Address : Building 1, No.327 Chuangye Road, Chang'an Town, Haining City, Jiaxing, China

3.2 Feature of Equipment under Test

Product Name:	SMART WIFI BULB
Test Model:	MS-A19-9.5W-RGBCW
Series Model:	Refer to model list
Model Discrepancy:	--
EUT Power Rating:	120Vac 60Hz

Note: Compare the model list and the differences , we choose the model MS-A19-9.5W-RGBCW as final test.



BUREAU
VERITAS

3.3 Model List

Main Model No	Serial Model No	Difference1	Difference2
MS-A19-9.5W-RGBCW	MS-A19-7W-RGBCW MS-A19-5W-RGBCW	9.5W is all same as 7W and 5W except for different LED quantity in same LED PWB and different component ratings in same driver PWB (The driver difference, please refer to BOM)	RGBCW is all same as RGBW except RGBCW has more LEDs(cold colour temperature) in same LED PWB and has more components in same driver PWB
MS-A19-9.5W-RGBW	MS-A19-7W-RGBW MS-A19-5W-RGBW		
MS-A19-9.5W-CW	MS-A19-7W-CW MS-A19-5W-CW		CW is all same as W except CW has more LEDs(cold colour temperature) in same LED PWB and has more components in same driver PWB

3.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Value
Conducted emissions	2.55 dB
Radiated emissions	30 MHz ~ 1GHz
	Above 1GHz



BUREAU
VERITAS

4 Test of Conducted Emission

4.1 Test Limit

TEST STANDARD:

CFR 47 FCC Part 15, Subpart B (Section: 15.107)

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50


NOTES: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2 Test Procedures

- 5 The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- 6 Connect EUT to the power mains through a Artificial Mains Network (AMN).
- 7 All the support units are connecting to the other AMN.
- 8 The AMN provides 50 ohm coupling impedance for the measuring instrument.
- 9 The CISPR states that a 50 ohm, 50 micro-Henry AMN should be used.
- 10 Both sides of AC line were checked for maximum conducted interference.
- 11 The frequency range from 150 kHz to 30 MHz was searched
- 12 Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3 Typical Test Setup

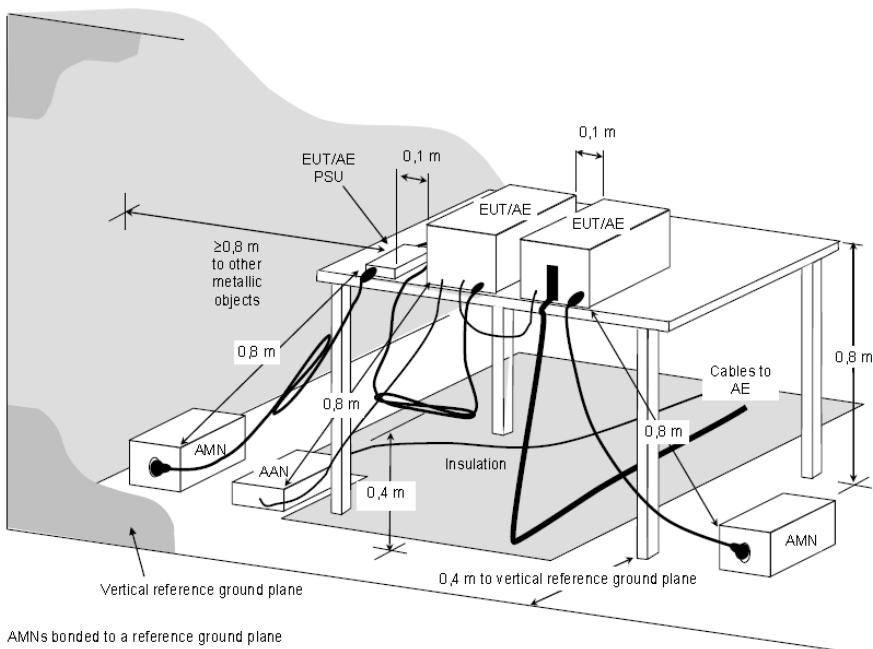

NOTE The 0,8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be $\geq 0,8$ m.

**Figure D.2 – Example measurement arrangement for table-top EUT
(Conducted emission measurement – alternative 1)**



BUREAU
VERITAS

4.4 Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Mar.04, 2020
LISN ROHDE & SCHWARZ	ENV216	E1L1011	Jul.18, 2019
Software ADT	ADT_Cond_V7.3.0	N/A	N/A




BUREAU
VERITAS

4.5 Test Result and Data

a. Conducted Emission Test Data

Phase : LINE

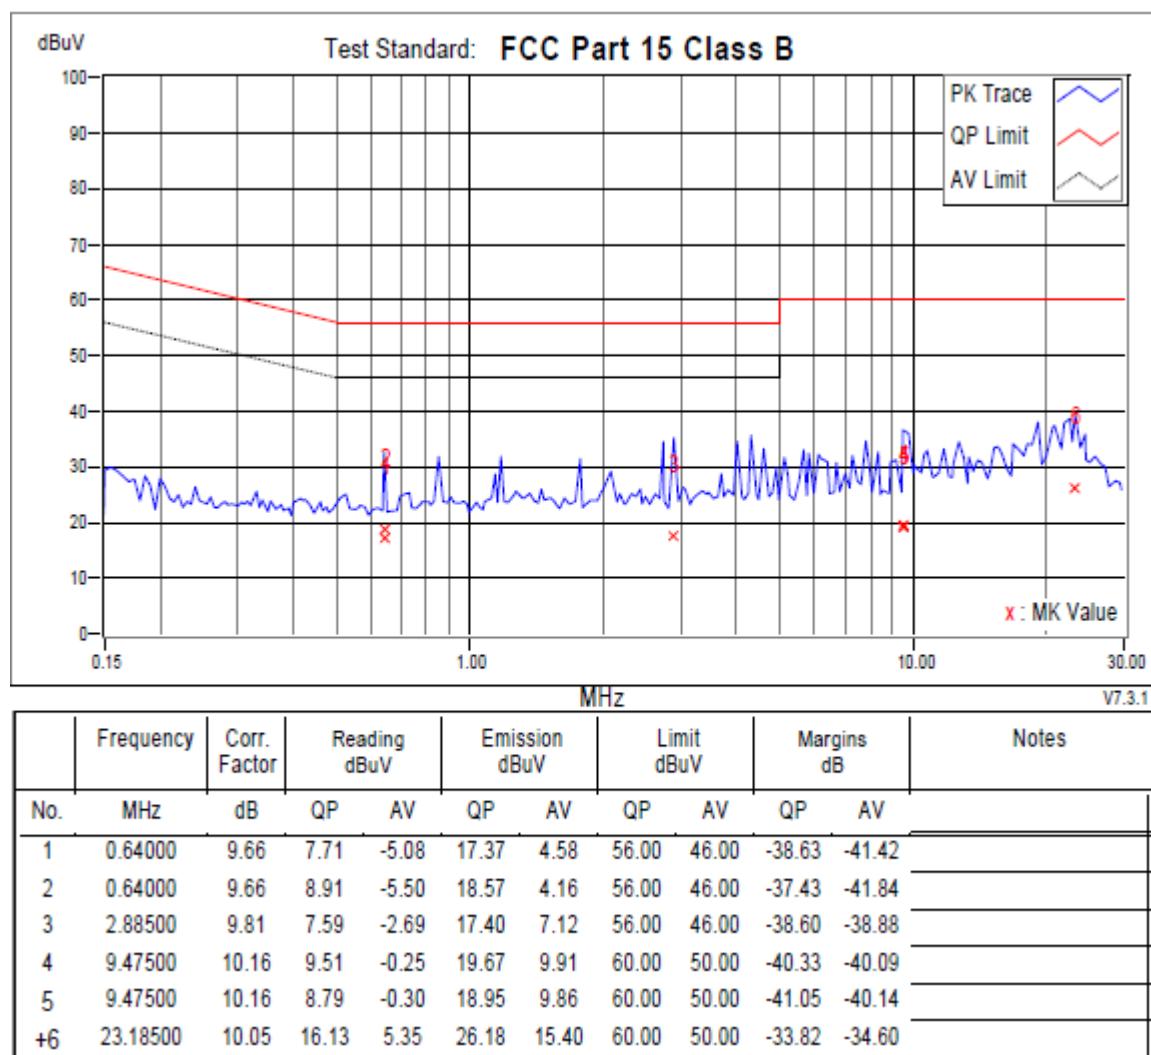


REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



BUREAU
VERITAS

Phase: NEUTRAL

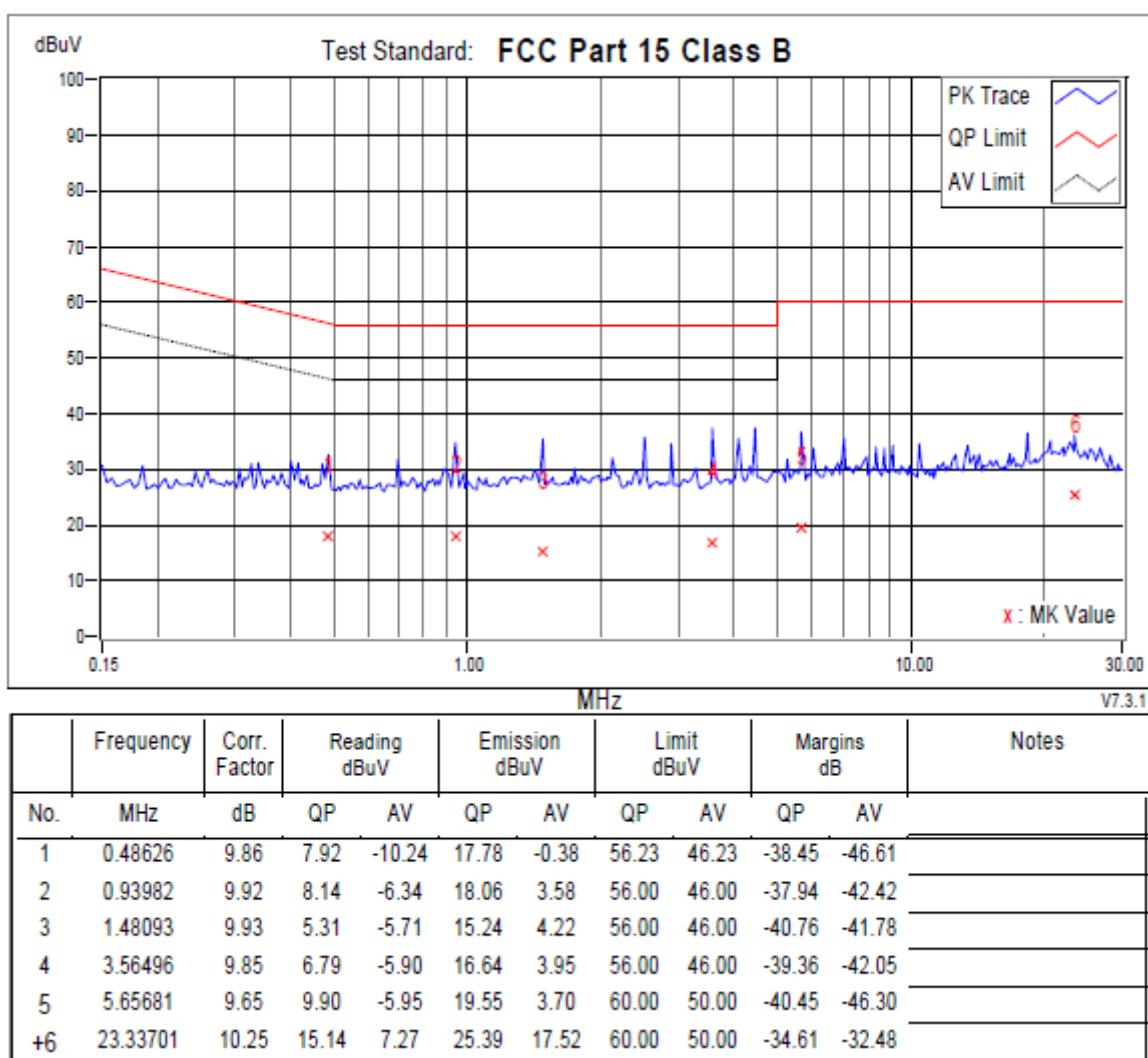

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.6 Test Photographs





BUREAU
VERITAS

5 Test of Radiated Emission

5.1 Test Limit

TEST STANDARD:

CFR 47 FCC Part 15, Subpart B (Section: 15.109)

FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	µV/m	dBµV/m	µV/m	dBµV/m
30 – 88	90	39.1	100	40.0
88 – 216	150	43.5	150	43.5
216 – 960	210	46.4	200	46.0
960 – 1000	300	49.5	500	54.0

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz


FREQUENCY (MHz)	Class A (dBµV/m) (at 3m)		Class B (dBµV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

Note: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dB μ V/m) = 20 log Emission level (uV/m).
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

5.3 Typical Test Setup

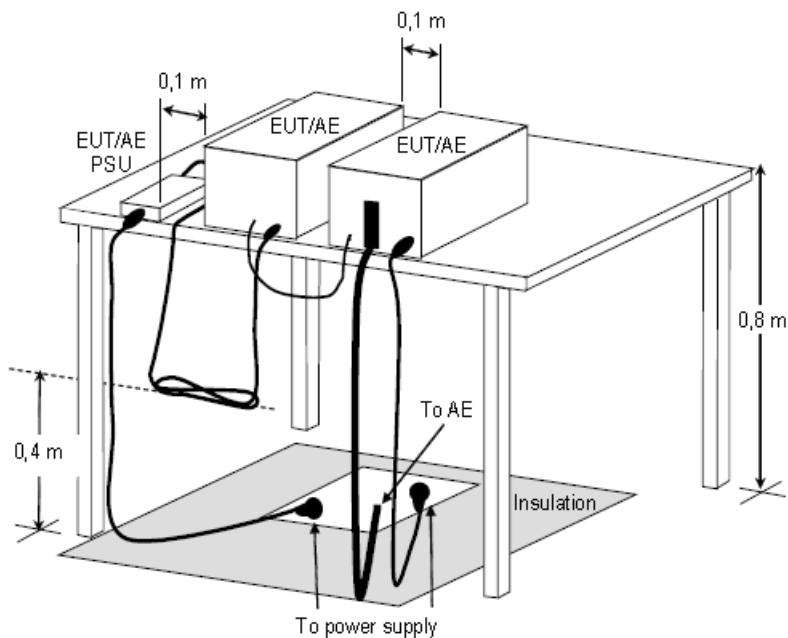

**Figure D.8 – Example measurement arrangement for table-top EUT
(Radiated emission measurement)**



BUREAU
VERITAS

5.4 Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMI Test Spectrum ROHDE & SCHWARZ	ESR7	E1R1005	Dec.04,19
Spectrum Analyzer Keysight	N9030B	E1S1003	Jul.23, 2019
Broad-Band Antenna Schwarzbeck	VULB9168	E1A1012	Aug.26, 2019
Double Riaged Vroadband Horn Antenna Schwarzbeck	BBHA9120D	E1A1017	Jan.26, 2020
Preamplifier Agilent	8447D	E1A2001	Oct.14, 2019
Preamplifier Agilent	EMC051845SE	E1A2009	Jul.19, 2019




BUREAU
VERITAS

5.5 Test Result and Data (30MHz ~ 1GHz)

Position: Horizontal

Test Graph

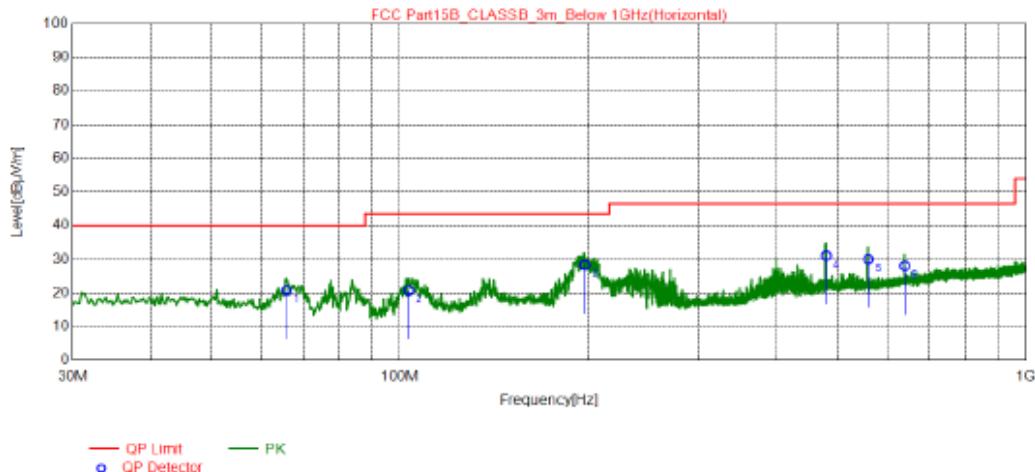

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	65.89	32.26	-11.47	20.79	40.00	19.21	200	64	Horizontal
2	103.3	33.74	-13.00	20.74	43.50	22.76	200	48	Horizontal
3	197.4	40.56	-12.25	28.31	43.50	15.19	200	186	Horizontal
4	480.0	36.71	-5.64	31.07	46.50	15.43	200	86	Horizontal
5	560.0	35.22	-5.18	30.04	46.50	16.46	200	92	Horizontal
6	640.1	31.29	-3.25	28.04	46.50	18.46	200	92	Horizontal

REMARKS:


1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value.
4. Factor = Antenna Factor + Amplifier Factor + Cable loss.
5. QP value = Factor + Reading Value.



BUREAU
VERITAS

Position: Vertical

Test Graph

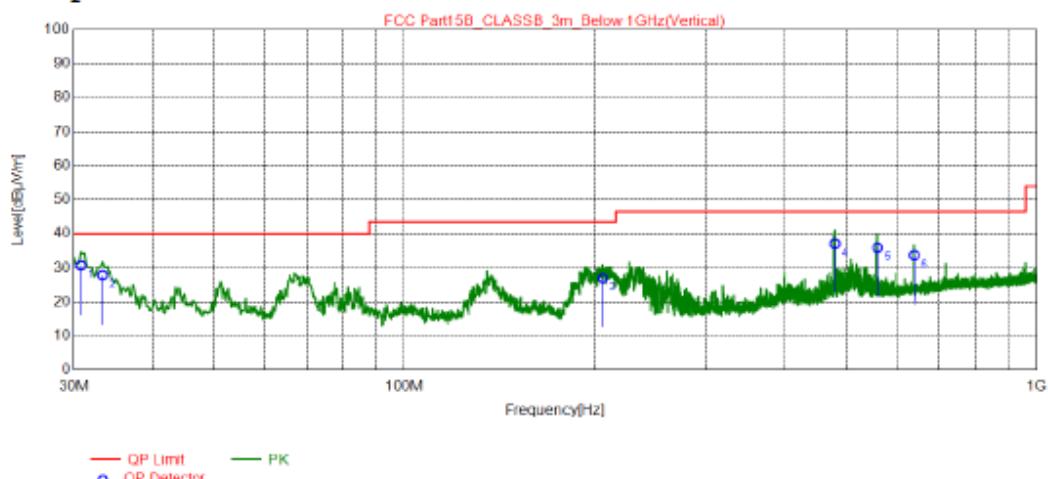

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.77	41.31	-10.61	30.70	40.00	9.30	100	17	Vertical
2	33.29	38.11	-10.30	27.81	40.00	12.19	100	55	Vertical
3	205.9	39.08	-12.09	26.99	43.50	16.51	100	209	Vertical
4	480.0	42.67	-5.64	37.03	46.50	9.47	100	90	Vertical
5	560.0	41.09	-5.18	35.91	46.50	10.59	100	96	Vertical
6	639.9	36.95	-3.26	33.69	46.50	12.81	100	158	Vertical

REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.




BUREAU
VERITAS

5.6 Test Result and Data (1GHz ~ 18GHz)

Position: Horizontal

Test Graph

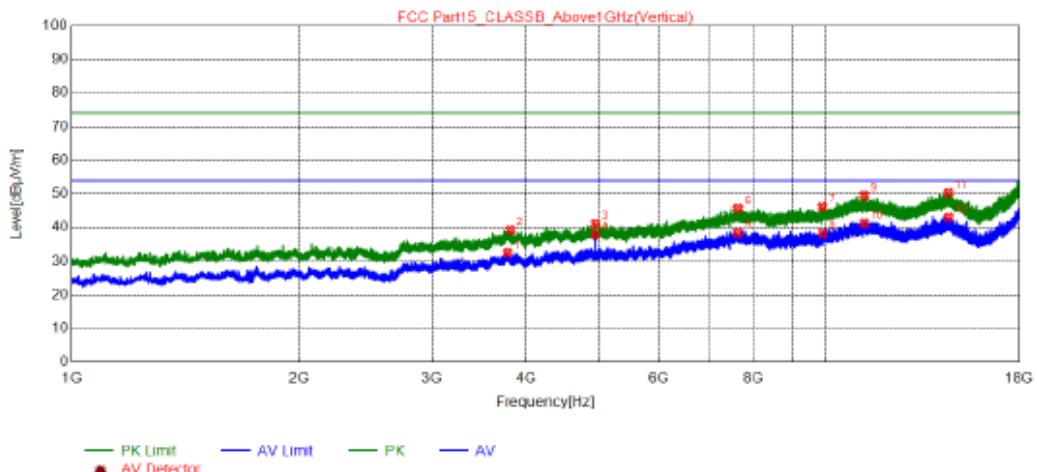

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	3780.3500	44.66	32.60	54.00	21.40	100	110	Vertical	AV
2	3812.6500	51.24	39.25	74.00	34.75	100	186	Vertical	PK
3	4944.0000	50.44	41.20	74.00	32.80	100	263	Vertical	PK
4	4944.8500	47.23	37.99	54.00	16.01	100	263	Vertical	AV
5	7635.1000	42.00	38.42	54.00	15.58	100	263	Vertical	AV
6	7635.9500	49.21	45.63	74.00	28.37	100	186	Vertical	PK
7	9870.6000	47.41	46.07	74.00	27.93	100	186	Vertical	PK
8	9882.5000	39.65	38.33	54.00	15.67	100	110	Vertical	AV
9	11222.9500	47.88	49.54	74.00	24.46	100	263	Vertical	PK
10	11223.8000	39.72	41.38	54.00	12.62	100	263	Vertical	AV
11	14502.2500	46.55	50.37	74.00	23.63	100	33	Vertical	PK
12	14510.7500	39.18	42.98	54.00	11.02	100	263	Vertical	AV

REMARKS:


1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit -Level



BUREAU
VERITAS

Position: Vertical

Test Graph

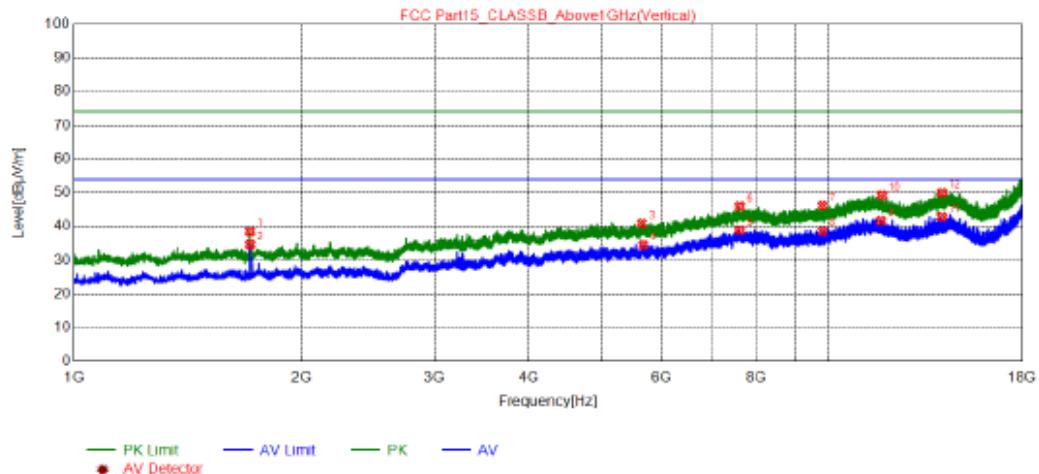


NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1711.4500	55.92	38.51	74.00	35.49	100	263	Vertical	PK
2	1712.3000	52.06	34.65	54.00	19.35	100	301	Vertical	AV
3	5649.5000	49.49	40.93	74.00	33.07	100	186	Vertical	PK
4	5669.9000	43.04	34.51	54.00	19.49	100	72	Vertical	AV
5	7615.5500	42.51	38.09	54.00	15.11	100	224	Vertical	AV
6	7615.5500	49.57	45.95	74.00	28.05	100	224	Vertical	PK
7	9791.5500	47.61	46.14	74.00	27.86	100	34	Vertical	PK
8	9792.4000	40.14	38.67	54.00	15.33	100	34	Vertical	AV
9	11701.5000	40.49	41.74	54.00	12.26	100	301	Vertical	AV
10	11735.5000	48.05	49.23	74.00	24.77	100	301	Vertical	PK
11	14101.9000	39.71	42.78	54.00	11.22	100	301	Vertical	AV
12	14104.4500	47.00	50.07	74.00	23.93	100	263	Vertical	PK


REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit - Level

5.7 Test Photographs (30MHz ~ 1000MHz)

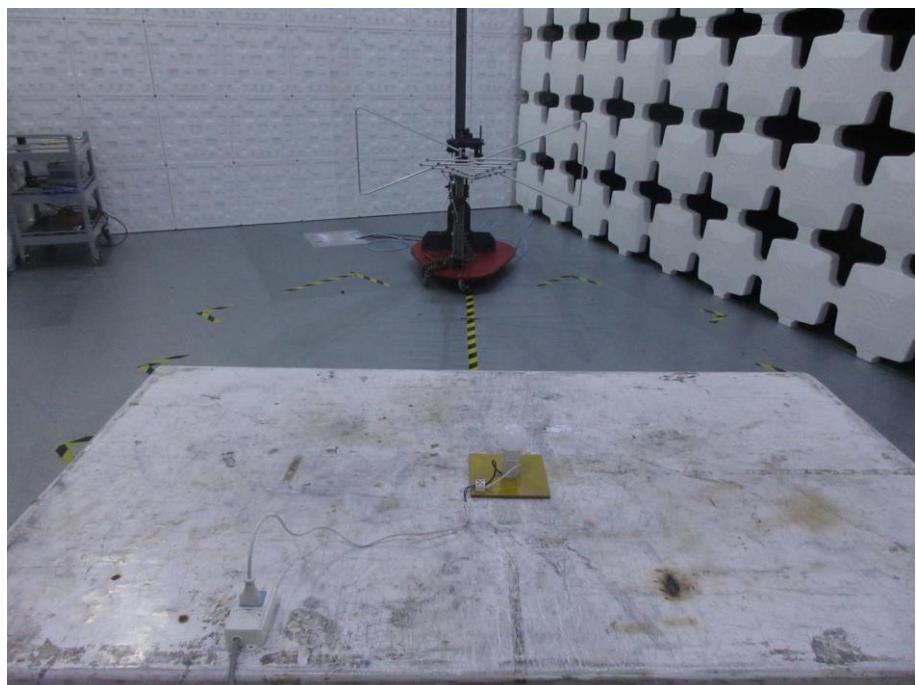

5.8 Test Photographs (1000MHz ~ 18000MHz)

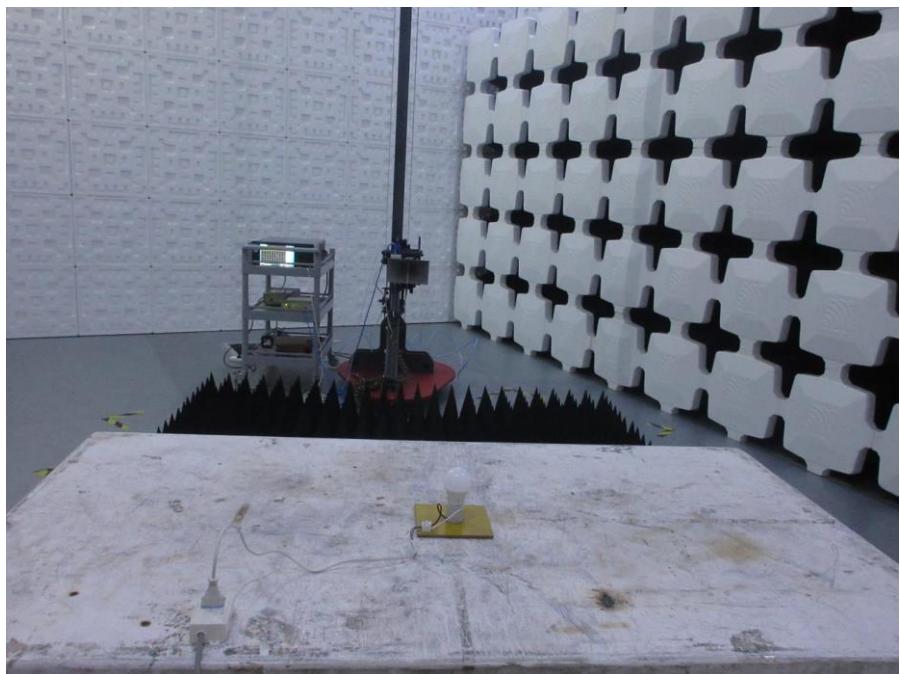



BUREAU
VERITAS

6 Photographs of EUT



--- END ---