



TEST REPORT

APPLICANT : Realme Chongqing Mobile
Telecommunications Corp., Ltd.

PRODUCT NAME : Mobile Phone

MODEL NAME : RMX5303

BRAND NAME : realme

FCC ID : 2AUYFRMX5303

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2025-03-12

TEST DATE : 2025-03-14 to 2025-04-24

ISSUE DATE : 2025-04-24

Edited by: Su Xiaoxian
Su Xiaoxian (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	11
2.4. Test Configuration of EUT	12
2.5. Test Conditions	12
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Hopping Mechanism	16
3.3. Number of Hopping Frequency	17
3.4. Duty Cycle of Test Signal	18
3.5. Maximum Peak Conducted Output Power	19
3.6. Maximum Average Conducted Output Power	20
3.7. 20 dB Bandwidth	21
3.8. Carried Frequency Separation	22
3.9. Time of Occupancy (Dwell time)	23
3.10. Conducted Spurious Emissions and Band Edge	24
3.11. Conducted Emission	25
3.12. Restricted Frequency Bands	26
3.13. Radiated Emission	27



Annex A Test Data and Result **29**

Change History		
Version	Date	Reason for change
1.0	2025-04-24	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Apr. 14, 2025	Lin Haoyang	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Mar. 27, 2025	Lin Haoyang	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Mar. 27, 2025 Mar. 28, 2025	Lin Haoyang	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Mar. 27, 2025 Mar. 28, 2025	Lin Haoyang	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Mar. 27, 2025	Lin Haoyang	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Apr. 14, 2025	Lin Haoyang	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Apr. 14, 2025	Lin Haoyang	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission and Band Edge	Mar. 27, 2025 Apr. 14, 2025	Lin Haoyang	PASS	No deviation
11	15.207	Conducted Emission	Mar. 18, 2025	Fan Shengquan	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Mar. 20, 2025	Gao Jianrou	PASS	No deviation



13	15.209, 15.247(d)	Radiated Emission	Mar. 20, 2025	Gao Jianrou	PASS	No deviation
----	----------------------	----------------------	---------------	-------------	------	--------------

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB 558074 D01 v05r02 and DA 00-075.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2025.01.06	2026.01.05
LISN	8127449	NSLK 8127	Schwarzbeck	2025.01.09	2026.01.08
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0



1.2.4 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	N/A	N/A
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	N/A	N/A
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	N/A	N/A
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Applicant Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China
Manufacturer:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

2.2. Information of EUT

Product Name:	Mobile Phone	
Sample No.:	1#, 4#, 18#	
Hardware Version:	11	
Software Version:	Android 15	
Equipment Type:	Bluetooth classic	
Bluetooth Version:	5.2	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	Inverted F Antenna	
Antenna Gain:	0.40dBi	
Accessory Information:	Battery	
	Brand Name:	SUPERVOOC
	Model No.:	BLPC71
	Serial No.:	N/A
	Capacity:	Typical: 6000mAh, Rated: 5830mAh
	Rated Voltage:	3.88V
	Charge Limit:	4.48V
	Manufacturer:	Sunwoda Electronic Co., Ltd.
	AC Adaptor 1	
	Brand Name:	SUPERVOOC
	Model No.:	VCB4JAUH
	Serial No.:	N/A



	Rated Output:	5V=2A 10W or 5-11V=4.1A(MAX) 45W(MAX)
	Rated Input:	100-240V~50/60Hz, 1.5A
	Manufacturer:	Huizhou Golden Lake Industrial Co., Ltd.
	AC Adapter 2	
	Brand Name:	SUPERVOOC
	Model No.:	VCB4HAUH
	Serial No.:	N/A
	Rated Output:	5V=2A 10W or 5-11V=4.1A(MAX) 45W(MAX)
	Rated Input:	100-240V~50/60Hz, 1.5A
	Manufacturer:	Huizhou Golden Lake Industrial Co., Ltd.
	AC Adapter 3	
	Brand Name:	SUPERVOOC
	Model No.:	VCB4JAUH
	Serial No.:	N/A
	Rated Output:	5V=2A 10W or 5-11V=4.1A(MAX) 45W(MAX)
	Rated Input:	100-240V~50/60Hz, 1.5A
	Manufacturer:	Jiangsu Chenyang Electron Co.,Ltd.
	AC Adapter 4	
	Brand Name:	SUPERVOOC
	Model No.:	VCB4HAUH
Serial No.:	N/A	
Rated Output:	5V=2A 10W or 5-11V=4.1A(MAX) 45W(MAX)	
Rated Input:	100-240V~50/60Hz, 1.5A	
Manufacturer:	Shenzhen Huntkey Electric Co., Ltd.	
USB Cable 1		
Model No.:	DL129	
USB Cable 2		
Model No.:	DL154	

Note 1: For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

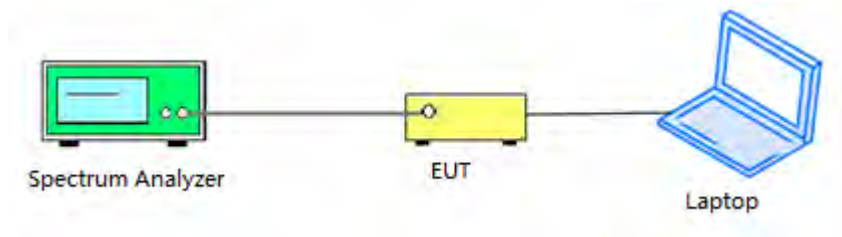


2.6.2. Conducted Emission Measurement

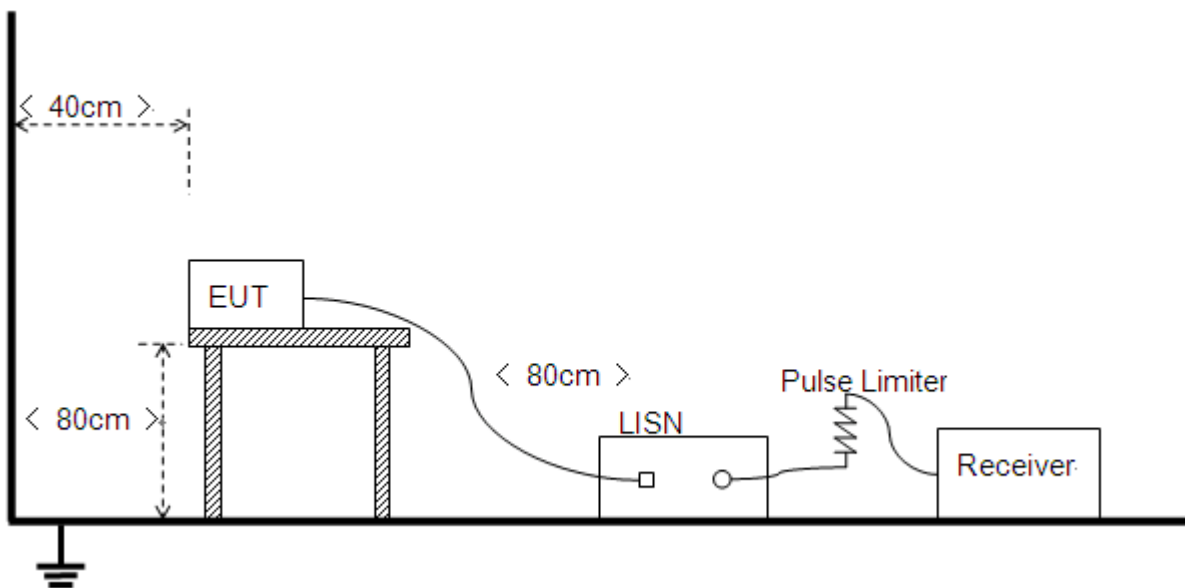


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

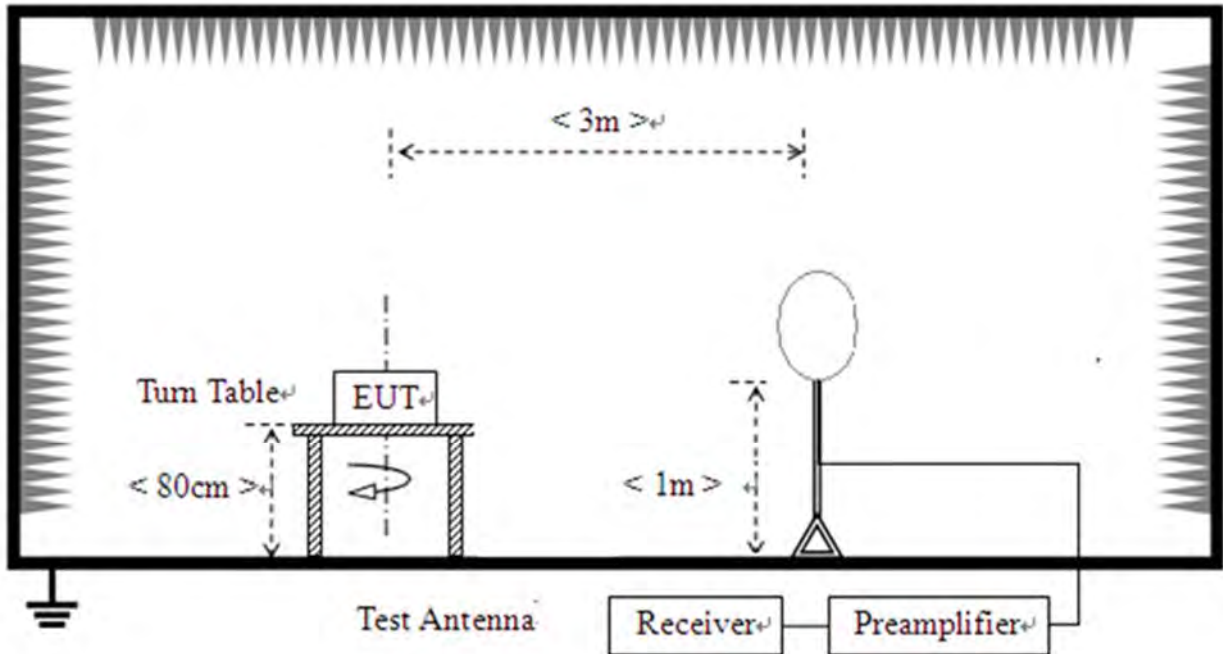

2) For radiated emissions from 30MHz to 1GHz

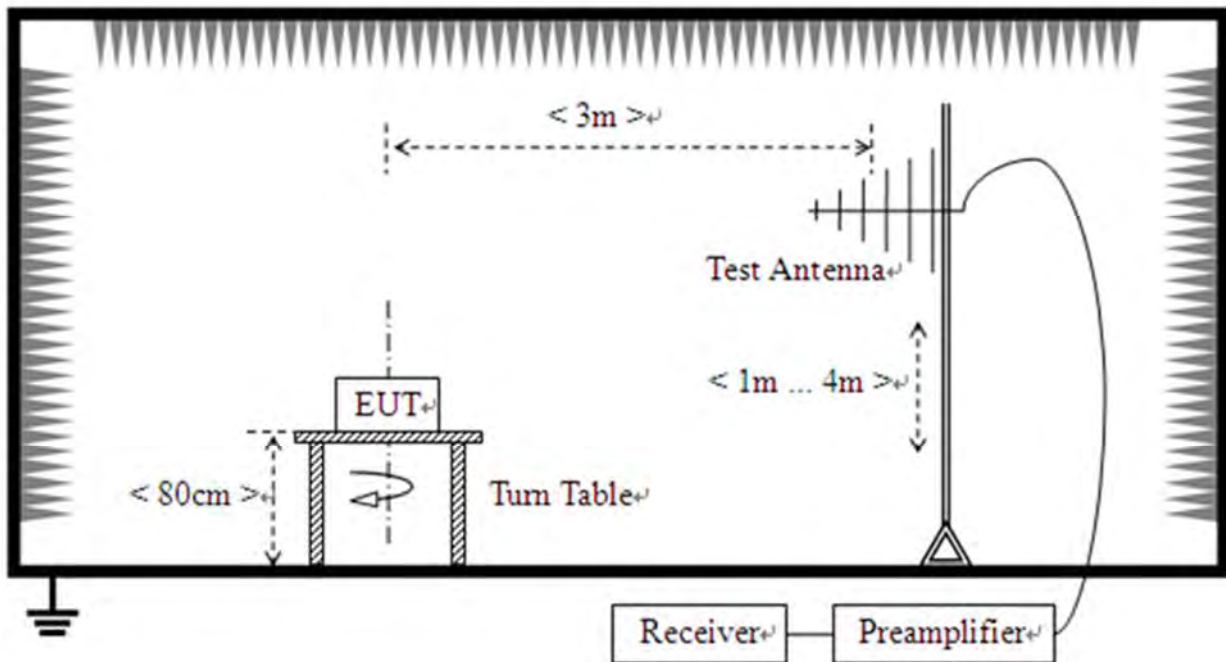

3) For radiated emissions above 1GHz

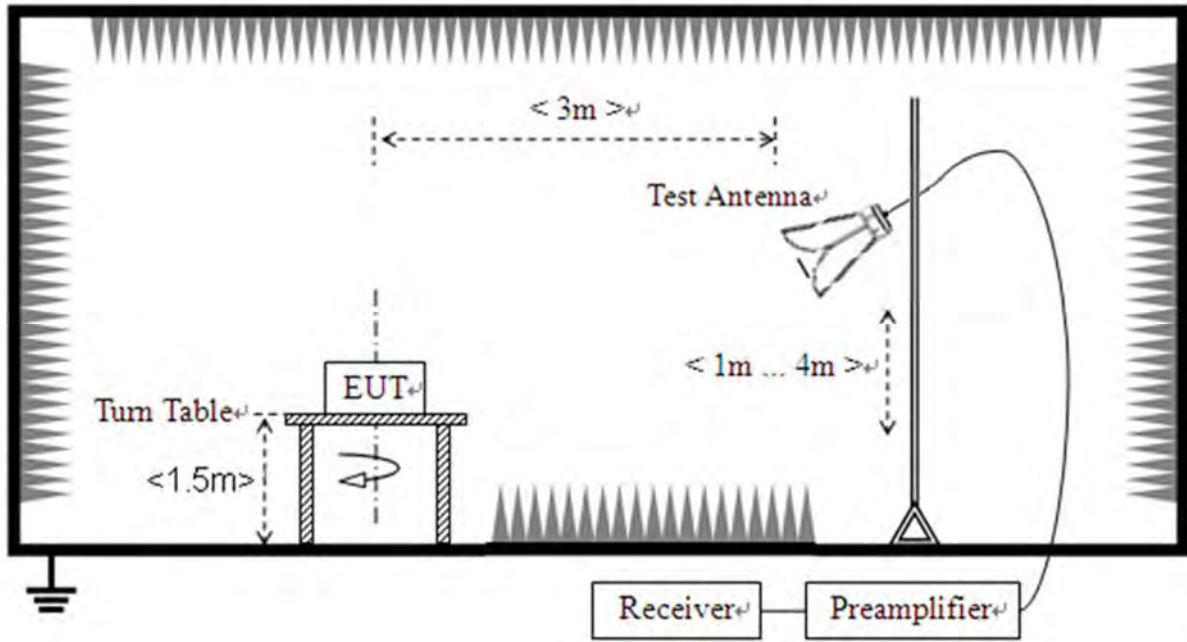



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
<input checked="" type="checkbox"/> Internal <input type="checkbox"/> External	<input type="checkbox"/> FPC Antenna <input type="checkbox"/> Spring Antenna <input type="checkbox"/> Ceramic Antenna <input type="checkbox"/> Integrated Antenna <input type="checkbox"/> Dipole Antenna <input type="checkbox"/> PCB Antenna <input checked="" type="checkbox"/> Inverted F Antenna	<input type="checkbox"/> I-PEX Connector <input type="checkbox"/> SMA Connector <input type="checkbox"/> RP-SMA Connector <input checked="" type="checkbox"/> Metal Shrapnel <input type="checkbox"/> Layout



3.2. Hopping Mechanism

3.2.1. Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2. Test Result

The hopping mechanism of the EUT is in compliance with the document "***Bluetooth core specification v5.1***".



3.3. Number of Hopping Frequency

3.3.1. Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

3.3.2. Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.1 in this report.



3.4. Duty Cycle of Test Signal

3.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.4.2. Test Result

Refer to Annex A.2 in this report.



3.5. Maximum Peak Conducted Output Power

3.5.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.5.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.3 in this report.



3.6. Maximum Average Conducted Output Power

3.6.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.6.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.4 in this report.



3.7.20 dB Bandwidth

3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

3.7.1.Test Procedures

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.3.Test Result

Refer to Annex A.5 in this report.



3.8. Carried Frequency Separation

3.8.1. Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

3.8.2. Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4. Test Result

Refer to Annex A.6 in this report.



3.9. Time of Occupancy (Dwell time)

3.9.1. Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.9.2. Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (1600 / 2 / 79) \times 31.6$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (1600 / 4 / 79) \times 31.6$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (1600 / 6 / 79) \times 31.6$ Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (800 / 2 / 20) \times (0.4 \times 20)$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (800 / 4 / 20) \times (0.4 \times 20)$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (800 / 6 / 20) \times (0.4 \times 20)$ Millisecond.

3.9.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.9.4. Test Result

Refer to Annex A.7 in this report.



3.10. Conducted Spurious Emissions and Band Edge

3.10.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.10.2. Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.

Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

3.10.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.10.4. Test Result

Refer to Annex A.8 and A.9 in this report.



3.11. Conducted Emission

3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.11.4.Test Result

Refer to Annex A.10 in this report.



3.12. Restricted Frequency Bands

3.12.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.12.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.12.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.12.4. Test Result

Refer to Annex A.11 in this report.



3.13. Radiated Emission

3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.13.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.13.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.13.4. Test Result

Refer to Annex A.12 in this report.



Annex A Test Data and Result


A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Test Graphs

Hopping No. NVNT 1-DH5 2441MHz Ant1

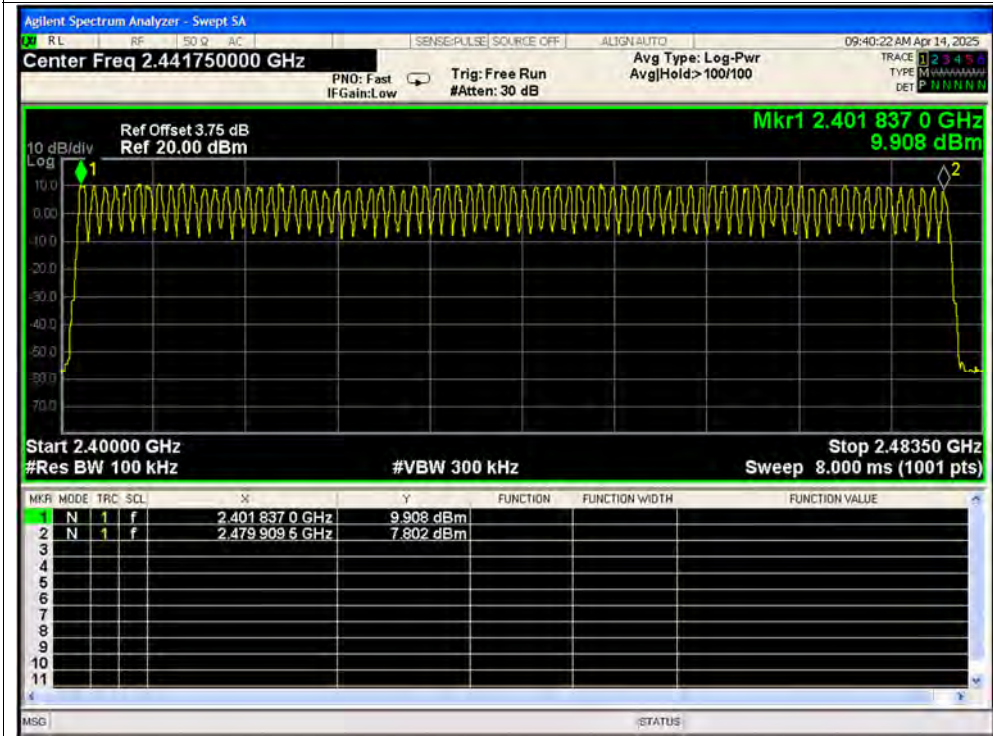


Hopping No. NVNT 2-DH5 2441MHz Ant1

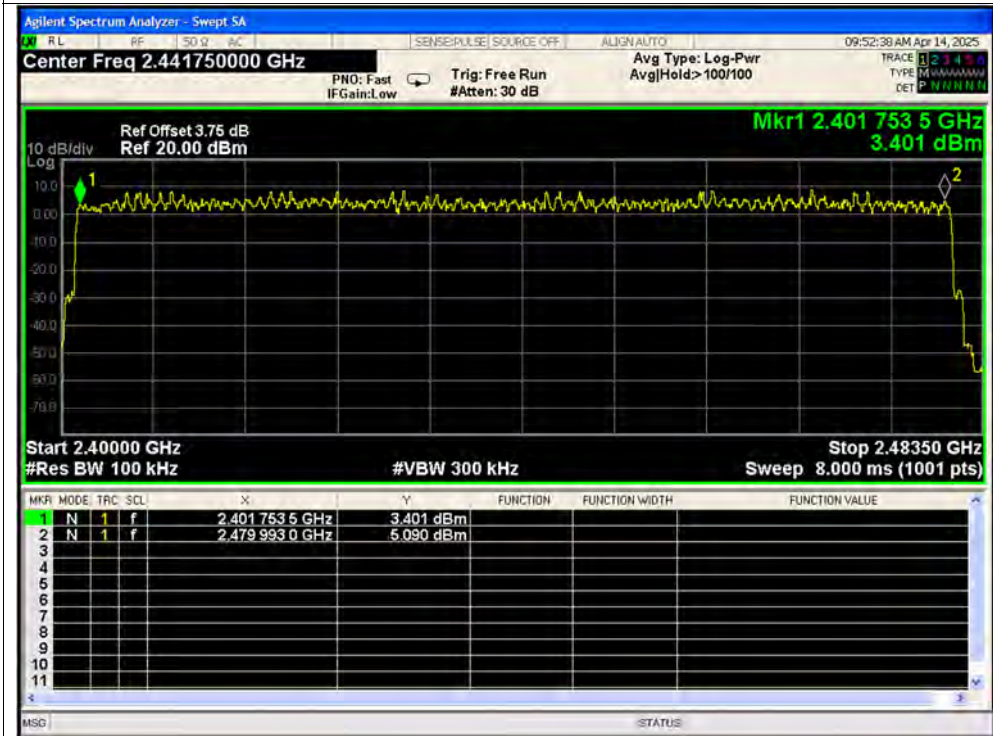



Hopping No. NVNT 3-DH5 2441MHz Ant1

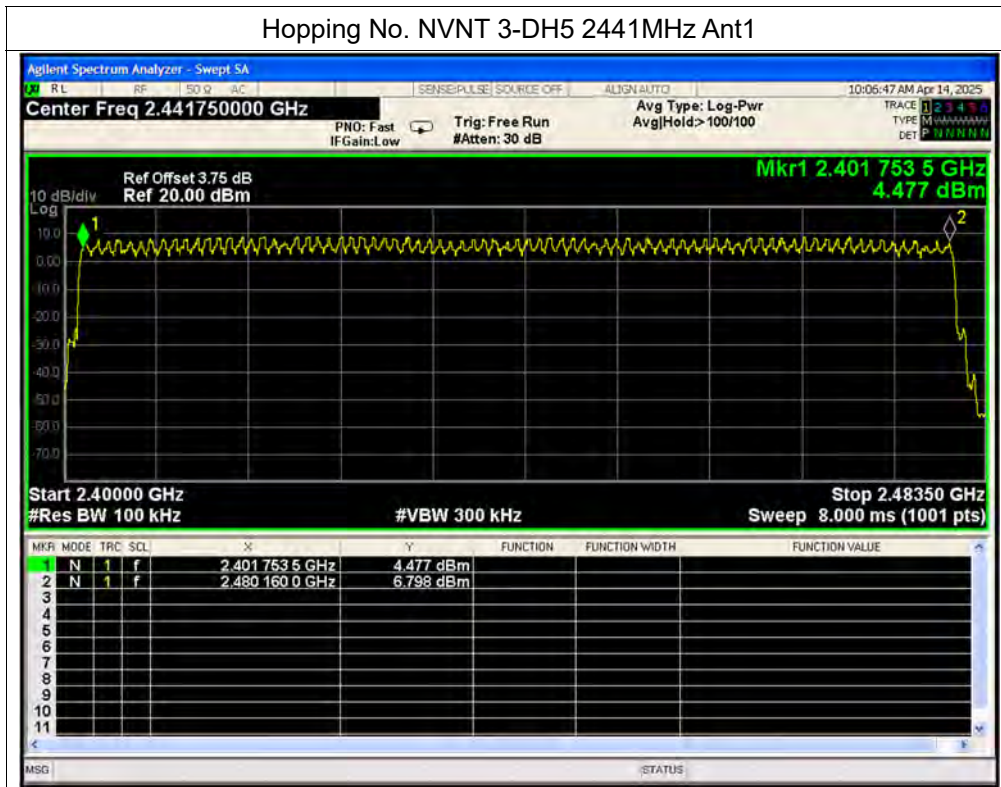


**A.2. Duty Cycle of Test Signal**

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.64	1.1	0.34
NVNT	1-DH5	2441	Ant1	77.6	1.1	0.34
NVNT	1-DH5	2480	Ant1	77.6	1.1	0.34
NVNT	2-DH5	2402	Ant1	78.12	1.07	0.34
NVNT	2-DH5	2441	Ant1	78.13	1.07	0.34
NVNT	2-DH5	2480	Ant1	78.13	1.07	0.34
NVNT	3-DH5	2402	Ant1	78.09	1.07	0.34
NVNT	3-DH5	2441	Ant1	78.09	1.07	0.34
NVNT	3-DH5	2480	Ant1	78.09	1.07	0.34




Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

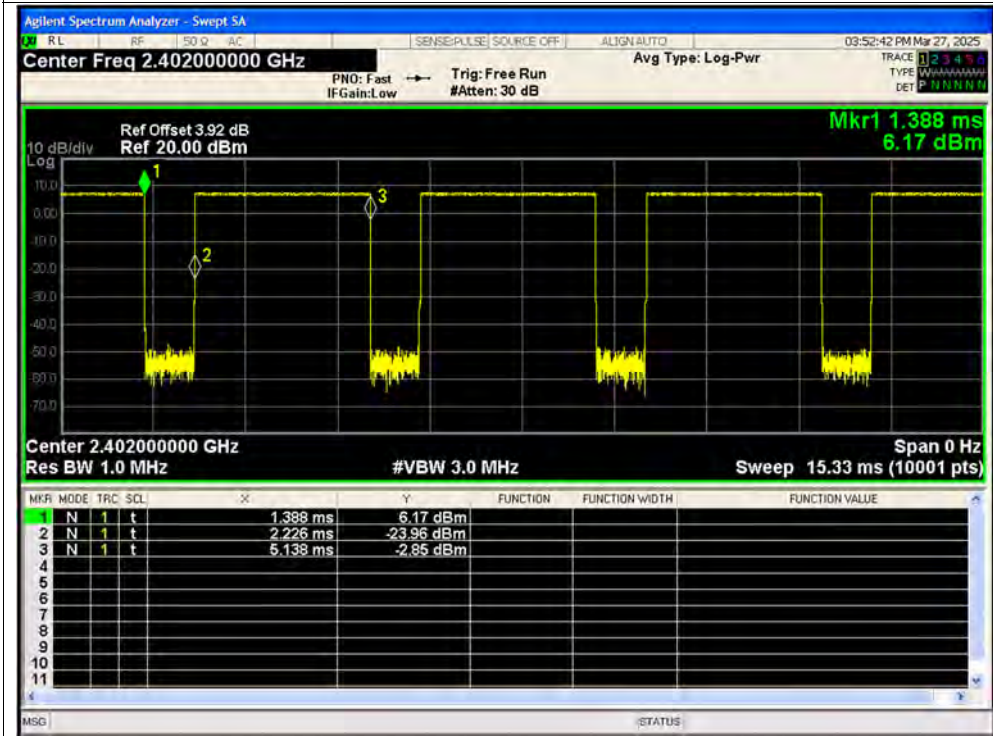


Duty Cycle NVNT 1-DH5 2441MHz Ant1

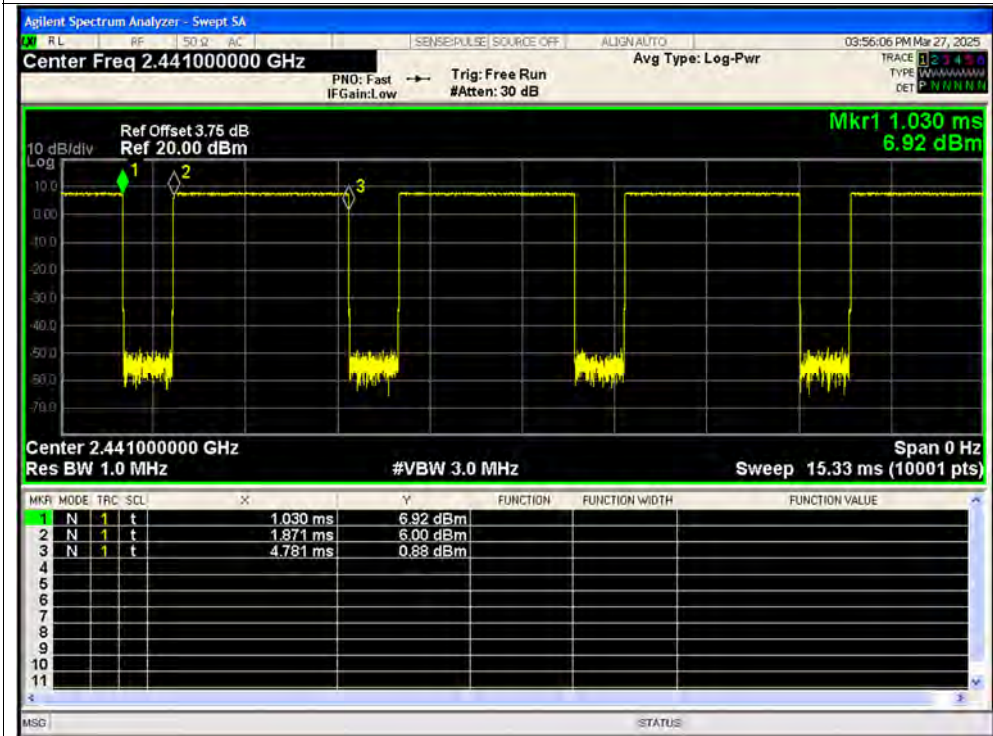




Duty Cycle NVNT 1-DH5 2480MHz Ant1

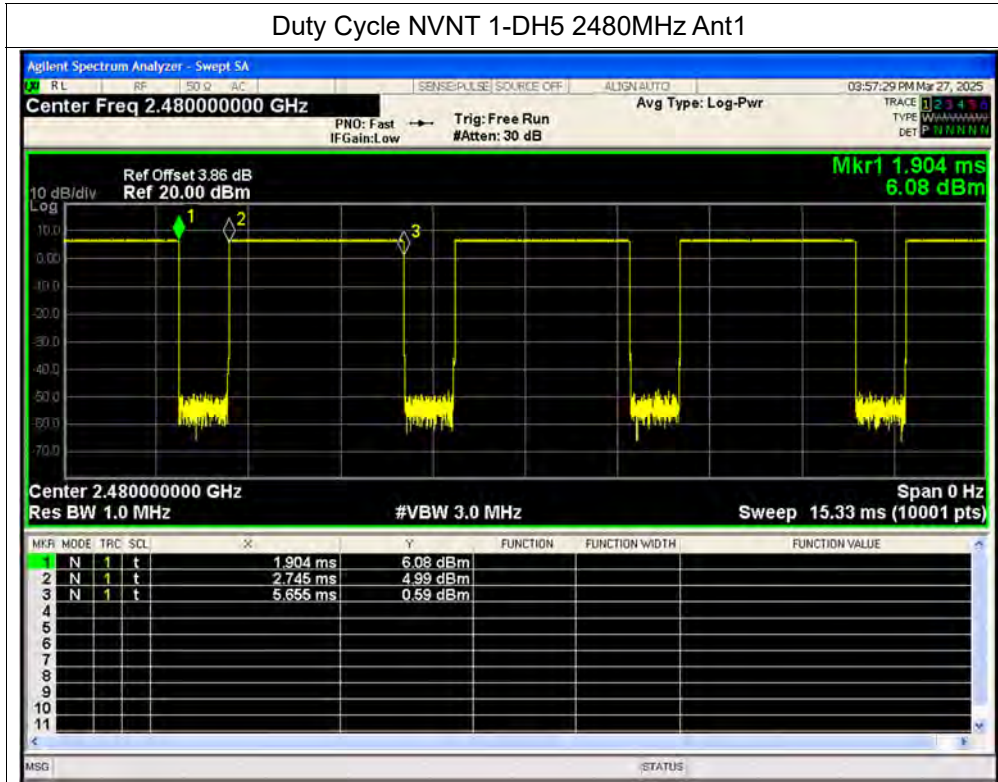


Duty Cycle NVNT 2-DH5 2402MHz Ant1

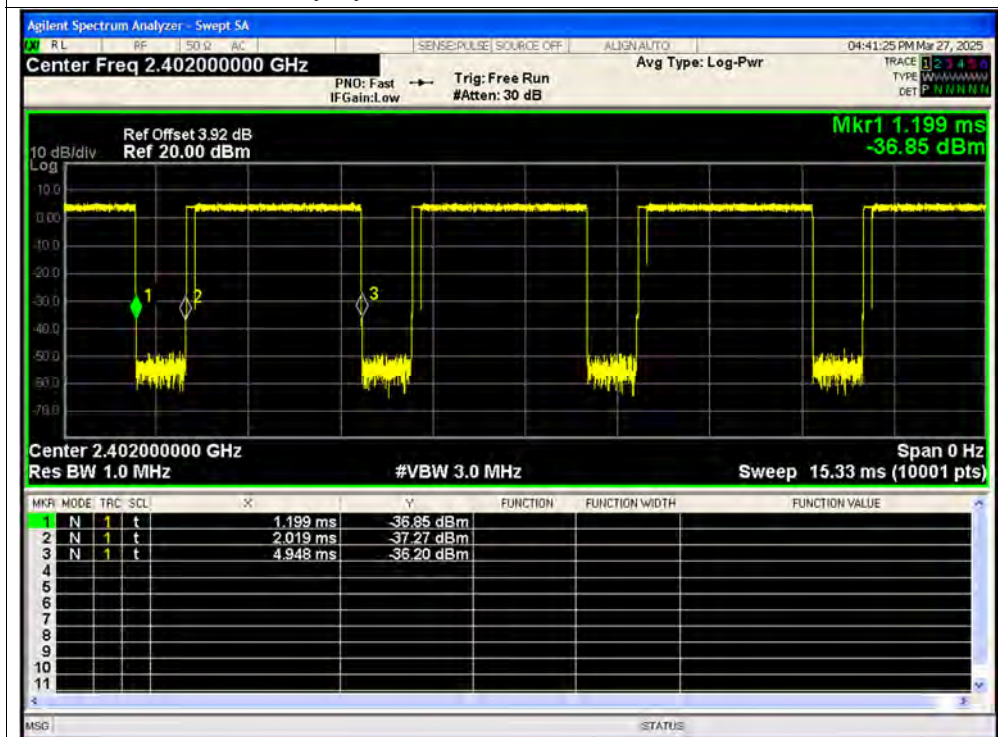




Duty Cycle NVNT 2-DH5 2441MHz Ant1

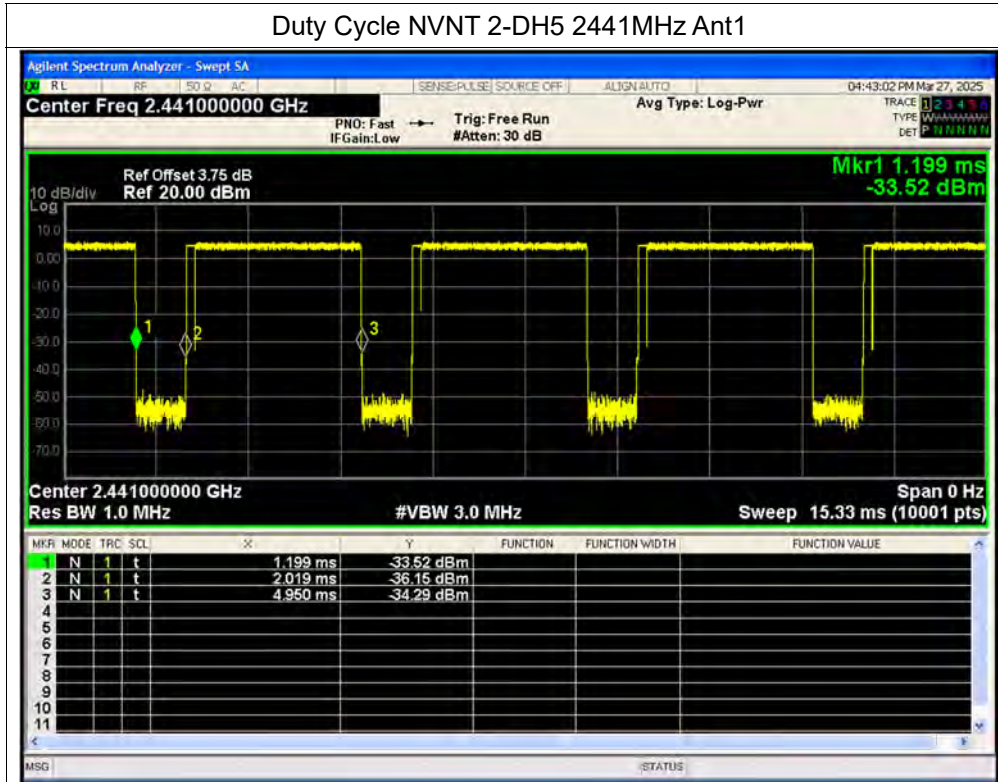


Duty Cycle NVNT 2-DH5 2480MHz Ant1

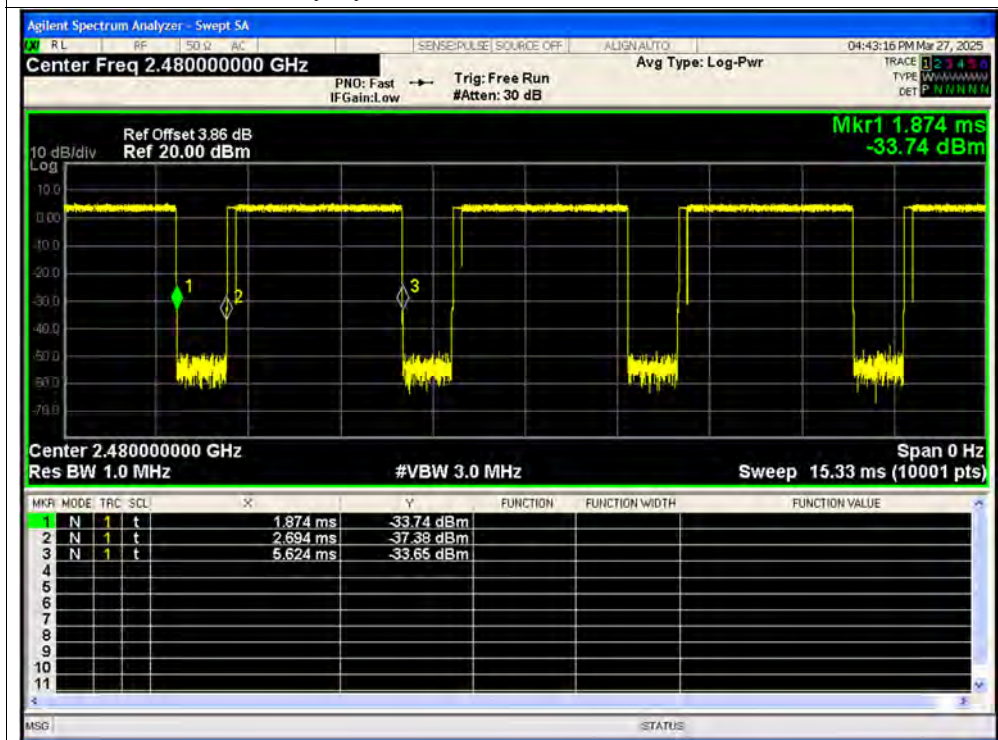





Duty Cycle NVNT 3-DH5 2402MHz Ant1

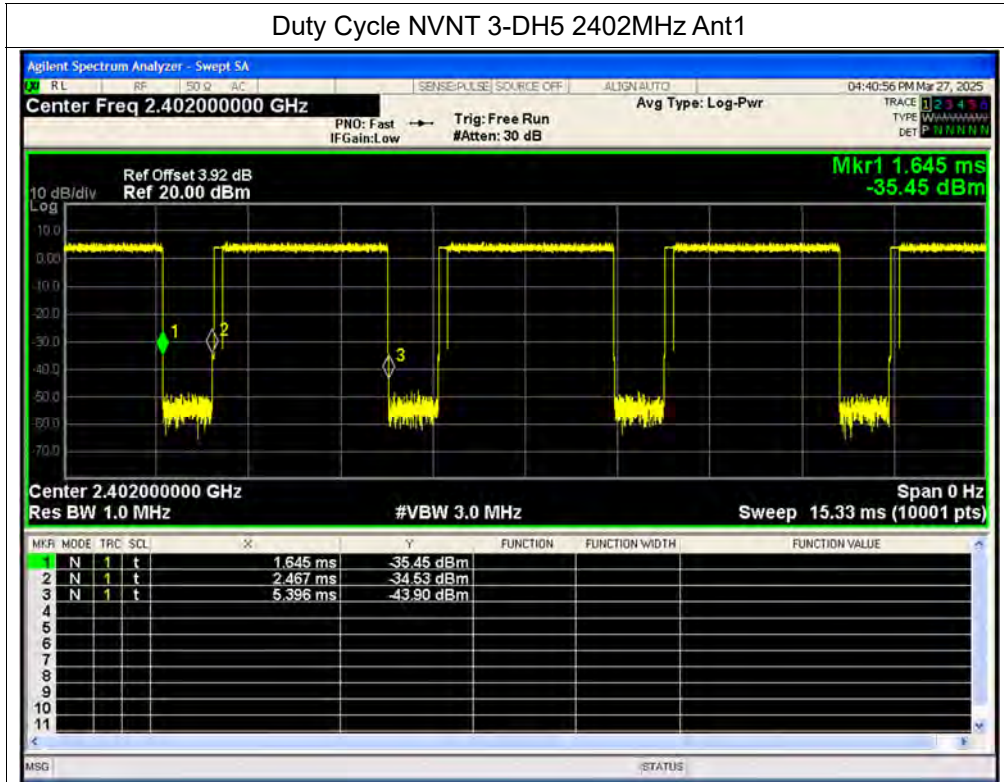

Duty Cycle NVNT 3-DH5 2441MHz Ant1

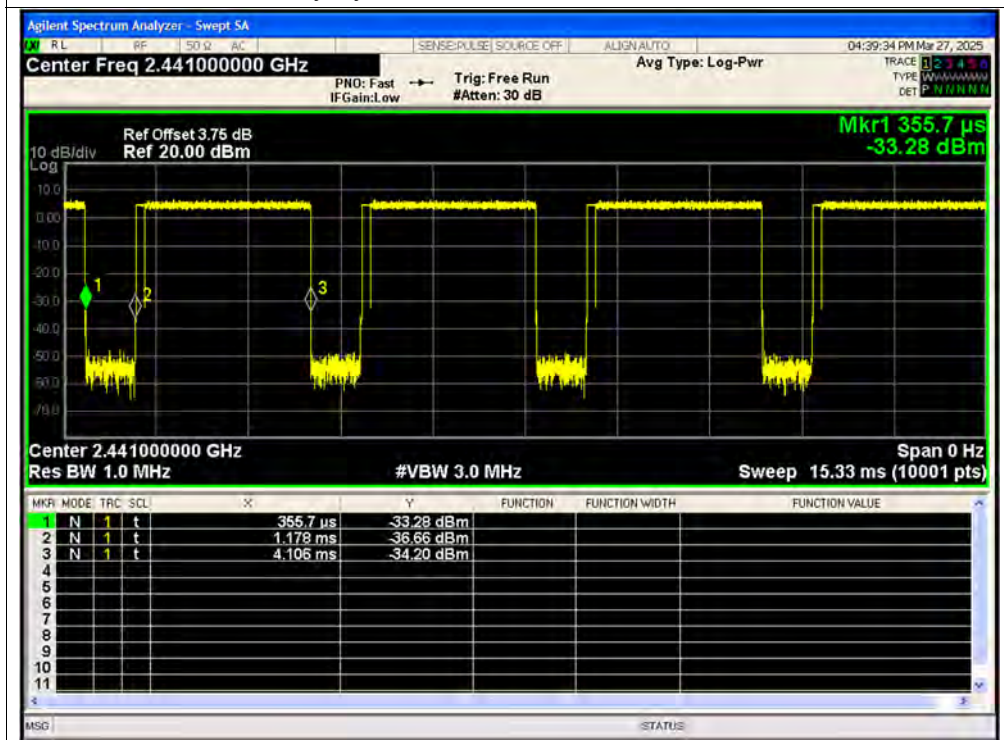

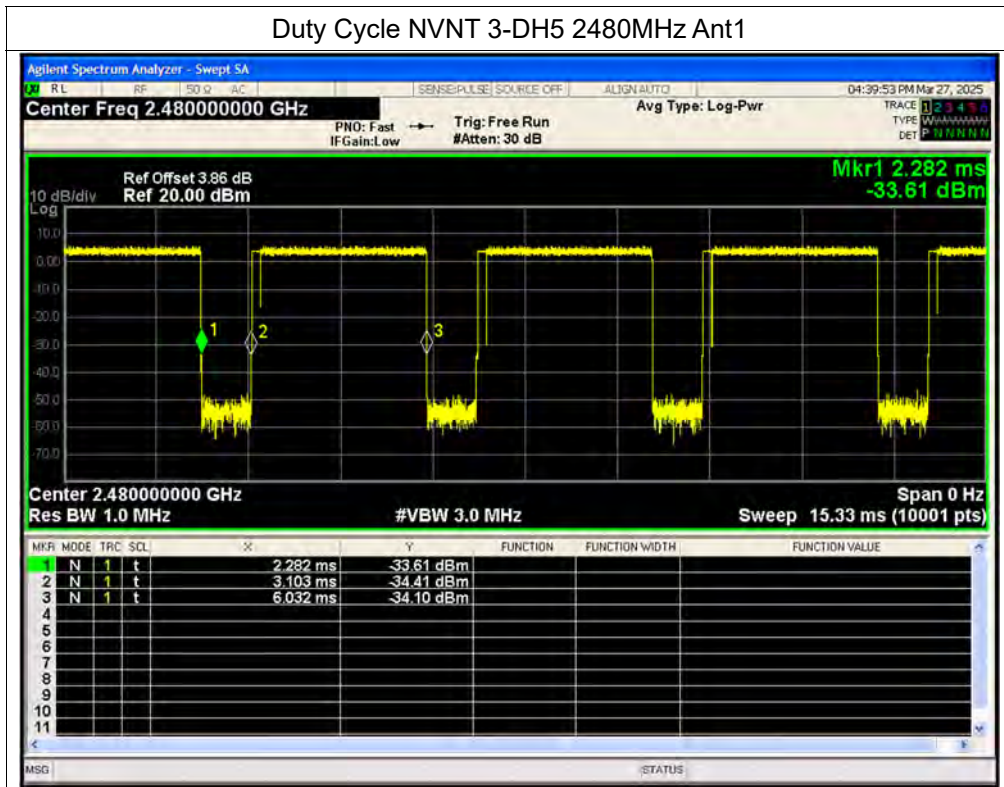

**A.3. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	10.83	0	10.83	0.01211	30	Pass
NVNT	1-DH5	2441	Ant1	11.04	0	11.04	0.01271	30	Pass
NVNT	1-DH5	2480	Ant1	10.04	0	10.04	0.01009	30	Pass
NVNT	2-DH5	2402	Ant1	9.14	0	9.14	0.0082	30	Pass
NVNT	2-DH5	2441	Ant1	9.8	0	9.8	0.00955	30	Pass
NVNT	2-DH5	2480	Ant1	8.99	0	8.99	0.00793	30	Pass
NVNT	3-DH5	2402	Ant1	9.41	0	9.41	0.00873	30	Pass
NVNT	3-DH5	2441	Ant1	10.03	0	10.03	0.01007	30	Pass
NVNT	3-DH5	2480	Ant1	9.26	0	9.26	0.00843	30	Pass




Test Graphs

Peak Power NVNT 1-DH5 2402MHz Ant1




Peak Power NVNT 1-DH5 2441MHz Ant1

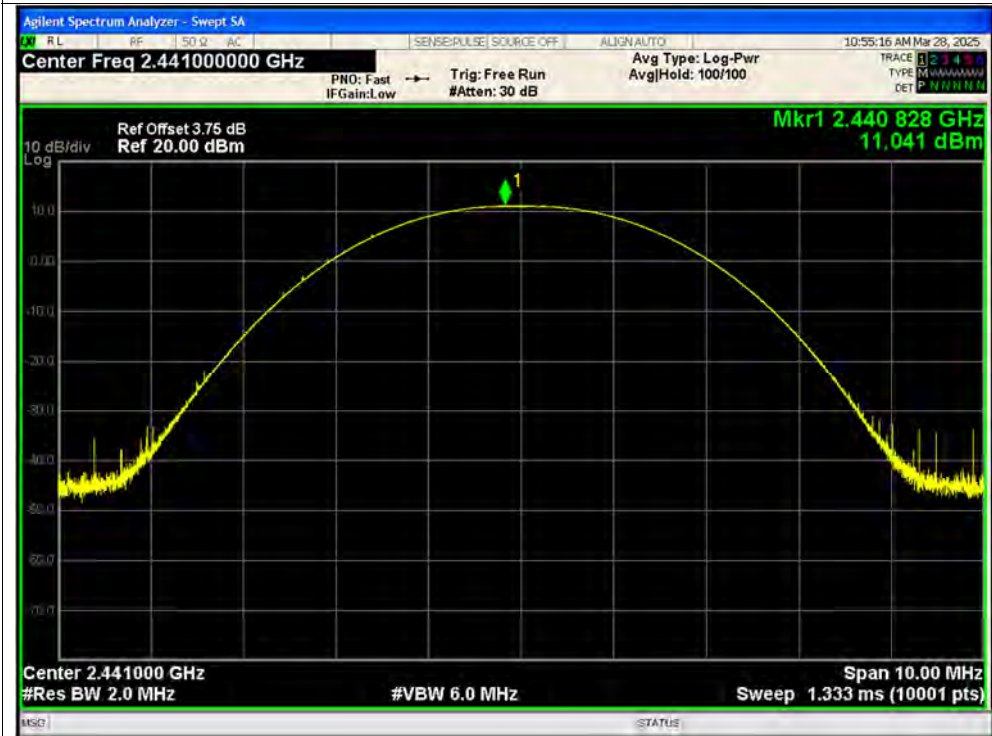



Peak Power NVNT 1-DH5 2480MHz Ant1

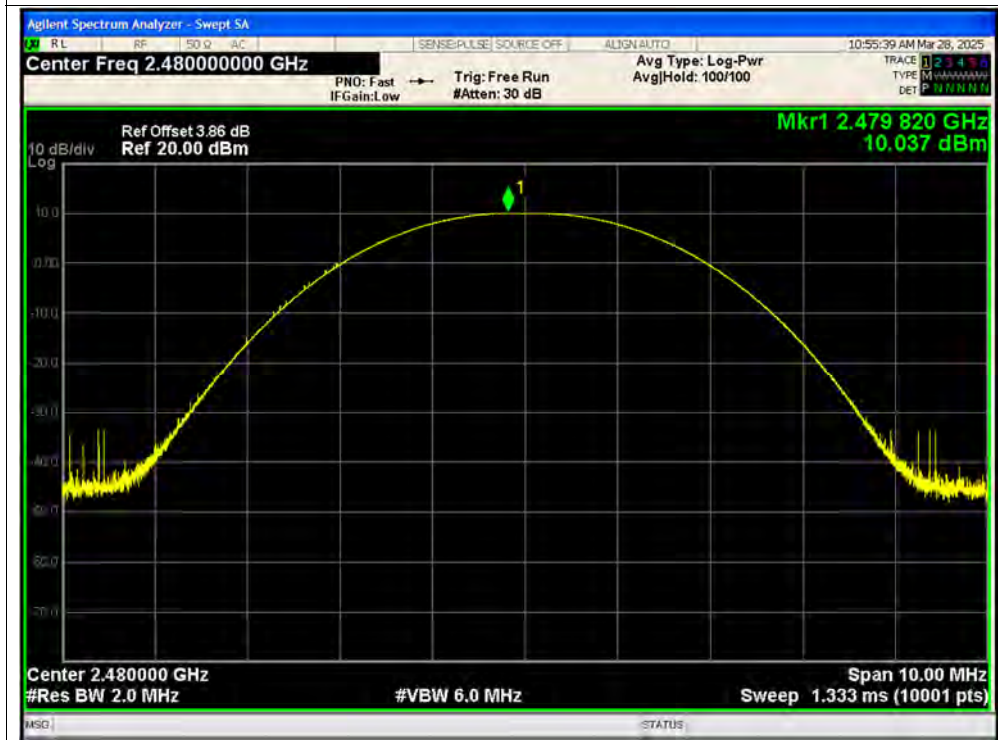

Peak Power NVNT 2-DH5 2402MHz Ant1






Peak Power NVNT 2-DH5 2441MHz Ant1



Peak Power NVNT 2-DH5 2480MHz Ant1

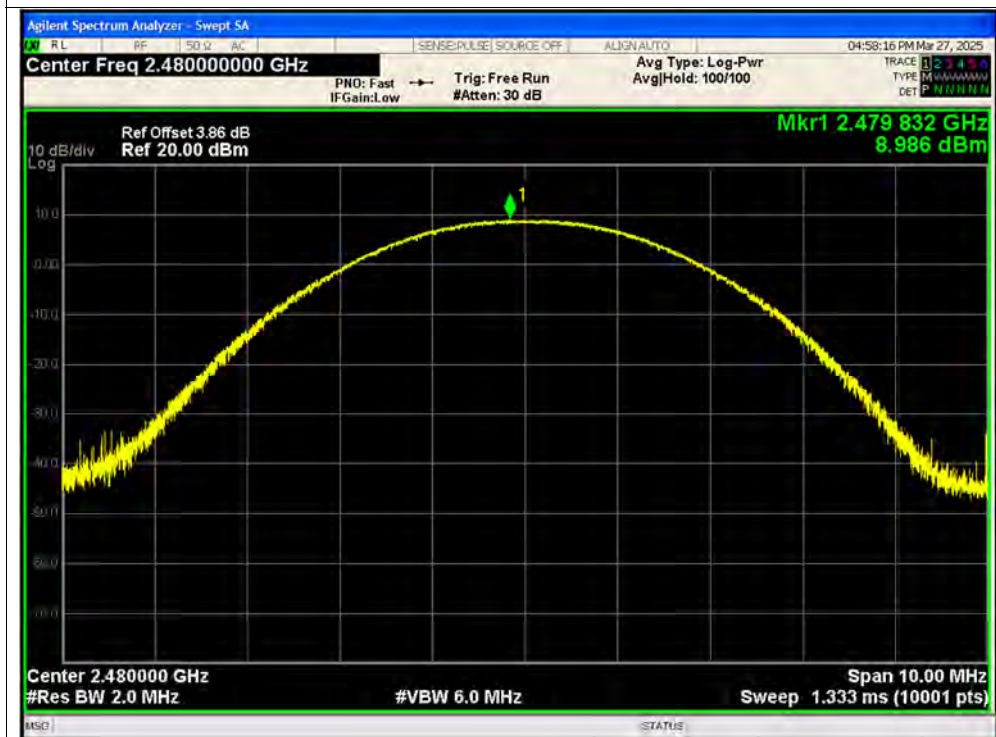





Peak Power NVNT 3-DH5 2402MHz Ant1



Peak Power NVNT 3-DH5 2441MHz Ant1

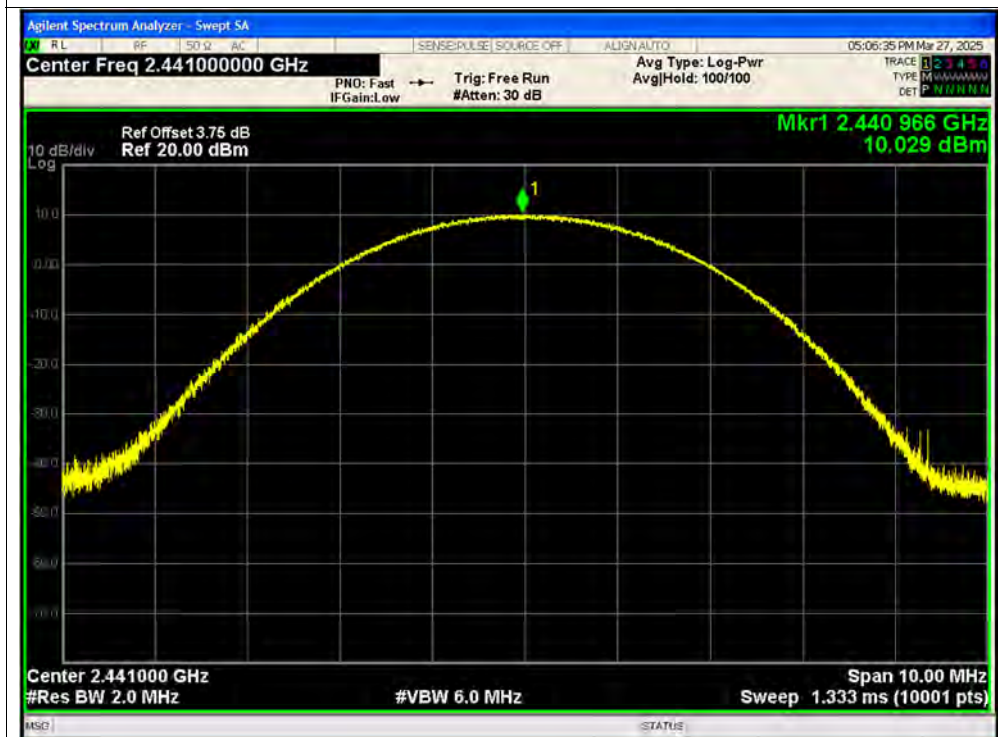

Peak Power NVNT 3-DH5 2480MHz Ant1

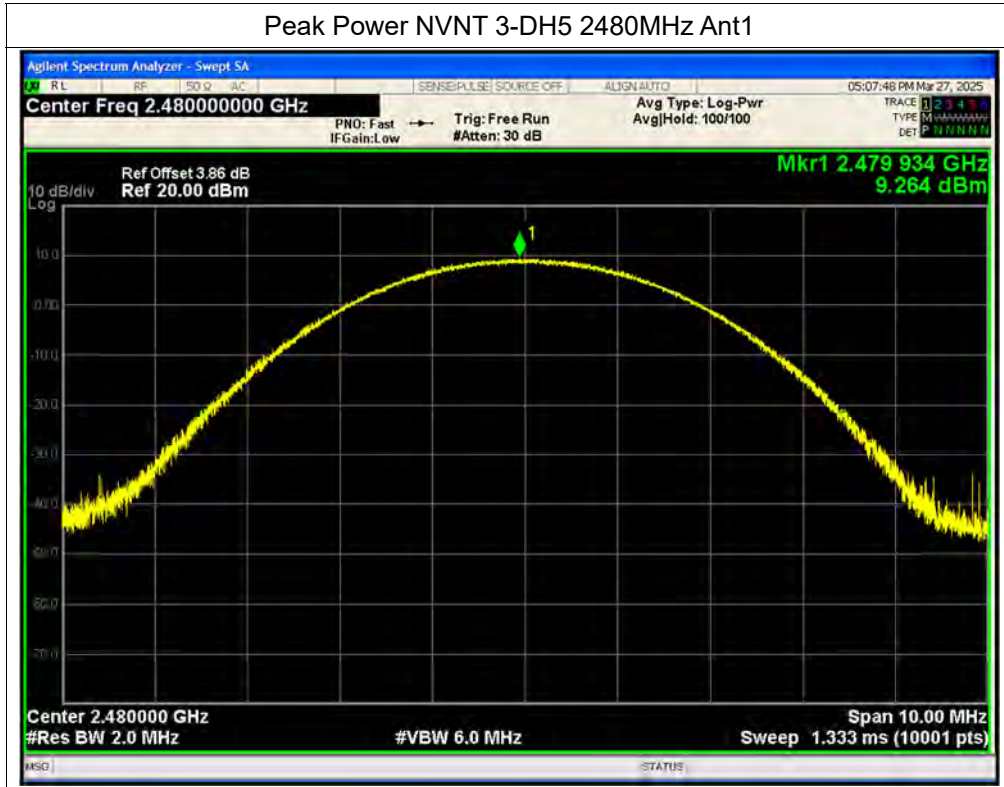

**A.4. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	9.27	1.1	10.37	0.01089	30	Pass
NVNT	1-DH5	2441	Ant1	9.78	1.1	10.88	0.01225	30	Pass
NVNT	1-DH5	2480	Ant1	8.53	1.1	9.63	0.00918	30	Pass
NVNT	2-DH5	2402	Ant1	5.55	1.07	6.62	0.00459	30	Pass
NVNT	2-DH5	2441	Ant1	6.06	1.07	7.13	0.00516	30	Pass
NVNT	2-DH5	2480	Ant1	5.38	1.07	6.45	0.00442	30	Pass
NVNT	3-DH5	2402	Ant1	4.49	1.07	5.56	0.0036	30	Pass
NVNT	3-DH5	2441	Ant1	6.15	1.07	7.22	0.00527	30	Pass
NVNT	3-DH5	2480	Ant1	5.52	1.07	6.59	0.00456	30	Pass




Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1




Average Power NVNT 1-DH5 2441MHz Ant1

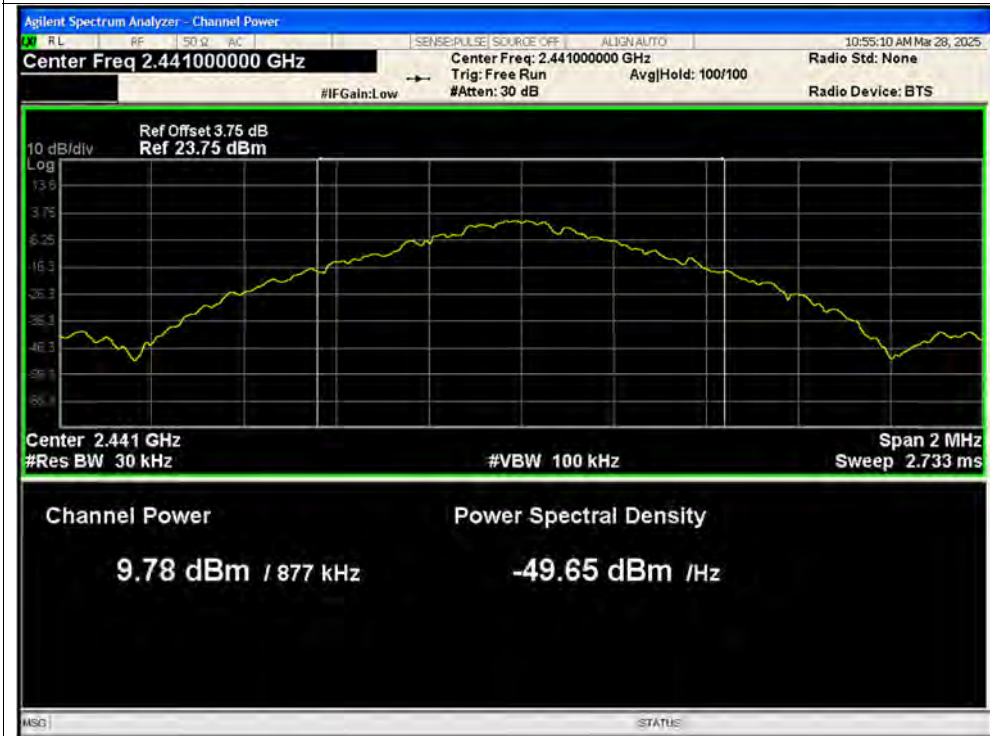



Average Power NVNT 1-DH5 2480MHz Ant1

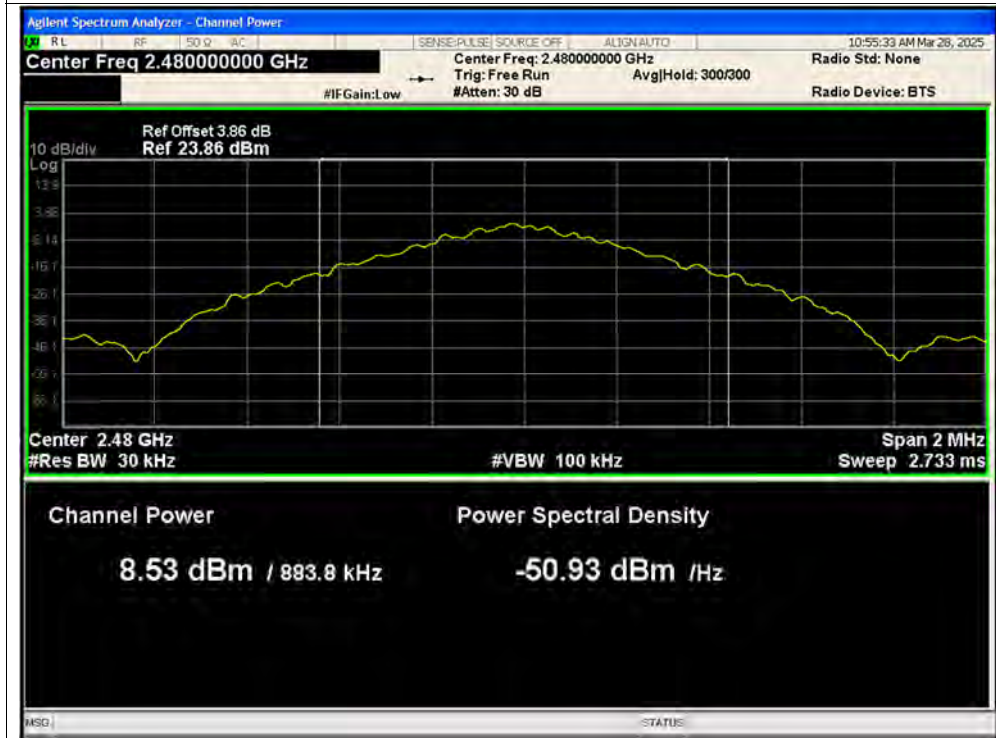


Average Power NVNT 2-DH5 2402MHz Ant1






Average Power NVNT 2-DH5 2441MHz Ant1

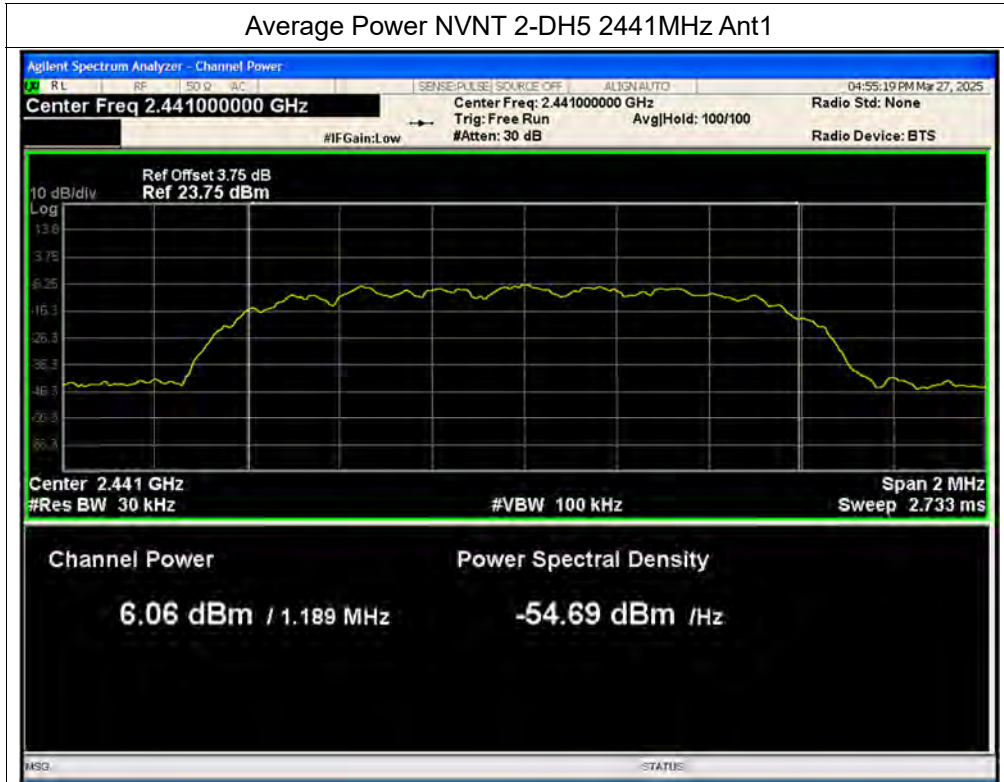


Average Power NVNT 2-DH5 2480MHz Ant1

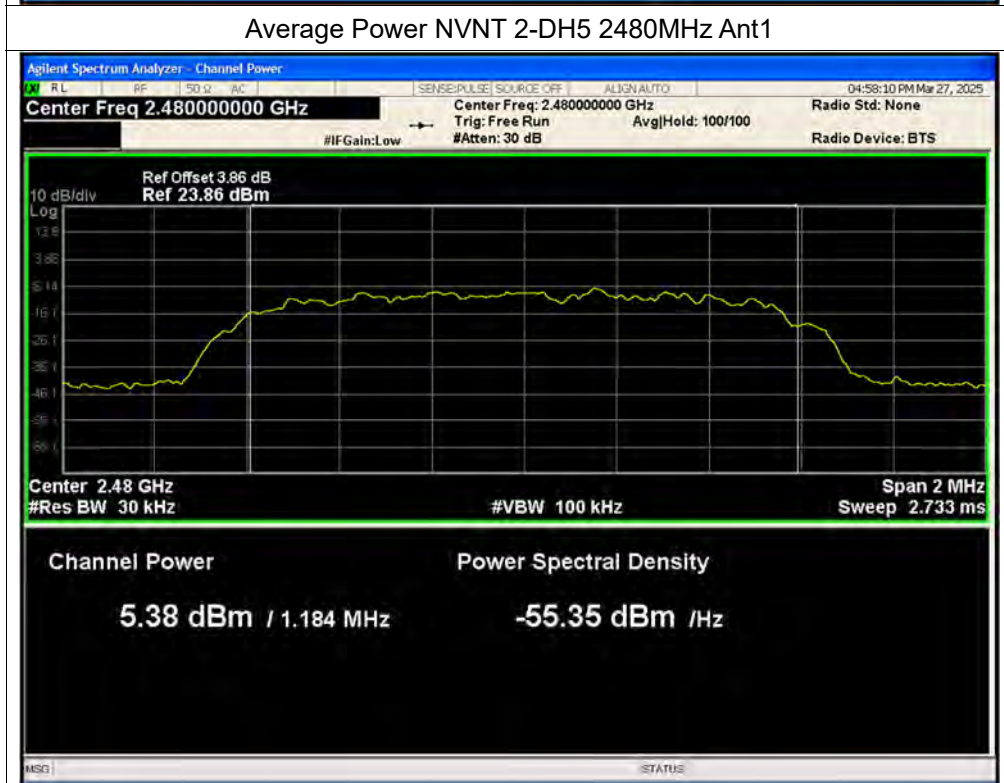





Average Power NVNT 3-DH5 2402MHz Ant1

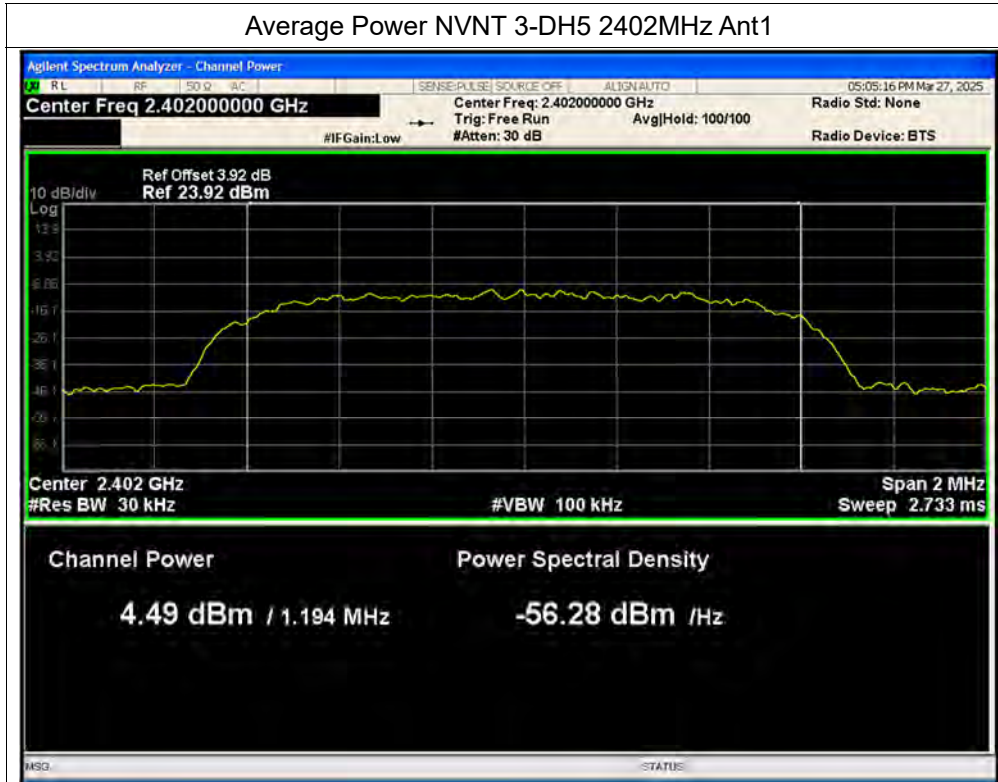

Average Power NVNT 3-DH5 2441MHz Ant1

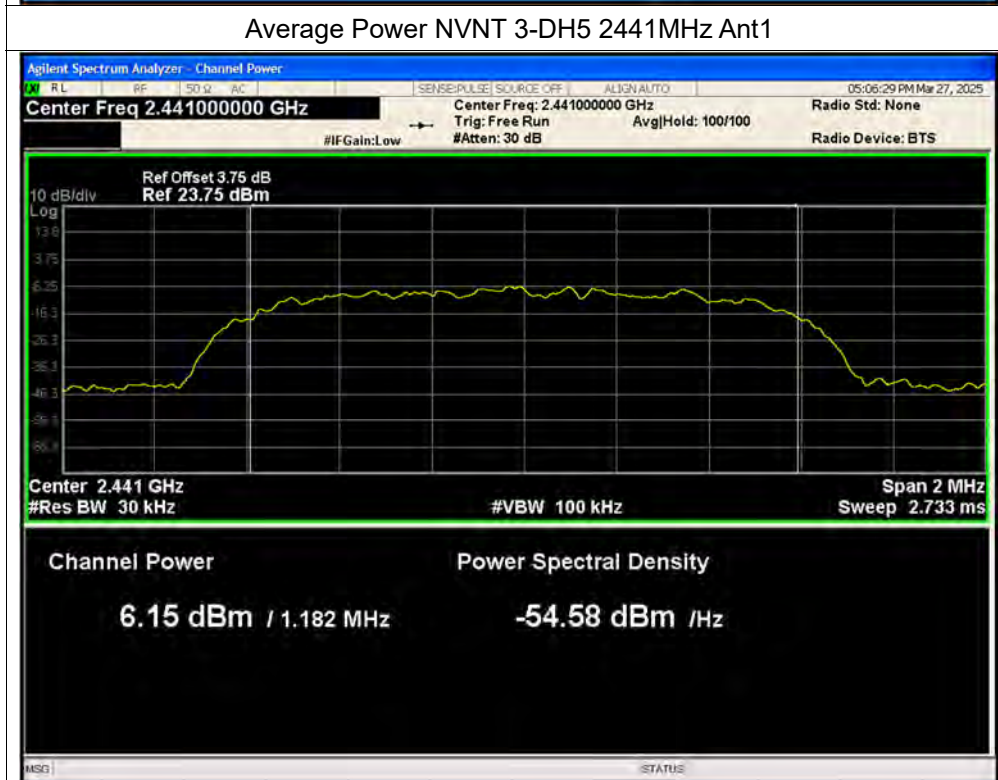

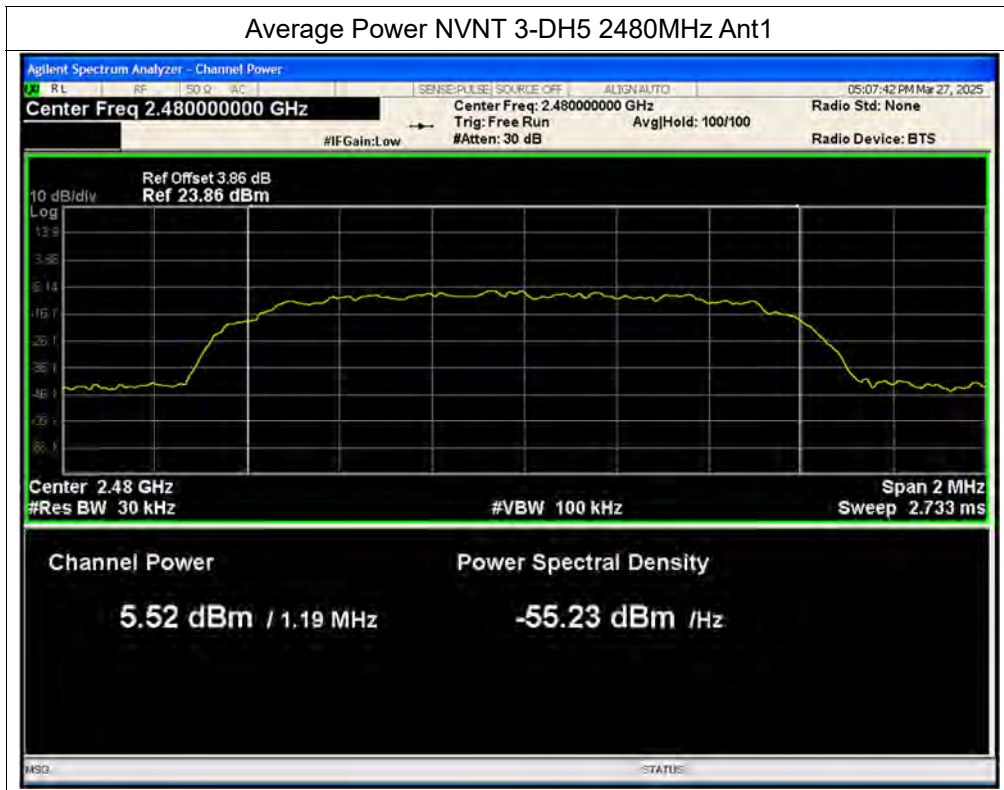



A.5. 20 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.9907
NVNT	1-DH5	2441	Ant1	0.9331
NVNT	1-DH5	2480	Ant1	0.9646
NVNT	2-DH5	2402	Ant1	1.284
NVNT	2-DH5	2441	Ant1	1.288
NVNT	2-DH5	2480	Ant1	1.288
NVNT	3-DH5	2402	Ant1	1.301
NVNT	3-DH5	2441	Ant1	1.302
NVNT	3-DH5	2480	Ant1	1.3



Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

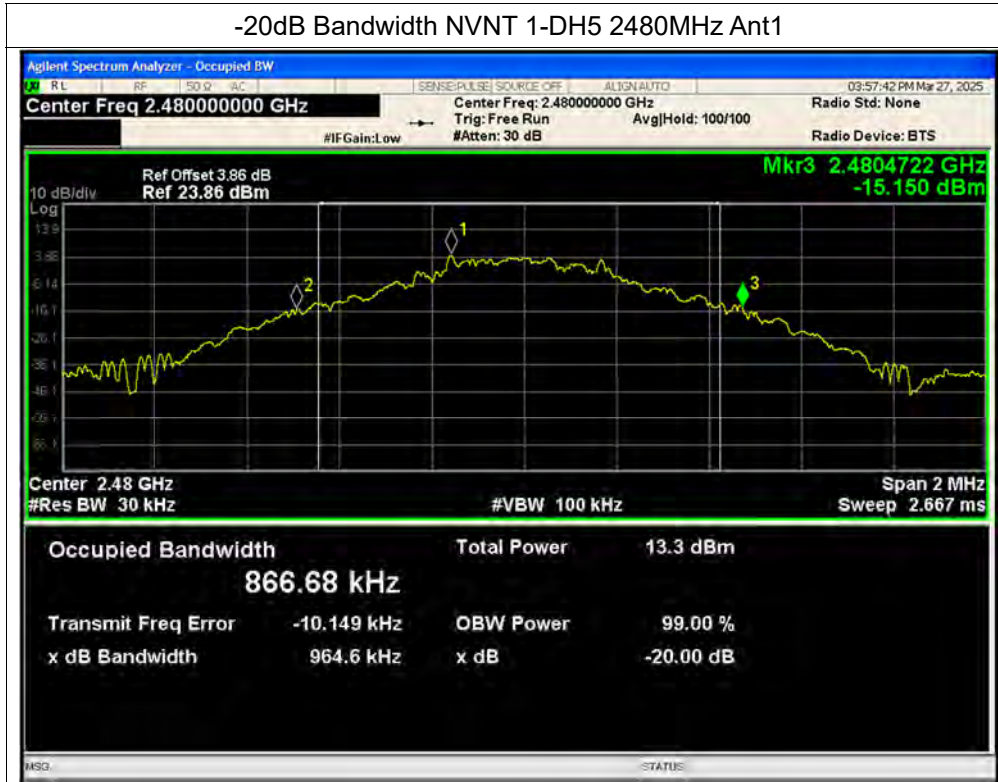


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

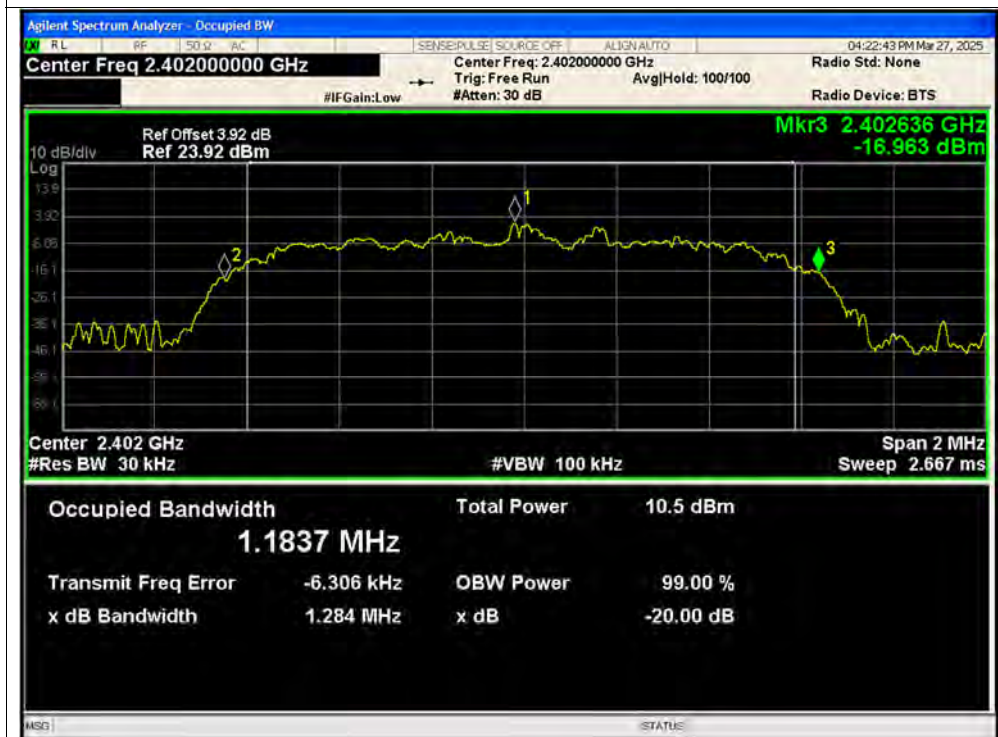



-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

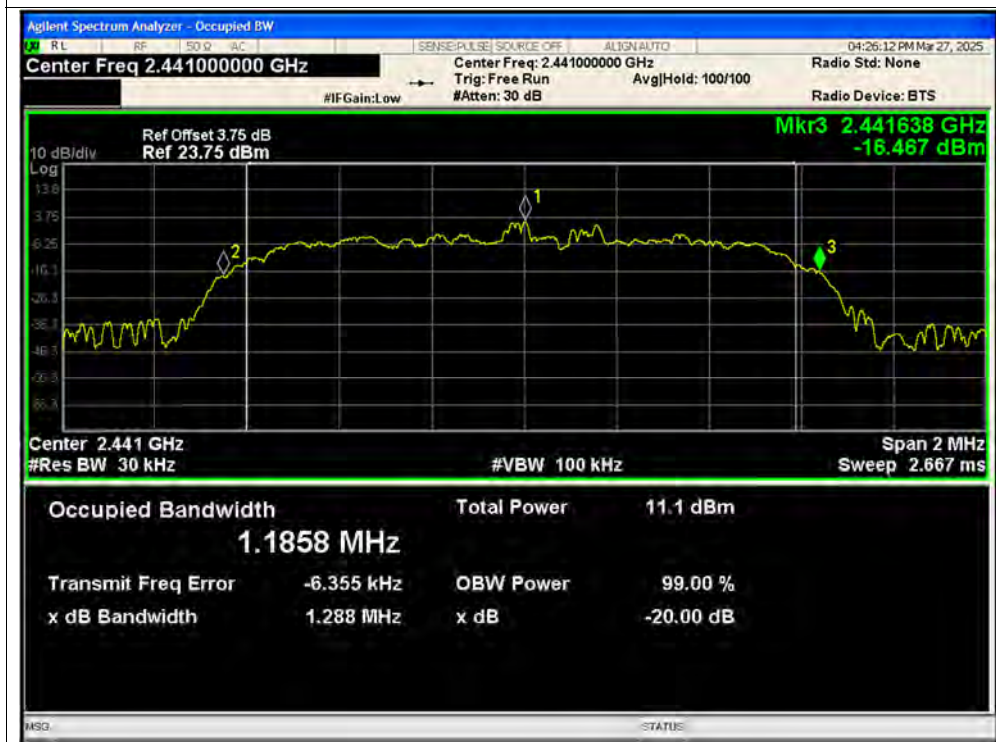


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1







-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

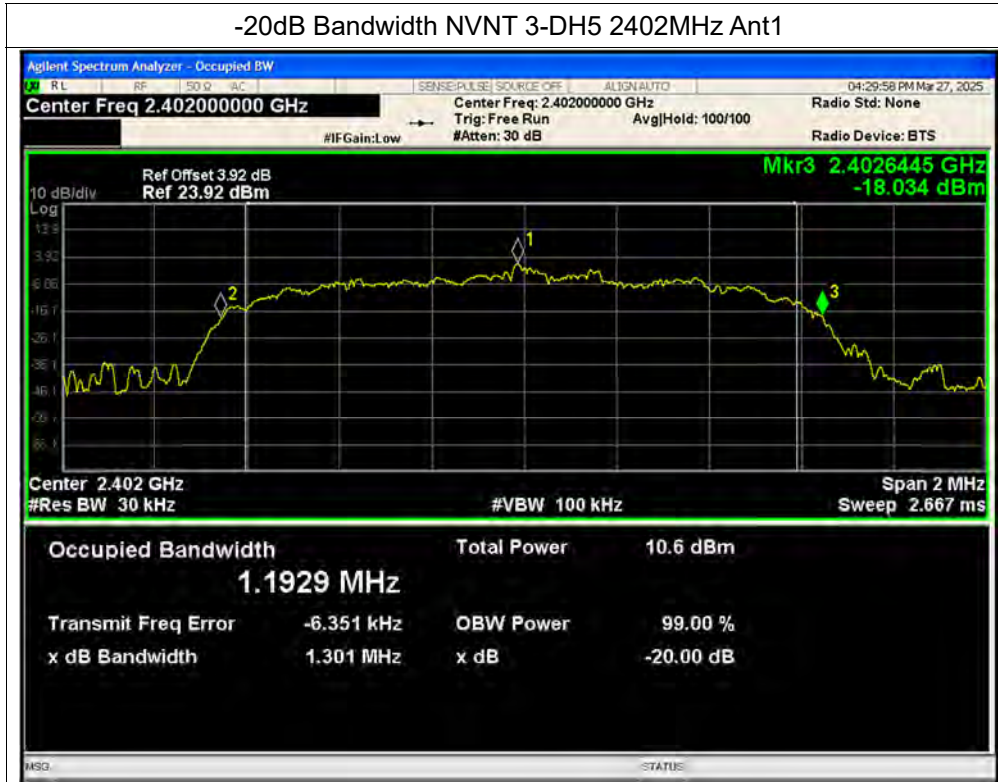

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

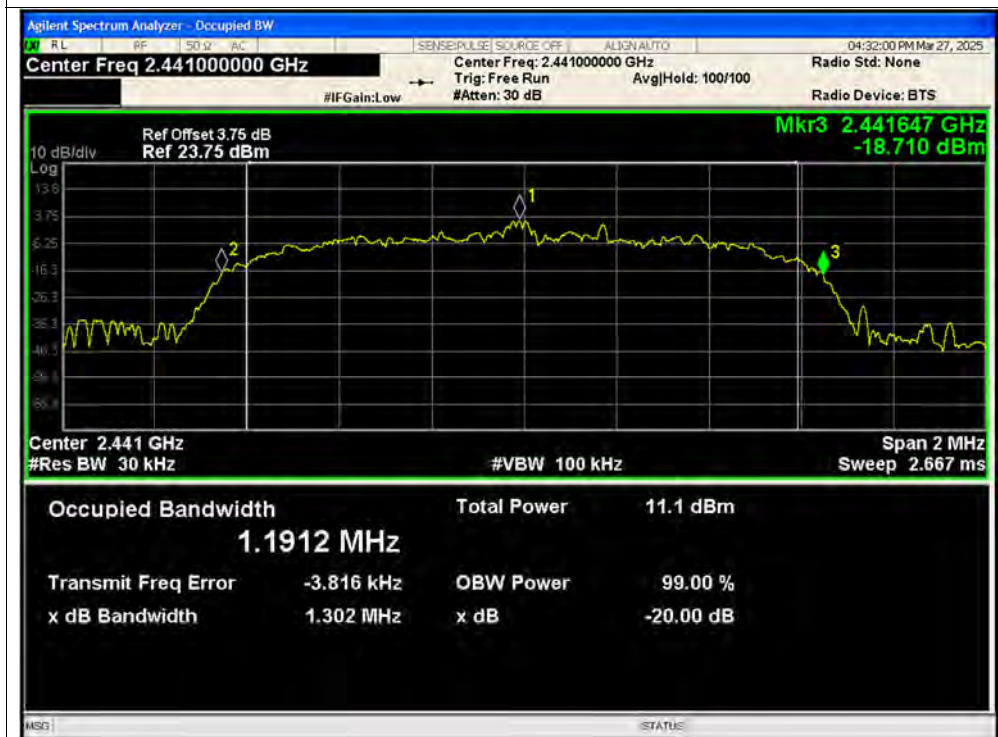

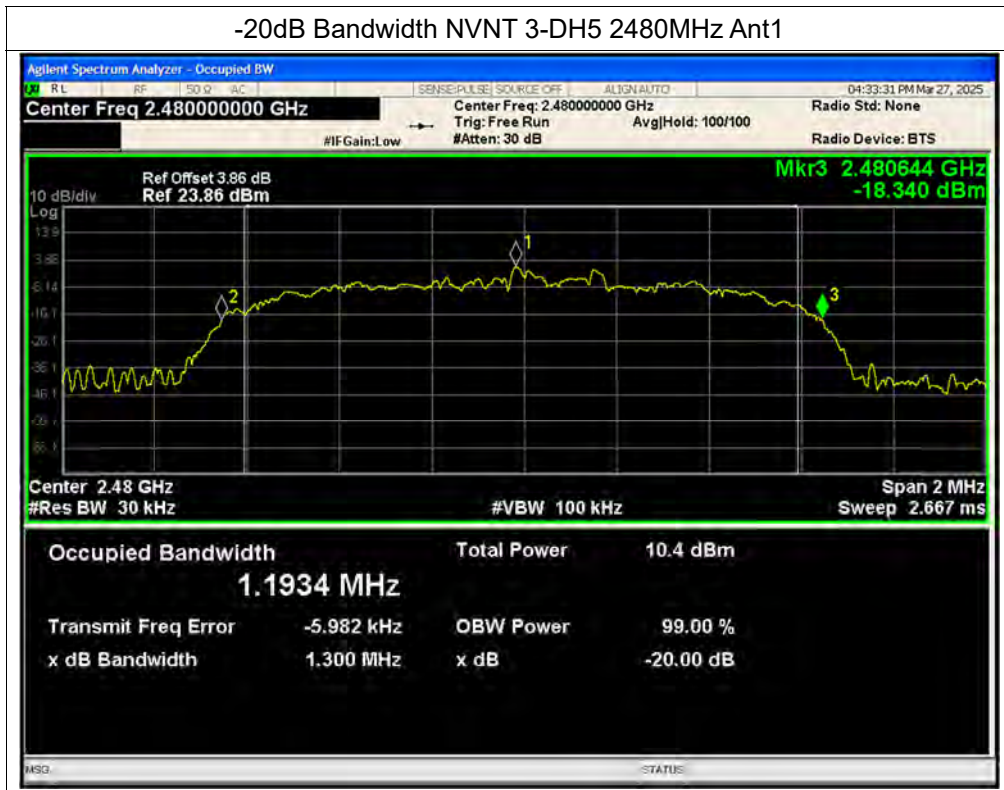

**A.6. Carried Frequency Separation**

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.828	2403.05	1.222	0.66	Pass
NVNT	1-DH5	Ant1	2440.814	2442.154	1.34	0.622	Pass
NVNT	1-DH5	Ant1	2479.01	2479.96	0.95	0.643	Pass
NVNT	2-DH5	Ant1	2401.996	2403	1.004	0.856	Pass
NVNT	2-DH5	Ant1	2441.018	2442.014	0.996	0.859	Pass
NVNT	2-DH5	Ant1	2479.03	2480.018	0.988	0.859	Pass
NVNT	3-DH5	Ant1	2401.998	2403.008	1.01	0.867	Pass
NVNT	3-DH5	Ant1	2441.016	2442.014	0.998	0.868	Pass
NVNT	3-DH5	Ant1	2479.002	2480.016	1.014	0.867	Pass



Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1



CFS NVNT 1-DH5 2441MHz Ant1






CFS NVNT 1-DH5 2480MHz Ant1




CFS NVNT 2-DH5 2402MHz Ant1

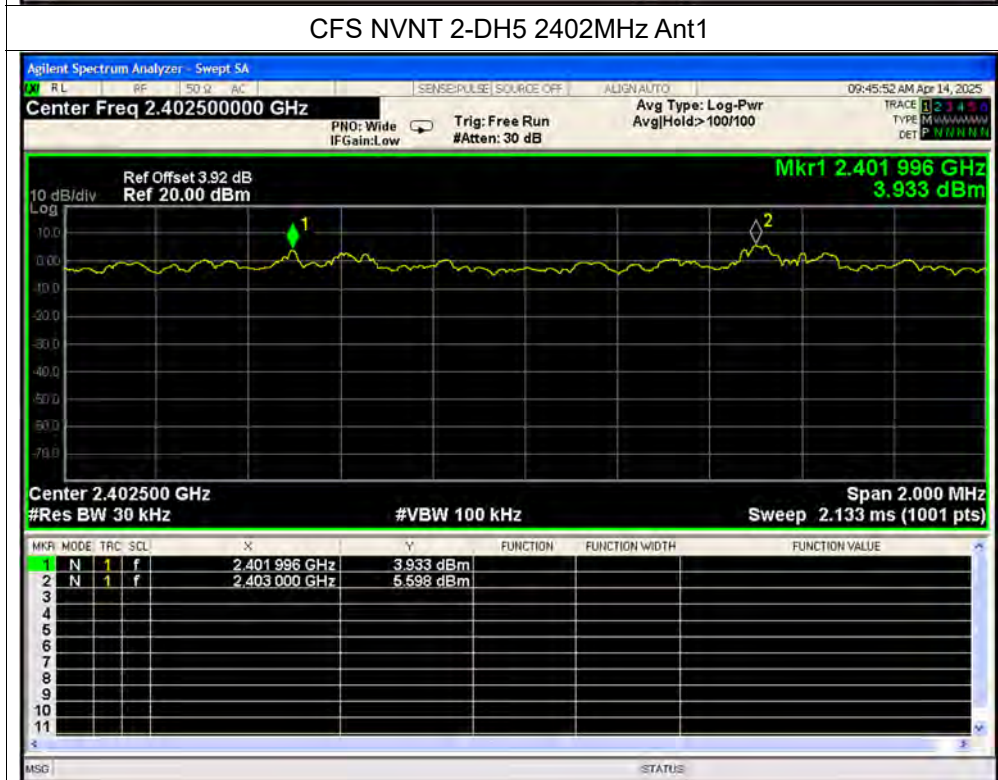




CFS NVNT 2-DH5 2441MHz Ant1

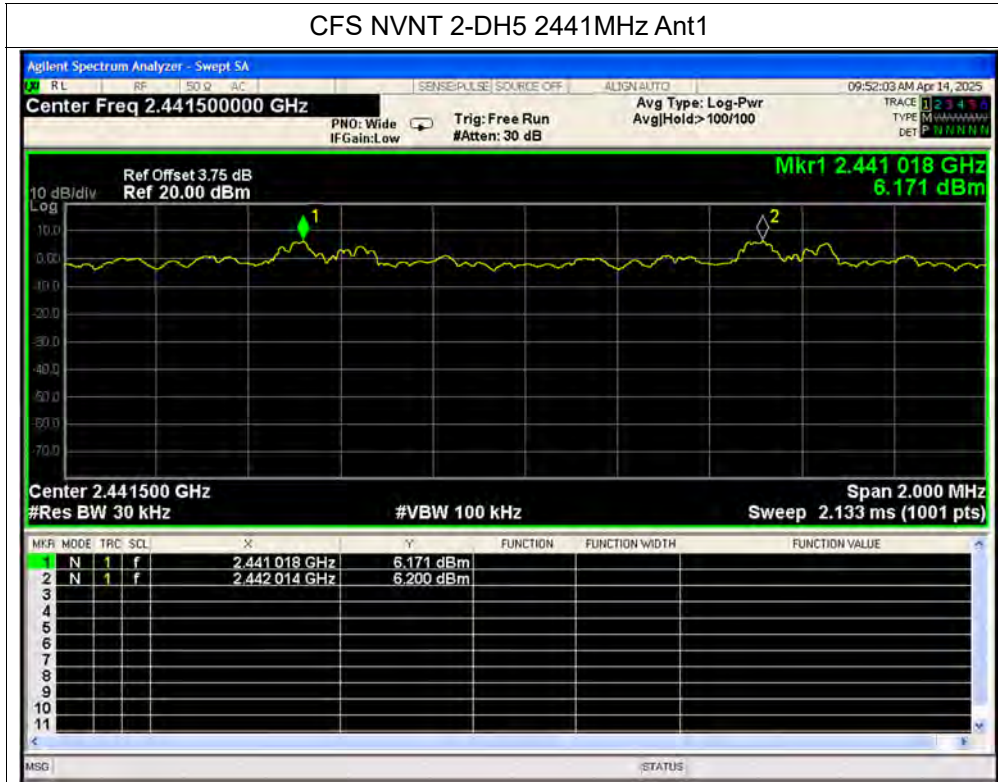


CFS NVNT 2-DH5 2480MHz Ant1

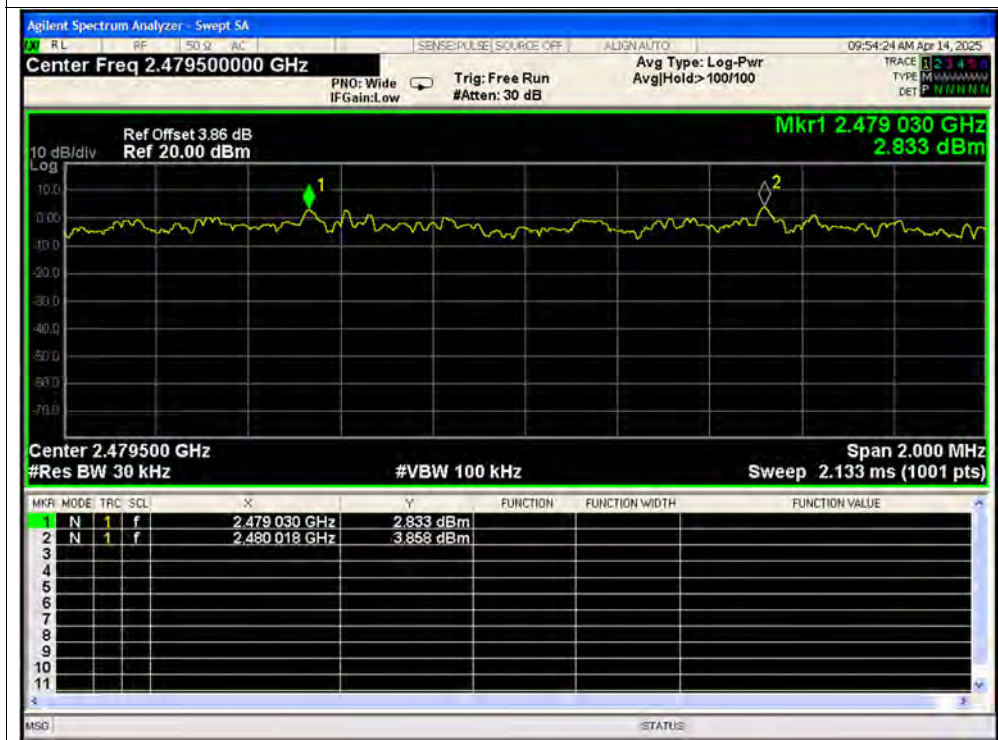





CFS NVNT 3-DH5 2402MHz Ant1

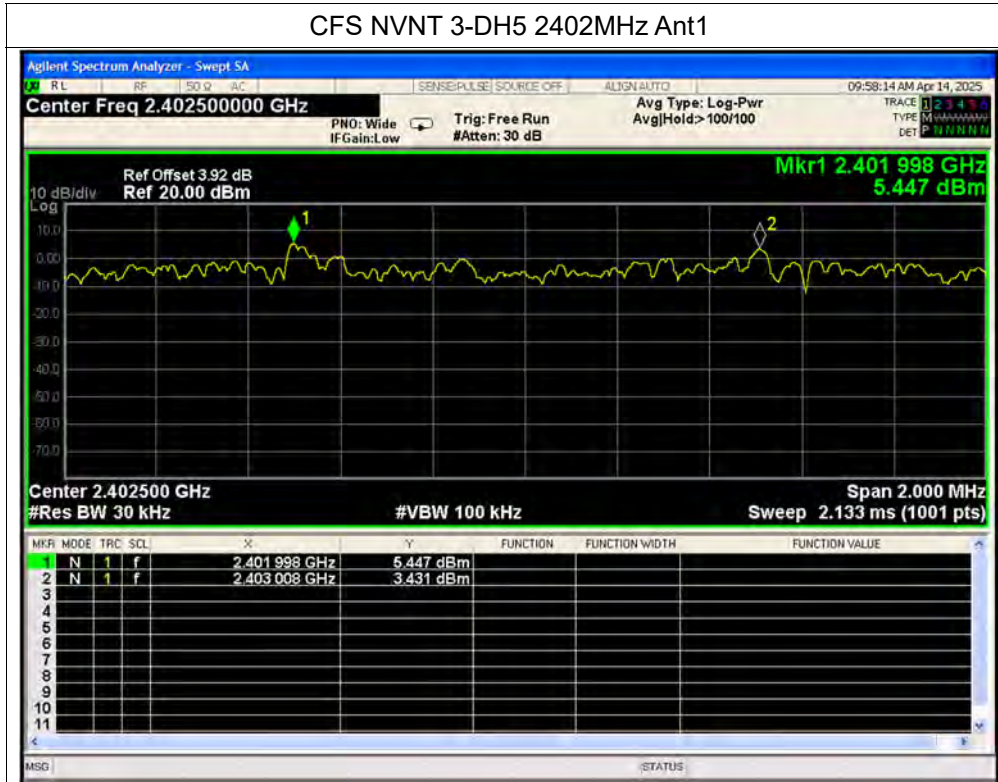

CFS NVNT 3-DH5 2441MHz Ant1

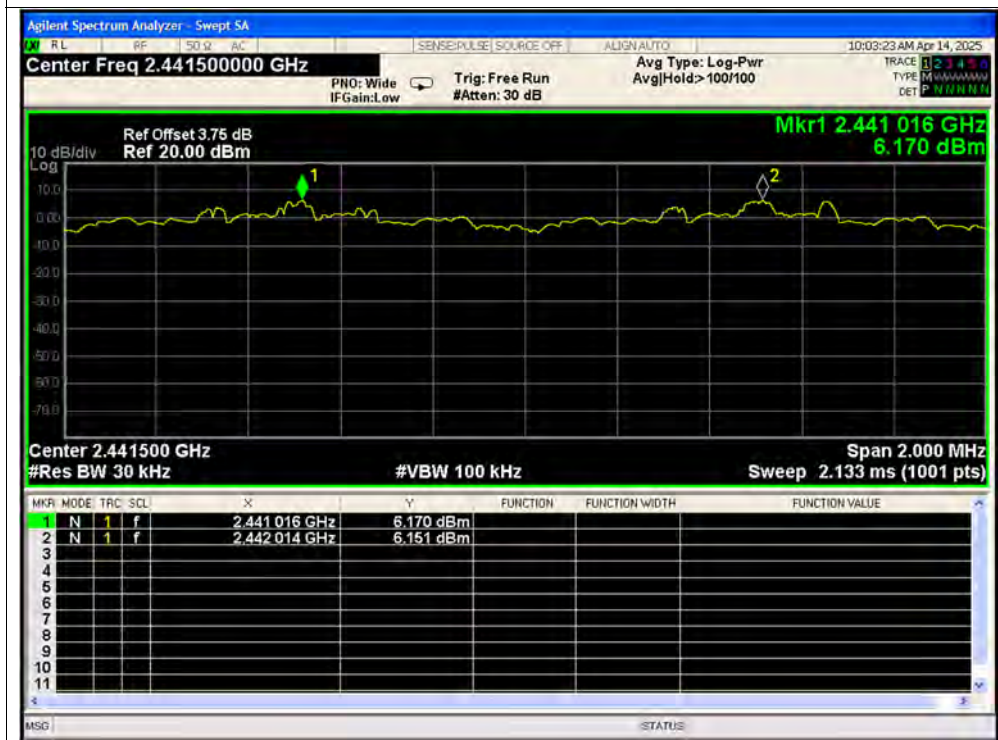

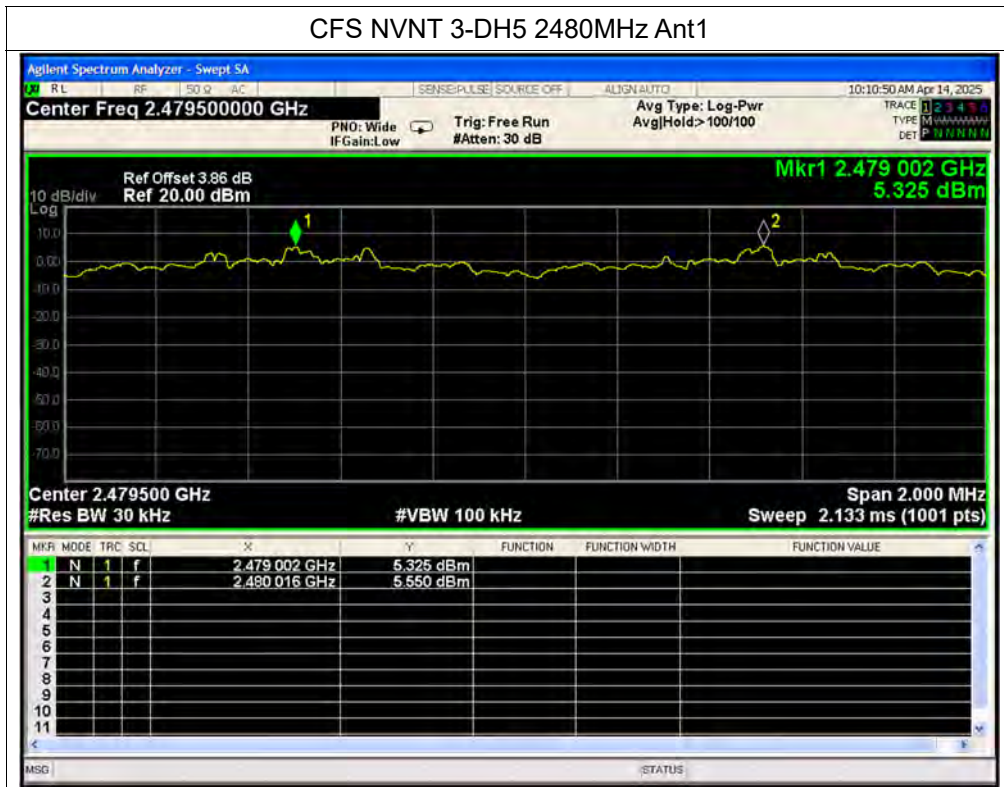


**A.7. Time of Occupancy (Dwell time)**

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.909	351.989	121	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.909	322.899	111	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.91	325.92	112	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.898	278.208	96	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.891	326.683	113	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.156	211.288	98	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.897	298.391	103	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.897	309.979	107	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.897	295.494	102	31600	400	Pass




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

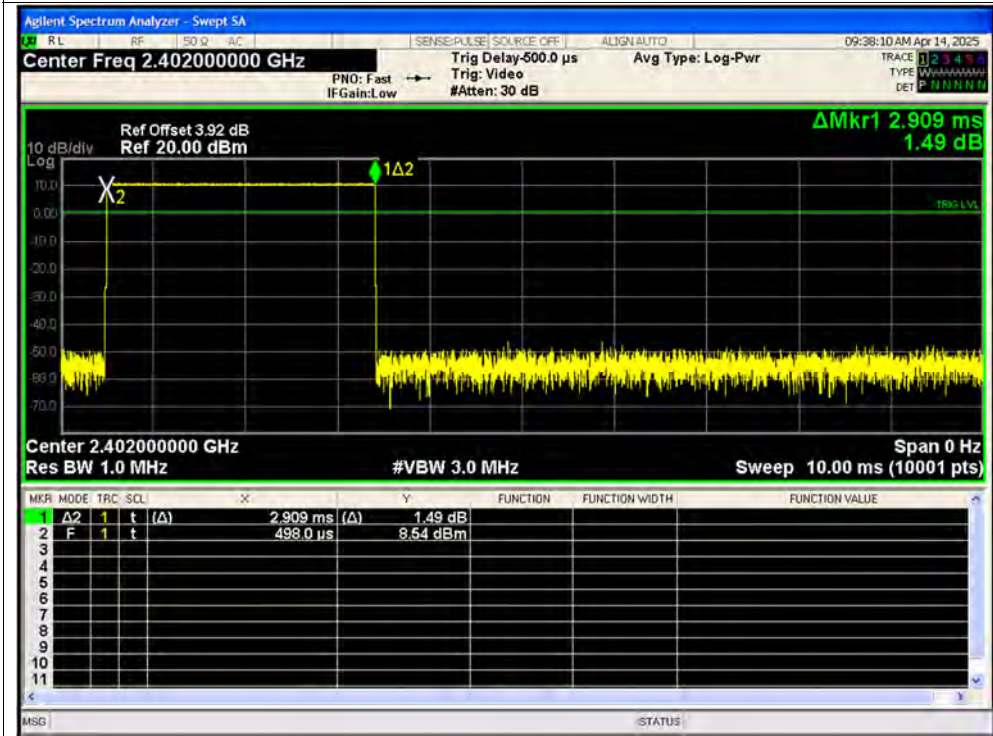


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

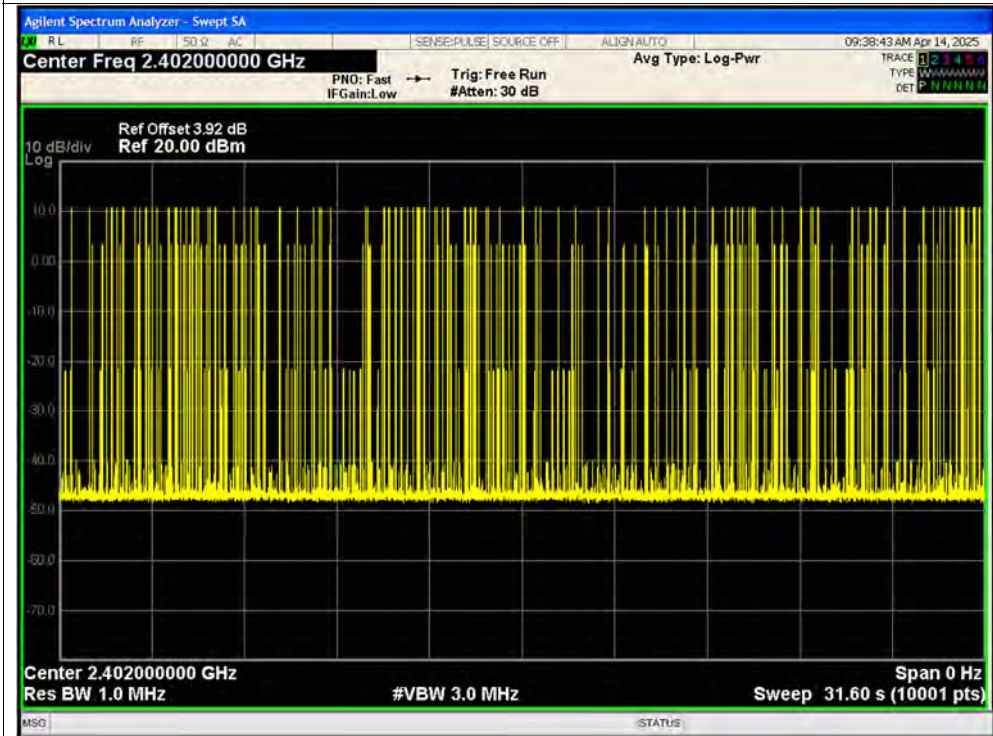



Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

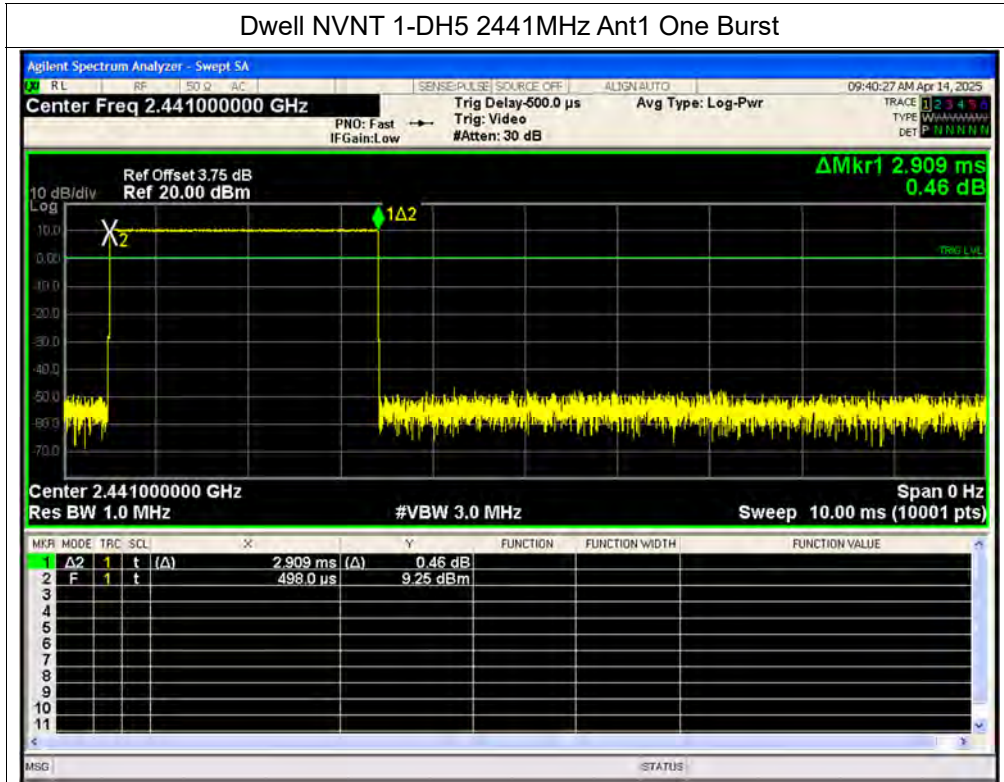


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated






Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

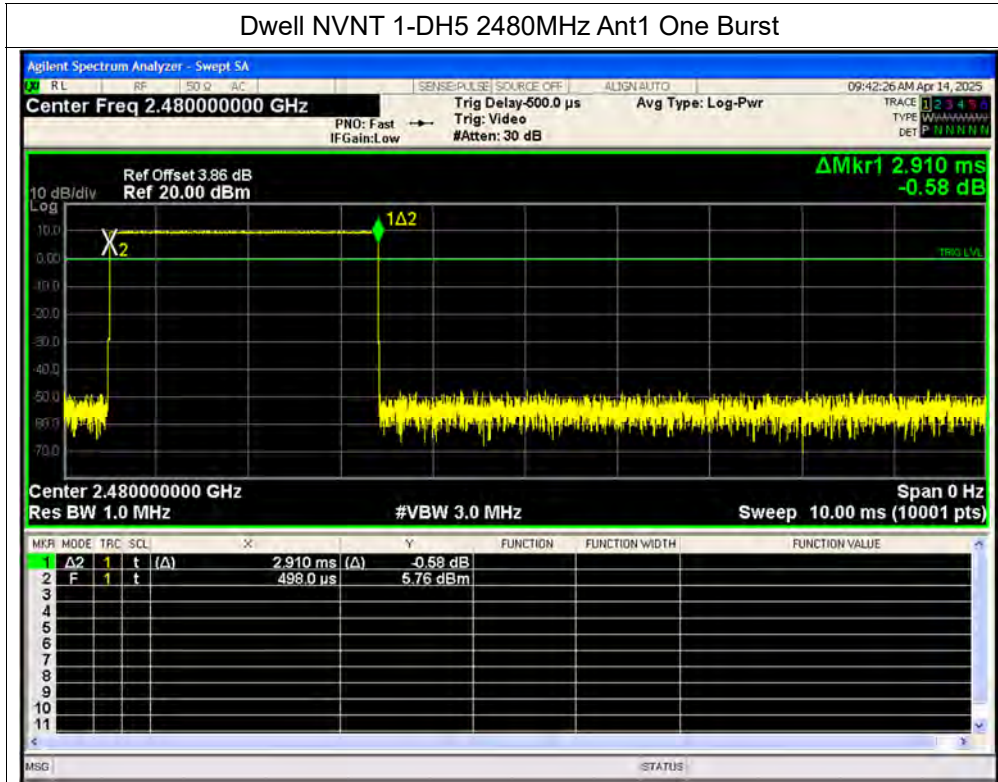


Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

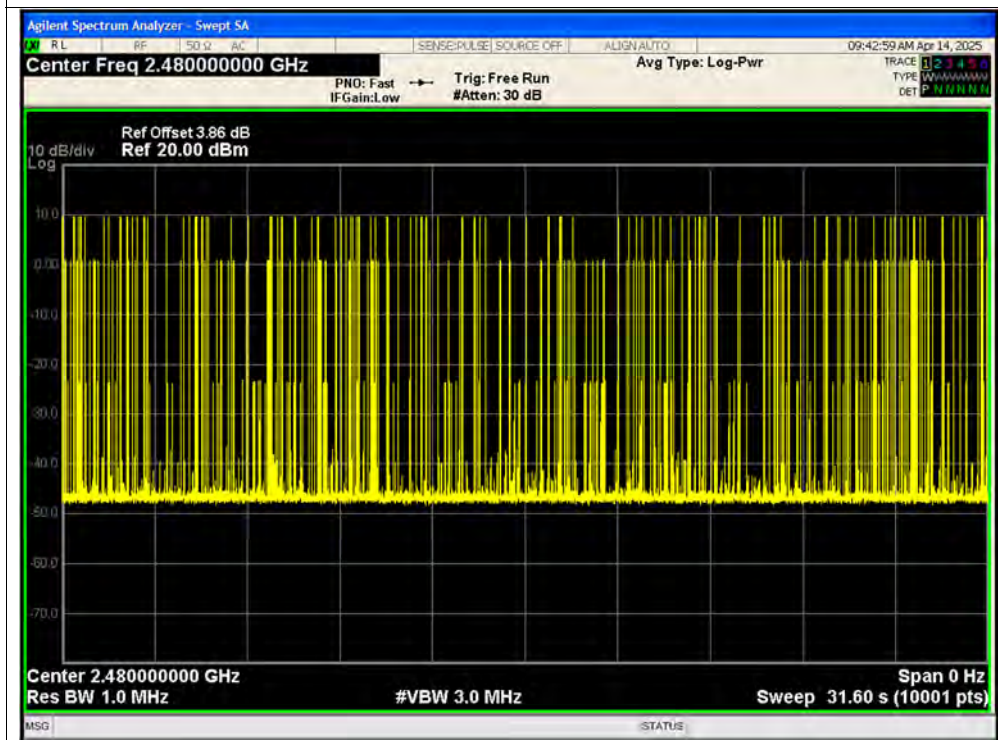




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

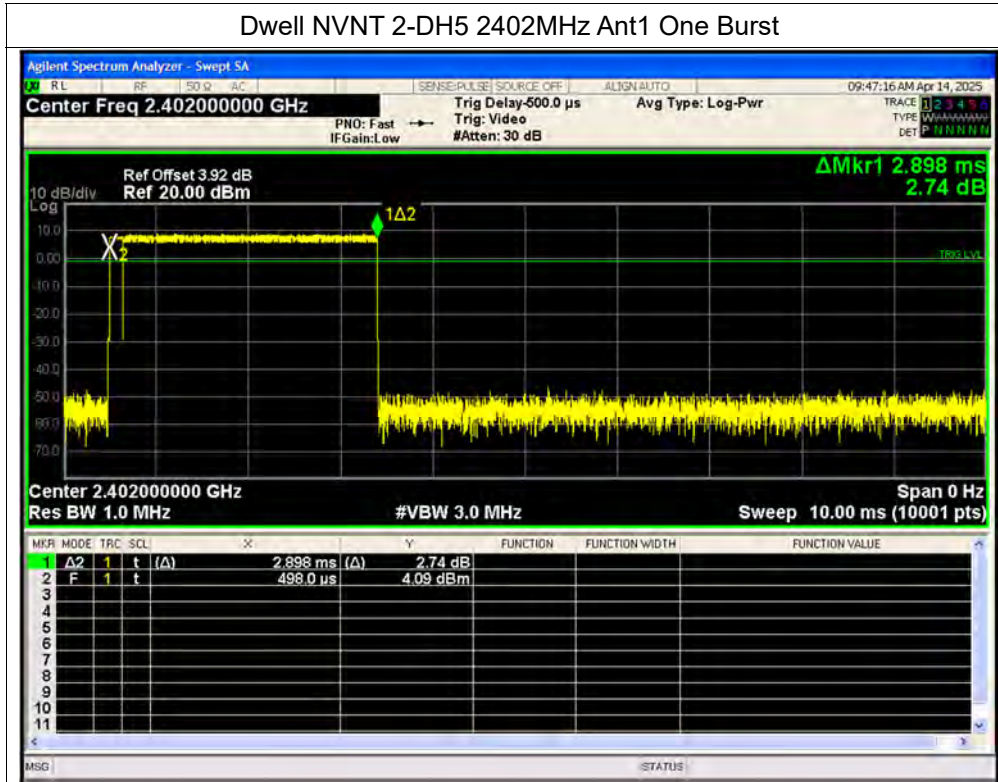


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

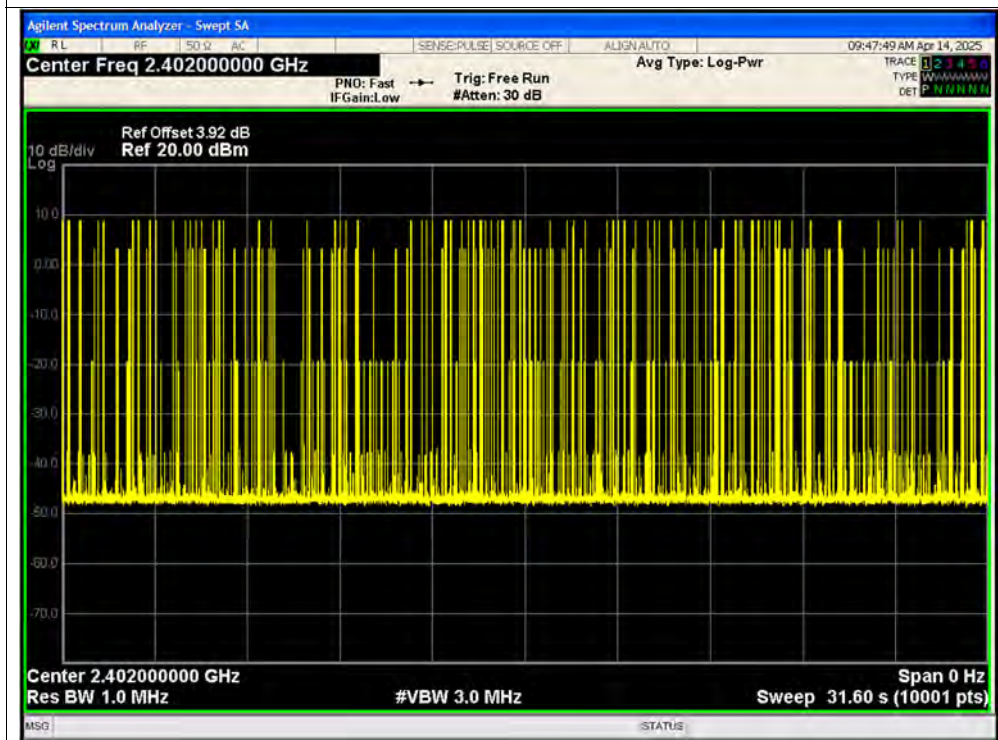



Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

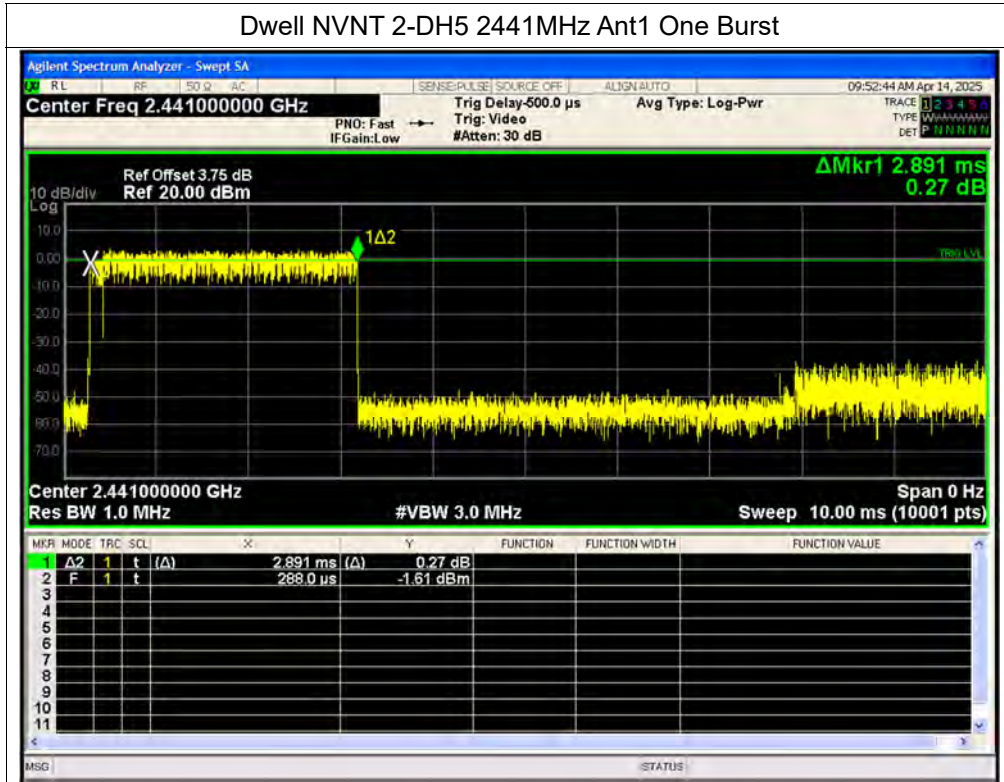


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated






Dwell NVNT 2-DH5 2480MHz Ant1 One Burst

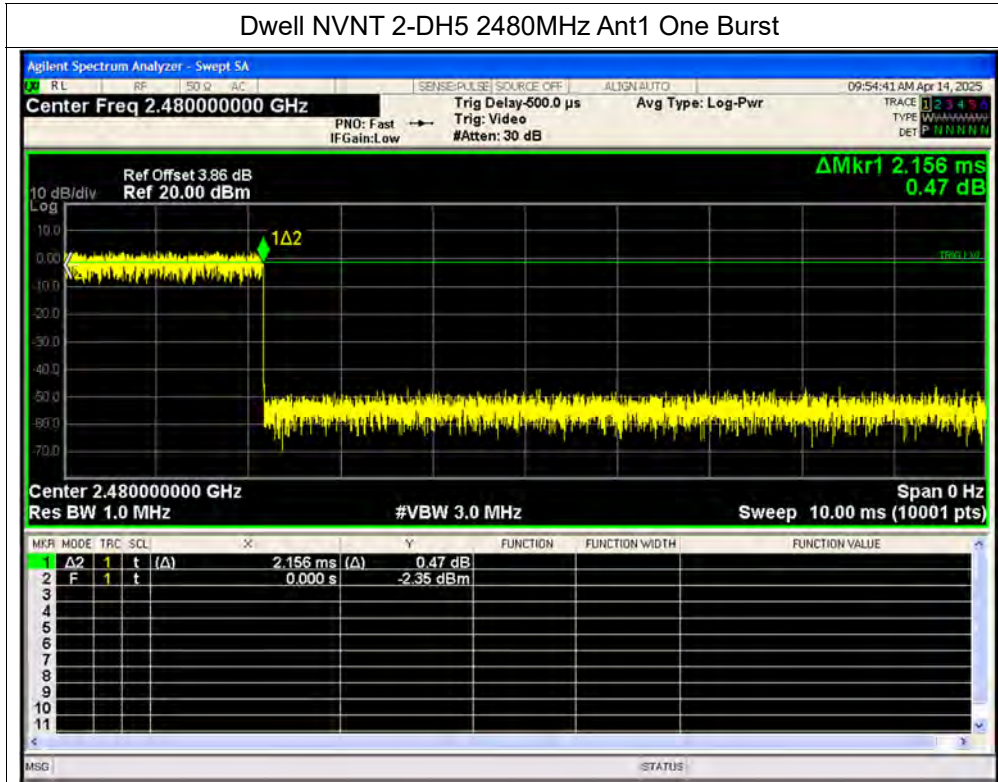


Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated

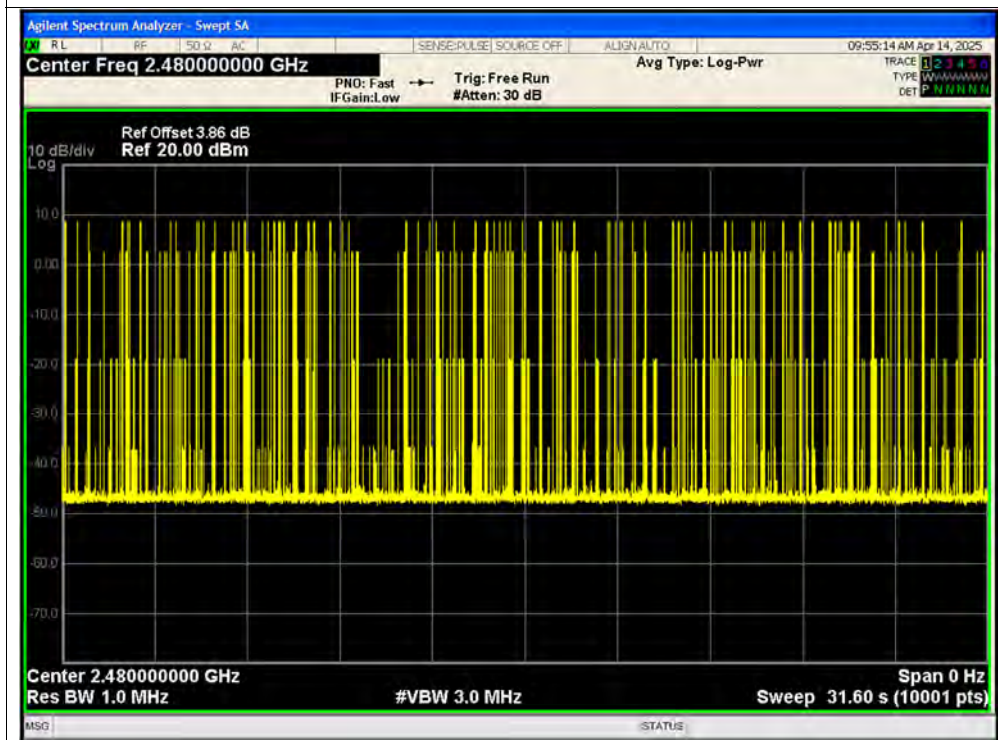




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

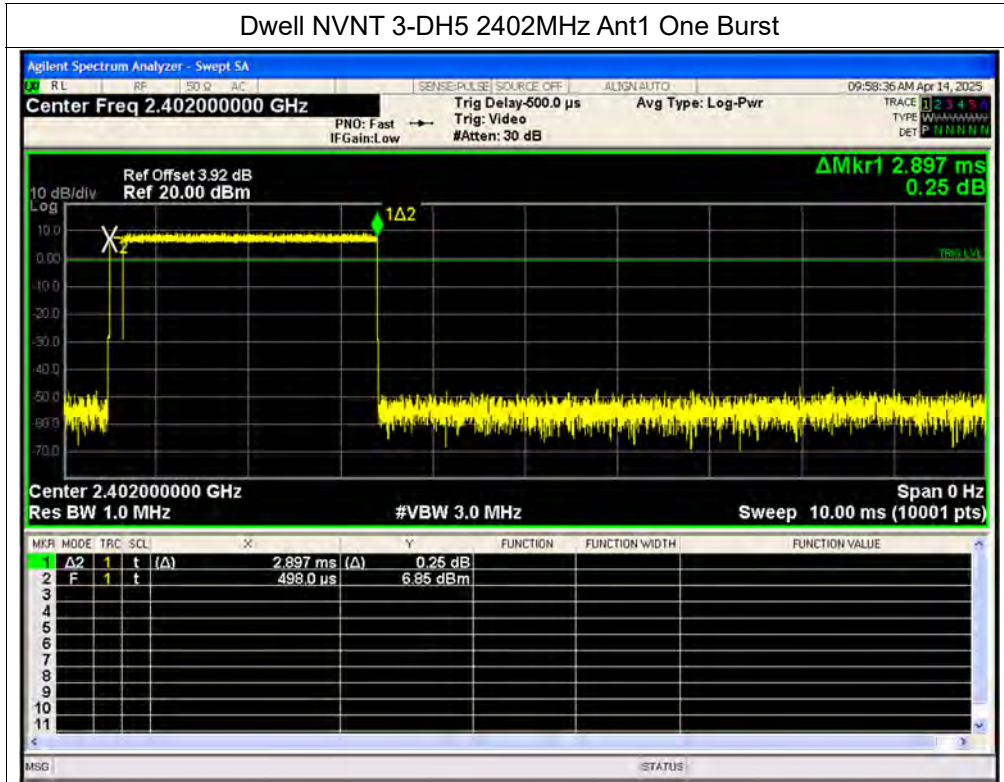


Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

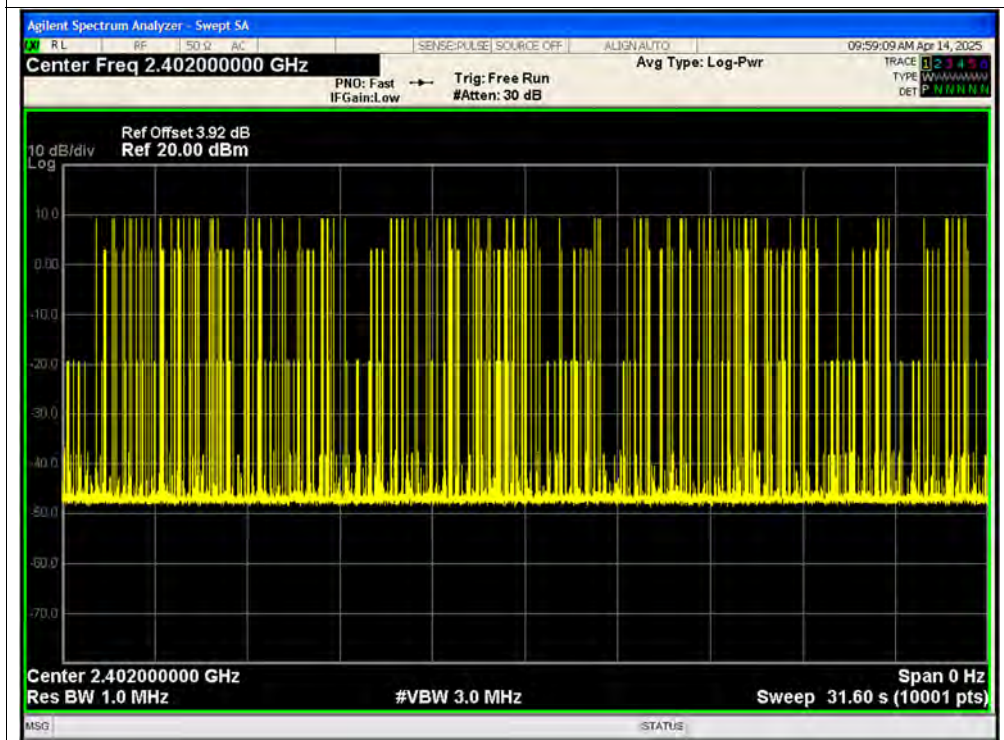




Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

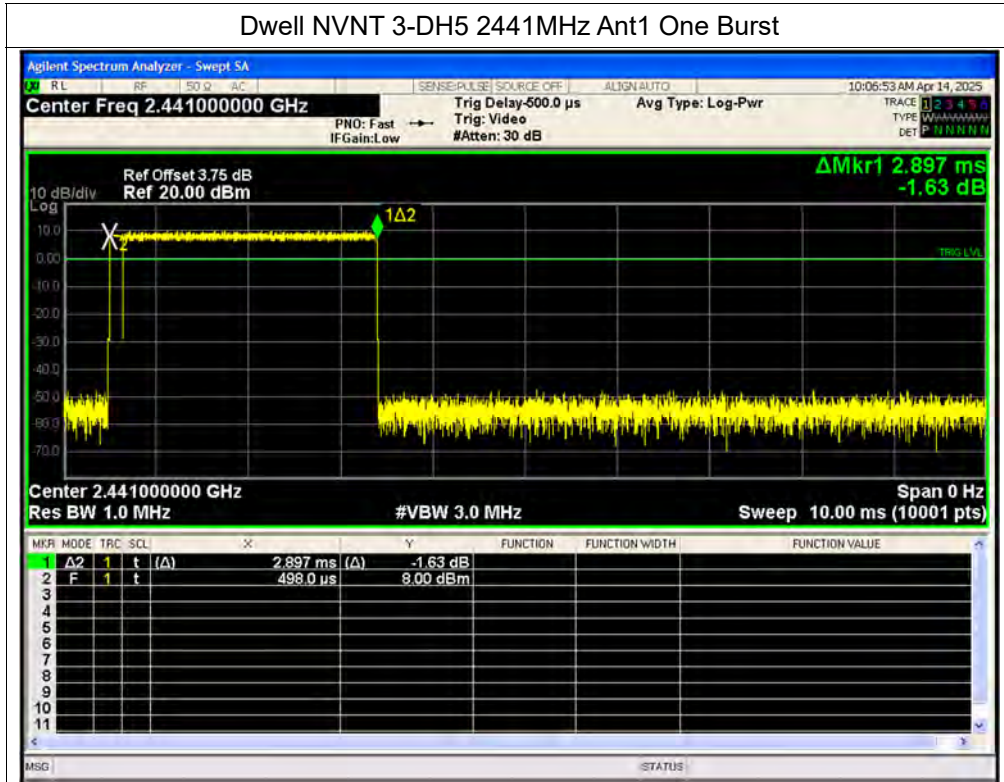


Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

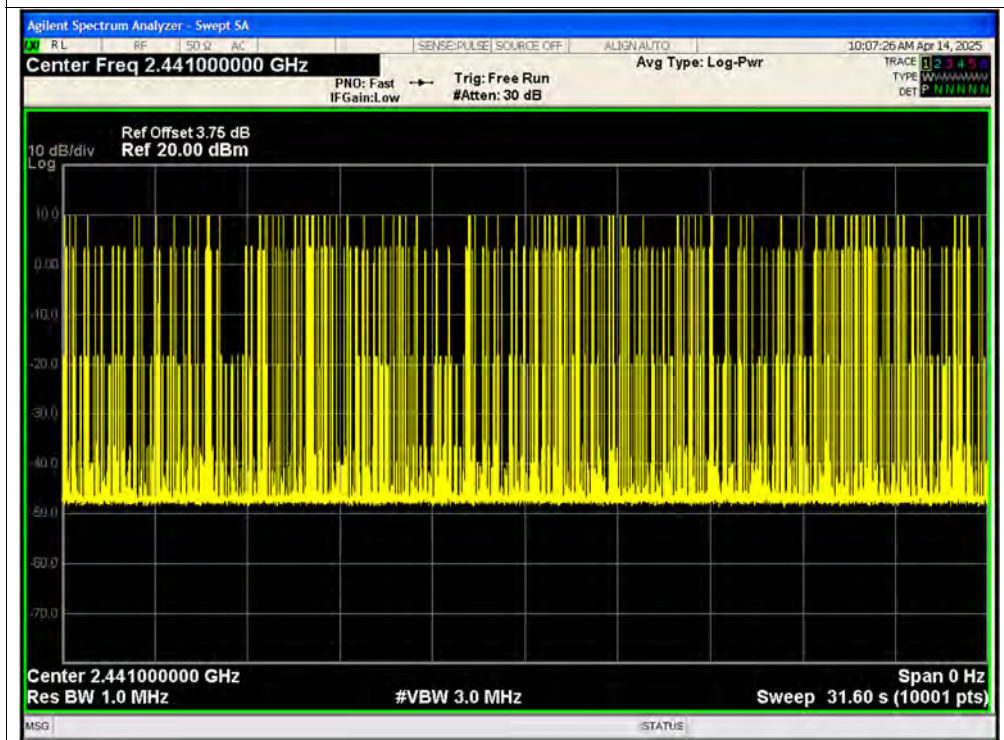




Dwell NVNT 3-DH5 2480MHz Ant1 One Burst

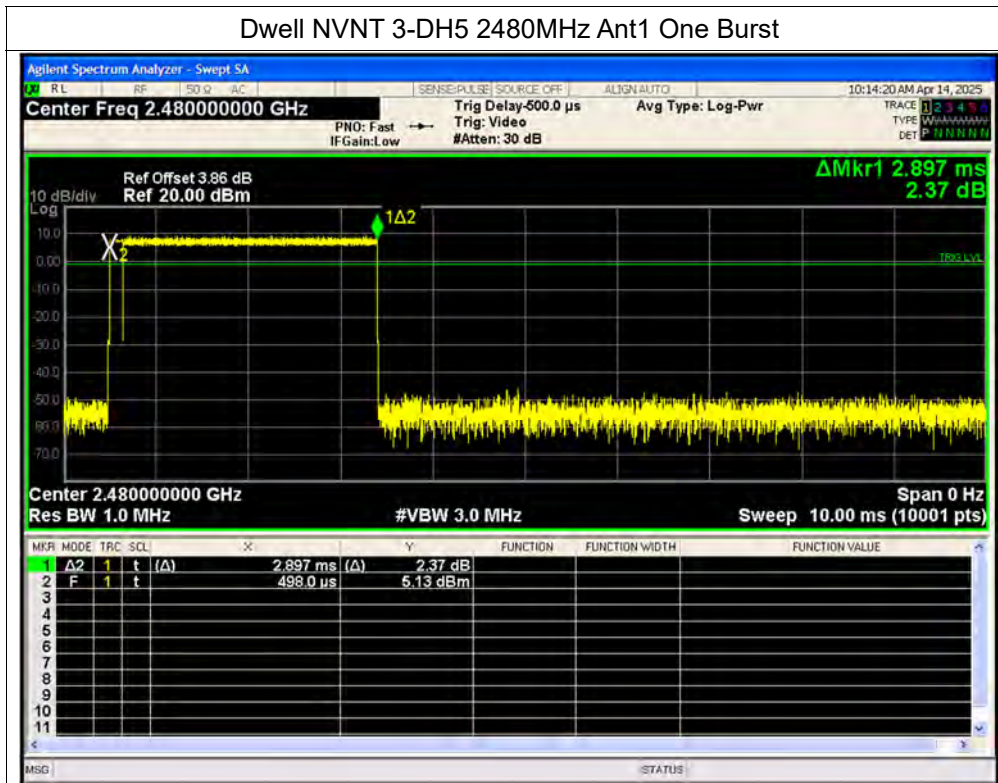

Dwell NVNT 3-DH5 2480MHz Ant1 Accumulated

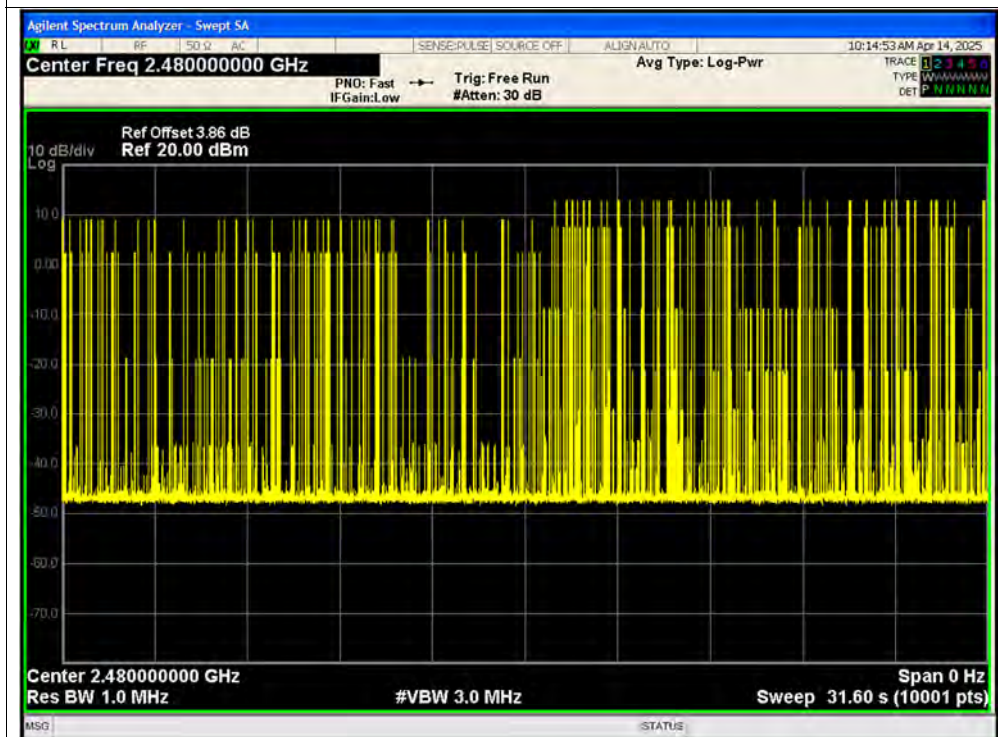



A.8. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-55.59	-20	Pass
NVNT	1-DH5	2441	Ant1	-56.21	-20	Pass
NVNT	1-DH5	2480	Ant1	-54.63	-20	Pass
NVNT	2-DH5	2402	Ant1	-56.51	-20	Pass
NVNT	2-DH5	2441	Ant1	-56.89	-20	Pass
NVNT	2-DH5	2480	Ant1	-55.99	-20	Pass
NVNT	3-DH5	2402	Ant1	-56.04	-20	Pass
NVNT	3-DH5	2441	Ant1	-56.19	-20	Pass
NVNT	3-DH5	2480	Ant1	-56.23	-20	Pass




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref



Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

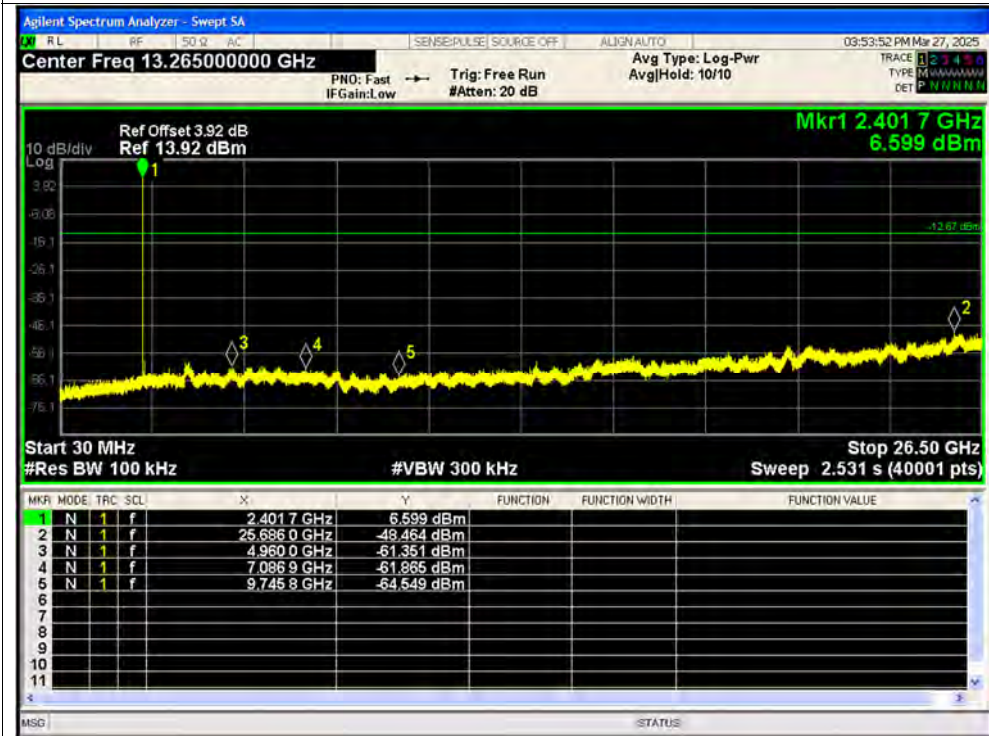




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref



Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

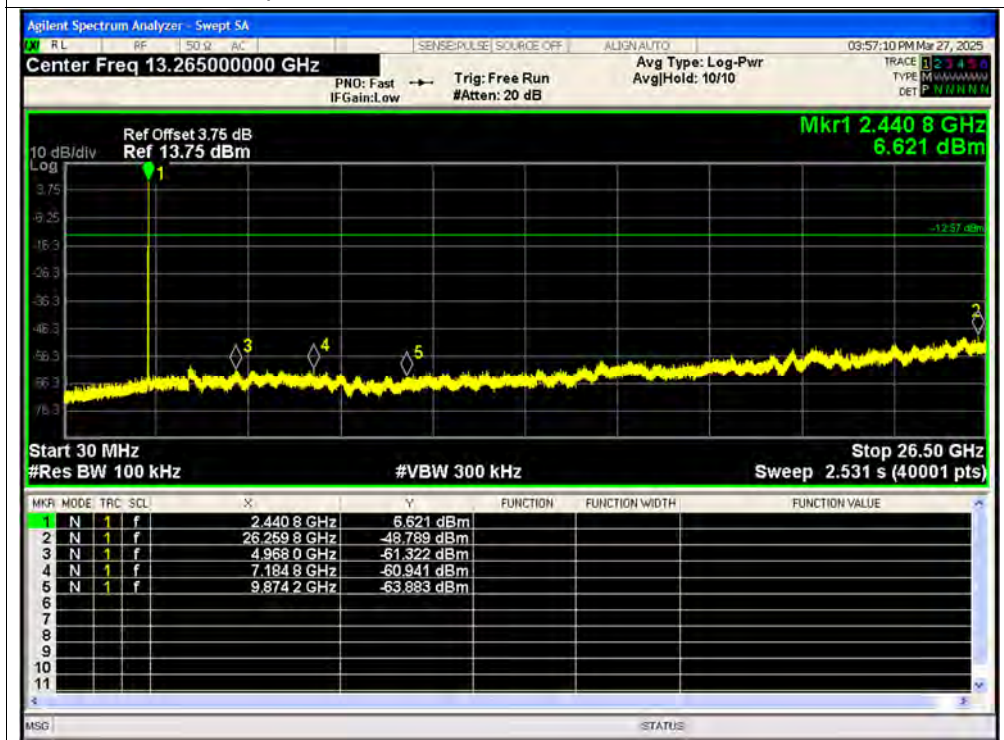




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

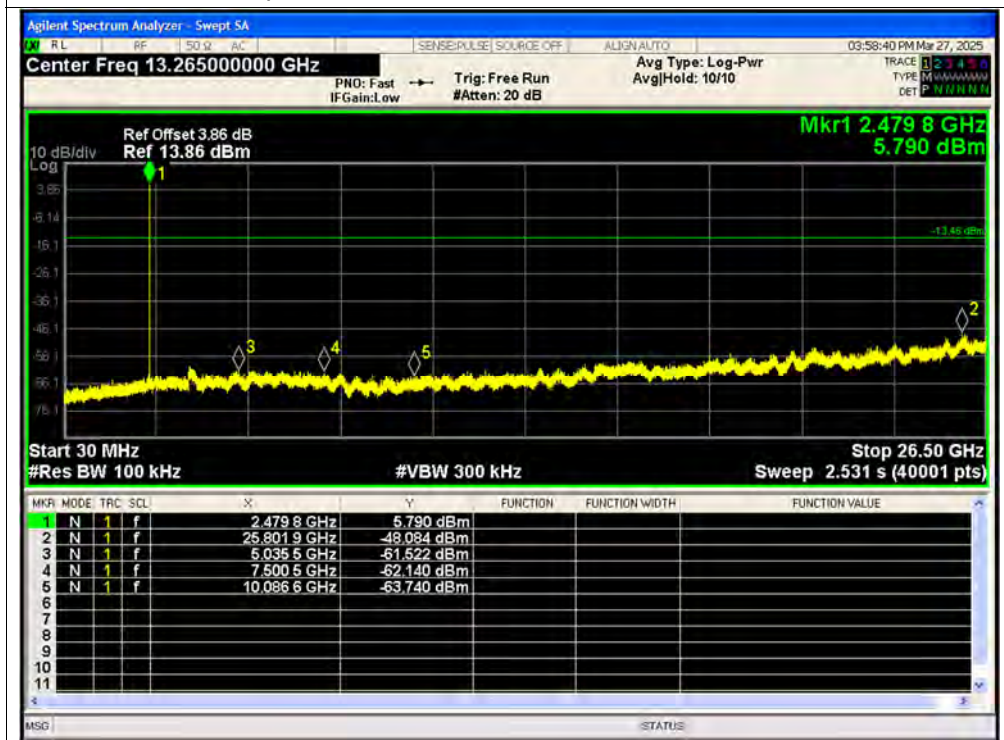




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

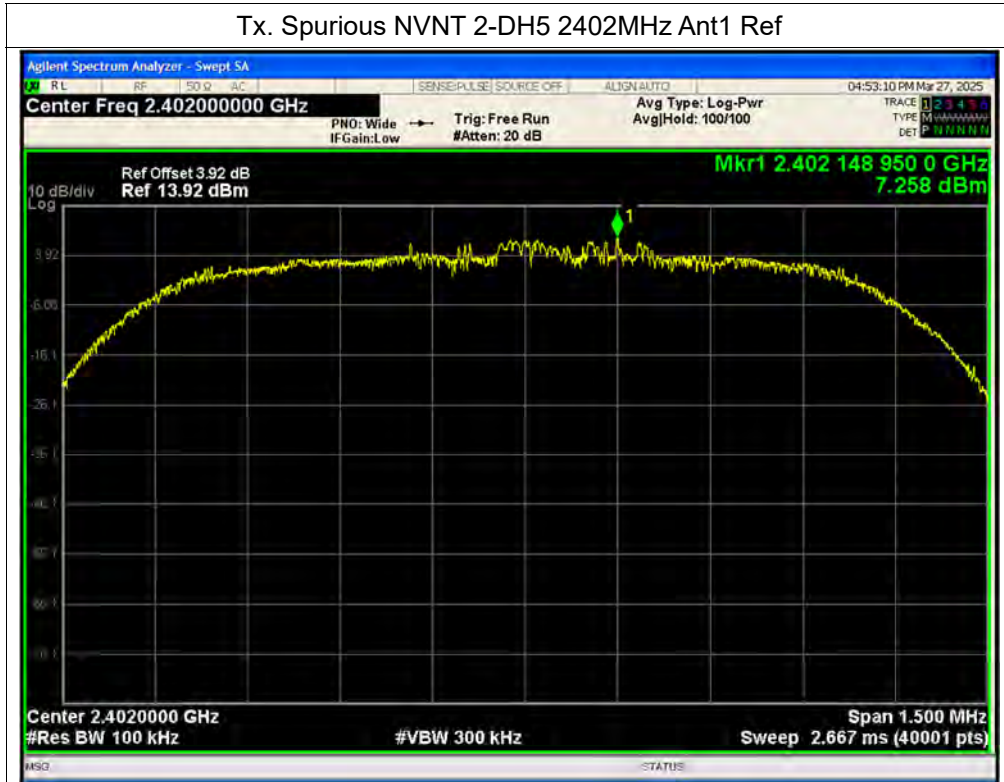


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

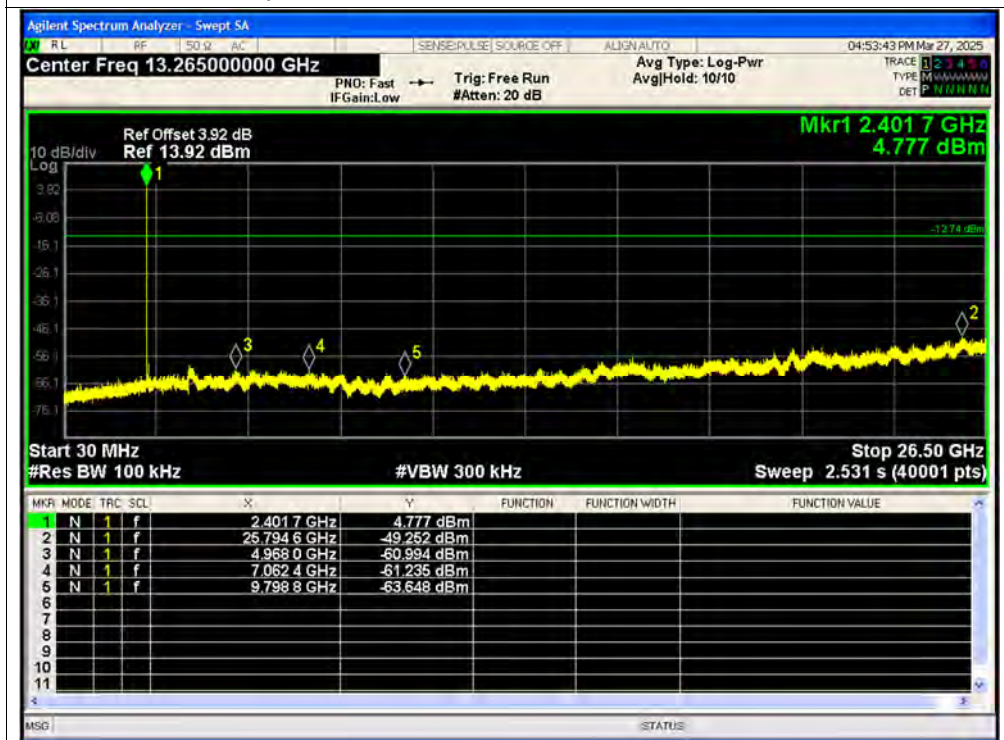




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

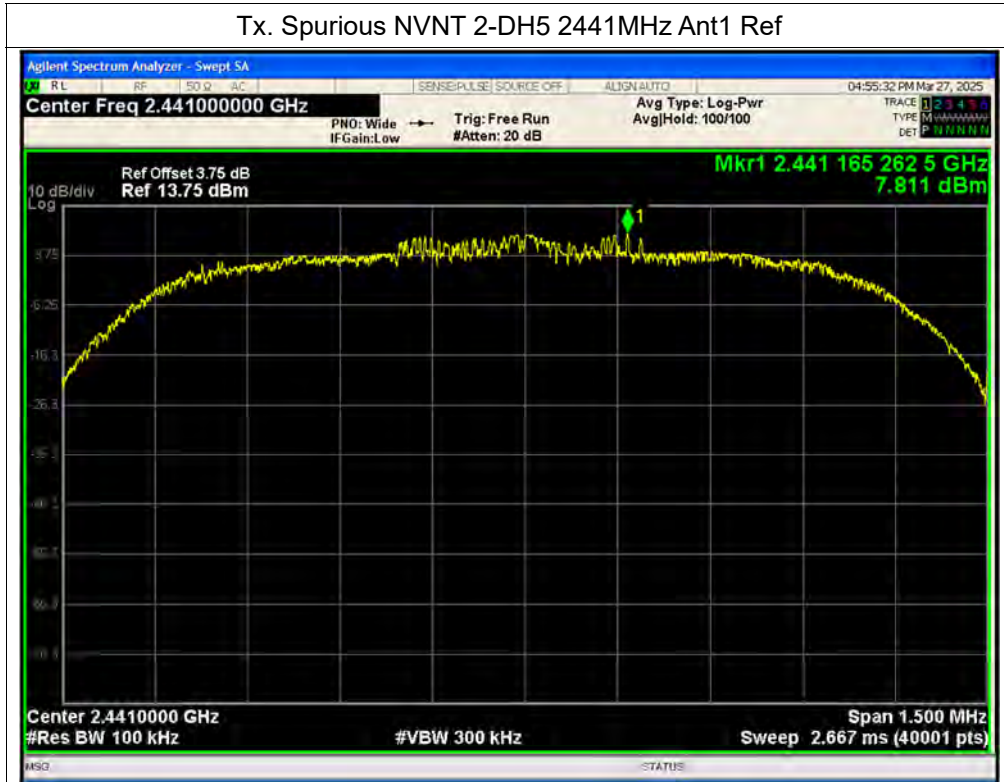

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

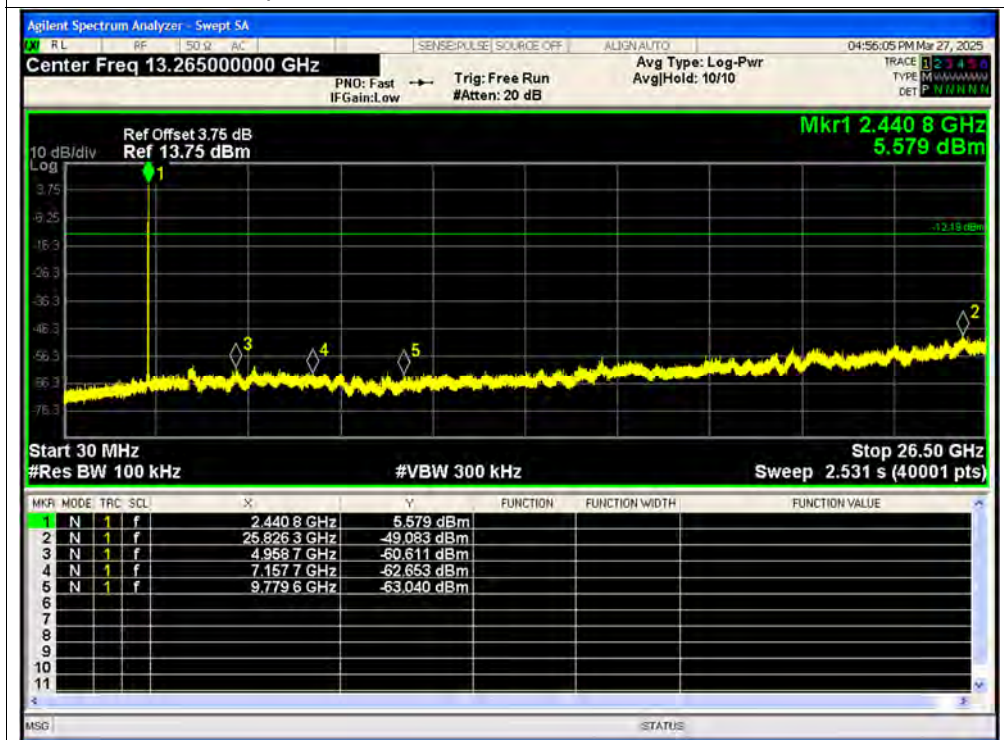




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

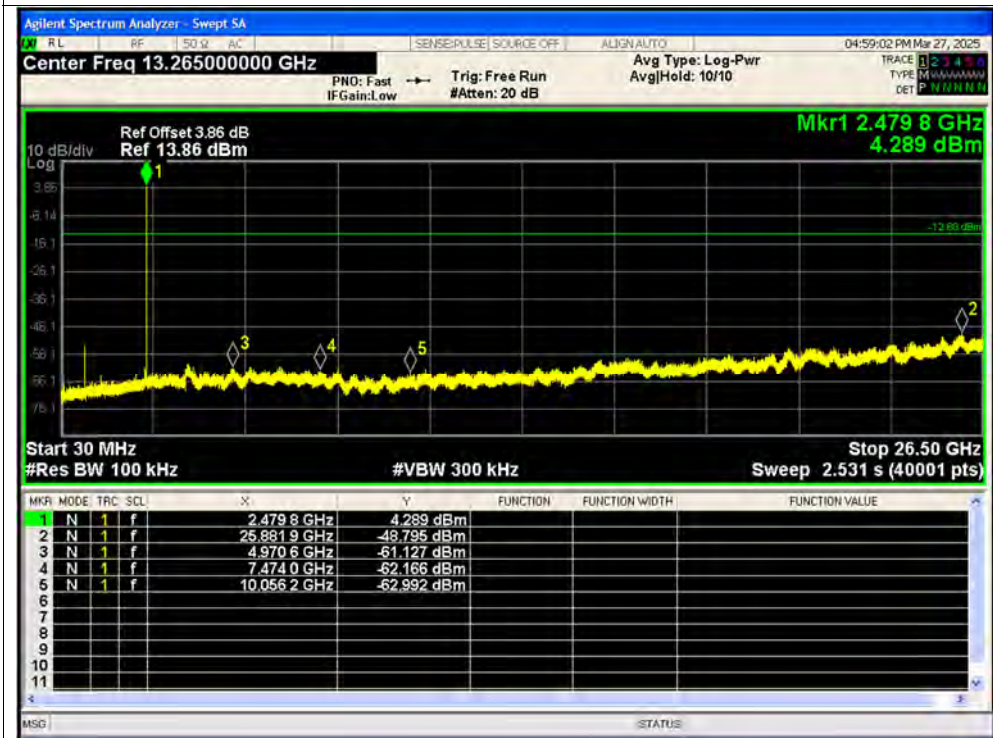




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

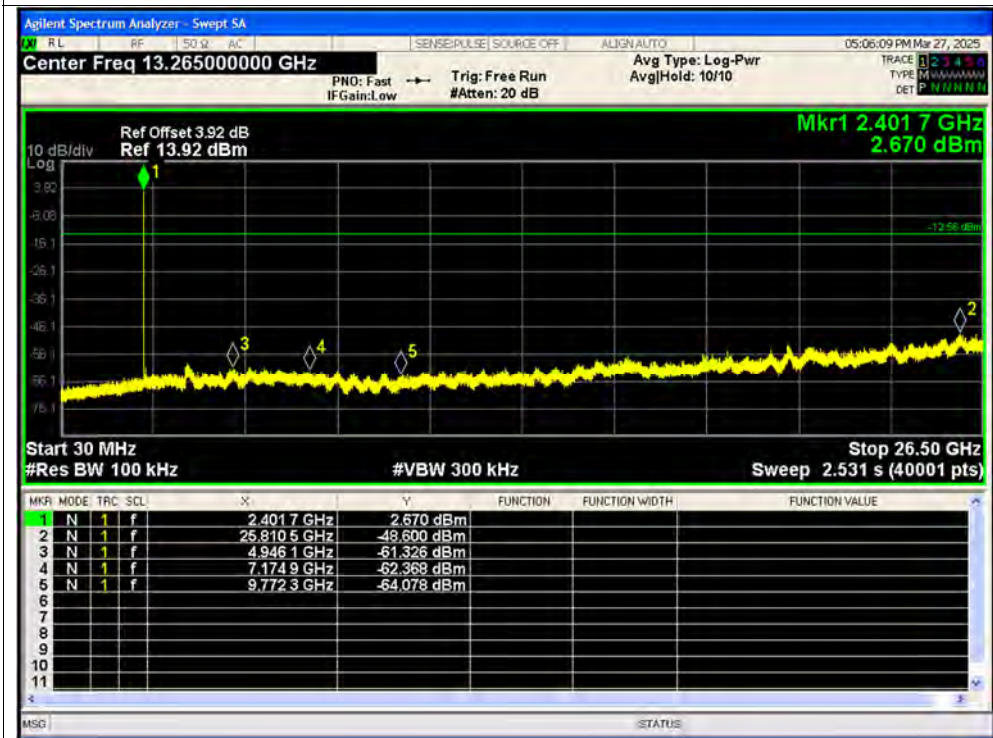




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

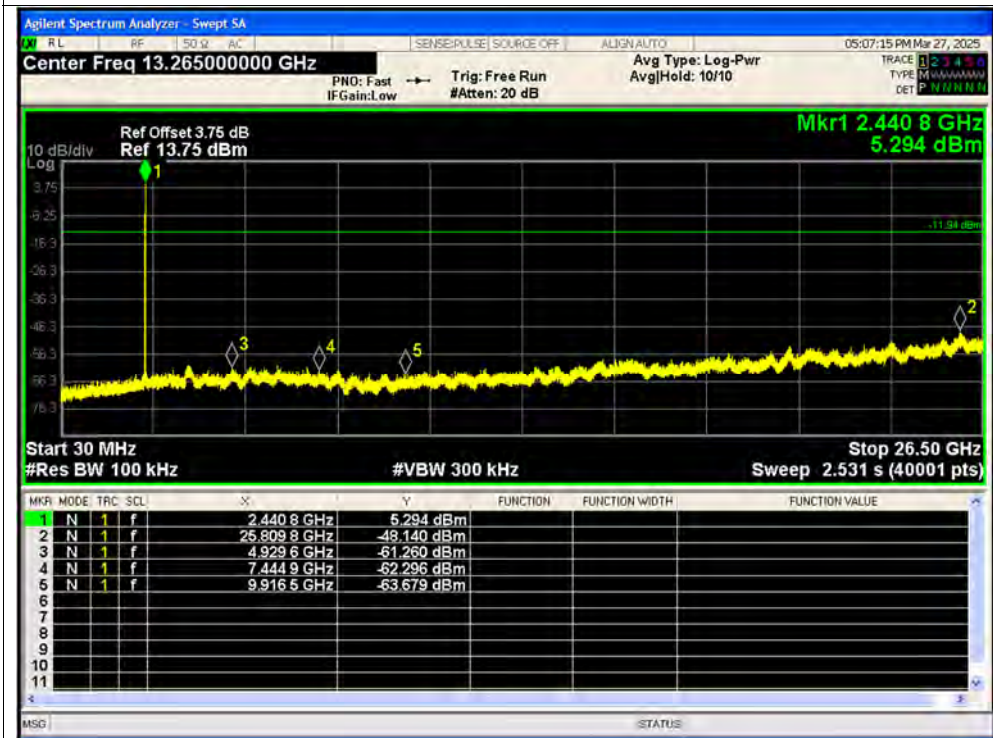




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

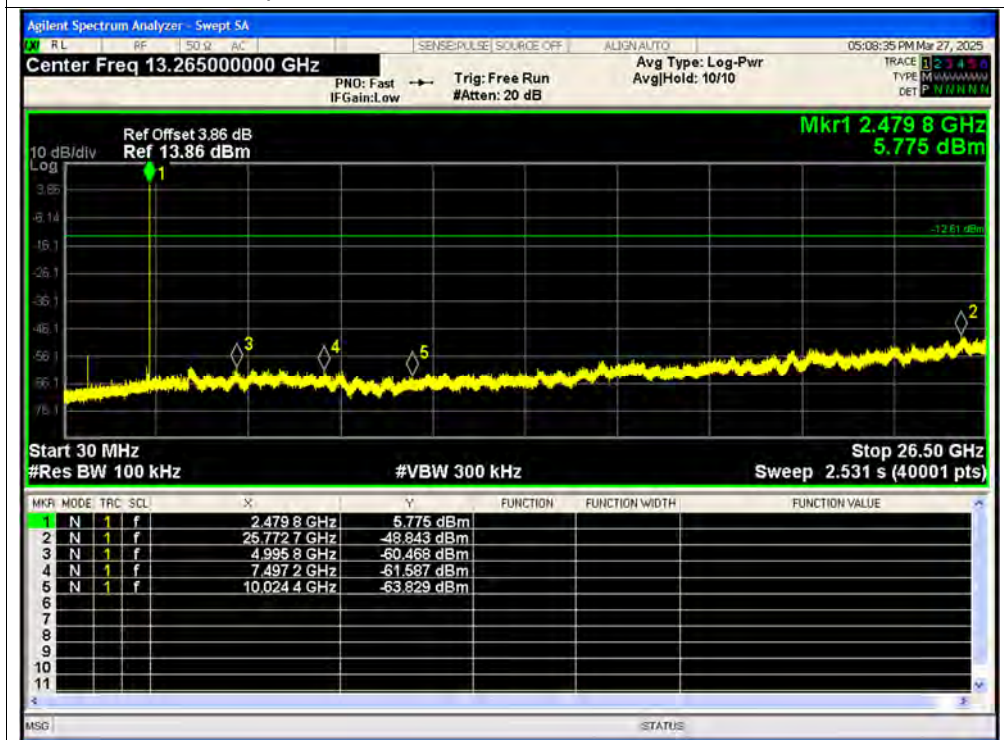

**A.9. Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-62.05	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-61.75	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-49.93	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-60.96	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-50.61	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-60.82	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-65.42	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-64.66	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-62.06	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-62.56	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-62.06	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.01	-20	Pass




Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

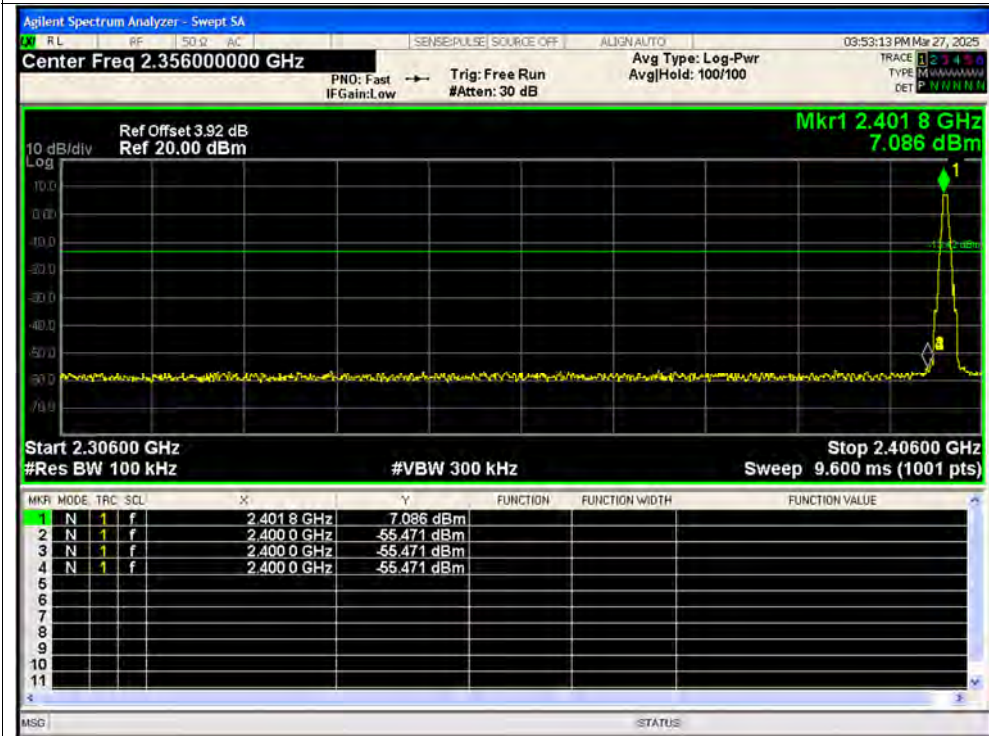

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

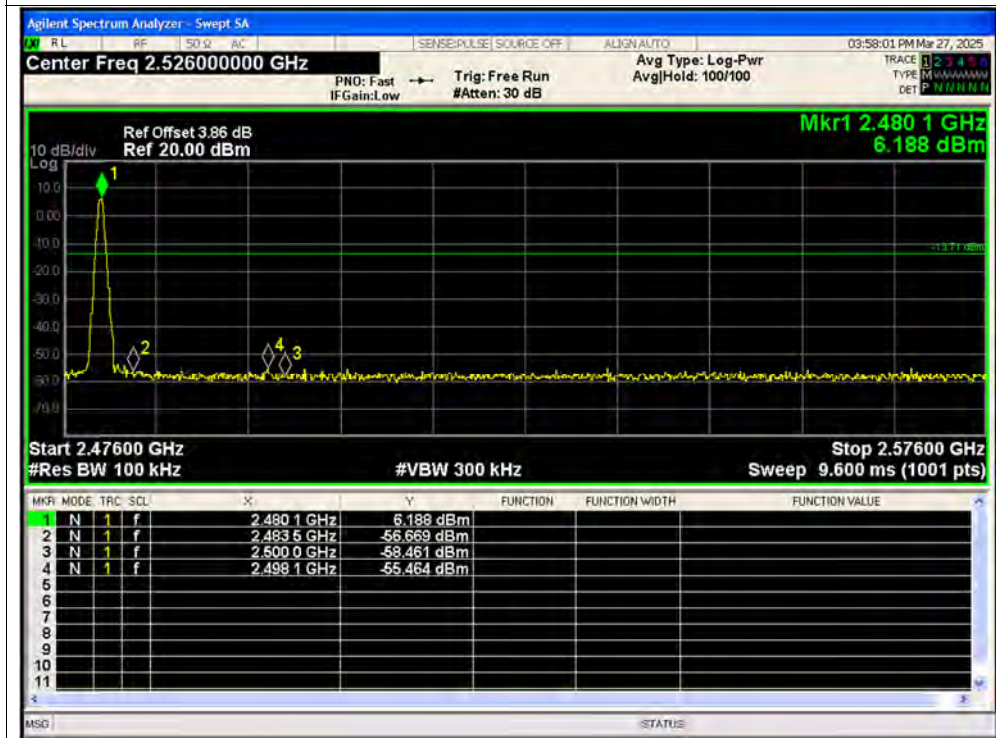




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

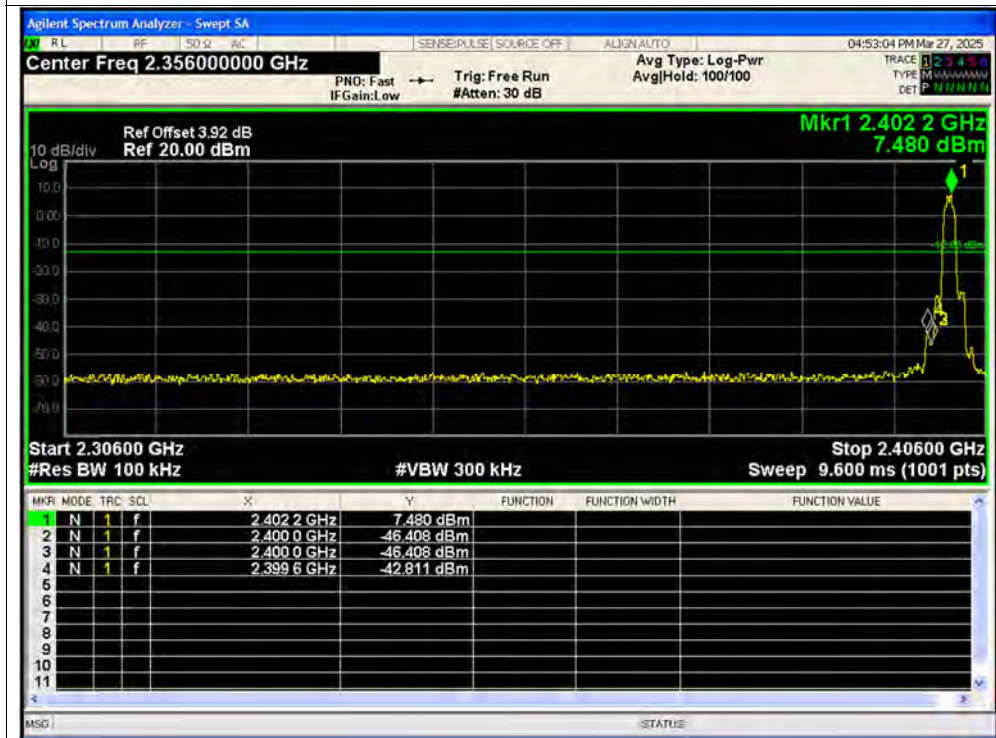

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

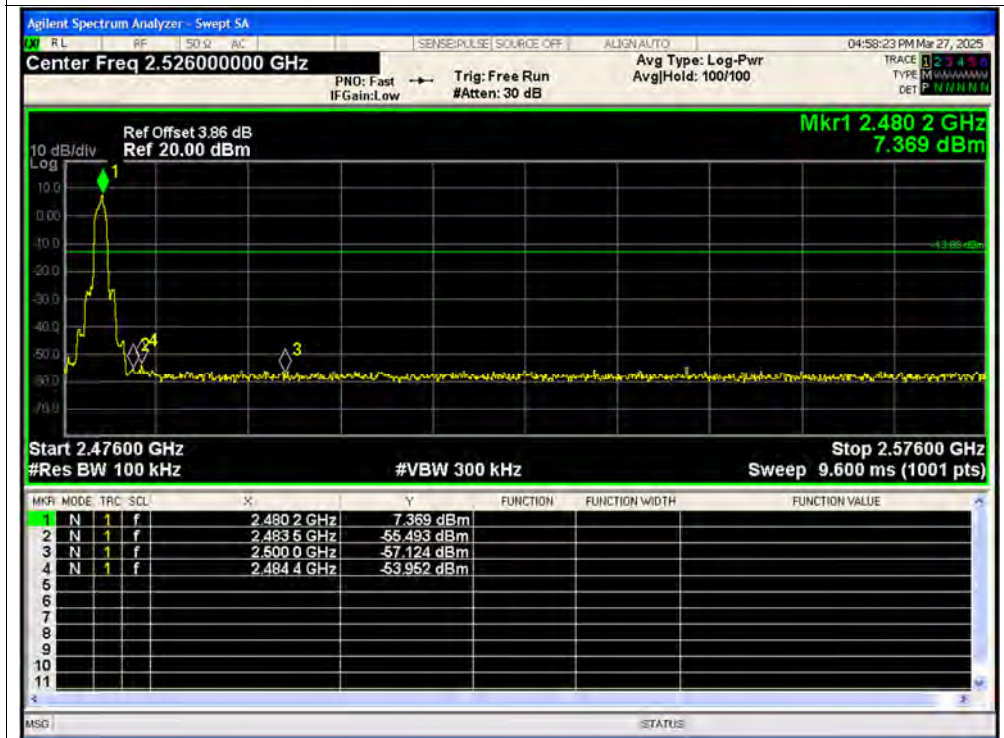




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

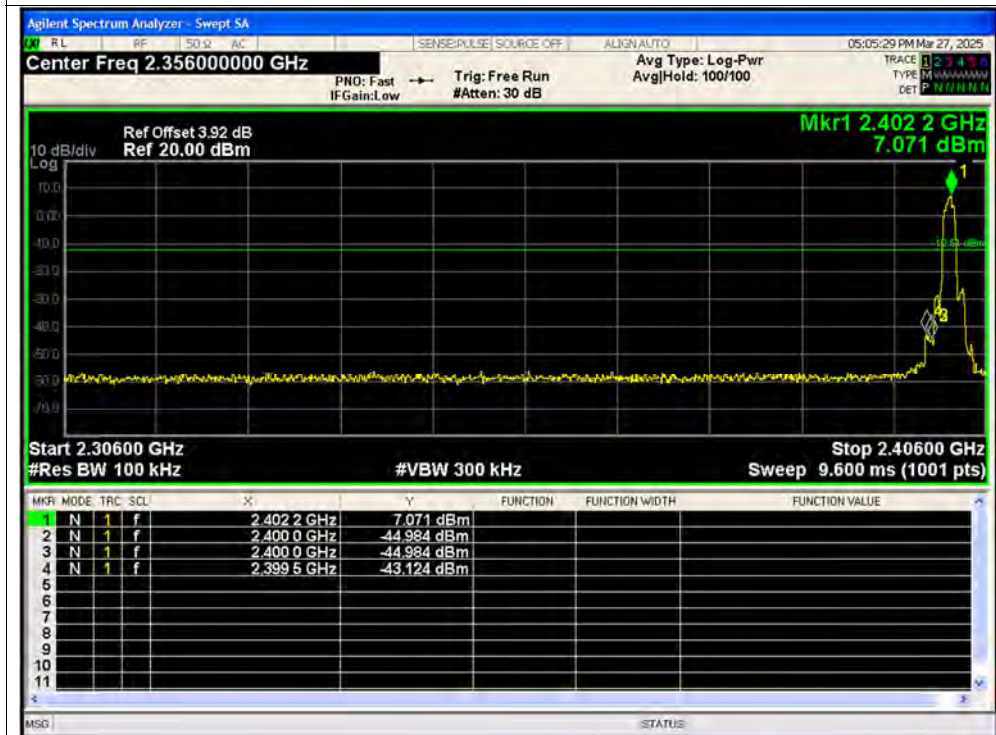




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

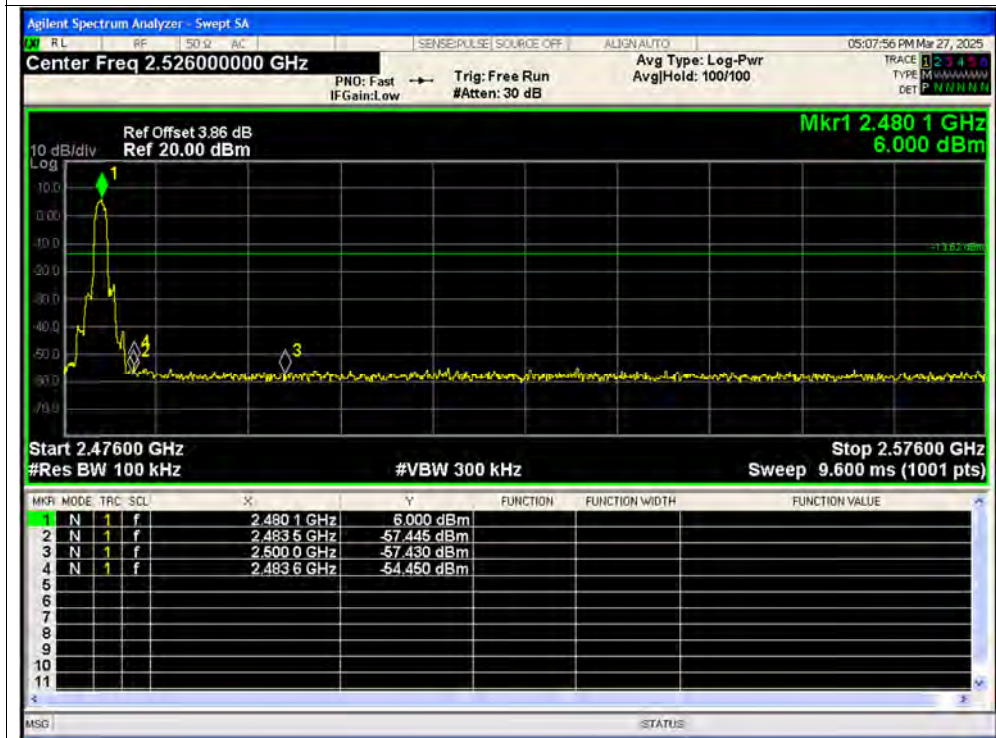




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

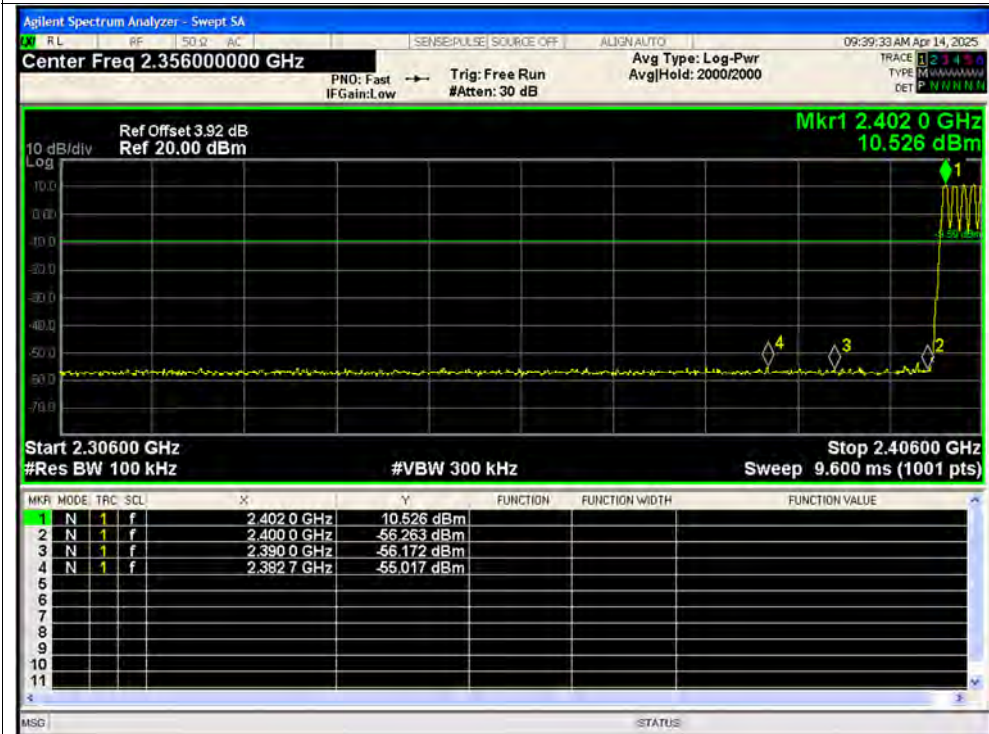




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

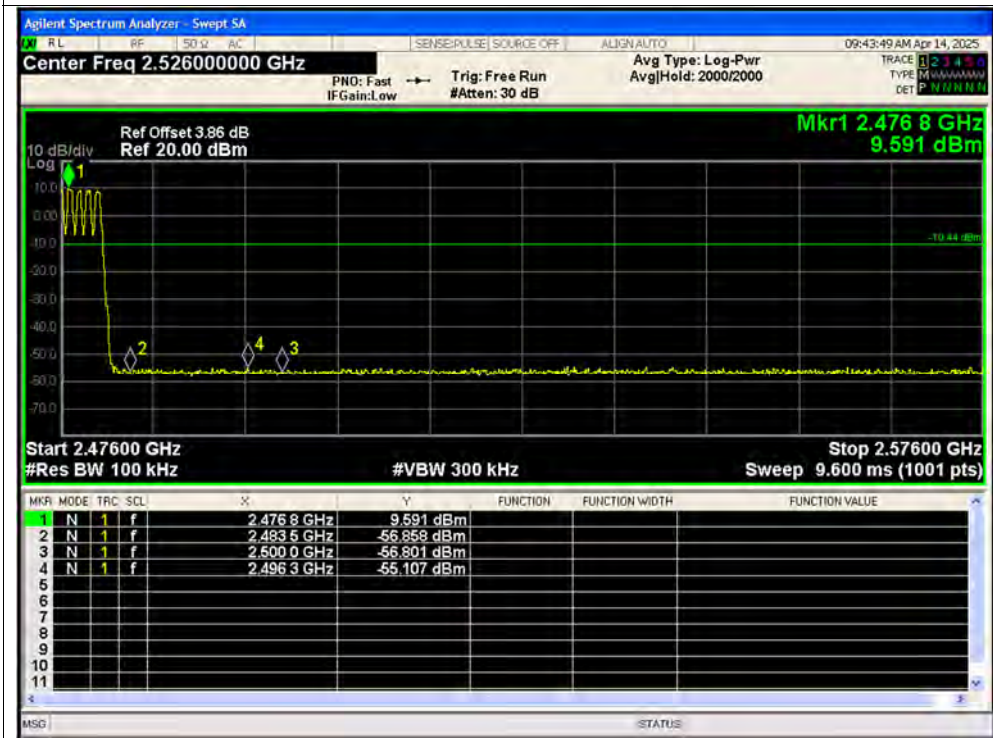




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

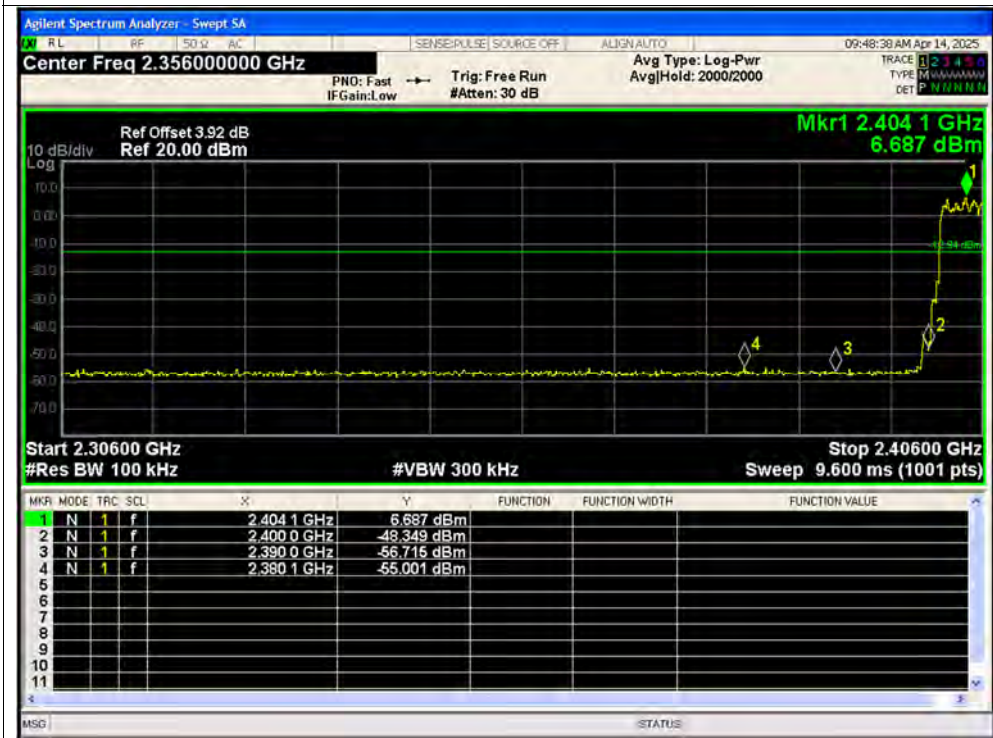




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

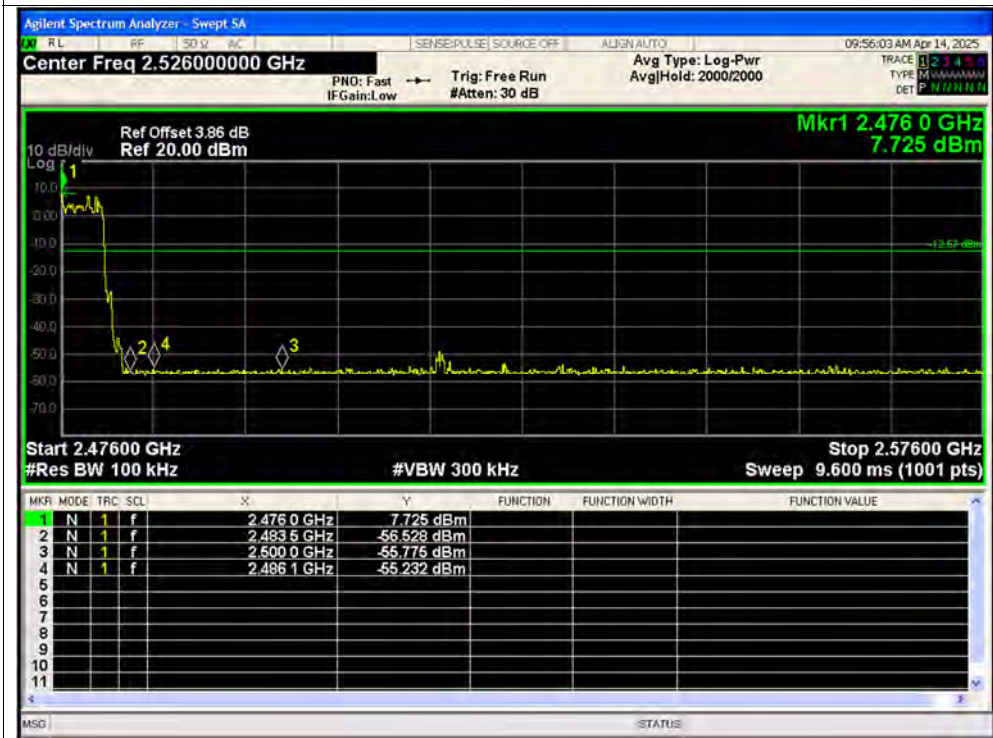




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

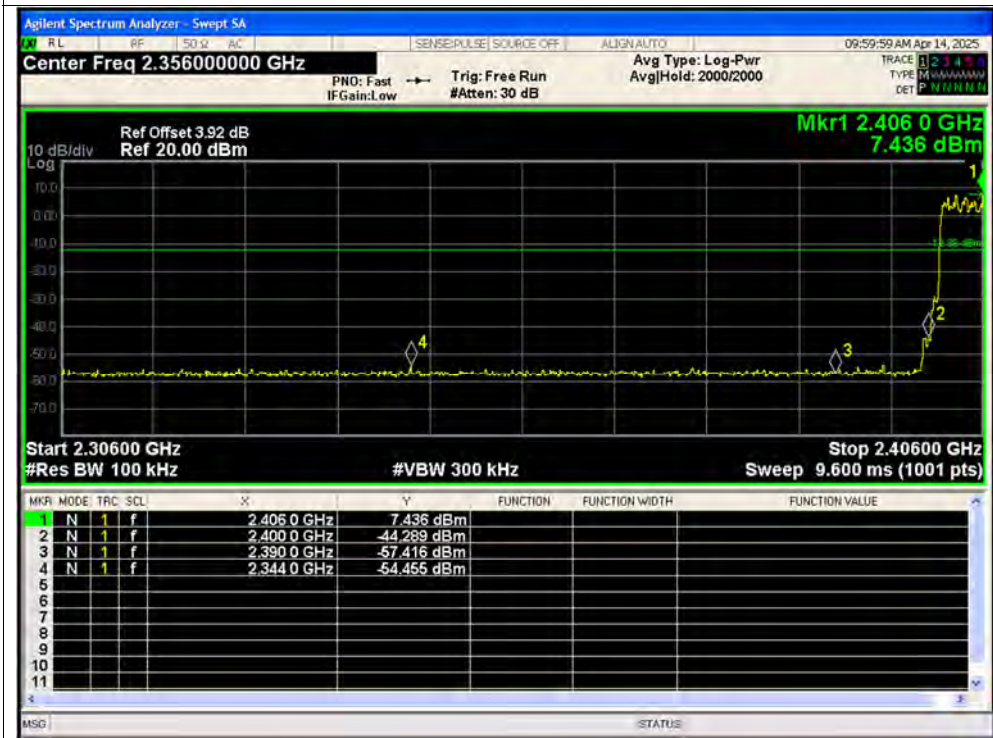




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

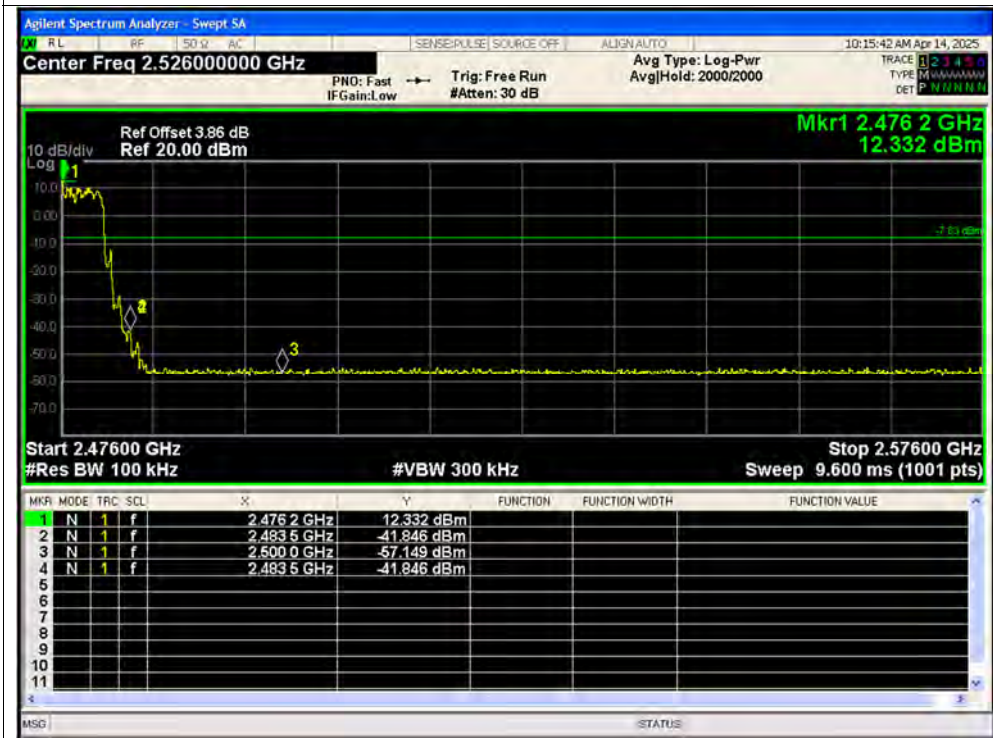



A.10. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+Data cable+Earphone+BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

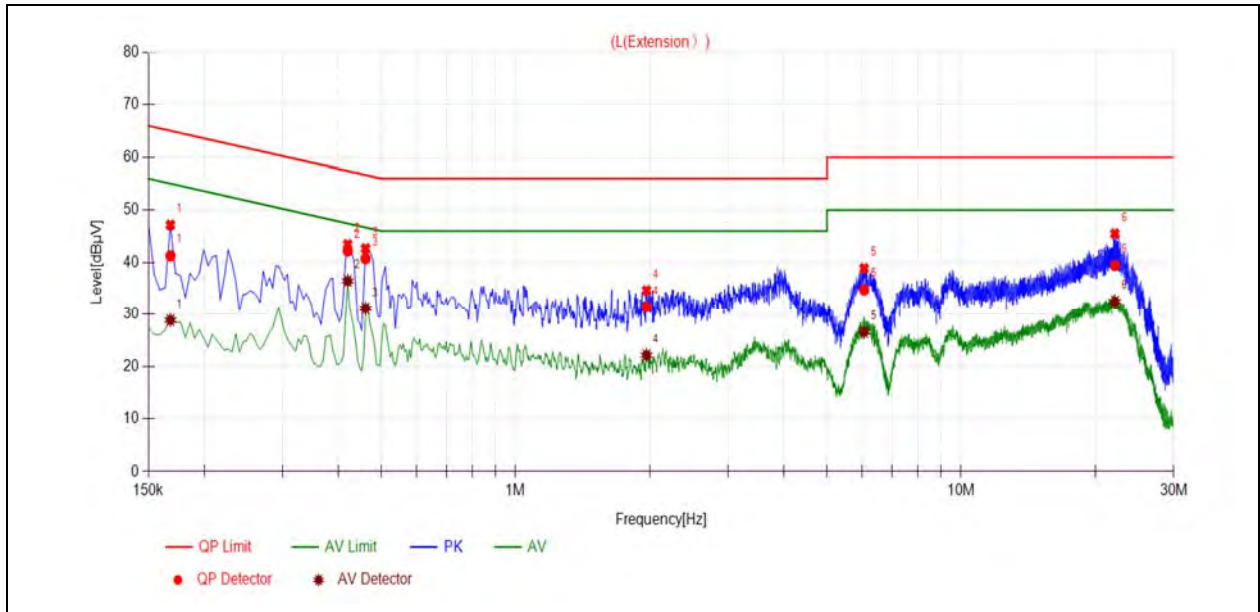

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1680	41.27	28.85	65.06	55.06	Line	PASS
2	0.4200	42.24	36.46	57.45	47.45		PASS
3	0.4605	40.74	31.15	56.68	46.68		PASS
4	1.9679	31.49	22.13	56.00	46.00		PASS
5	6.0586	34.76	26.57	60.00	50.00		PASS
6	22.1422	39.46	32.51	60.00	50.00		PASS

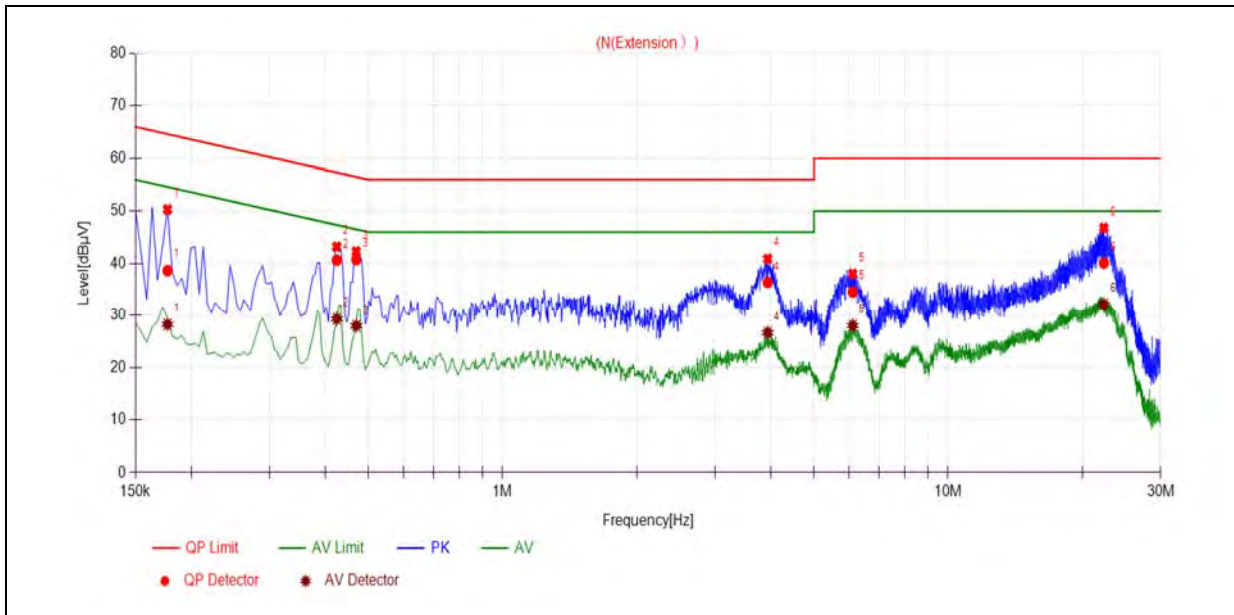

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1770	38.66	28.23	64.63	54.63	Neutral	PASS
2	0.4245	40.67	29.29	57.36	47.36		PASS
3	0.4695	40.73	27.96	56.52	46.52		PASS
4	3.9347	36.38	26.65	56.00	46.00		PASS
5	6.1084	34.54	28.00	60.00	50.00		PASS
6	22.3643	40.11	32.18	60.00	50.00		PASS




A.11. Restricted Frequency Bands

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.

Note 2: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.


GFSK Mode

Plot for Channel 0

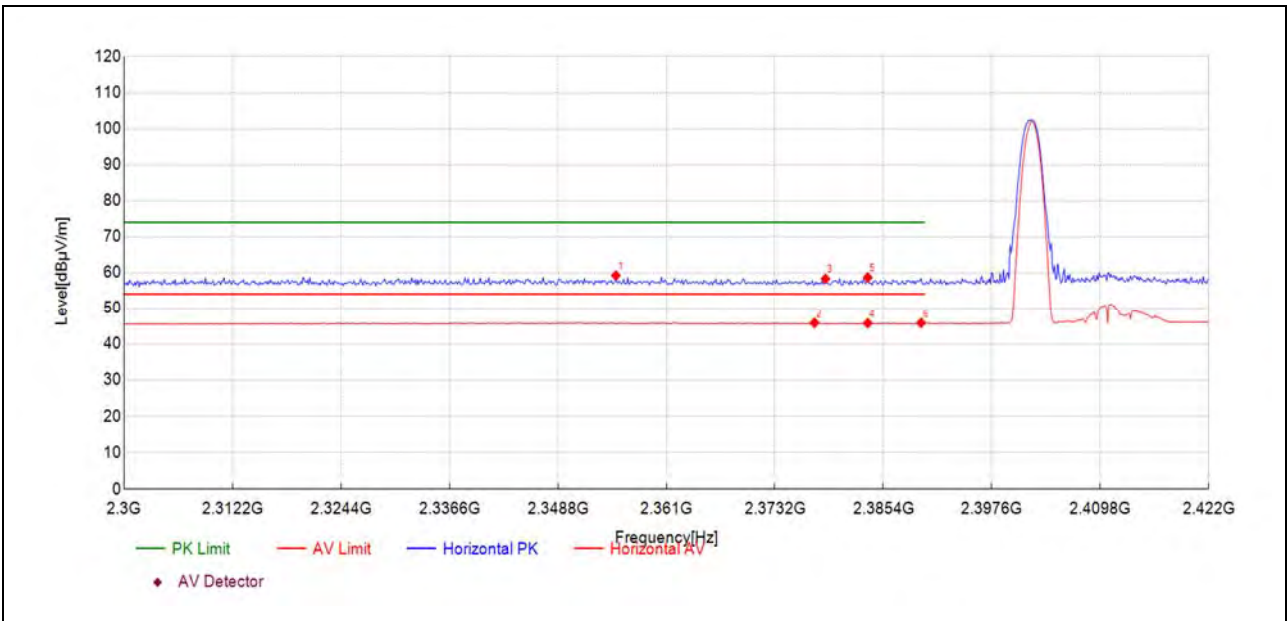

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2355.32	21.8	59.24	37.460	74.00	14.76	150	351	PK	PASS
2377.67	8.4	45.86	37.480	54.00	8.14	150	5	AV	PASS
2378.89	20.8	58.32	37.480	74.00	15.68	150	58	PK	PASS
2383.65	8.3	45.78	37.490	54.00	8.22	150	129	AV	PASS
2383.65	21.2	58.70	37.490	74.00	15.30	150	190	PK	PASS
2389.64	8.4	45.86	37.490	54.00	8.14	150	151	AV	PASS

Plot for Channel 78

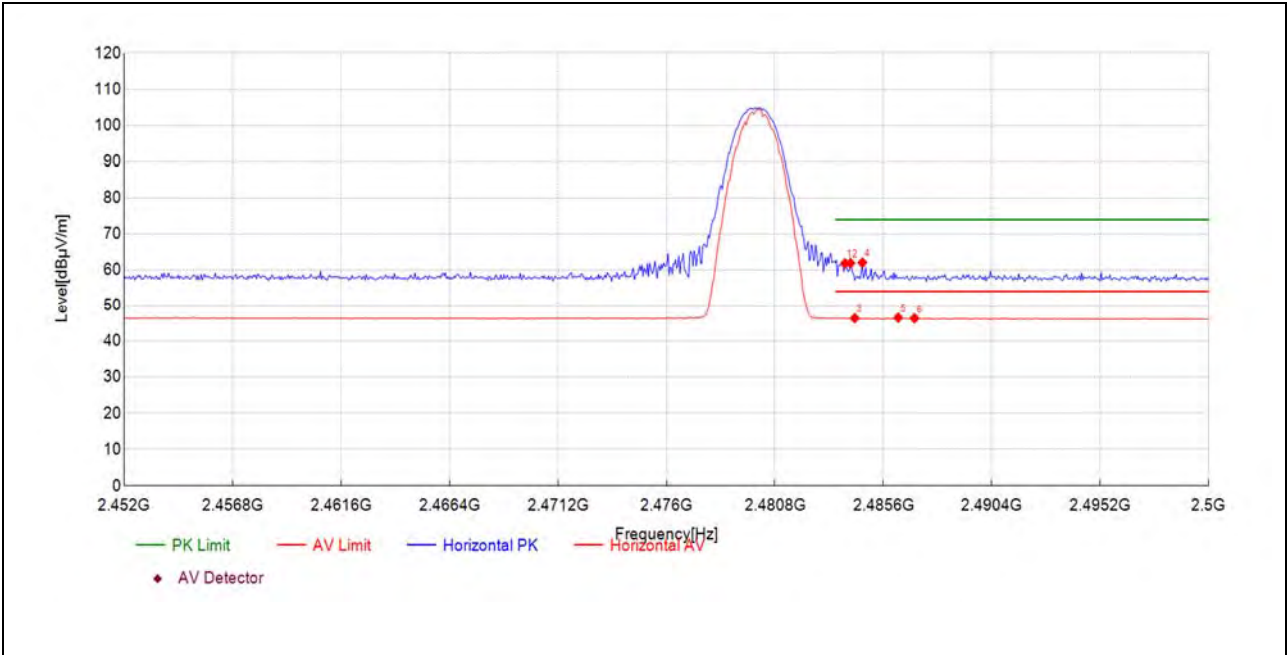


Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.90	23.6	61.86	38.270	74.00	12.14	150	306	PK	PASS
2484.14	23.7	61.92	38.270	74.00	12.08	150	297	PK	PASS
2484.34	8.1	46.39	38.270	54.00	7.61	150	102	AV	PASS
2484.67	23.8	62.05	38.270	74.00	11.95	150	306	PK	PASS
2486.26	8.3	46.54	38.270	54.00	7.46	150	124	AV	PASS
2486.98	8.1	46.36	38.270	54.00	7.64	150	9	AV	PASS



8-DPSK Mode


Plot for Channel 0

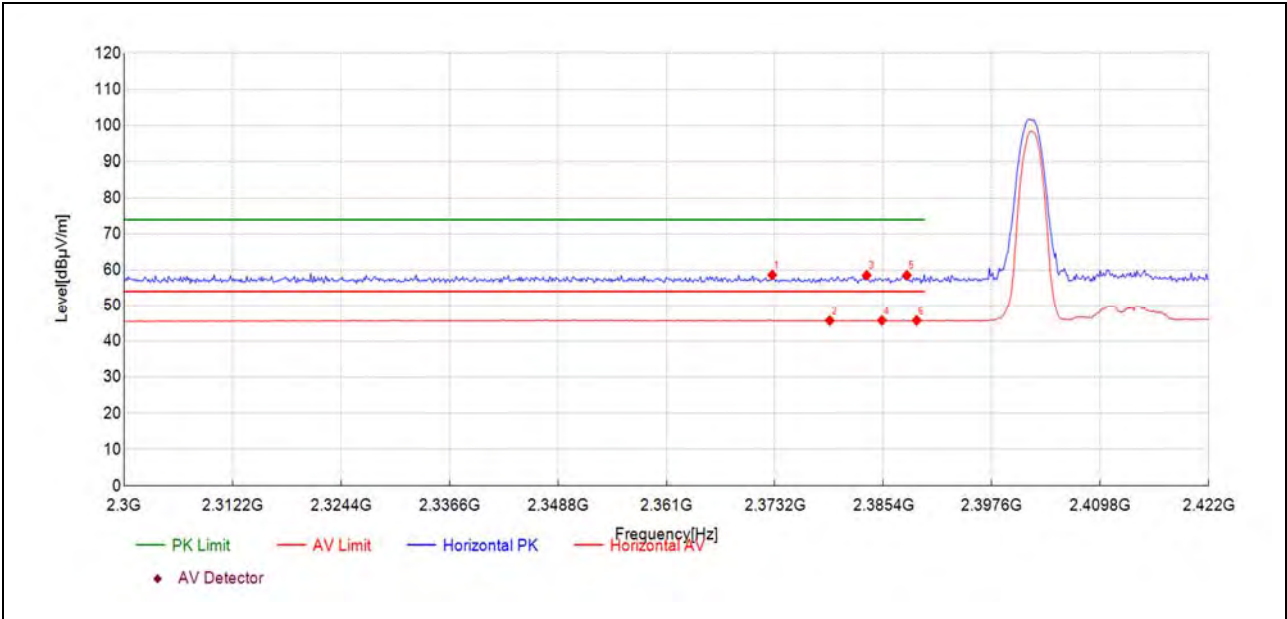

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2372.91	21.2	58.66	37.480	74.00	15.34	150	146	PK	PASS
2379.38	8.3	45.74	37.480	54.00	8.26	150	195	AV	PASS
2383.53	21.1	58.56	37.490	74.00	15.44	150	347	PK	PASS
2385.24	8.3	45.78	37.490	54.00	8.22	150	93	AV	PASS
2388.05	21.1	58.56	37.490	74.00	15.44	150	9	PK	PASS
2389.15	8.3	45.78	37.490	54.00	8.22	150	342	AV	PASS



Plot for Channel 78

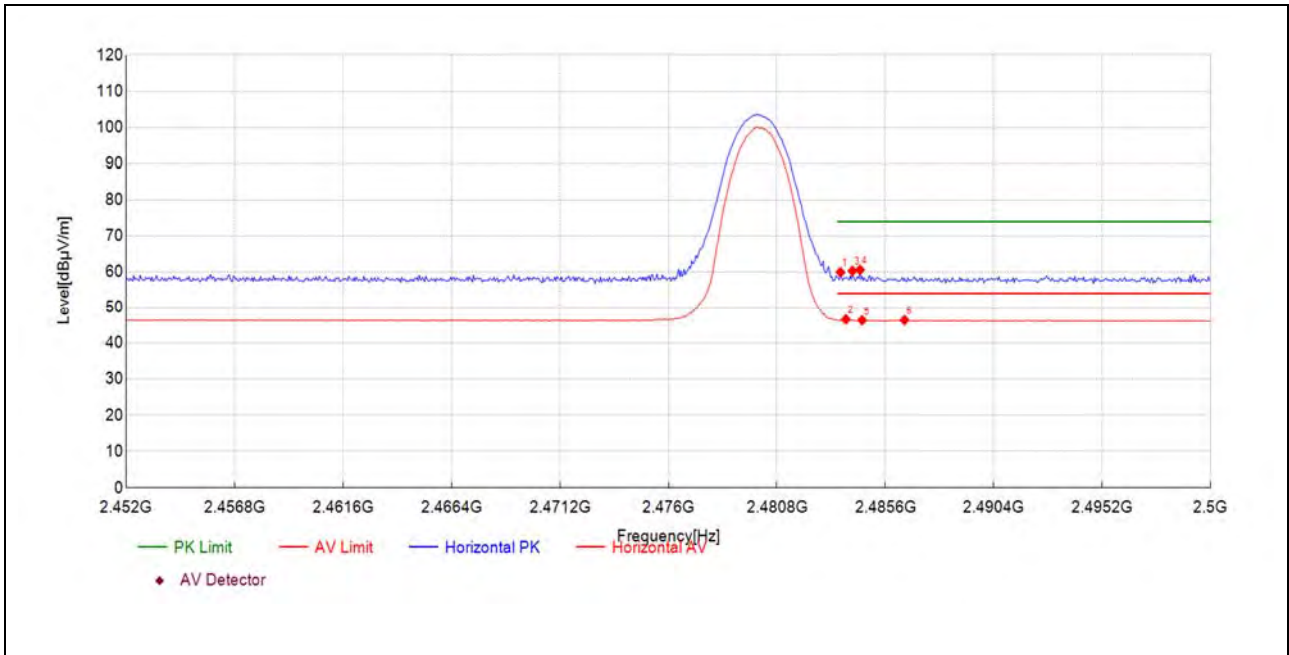

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.62	21.7	59.97	38.280	74.00	14.03	150	271	PK	PASS
2483.86	8.4	46.65	38.270	54.00	7.35	150	79	AV	PASS
2484.14	22.1	60.34	38.270	74.00	13.66	150	92	PK	PASS
2484.48	22.4	60.62	38.270	74.00	13.38	150	30	PK	PASS
2484.58	8.1	46.37	38.270	54.00	7.63	150	301	AV	PASS
2486.45	8.1	46.40	38.270	54.00	7.60	150	21	AV	PASS



A.12. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable\ loss} [dB] - G_{preamp} [dB]$$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.

Field strength of fundamental:


Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Detector	Antenna Polarity
2402.09	64.8	102.38	37.540	PK	Horizontal

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).




GFSK Mode

Plot for Channel 0

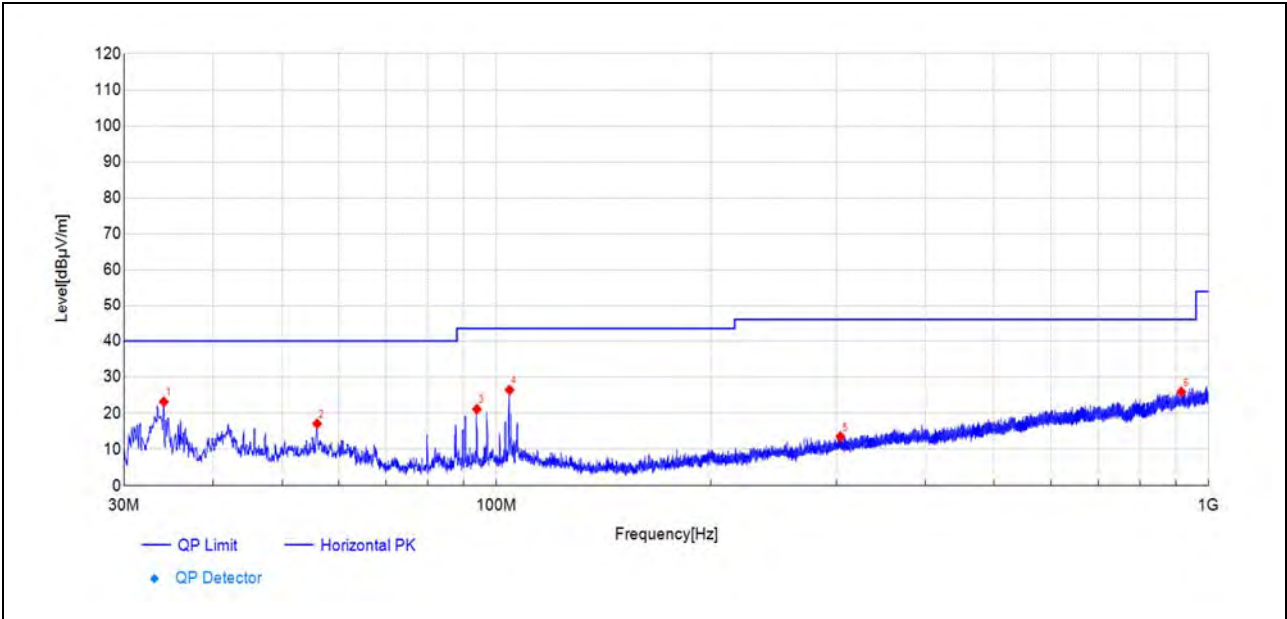


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
34.12	53.0	23.15	-29.860	40.00	16.85	150	179	PK	PASS
56.00	45.1	17.05	-28.050	40.00	22.95	150	142	PK	PASS
93.88	51.7	21.11	-30.600	43.50	22.39	150	110	PK	PASS
104.35	55.9	26.42	-29.490	43.50	17.08	150	283	PK	PASS
303.99	38.6	13.47	-25.160	46.00	32.53	150	205	PK	PASS
915.22	38.0	25.92	-12.120	46.00	20.08	150	226	PK	PASS

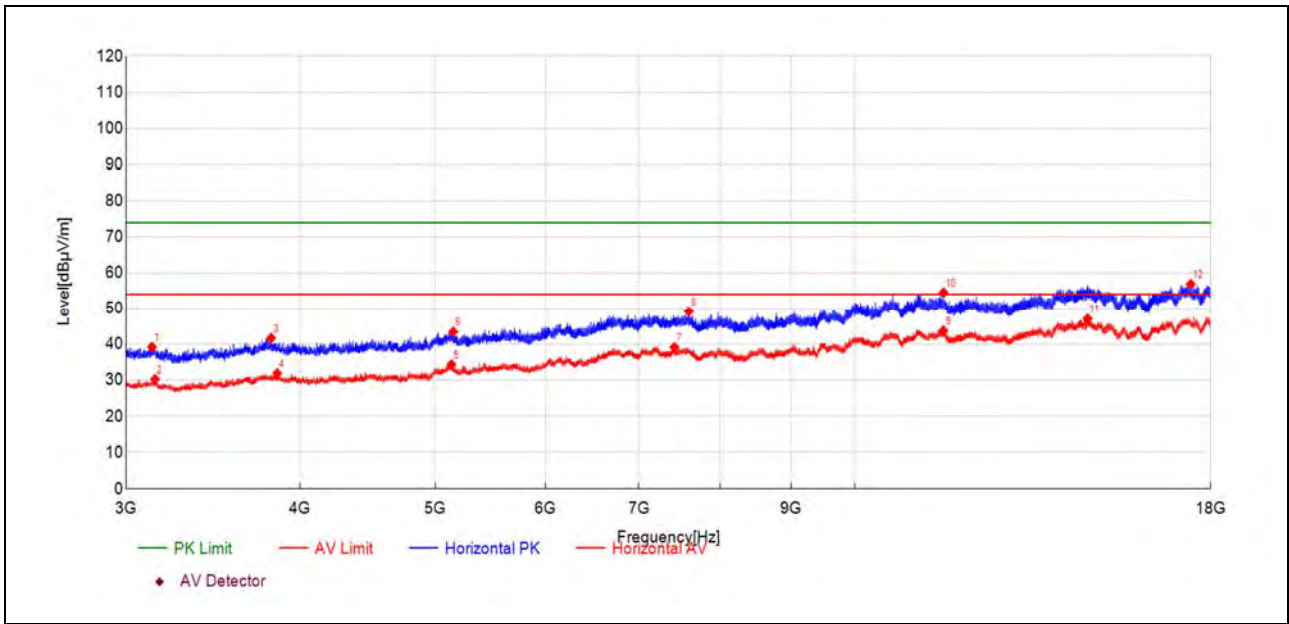


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
3131.50	49.7	39.20	-10.520	74.00	34.80	150	252	PK	PASS
3147.50	40.7	30.28	-10.410	54.00	23.72	150	154	AV	PASS
3812.03	49.9	41.71	-8.190	74.00	32.29	150	1	PK	PASS
3851.03	40.2	31.88	-8.350	54.00	22.12	150	351	AV	PASS
5135.57	37.1	34.33	-2.770	54.00	19.67	150	141	AV	PASS
5150.07	46.0	43.48	-2.550	74.00	30.52	150	58	PK	PASS
7422.15	34.5	39.16	4.680	54.00	14.84	150	58	AV	PASS
7601.15	44.3	49.25	4.940	74.00	24.75	150	240	PK	PASS
11573.79	29.4	43.80	14.430	54.00	10.20	150	301	AV	PASS
11577.79	40.1	54.55	14.450	74.00	19.45	150	240	PK	PASS
14690.39	26.6	47.12	20.570	54.00	6.88	150	179	AV	PASS
17413.48	36.7	56.92	20.250	74.00	17.08	150	301	PK	PASS

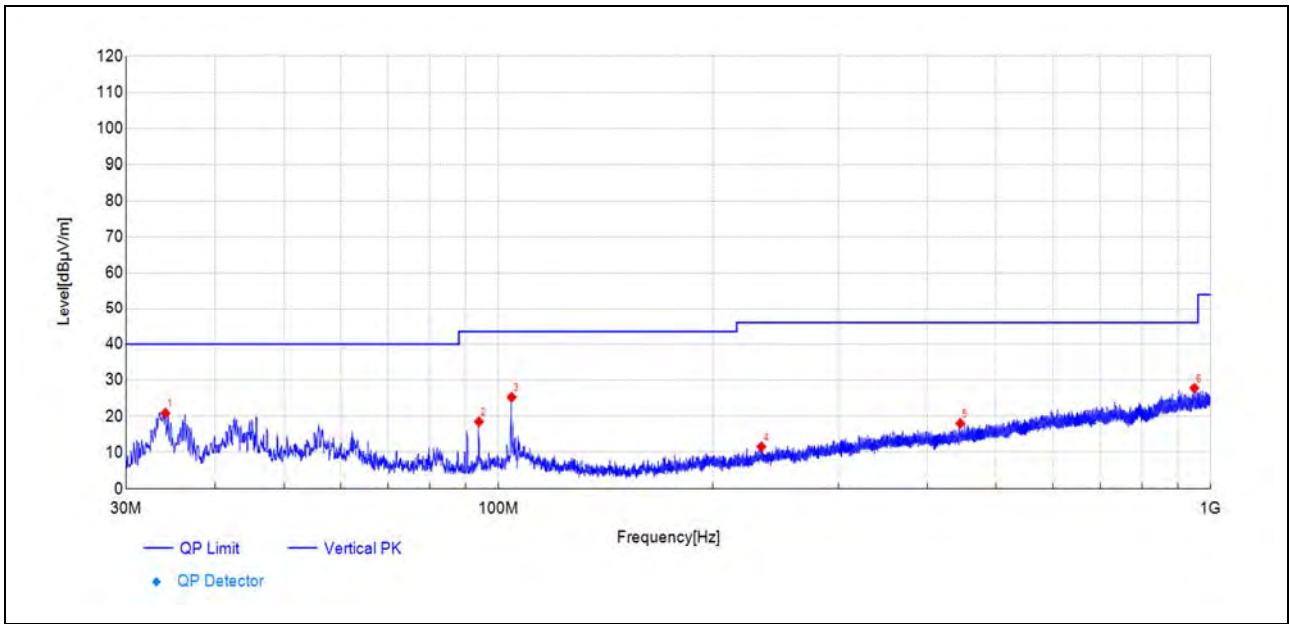

(Antenna Vertical, 30MHz to 1GHz)


Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
34.07	50.7	20.89	-29.850	40.00	19.11	150	119	PK	PASS
93.88	49.1	18.48	-30.600	43.50	25.02	150	293	PK	PASS
104.35	54.8	25.27	-29.490	43.50	18.23	150	0	PK	PASS
233.95	39.5	11.55	-27.920	46.00	34.45	150	351	PK	PASS
445.08	39.7	18.03	-21.670	46.00	27.97	150	198	PK	PASS
948.59	38.8	27.81	-10.980	46.00	18.19	150	10	PK	PASS

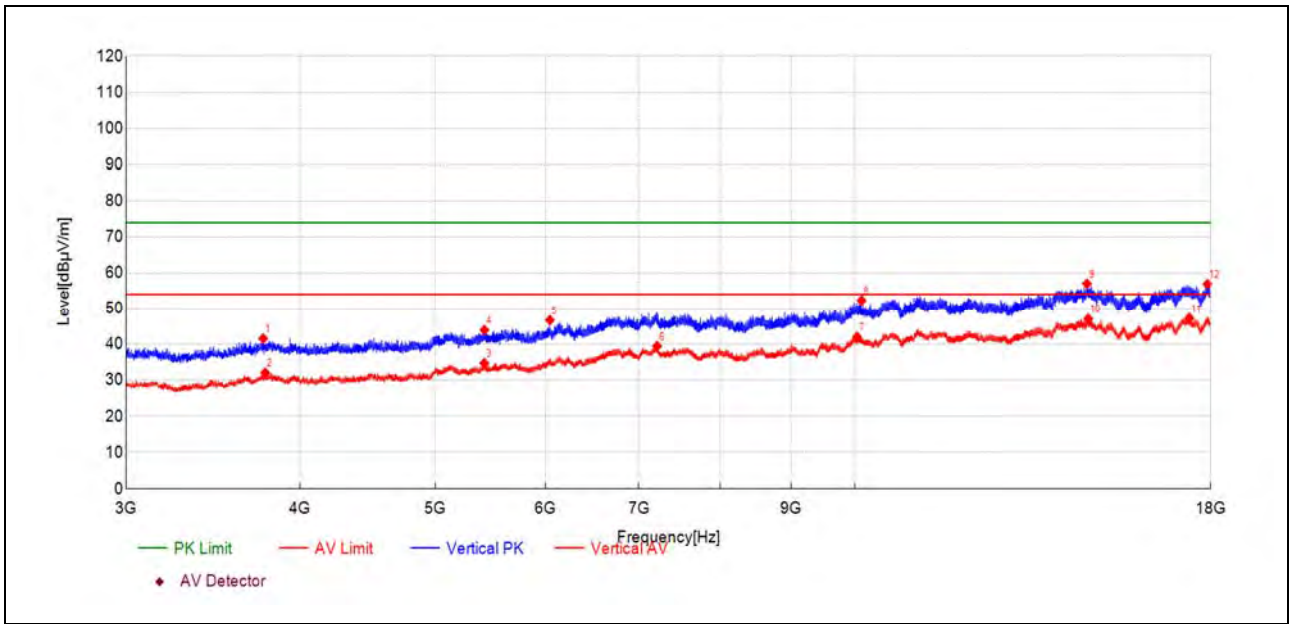

(Antenna Vertical, 1GHz to 18GHz)


Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
3763.03	50.0	41.56	-8.410	74.00	32.44	150	351	PK	PASS
3775.03	40.4	32.06	-8.330	54.00	21.94	150	95	AV	PASS
5421.58	36.6	34.73	-1.830	54.00	19.27	150	359	AV	PASS
5423.08	45.8	43.97	-1.850	74.00	30.03	150	242	PK	PASS
6041.60	46.0	46.75	0.720	74.00	27.25	150	302	PK	PASS
7213.14	34.6	39.47	4.920	54.00	14.53	150	302	AV	PASS
10035.73	31.4	42.05	10.620	54.00	11.95	150	22	AV	PASS
10110.24	41.6	52.35	10.740	74.00	21.65	150	22	PK	PASS
14671.89	36.5	57.03	20.530	74.00	16.97	150	133	PK	PASS
14703.89	26.6	47.13	20.570	54.00	6.87	150	169	AV	PASS
17373.98	27.5	47.33	19.830	54.00	6.67	150	359	AV	PASS
17904.00	37.4	56.91	19.470	74.00	17.09	150	71	PK	PASS

Plot for Channel 39

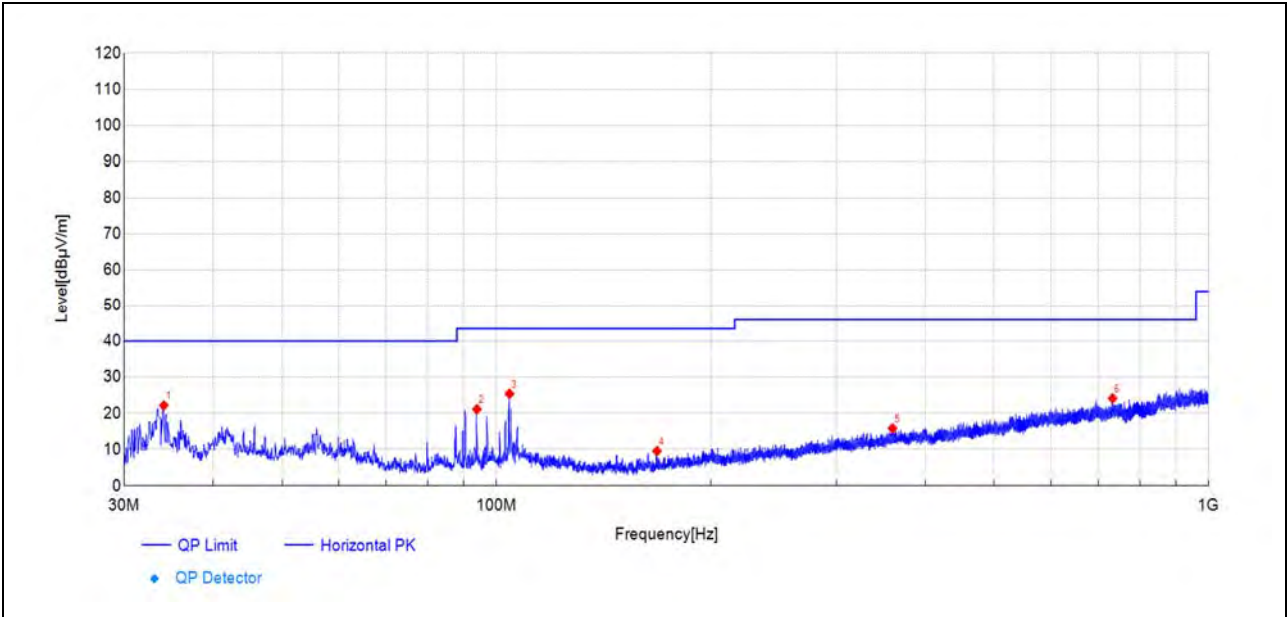


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
34.12	52.0	22.13	-29.860	40.00	17.87	150	194	PK	PASS
93.88	51.7	21.10	-30.600	43.50	22.40	150	47	PK	PASS
104.31	54.9	25.40	-29.520	43.50	18.10	150	168	PK	PASS
168.04	40.4	9.50	-30.910	43.50	34.00	150	336	PK	PASS
359.82	39.2	15.79	-23.390	46.00	30.21	150	168	PK	PASS
732.70	39.4	24.11	-15.240	46.00	21.89	150	131	PK	PASS

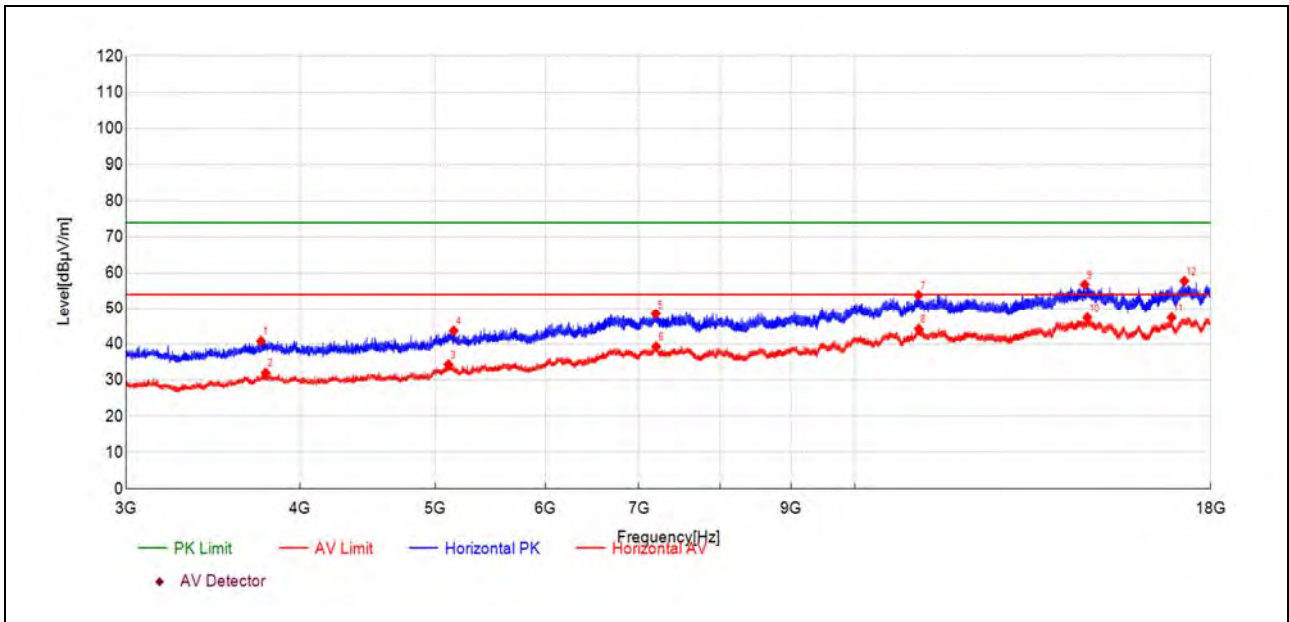


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
3749.02	49.4	40.86	-8.530	74.00	33.14	150	34	PK	PASS
3778.53	40.4	32.06	-8.290	54.00	21.94	150	242	AV	PASS
5110.07	37.5	34.35	-3.180	54.00	19.65	150	59	AV	PASS
5155.07	46.4	43.73	-2.660	74.00	30.27	150	266	PK	PASS
7197.64	43.5	48.55	5.090	74.00	25.45	150	83	PK	PASS
7201.64	34.2	39.33	5.090	54.00	14.67	150	132	AV	PASS
11108.27	39.8	53.84	14.030	74.00	20.16	150	83	PK	PASS
11114.27	30.2	44.24	14.000	54.00	9.76	150	132	AV	PASS
14616.39	36.4	56.82	20.380	74.00	17.18	150	302	PK	PASS
14680.89	26.9	47.46	20.550	54.00	6.54	150	34	AV	PASS
16875.96	27.1	47.46	20.320	54.00	6.54	150	279	AV	PASS
17232.97	38.2	57.79	19.590	74.00	16.21	150	156	PK	PASS

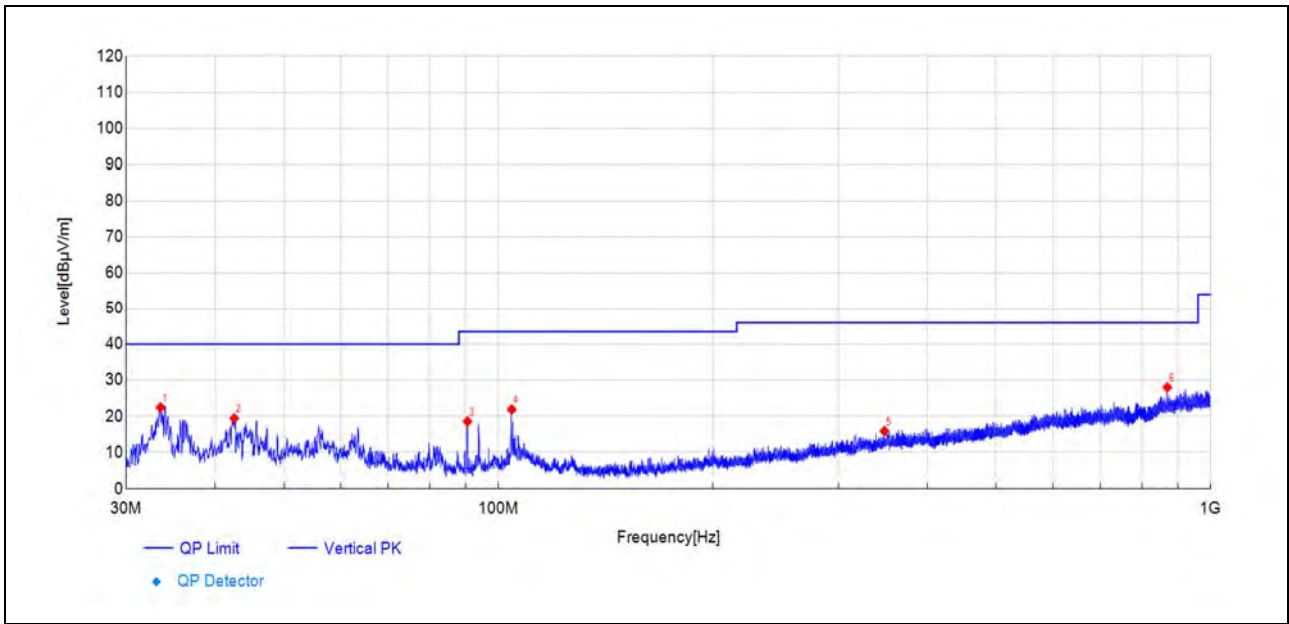

(Antenna Vertical, 30MHz to 1GHz)


Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
33.54	52.6	22.44	-30.130	40.00	17.56	150	277	PK	PASS
42.56	47.7	19.40	-28.310	40.00	20.60	150	124	PK	PASS
90.48	50.0	18.56	-31.470	43.50	24.94	150	72	PK	PASS
104.35	51.4	21.88	-29.490	43.50	21.62	150	298	PK	PASS
348.27	39.9	15.90	-23.970	46.00	30.10	150	262	PK	PASS
869.09	40.5	28.02	-12.430	46.00	17.98	150	330	PK	PASS

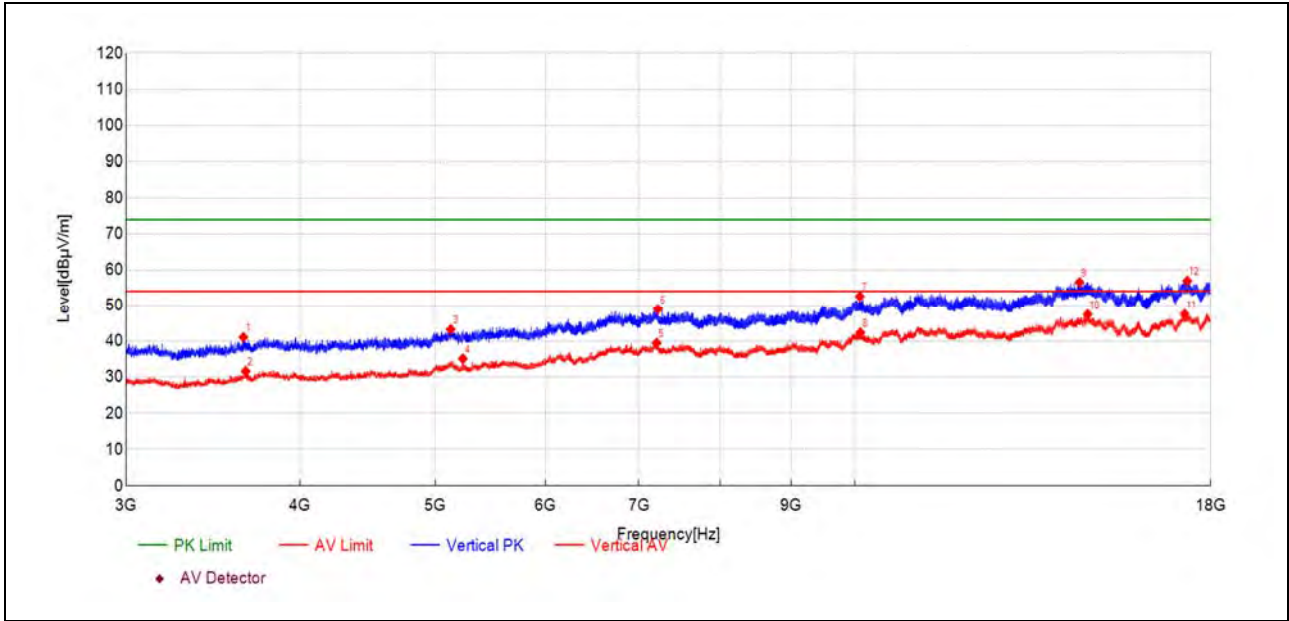

(Antenna Vertical, 1GHz to 18GHz)


Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
3642.02	50.0	41.14	-8.840	74.00	32.86	150	9	PK	PASS
3655.52	40.5	31.66	-8.850	54.00	22.34	150	96	AV	PASS
5129.57	46.2	43.30	-2.870	74.00	30.70	150	290	PK	PASS
5233.57	38.3	35.15	-3.110	54.00	18.85	150	9	AV	PASS
7207.14	34.5	39.55	5.010	54.00	14.45	150	302	AV	PASS
7223.14	44.3	49.05	4.770	74.00	24.95	150	279	PK	PASS
10081.74	41.9	52.62	10.680	74.00	21.38	150	182	PK	PASS
10090.74	31.7	42.42	10.700	54.00	11.58	150	133	AV	PASS
14491.88	36.9	56.59	19.710	74.00	17.41	150	217	PK	PASS
14689.89	27.0	47.53	20.570	54.00	6.47	150	352	AV	PASS
17238.97	28.1	47.57	19.520	54.00	6.43	150	22	AV	PASS
17316.48	37.9	56.96	19.100	74.00	17.04	150	193	PK	PASS

Plot for Channel 78

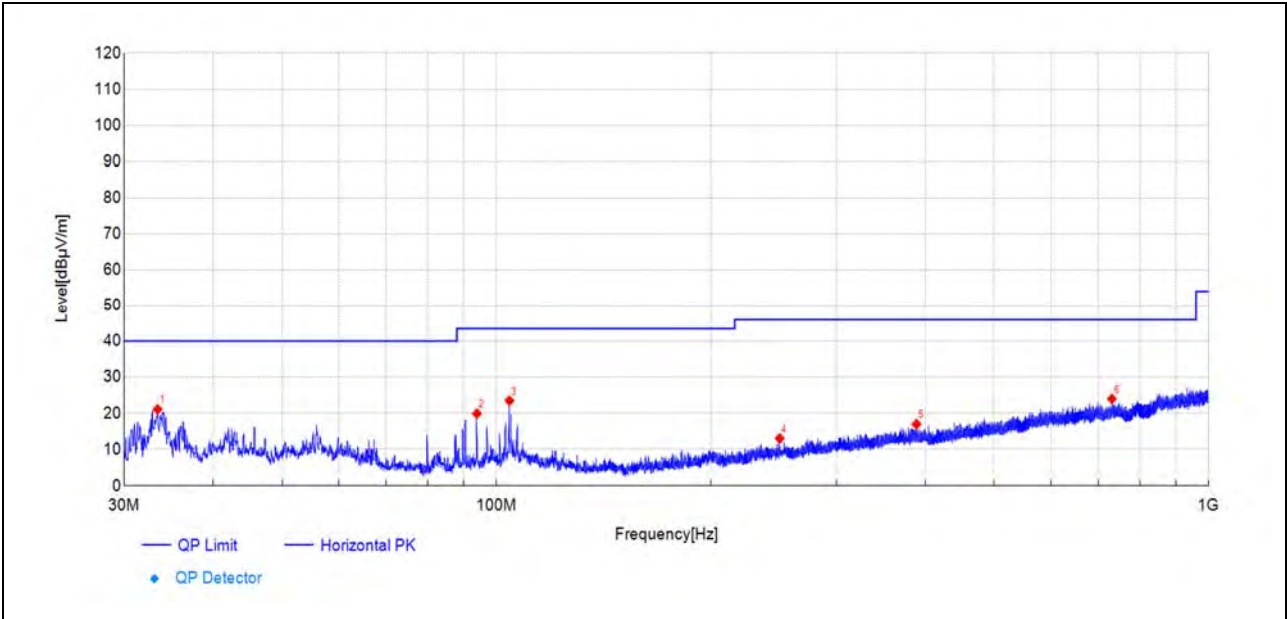


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
33.44	51.3	21.07	-30.180	40.00	18.93	150	30	PK	PASS
93.88	50.5	19.88	-30.600	43.50	23.62	150	35	PK	PASS
104.31	53.0	23.48	-29.520	43.50	20.02	150	218	PK	PASS
249.86	40.5	12.99	-27.490	46.00	33.01	150	334	PK	PASS
388.82	39.6	16.96	-22.660	46.00	29.04	150	208	PK	PASS
731.35	39.4	23.97	-15.460	46.00	22.03	150	40	PK	PASS

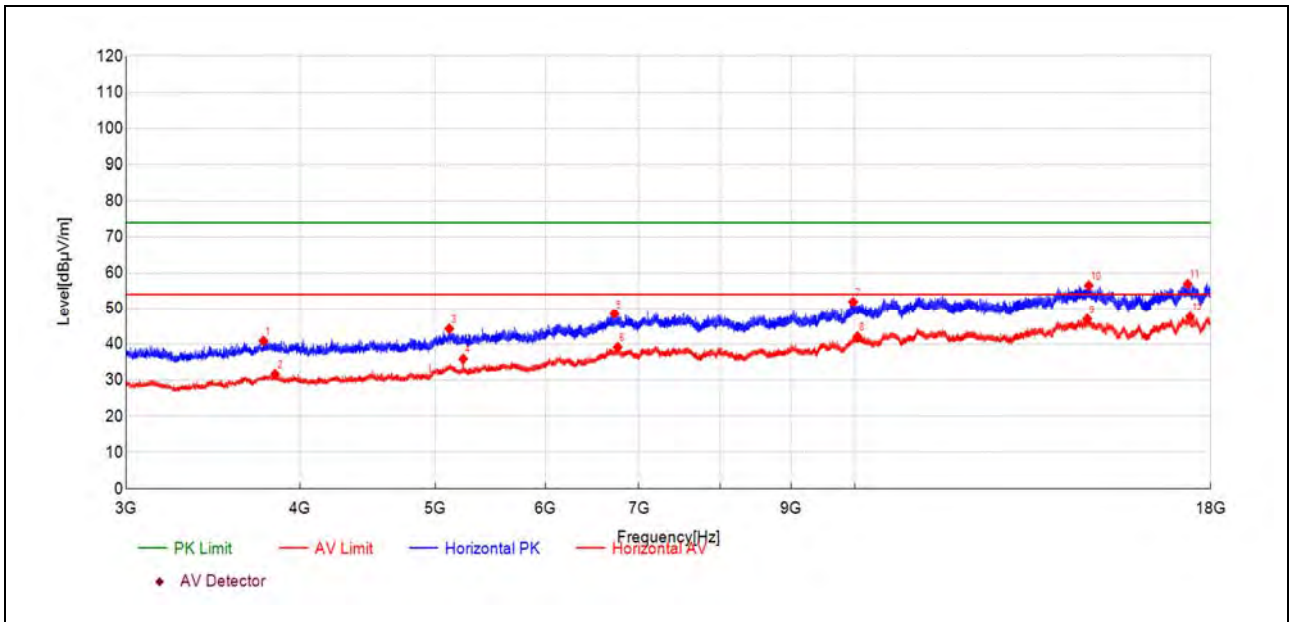


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
3764.53	49.3	40.90	-8.400	74.00	33.10	150	328	PK	PASS
3837.53	40.0	31.69	-8.310	54.00	22.31	150	82	AV	PASS
5116.57	47.4	44.31	-3.070	74.00	29.69	150	9	PK	PASS
5236.57	39.0	35.92	-3.060	54.00	18.08	150	229	AV	PASS
6722.62	44.5	48.55	4.060	74.00	25.45	150	120	PK	PASS
6757.63	35.1	39.19	4.060	54.00	14.81	150	156	AV	PASS
9970.23	42.0	51.97	9.990	74.00	22.03	150	181	PK	PASS
10042.23	31.5	42.13	10.630	54.00	11.87	150	82	AV	PASS
14681.39	26.5	47.07	20.550	54.00	6.93	150	22	AV	PASS
14717.39	36.1	56.52	20.450	74.00	17.48	150	70	PK	PASS
17329.98	37.7	56.95	19.270	74.00	17.05	150	352	PK	PASS
17398.98	27.5	47.68	20.150	54.00	6.32	150	206	AV	PASS

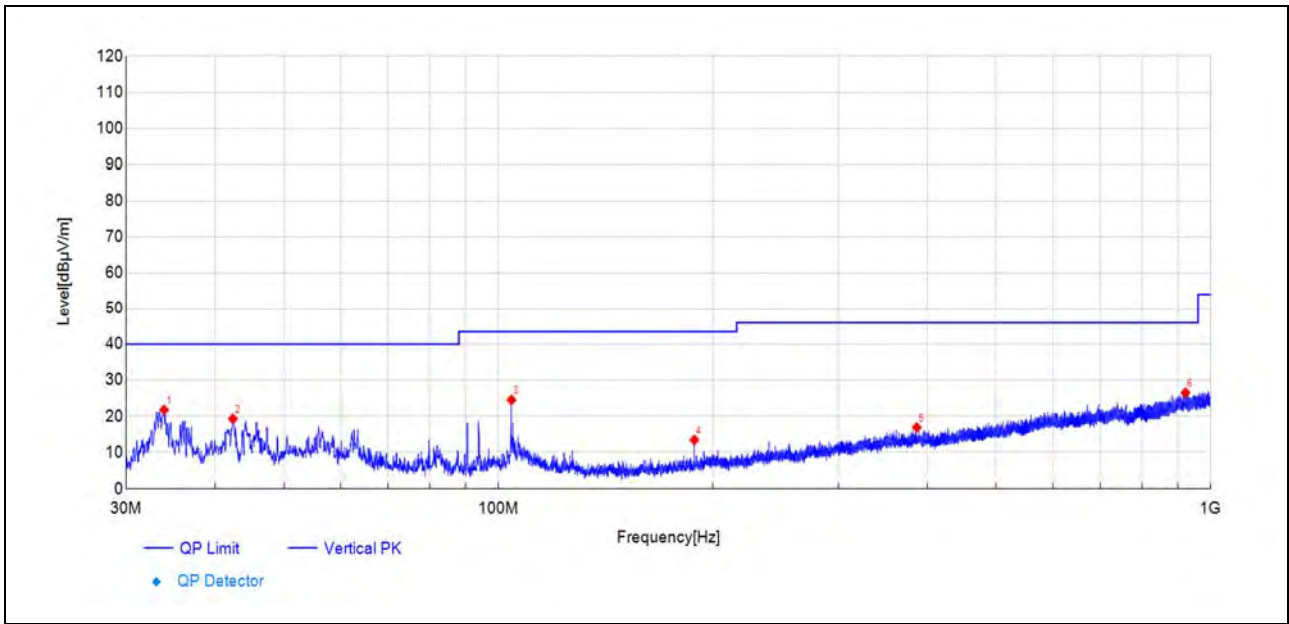

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
33.93	51.7	21.78	-29.880	40.00	18.22	150	68	PK	PASS
42.37	47.7	19.30	-28.430	40.00	20.70	150	52	PK	PASS
104.31	54.0	24.51	-29.520	43.50	18.99	150	9	PK	PASS
188.41	43.5	13.41	-30.060	43.50	30.09	150	9	PK	PASS
386.64	39.5	16.87	-22.610	46.00	29.13	150	357	PK	PASS
921.72	38.2	26.56	-11.650	46.00	19.44	150	216	PK	PASS

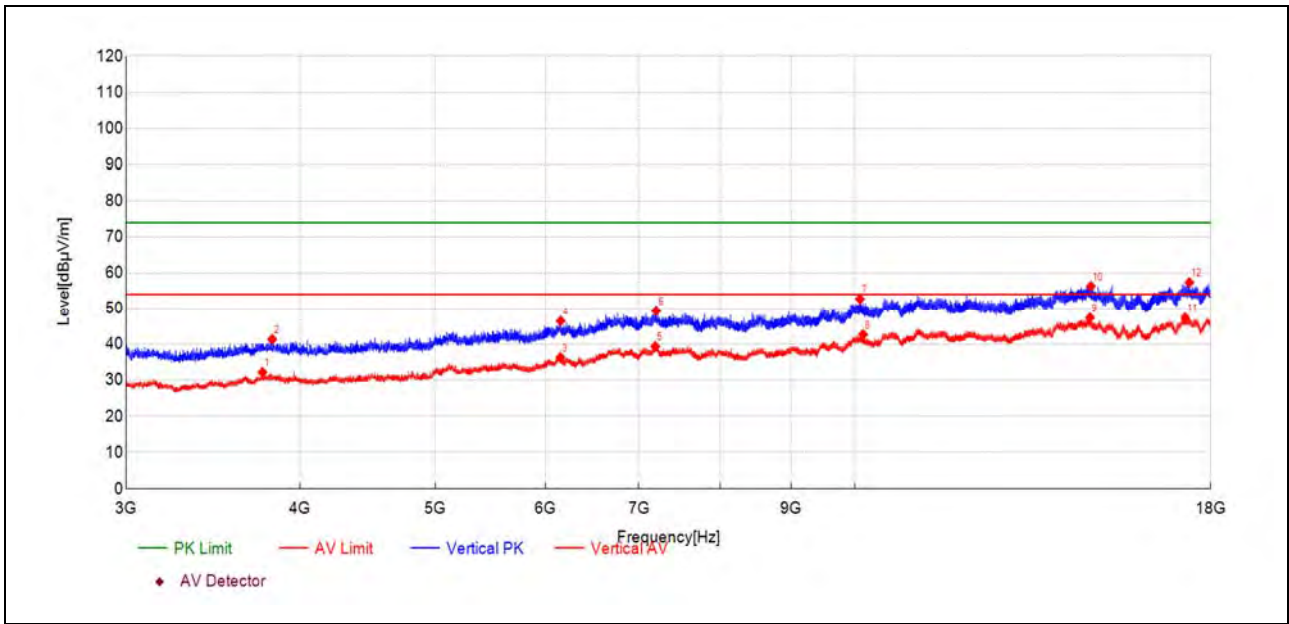

(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
3758.53	40.7	32.22	-8.440	54.00	21.78	150	316	AV	PASS
3819.53	49.6	41.36	-8.230	74.00	32.64	150	82	PK	PASS
6149.60	34.8	36.35	1.520	54.00	17.65	150	316	AV	PASS
6151.11	45.0	46.49	1.520	74.00	27.51	150	8	PK	PASS
7191.14	34.4	39.40	5.030	54.00	14.60	150	253	AV	PASS
7201.64	44.3	49.39	5.090	74.00	24.61	150	241	PK	PASS
10084.74	42.1	52.76	10.690	74.00	21.24	150	192	PK	PASS
10136.24	31.9	42.72	10.810	54.00	11.28	150	1	AV	PASS
14746.89	27.2	47.43	20.190	54.00	6.57	150	180	AV	PASS
14766.89	36.3	56.33	20.010	74.00	17.67	150	351	PK	PASS
17256.48	28.1	47.42	19.340	54.00	6.58	150	192	AV	PASS
17375.48	37.6	57.41	19.840	74.00	16.59	150	327	PK	PASS

————— END OF REPORT —————