


802.11a mode/5500MHz


Detector mode: Average

Polarity: Horizontal

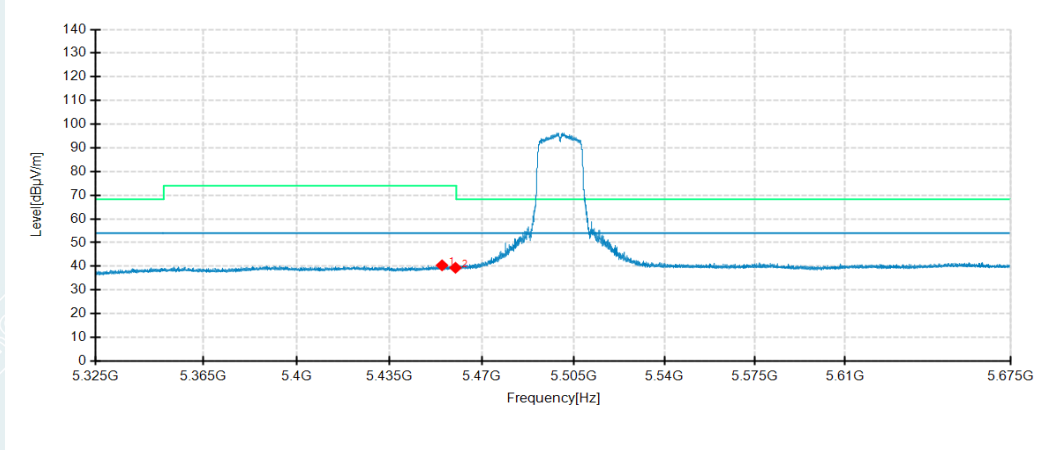

Detector mode: Average

Polarity: Vertical

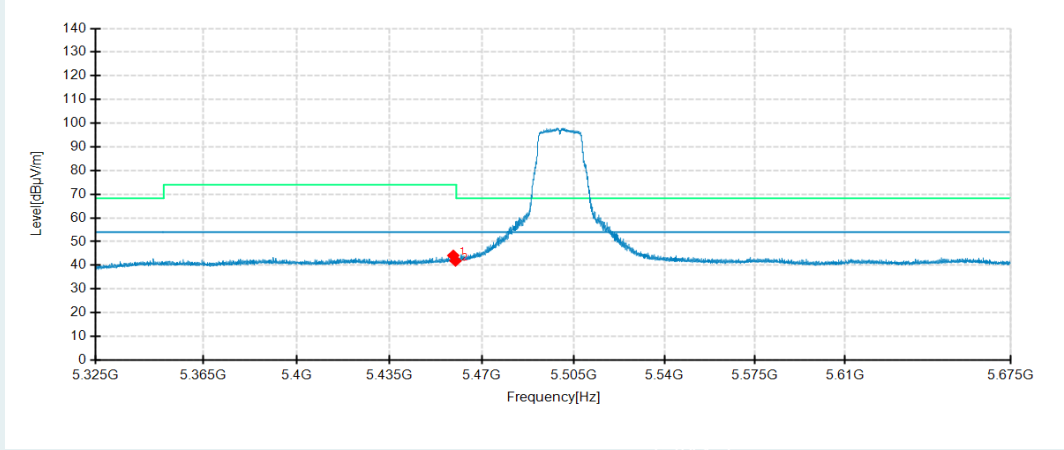


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5454.8850	24.60	40.40	15.80	54.00	13.60	200	193	Horizontal	/
2	5460.0000	23.56	39.38	15.82	54.00	14.62	100	315	Horizontal	/
1	5459.1550	28.33	44.14	15.81	54.00	9.86	200	209	Vertical	/
2	5460.0000	26.06	41.88	15.82	54.00	12.12	200	354	Vertical	/

802.11a mode/5580MHz


Detector mode: Peak

Polarity: Horizontal

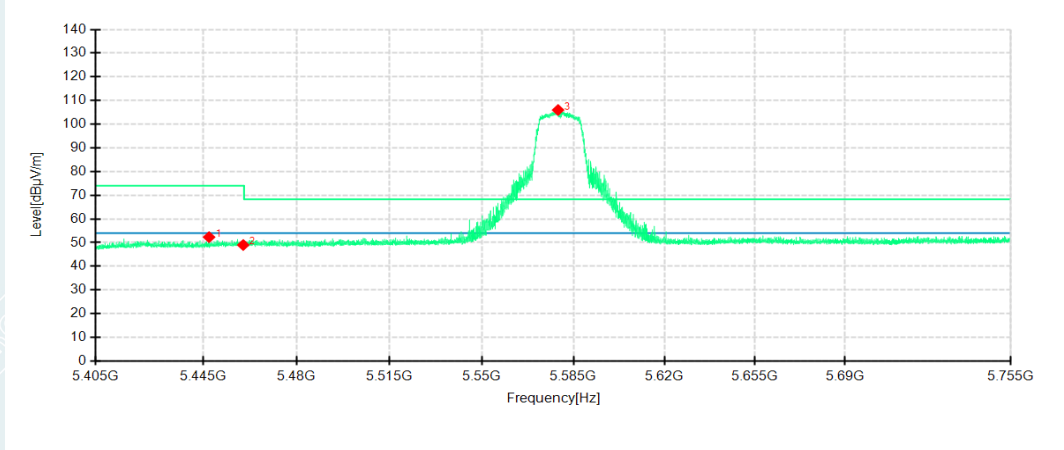

Detector mode: Peak

Polarity: Vertical

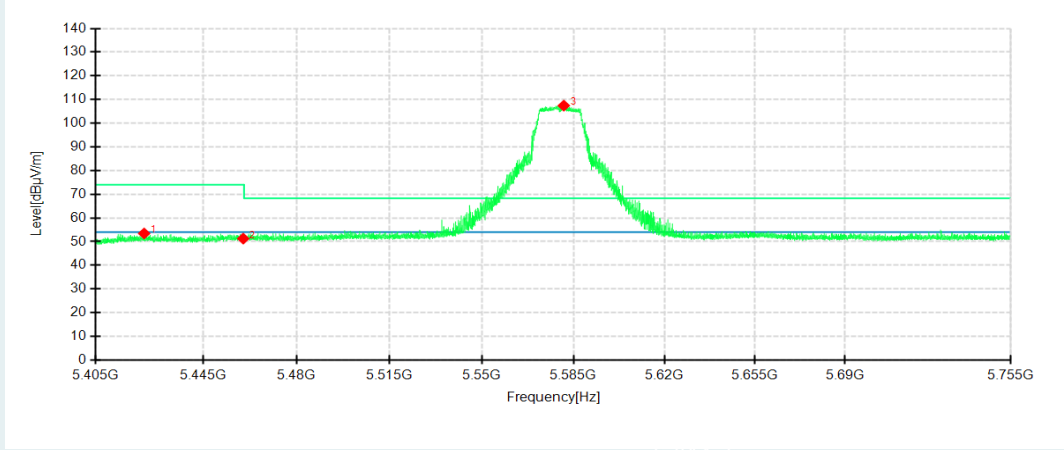


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5447.2100	36.54	52.31	15.77	74.00	21.69	200	193	Horizontal	/
2	5460.0000	33.17	48.99	15.82	74.00	25.01	200	193	Horizontal	/
3	5579.1250	89.81	105.98	16.17	68.30	-37.68	200	193	Horizontal	No limit
1	5423.0250	37.71	53.43	15.72	74.00	20.57	200	192	Vertical	/
2	5460.0000	35.44	51.26	15.82	74.00	22.74	200	167	Vertical	/
3	5581.3300	91.28	107.42	16.14	68.30	-39.12	200	216	Vertical	No limit

802.11a mode/5580MHz


Detector mode: Average

Polarity: Horizontal

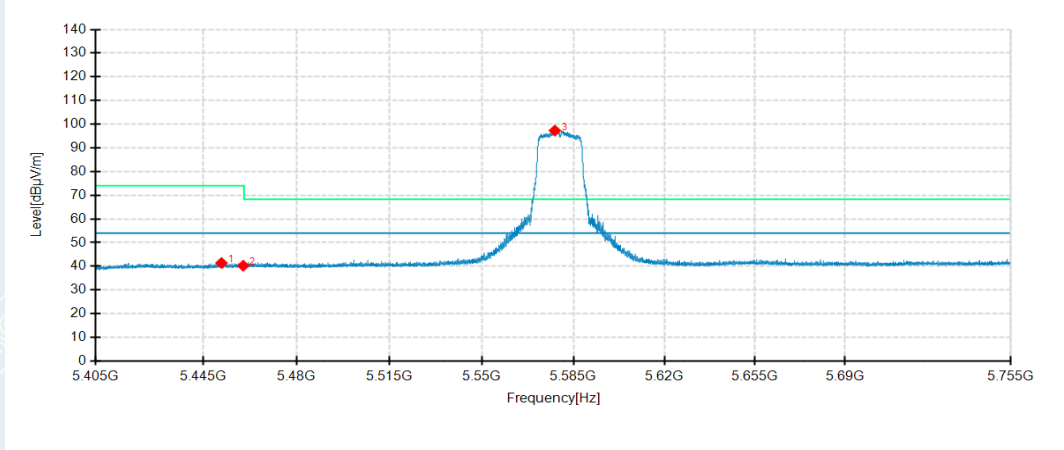

Detector mode: Average

Polarity: Vertical

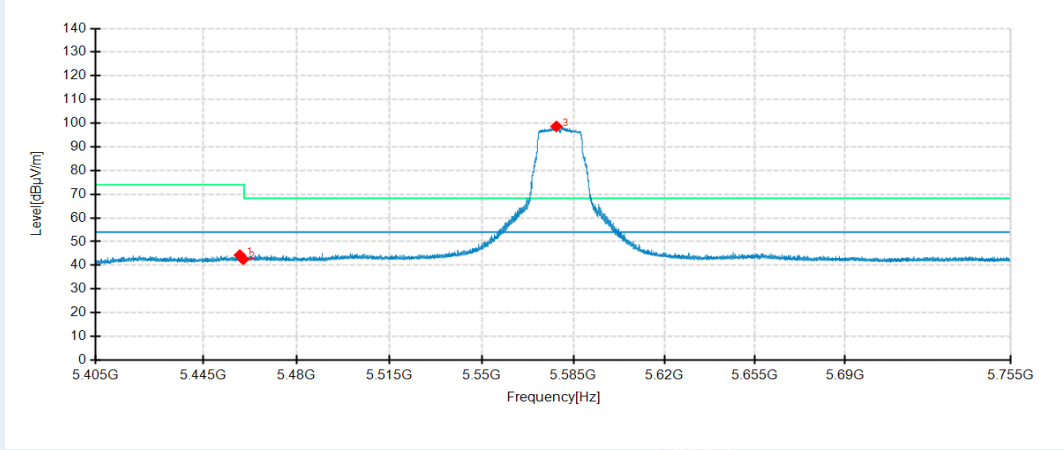


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5451.8650	25.60	41.39	15.79	54.00	12.61	200	193	Horizontal	/
2	5460.0000	24.43	40.25	15.82	54.00	13.75	200	193	Horizontal	/
3	5577.9000	81.11	97.29	16.18	54.00	-43.29	200	193	Horizontal	No limit
1	5458.7250	28.48	44.29	15.81	54.00	9.71	200	167	Vertical	/
2	5460.0000	26.72	42.54	15.82	54.00	11.46	200	167	Vertical	/
3	5578.4950	82.46	98.63	16.17	54.00	-44.63	200	167	Vertical	No limit

802.11a mode/5700MHz


Detector mode: Peak

Polarity: Horizontal

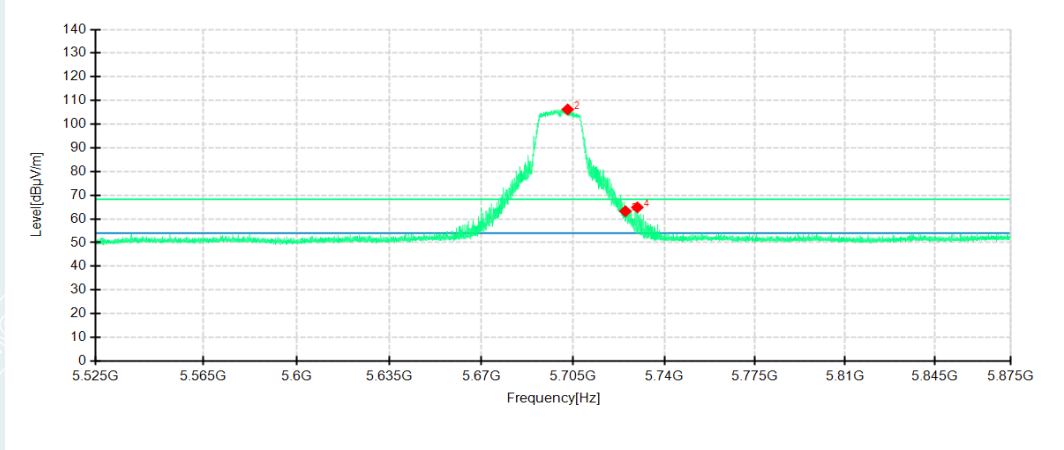

Detector mode: Peak

Polarity: Vertical

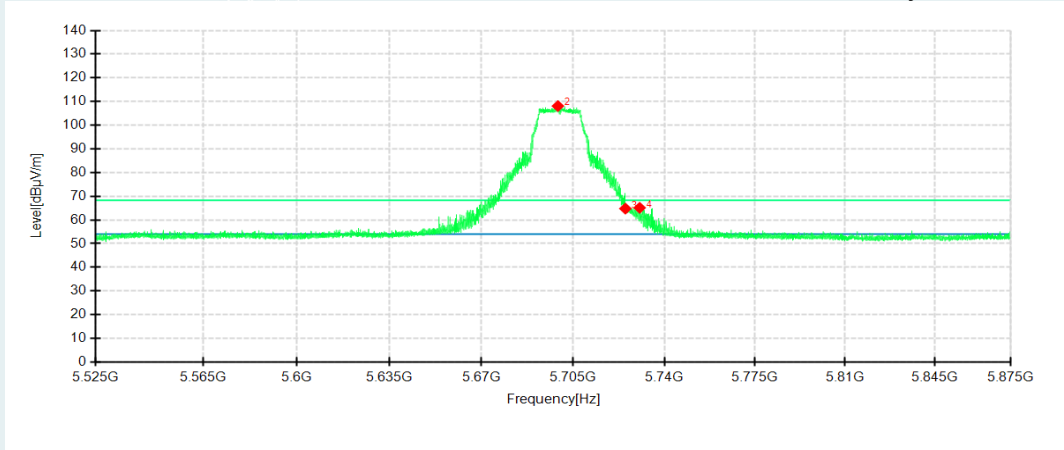


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	32.96	49.19	16.23	68.30	19.11	200	193	Horizontal	/
2	5702.8700	89.86	106.24	16.38	68.30	-37.94	200	193	Horizontal	No limit
3	5725.0000	46.46	63.25	16.79	68.30	5.05	200	193	Horizontal	/
4	5729.6100	48.02	64.89	16.87	68.30	3.41	200	193	Horizontal	/
1	5460.0000	35.67	51.90	16.23	68.30	16.40	200	167	Vertical	/
2	5699.1250	91.75	108.09	16.34	68.30	-39.79	200	167	Vertical	No limit
3	5725.0000	47.98	64.77	16.79	68.30	3.53	200	167	Vertical	/
4	5730.4850	48.24	65.13	16.89	68.30	3.17	200	200	Vertical	/

802.11a mode/5700MHz


Detector mode: Average

Polarity: Horizontal

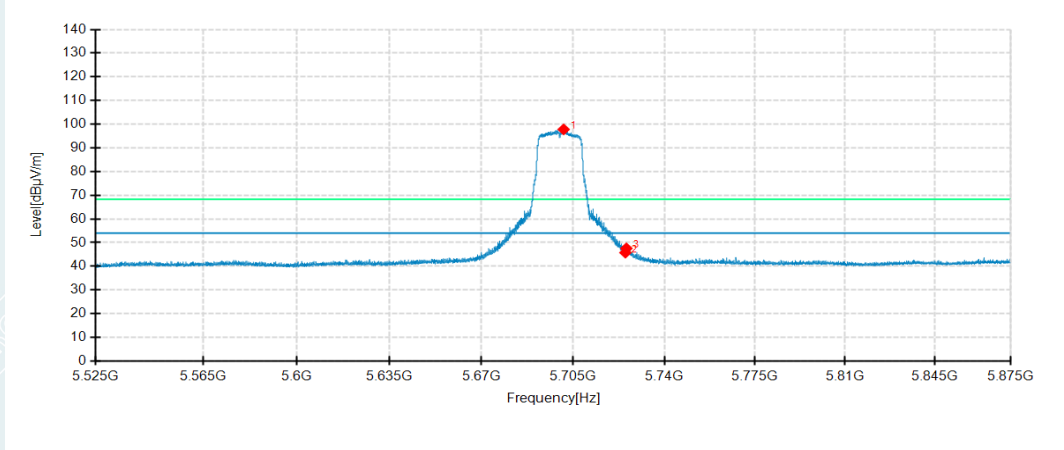

Detector mode: Average

Polarity: Vertical

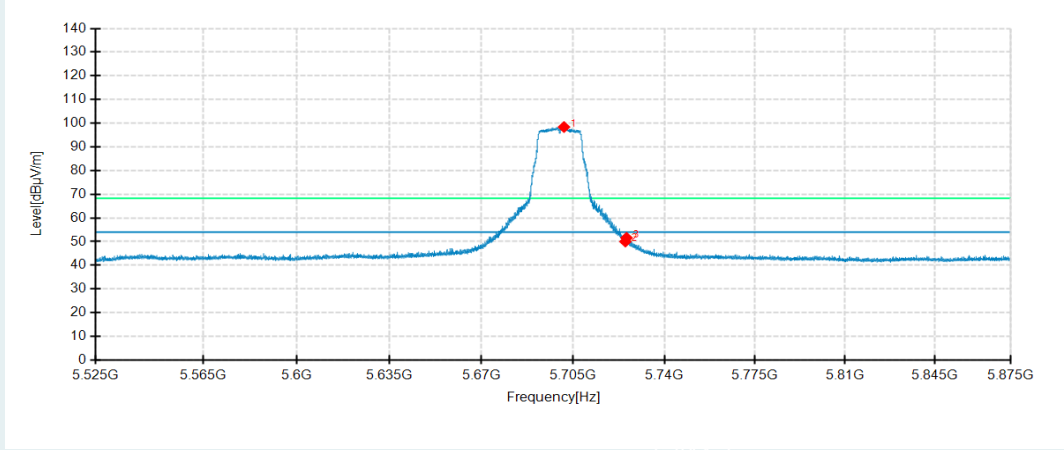


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5701.3300	81.45	97.80	16.35	54.00	-43.80	200	193	Horizontal	No limit
2	5725.0000	28.97	45.76	16.79	54.00	8.24	200	193	Horizontal	/
3	5725.3750	30.75	47.55	16.80	54.00	6.45	200	193	Horizontal	/
1	5701.4700	82.02	98.38	16.36	54.00	-44.38	200	257	Vertical	No limit
2	5725.0000	33.22	50.01	16.79	54.00	3.99	200	208	Vertical	/
3	5725.4450	34.79	51.59	16.80	54.00	2.41	200	167	Vertical	/

802.11n HT20 mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

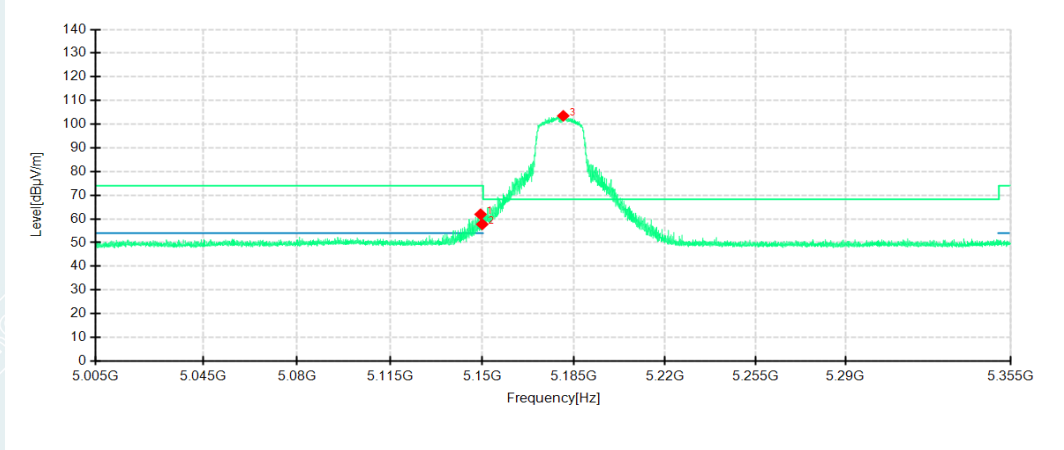

Detector mode: Peak

Polarity: Vertical

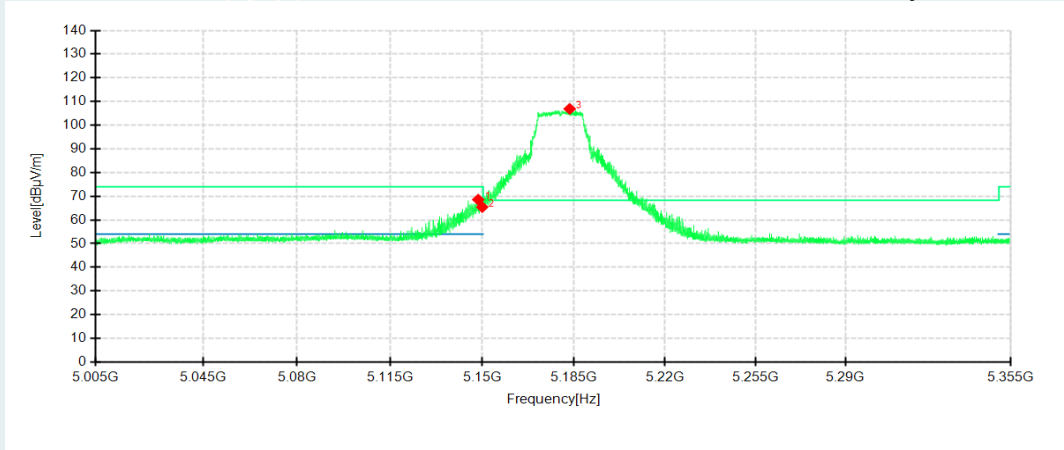


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.3750	48.16	61.94	13.78	74.00	12.06	200	193	Horizontal	/
2	5150.0000	43.98	57.75	13.77	74.00	16.25	200	176	Horizontal	/
3	5180.9100	89.01	103.53	14.52	68.30	-35.23	200	185	Horizontal	No limit
1	5148.4650	54.77	68.57	13.80	74.00	5.43	200	167	Vertical	/
2	5150.0000	51.65	65.42	13.77	74.00	8.58	200	167	Vertical	/
3	5183.3600	92.30	106.88	14.58	68.30	-38.58	200	167	Vertical	No limit

802.11n HT20 mode/5180MHz


Detector mode: Average

Polarity: Horizontal

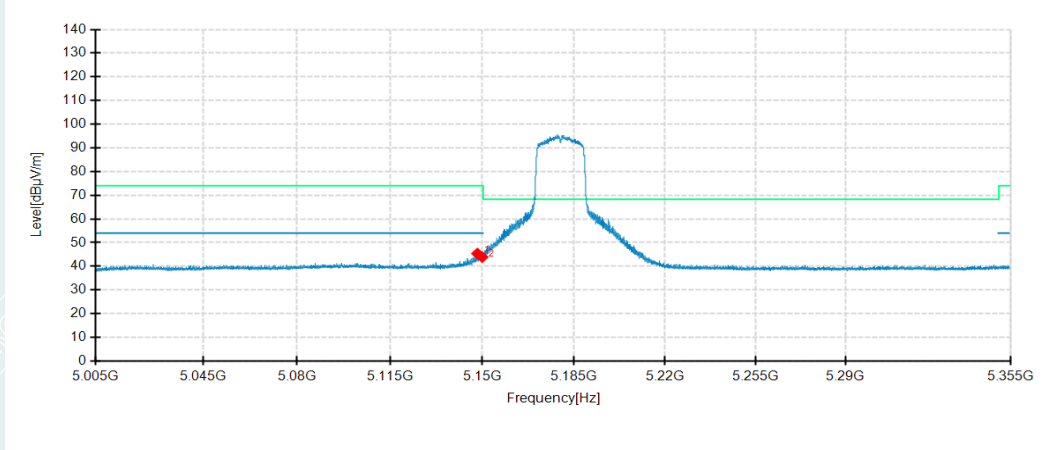

Detector mode: Average


Polarity: Vertical

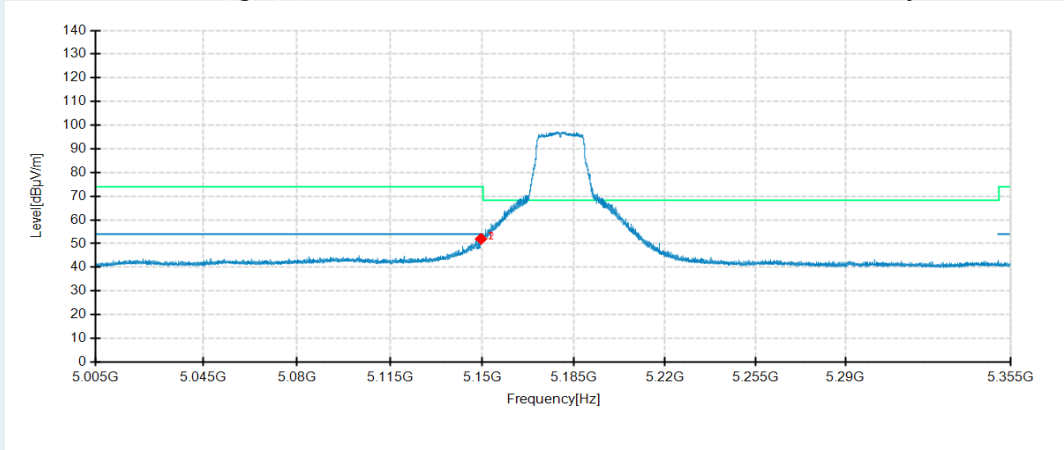

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.1500	31.55	45.36	13.81	54.00	8.64	200	193	Horizontal	/
2	5150.0000	30.13	43.90	13.77	54.00	10.10	200	176	Horizontal	/
1	5149.5500	38.21	51.99	13.78	54.00	2.01	200	167	Vertical	/
2	5150.0000	37.55	51.32	13.77	54.00	2.68	200	217	Vertical	/


802.11n HT20 mode/5200MHz
Detector mode: Peak

Polarity: Horizontal

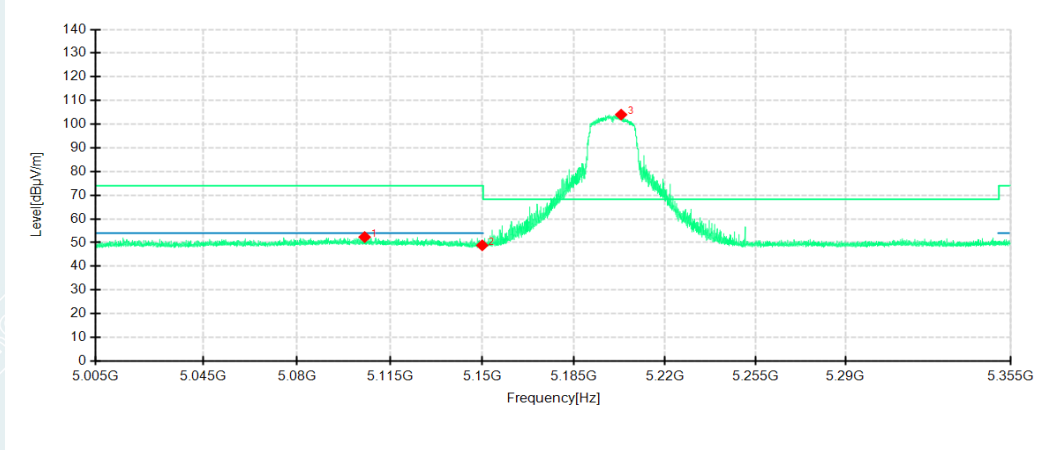

Detector mode: Peak


Polarity: Vertical

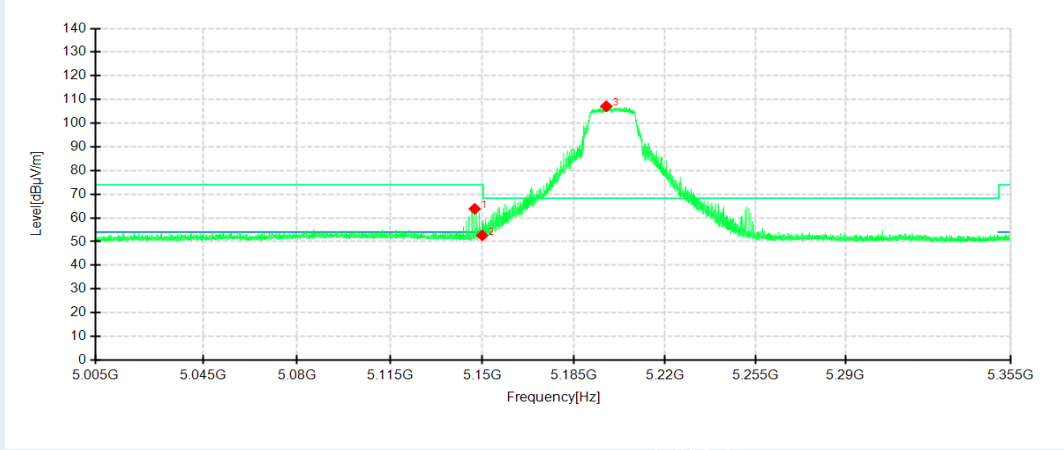

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5105.4500	37.60	52.33	14.73	74.00	21.67	100	192	Horizontal	/
2	5150.0000	35.07	48.84	13.77	74.00	25.16	200	193	Horizontal	/
3	5203.1000	89.09	104.03	14.94	68.30	-35.73	200	193	Horizontal	No limit
1	5147.1350	50.00	63.83	13.83	74.00	10.17	200	209	Vertical	/
2	5150.0000	38.85	52.62	13.77	74.00	21.38	200	167	Vertical	/
3	5197.3950	92.21	107.14	14.93	68.30	-38.84	100	61	Vertical	No limit


802.11n HT20 mode/5200MHz
Detector mode: Average

Polarity: Horizontal

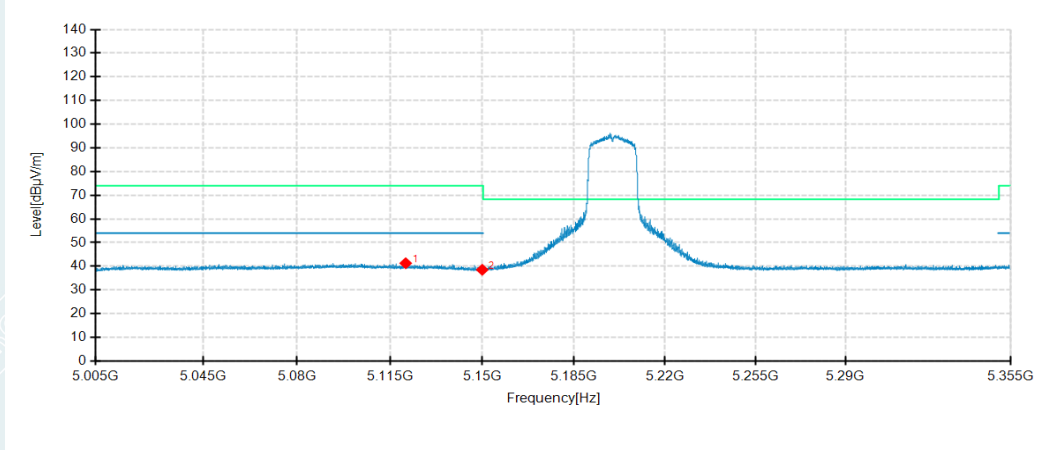

Detector mode: Average


Polarity: Vertical

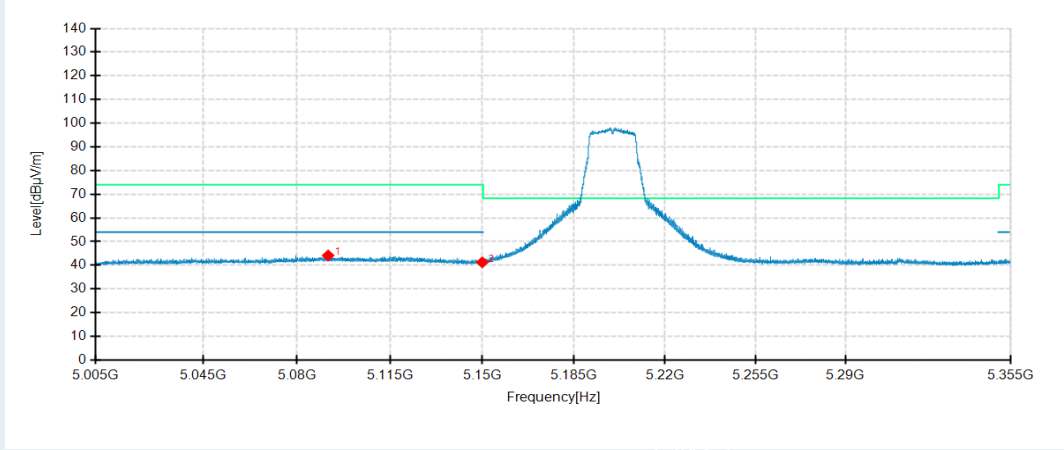

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5120.9550	26.89	41.29	14.40	54.00	12.71	200	176	Horizontal	/
2	5150.0000	24.76	38.53	13.77	54.00	15.47	200	168	Horizontal	/
1	5091.7300	29.38	44.15	14.77	54.00	9.85	200	167	Vertical	/
2	5150.0000	27.48	41.25	13.77	54.00	12.75	200	184	Vertical	/


802.11n HT20 mode/5240MHz
Detector mode: Peak

Polarity: Horizontal

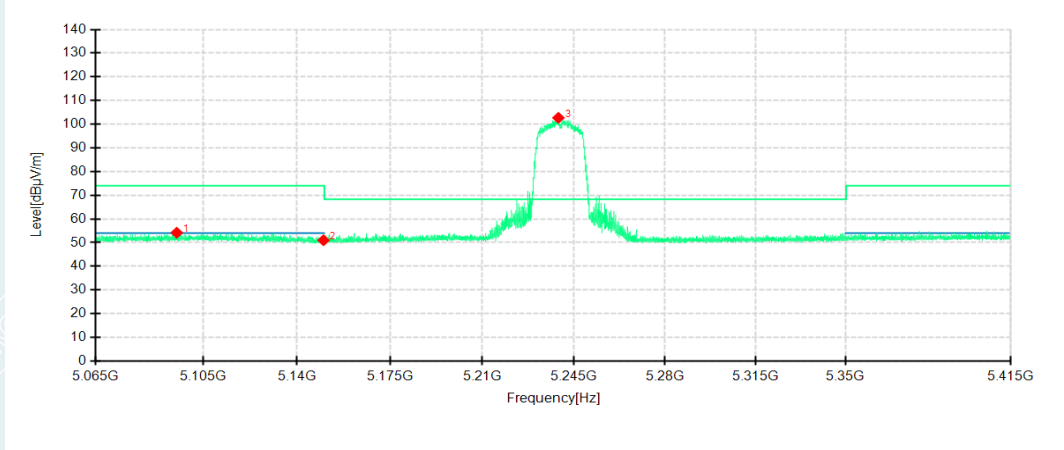

Detector mode: Peak


Polarity: Vertical

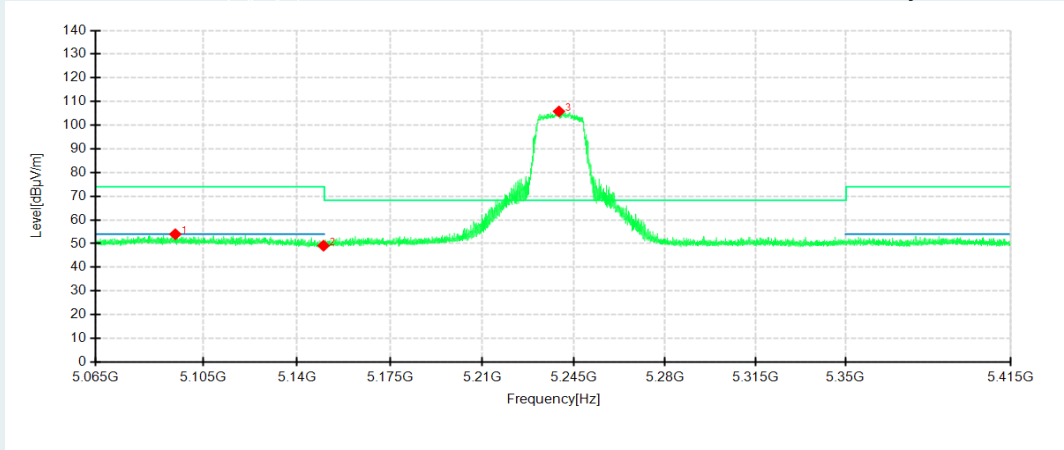

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5095.1000	39.37	54.17	14.80	74.00	19.83	100	69	Horizontal	/
2	5150.0000	37.23	51.00	13.77	74.00	23.00	100	122	Horizontal	/
3	5239.0900	88.33	102.69	14.36	68.30	-34.39	200	192	Horizontal	No limit
1	5094.5750	39.18	53.98	14.80	74.00	20.02	200	193	Vertical	/
2	5150.0000	35.35	49.12	13.77	74.00	24.88	200	0	Vertical	/
3	5239.3000	91.47	105.82	14.35	68.30	-37.52	200	101	Vertical	No limit


802.11n HT20 mode/5240MHz
Detector mode: Average

Polarity: Horizontal

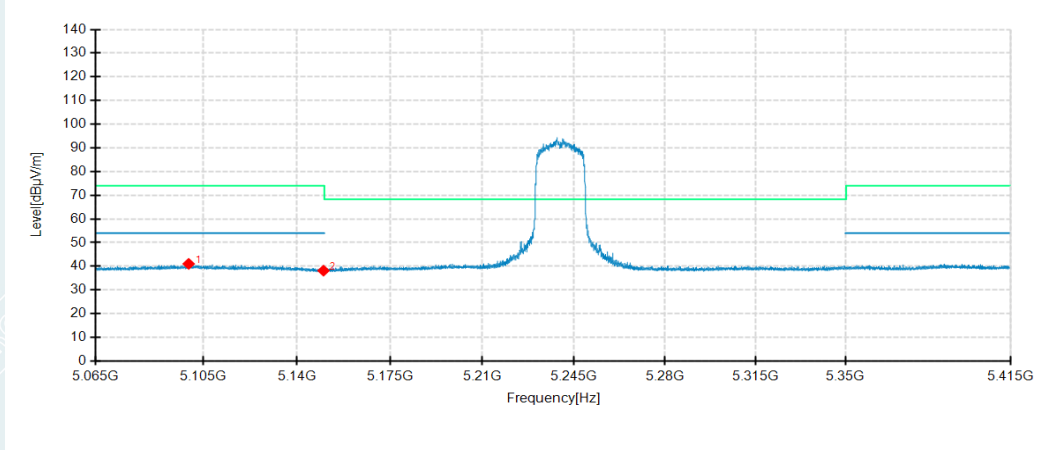

Detector mode: Average

Polarity: Vertical

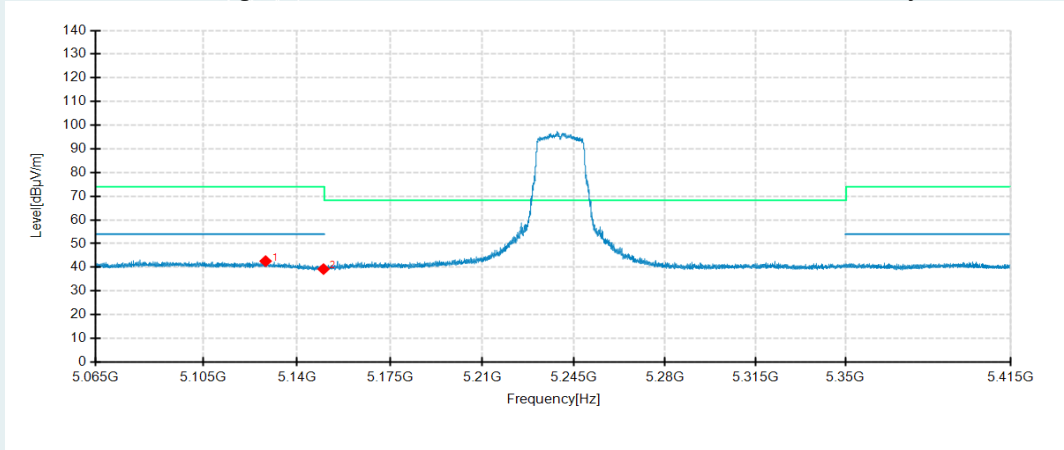


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5099.5450	26.17	41.02	14.85	54.00	12.98	200	225	Horizontal	/
2	5150.0000	24.38	38.15	13.77	54.00	15.85	200	192	Horizontal	/
1	5128.2800	28.36	42.60	14.24	54.00	11.40	200	94	Vertical	/
2	5150.0000	25.47	39.24	13.77	54.00	14.76	200	77	Vertical	/

802.11n HT20 mode/5260MHz


Detector mode: Peak

Polarity: Horizontal

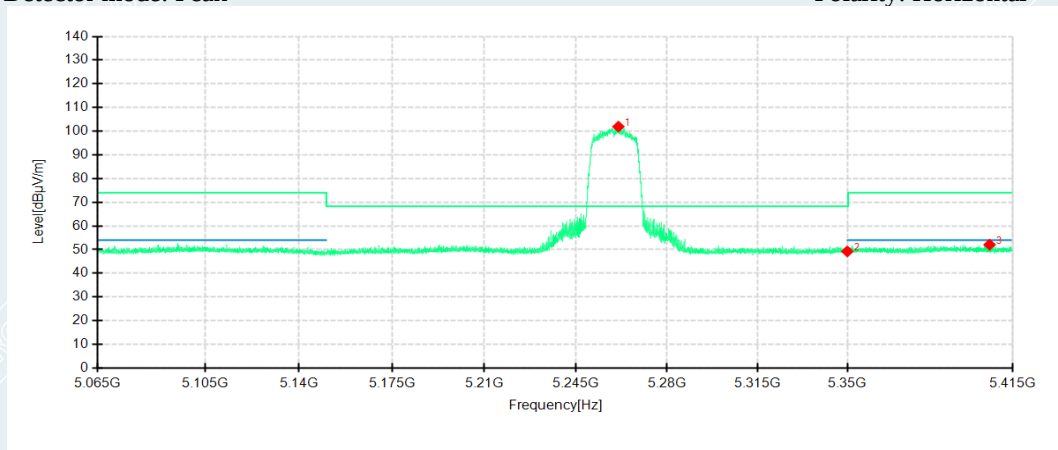

Detector mode: Peak


Polarity: Vertical

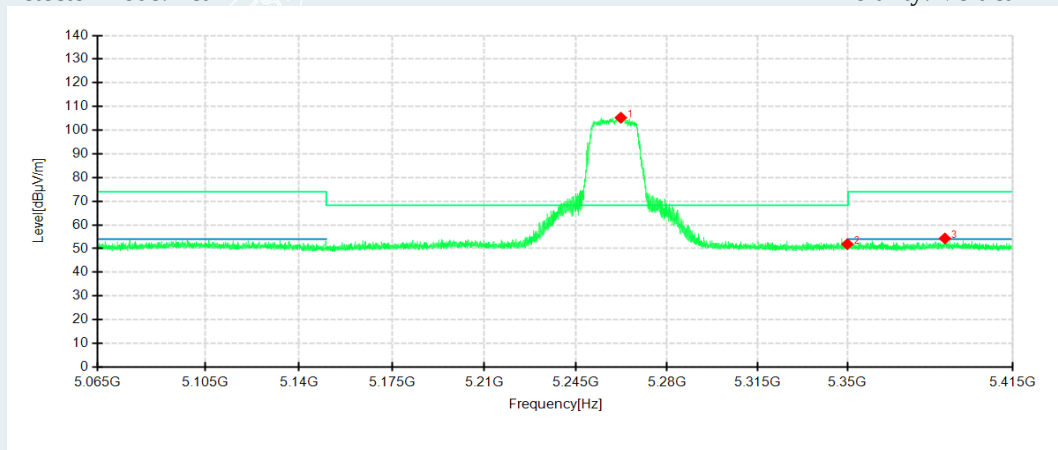

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5261.3150	87.70	101.91	14.21	68.30	-33.61	200	192	Horizontal	No limit
2	5350.0000	34.22	49.24	15.02	68.30	19.06	100	193	Horizontal	/
3	5405.8650	36.40	52.07	15.67	74.00	21.93	100	193	Horizontal	/
1	5262.2600	91.06	105.28	14.22	68.30	-36.98	200	1	Vertical	No limit
2	5350.0000	36.85	51.87	15.02	68.30	16.43	200	118	Vertical	/
3	5388.2600	38.78	54.29	15.51	74.00	19.71	200	61	Vertical	/


802.11n HT20 mode/5260MHz
Detector mode: Average

Polarity: Horizontal

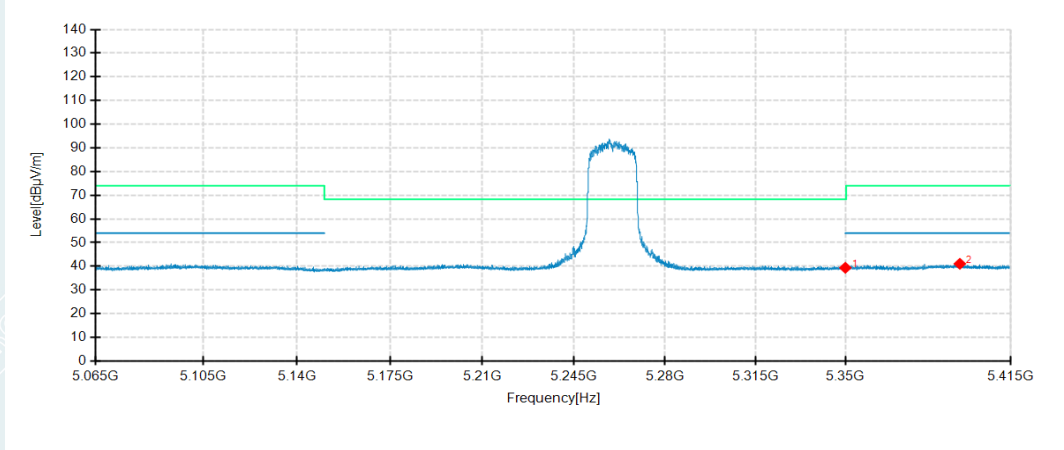

Detector mode: Average

Polarity: Vertical

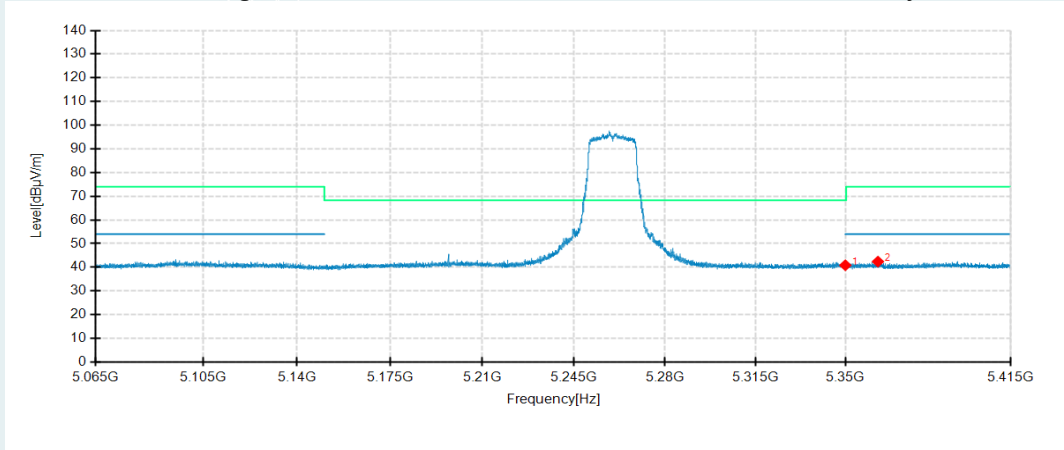


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	24.36	39.38	15.02	54.00	14.62	200	167	Horizontal	/
2	5394.9100	25.47	41.06	15.59	54.00	12.94	100	193	Horizontal	/
1	5350.0000	25.84	40.86	15.02	54.00	13.14	200	168	Vertical	/
2	5362.7450	27.22	42.40	15.18	54.00	11.60	200	53	Vertical	/

802.11n HT20 mode/5280MHz


Detector mode: Peak

Polarity: Horizontal

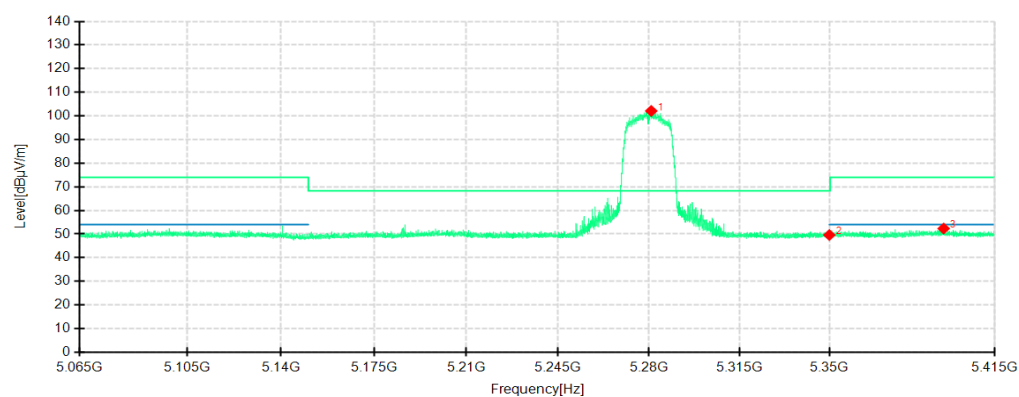

Detector mode: Peak


Polarity: Vertical

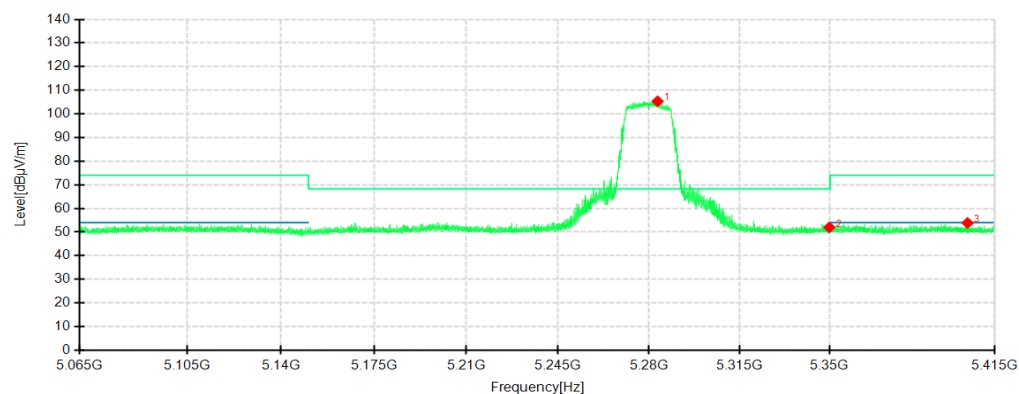

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5280.8800	87.84	102.11	14.27	68.30	-33.81	200	352	Horizontal	No limit
2	5350.0000	34.58	49.60	15.02	68.30	18.70	200	322	Horizontal	/
3	5394.8400	36.76	52.35	15.59	74.00	21.65	100	78	Horizontal	/
1	5283.3300	91.07	105.35	14.28	68.30	-37.05	200	193	Vertical	No limit
2	5350.0000	36.96	51.98	15.02	68.30	16.32	200	3	Vertical	/
3	5404.2550	38.18	53.85	15.67	74.00	20.15	200	1	Vertical	/


802.11n HT20 mode/5280MHz
Detector mode: Average

Polarity: Horizontal

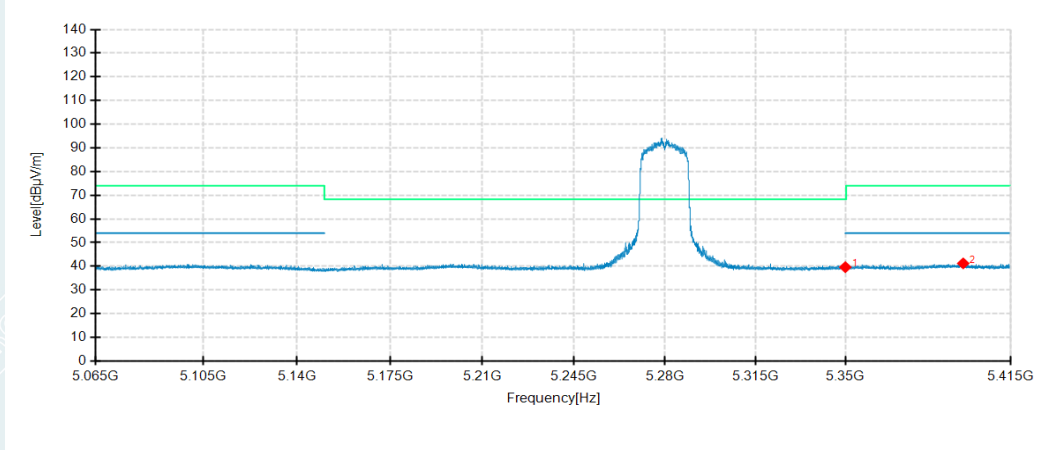

Detector mode: Average


Polarity: Vertical

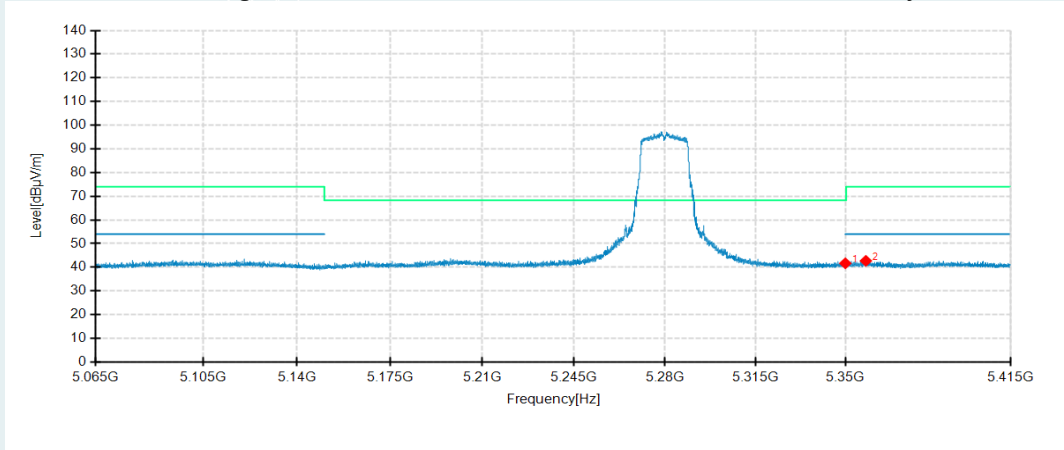

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	24.61	39.63	15.02	54.00	14.37	100	193	Horizontal	/
2	5396.2400	25.63	41.24	15.61	54.00	12.76	100	20	Horizontal	/
1	5350.0000	26.67	41.69	15.02	54.00	12.31	200	193	Vertical	/
2	5358.0200	27.61	42.73	15.12	54.00	11.27	200	102	Vertical	/


802.11n HT20 mode/5320MHz
Detector mode: Peak

Polarity: Horizontal

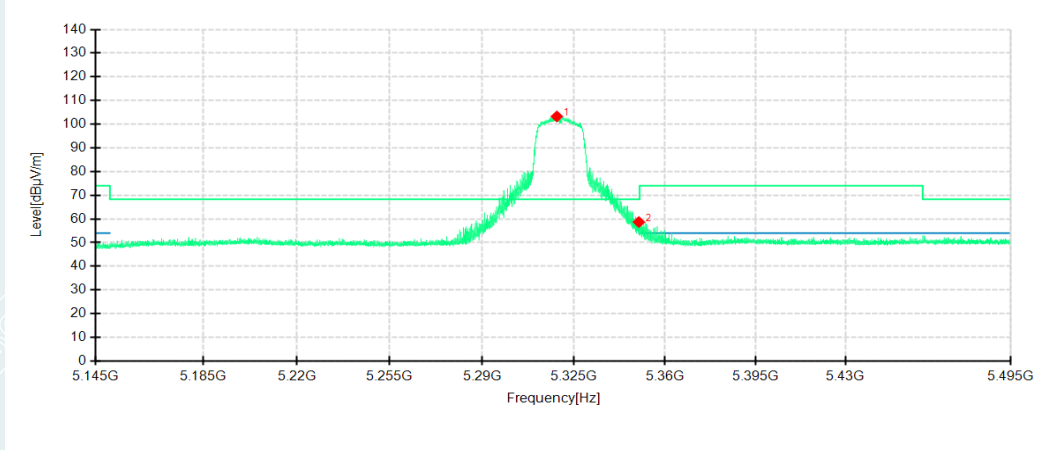

Detector mode: Peak


Polarity: Vertical

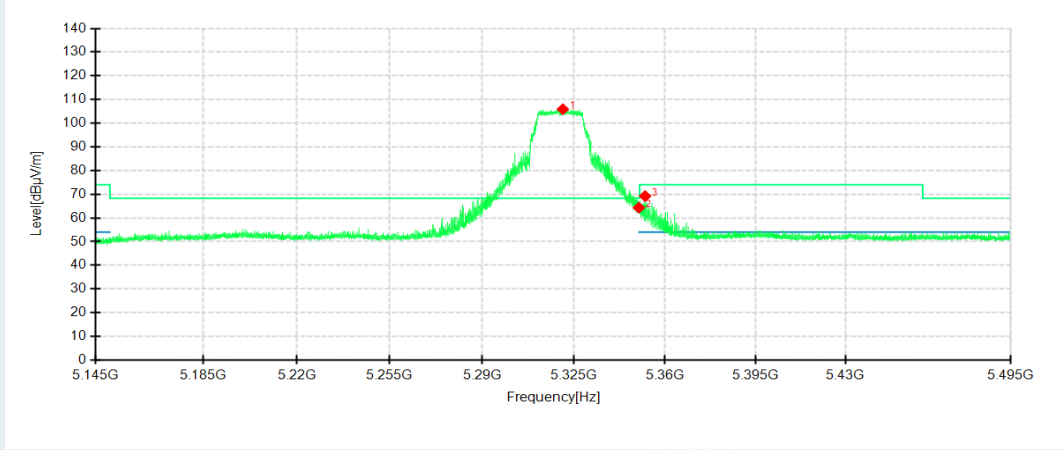

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5318.5300	88.67	103.26	14.59	68.30	-34.96	200	193	Horizontal	No limit
2	5350.0000	43.66	58.68	15.02	68.30	9.62	200	8	Horizontal	/
1	5320.8050	91.27	105.89	14.62	68.30	-37.59	200	167	Vertical	No limit
2	5350.0000	49.29	64.31	15.02	68.30	3.99	200	200	Vertical	/
3	5352.3750	54.15	69.20	15.05	74.00	4.80	200	315	Vertical	/


802.11n HT20 mode/5320MHz
Detector mode: Average

Polarity: Horizontal

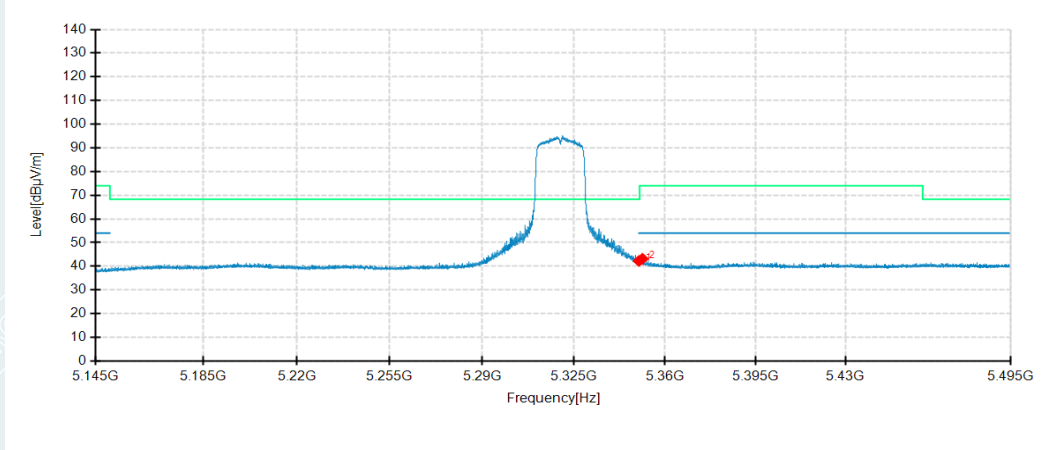

Detector mode: Average

Polarity: Vertical

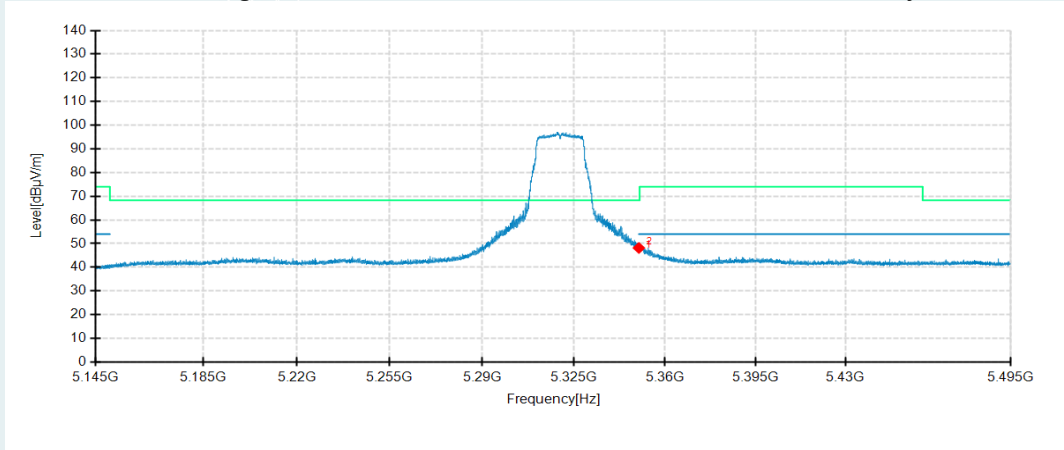


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	27.21	42.23	15.02	54.00	11.77	100	360	Horizontal	/
2	5351.3950	28.14	43.18	15.04	54.00	10.82	200	151	Horizontal	/
1	5350.0000	33.14	48.16	15.02	54.00	5.84	200	218	Vertical	/
2	5350.2750	34.43	49.45	15.02	54.00	4.55	200	234	Vertical	/

802.11n HT20 mode/5500MHz


Detector mode: Peak

Polarity: Horizontal

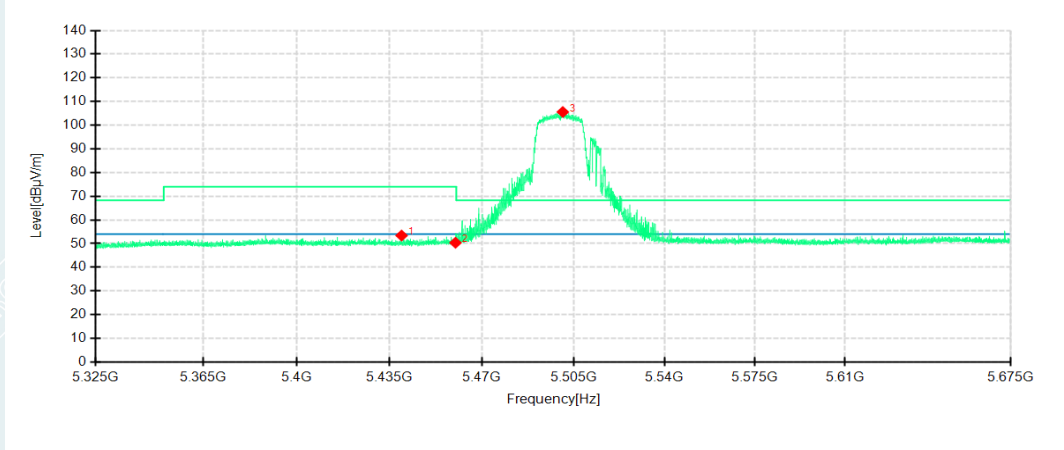

Detector mode: Peak


Polarity: Vertical

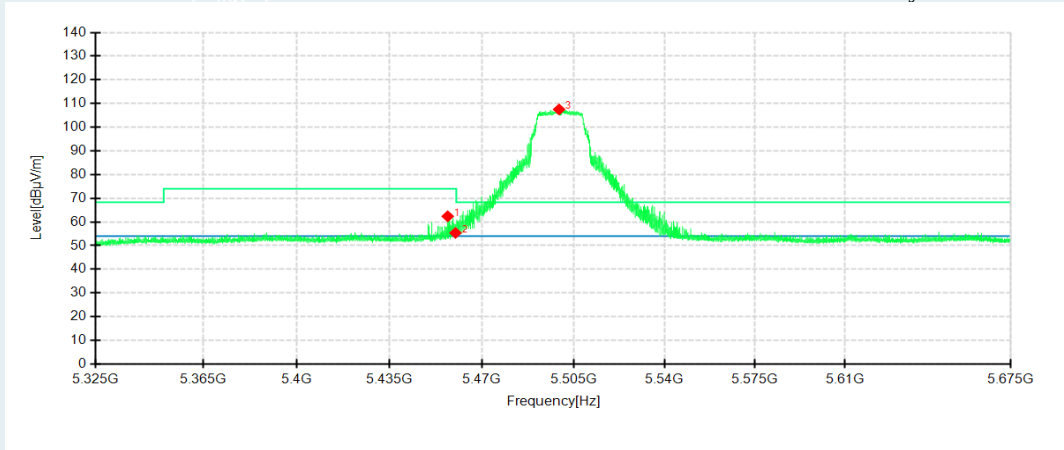

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5439.5550	37.66	53.41	15.75	74.00	20.59	200	160	Horizontal	/
2	5460.0000	34.54	50.36	15.82	74.00	23.64	200	136	Horizontal	/
3	5500.9100	89.59	105.57	15.98	68.30	-37.27	200	152	Horizontal	No limit
1	5457.0550	46.56	62.37	15.81	74.00	11.63	200	167	Vertical	/
2	5460.0000	39.55	55.37	15.82	74.00	18.63	200	167	Vertical	/
3	5499.4750	91.51	107.48	15.97	68.30	-39.18	200	340	Vertical	No limit


802.11n HT20 mode/5500MHz
Detector mode: Average

Polarity: Horizontal

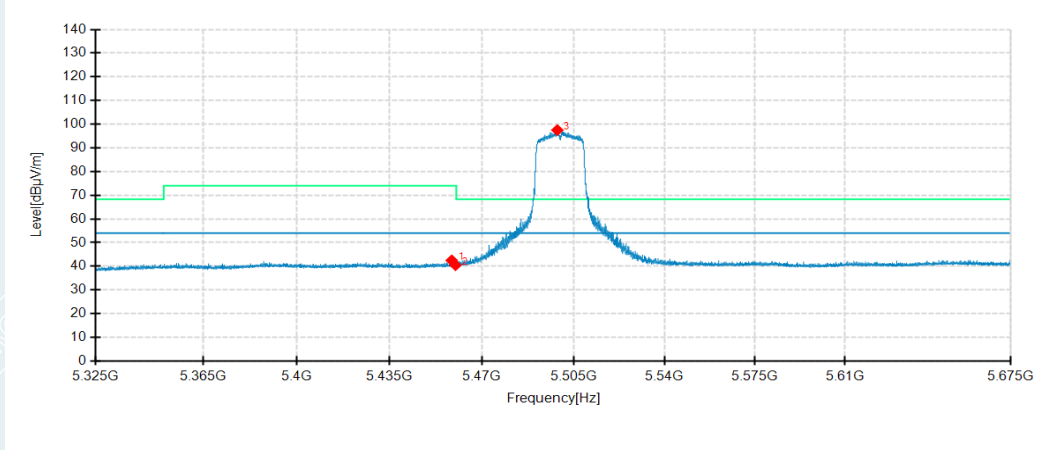

Detector mode: Average

Polarity: Vertical

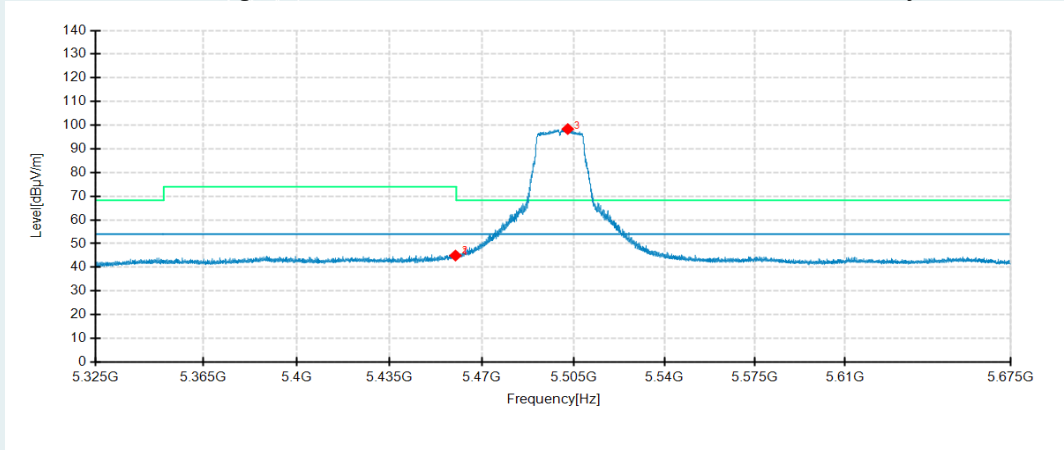


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5458.5600	26.68	42.49	15.81	54.00	11.51	200	151	Horizontal	/
2	5460.0000	24.66	40.48	15.82	54.00	13.52	200	3	Horizontal	/
3	5498.8100	81.54	97.51	15.97	54.00	-43.51	200	151	Horizontal	No limit
1	5460.0000	29.13	44.95	15.82	54.00	9.05	200	167	Vertical	/
2	5460.1350	29.90	45.72	15.82	54.00	8.28	200	224	Vertical	/
3	5502.8000	82.37	98.37	16.00	54.00	-44.37	200	167	Vertical	No limit

802.11n HT20 mode/5580MHz


Detector mode: Peak

Polarity: Horizontal

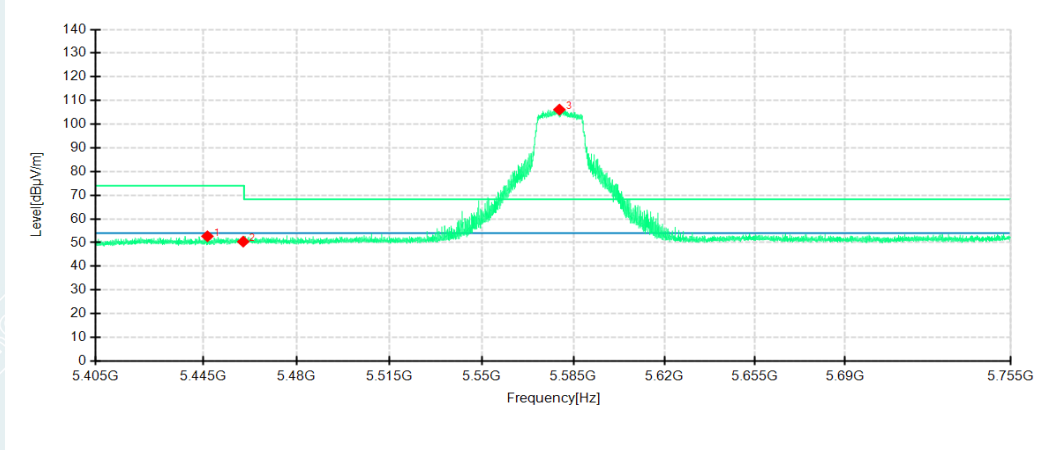

Detector mode: Peak

Polarity: Vertical

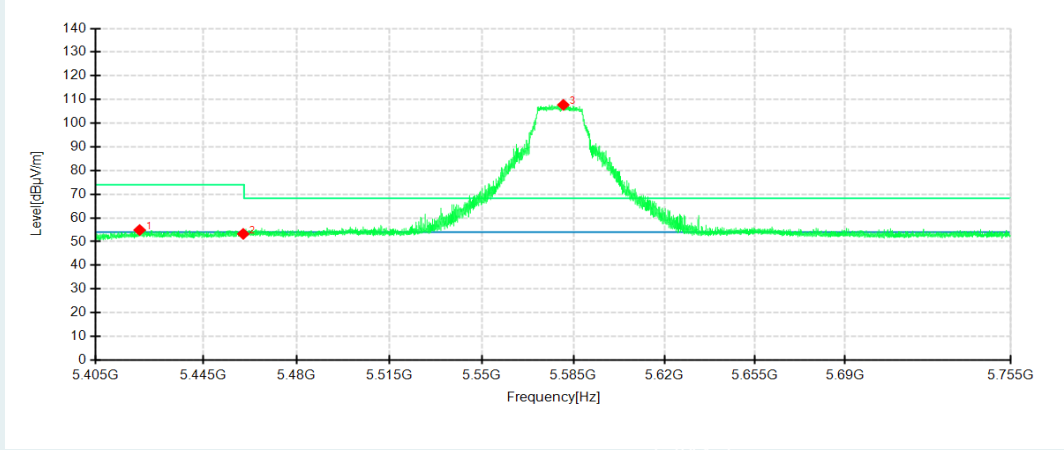


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5446.6150	36.89	52.66	15.77	74.00	21.34	200	193	Horizontal	/
2	5460.0000	34.60	50.42	15.82	74.00	23.58	200	193	Horizontal	/
3	5579.6500	89.99	106.15	16.16	68.30	-37.85	200	152	Horizontal	No limit
1	5421.3450	39.17	54.88	15.71	74.00	19.12	200	192	Vertical	/
2	5460.0000	37.43	53.25	15.82	74.00	20.75	200	167	Vertical	/
3	5581.1550	91.60	107.74	16.14	68.30	-39.44	200	175	Vertical	No limit

802.11n HT20 mode/5580MHz


Detector mode: Average

Polarity: Horizontal

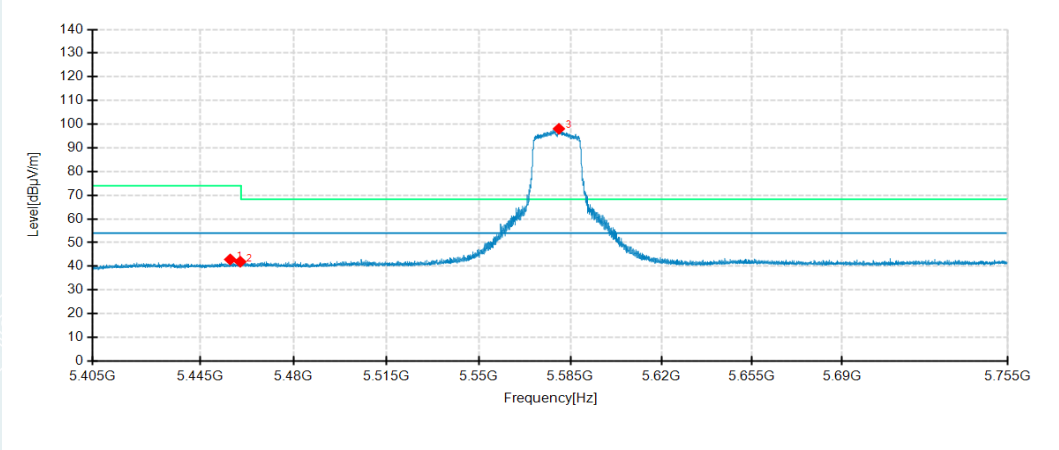

Detector mode: Average


Polarity: Vertical

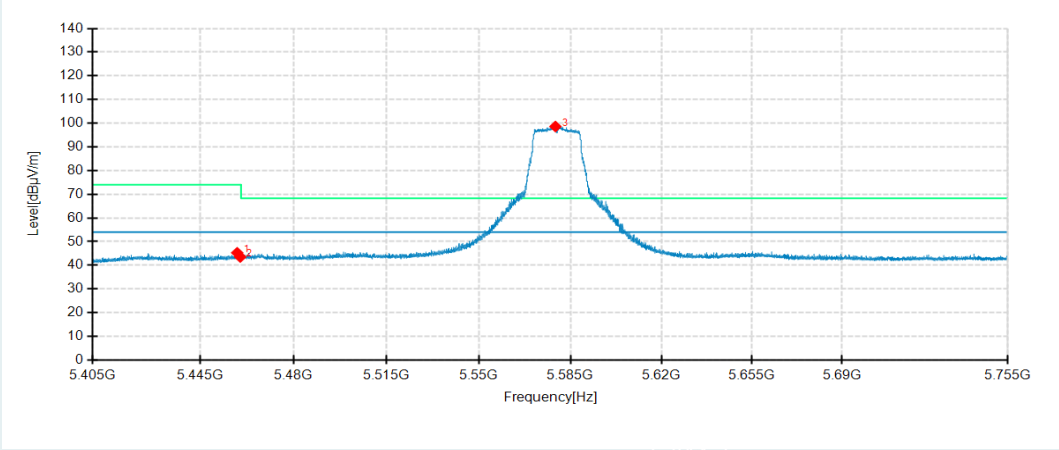

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5456.2400	27.09	42.89	15.80	54.00	11.11	200	144	Horizontal	/
2	5460.0000	26.10	41.92	15.82	54.00	12.08	100	167	Horizontal	/
3	5580.5950	81.90	98.05	16.15	54.00	-44.05	200	152	Horizontal	No limit
1	5458.8650	29.45	45.26	15.81	54.00	8.74	200	225	Vertical	/
2	5460.0000	27.70	43.52	15.82	54.00	10.48	200	234	Vertical	/
3	5579.2650	82.44	98.60	16.16	54.00	-44.60	200	167	Vertical	No limit


802.11n HT20 mode/5700MHz
Detector mode: Peak

Polarity: Horizontal

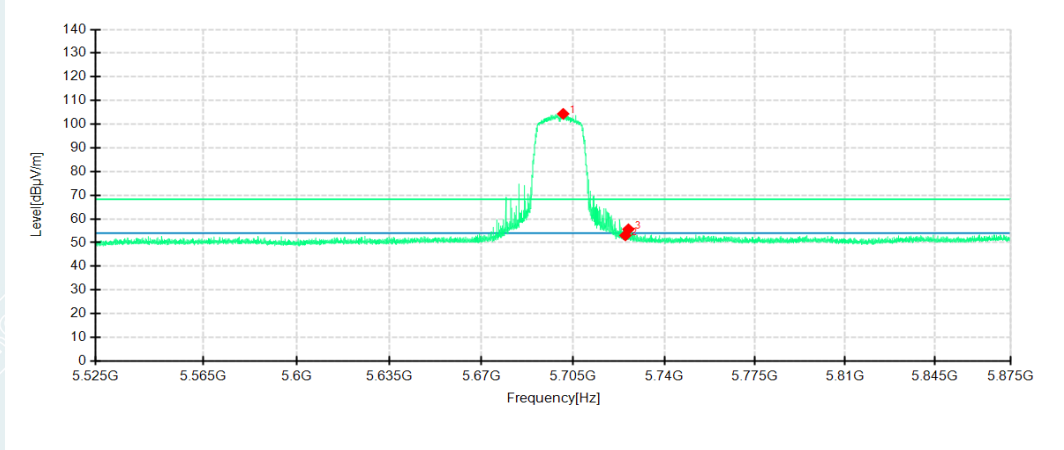

Detector mode: Peak

Polarity: Vertical

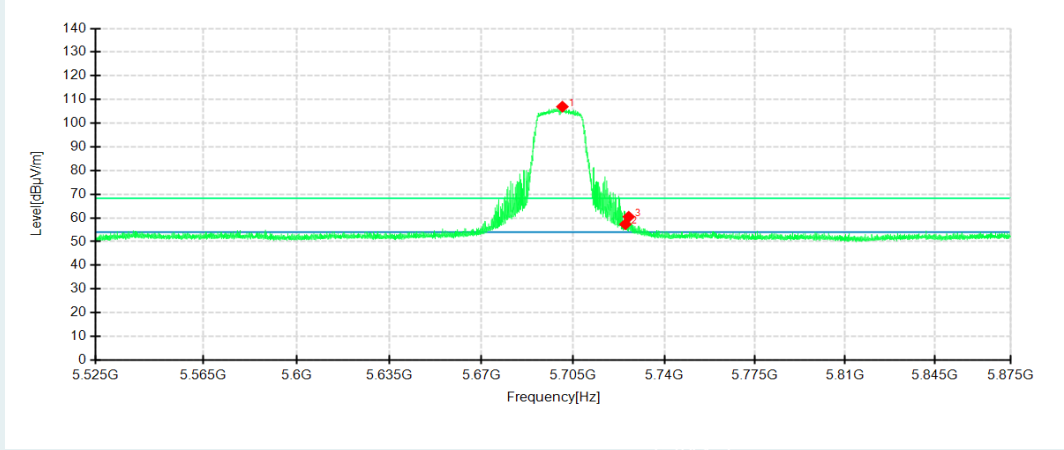


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5701.1550	88.02	104.37	16.35	68.30	-36.07	200	167	Horizontal	No limit
2	5725.0000	36.23	53.02	16.79	68.30	15.28	200	167	Horizontal	/
3	5726.1450	38.82	55.63	16.81	68.30	12.67	200	167	Horizontal	/
1	5700.8400	90.61	106.96	16.35	68.30	-38.66	200	193	Vertical	No limit
2	5725.0000	40.54	57.33	16.79	68.30	10.97	200	168	Vertical	/
3	5726.2850	43.69	60.50	16.81	68.30	7.80	200	110	Vertical	/

802.11n HT20 mode/5700MHz


Detector mode: Average

Polarity: Horizontal

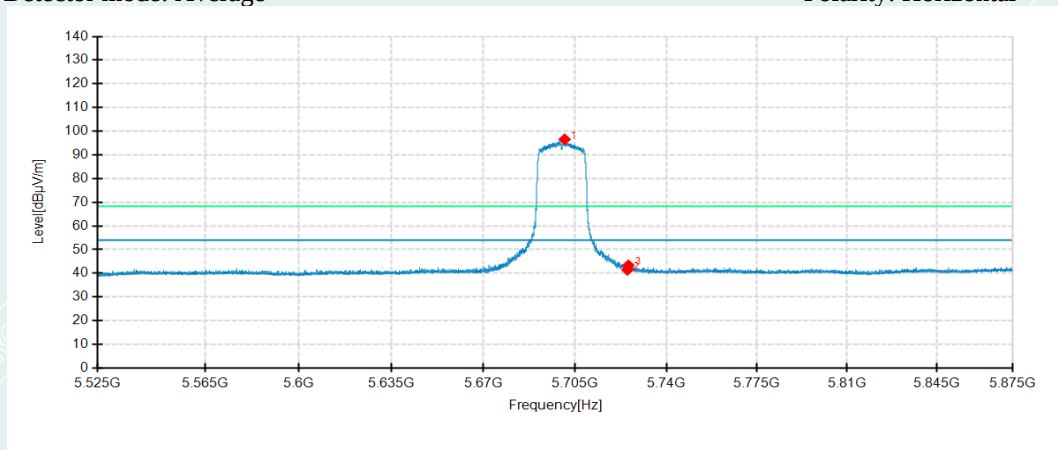

Detector mode: Average

Polarity: Vertical

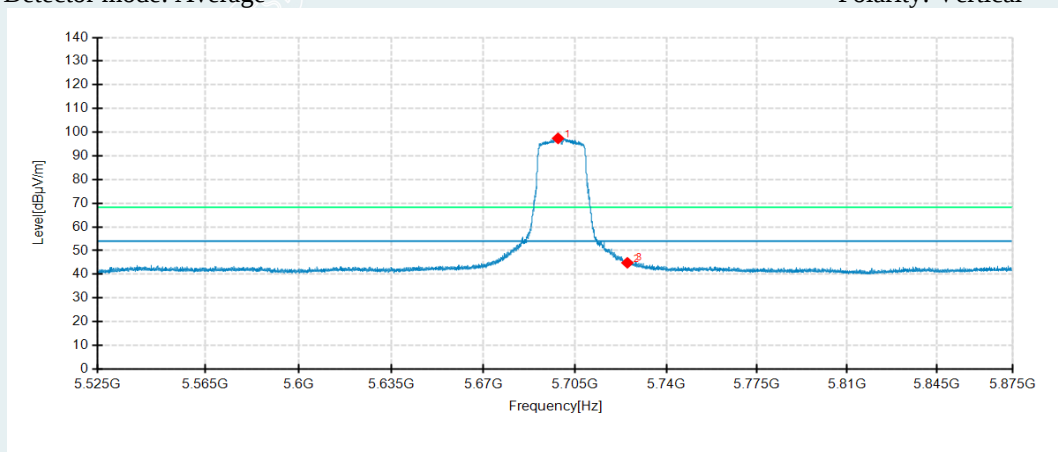


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5700.9450	80.20	96.55	16.35	54.00	-42.55	200	167	Horizontal	No limit
2	5725.0000	24.63	41.42	16.79	54.00	12.58	200	192	Horizontal	/
3	5725.3750	26.58	43.38	16.80	54.00	10.62	200	167	Horizontal	/
1	5698.4250	81.05	97.40	16.35	54.00	-43.40	200	86	Vertical	No limit
2	5725.0000	28.05	44.84	16.79	54.00	9.16	200	193	Vertical	/
3	5725.8300	28.82	45.63	16.81	54.00	8.37	200	193	Vertical	/

802.11n HT40 mode/5190MHz


Detector mode: Peak

Polarity: Horizontal

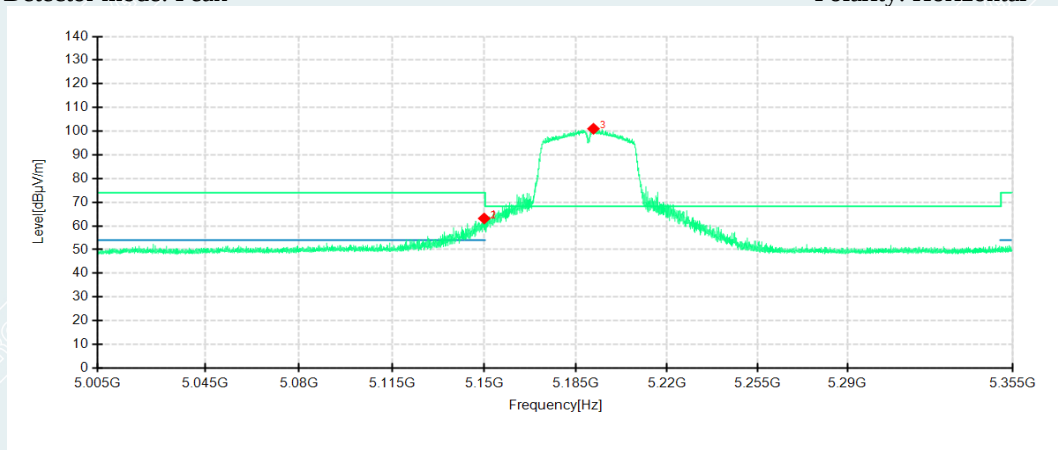

Detector mode: Peak


Polarity: Vertical

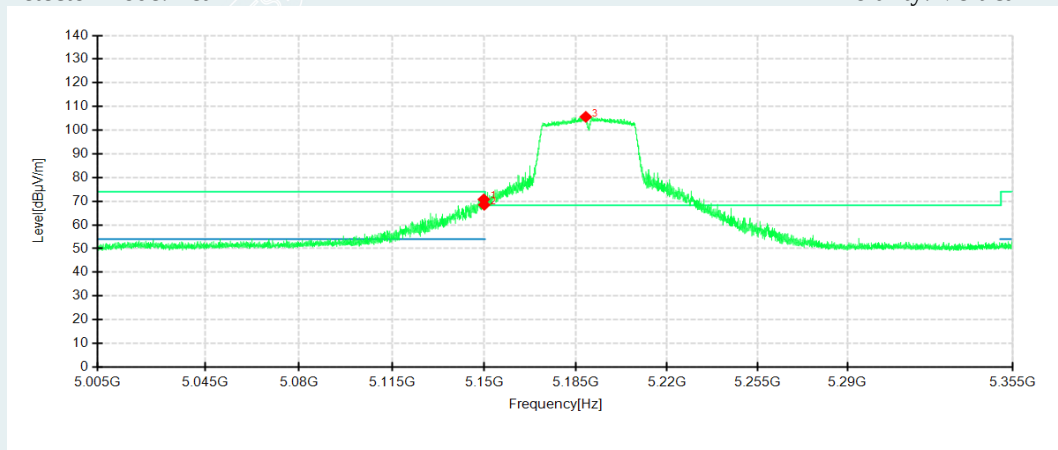

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.9700	49.39	63.16	13.77	74.00	10.84	200	193	Horizontal	/
2	5150.0000	49.21	62.98	13.77	74.00	11.02	200	13	Horizontal	/
3	5191.7250	86.23	101.02	14.79	68.30	-32.72	200	20	Horizontal	No limit
1	5149.8300	57.03	70.80	13.77	74.00	3.20	200	232	Vertical	/
2	5150.0000	54.72	68.49	13.77	74.00	5.51	200	175	Vertical	/
3	5188.7850	90.91	105.63	14.72	68.30	-37.33	200	331	Vertical	No limit


802.11n HT40 mode/5190MHz
Detector mode: Average

Polarity: Horizontal

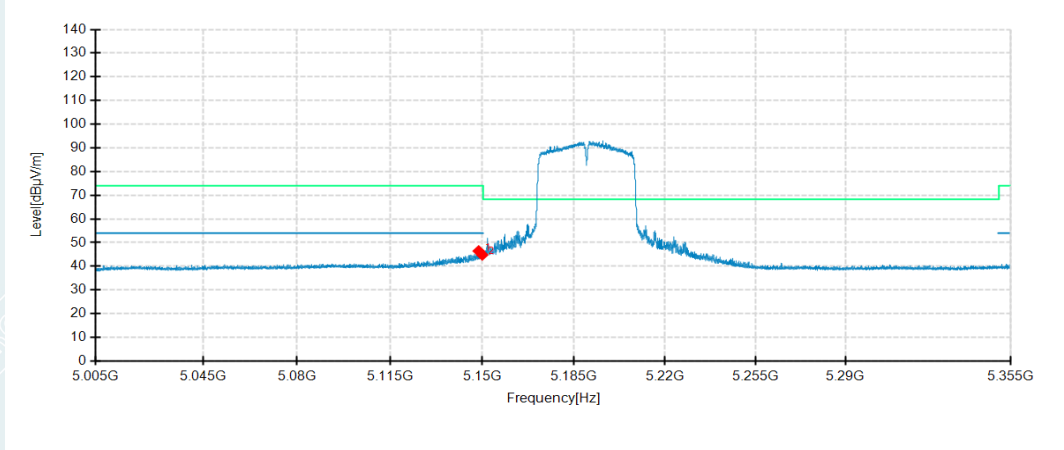

Detector mode: Average


Polarity: Vertical

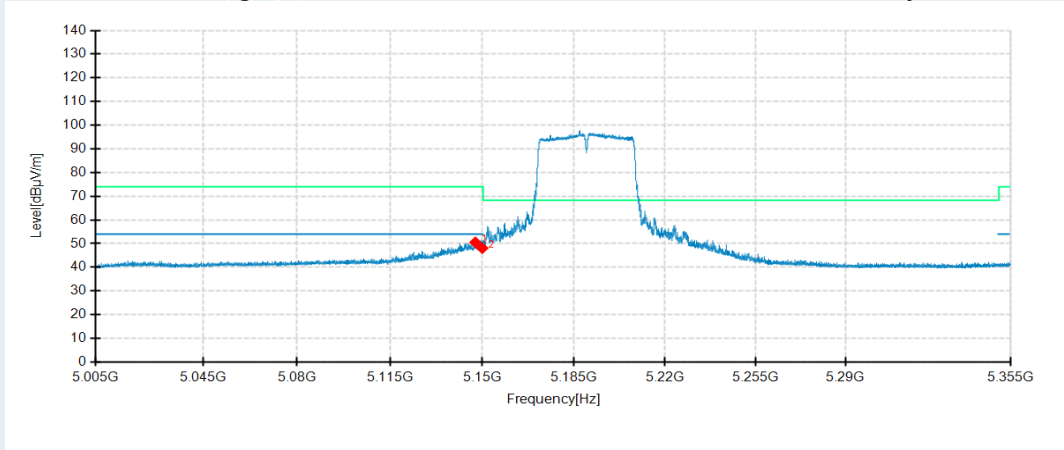

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.6400	32.65	46.45	13.80	54.00	7.55	200	0	Horizontal	/
2	5150.0000	31.05	44.82	13.77	54.00	9.18	200	1	Horizontal	/
1	5147.3800	36.69	50.52	13.83	54.00	3.48	200	241	Vertical	/
2	5150.0000	34.32	48.09	13.77	54.00	5.91	200	233	Vertical	/


802.11n HT40 mode/5230MHz
Detector mode: Peak

Polarity: Horizontal

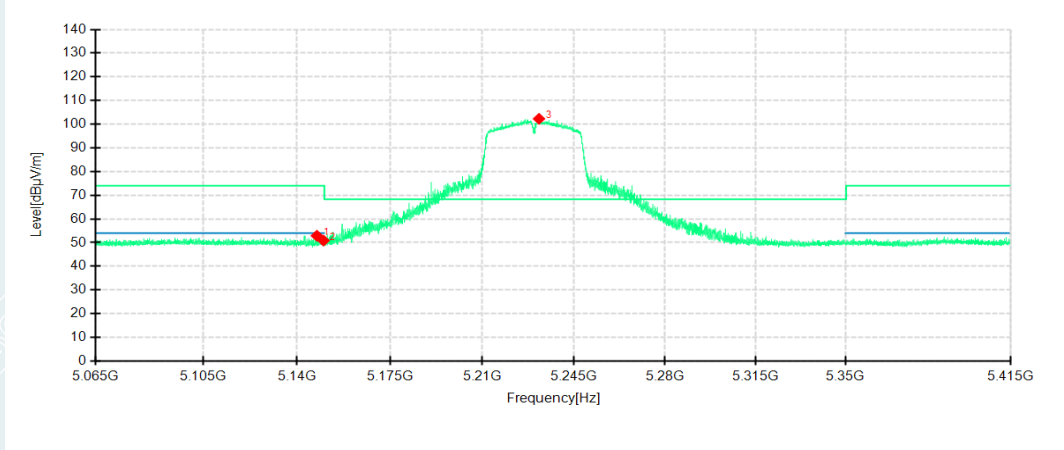

Detector mode: Peak


Polarity: Vertical

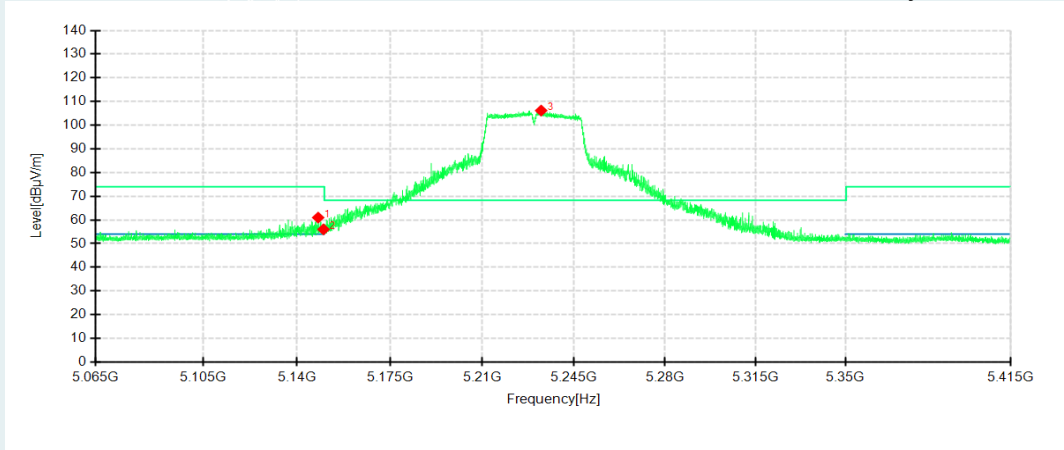

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5147.4950	39.08	52.90	13.82	74.00	21.10	200	193	Horizontal	/
2	5150.0000	37.08	50.85	13.77	74.00	23.15	200	193	Horizontal	/
3	5231.6700	87.80	102.28	14.48	68.30	-33.98	200	3	Horizontal	No limit
1	5147.9850	47.18	60.99	13.81	74.00	13.01	200	232	Vertical	/
2	5150.0000	42.25	56.02	13.77	74.00	17.98	200	167	Vertical	/
3	5232.4750	91.71	106.17	14.46	68.30	-37.87	200	274	Vertical	No limit


802.11n HT40 mode/5230MHz
Detector mode: Average

Polarity: Horizontal

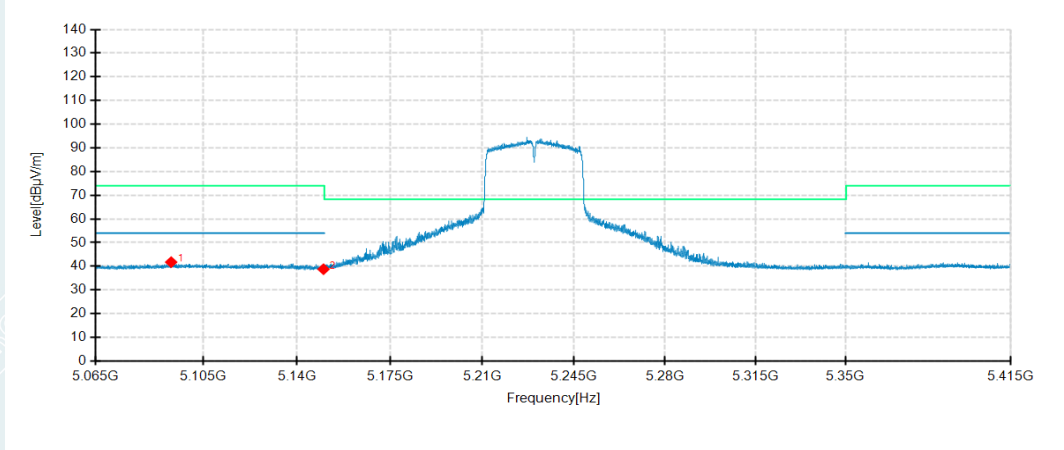

Detector mode: Average


Polarity: Vertical

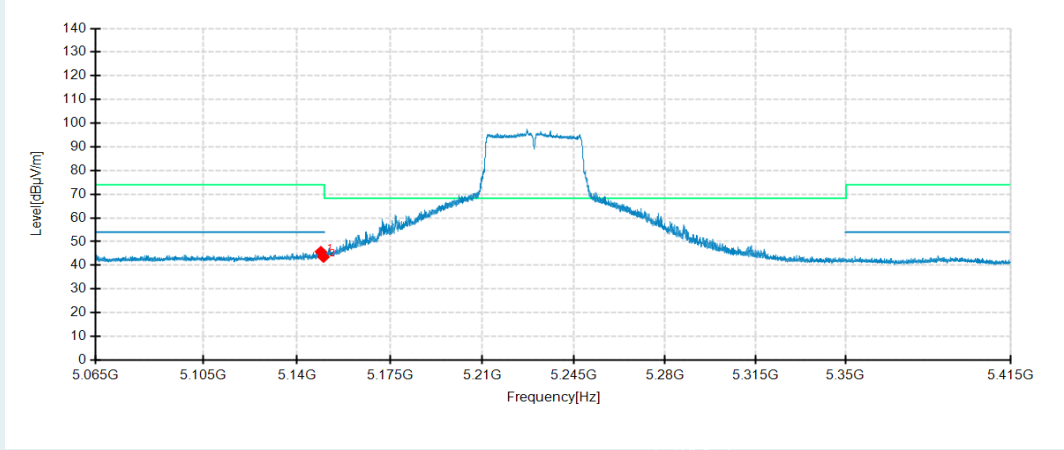

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5093.0350	26.96	41.74	14.78	54.00	12.26	100	307	Horizontal	/
2	5150.0000	25.00	38.77	13.77	54.00	15.23	200	193	Horizontal	/
1	5149.0000	31.95	45.74	13.79	54.00	8.26	200	249	Vertical	/
2	5150.0000	29.74	43.51	13.77	54.00	10.49	200	167	Vertical	/


802.11n HT40 mode/5270MHz
Detector mode: Peak

Polarity: Horizontal

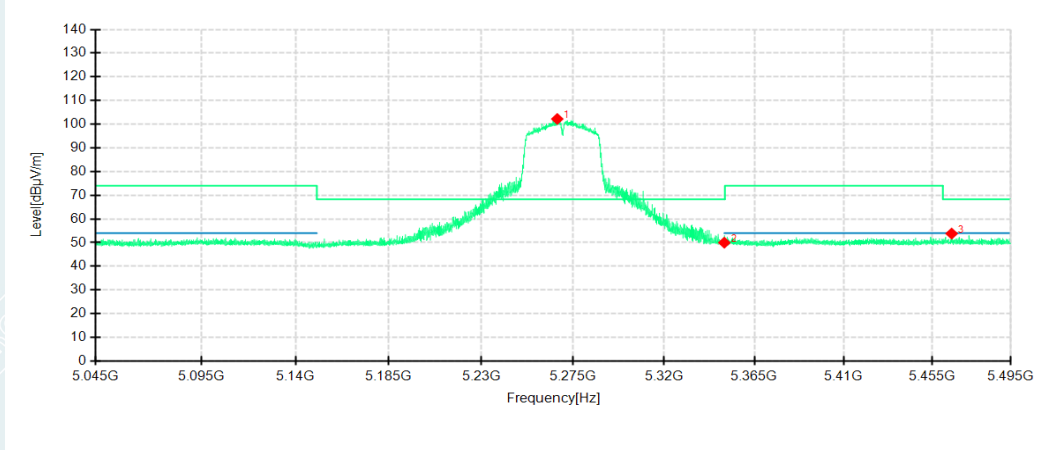

Detector mode: Peak


Polarity: Vertical

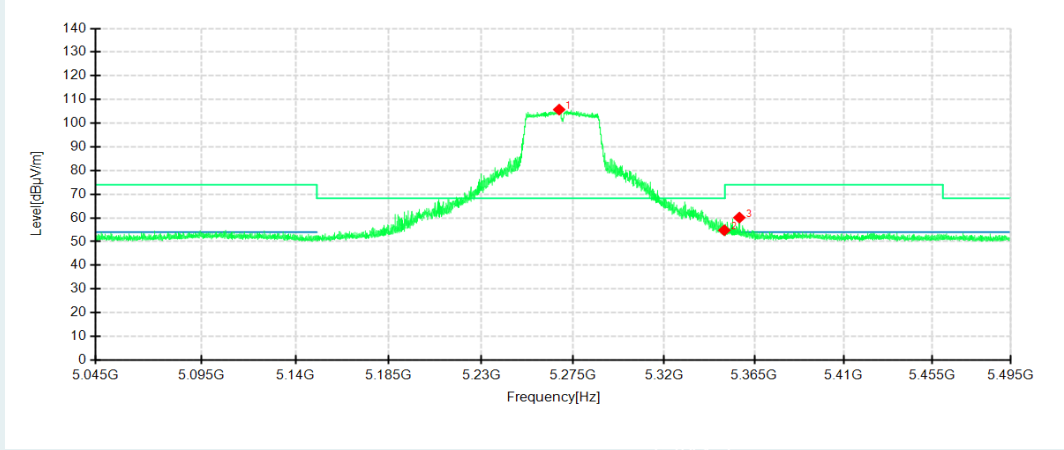

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5267.2100	87.97	102.20	14.23	68.30	-33.90	200	193	Horizontal	No limit
2	5350.0000	34.95	49.97	15.02	68.30	18.33	100	167	Horizontal	/
3	5464.7600	37.97	53.81	15.84	68.30	14.49	200	193	Horizontal	/
1	5268.1550	91.50	105.73	14.23	68.30	-37.43	200	242	Vertical	No limit
2	5350.0000	39.77	54.79	15.02	68.30	13.51	200	234	Vertical	/
3	5357.5250	45.01	60.13	15.12	74.00	13.87	200	307	Vertical	/


802.11n HT40 mode/5270MHz
Detector mode: Average

Polarity: Horizontal

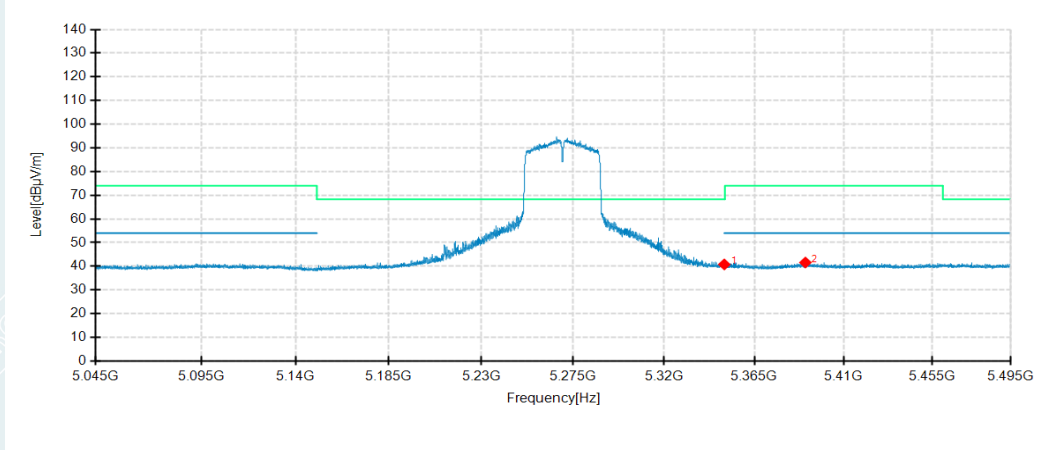

Detector mode: Average


Polarity: Vertical

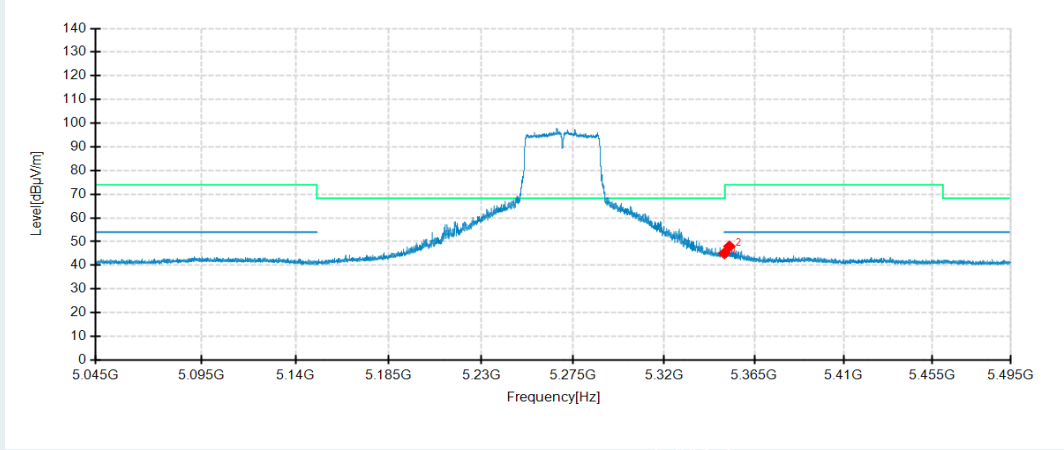

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	25.76	40.78	15.02	54.00	13.22	200	152	Horizontal	/
2	5390.6450	26.04	41.58	15.54	54.00	12.42	100	167	Horizontal	/
1	5350.0000	30.01	45.03	15.02	54.00	8.97	200	167	Vertical	/
2	5352.5300	32.95	48.00	15.05	54.00	6.00	200	241	Vertical	/


802.11n HT40 mode/5310MHz
Detector mode: Peak

Polarity: Horizontal

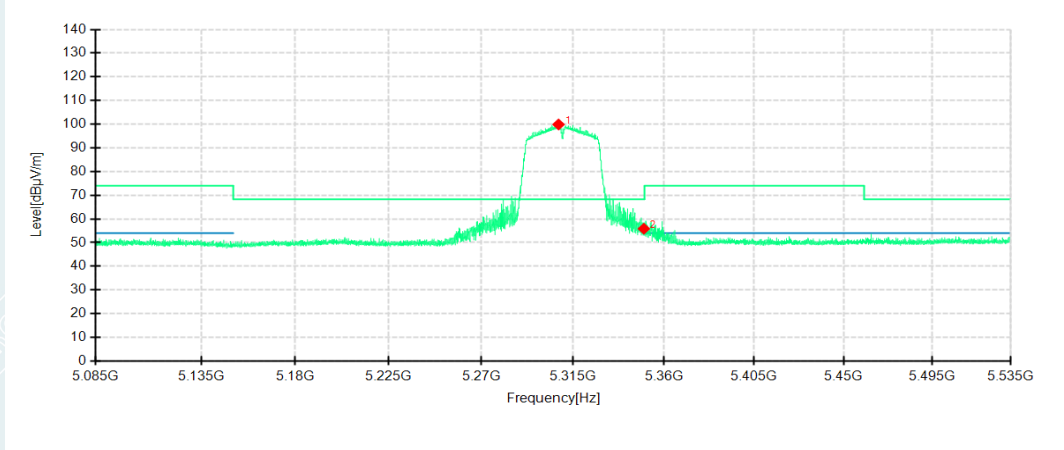

Detector mode: Peak


Polarity: Vertical

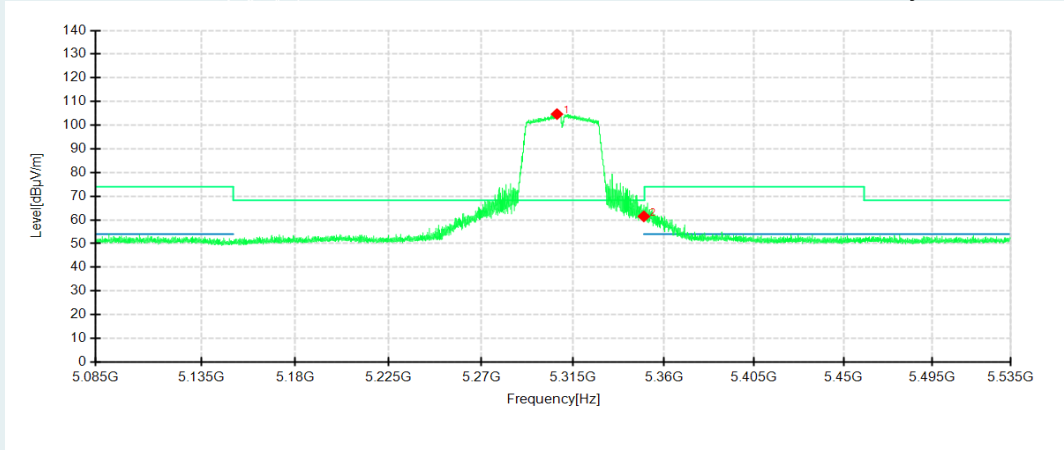

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5307.8850	85.44	99.88	14.44	68.30	-31.58	200	8	Horizontal	No limit
2	5350.0000	40.84	55.86	15.02	68.30	12.44	100	167	Horizontal	/
1	5307.1200	90.26	104.69	14.43	68.30	-36.39	200	266	Vertical	No limit
2	5350.0000	46.48	61.50	15.02	68.30	6.80	200	266	Vertical	/


802.11n HT40 mode/5310MHz
Detector mode: Average

Polarity: Horizontal

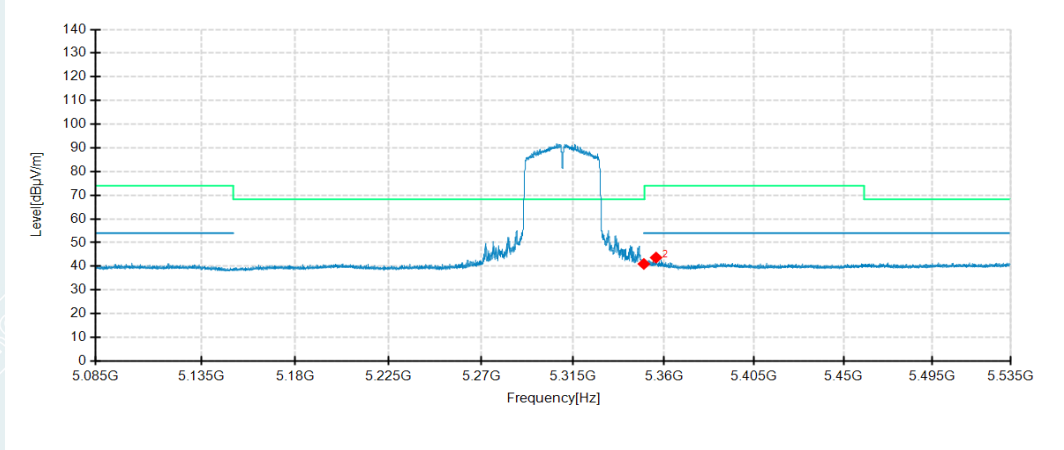

Detector mode: Average


Polarity: Vertical

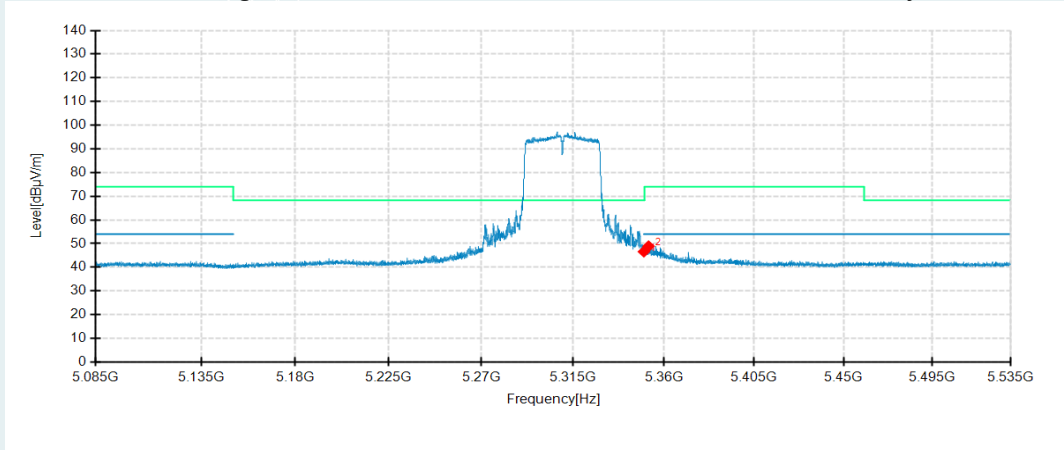

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	25.97	40.99	15.02	54.00	13.01	200	160	Horizontal	/
2	5356.0800	28.58	43.68	15.10	54.00	10.32	200	152	Horizontal	/
1	5350.0000	31.57	46.59	15.02	54.00	7.41	200	233	Vertical	/
2	5352.3450	33.85	48.90	15.05	54.00	5.10	200	258	Vertical	/


802.11n HT40 mode/5510MHz
Detector mode: Peak

Polarity: Horizontal

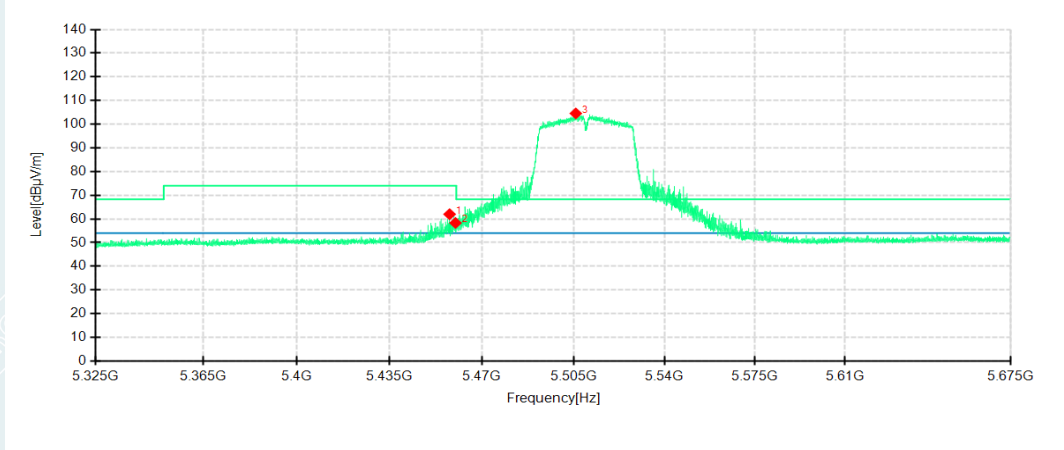

Detector mode: Peak


Polarity: Vertical

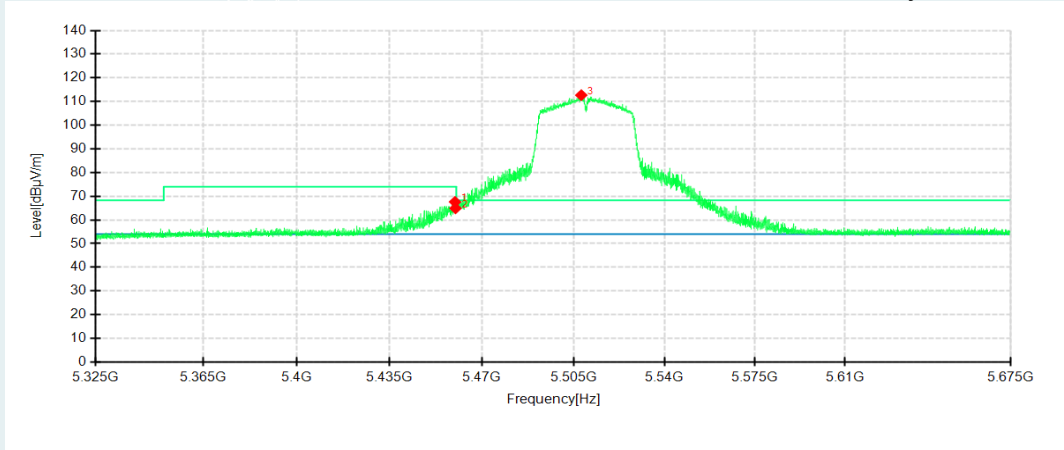

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5457.7550	46.18	61.99	15.81	74.00	12.01	200	152	Horizontal	/
2	5460.0000	42.49	58.31	15.82	74.00	15.69	200	160	Horizontal	/
3	5505.8800	88.51	104.54	16.03	68.30	-36.24	200	160	Horizontal	No limit
1	5459.8200	51.80	67.62	15.82	74.00	6.38	200	225	Vertical	/
2	5460.0000	49.08	64.90	15.82	74.00	9.10	200	315	Vertical	/
3	5507.9800	96.62	112.67	16.05	68.30	-44.37	200	233	Vertical	No limit


802.11n HT40 mode/5510MHz
Detector mode: Average

Polarity: Horizontal

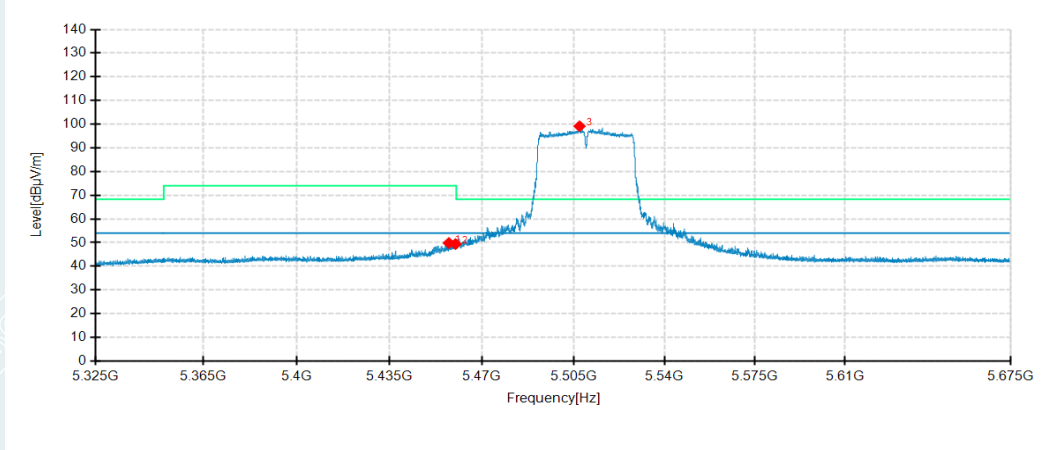

Detector mode: Average

Polarity: Vertical

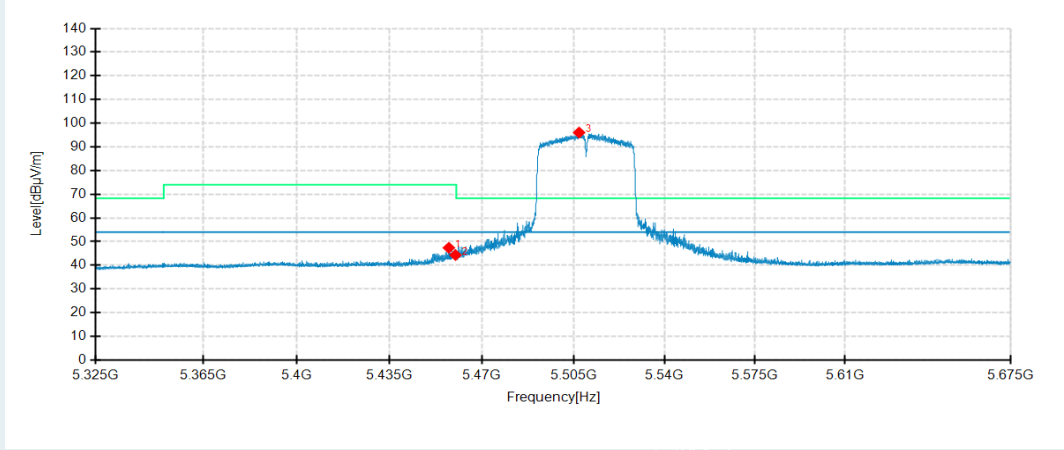


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5457.4750	34.04	49.85	15.81	54.00	4.15	200	167	Vertical	/
2	5460.0000	33.59	49.41	15.82	54.00	4.59	200	217	Vertical	/
3	5507.3150	83.09	99.13	16.04	54.00	-45.13	200	225	Vertical	No limit
1	5457.4750	31.58	47.39	15.81	54.00	6.61	200	158	Horizontal	/
2	5460.0000	28.50	44.32	15.82	54.00	9.68	200	147	Horizontal	/
3	5507.1400	80.00	96.04	16.04	54.00	-42.04	200	139	Horizontal	No limit

802.11n HT40 mode/5550MHz


Detector mode: Peak

Polarity: Horizontal

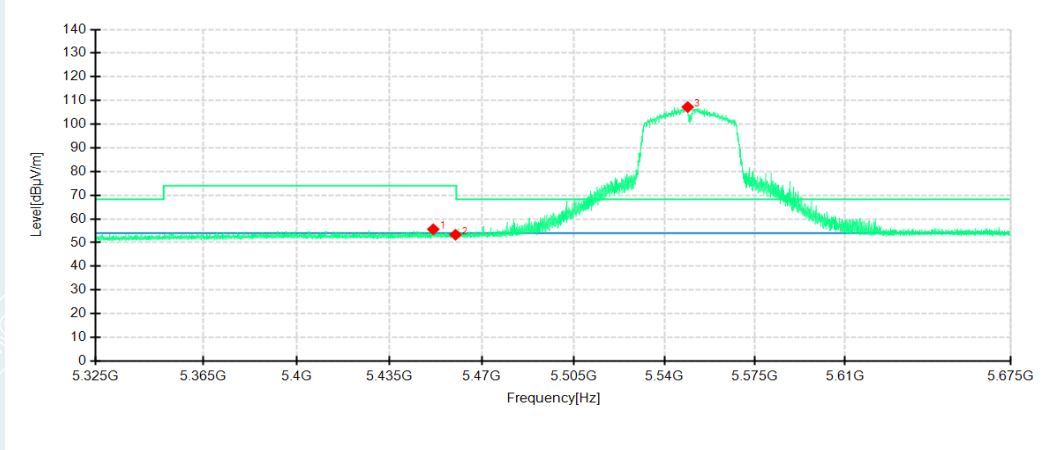

Detector mode: Peak


Polarity: Vertical

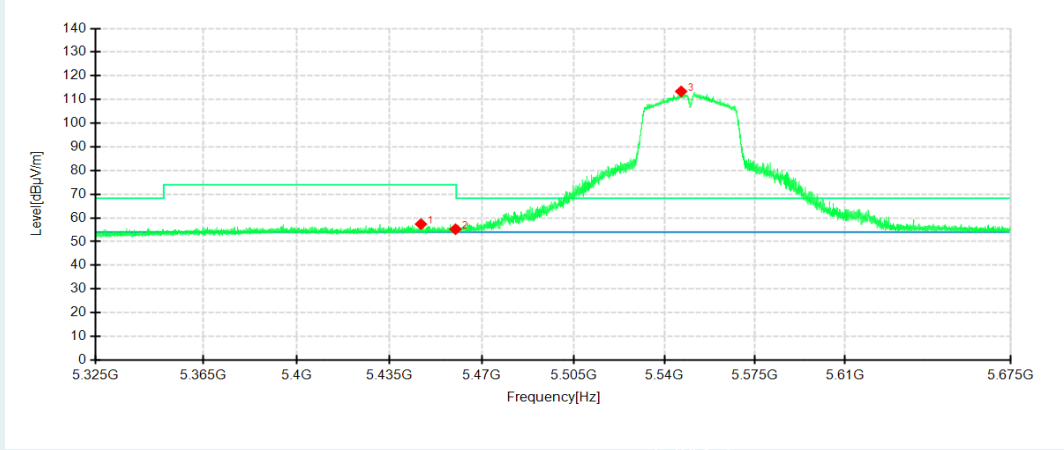

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5451.5600	39.83	55.62	15.79	74.00	18.38	200	143	Horizontal	/
2	5460.0000	37.50	53.32	15.82	74.00	20.68	200	193	Horizontal	/
3	5548.8950	90.76	107.23	16.47	68.30	-38.93	200	143	Horizontal	No limit
1	5446.9050	41.62	57.39	15.77	74.00	16.61	200	184	Vertical	/
2	5460.0000	39.42	55.24	15.82	74.00	18.76	200	167	Vertical	/
3	5546.3750	96.97	113.41	16.44	68.30	-45.11	200	232	Vertical	No limit


802.11n HT40 mode/5550MHz
Detector mode: Average

Polarity: Horizontal

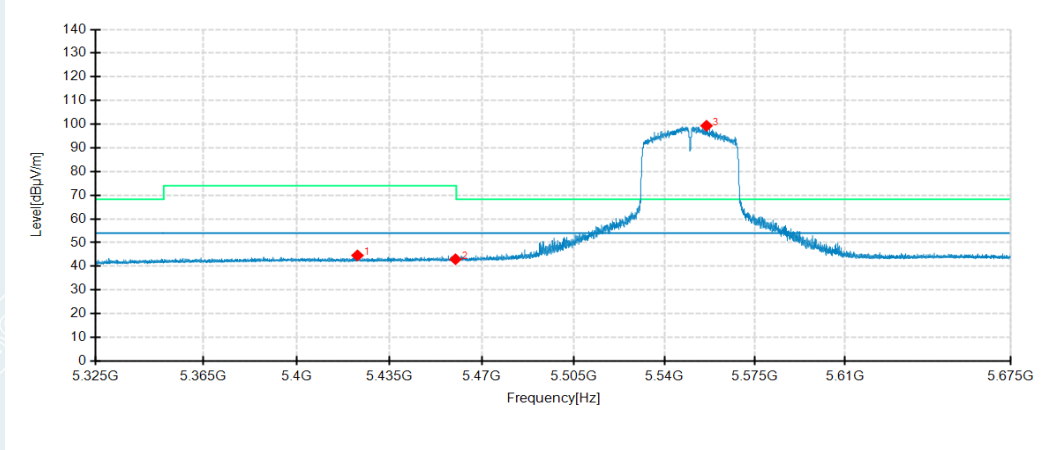

Detector mode: Average


Polarity: Vertical

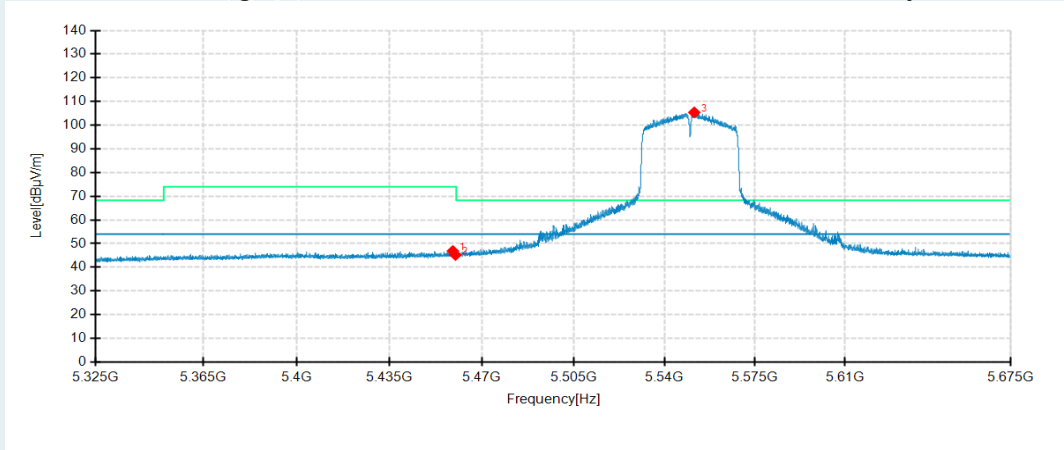

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5422.8950	28.87	44.58	15.71	54.00	9.42	200	143	Horizontal	/
2	5460.0000	27.16	42.98	15.82	54.00	11.02	200	193	Horizontal	/
3	5556.1750	82.92	99.33	16.41	54.00	-45.33	200	152	Horizontal	No limit
1	5458.9800	31.06	46.87	15.81	54.00	7.13	200	232	Vertical	/
2	5460.0000	29.36	45.18	15.82	54.00	8.82	200	249	Vertical	/
3	5551.4500	88.93	105.39	16.46	54.00	-51.39	200	224	Vertical	No limit


802.11n HT40 mode/5670MHz
Detector mode: Peak

Polarity: Horizontal

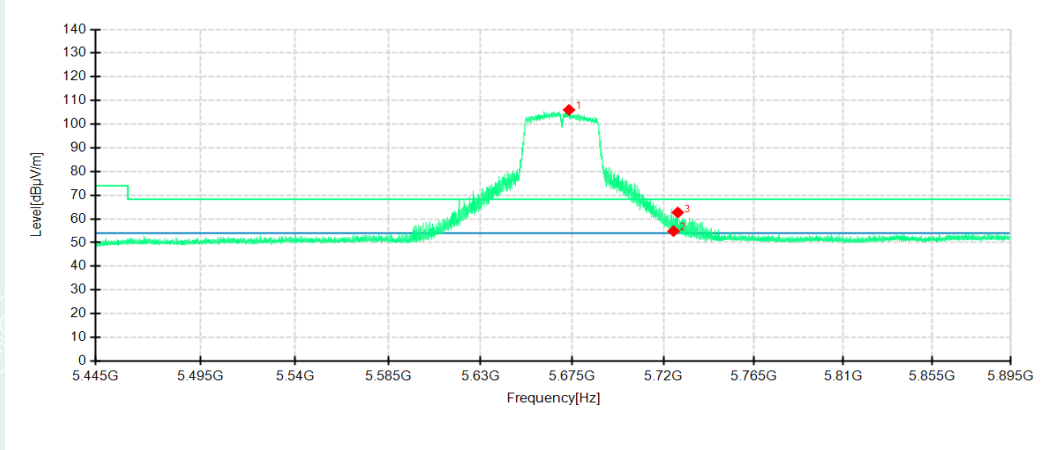

Detector mode: Peak


Polarity: Vertical

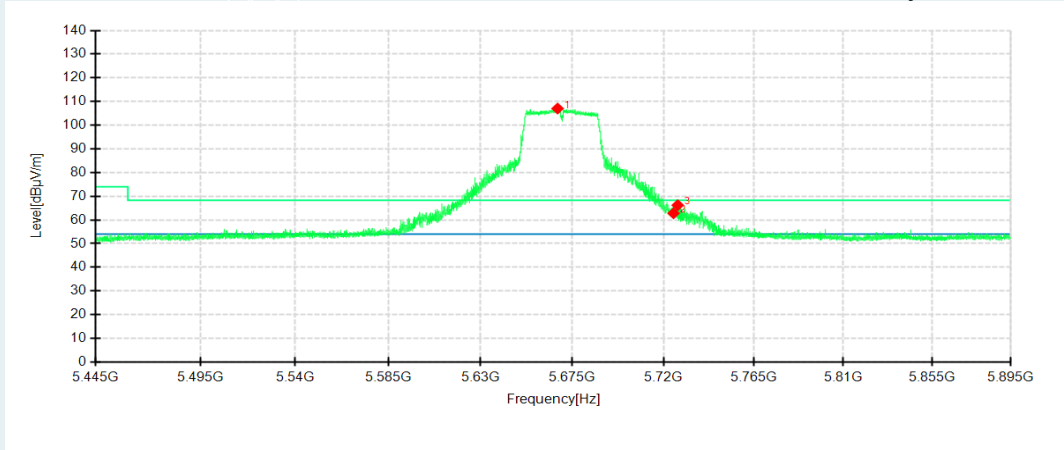

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5673.3300	89.44	106.03	16.59	68.30	-37.73	200	168	Horizontal	No limit
2	5725.0000	38.07	54.86	16.79	68.30	13.44	200	185	Horizontal	/
3	5727.1500	45.88	62.71	16.83	68.30	5.59	200	185	Horizontal	/
1	5667.7050	90.39	107.04	16.65	68.30	-38.74	200	167	Vertical	No limit
2	5725.0000	46.01	62.80	16.79	68.30	5.50	200	233	Vertical	/
3	5727.1050	49.40	66.23	16.83	68.30	2.07	200	167	Vertical	/


802.11n HT40 mode/5670MHz
Detector mode: Average

Polarity: Horizontal

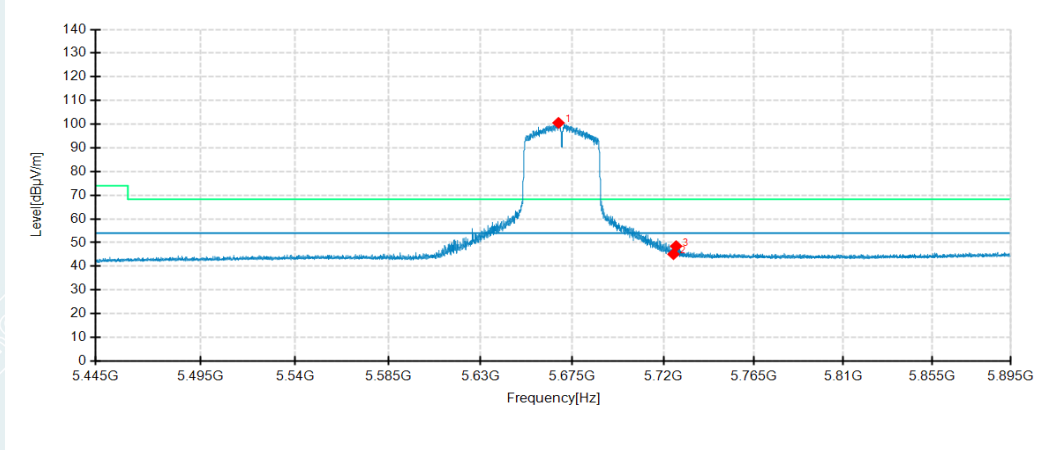

Detector mode: Average

Polarity: Vertical

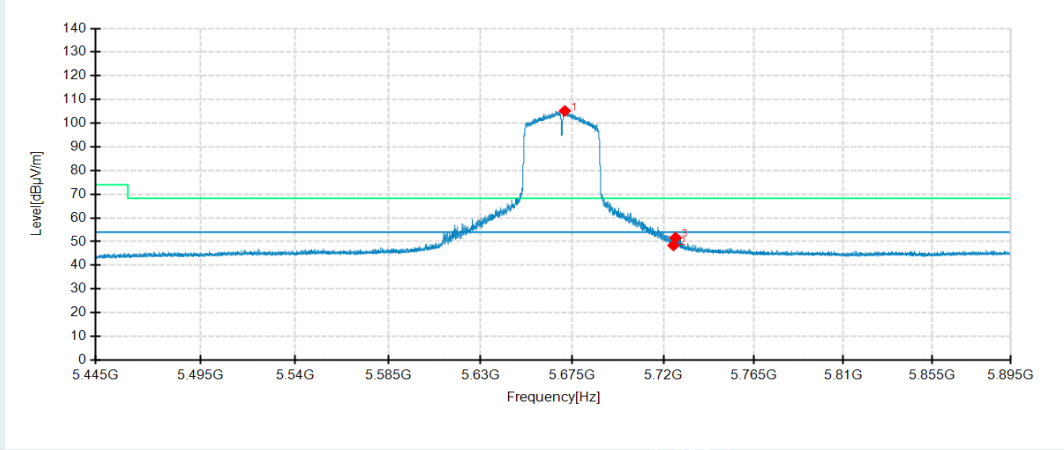


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5668.1550	83.92	100.56	16.64	54.00	-46.56	200	160	Horizontal	No limit
2	5725.0000	28.33	45.12	16.79	54.00	8.88	200	168	Horizontal	/
3	5726.2950	31.71	48.52	16.81	54.00	5.48	200	152	Horizontal	/
1	5671.2600	88.56	105.17	16.61	54.00	-51.17	200	249	Vertical	No limit
2	5725.0000	31.59	48.38	16.79	54.00	5.62	200	225	Vertical	/
3	5726.0250	34.84	51.65	16.81	54.00	2.35	200	167	Vertical	/

802.11ac VHT80 mode/5210MHz


Detector mode: Peak

Polarity: Horizontal

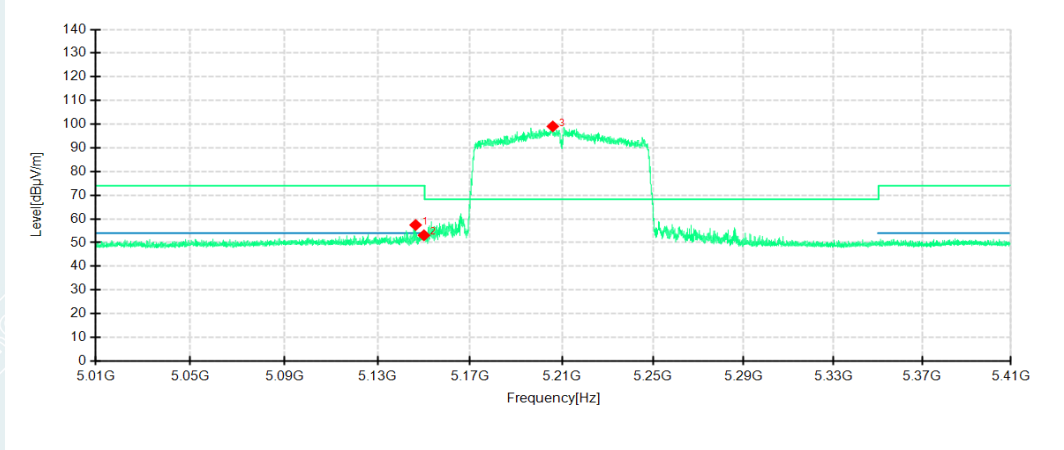

Detector mode: Peak

Polarity: Vertical

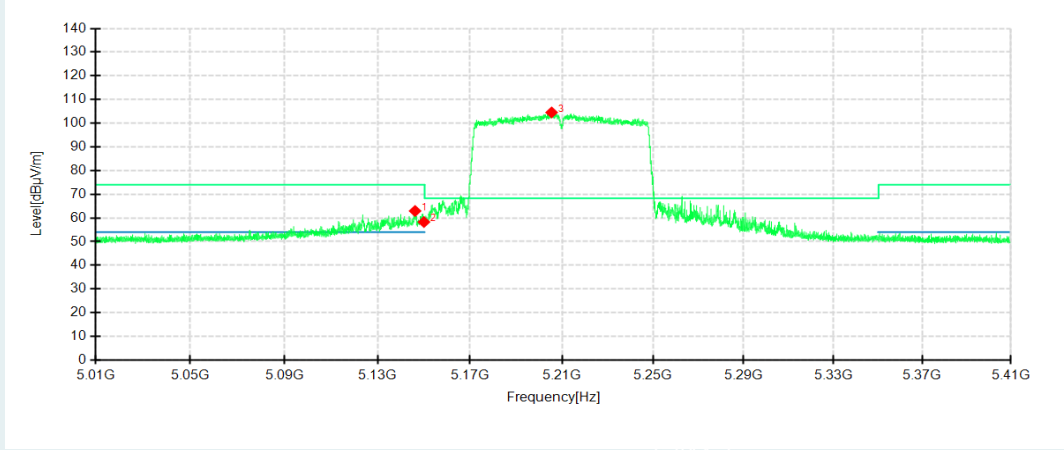


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.4000	43.59	57.44	13.85	74.00	16.56	200	0	Horizontal	/
2	5150.0000	39.31	53.08	13.77	74.00	20.92	200	193	Horizontal	/
3	5206.0000	84.18	99.07	14.89	68.30	-30.77	200	5	Horizontal	No limit
1	5146.1600	49.09	62.94	13.85	74.00	11.06	200	286	Vertical	/
2	5150.0000	44.51	58.28	13.77	74.00	15.72	200	167	Vertical	/
3	5205.4800	89.63	104.53	14.90	68.30	-36.23	200	244	Vertical	No limit

802.11ac VHT80 mode/5210MHz


Detector mode: Average

Polarity: Horizontal

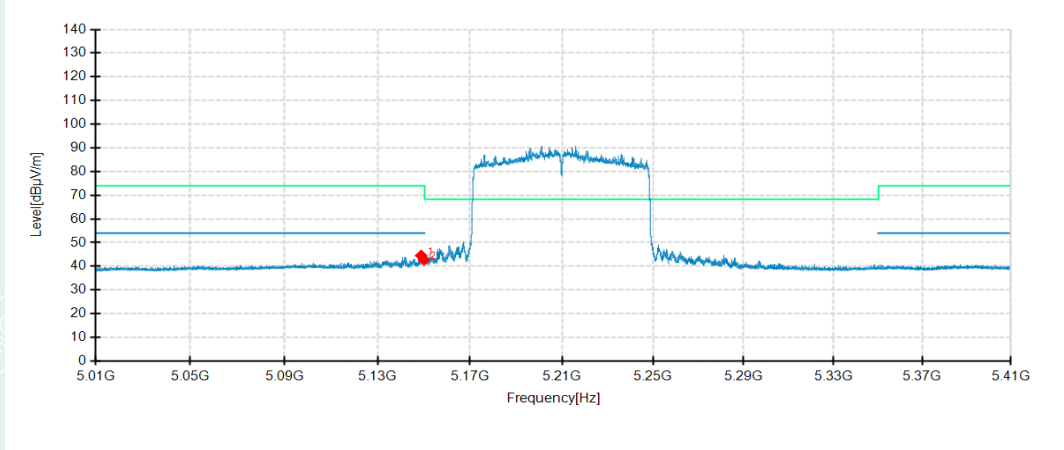

Detector mode: Average

Polarity: Vertical

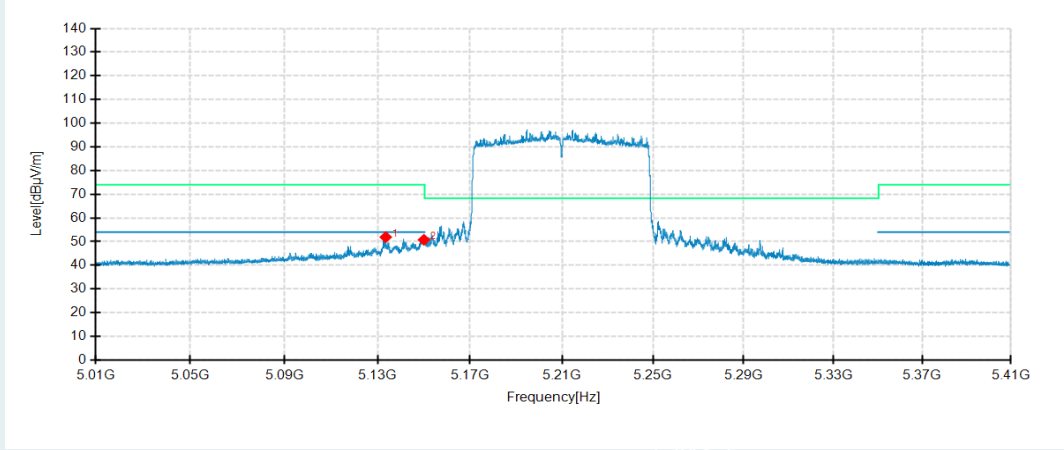


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.8000	30.74	44.54	13.80	54.00	9.46	200	193	Horizontal	/
2	5150.0000	28.94	42.71	13.77	54.00	11.29	200	1	Horizontal	/
1	5133.5200	37.76	51.89	14.13	54.00	2.11	200	298	Vertical	/
2	5150.0000	36.98	50.75	13.77	54.00	3.25	200	239	Vertical	/

802.11ac VHT80 mode/5290MHz


Detector mode: Peak

Polarity: Horizontal

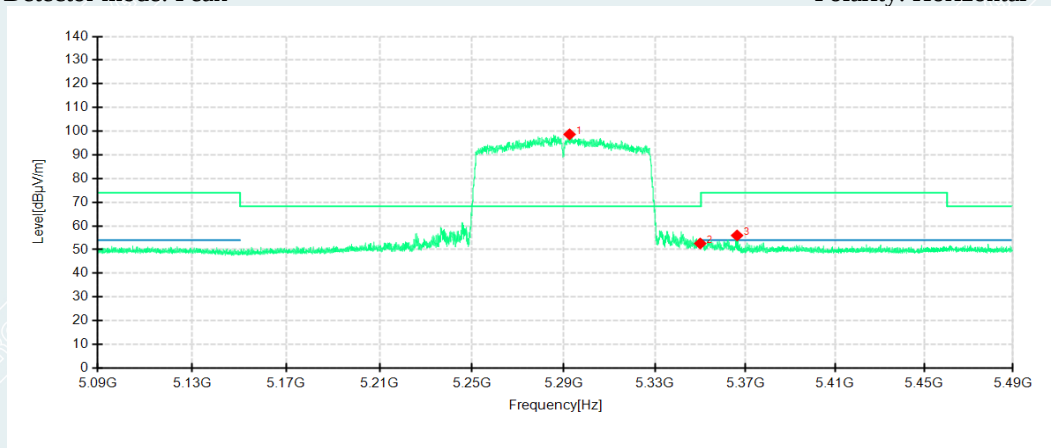

Detector mode: Peak

Polarity: Vertical

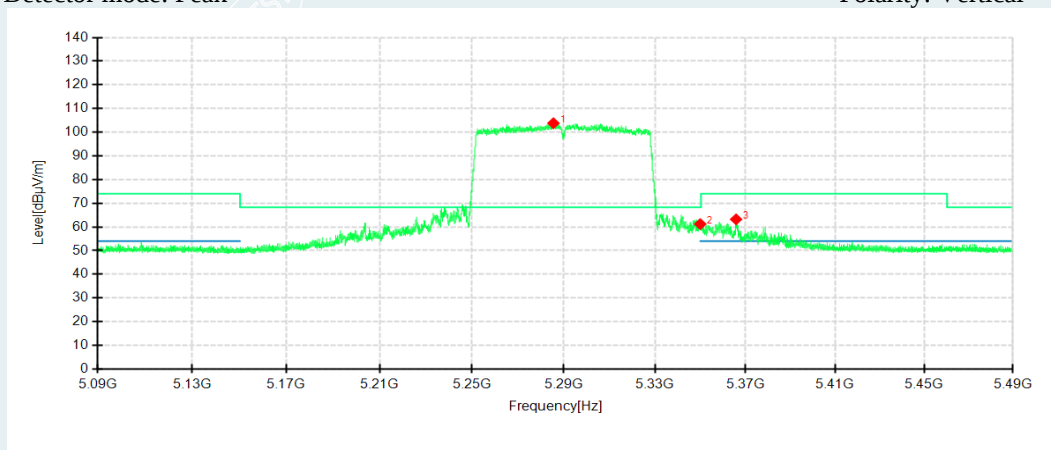


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5292.5200	84.35	98.66	14.31	68.30	-30.36	200	193	Horizontal	No limit
2	5350.0000	37.58	52.60	15.02	68.30	15.70	200	193	Horizontal	/
3	5366.3200	40.73	55.96	15.23	74.00	18.04	200	0	Horizontal	/
1	5285.4400	89.50	103.79	14.29	68.30	-35.49	200	315	Vertical	No limit
2	5350.0000	46.18	61.20	15.02	68.30	7.10	200	192	Vertical	/
3	5365.8800	47.99	63.21	15.22	74.00	10.79	200	323	Vertical	/

802.11ac VHT80 mode/5290MHz


Detector mode: Average

Polarity: Horizontal

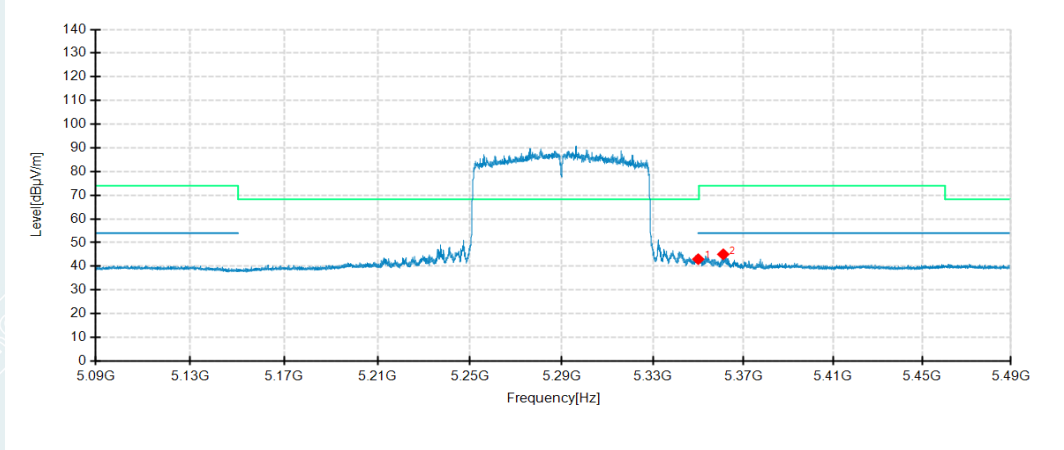

Detector mode: Average

Polarity: Vertical

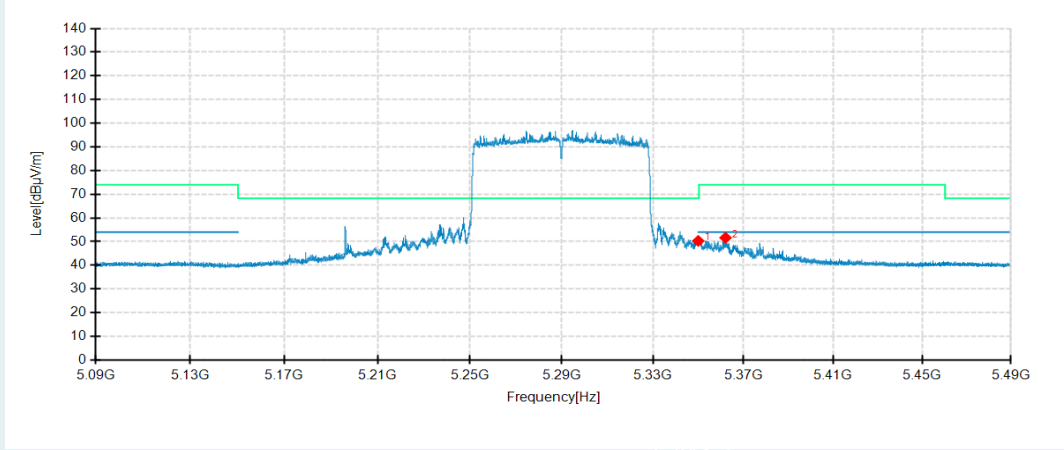


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	27.98	43.00	15.02	54.00	11.00	200	176	Horizontal	/
2	5361.0800	29.89	45.05	15.16	54.00	8.95	200	193	Horizontal	/
1	5350.0000	35.28	50.30	15.02	54.00	3.70	200	167	Vertical	/
2	5362.0800	36.45	51.62	15.17	54.00	2.38	200	335	Vertical	/

802.11ac VHT80 mode/5530MHz


Detector mode: Peak

Polarity: Horizontal

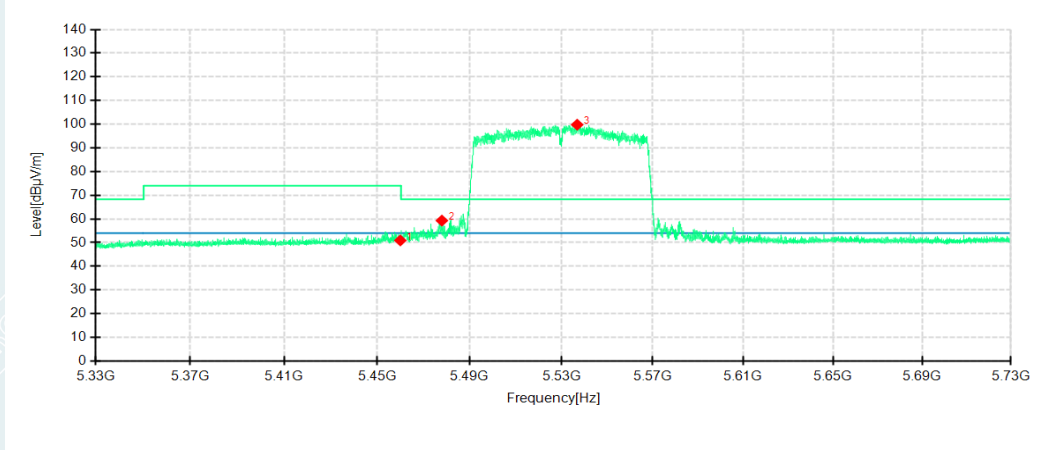

Detector mode: Peak


Polarity: Vertical

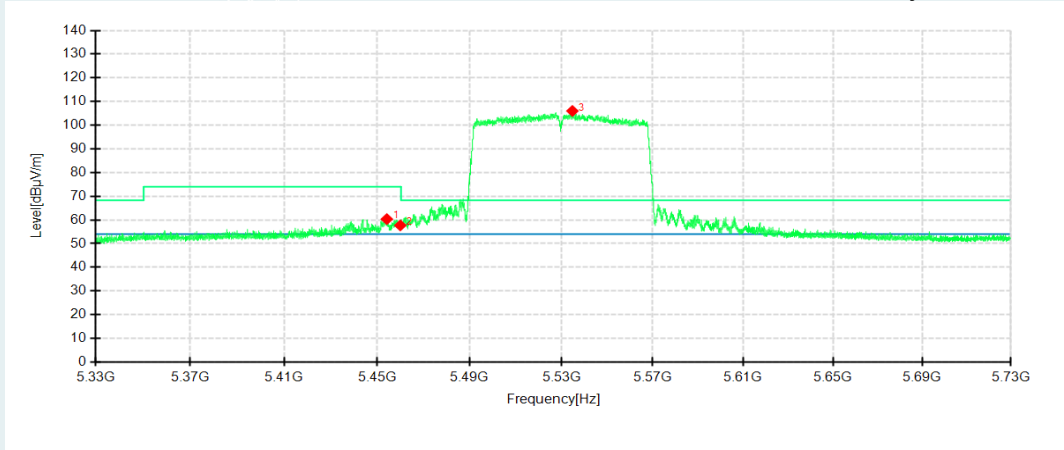

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	35.09	50.91	15.82	74.00	23.09	200	193	Horizontal	/
2	5477.9600	43.41	59.30	15.89	68.30	9.00	200	176	Horizontal	/
3	5536.8800	83.44	99.79	16.35	68.30	-31.49	200	168	Horizontal	No limit
1	5454.1600	44.54	60.34	15.80	74.00	13.66	200	340	Vertical	/
2	5460.0000	41.87	57.69	15.82	74.00	16.31	200	167	Vertical	/
3	5534.8000	89.68	106.00	16.32	68.30	-37.70	200	323	Vertical	No limit


802.11ac VHT80 mode/5530MHz
Detector mode: Average

Polarity: Horizontal

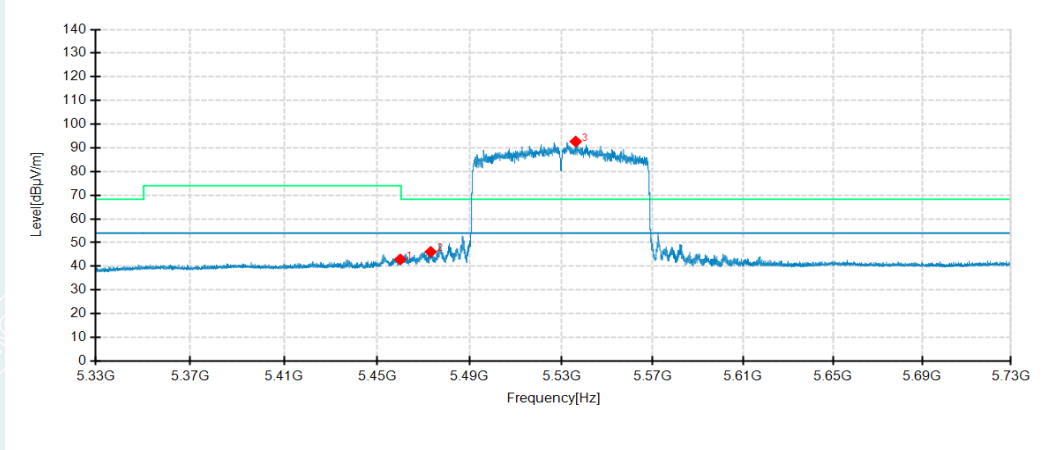

Detector mode: Average

Polarity: Vertical

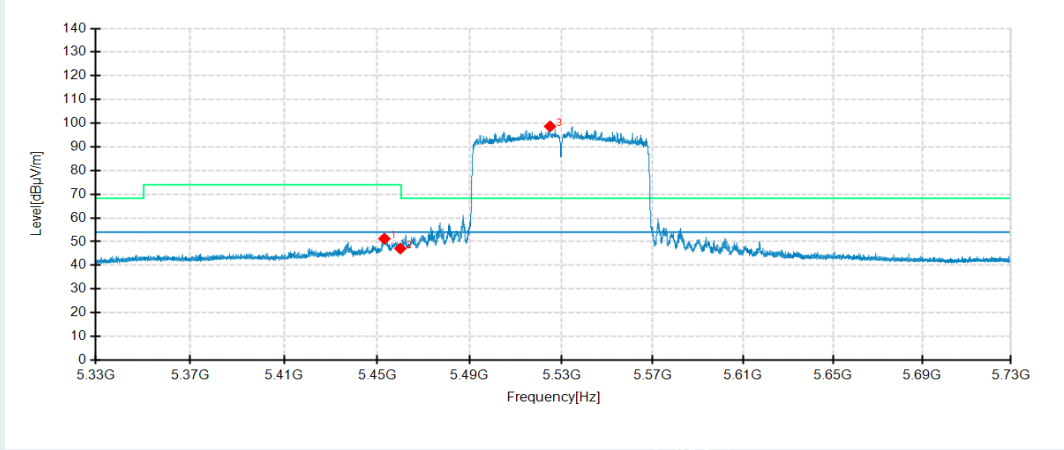


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	27.08	42.90	15.82	54.00	11.10	200	176	Horizontal	/
2	5473.1600	30.24	46.11	15.87	54.00	7.89	200	168	Horizontal	/
3	5536.2400	76.34	92.68	16.34	54.00	-38.68	200	184	Horizontal	No limit
1	5453.1200	35.46	51.25	15.79	54.00	2.75	200	249	Vertical	/
2	5460.0000	31.25	47.07	15.82	54.00	6.93	200	241	Vertical	/
3	5525.0000	82.43	98.66	16.23	54.00	-44.66	200	200	Vertical	No limit

802.11ac VHT80 mode/5610MHz


Detector mode: Peak

Polarity: Horizontal

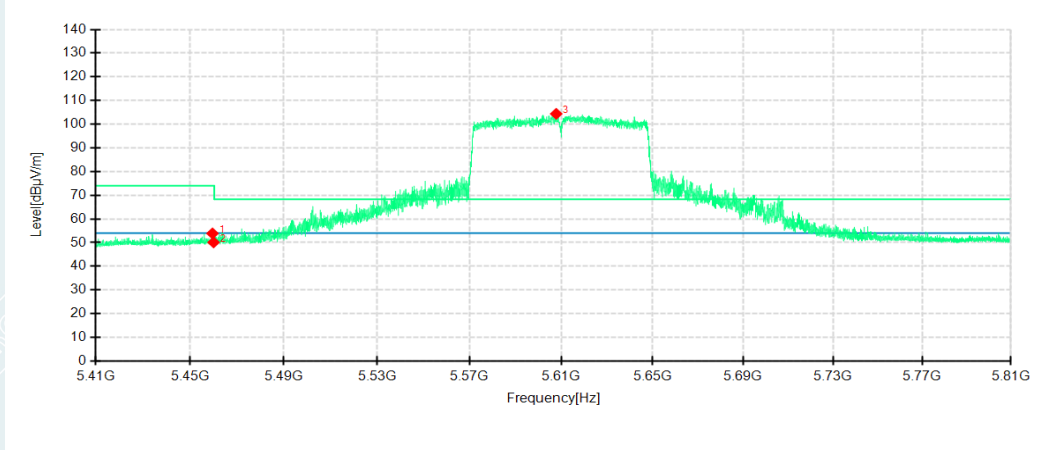

Detector mode: Peak

Polarity: Vertical

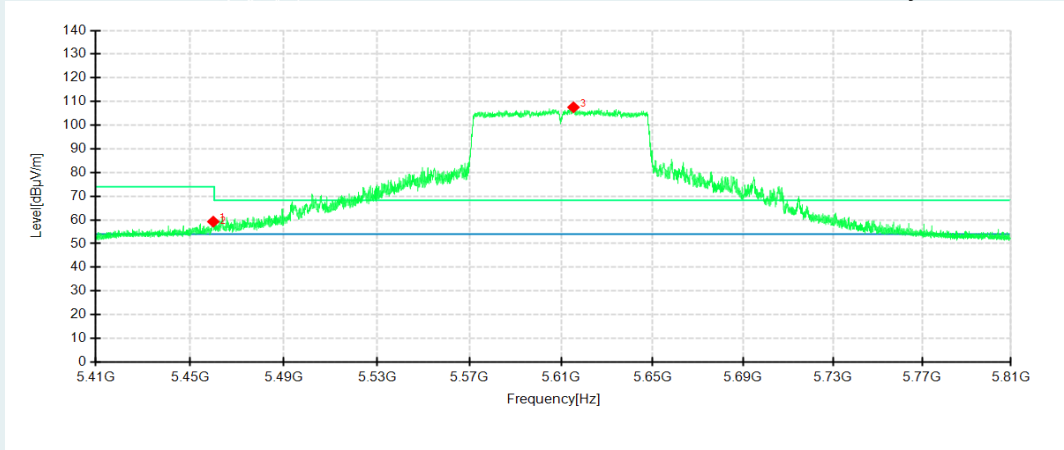


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5459.5200	38.05	53.87	15.82	74.00	20.13	200	176	Horizontal	/
2	5460.0000	34.28	50.10	15.82	74.00	23.90	200	193	Horizontal	/
3	5607.7600	88.29	104.37	16.08	68.30	-36.07	200	168	Horizontal	No limit
1	5459.8400	43.46	59.28	15.82	74.00	14.72	200	167	Vertical	/
2	5460.0000	42.16	57.98	15.82	74.00	16.02	100	127	Vertical	/
3	5615.3200	91.35	107.56	16.21	68.30	-39.26	200	233	Vertical	No limit

802.11ac VHT80 mode/5610MHz


Detector mode: Average

Polarity: Horizontal

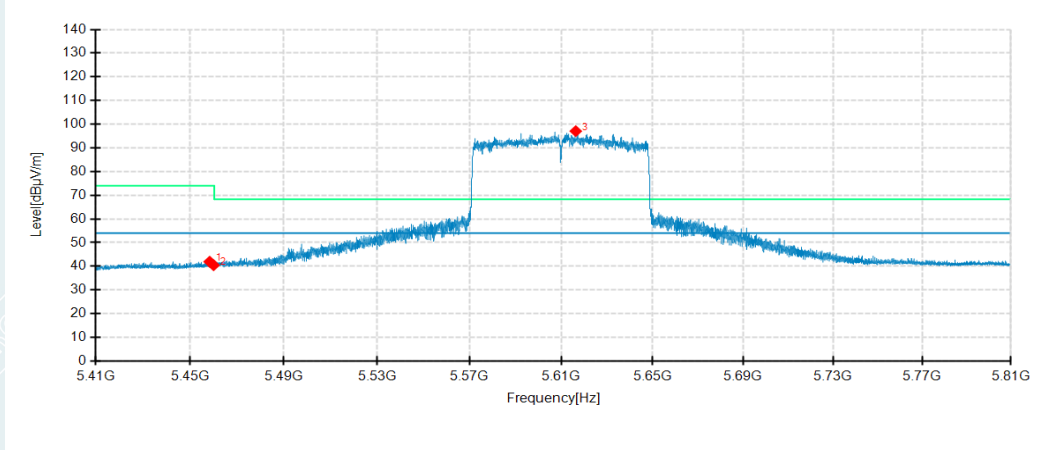

Detector mode: Average

Polarity: Vertical

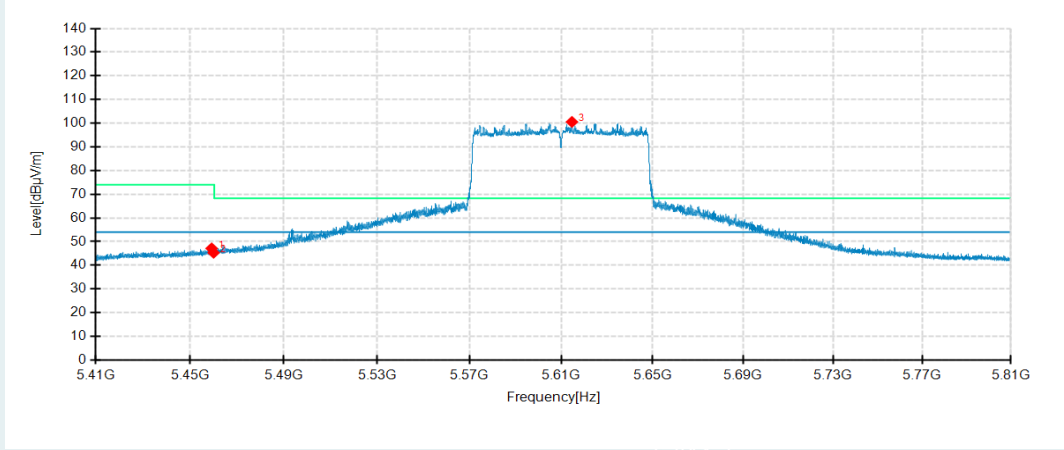


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5458.3200	26.15	41.96	15.81	54.00	12.04	200	160	Horizontal	/
2	5460.0000	24.62	40.44	15.82	54.00	13.56	200	193	Horizontal	/
3	5616.3200	80.84	97.07	16.23	54.00	-43.07	200	168	Horizontal	No limit
1	5459.1600	31.33	47.14	15.81	54.00	6.86	200	249	Vertical	/
2	5460.0000	29.46	45.28	15.82	54.00	8.72	200	167	Vertical	/
3	5614.6400	84.34	100.54	16.20	54.00	-46.54	200	192	Vertical	No limit

802.11ax HE20 mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

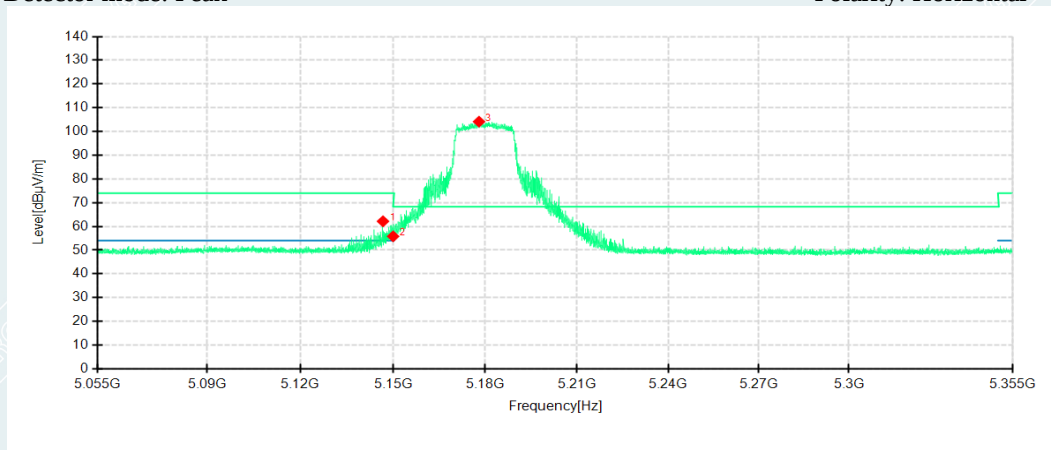

Detector mode: Peak

Polarity: Vertical

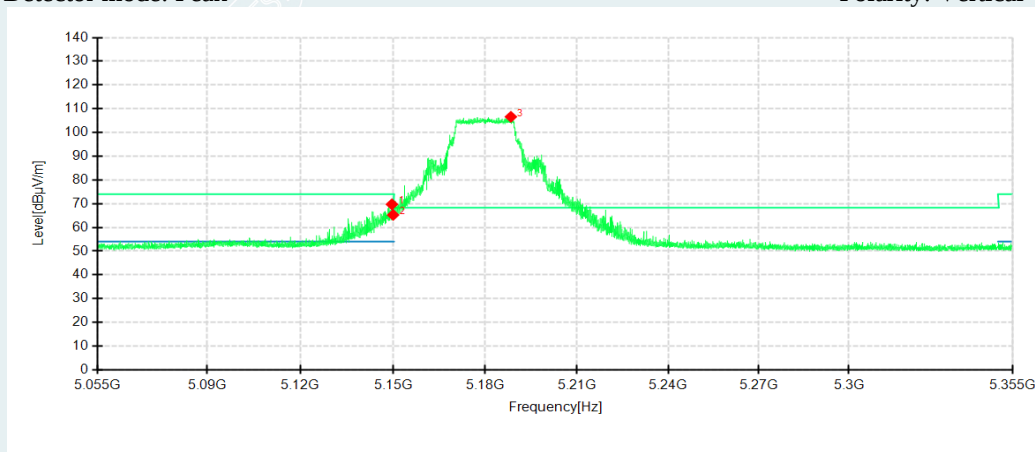


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.7100	48.31	62.15	13.84	74.00	11.85	200	167	Horizontal	/
2	5150.0000	42.04	55.81	13.77	74.00	18.19	200	167	Horizontal	/
3	5177.9400	89.68	104.13	14.45	68.30	-35.83	200	167	Horizontal	No limit
1	5149.6200	55.95	69.73	13.78	74.00	4.27	200	193	Vertical	/
2	5150.0000	51.48	65.25	13.77	74.00	8.75	200	193	Vertical	/
3	5188.3500	91.89	106.60	14.71	68.30	-38.30	100	167	Vertical	No limit

802.11ax HE20 mode/5180MHz


Detector mode: Average

Polarity: Horizontal

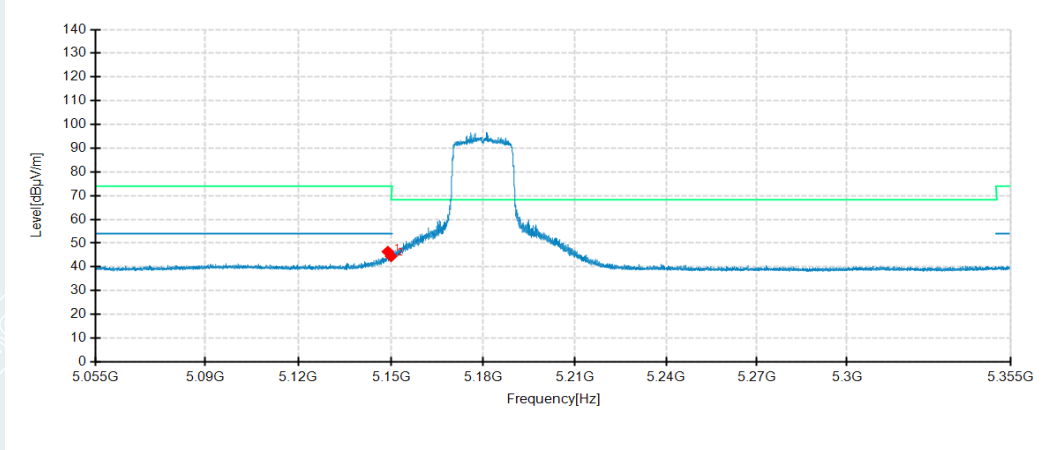

Detector mode: Average

Polarity: Vertical

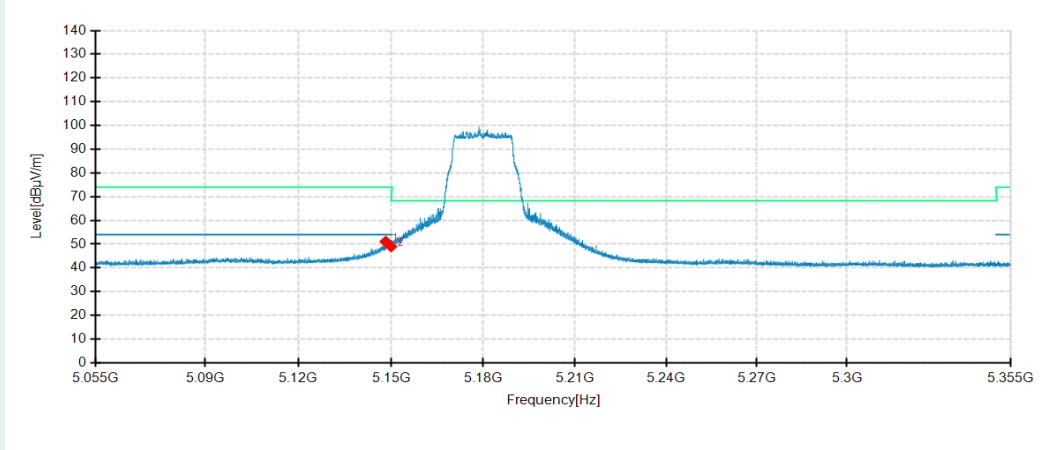


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.9300	32.62	46.41	13.79	54.00	7.59	200	167	Horizontal	/
2	5150.0000	30.68	44.45	13.77	54.00	9.55	200	360	Horizontal	/
1	5148.2400	37.28	51.09	13.81	54.00	2.91	100	167	Vertical	/
2	5150.0000	35.20	48.97	13.77	54.00	5.03	200	127	Vertical	/

802.11ax HE20 mode/5200MHz


Detector mode: Peak

Polarity: Horizontal

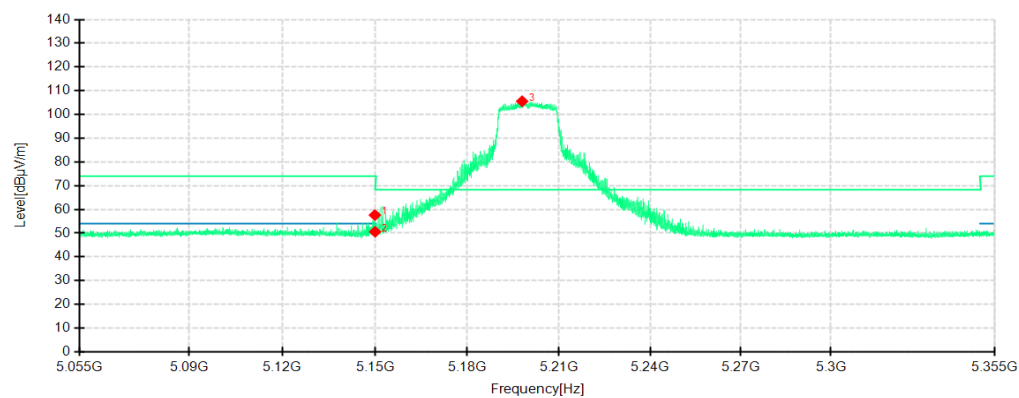

Detector mode: Peak

Polarity: Vertical

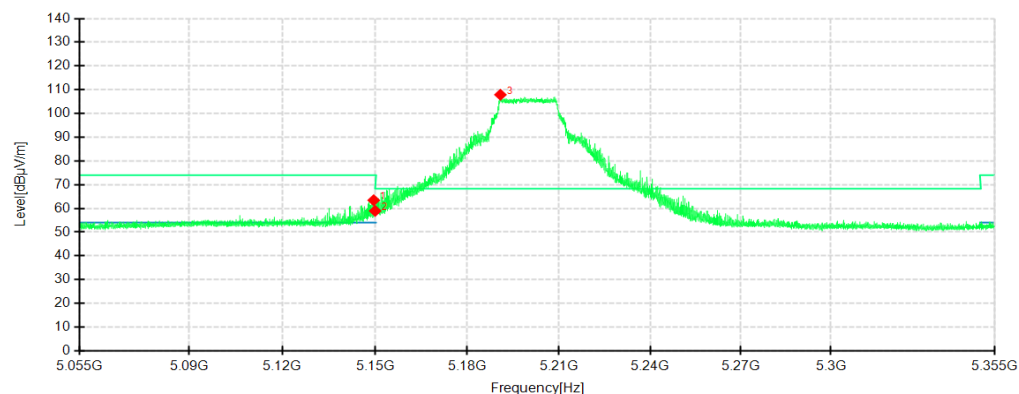


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.9200	43.83	57.60	13.77	74.00	16.40	200	360	Horizontal	/
2	5150.0000	36.80	50.57	13.77	74.00	23.43	200	167	Horizontal	/
3	5197.9200	90.62	105.56	14.94	68.30	-37.26	200	359	Horizontal	No limit
1	5149.5300	49.67	63.45	13.78	74.00	10.55	200	193	Vertical	/
2	5150.0000	45.18	58.95	13.77	74.00	15.05	100	167	Vertical	/
3	5190.8100	93.12	107.89	14.77	68.30	-39.59	200	3	Vertical	No limit

802.11ax HE20 mode/5200MHz


Detector mode: Average

Polarity: Horizontal

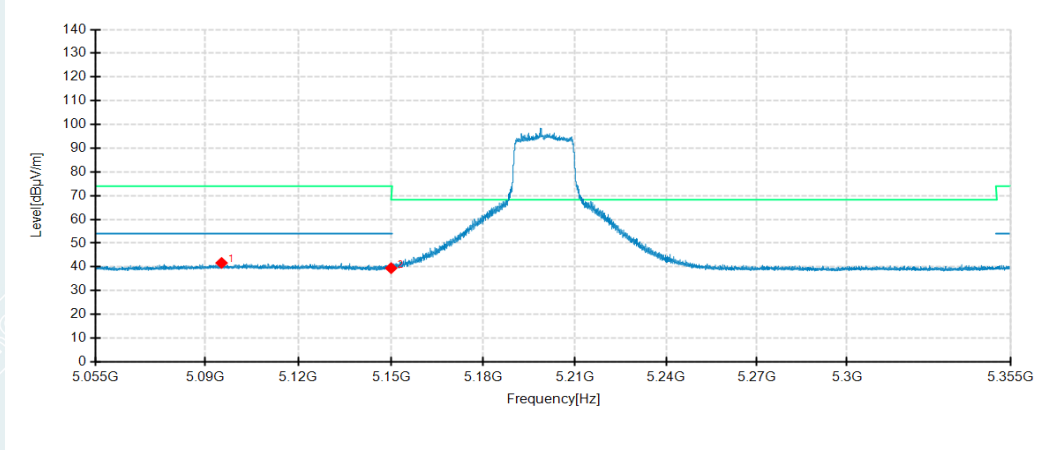

Detector mode: Average

Polarity: Vertical

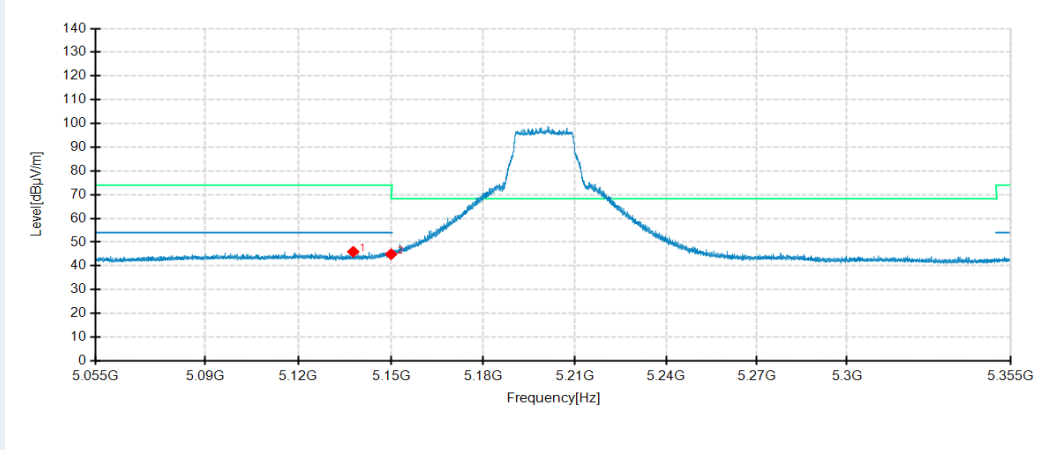


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5095.2900	26.86	41.67	14.81	54.00	12.33	200	167	Horizontal	/
2	5150.0000	25.68	39.45	13.77	54.00	14.55	200	352	Horizontal	/
1	5137.7100	31.92	45.96	14.04	54.00	8.04	200	193	Vertical	/
2	5150.0000	31.15	44.92	13.77	54.00	9.08	200	193	Vertical	/

802.11ax HE20 mode/5240MHz


Detector mode: Peak

Polarity: Horizontal

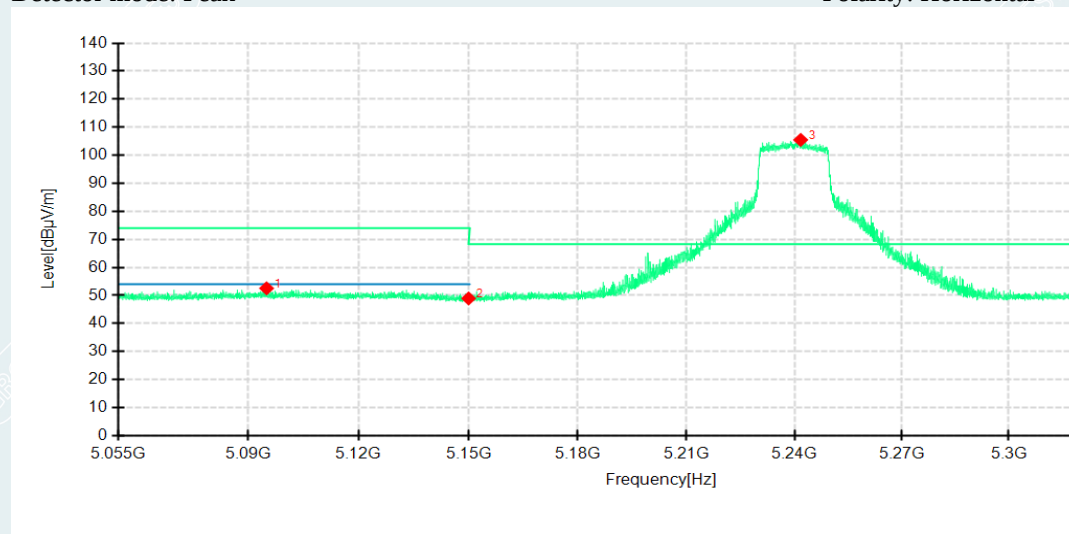

Detector mode: Peak

Polarity: Vertical

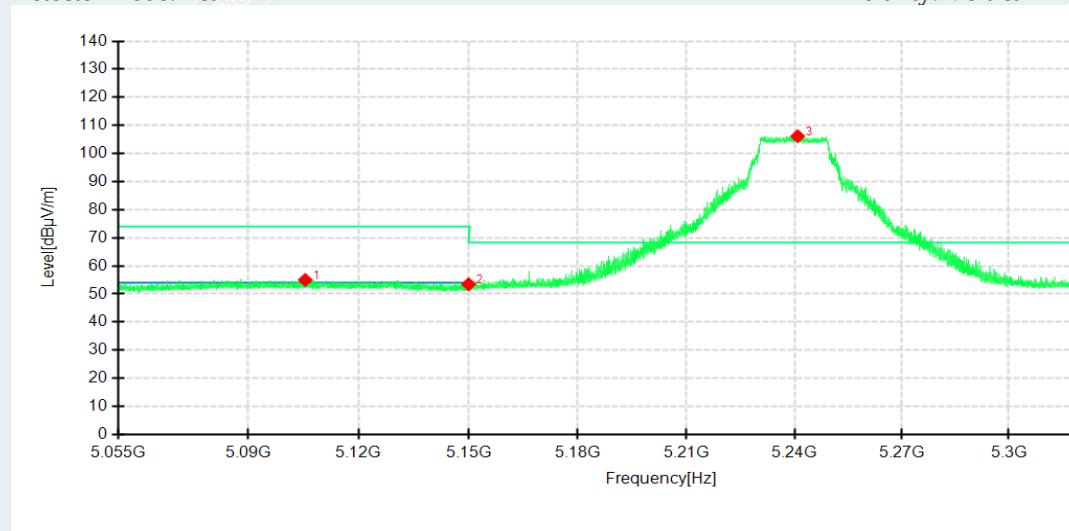


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5094.9900	37.74	52.54	14.80	74.00	21.46	200	360	Horizontal	/
2	5150.0000	35.16	48.93	13.77	74.00	25.07	200	167	Horizontal	/
3	5241.7200	91.16	105.47	14.31	68.30	-37.17	200	167	Horizontal	No limit
1	5105.4900	40.27	55.00	14.73	74.00	19.00	200	193	Vertical	/
2	5150.0000	39.68	53.45	13.77	74.00	20.55	200	193	Vertical	/
3	5240.8800	91.83	106.16	14.33	68.30	-37.86	200	103	Vertical	No limit

802.11ax HE20 mode/5240MHz


Detector mode: Average

Polarity: Horizontal

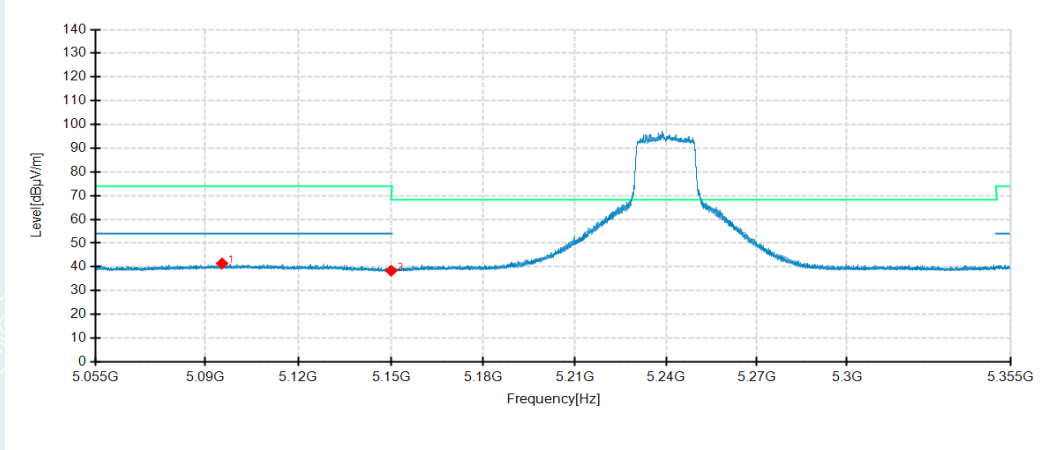

Detector mode: Average

Polarity: Vertical

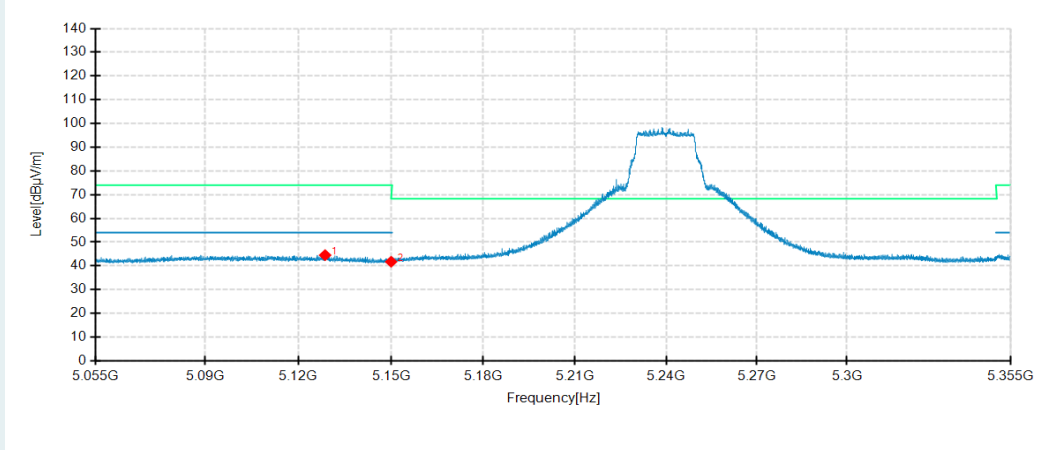


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5095.4400	26.63	41.44	14.81	54.00	12.56	200	167	Horizontal	/
2	5150.0000	24.60	38.37	13.77	54.00	15.63	200	258	Horizontal	/
1	5128.6200	30.30	44.53	14.23	54.00	9.47	200	193	Vertical	/
2	5150.0000	27.97	41.74	13.77	54.00	12.26	200	193	Vertical	/

802.11ax HE20 mode/5260MHz


Detector mode: Peak

Polarity: Horizontal

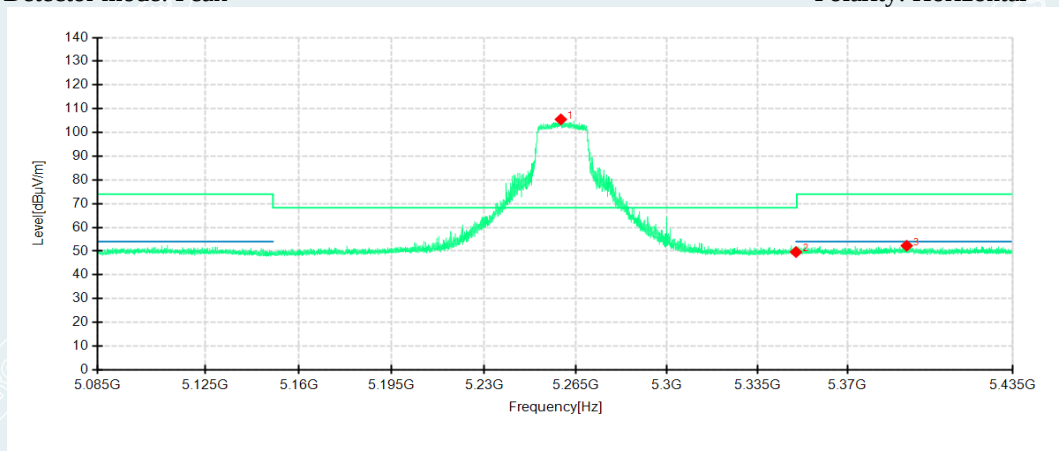

Detector mode: Peak

Polarity: Vertical

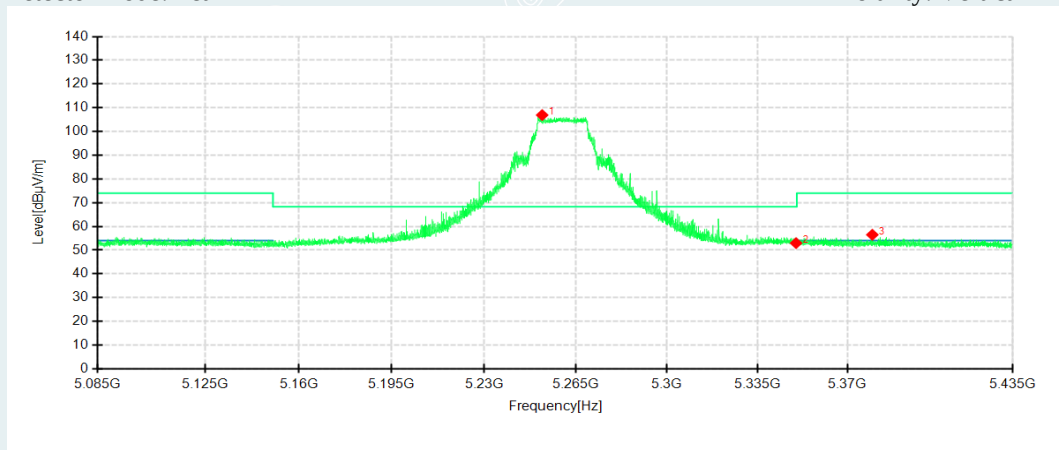


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5259.2650	91.28	105.49	14.21	68.30	-37.19	200	167	Horizontal	/
2	5350.0000	34.59	49.61	15.02	68.30	18.69	200	167	Horizontal	/
3	5393.2450	36.70	52.27	15.57	74.00	21.73	100	176	Horizontal	No limit
1	5252.1250	92.71	106.90	14.19	68.30	-38.60	200	193	Vertical	/
2	5350.0000	37.93	52.95	15.02	68.30	15.35	200	193	Vertical	/
3	5379.7700	41.08	56.48	15.40	74.00	17.52	200	193	Vertical	No limit

802.11ax HE20 mode/5260MHz


Detector mode: Average

Polarity: Horizontal

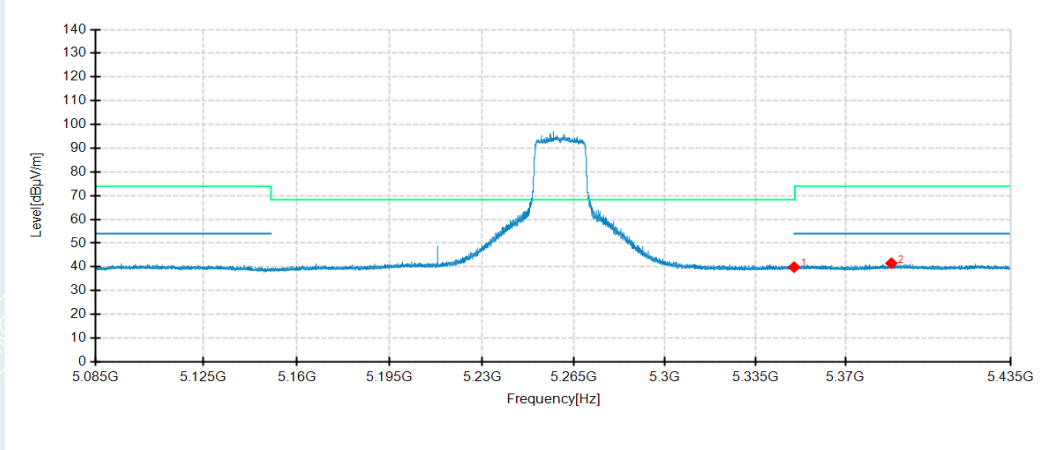

Detector mode: Average

Polarity: Vertical

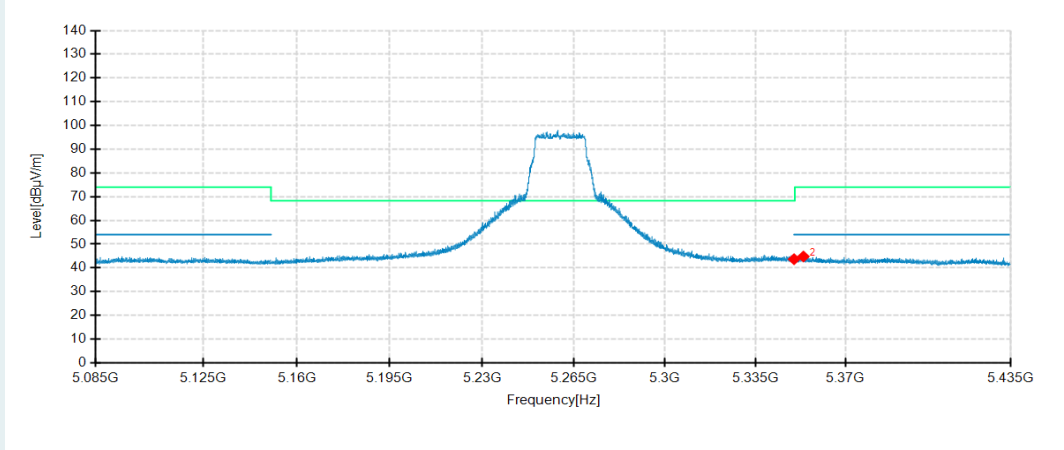


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	24.86	39.88	15.02	54.00	14.12	200	167	Horizontal	/
2	5388.0300	26.01	41.52	15.51	54.00	12.48	200	359	Horizontal	/
1	5350.0000	28.63	43.65	15.02	54.00	10.35	200	193	Vertical	/
2	5353.6600	29.73	44.80	15.07	54.00	9.20	200	193	Vertical	/

802.11ax HE20 mode/5280MHz


Detector mode: Peak

Polarity: Horizontal

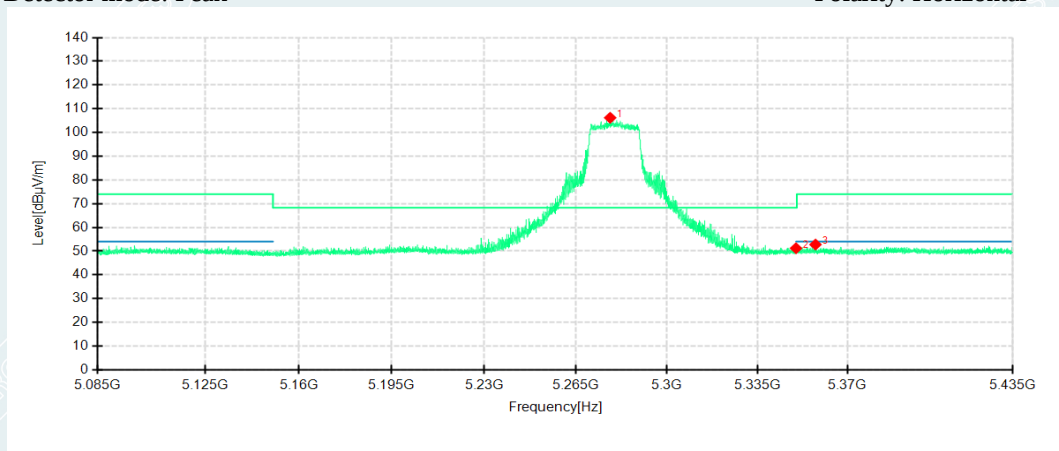

Detector mode: Peak


Polarity: Vertical

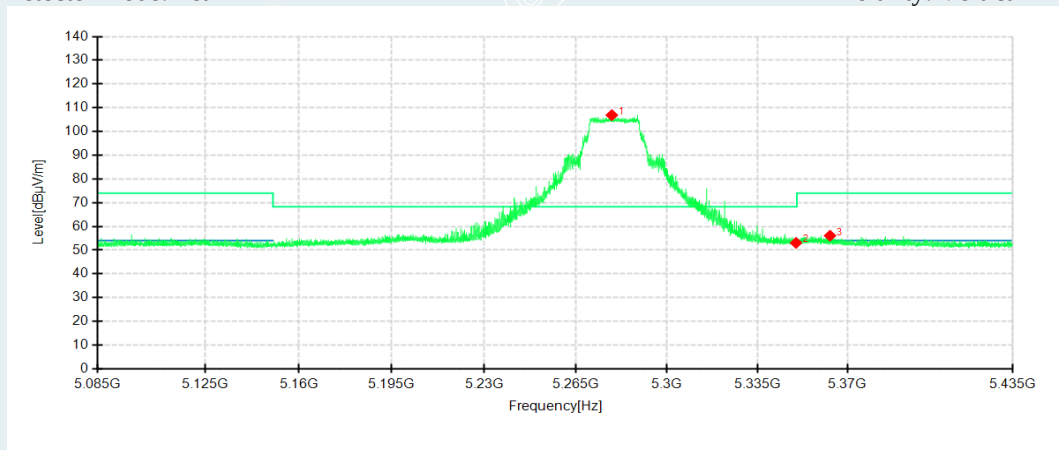

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5278.1650	91.93	106.19	14.26	68.30	-37.89	200	167	Horizontal	/
2	5350.0000	36.19	51.21	15.02	68.30	17.09	100	193	Horizontal	/
3	5357.5800	37.66	52.78	15.12	74.00	21.22	200	167	Horizontal	No limit
1	5278.7950	92.62	106.89	14.27	68.30	-38.59	200	193	Vertical	/
2	5350.0000	38.04	53.06	15.02	68.30	15.24	200	193	Vertical	/
3	5363.2500	40.90	56.09	15.19	74.00	17.91	200	3	Vertical	No limit


802.11ax HE20 mode/5280MHz
Detector mode: Average

Polarity: Horizontal

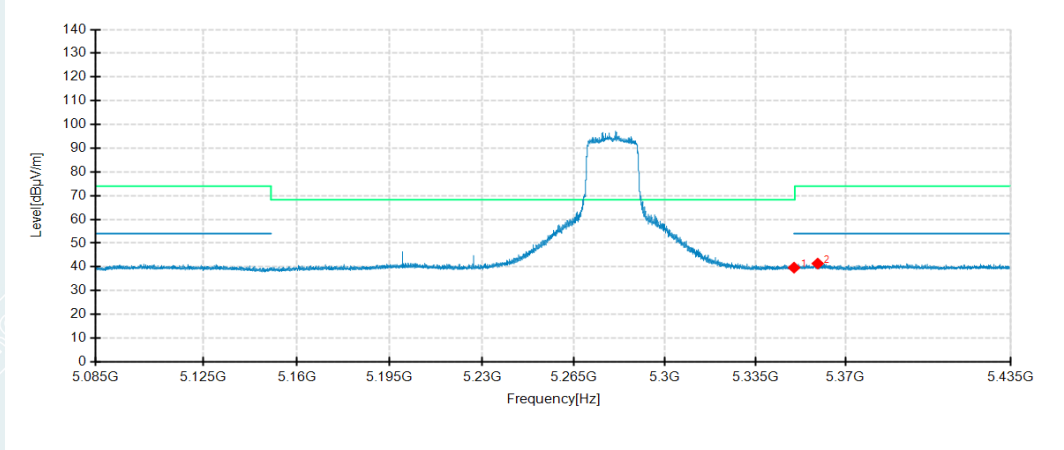

Detector mode: Average

Polarity: Vertical

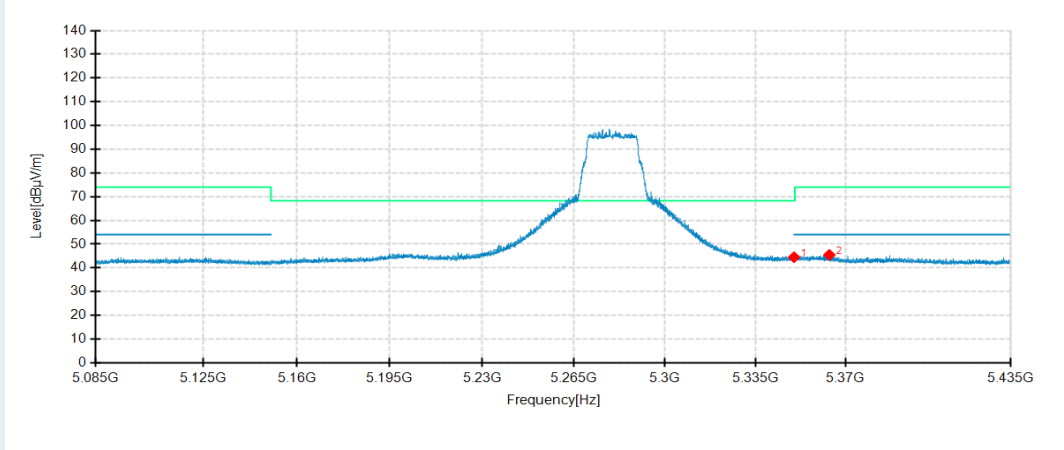


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	24.65	39.67	15.02	54.00	14.33	200	192	Horizontal	/
2	5359.2250	26.26	41.40	15.14	54.00	12.60	200	167	Horizontal	/
1	5350.0000	29.47	44.49	15.02	54.00	9.51	200	193	Vertical	/
2	5363.7750	30.27	45.47	15.20	54.00	8.53	200	193	Vertical	/

802.11ax HE20 mode/5320MHz


Detector mode: Peak

Polarity: Horizontal

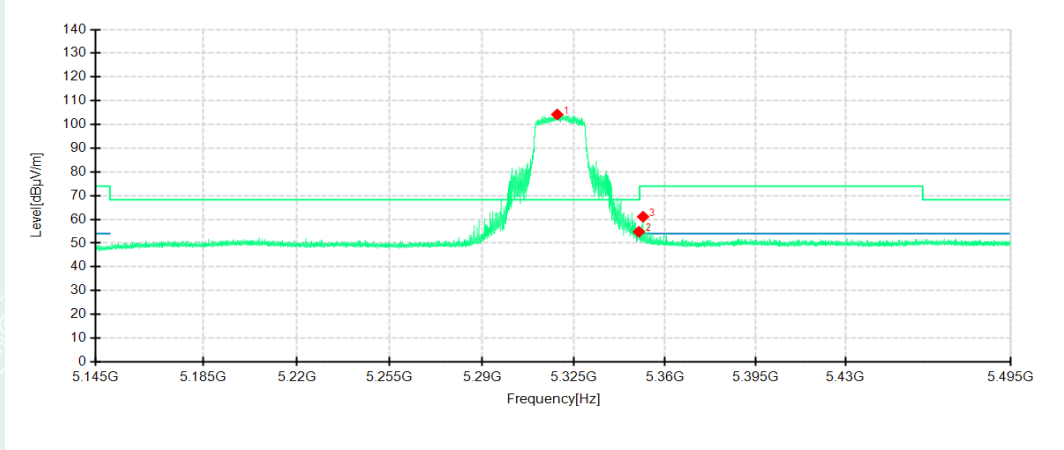

Detector mode: Peak


Polarity: Vertical

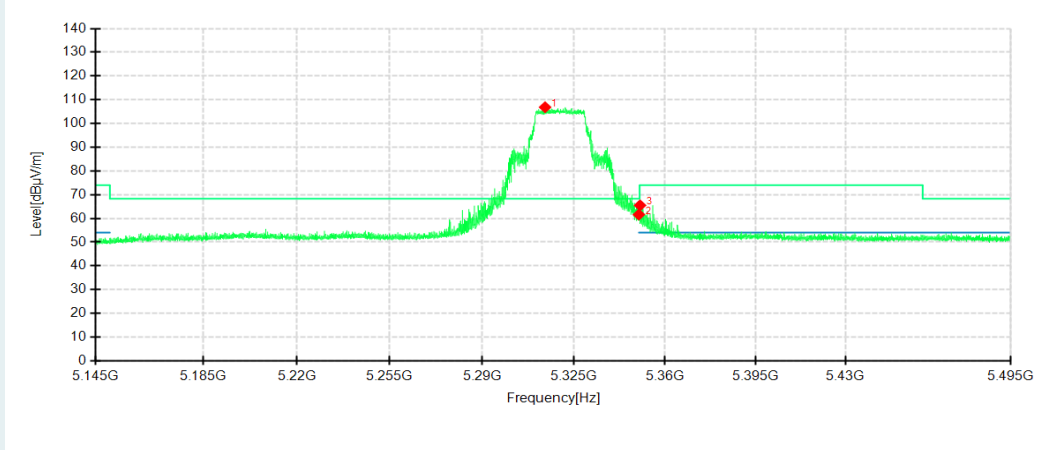

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5318.6700	89.60	104.19	14.59	68.30	-35.89	200	352	Horizontal	No limit
2	5350.0000	39.76	54.78	15.02	68.30	13.52	200	359	Horizontal	/
3	5351.6050	46.08	61.12	15.04	74.00	12.88	200	352	Horizontal	/
1	5314.0150	92.32	106.84	14.52	68.30	-38.54	200	37	Vertical	No limit
2	5350.0000	46.59	61.61	15.02	68.30	6.69	100	241	Vertical	/
3	5350.4500	50.48	65.51	15.03	74.00	8.49	200	193	Vertical	/


802.11ax HE20 mode/5320MHz
Detector mode: Average

Polarity: Horizontal

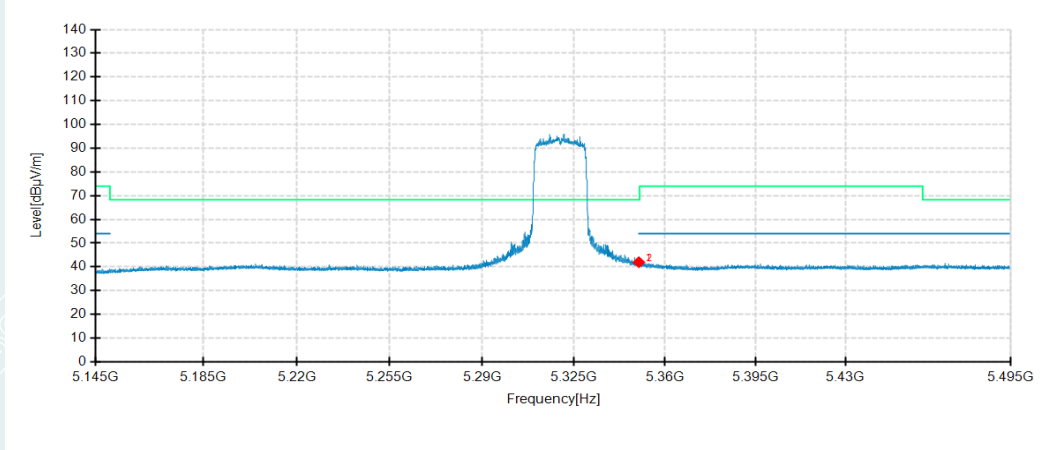

Detector mode: Average

Polarity: Vertical

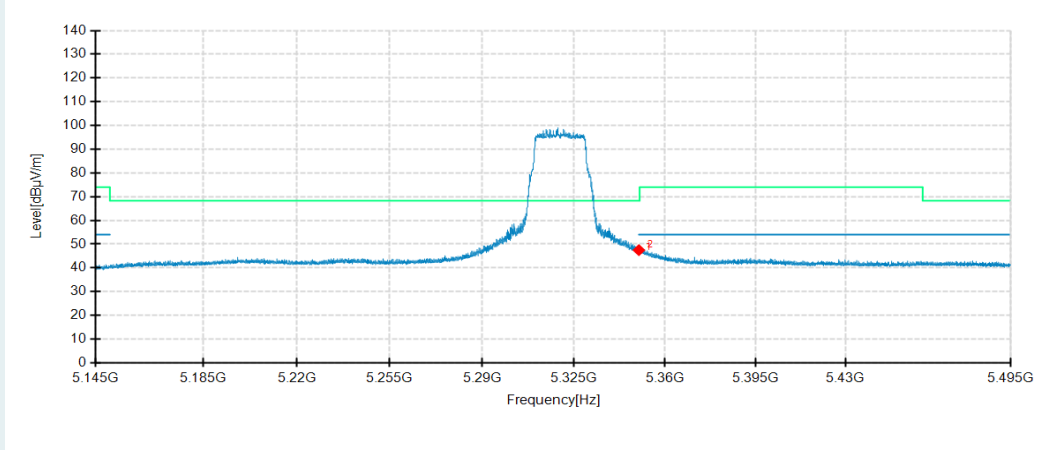


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5350.0000	26.95	41.97	15.02	54.00	12.03	200	167	Horizontal	/
2	5350.5200	27.01	42.04	15.03	54.00	11.96	200	360	Horizontal	/
1	5350.0000	32.46	47.48	15.02	54.00	6.52	100	167	Vertical	/
2	5350.6600	33.35	48.38	15.03	54.00	5.62	200	193	Vertical	/

802.11ax HE20 mode/5500MHz


Detector mode: Peak

Polarity: Horizontal

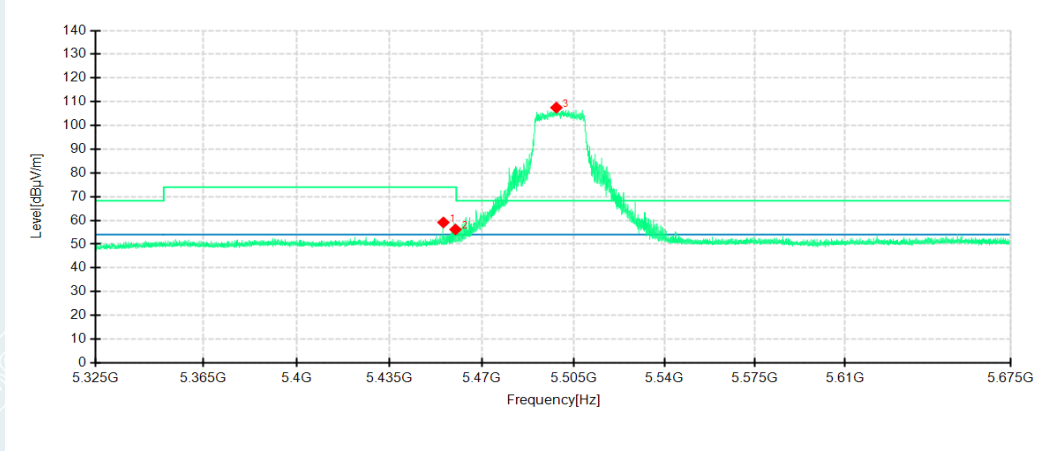

Detector mode: Peak


Polarity: Vertical

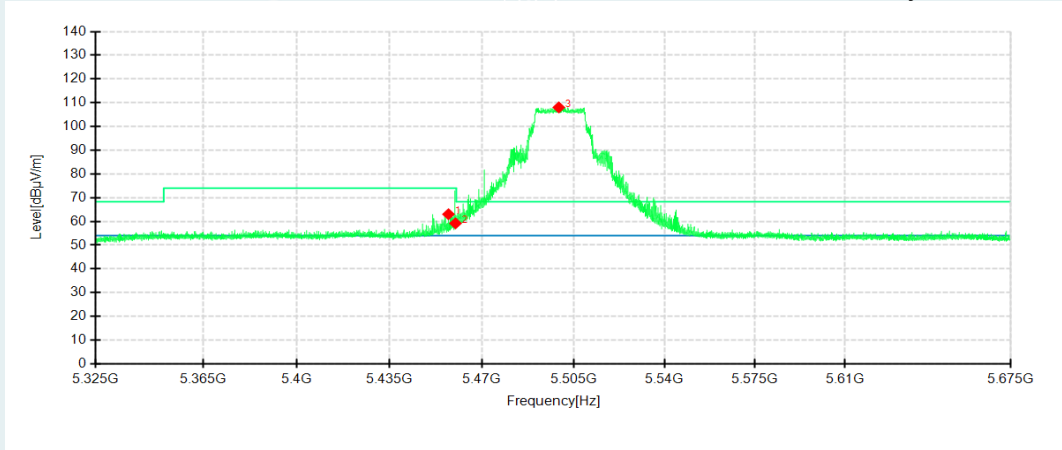

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5455.4100	43.34	59.14	15.80	74.00	14.86	200	167	Horizontal	/
2	5460.0000	40.37	56.19	15.82	74.00	17.81	200	352	Horizontal	/
3	5498.4600	91.55	107.51	15.96	68.30	-39.21	200	175	Horizontal	No limit
1	5457.3350	47.23	63.04	15.81	74.00	10.96	200	136	Vertical	/
2	5460.0000	43.38	59.20	15.82	74.00	14.80	200	193	Vertical	/
3	5499.3700	92.07	108.04	15.97	68.30	-39.74	200	193	Vertical	No limit


802.11ax HE20 mode/5500MHz
Detector mode: Average

Polarity: Horizontal

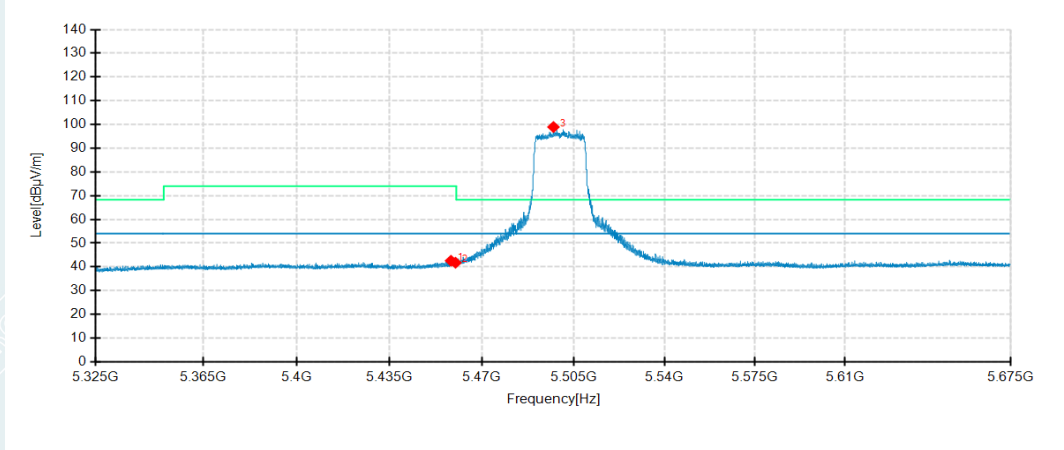

Detector mode: Average

Polarity: Vertical

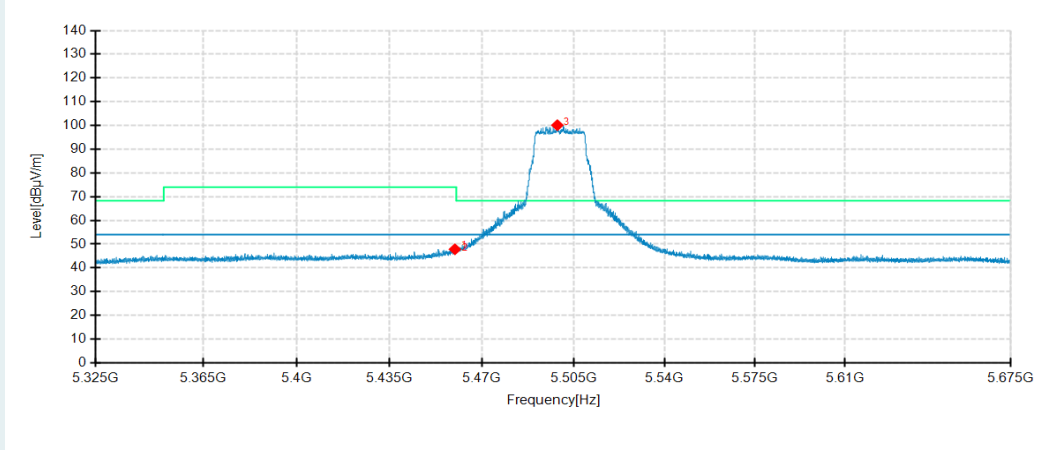


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5458.2800	26.78	42.59	15.81	54.00	11.41	200	352	Horizontal	/
2	5460.0000	25.94	41.76	15.82	54.00	12.24	200	167	Horizontal	/
3	5497.3400	82.96	98.92	15.96	54.00	-44.92	200	184	Horizontal	/
1	5459.7850	32.02	47.84	15.82	54.00	6.16	200	193	Vertical	/
2	5460.0000	31.20	47.02	15.82	54.00	6.98	200	193	Vertical	/
3	5498.8100	84.14	100.11	15.97	54.00	-46.11	100	167	Vertical	/

802.11ax HE20 mode/5580MHz


Detector mode: Peak

Polarity: Horizontal

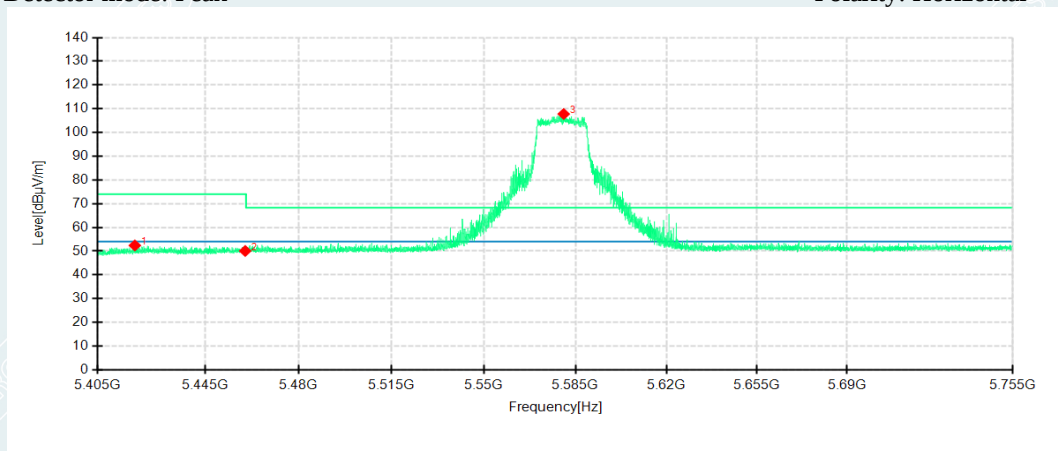

Detector mode: Peak

Polarity: Vertical

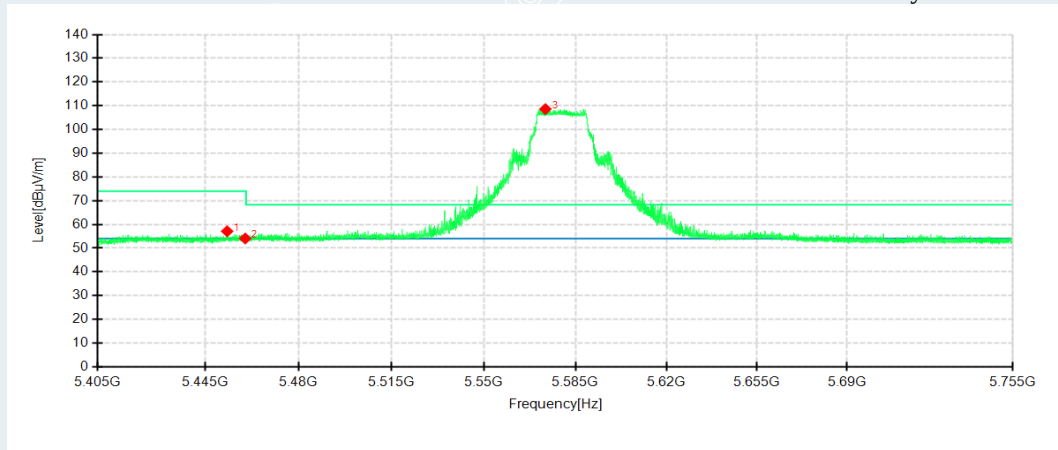


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5418.8250	36.69	52.40	15.71	74.00	21.60	200	184	Horizontal	/
2	5460.0000	34.26	50.08	15.82	74.00	23.92	200	167	Horizontal	/
3	5580.5250	91.63	107.78	16.15	68.30	-39.48	200	200	Horizontal	No limit
1	5453.2300	41.31	57.10	15.79	74.00	16.90	200	193	Vertical	/
2	5460.0000	38.25	54.07	15.82	74.00	19.93	100	184	Vertical	/
3	5573.5250	92.36	108.59	16.23	68.30	-40.29	200	193	Vertical	No limit

802.11ax HE20 mode/5580MHz


Detector mode: Average

Polarity: Horizontal

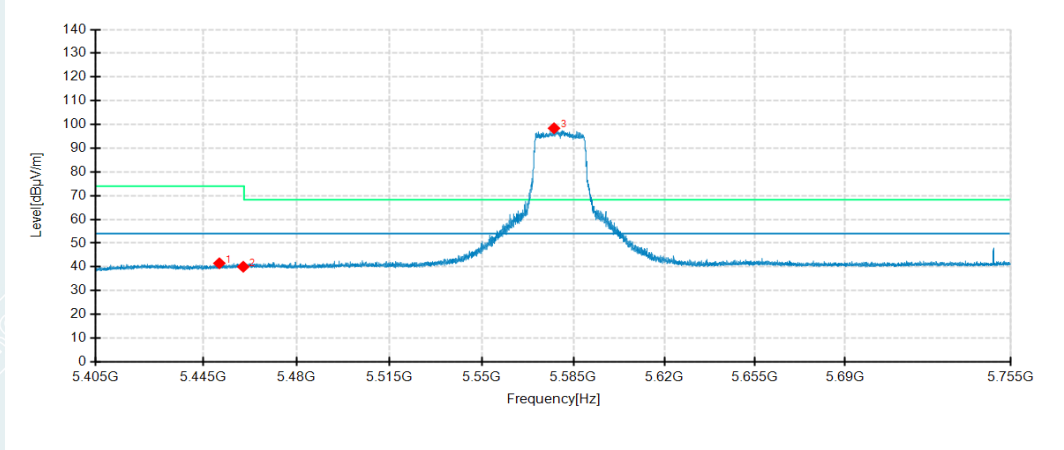

Detector mode: Average

Polarity: Vertical

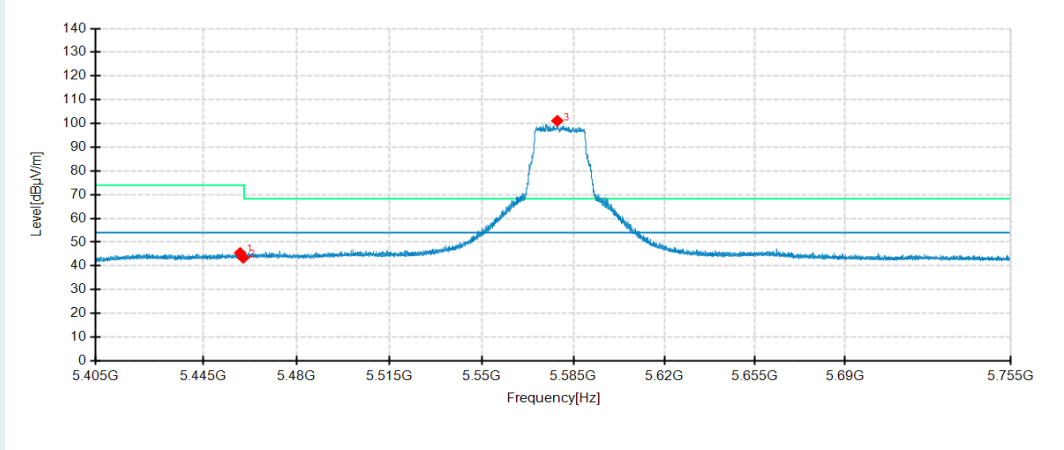

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5451.0600	25.75	41.53	15.78	54.00	12.47	200	167	Horizontal	/
2	5460.0000	24.24	40.06	15.82	54.00	13.94	100	128	Horizontal	/
3	5577.5850	82.22	98.40	16.18	54.00	-44.40	200	184	Horizontal	No limit
1	5458.8300	29.67	45.48	15.81	54.00	8.52	200	193	Vertical	/
2	5460.0000	27.58	43.40	15.82	54.00	10.60	200	193	Vertical	/
3	5578.8450	84.95	101.12	16.17	54.00	-47.12	200	193	Vertical	No limit