

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 4**

TEST REPORT

For

STICK VACUUM CLEANER

FCC MODEL NUMBER: VS27*****

IC MODEL NUMBER: VS270100US

REPORT NUMBER: 4791834887-1-RF-1

**FCC ID: 2AV7A-A90
IC: 26039-A90**

ISSUE DATE: September 24, 2025

Prepared for

**Tineco Intelligent Technology Co., Ltd.
No. 108 Shihu Road West, Wuzhong Zone, Suzhou, 215168 P.R. China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	September 5, 2025	Initial Issue	
V1	September 10, 2025	1. Update ANSI C63.10-2013 to ANSI C63.10-2020 2. Updated the TEST PROCEDURE section in Section 7.2	Wite Chen
V2	September 19, 2025	Updated test results for sections 7.1 and 7.3	Wite Chen
V3	September 24, 2025	Updated Tonsend RF Test System Calibration Date	Wite Chen

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 6.3.2	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 6.3.1 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 6.3.1 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 6.6	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 6.6 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

Note:

1.N/A: In this whole report not applicable.

2.For ISED, this report is also performed according to ANSI C63.10-2020+Cor.1-2023 standards.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C

ISED RSS-247 ISSUE 4> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>9</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>11</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>11</i>
5.8. <i>SETUP DIAGRAM</i>	<i>12</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	13
7. ANTENNA PORT TEST RESULTS	16
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>16</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>18</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>20</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>22</i>
7.5. <i>DUTY CYCLE</i>	<i>24</i>
8. RADIATED TEST RESULTS.....	25
8.1. <i>RESTRICTED BANDEdge</i>	<i>33</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>40</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>46</i>
8.4. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>64</i>
8.5. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>66</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>69</i>
9. ANTENNA REQUIREMENT	71
10. AC POWER LINE CONDUCTED EMISSION	72

11. TEST DATA.....	75
Appendix A:Duty Cycle.....	75
Appendix B:Maximum Conducted Output Power	77
Appendix C:-6dB Bandwidth	78
Appendix D:Occupied Channel Bandwidth.....	82
Appendix E:Maximum Power Spectral Density Level.....	86
Appendix F:Band Edge.....	90
Appendix G:Conducted RF Spurious Emission.....	95

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Tineco Intelligent Technology Co., Ltd.
Address: No. 108 Shihu Road West, Wuzhong Zone, Suzhou, 215168 P.R. China

Manufacturer Information

Company Name: Tineco Intelligent Technology Co., Ltd.
Address: No. 108 Shihu Road West, Wuzhong Zone, Suzhou, 215168 P.R. China

EUT Information

EUT Name: STICK VACUUM CLEANER
IC Model: VS270100US
FCC Model: VS27*****
Brand: Tineco
Sample Received Date: June 30, 2025
Sample Status: Normal
Sample ID: 8650258
Date of Tested: June 30, 2025 to September 19, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 ISSUE 4	Pass

Prepared By:



Wite Chen

Engineer Project Associate

Checked By:



Kebo Zhang

Operations Leader

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C
 ISED RSS-247 Issue 4, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01
 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC
 Part 2, ANSI C63.10-2020, ANSI C63.10-2020+Cor.1-2023 and ISED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202</p>
--	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	STICK VACUUM CLEANER
IC Model	VS270100US
FCC Model	VS27*****
FCC Model differences	“*”=0-9, A-Z or blank used to denote different customers, colors or minor cosmetic changes, or for indicate factory identification.

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20
Normal Test Voltage:	AC 120 V, 60 Hz

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	11.84	15.8
g	2412 ~ 2462	1-11[11]	11.89	15.85
n HT20	2412 ~ 2462	1-11[11]	10.25	14.21

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band						
Test Software		ESP_RF_Test_Tool				
Modulation Mode	Transmit Antenna Number	Test Channel				
		NCB: 20MHz			NCB: 40MHz	
		CH 1	CH 6	CH 11	CH 3	CH 6
802.11b	1	4	17	30	/	
802.11g	1	4	15	28		
802.11n HT20	1	4	8	20		

WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
 802.11g mode: 6 Mbps
 802.11n HT20 mode: MCS0

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PCB antenna	3.96

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	Lamp holder	/	/	/


I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	TYPE-C	/	/	1.0	/

ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

5.8. SETUP DIAGRAM

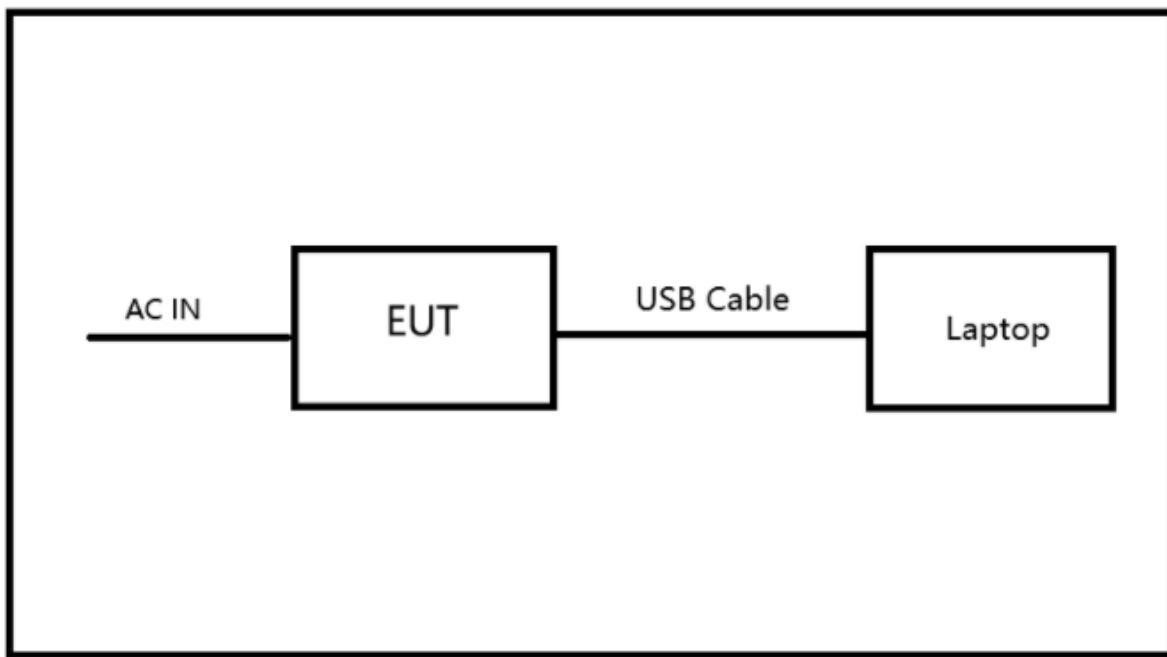

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonsend	JS0806-2	23B80620666	Dec.27,2024	Dec.26,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions(Below 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions(Above 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Signal Analyzer	R&S	FSV40	101117	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.28, 2024	Sep.27, 2025
Horn Antenna	ETS-Lindgren	3117	00213191	Feb.7,2023	Feb.6,2026
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	Jun. 30, 2024	Jun. 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00002	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Highpass Filter	Wainwright	WHKX10-2700-3000-1800-40SS	24	Sep.28, 2024	Sep.27, 2025
Software					

Description	Manufacturer	Name	Version
Test Software for Radiated Emission	Tonscend	JS32-RE	5.0.0

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 6.3.2	Peak & AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE

For peak power:

Refer to ANSI C63.10-2020 clause 11.9.1.2.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

For average power:


Refer to ANSI C63.10-2020 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	September 19, 2025	Test By	Walker Yuan
-----------	--------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 6.3.1(a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5


TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 1 % to 5 % of the OBW but not less than 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

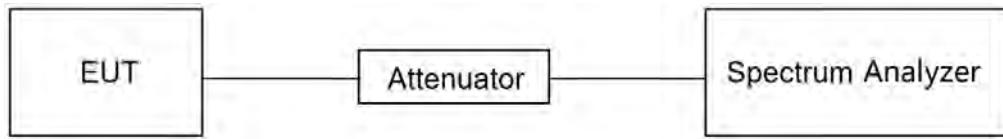TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5°C	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	September 5, 2025	Test By	Walker Yuan
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C&D

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 6.3.1 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$>1.5 \times \text{OBW}$ bandwidth
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple
Sweep points	$\geq 2 \times \text{span} / \text{RBW}$.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

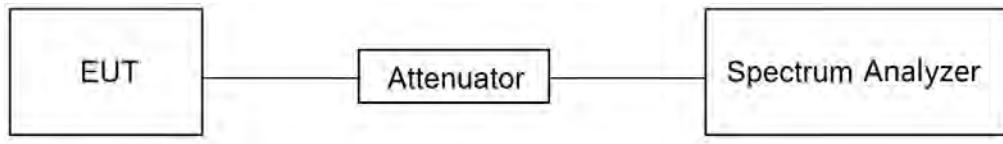

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	September 19, 2025	Test By	Walker Yuan
-----------	--------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 6.6	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.11.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

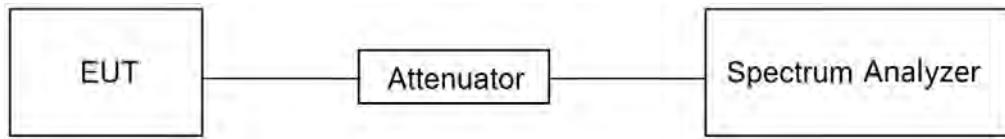TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5°C	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	July 15, 2025	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F&G

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

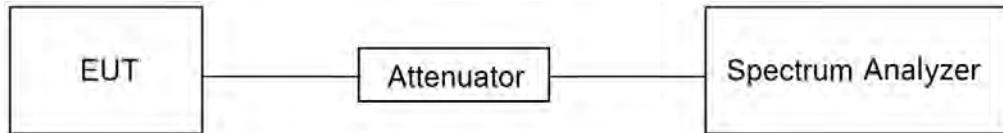

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	July 15, 2025	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.8 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2855 - 2900	
13.36 - 13.41	3260 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

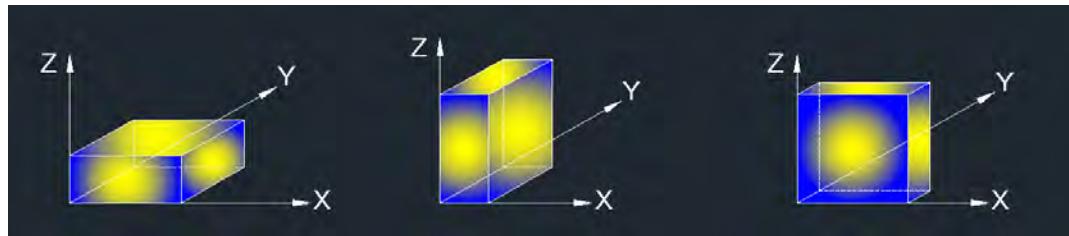

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $dBuA/m = dBuV/m - 20\log_{10}[120\pi] = dBuV/m - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

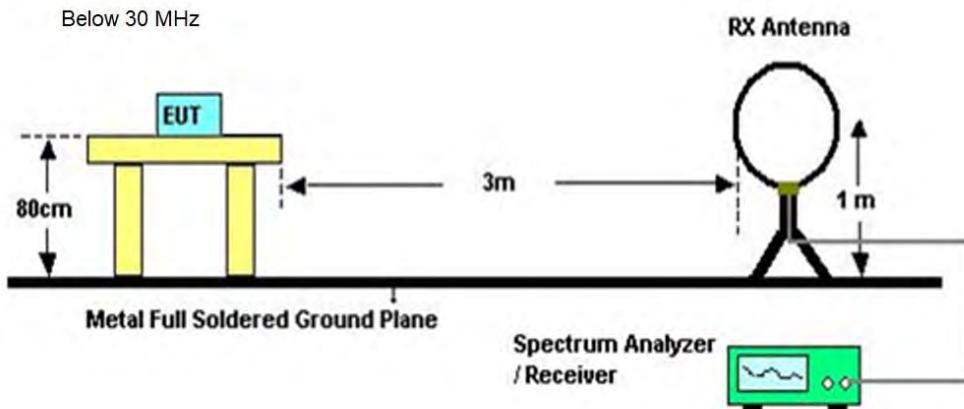

Below 1 GHz and above 30 MHz

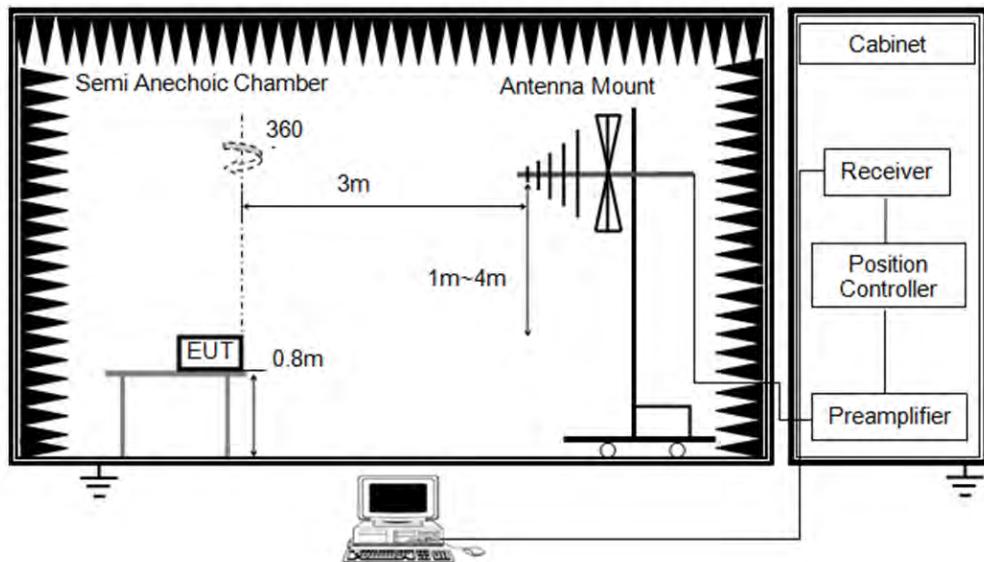

Above 1GHz

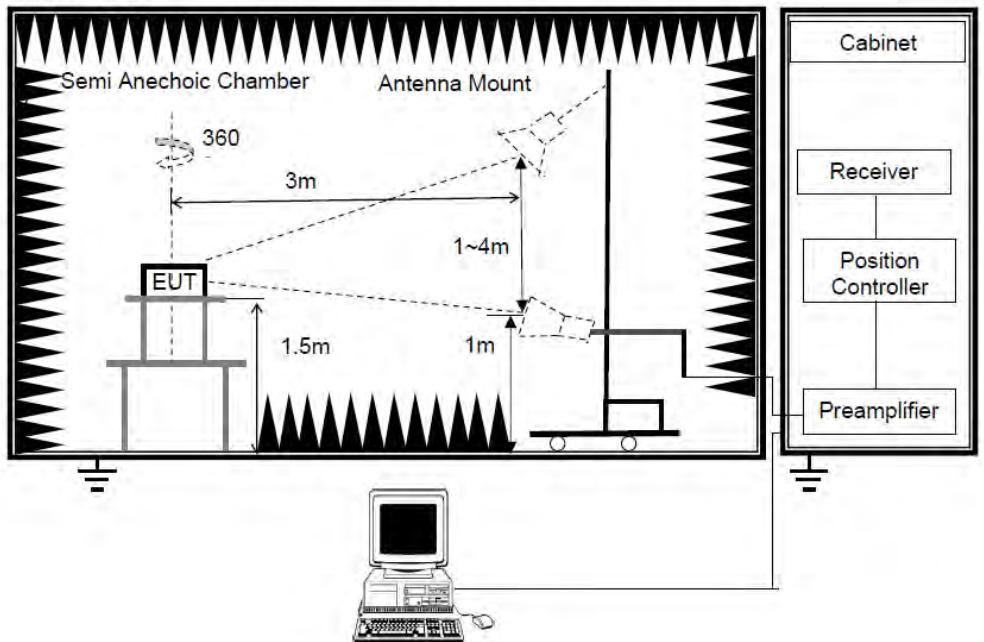

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	54.2%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	July 24, 2025	Test By	Stipe zheng
-----------	---------------	---------	-------------

TEST RESULTS

8.1. RESTRICTED BANEDGE

Test Report

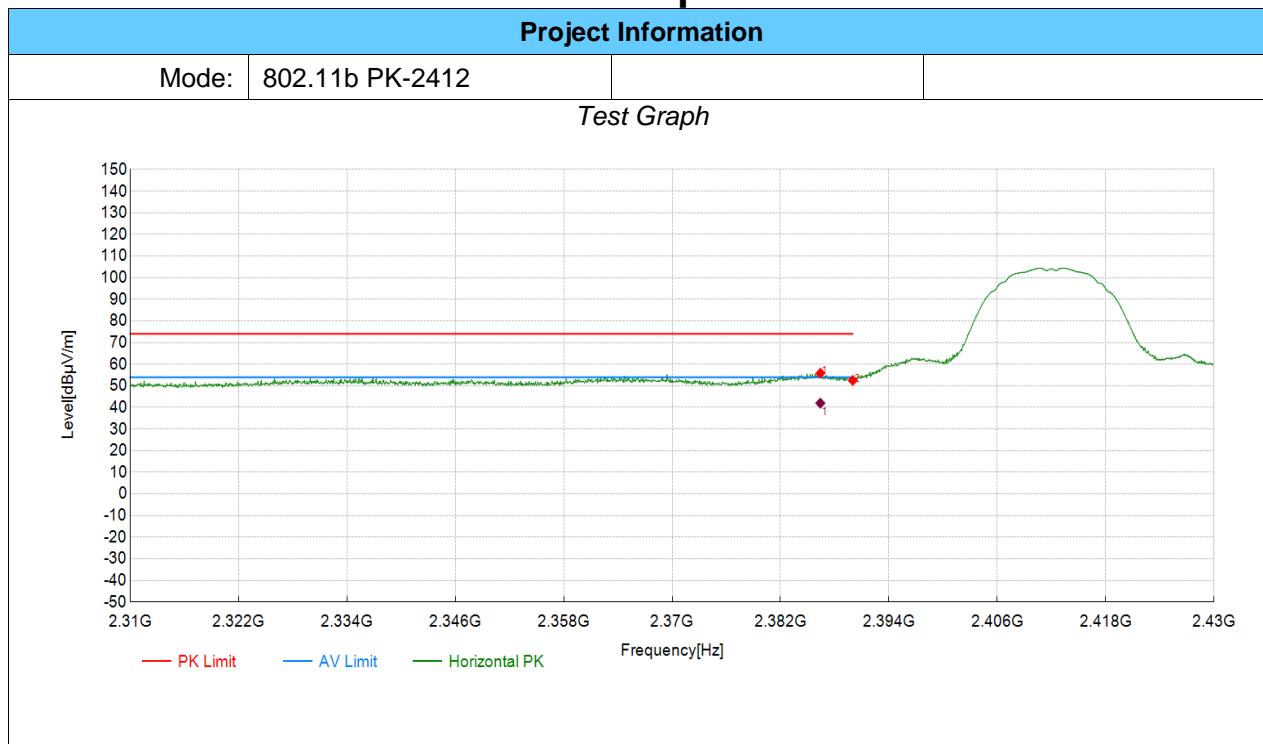

Peak Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2386.42	36.77	55.83	19.06	74.00	18.17	PK	Horizontal	PASS
2	2390.00	33.42	52.50	19.08	74.00	21.50	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	2386.41	19.06	22.92	41.98	54.00	12.02	Horizontal	PASS


Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2412

Test Graph

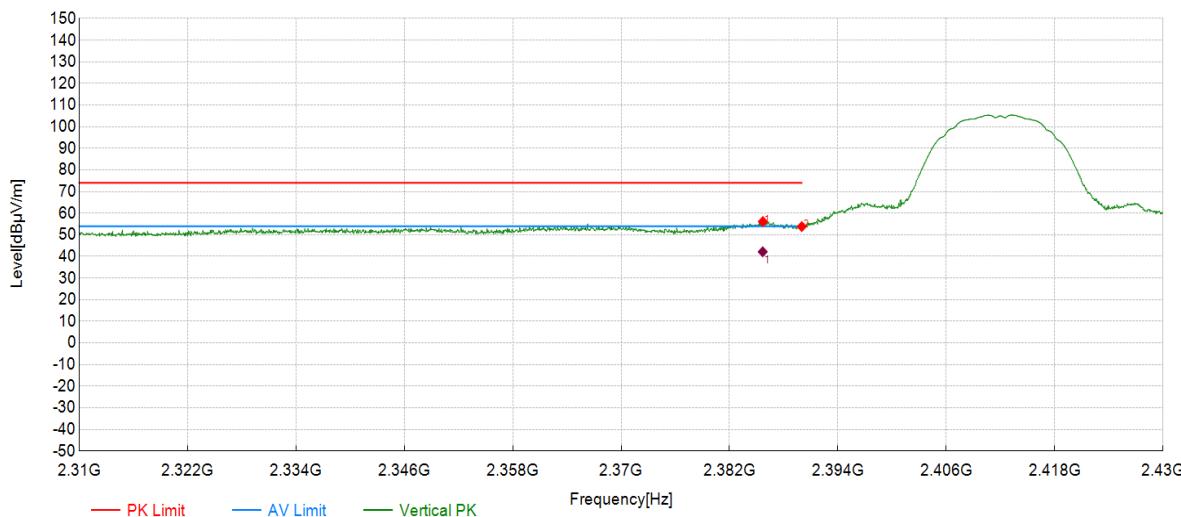

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2385.70	37.05	56.11	19.06	74.00	17.89	PK	Vertical	PASS
2	2390.00	34.72	53.80	19.08	74.00	20.20	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	2385.68	19.06	23.09	42.15	54.00	11.85	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2462

Test Graph

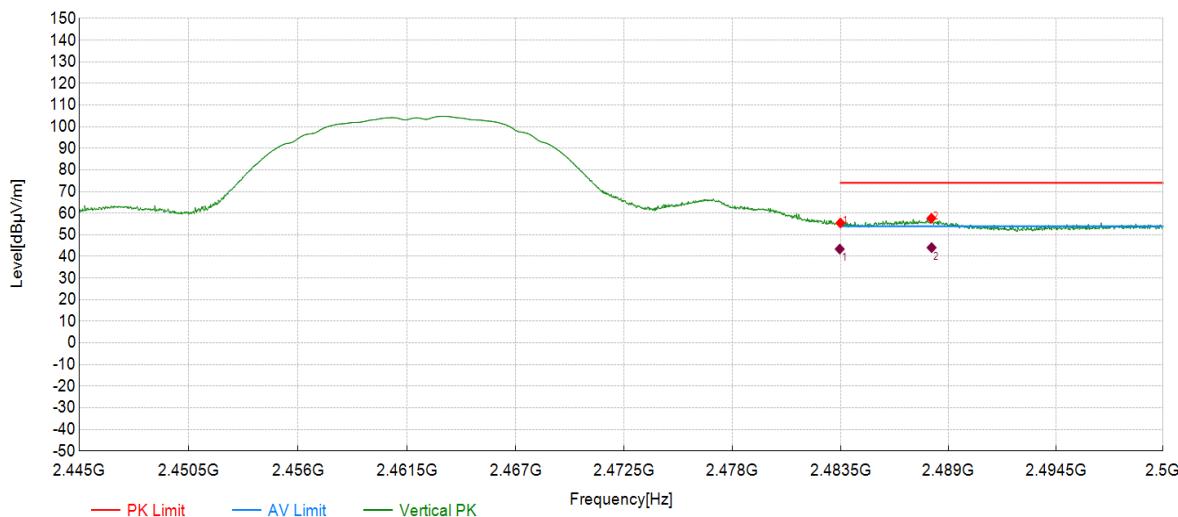

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	35.80	55.48	19.68	74.00	18.52	PK	Vertical	PASS
2	2488.14	37.92	57.63	19.71	74.00	16.37	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	2483.47	19.68	23.72	43.40	54.00	10.60	Vertical	PASS
2	2488.15	19.71	24.36	44.07	54.00	9.93	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2412

Test Graph

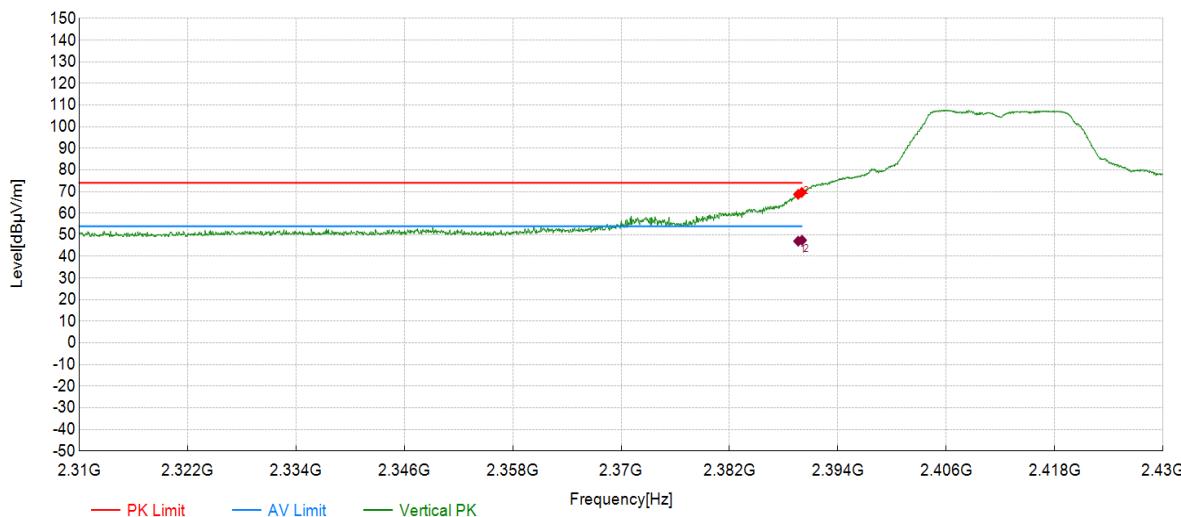

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2389.60	49.62	68.70	19.08	74.00	5.30	PK	Vertical	PASS
2	2390.00	50.51	69.59	19.08	74.00	4.41	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	2389.60	19.08	27.98	47.06	54.00	6.94	Vertical	PASS
2	2390.03	19.08	28.42	47.50	54.00	6.40	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2462

Test Graph

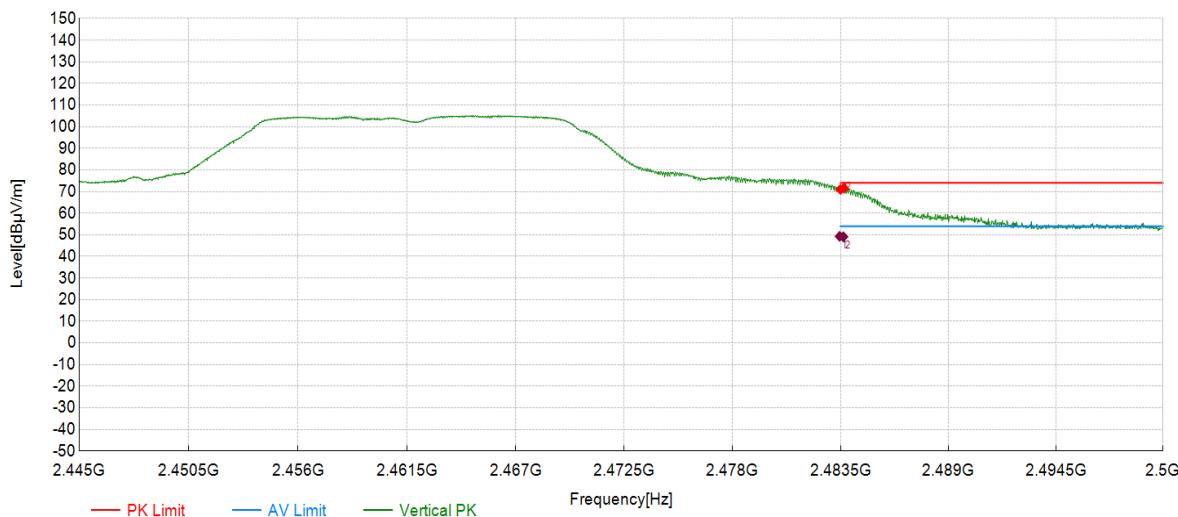

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	51.32	71.00	19.68	74.00	3.00	PK	Vertical	PASS
2	2483.68	51.91	71.59	19.68	74.00	2.41	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	2483.46	19.68	29.62	49.30	54.00	4.70	Vertical	PASS
2	2483.65	19.68	29.42	49.10	54.00	4.90	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2412

Test Graph

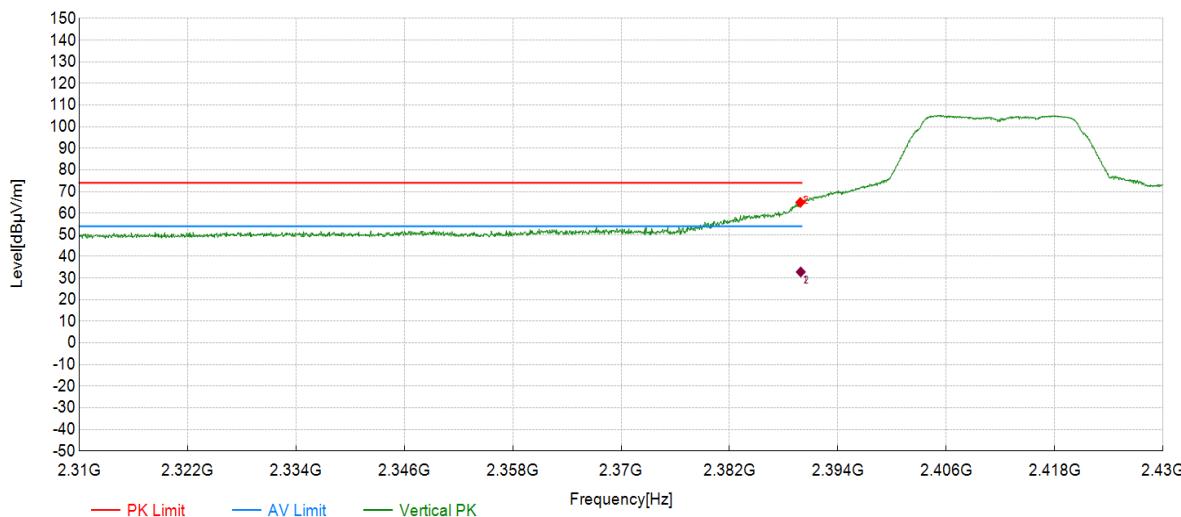

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2389.84	45.90	64.98	19.08	74.00	9.02	PK	Vertical	PASS
2	2390.00	45.90	64.98	19.08	74.00	9.02	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	2389.89	19.08	13.76	32.84	54.00	21.16	Vertical	PASS
2	2389.99	19.08	13.77	32.85	54.00	21.15	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2462

Test Graph

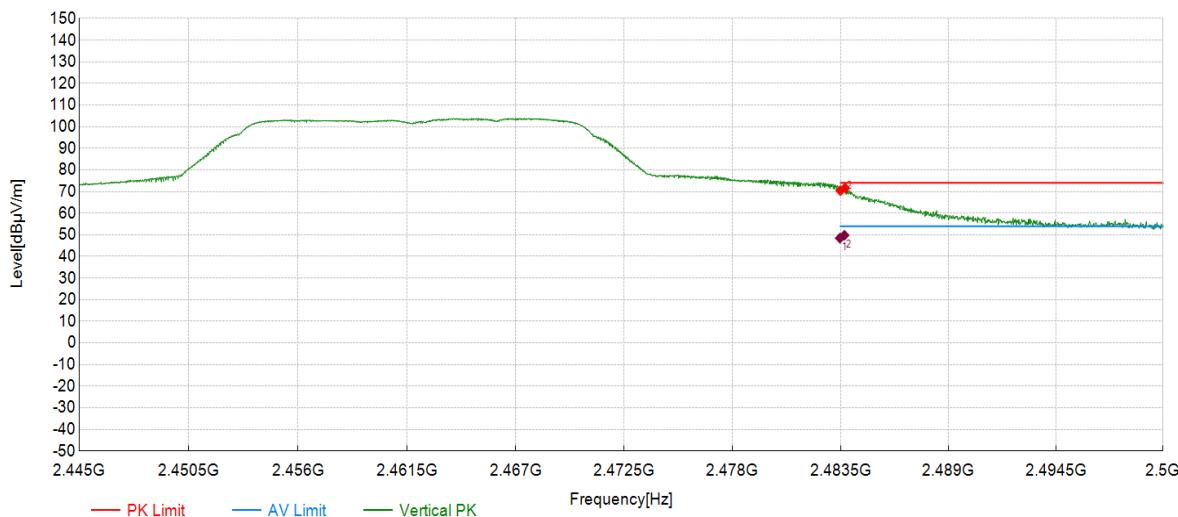

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	50.77	70.45	19.68	74.00	3.55	PK	Vertical	PASS
2	2483.74	51.96	71.64	19.68	74.00	2.36	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	2483.48	19.68	28.78	48.46	54.00	5.54	Vertical	PASS
2	2483.70	19.68	30.12	49.80	54.00	4.20	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ) Test Report

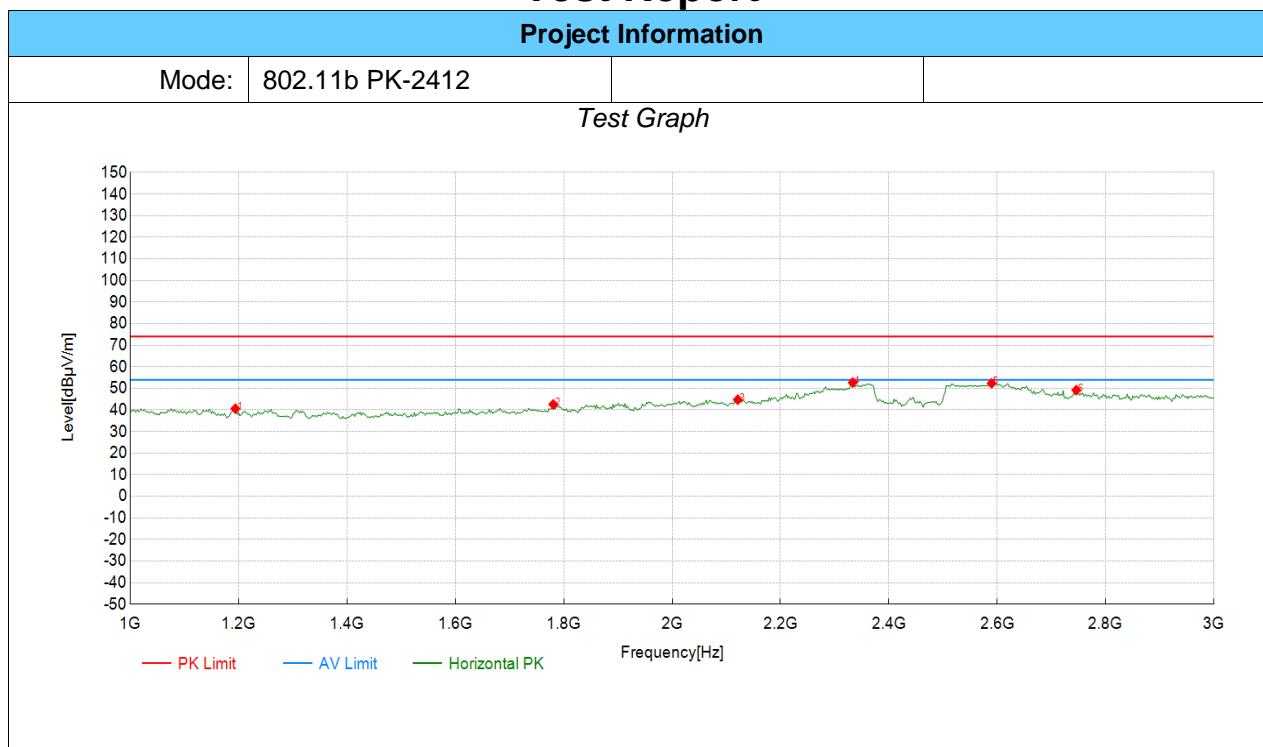

Peak Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1194.19	52.50	40.60	-11.90	74.00	33.40	PK	Horizontal	PASS
2	1780.78	52.59	42.59	-10.00	74.00	31.41	PK	Horizontal	PASS
3	2121.12	51.80	44.77	-7.03	74.00	29.23	PK	Horizontal	PASS
4	2333.33	59.27	52.72	-6.55	74.00	21.28	PK	Horizontal	PASS
5	2589.59	58.39	52.33	-6.06	74.00	21.67	PK	Horizontal	PASS
6	2745.75	54.76	49.18	-5.58	74.00	24.82	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2412

Test Graph

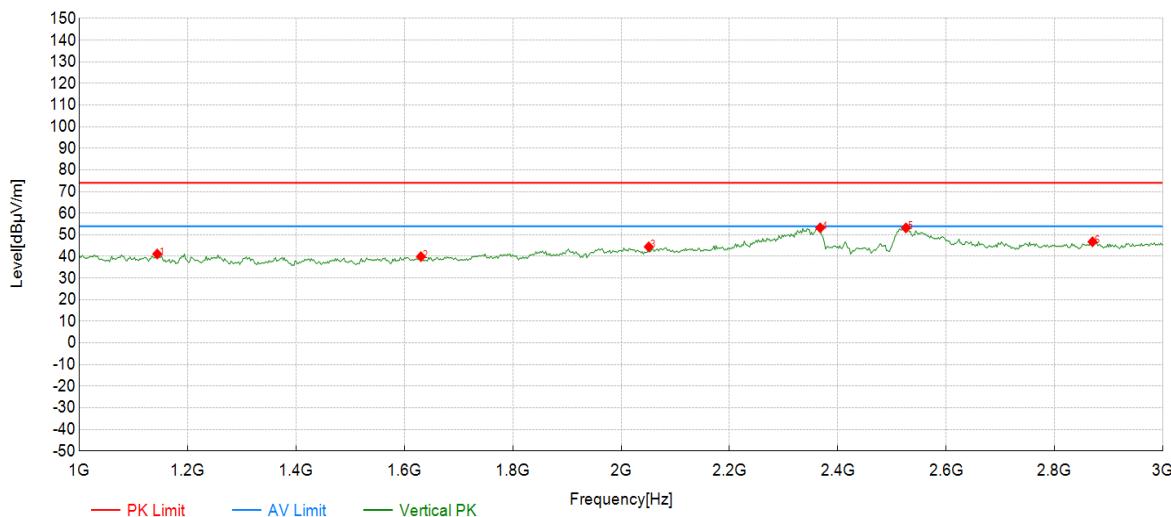

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1144.14	53.03	41.13	-11.90	74.00	32.87	PK	Vertical	PASS
2	1630.63	51.27	39.93	-11.34	74.00	34.07	PK	Vertical	PASS
3	2051.05	51.71	44.46	-7.25	74.00	29.54	PK	Vertical	PASS
4	2367.37	59.75	53.24	-6.51	74.00	21.26	PK	Vertical	PASS
5	2525.53	59.45	53.21	-6.24	74.00	21.29	PK	Vertical	PASS
6	2869.87	52.05	46.78	-5.27	74.00	27.22	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2437

Test Graph

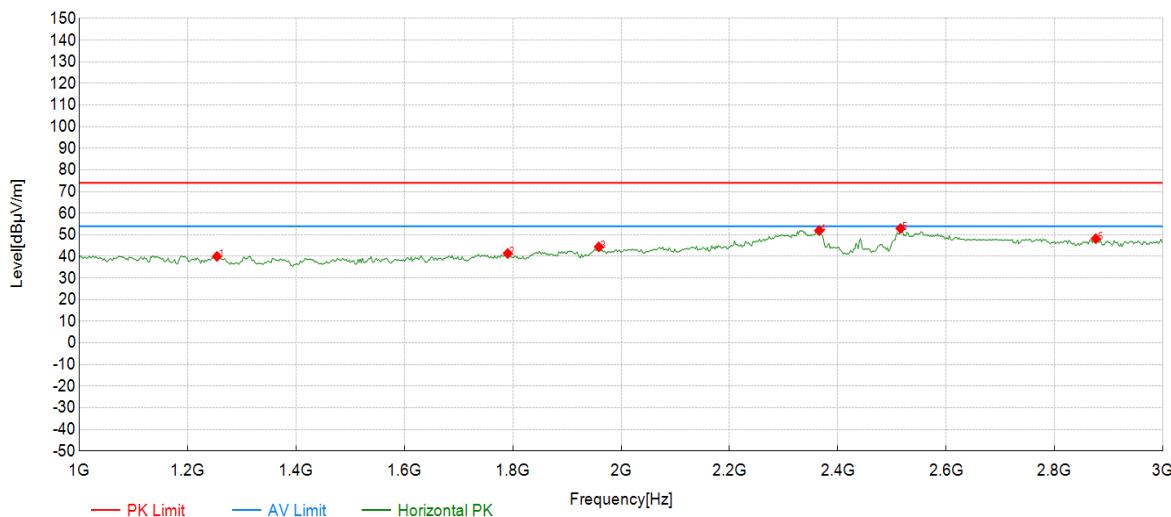

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1254.25	52.03	40.00	-12.03	74.00	34.00	PK	Horizontal	PASS
2	1790.79	51.28	41.38	-9.90	74.00	32.62	PK	Horizontal	PASS
3	1958.96	52.34	44.43	-7.91	74.00	29.57	PK	Horizontal	PASS
4	2365.37	58.47	51.96	-6.51	74.00	22.04	PK	Horizontal	PASS
5	2515.52	59.17	52.89	-6.28	74.00	21.11	PK	Horizontal	PASS
6	2875.88	53.47	48.22	-5.25	74.00	25.78	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2437

Test Graph

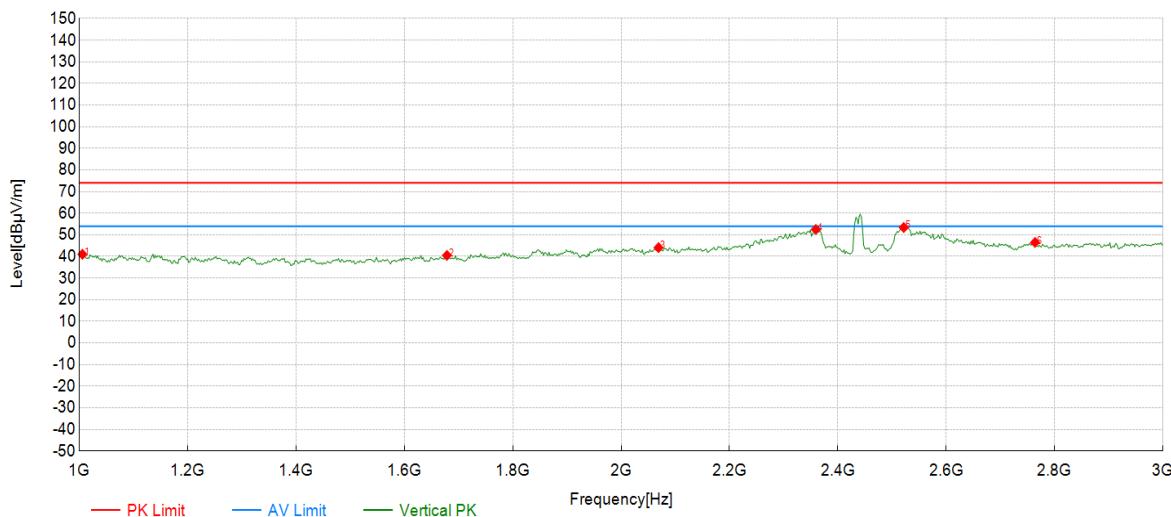

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1006.01	52.90	41.01	-11.89	74.00	32.99	PK	Vertical	PASS
2	1678.68	51.41	40.49	-10.92	74.00	33.51	PK	Vertical	PASS
3	2069.07	51.28	44.09	-7.19	74.00	29.91	PK	Vertical	PASS
4	2359.36	59.01	52.49	-6.52	74.00	21.51	PK	Vertical	PASS
5	2521.52	59.65	53.39	-6.26	74.00	20.61	PK	Vertical	PASS
6	2763.76	51.99	46.46	-5.53	74.00	27.54	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2462

Test Graph

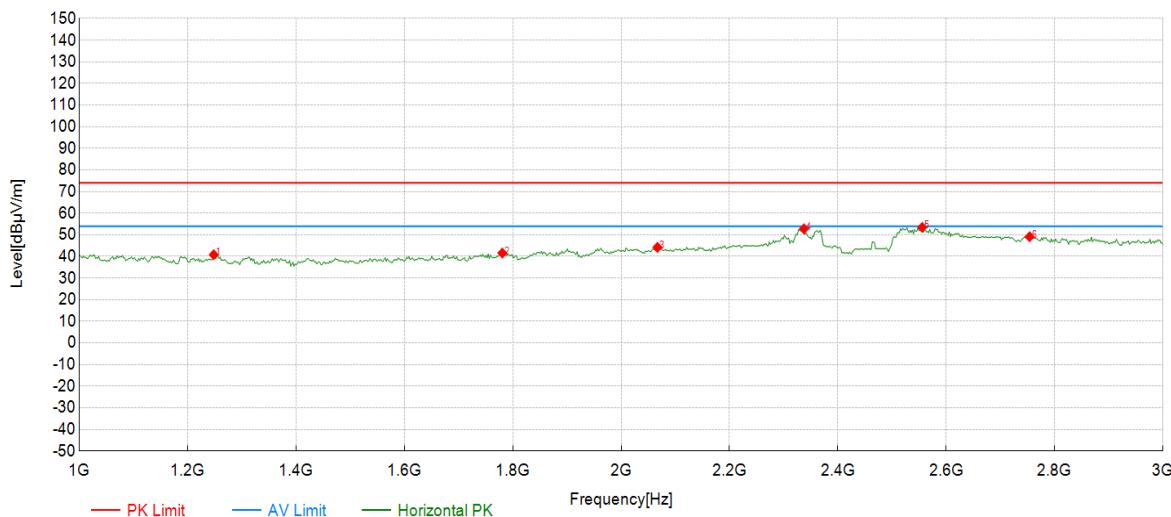

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1248.25	52.82	40.80	-12.02	74.00	33.20	PK	Horizontal	PASS
2	1780.78	51.57	41.57	-10.00	74.00	32.43	PK	Horizontal	PASS
3	2067.07	51.44	44.23	-7.21	74.00	29.77	PK	Horizontal	PASS
4	2337.34	59.33	52.78	-6.55	74.00	21.22	PK	Horizontal	PASS
5	2555.56	59.60	53.45	-6.15	74.00	20.55	PK	Horizontal	PASS
6	2753.75	54.66	49.11	-5.55	74.00	24.89	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2462

Test Graph

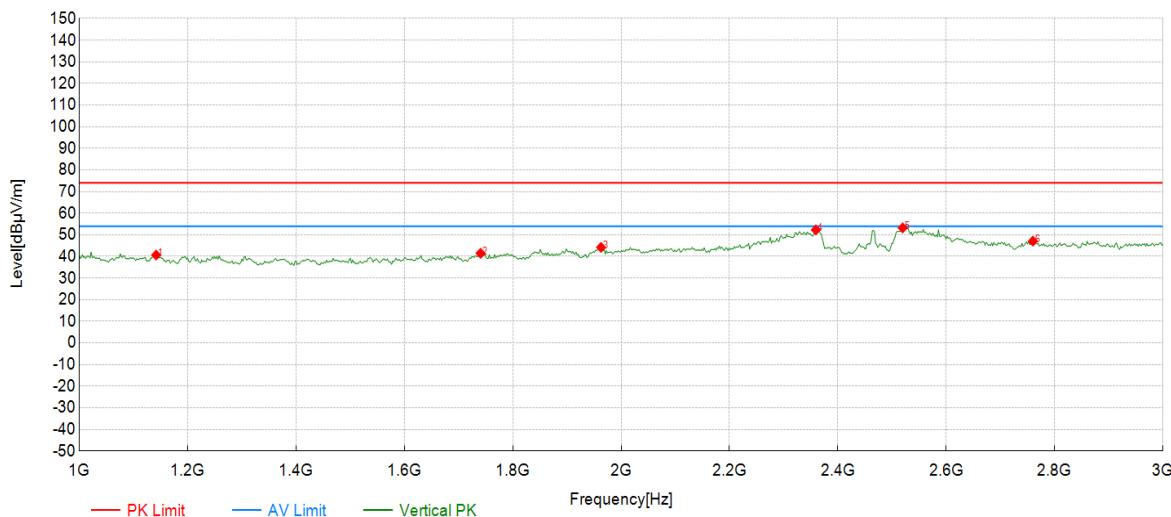


Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1142.14	52.57	40.66	-11.91	74.00	33.34	PK	Vertical	PASS
2	1740.74	51.82	41.46	-10.36	74.00	32.54	PK	Vertical	PASS
3	1962.96	52.05	44.19	-7.86	74.00	29.81	PK	Vertical	PASS
4	2359.36	58.81	52.29	-6.52	74.00	21.71	PK	Vertical	PASS
5	2519.52	59.46	53.20	-6.26	74.00	20.80	PK	Vertical	PASS
6	2759.76	52.60	47.07	-5.53	74.00	26.93	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ) Test Report

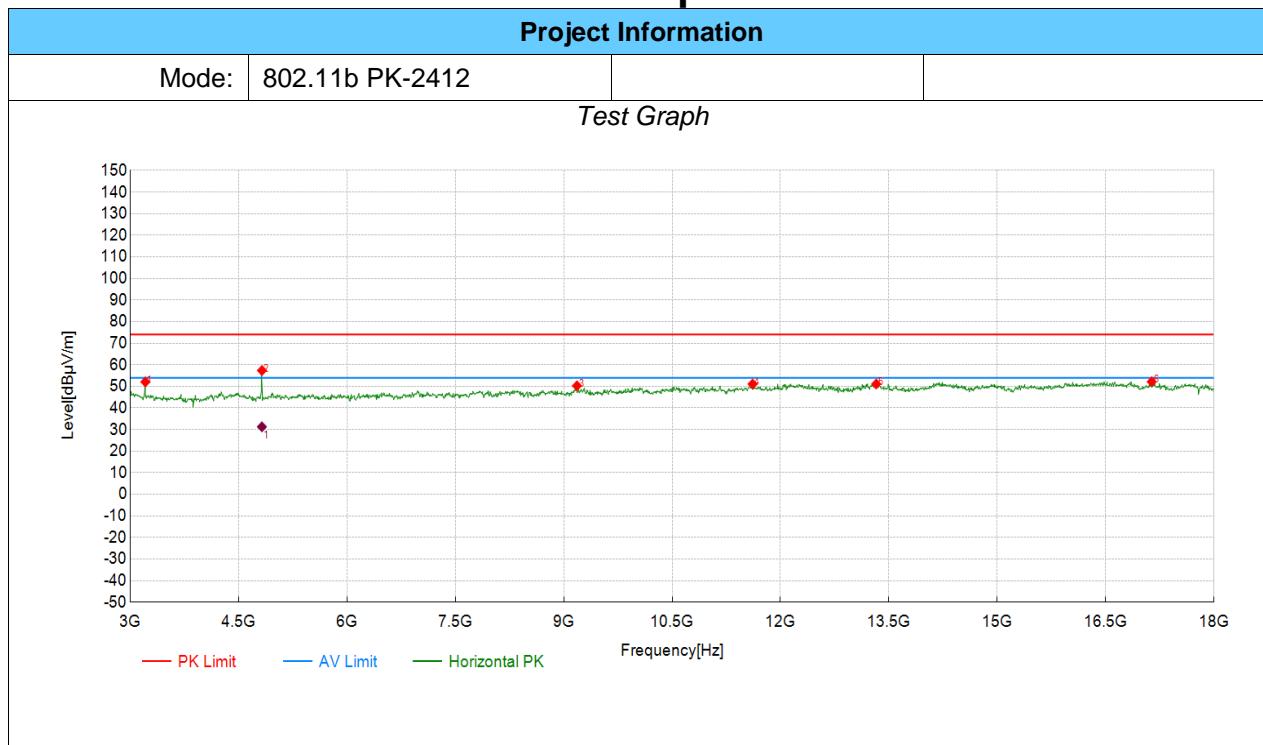

Peak Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3210.11	56.48	52.09	-4.39	74.00	21.91	PK	Horizontal	PASS
2	4823.41	60.60	57.36	-3.24	74.00	16.64	PK	Horizontal	PASS
3	9183.09	46.91	50.28	3.37	74.00	23.72	PK	Horizontal	PASS
4	11614.31	45.30	51.08	5.78	74.00	22.92	PK	Horizontal	PASS
5	13325.16	42.95	51.11	8.16	74.00	22.89	PK	Horizontal	PASS
6	17137.07	40.57	52.15	11.58	74.00	21.85	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	4823.44	-3.24	34.52	31.28	54.00	22.72	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2412

Test Graph

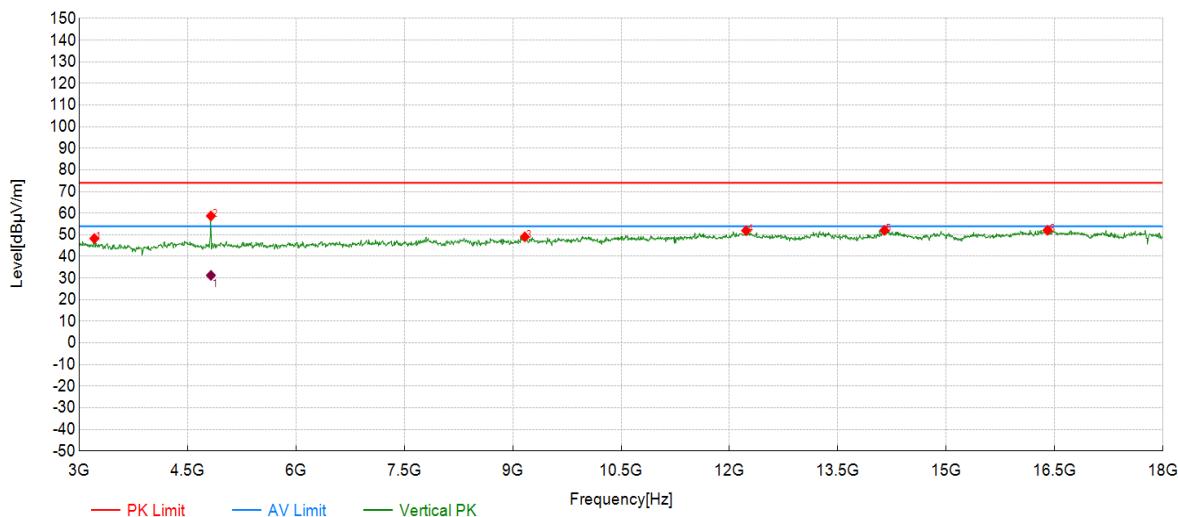

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3210.11	52.67	48.28	-4.39	74.00	25.72	PK	Vertical	PASS
2	4823.41	61.97	58.73	-3.24	74.00	15.27	PK	Vertical	PASS
3	9168.08	45.80	49.08	3.28	74.00	24.92	PK	Vertical	PASS
4	12229.61	45.37	51.93	6.56	74.00	22.07	PK	Vertical	PASS
5	14143.07	43.45	52.07	8.62	74.00	21.93	PK	Vertical	PASS
6	16401.70	42.12	52.11	9.99	74.00	21.89	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	4823.44	-3.24	34.49	31.25	54.00	22.75	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2437

Test Graph

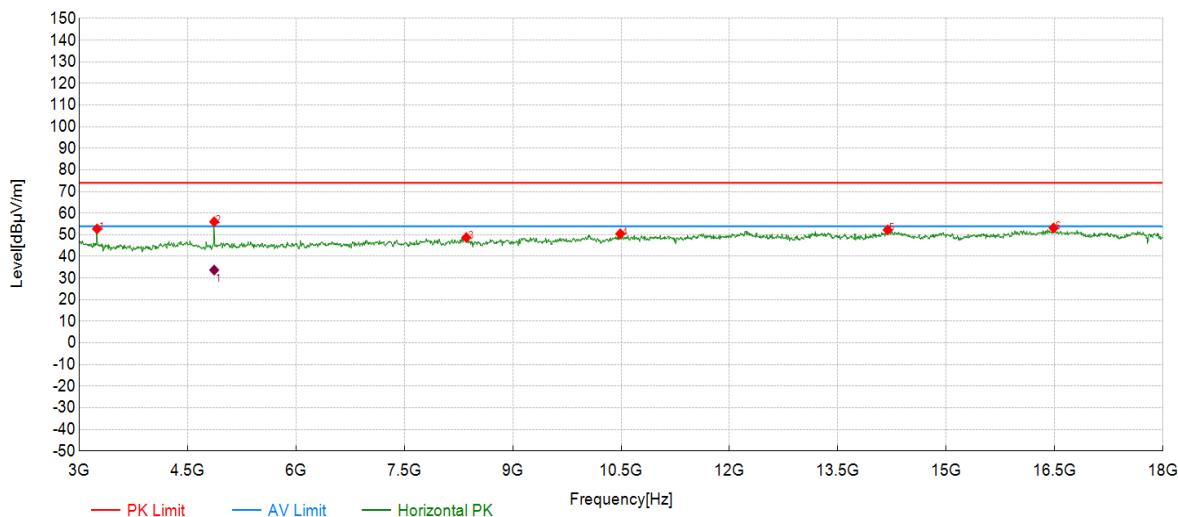

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3247.62	57.17	52.71	-4.46	74.00	21.29	PK	Horizontal	PASS
2	4868.43	59.04	56.04	-3.00	74.00	17.96	PK	Horizontal	PASS
3	8357.68	45.15	48.76	3.61	74.00	25.24	PK	Horizontal	PASS
4	10488.74	45.91	50.46	4.55	74.00	23.54	PK	Horizontal	PASS
5	14188.09	43.42	52.27	8.85	74.00	21.73	PK	Horizontal	PASS
6	16484.24	42.87	53.16	10.29	74.00	20.84	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	4868.43	-3.00	36.71	33.71	54.00	20.29	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2437

Test Graph

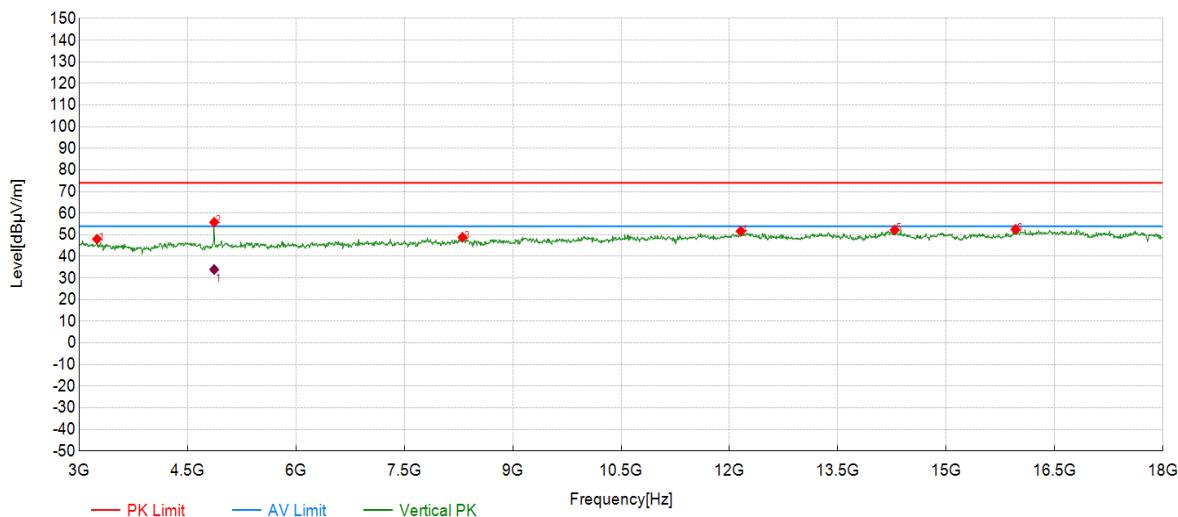

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3247.62	52.48	48.02	-4.46	74.00	25.98	PK	Vertical	PASS
2	4868.43	58.80	55.80	-3.00	74.00	18.20	PK	Vertical	PASS
3	8305.15	45.66	48.88	3.22	74.00	25.12	PK	Vertical	PASS
4	12154.58	45.11	51.66	6.55	74.00	22.34	PK	Vertical	PASS
5	14285.64	43.68	52.25	8.57	74.00	21.75	PK	Vertical	PASS
6	15958.98	43.20	52.52	9.32	74.00	21.48	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	4868.42	-3.00	36.96	33.96	54.00	20.04	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2462

Test Graph

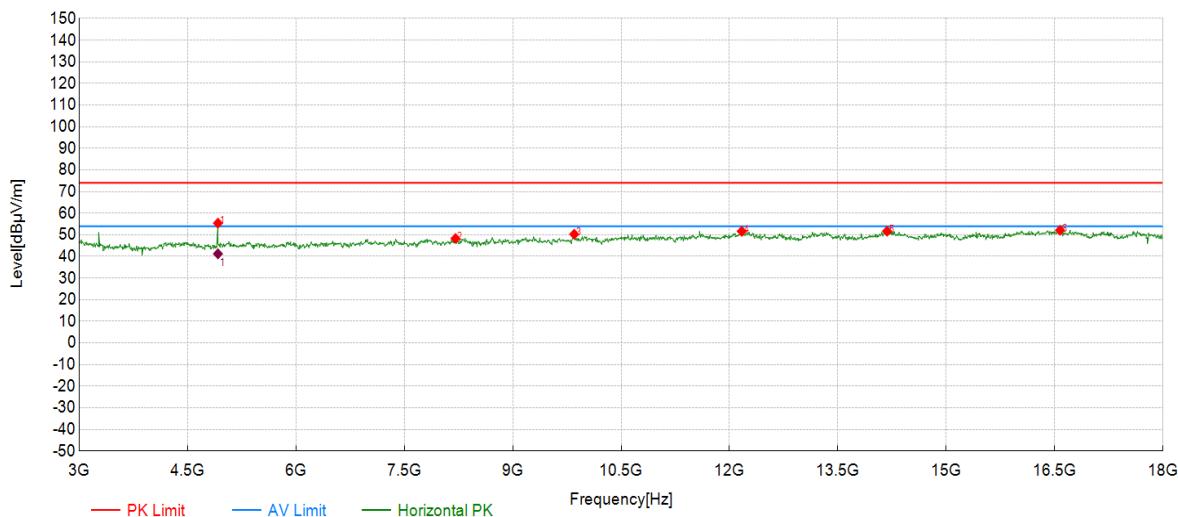

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	4920.96	58.13	55.40	-2.73	74.00	18.60	PK	Horizontal	PASS
2	8207.60	45.80	48.30	2.50	74.00	25.70	PK	Horizontal	PASS
3	9850.93	46.77	50.28	3.51	74.00	23.72	PK	Horizontal	PASS
4	12169.58	45.04	51.63	6.59	74.00	22.37	PK	Horizontal	PASS
5	14180.59	42.86	51.67	8.81	74.00	22.33	PK	Horizontal	PASS
6	16574.29	41.51	52.12	10.61	74.00	21.88	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	4920.92	-2.73	43.94	41.21	54.00	12.79	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b PK-2462

Test Graph

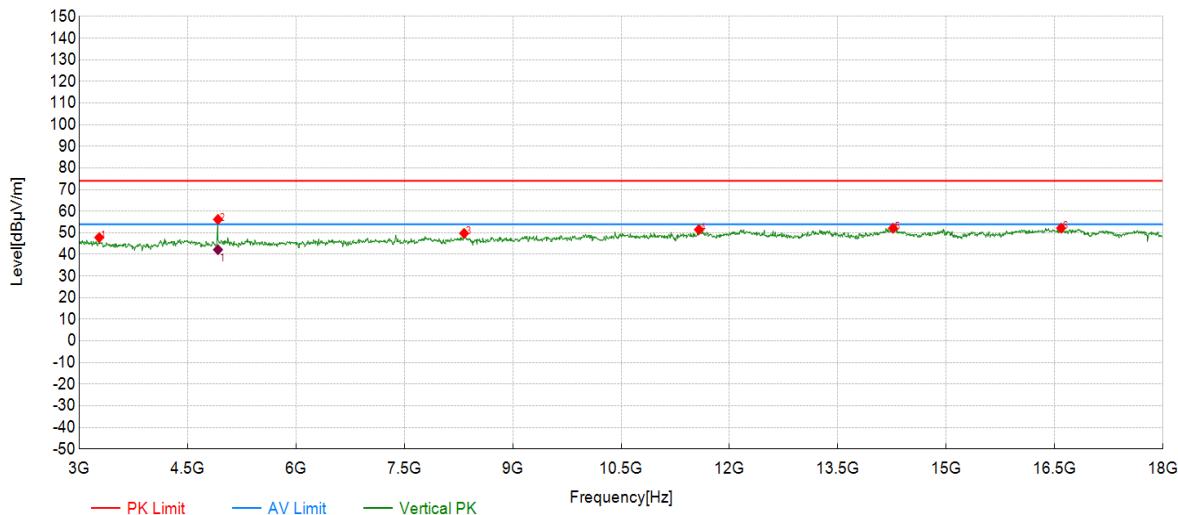

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3277.64	52.35	47.84	-4.51	74.00	26.16	PK	Vertical	PASS
2	4920.96	58.92	56.19	-2.73	74.00	17.81	PK	Vertical	PASS
3	8327.66	46.38	49.76	3.38	74.00	24.24	PK	Vertical	PASS
4	11576.79	45.73	51.46	5.73	74.00	22.54	PK	Vertical	PASS
5	14263.13	43.48	52.12	8.64	74.00	21.88	PK	Vertical	PASS
6	16589.29	41.53	52.18	10.65	74.00	21.82	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	4920.99	-2.73	44.92	42.19	54.00	11.81	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2412

Test Graph

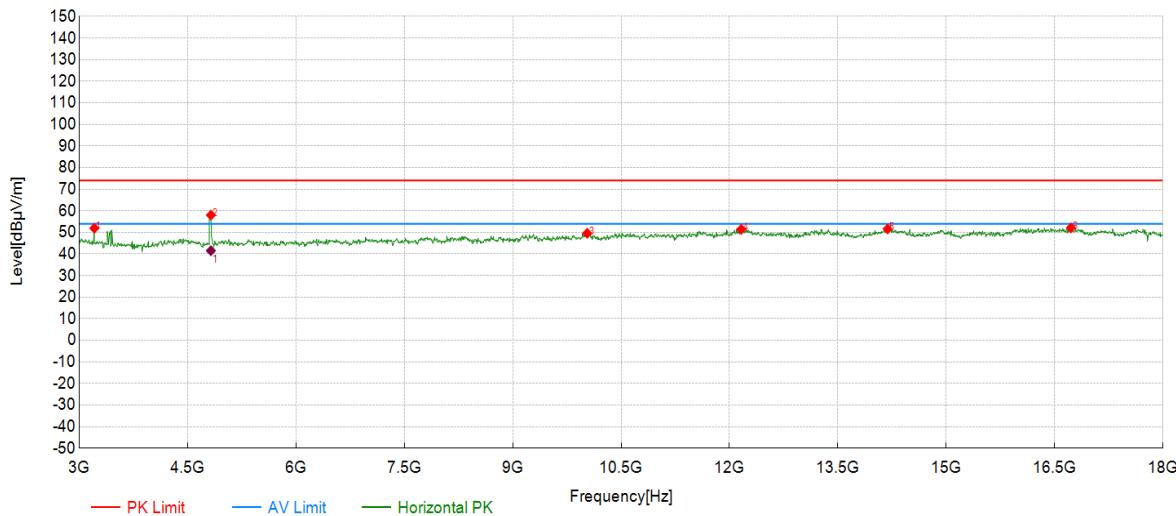

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3210.11	56.34	51.95	-4.39	74.00	22.05	PK	Horizontal	PASS
2	4823.41	61.27	58.03	-3.24	74.00	15.97	PK	Horizontal	PASS
3	10031.02	45.20	49.58	4.38	74.00	24.42	PK	Horizontal	PASS
4	12162.08	44.83	51.40	6.57	74.00	22.60	PK	Horizontal	PASS
5	14188.09	42.74	51.59	8.85	74.00	22.41	PK	Horizontal	PASS
6	16724.36	41.49	52.08	10.59	74.00	21.92	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	4823.44	-3.24	44.75	41.51	54.00	12.49	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2412

Test Graph

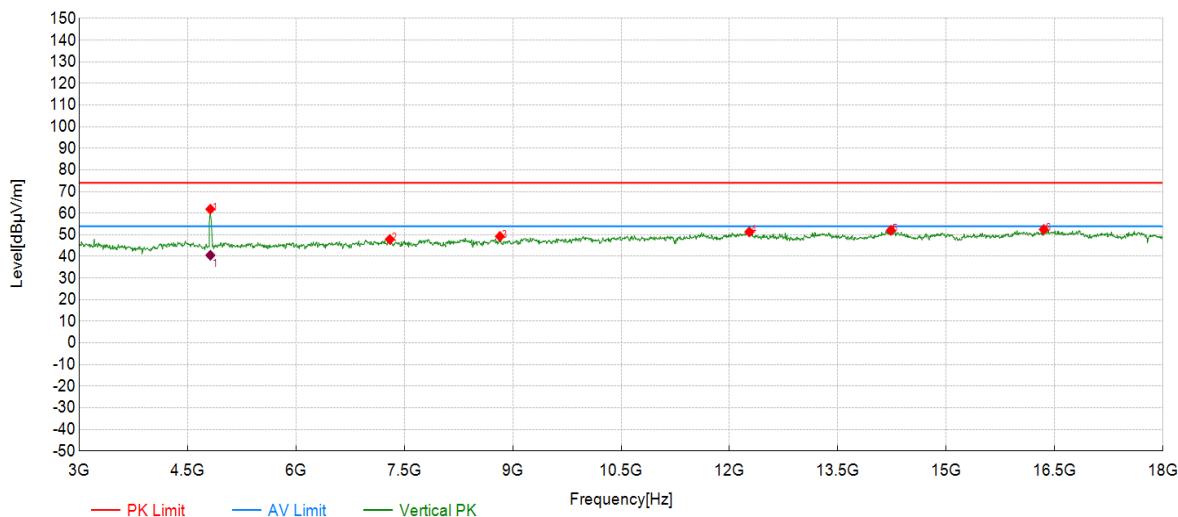

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	4815.91	65.15	61.87	-3.28	74.00	12.13	PK	Vertical	PASS
2	7299.65	46.63	47.88	1.25	74.00	26.12	PK	Vertical	PASS
3	8822.91	46.14	49.25	3.11	74.00	24.75	PK	Vertical	PASS
4	12274.64	44.94	51.35	6.41	74.00	22.65	PK	Vertical	PASS
5	14233.12	43.29	52.06	8.77	74.00	21.94	PK	Vertical	PASS
6	16349.17	42.64	52.45	9.81	74.00	21.55	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	4815.94	-3.28	43.83	40.55	54.00	13.45	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2437

Test Graph

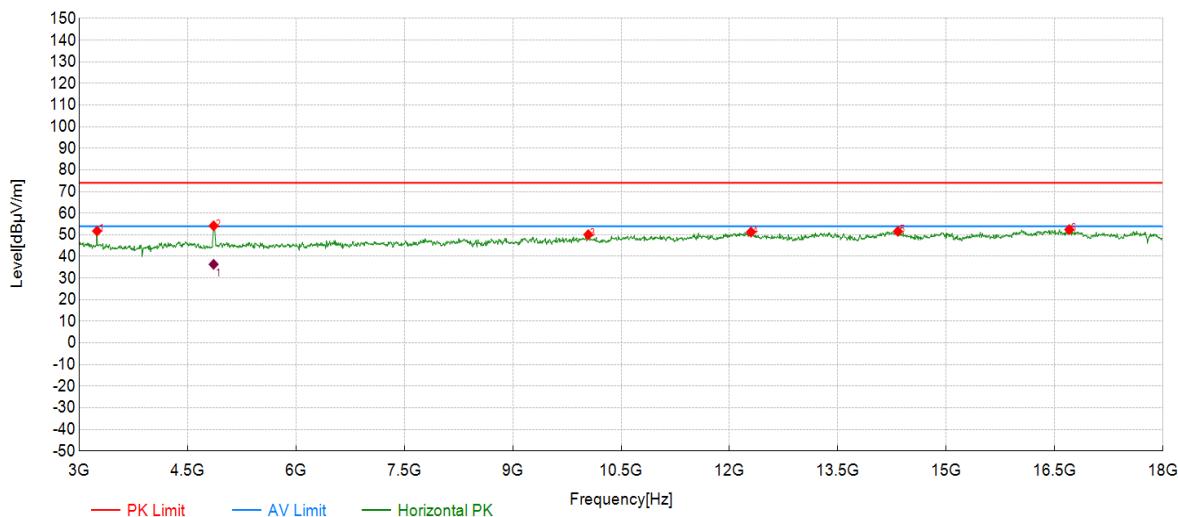

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3247.62	56.20	51.74	-4.46	74.00	22.26	PK	Horizontal	PASS
2	4860.93	57.20	54.17	-3.03	74.00	19.83	PK	Horizontal	PASS
3	10046.02	45.77	50.08	4.31	74.00	23.92	PK	Horizontal	PASS
4	12297.15	44.91	51.25	6.34	74.00	22.75	PK	Horizontal	PASS
5	14330.67	43.20	51.59	8.39	74.00	22.41	PK	Horizontal	PASS
6	16701.85	41.81	52.42	10.61	74.00	21.58	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	4860.96	-3.03	39.38	36.35	54.00	17.65	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2437

Test Graph

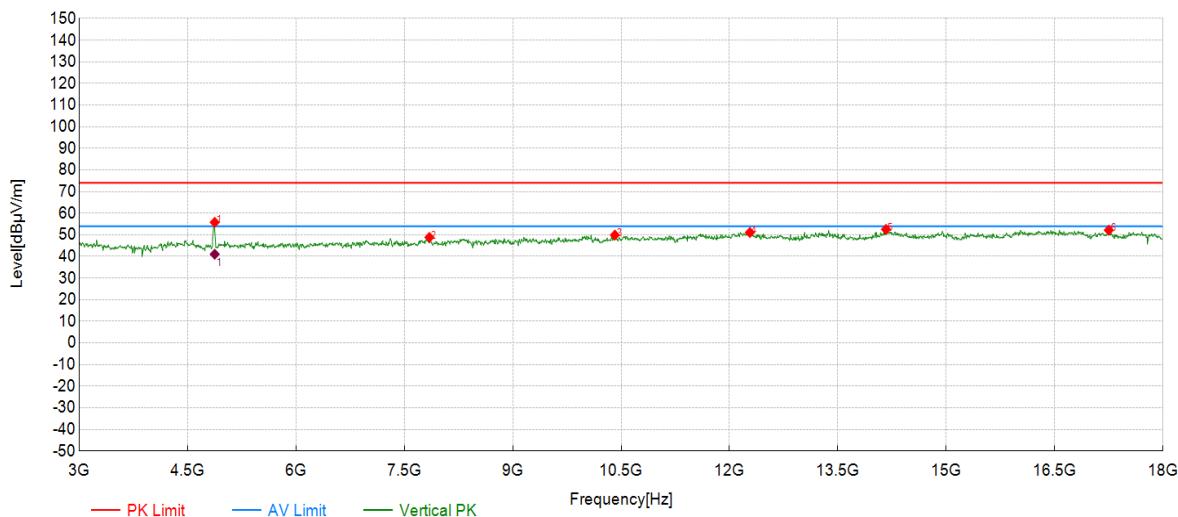

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	4875.94	58.76	55.80	-2.96	74.00	18.20	PK	Vertical	PASS
2	7847.42	46.76	48.83	2.07	74.00	25.17	PK	Vertical	PASS
3	10413.71	45.22	49.89	4.67	74.00	24.11	PK	Vertical	PASS
4	12282.14	44.68	51.08	6.40	74.00	22.92	PK	Vertical	PASS
5	14165.58	43.80	52.53	8.73	74.00	21.47	PK	Vertical	PASS
6	17249.62	40.70	52.16	11.46	74.00	21.84	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	4875.93	-2.96	43.99	41.03	54.00	12.97	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2462

Test Graph

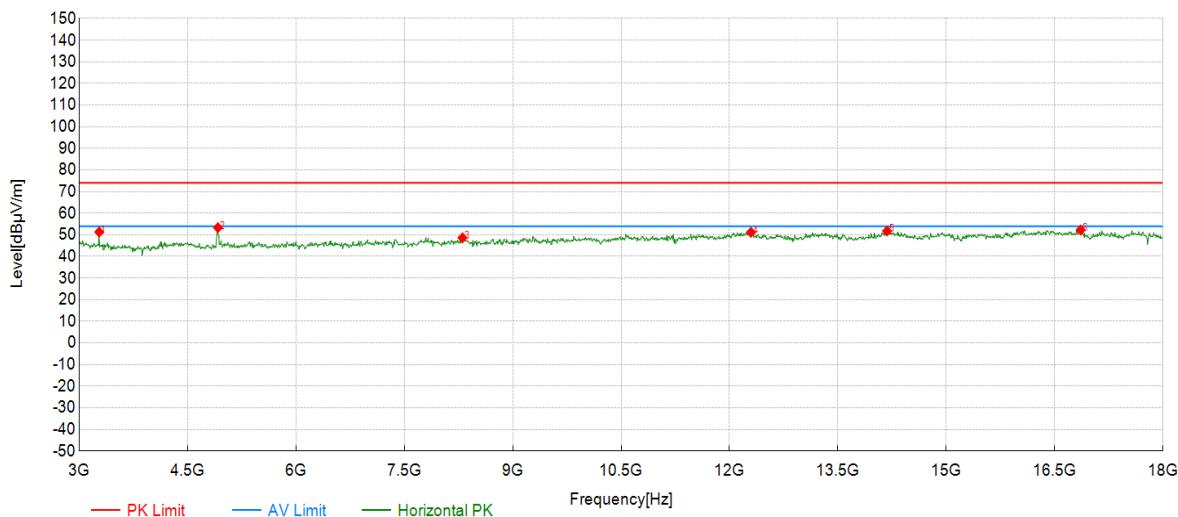

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3277.64	55.83	51.32	-4.51	74.00	22.68	PK	Horizontal	PASS
2	4920.96	56.06	53.33	-2.73	74.00	20.67	PK	Horizontal	PASS
3	8305.15	45.42	48.64	3.22	74.00	25.36	PK	Horizontal	PASS
4	12297.15	44.80	51.14	6.34	74.00	22.86	PK	Horizontal	PASS
5	14180.59	42.95	51.76	8.81	74.00	22.24	PK	Horizontal	PASS
6	16859.43	41.49	52.24	10.75	74.00	21.76	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11g PK-2462

Test Graph

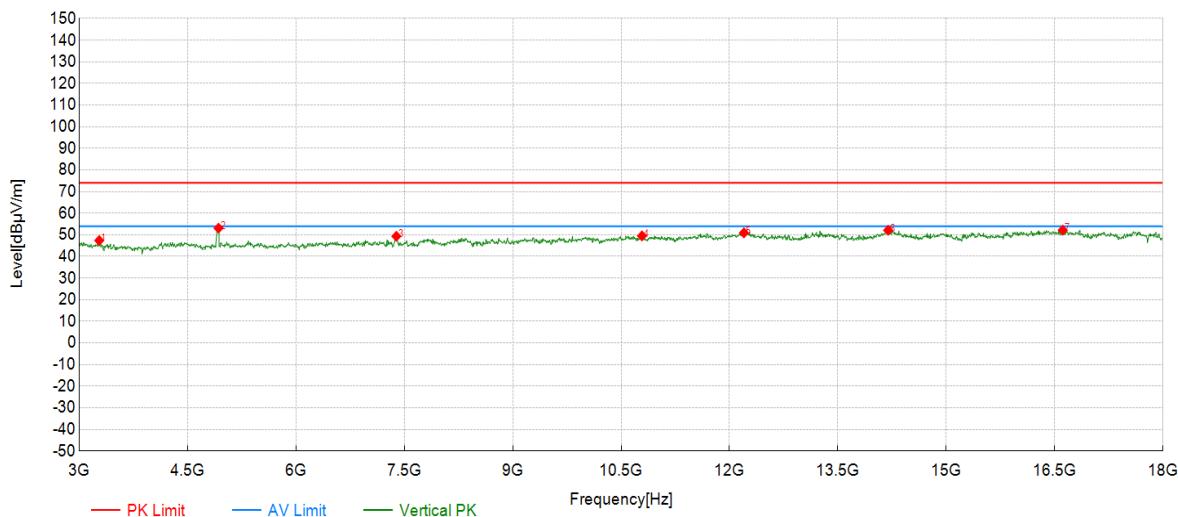

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3277.64	51.89	47.38	-4.51	74.00	26.62	PK	Vertical	PASS
2	4928.46	55.78	53.09	-2.69	74.00	20.91	PK	Vertical	PASS
3	7389.69	47.95	49.33	1.38	74.00	24.67	PK	Vertical	PASS
4	10788.89	45.23	49.50	4.27	74.00	24.50	PK	Vertical	PASS
5	12199.60	44.23	50.89	6.66	74.00	23.11	PK	Vertical	PASS
6	14195.60	43.24	52.12	8.88	74.00	21.88	PK	Vertical	PASS
7	16611.81	41.47	52.15	10.68	74.00	21.85	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2412

Test Graph

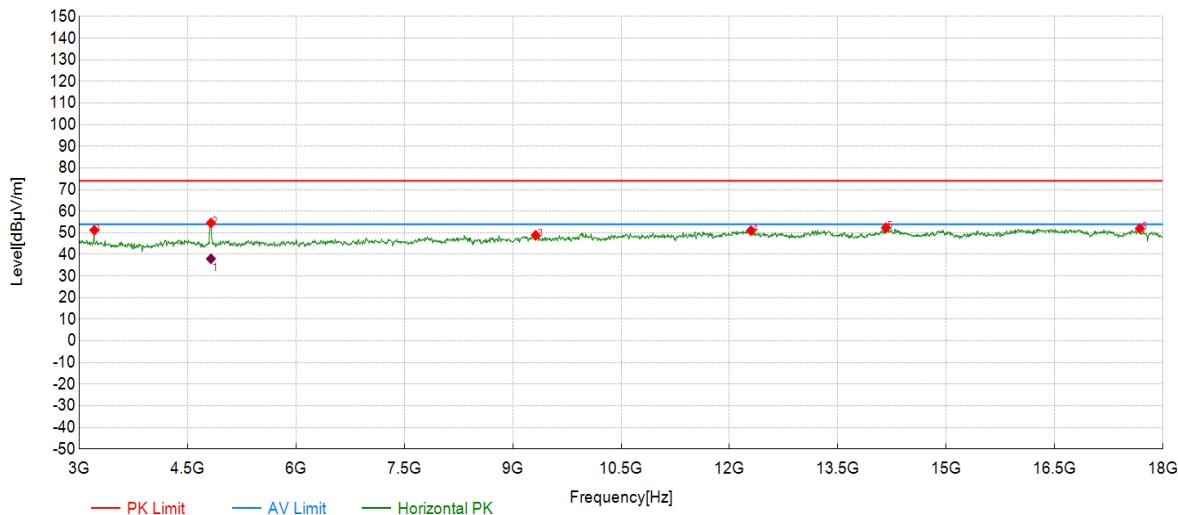

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	3210.11	55.60	51.21	-4.39	74.00	22.79	PK	Horizontal	PASS
2	4823.41	57.77	54.53	-3.24	74.00	19.47	PK	Horizontal	PASS
3	9318.16	45.17	48.87	3.70	74.00	25.13	PK	Horizontal	PASS
4	12297.15	44.69	51.03	6.34	74.00	22.97	PK	Horizontal	PASS
5	14165.58	43.61	52.34	8.73	74.00	21.66	PK	Horizontal	PASS
6	17677.34	39.57	51.95	12.38	74.00	22.05	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	4823.40	-3.24	41.23	37.99	54.00	16.01	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2412

Test Graph

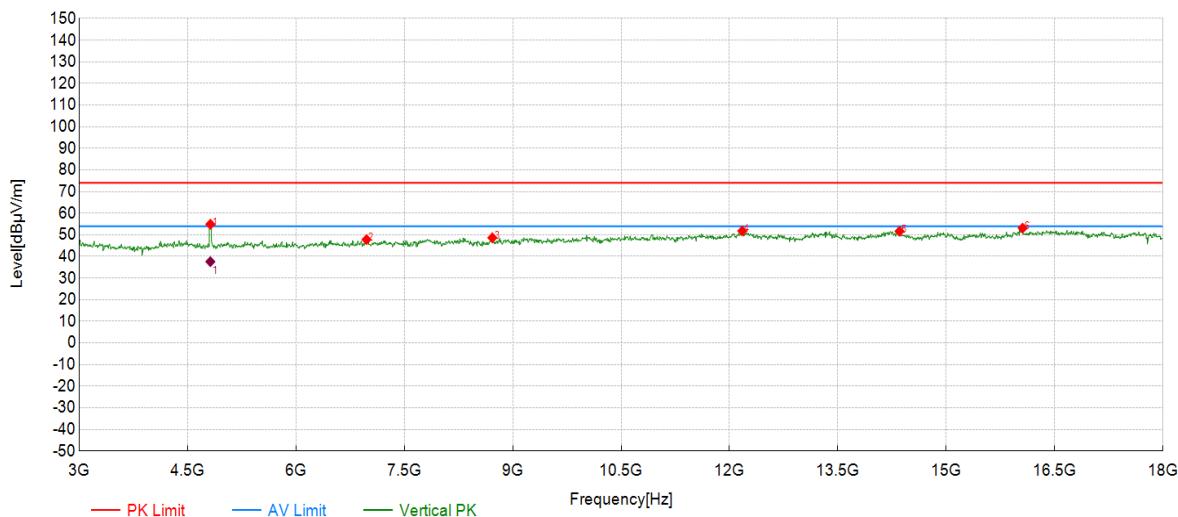

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4815.91	58.18	54.90	-3.28	74.00	19.10	PK	Vertical	PASS
2	6976.99	46.53	47.80	1.27	74.00	26.20	PK	Vertical	PASS
3	8717.86	45.72	48.63	2.91	74.00	25.37	PK	Vertical	PASS
4	12177.09	45.18	51.79	6.61	74.00	22.21	PK	Vertical	PASS
5	14353.18	43.36	51.65	8.29	74.00	22.35	PK	Vertical	PASS
6	16056.53	43.49	53.08	9.59	74.00	20.92	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	4815.90	-3.28	40.86	37.58	54.00	16.42	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2437

Test Graph

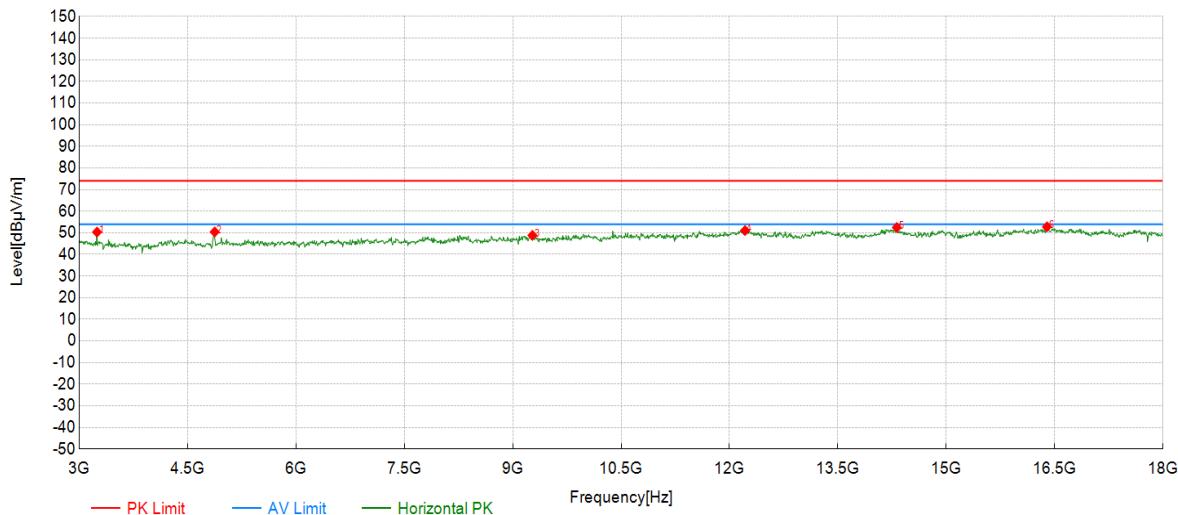

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3247.62	54.80	50.34	-4.46	74.00	23.66	PK	Horizontal	PASS
2	4875.94	53.37	50.41	-2.96	74.00	23.59	PK	Horizontal	PASS
3	9273.14	45.25	48.85	3.60	74.00	25.15	PK	Horizontal	PASS
4	12214.61	44.44	51.05	6.61	74.00	22.95	PK	Horizontal	PASS
5	14315.66	44.04	52.48	8.44	74.00	21.52	PK	Horizontal	PASS
6	16394.20	42.83	52.79	9.96	74.00	21.21	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2437

Test Graph

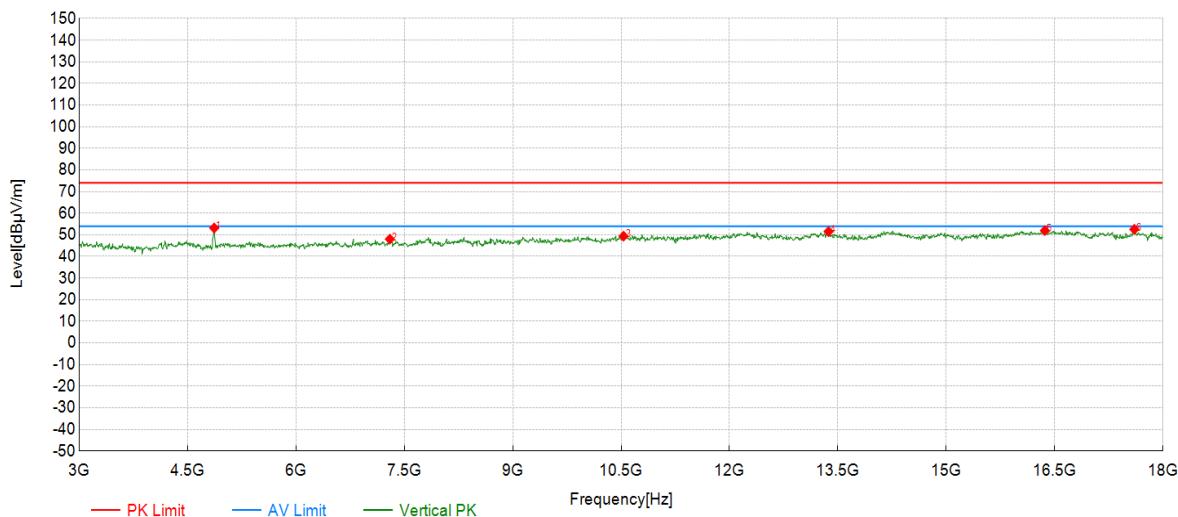

Peak Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4868.43	56.15	53.15	-3.00	74.00	20.85	PK	Vertical	PASS
2	7299.65	46.77	48.02	1.25	74.00	25.98	PK	Vertical	PASS
3	10533.77	44.91	49.39	4.48	74.00	24.61	PK	Vertical	PASS
4	13370.19	43.42	51.51	8.09	74.00	22.49	PK	Vertical	PASS
5	16364.18	42.11	51.97	9.86	74.00	22.03	PK	Vertical	PASS
6	17602.30	40.06	52.55	12.49	74.00	21.45	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2462

Test Graph

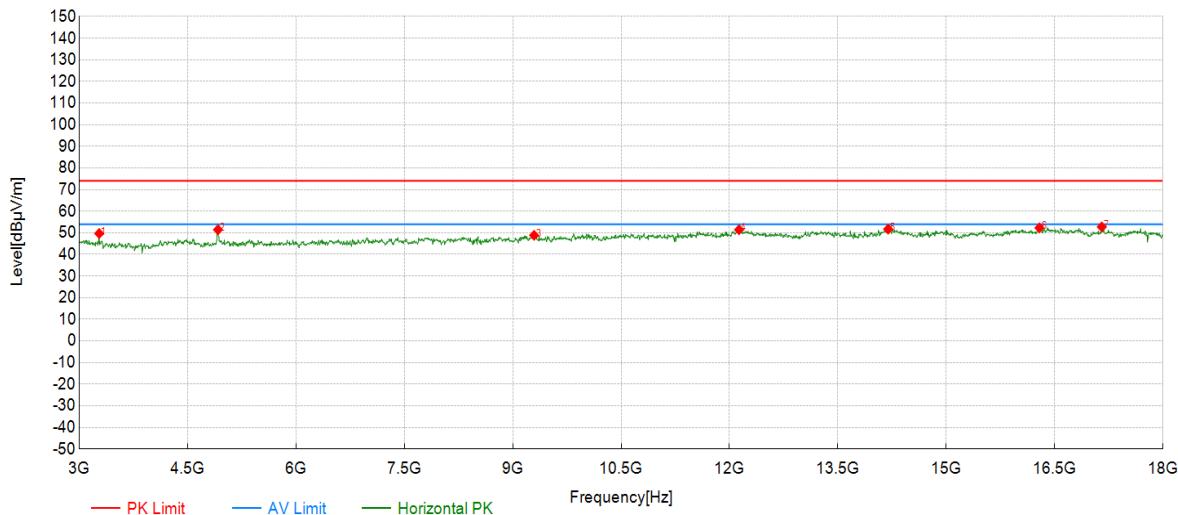

Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3277.64	54.19	49.68	-4.51	74.00	24.32	PK	Horizontal	PASS
2	4920.96	54.16	51.43	-2.73	74.00	22.57	PK	Horizontal	PASS
3	9295.65	45.19	48.84	3.65	74.00	25.16	PK	Horizontal	PASS
4	12132.07	44.93	51.43	6.50	74.00	22.57	PK	Horizontal	PASS
5	14195.60	42.82	51.70	8.88	74.00	22.30	PK	Horizontal	PASS
6	16289.14	42.71	52.31	9.60	74.00	21.69	PK	Horizontal	PASS
7	17152.08	41.13	52.74	11.61	74.00	21.26	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11n20 PK-2462

Test Graph

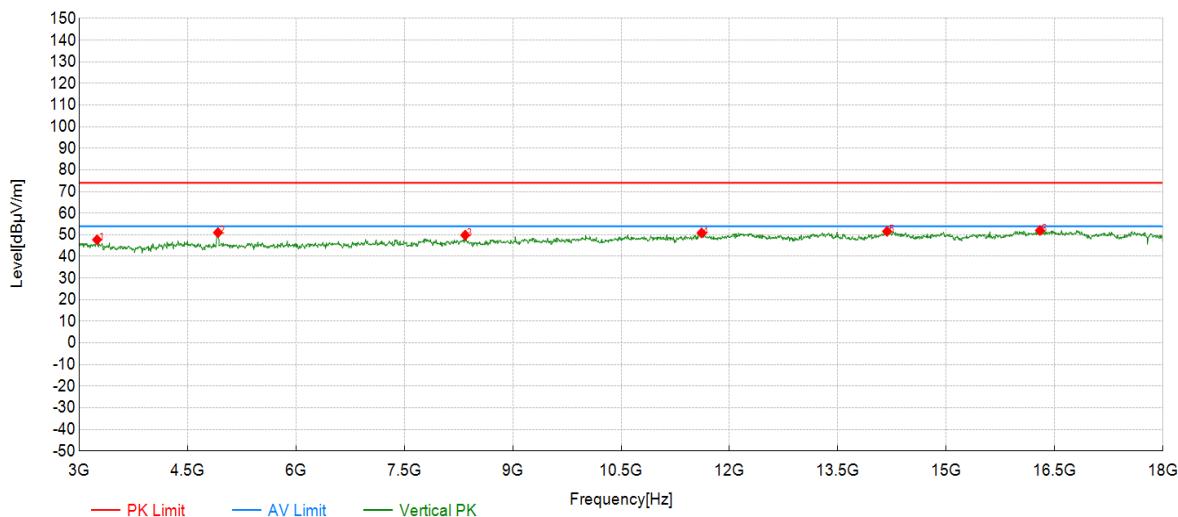


Peak Data List

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	3247.62	52.19	47.73	-4.46	74.00	26.27	PK	Vertical	PASS
2	4920.96	53.75	51.02	-2.73	74.00	22.98	PK	Vertical	PASS
3	8342.67	46.36	49.86	3.50	74.00	24.14	PK	Vertical	PASS
4	11614.31	45.09	50.87	5.78	74.00	23.13	PK	Vertical	PASS
5	14180.59	42.79	51.60	8.81	74.00	22.40	PK	Vertical	PASS
6	16296.65	42.36	51.99	9.63	74.00	22.01	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

8.4. SPURIOUS EMISSIONS(18 GHZ~26 GHZ) Test Report

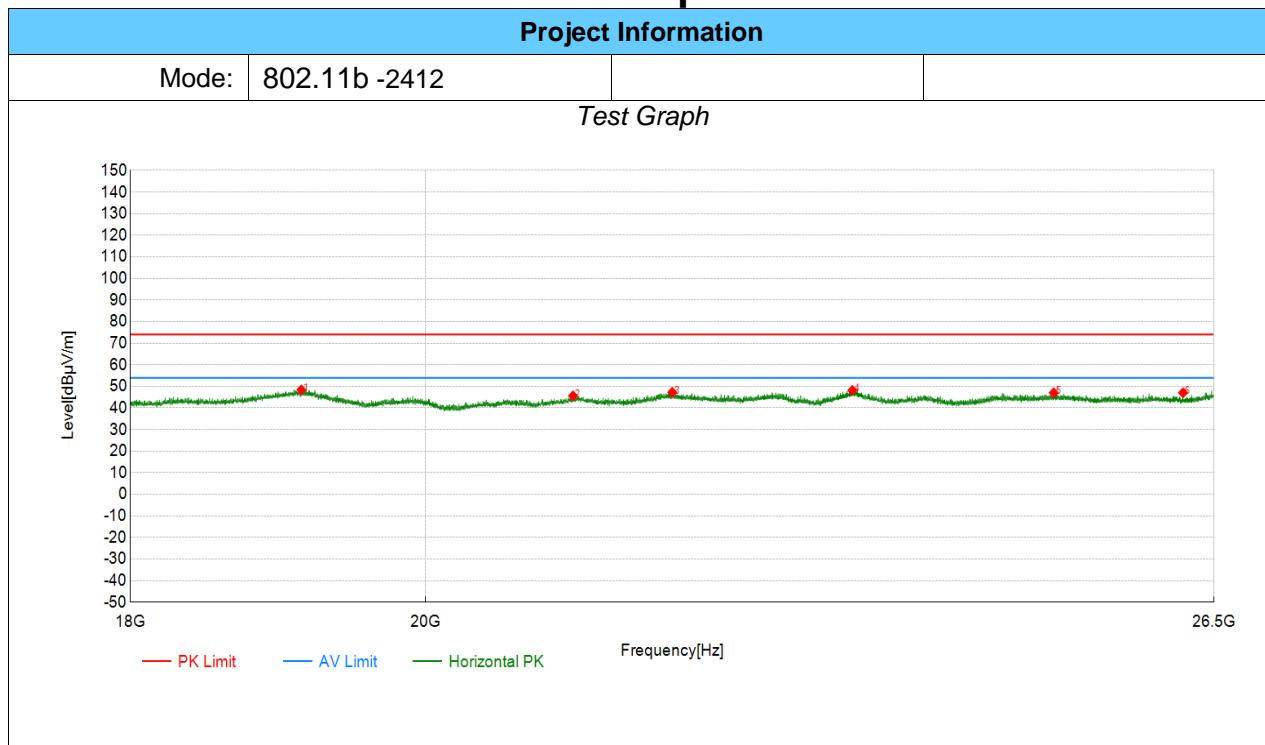

Peak Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	19133.90	52.92	48.37	-4.55	74.00	25.63	PK	Horizontal	PASS
2	21082.10	51.42	45.59	-5.83	74.00	28.41	PK	Horizontal	PASS
3	21841.15	53.21	47.24	-5.97	74.00	26.76	PK	Horizontal	PASS
4	23291.25	52.81	48.12	-4.69	74.00	25.88	PK	Horizontal	PASS
5	25026.10	50.40	47.03	-3.37	74.00	26.97	PK	Horizontal	PASS
6	26208.45	50.49	47.04	-3.45	74.00	26.96	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Mode: 802.11b -2412

Test Graph

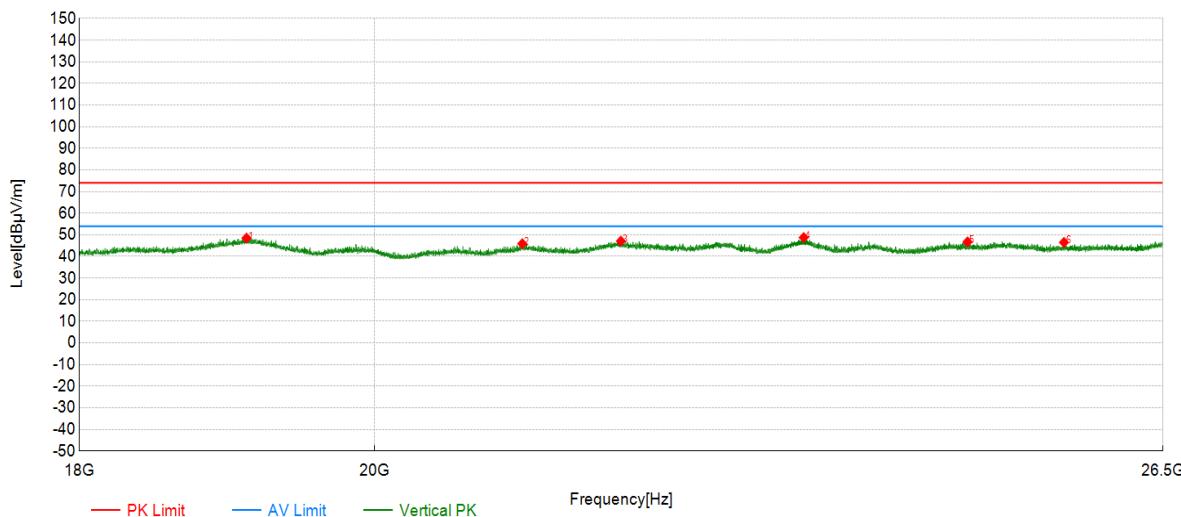

Peak Data List


NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	19107.55	52.94	48.49	-4.45	74.00	25.51	PK	Vertical	PASS
2	21083.80	51.71	45.89	-5.82	74.00	28.11	PK	Vertical	PASS
3	21838.60	53.05	47.10	-5.95	74.00	26.90	PK	Vertical	PASS
4	23310.80	53.41	48.73	-4.68	74.00	25.27	PK	Vertical	PASS
5	24714.15	50.34	46.73	-3.61	74.00	27.27	PK	Vertical	PASS
6	25579.45	50.48	46.48	-4.00	74.00	27.52	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


8.5. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

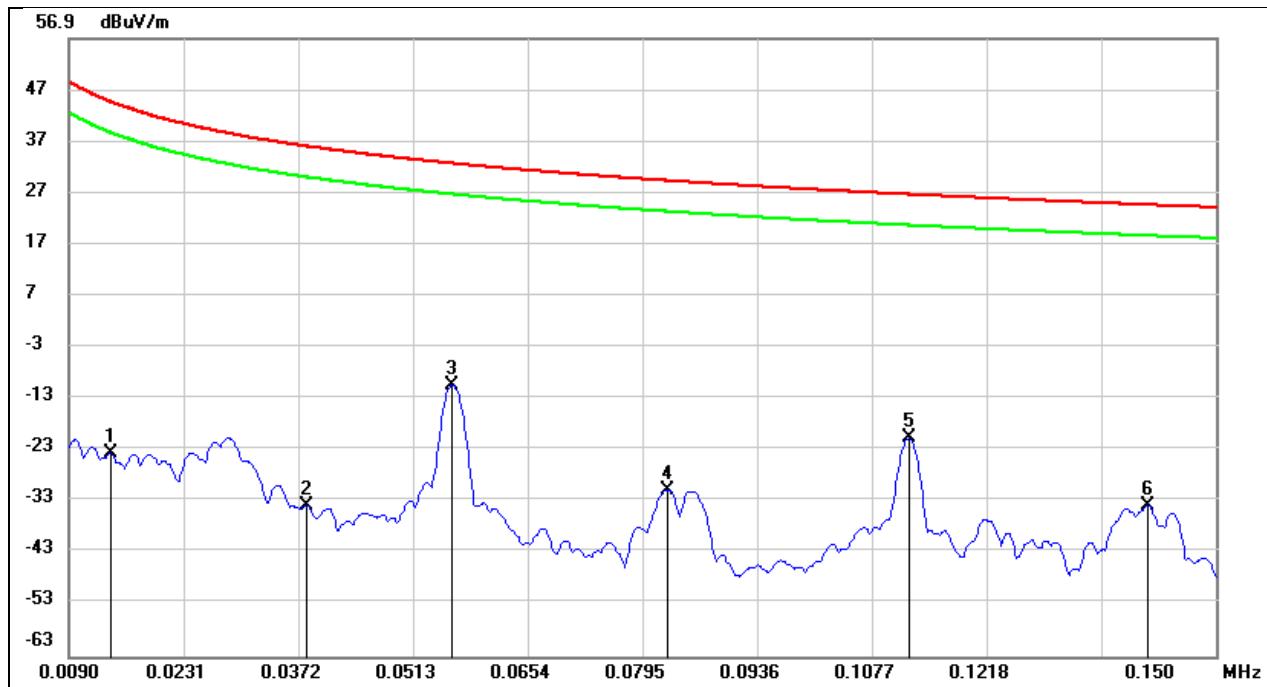


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0141	66.28	-89.91	-23.63	44.62	-75.13	-6.88	-68.25	peak
2	0.0382	57.49	-91.29	-33.80	35.96	-85.30	-15.54	-69.76	peak
3	0.0561	81.62	-91.97	-10.35	32.62	-61.85	-18.88	-42.97	peak
4	0.0826	61.87	-92.60	-30.73	29.26	-82.23	-22.24	-59.99	peak
5	0.1122	71.76	-92.52	-20.76	26.61	-72.26	-24.89	-47.37	peak
6	0.1417	58.59	-92.33	-33.74	24.57	-85.24	-26.93	-58.31	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

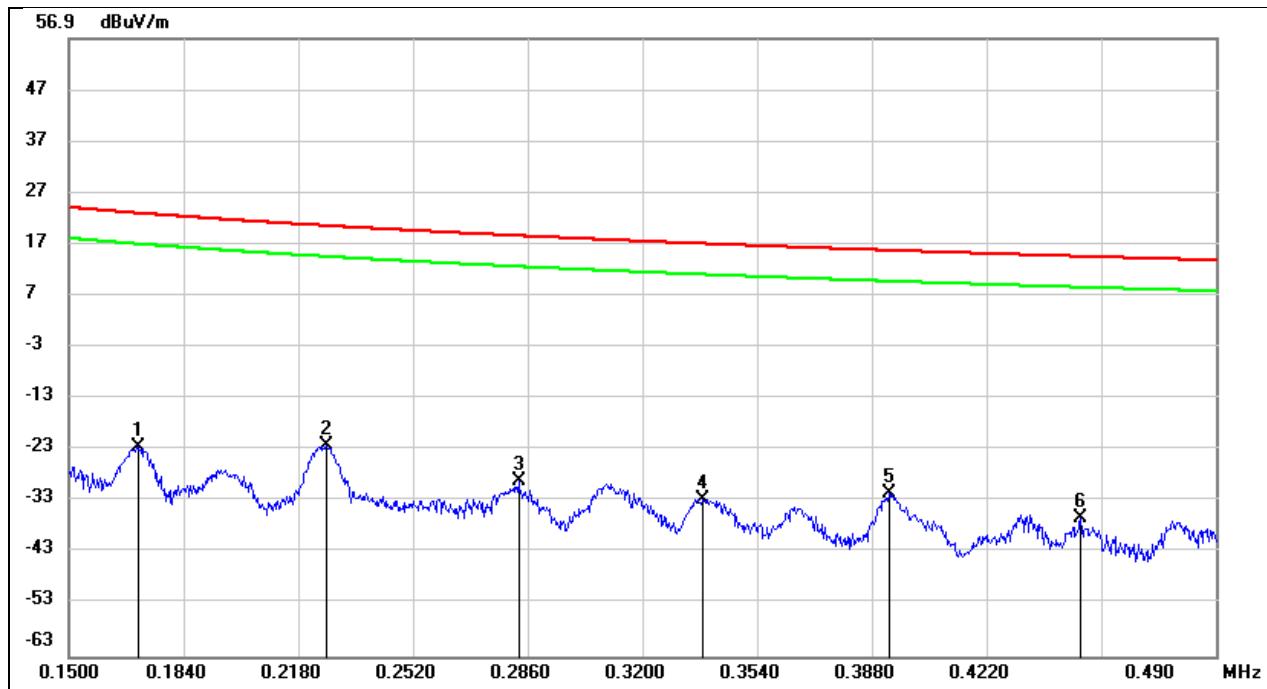

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1703	69.81	-92.15	-22.34	22.98	-73.84	-28.52	-45.32	peak
2	0.2262	69.77	-92.06	-22.29	20.51	-73.79	-30.99	-42.80	peak
3	0.2833	63.15	-92.32	-29.17	18.56	-80.67	-32.94	-47.73	peak
4	0.3379	59.91	-92.48	-32.57	17.03	-84.07	-34.47	-49.60	peak
5	0.3930	61.27	-92.59	-31.32	15.71	-82.82	-35.79	-47.03	peak
6	0.4499	56.30	-92.70	-36.40	14.54	-87.90	-36.96	-50.94	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

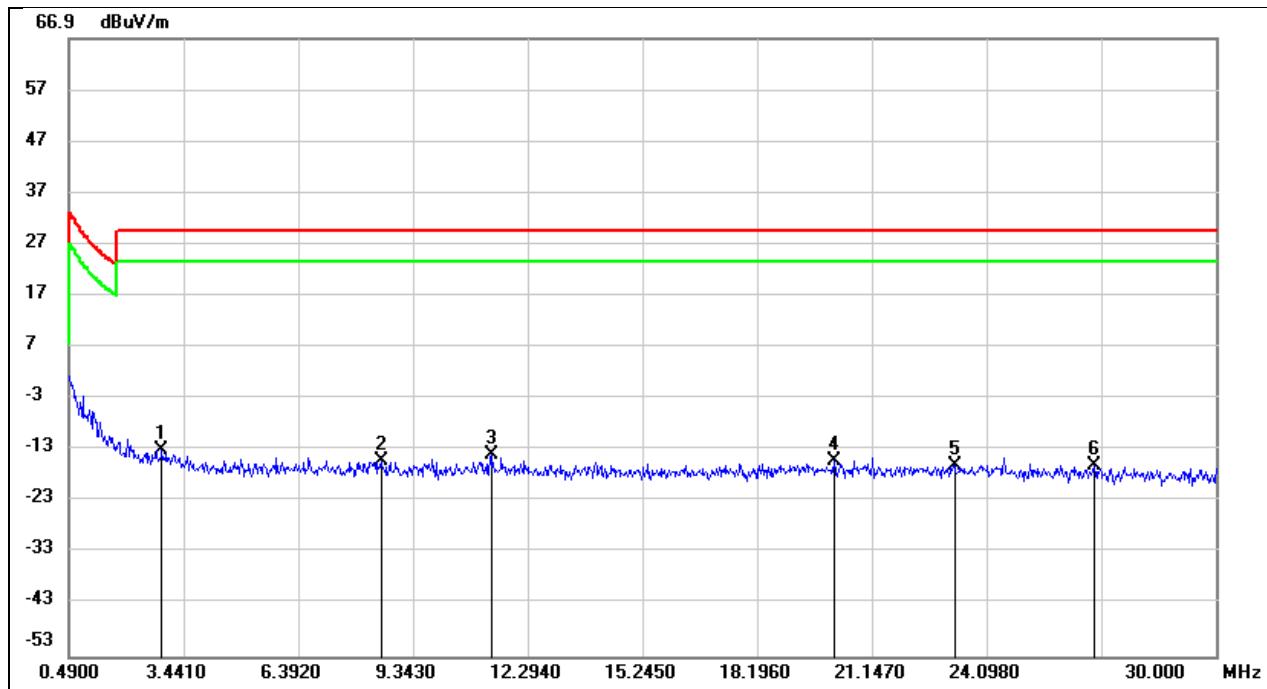

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	2.8803	38.02	-50.98	-12.96	29.54	-64.46	-21.96	-42.50	QP
2	8.5166	36.05	-51.05	-15.00	29.54	-66.50	-21.96	-44.54	QP
3	11.3497	36.88	-50.83	-13.95	29.54	-65.45	-21.96	-43.49	QP
4	20.1732	34.77	-49.88	-15.11	29.54	-66.61	-21.96	-44.65	QP
5	23.2717	33.58	-49.57	-15.99	29.54	-67.49	-21.96	-45.53	QP
6	26.8719	33.61	-49.66	-16.05	29.54	-67.55	-21.96	-45.59	QP


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	AC120V_60Hz

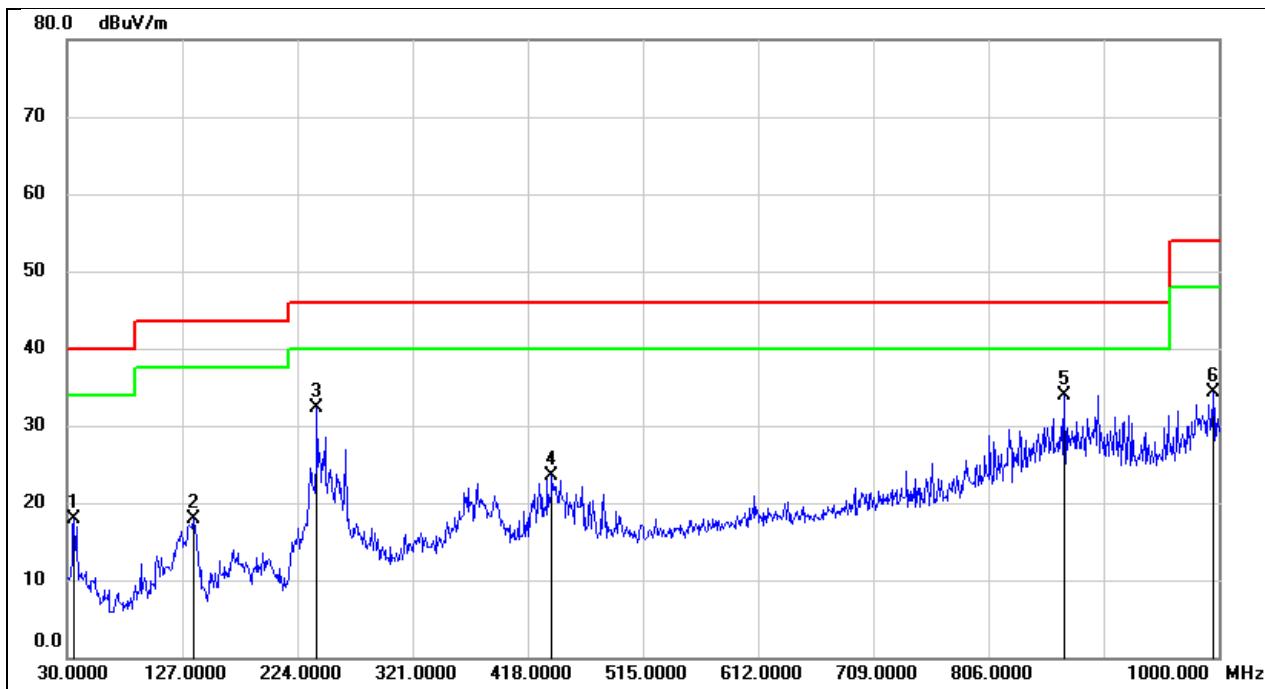

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	32.48	-14.54	17.94	40.00	-22.06	QP
2	136.7000	32.08	-14.11	17.97	43.50	-25.53	QP
3	240.4900	46.42	-14.05	32.37	46.00	-13.63	QP
4	438.3700	31.93	-8.48	23.45	46.00	-22.55	QP
5	870.0200	34.78	-0.96	33.82	46.00	-12.18	QP
6	995.1500	34.51	-0.21	34.30	54.00	-19.70	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	AC120V_60Hz

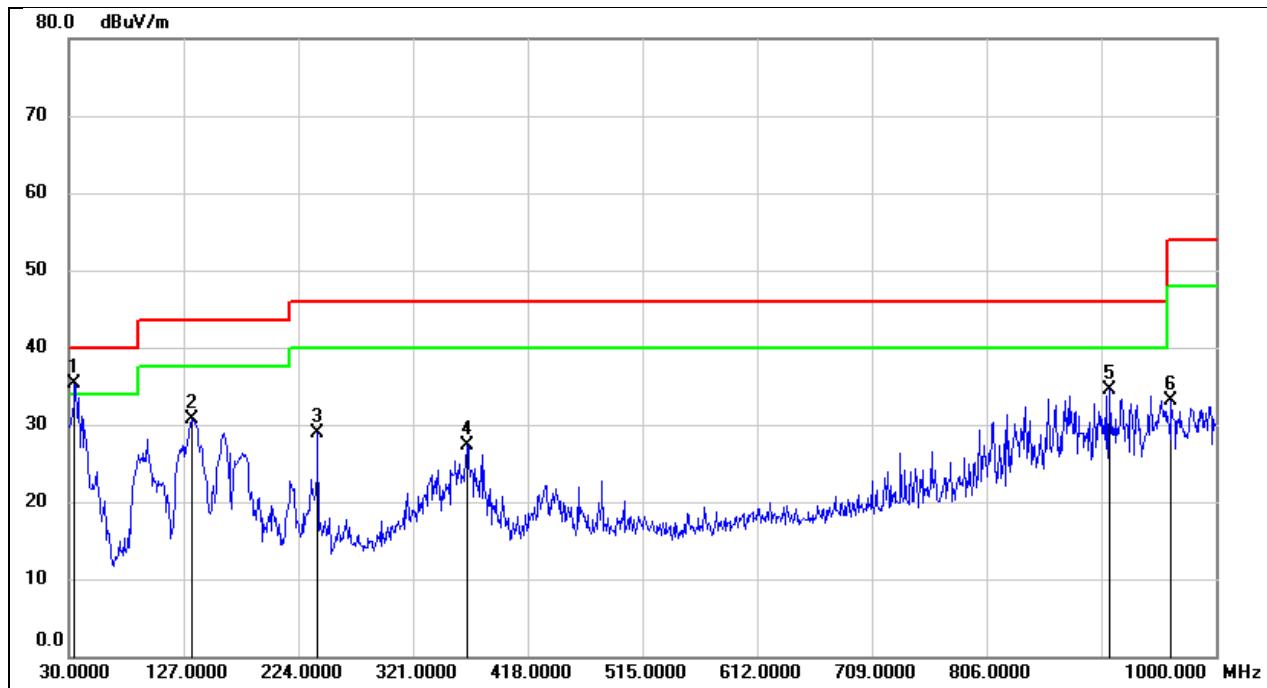

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	49.81	-14.49	35.32	40.00	-4.68	QP
2	133.7899	44.93	-14.24	30.69	43.50	-12.81	QP
3	240.4900	42.91	-14.05	28.86	46.00	-17.14	QP
4	366.5900	36.91	-9.55	27.36	46.00	-18.64	QP
5	909.7900	35.05	-0.52	34.53	46.00	-11.47	QP
6	962.1700	33.75	-0.67	33.08	54.00	-20.92	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

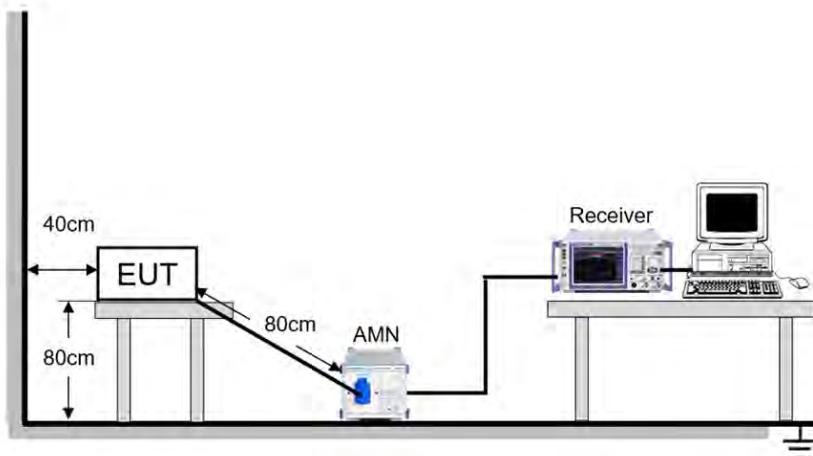

TEST ENVIRONMENT


Temperature	23.5°C	Relative Humidity	55.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V_60Hz

TEST DATE / ENGINEER

Test Date	July 23, 2025	Test By	Deacon Tan
-----------	---------------	---------	------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

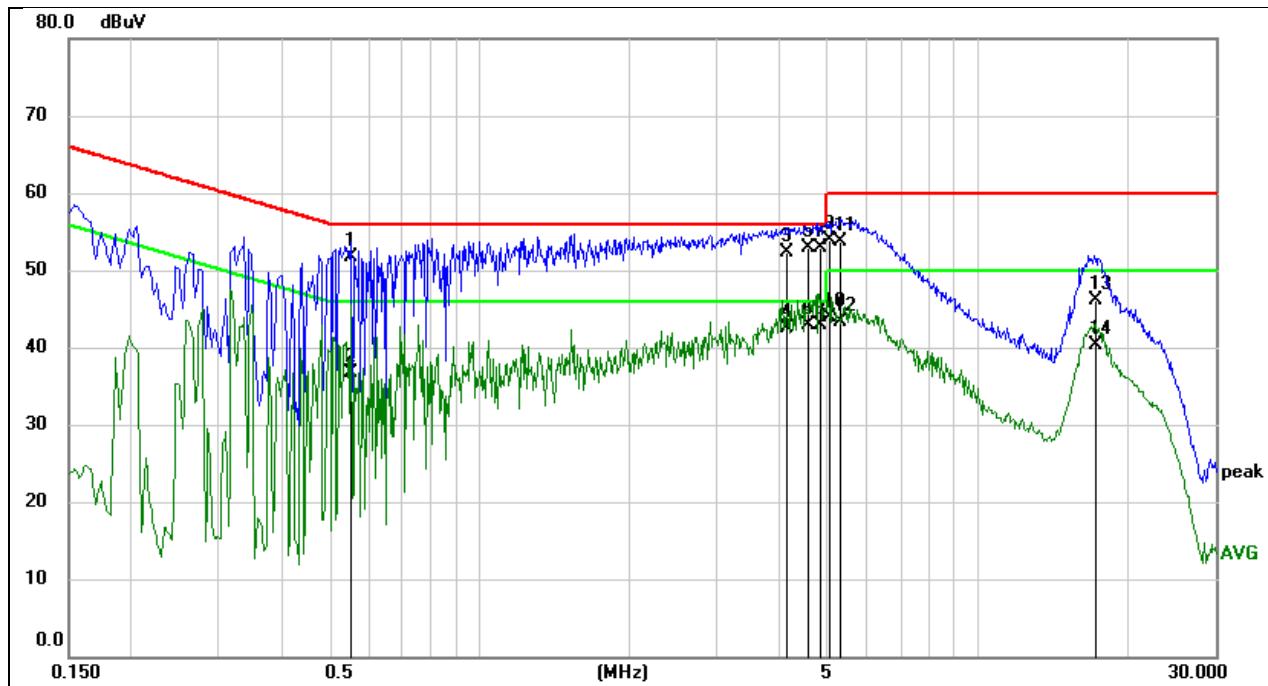


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5571	42.13	9.64	51.77	56.00	-4.23	QP
2	0.5571	27.04	9.64	36.68	46.00	-9.32	AVG
3	4.1422	42.66	9.73	52.39	56.00	-3.61	QP
4	4.1422	32.72	9.73	42.45	46.00	-3.55	AVG
5	4.5686	43.18	9.73	52.91	56.00	-3.09	QP
6	4.5686	33.20	9.73	42.93	46.00	-3.07	AVG
7	4.8489	43.24	9.73	52.97	56.00	-3.03	QP
8	4.8489	33.12	9.73	42.85	46.00	-3.15	AVG
9	5.0184	44.27	9.73	54.00	60.00	-6.00	QP
10	5.0184	34.20	9.73	43.93	50.00	-6.07	AVG
11	5.2652	43.98	9.73	53.71	60.00	-6.29	QP
12	5.2652	33.64	9.73	43.37	50.00	-6.63	AVG
13	17.2068	36.32	9.74	46.06	60.00	-13.94	QP
14	17.2068	30.59	9.74	40.33	50.00	-9.67	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

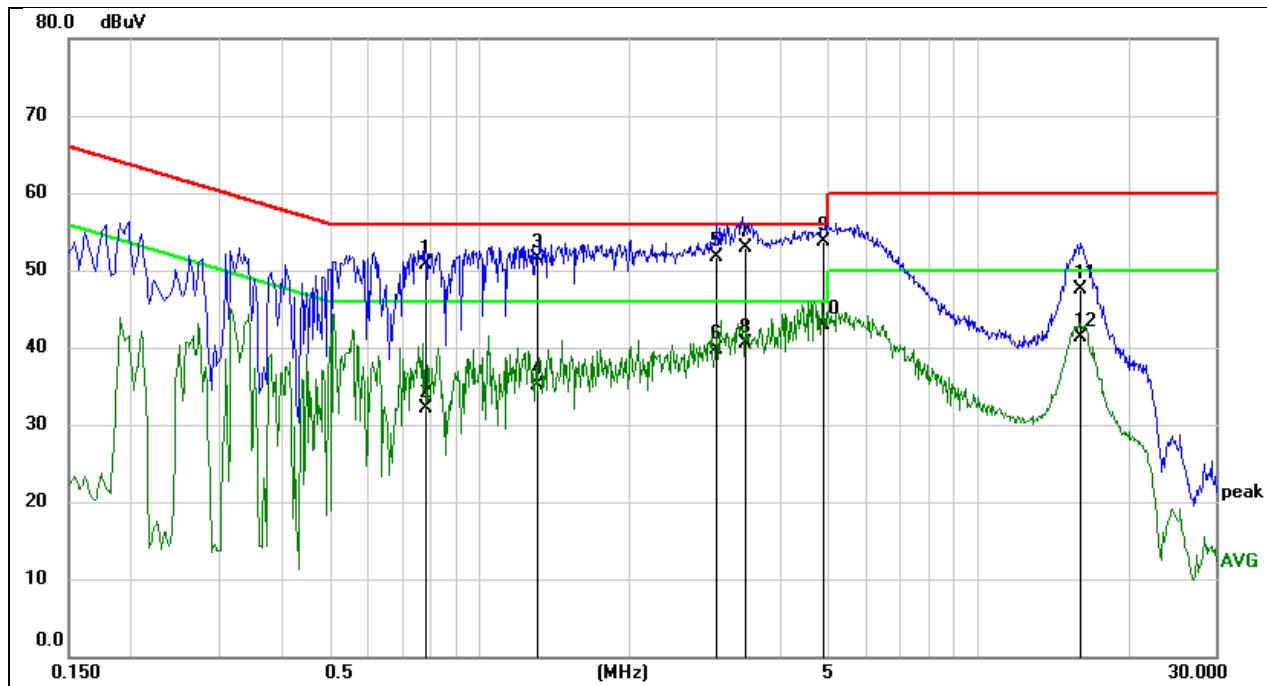

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.7835	41.05	9.63	50.68	56.00	-5.32	QP
2	0.7835	22.55	9.63	32.18	46.00	-13.82	AVG
3	1.3076	41.91	9.63	51.54	56.00	-4.46	QP
4	1.3076	25.55	9.63	35.18	46.00	-10.82	AVG
5	3.0064	42.00	9.63	51.63	56.00	-4.37	QP
6	3.0064	30.02	9.63	39.65	46.00	-6.35	AVG
7	3.4229	43.34	9.63	52.97	56.00	-3.03	QP
8	3.4229	30.83	9.63	40.46	46.00	-5.54	AVG
9	4.8866	44.05	9.66	53.71	56.00	-2.29	QP
10	4.8866	33.34	9.66	43.00	46.00	-3.00	AVG
11	16.1296	37.71	9.74	47.45	60.00	-12.55	QP
12	16.1296	31.48	9.74	41.22	50.00	-8.78	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

Appendix A:Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	AVG setting For VBW (kHz)
b	32.96	32.98	0.9994	99.94	0.00	0.03	0.01
g	5.484	5.508	0.9956	99.56	0.02	0.18	0.01
n20	5.082	5.106	0.9953	99.53	0.02	0.20	0.01


Note:

Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

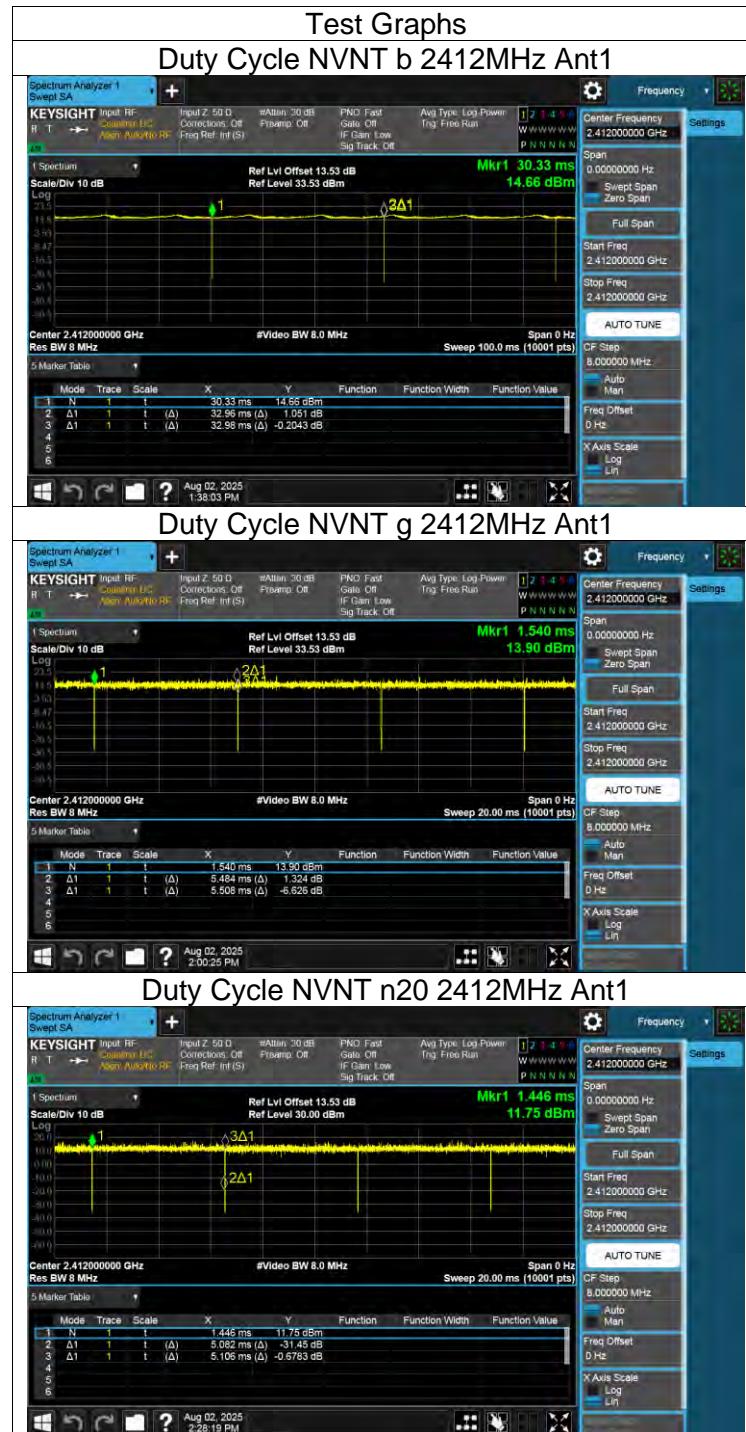


Appendix B: Maximum Conducted Output Power


Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	11.84	30	Pass
b	2437	Ant1	11.81	30	Pass
b	2462	Ant1	11.61	30	Pass
g	2412	Ant1	11.69	30	Pass
g	2437	Ant1	11.77	30	Pass
g	2462	Ant1	11.89	30	Pass
n20	2412	Ant1	9.51	30	Pass
n20	2437	Ant1	10.16	30	Pass
n20	2462	Ant1	10.25	30	Pass


Note: 1. Conducted Power=Meas. Level+ Correction Factor
 2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

Appendix C:-6dB Bandwidth

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	9.283	≥0.5	Pass
b	2437	Ant1	9.211	≥0.5	Pass
b	2462	Ant1	9.124	≥0.5	Pass
g	2412	Ant1	16.151	≥0.5	Pass
g	2437	Ant1	16.297	≥0.5	Pass
g	2462	Ant1	16.319	≥0.5	Pass
n20	2412	Ant1	17.034	≥0.5	Pass
n20	2437	Ant1	16.936	≥0.5	Pass
n20	2462	Ant1	16.925	≥0.5	Pass

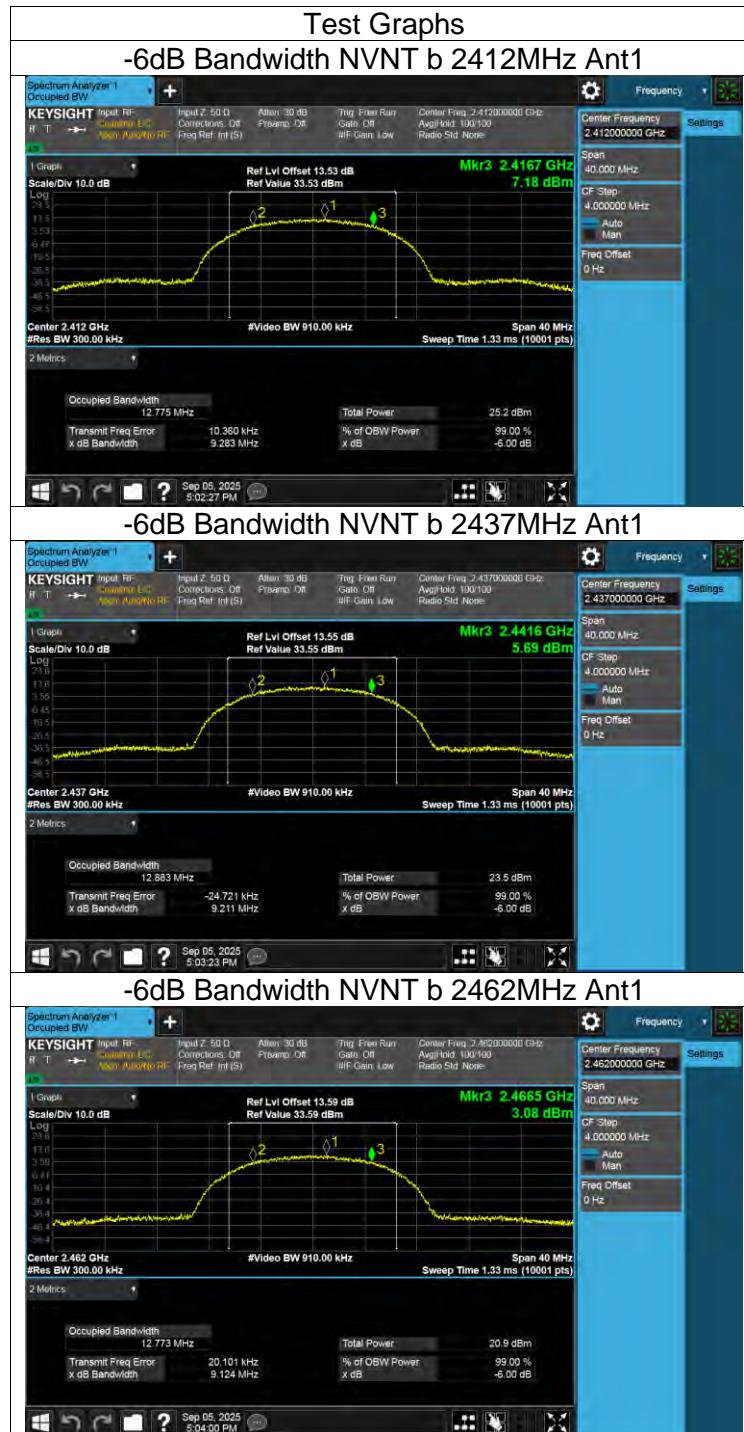

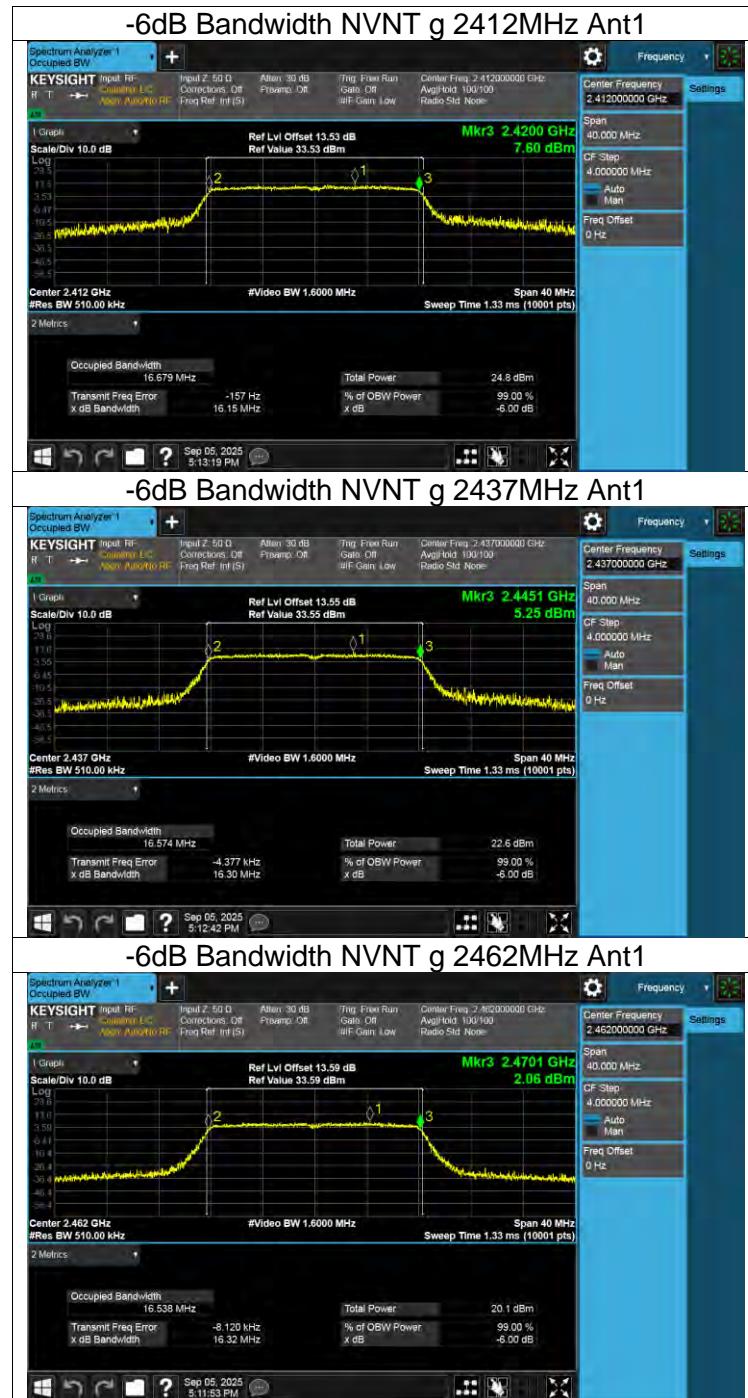


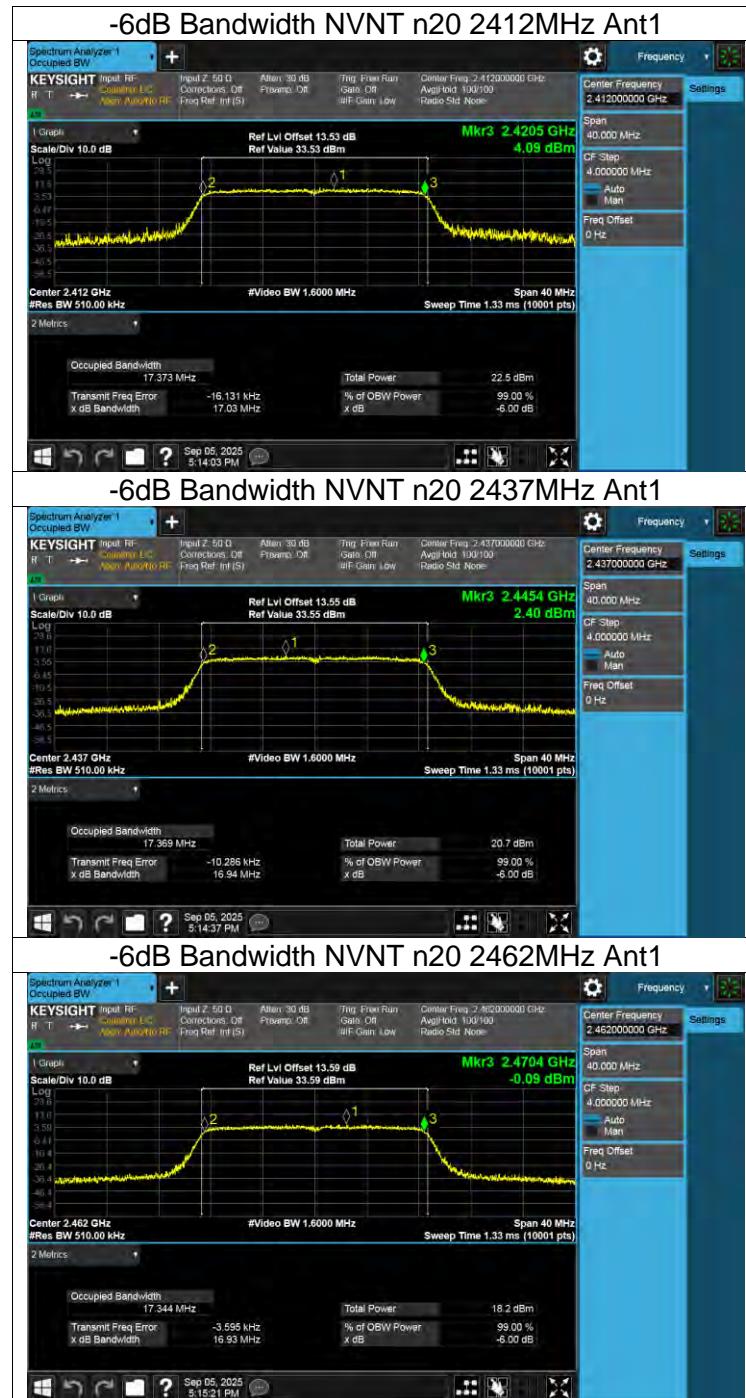


Appendix D: Occupied Channel Bandwidth

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
b	2412	Ant1	12.937
b	2437	Ant1	12.883
b	2462	Ant1	12.875
g	2412	Ant1	16.355
g	2437	Ant1	16.35
g	2462	Ant1	16.366
n20	2412	Ant1	17.283
n20	2437	Ant1	17.248
n20	2462	Ant1	17.316




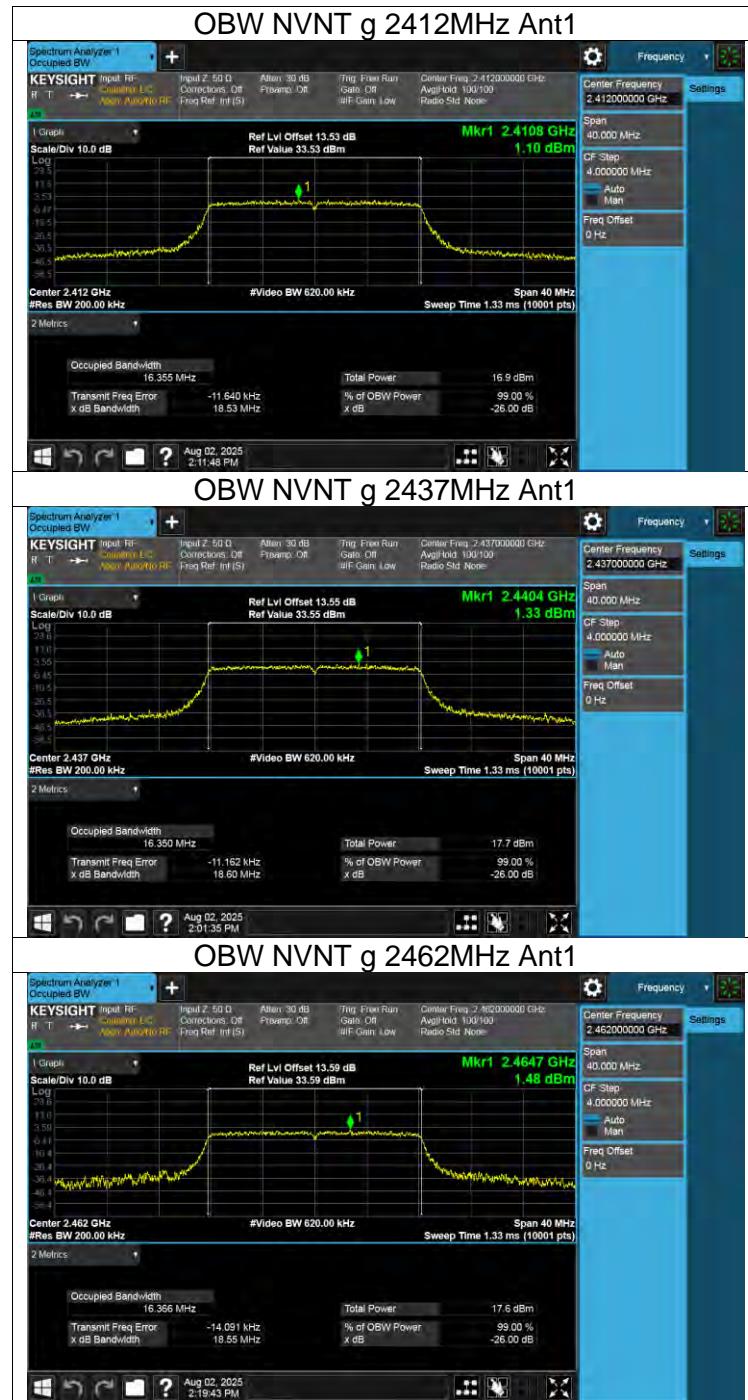


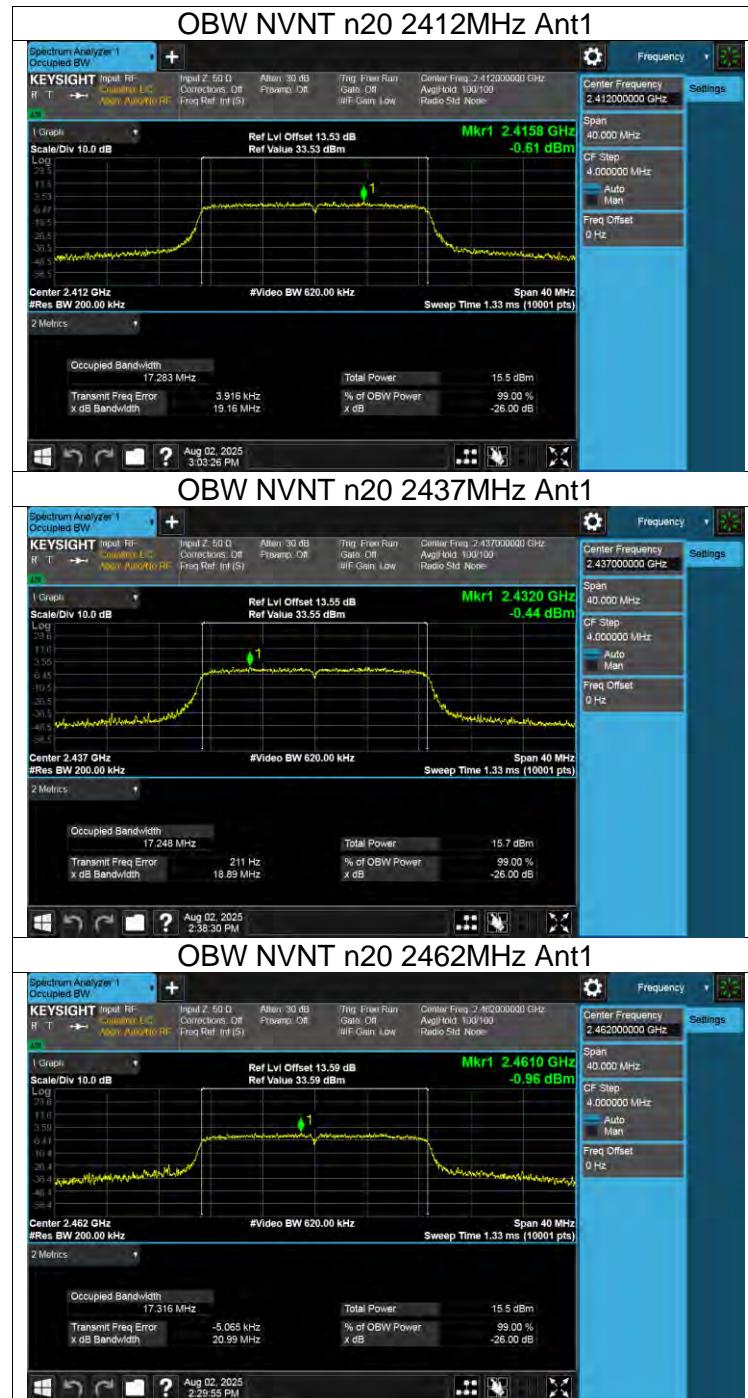


Appendix E: Maximum Power Spectral Density Level

Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-18.16	8	Pass
b	2437	Ant1	-18.77	8	Pass
b	2462	Ant1	-19.85	8	Pass
g	2412	Ant1	-16.65	8	Pass
g	2437	Ant1	-19.67	8	Pass
g	2462	Ant1	-20.20	8	Pass
n20	2412	Ant1	-21.06	8	Pass
n20	2437	Ant1	-19.87	8	Pass
n20	2462	Ant1	-20.41	8	Pass

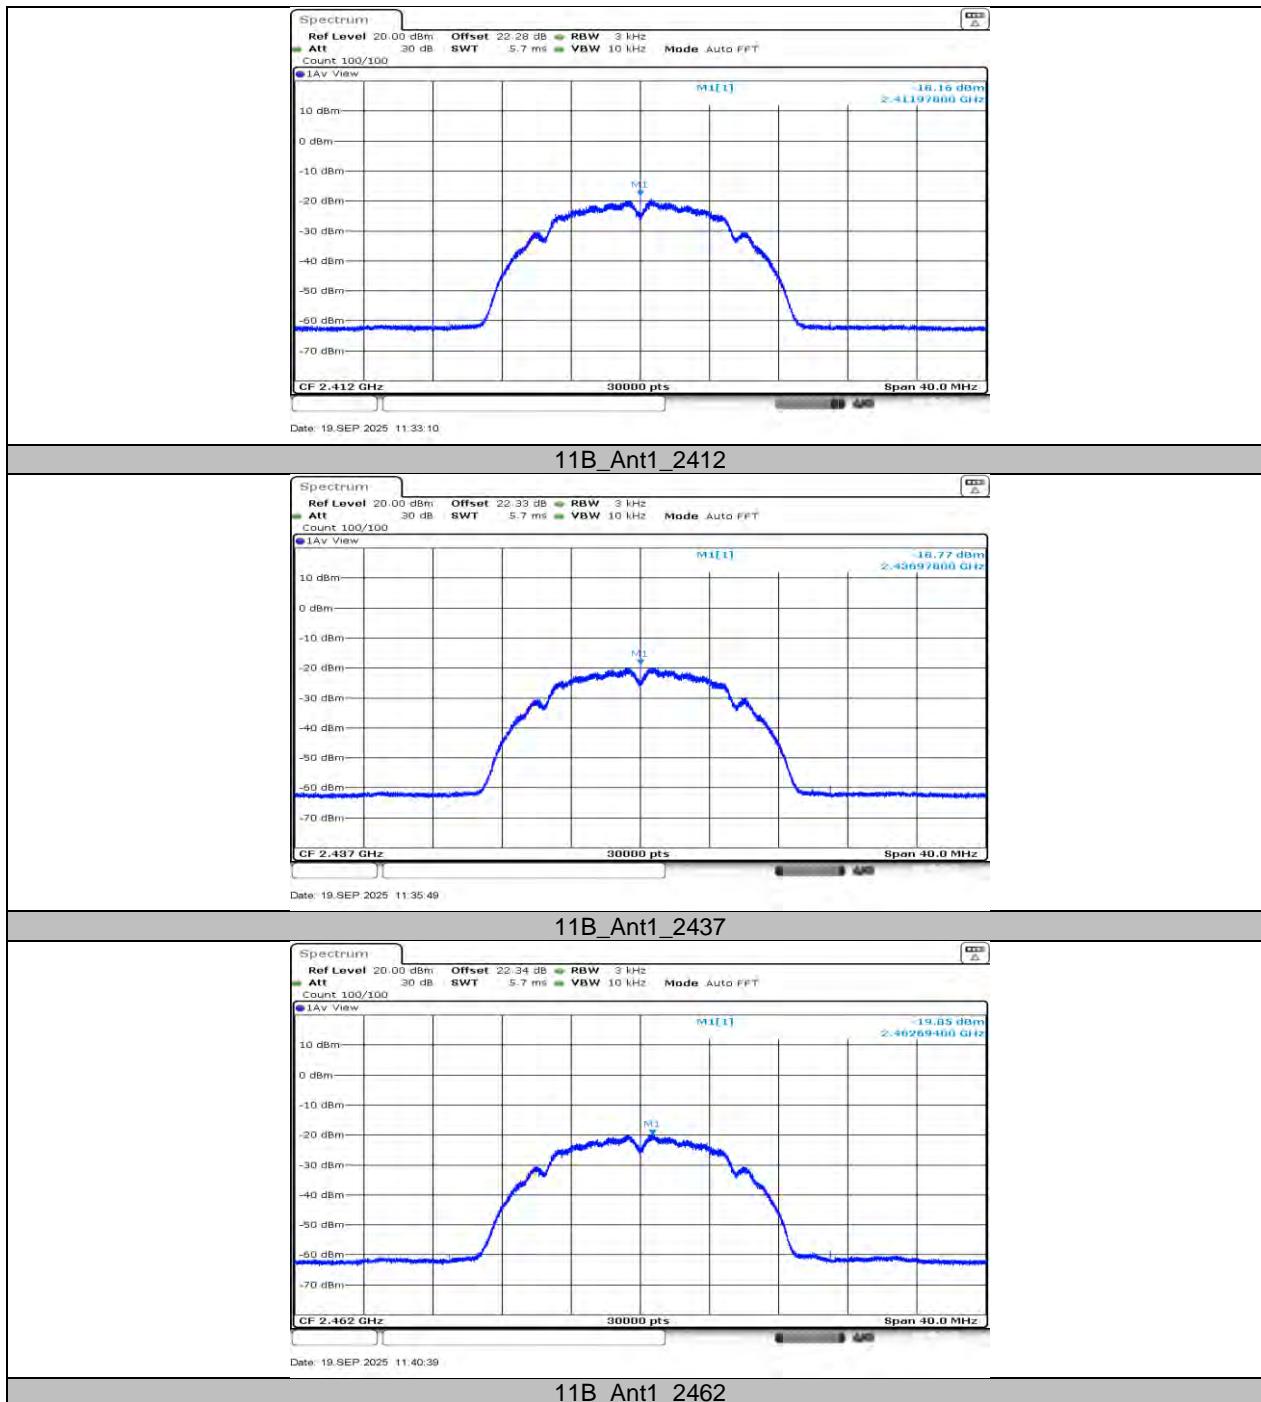


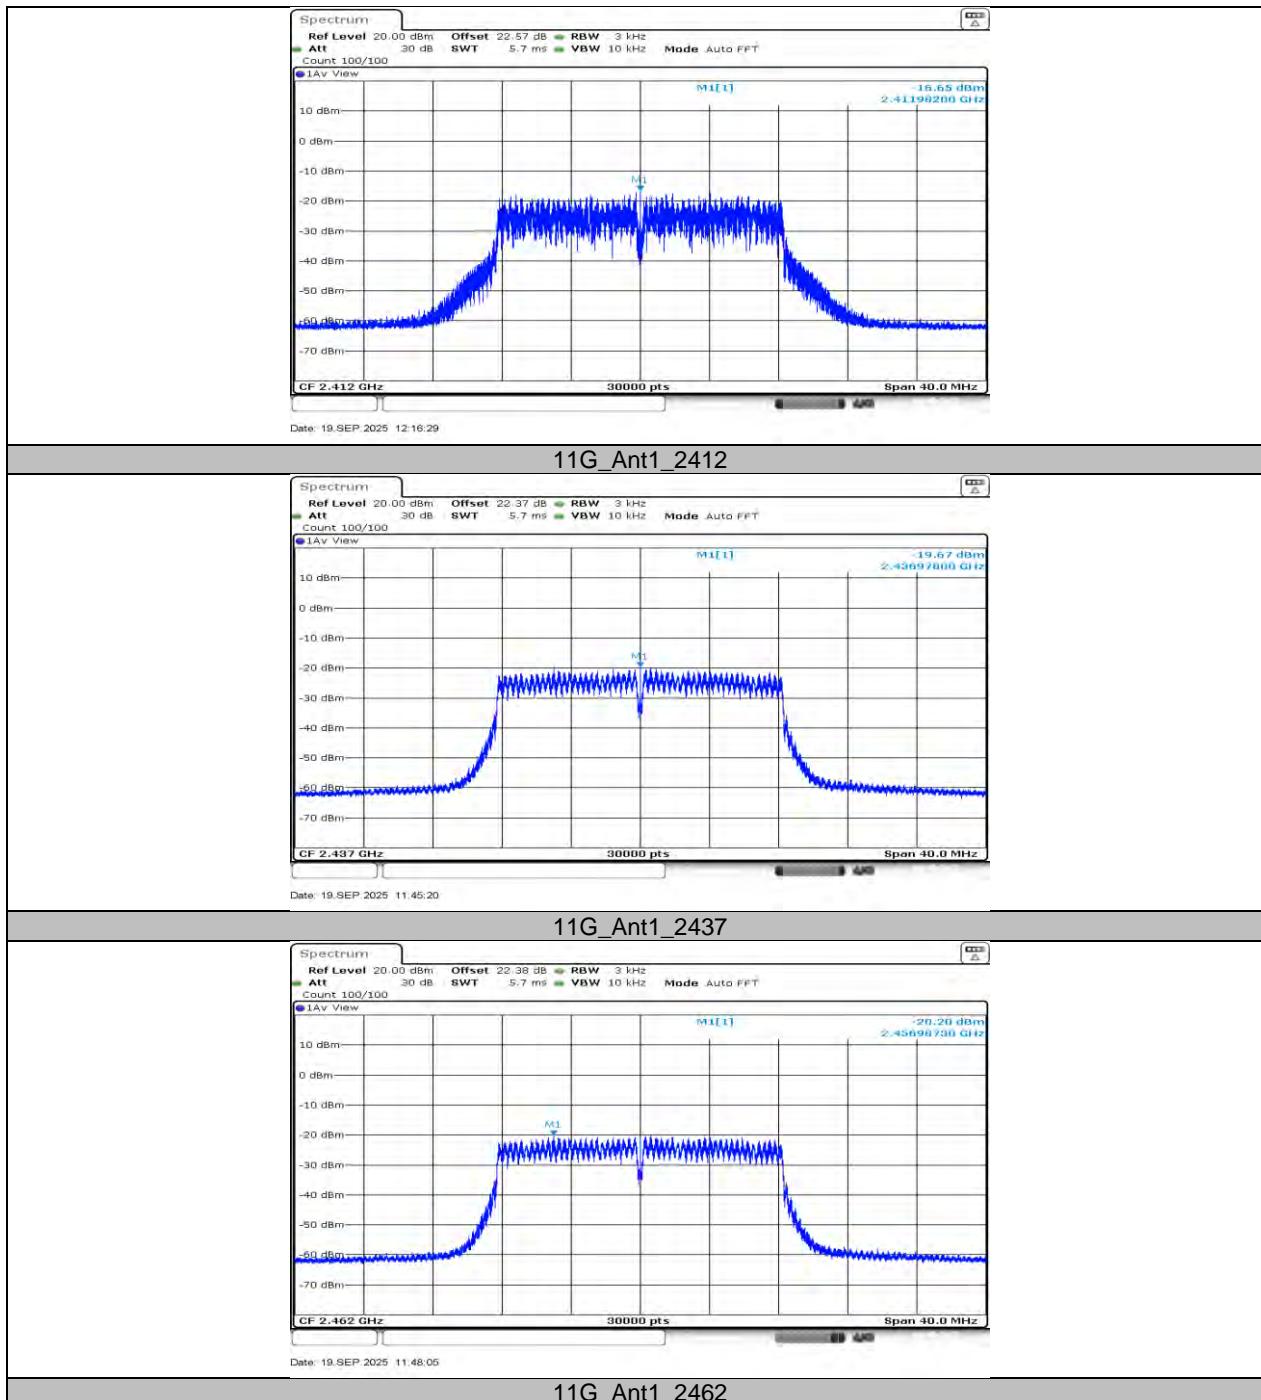


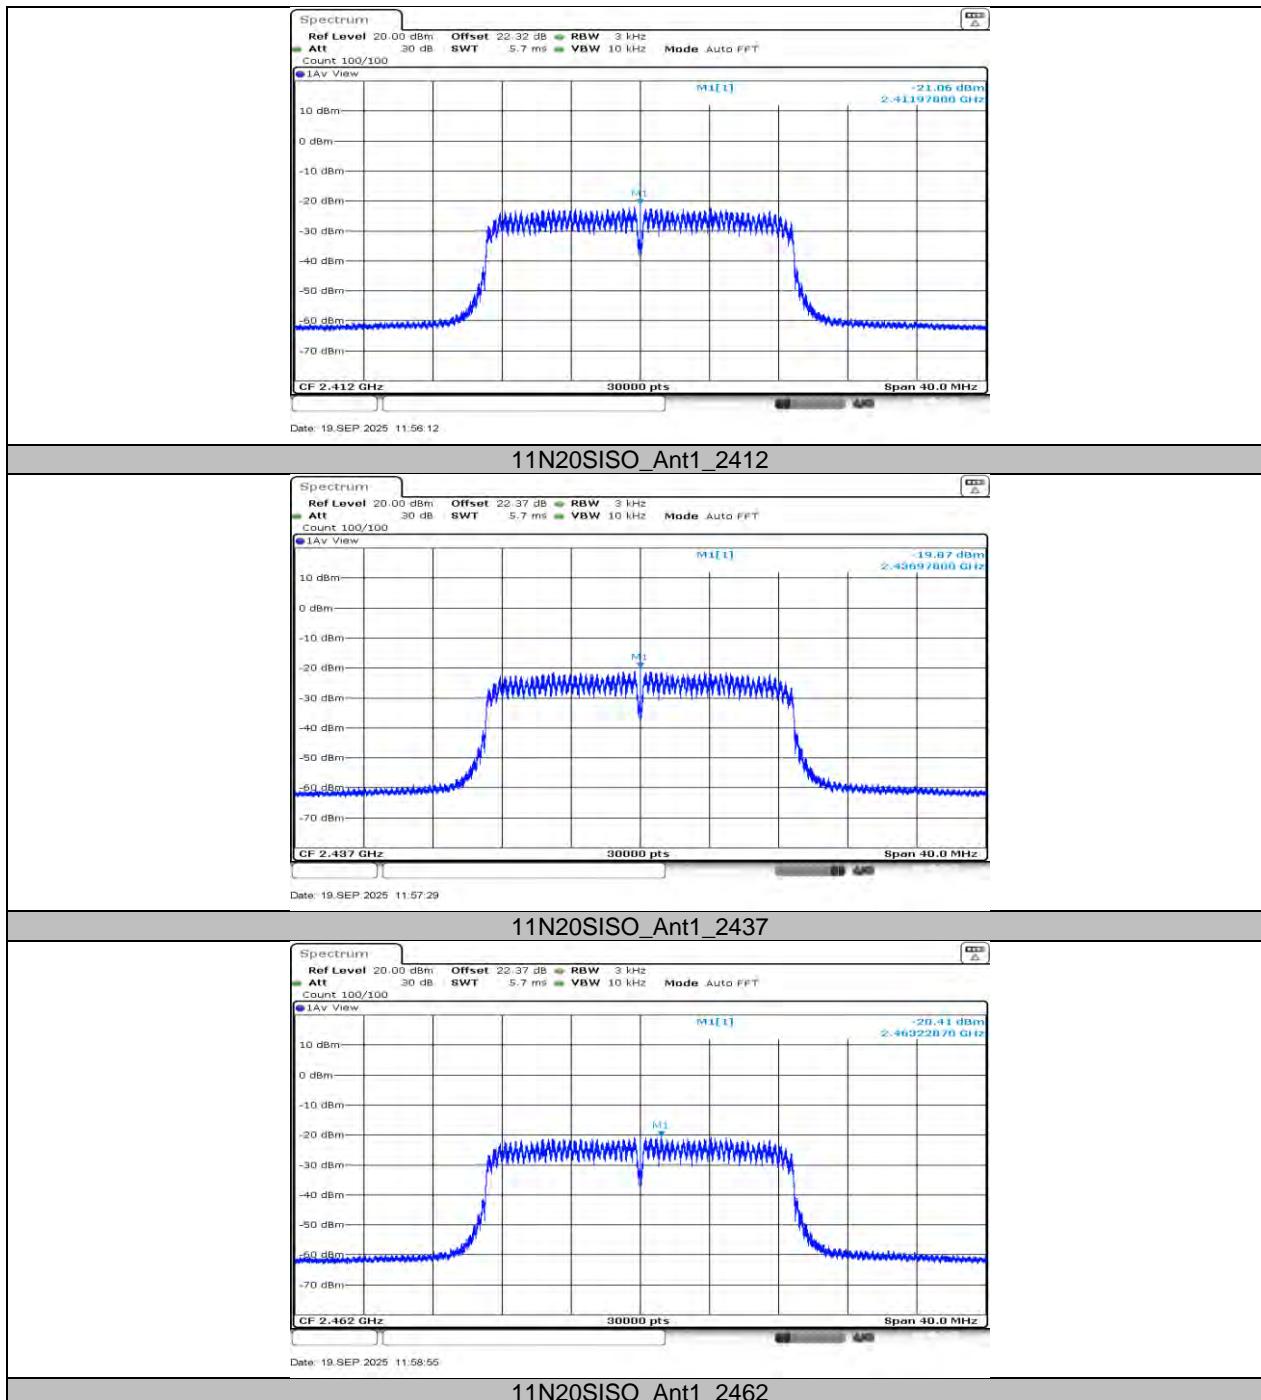



Appendix F: Band Edge

Mode	Frequency (MHz)	Antenna	Verdict
b	2412	Ant1	Pass
b	2462	Ant1	Pass
g	2412	Ant1	Pass
g	2462	Ant1	Pass
n20	2412	Ant1	Pass
n20	2462	Ant1	Pass

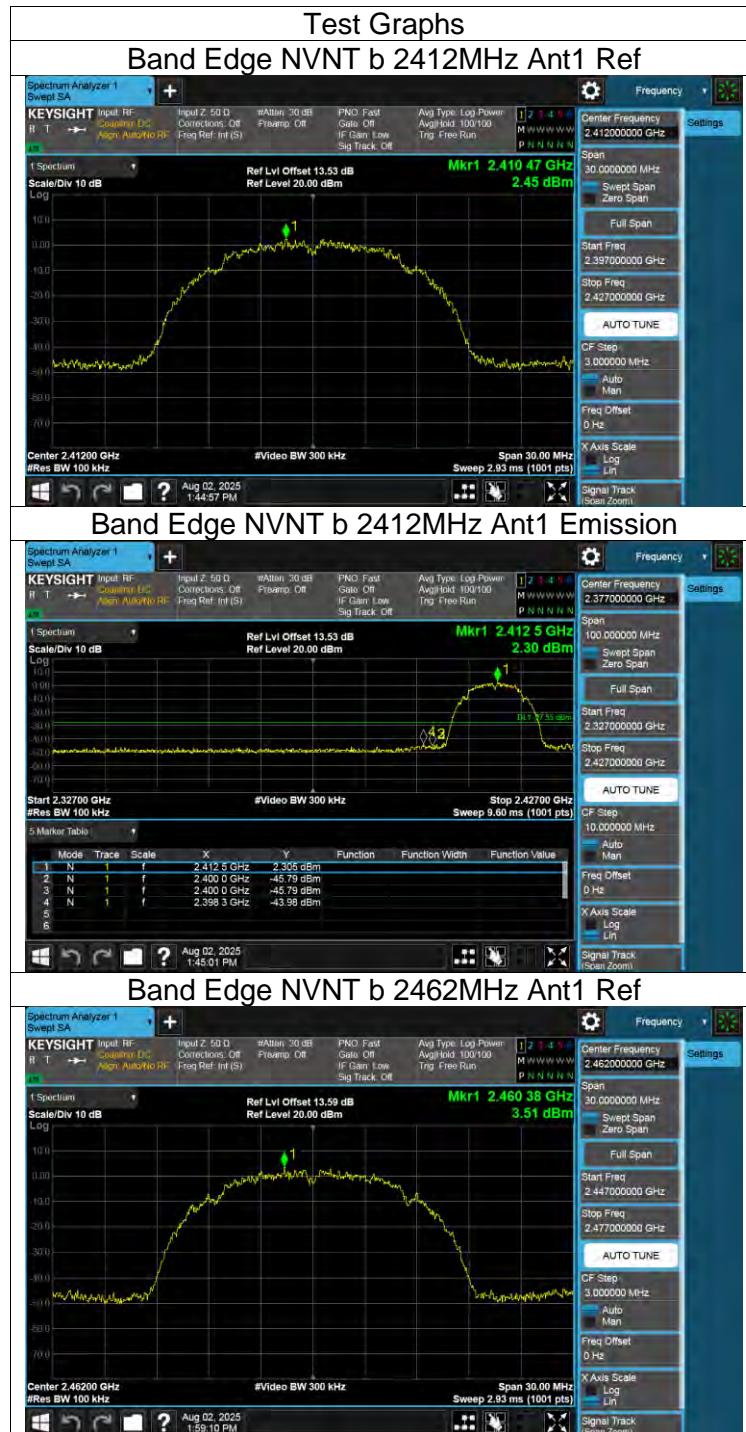

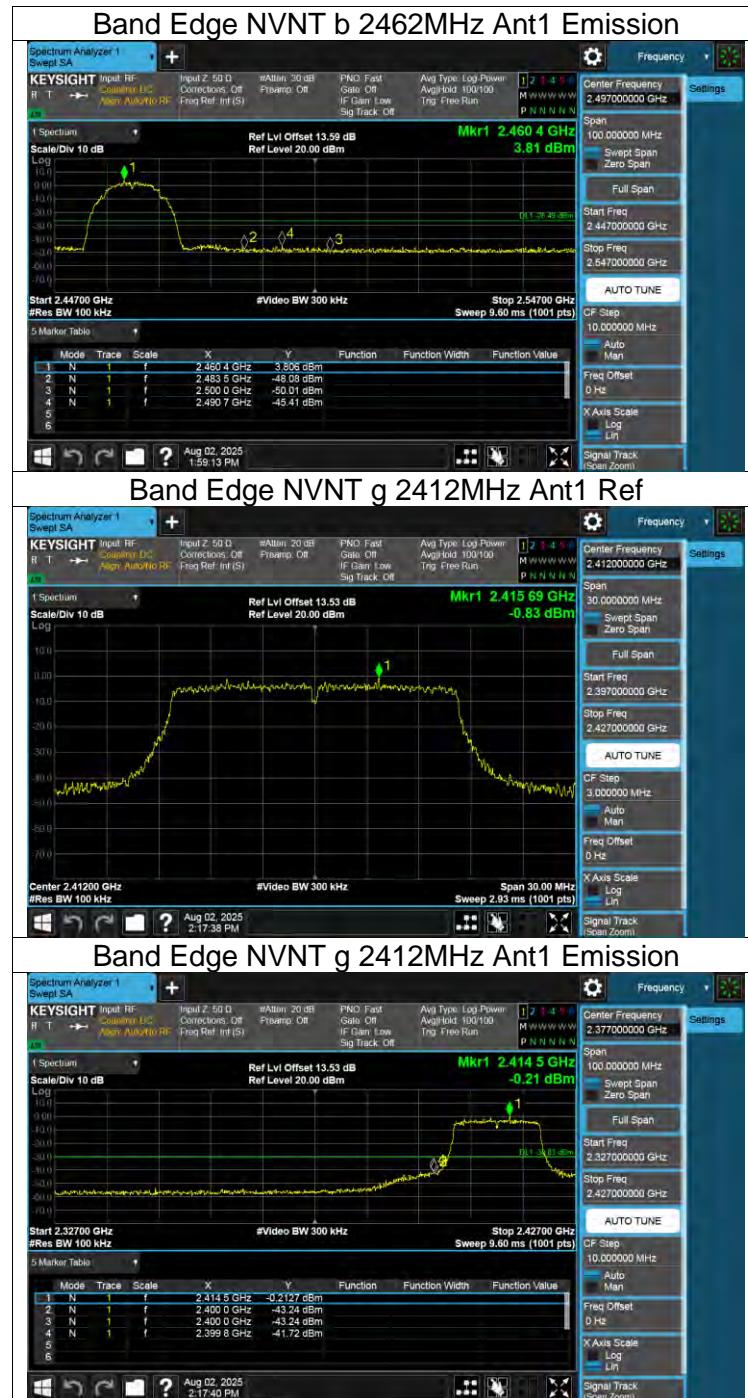


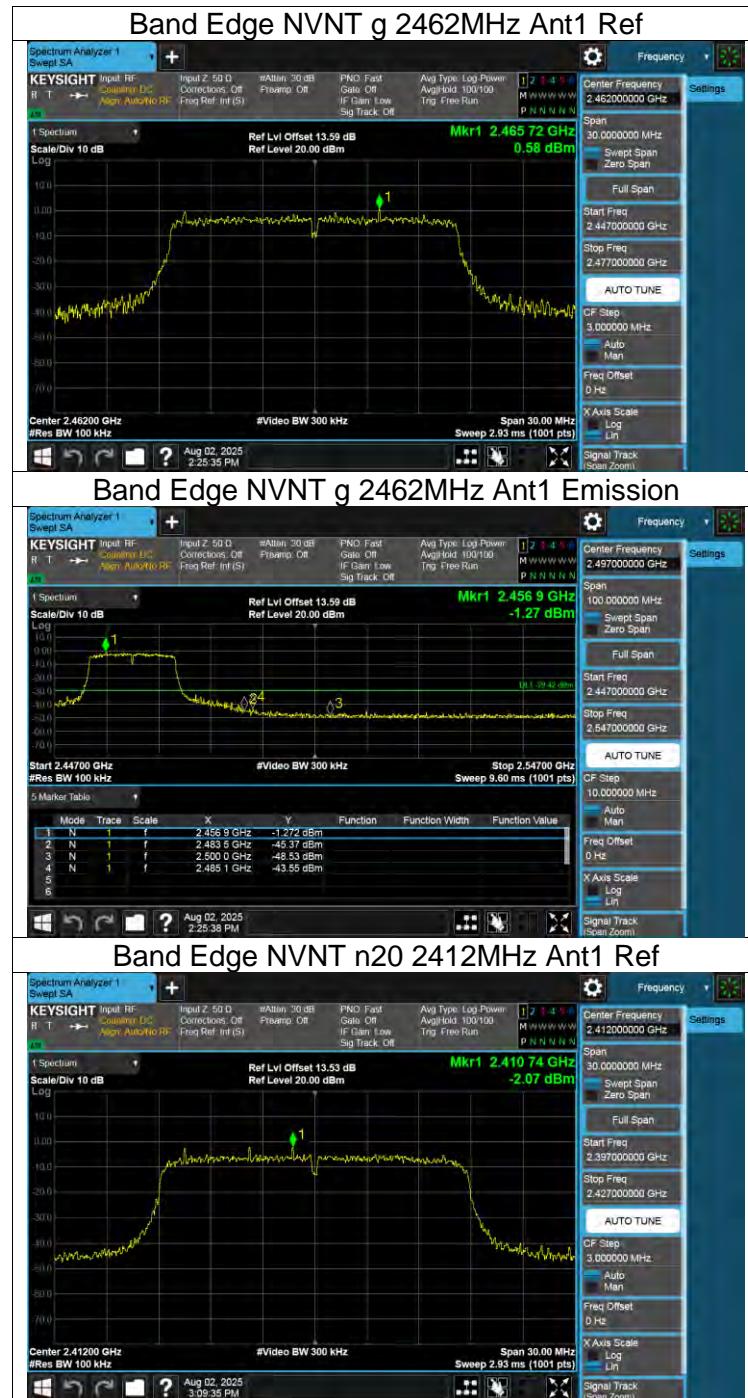


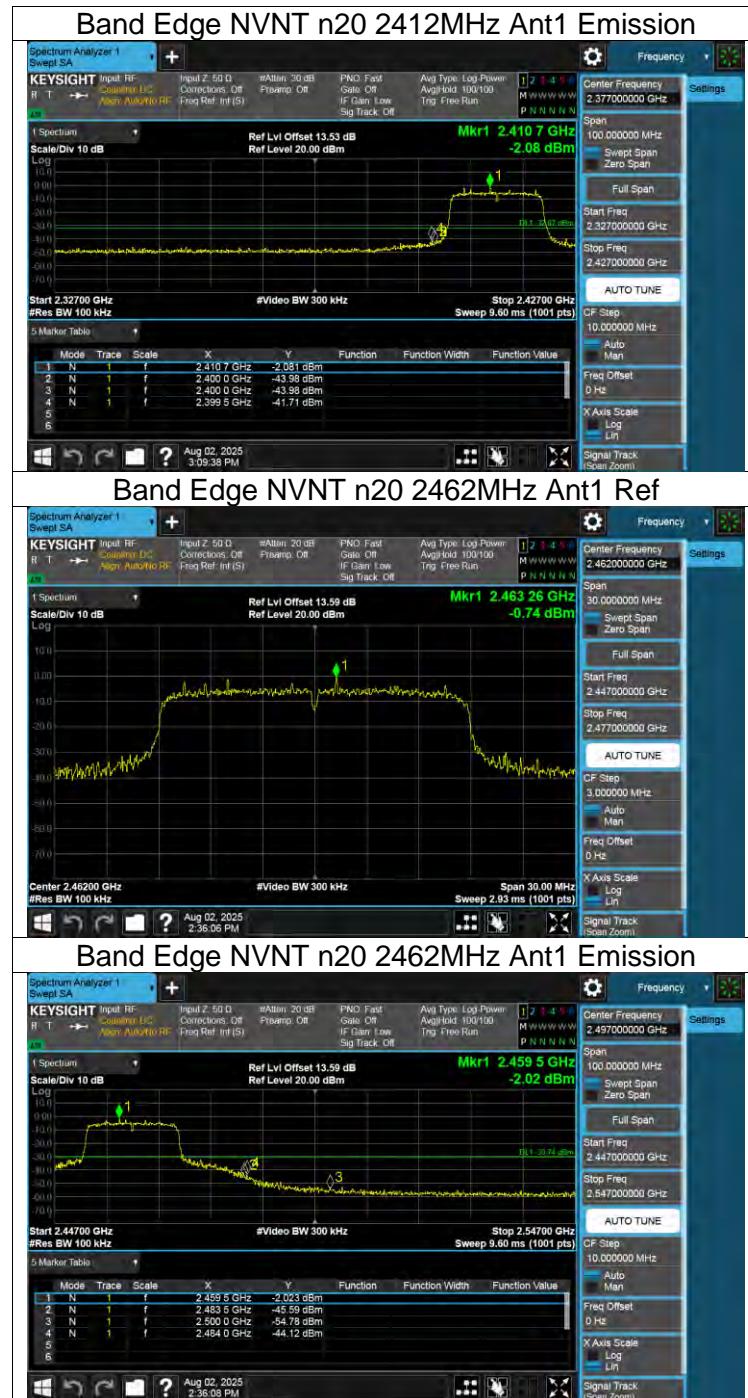



Appendix G: Conducted RF Spurious Emission

Mode	Frequency (MHz)	Antenna	Verdict
b	2412	Ant1	Pass
b	2437	Ant1	Pass
b	2462	Ant1	Pass
g	2412	Ant1	Pass
g	2437	Ant1	Pass
g	2462	Ant1	Pass
n20	2412	Ant1	Pass
n20	2437	Ant1	Pass
n20	2462	Ant1	Pass

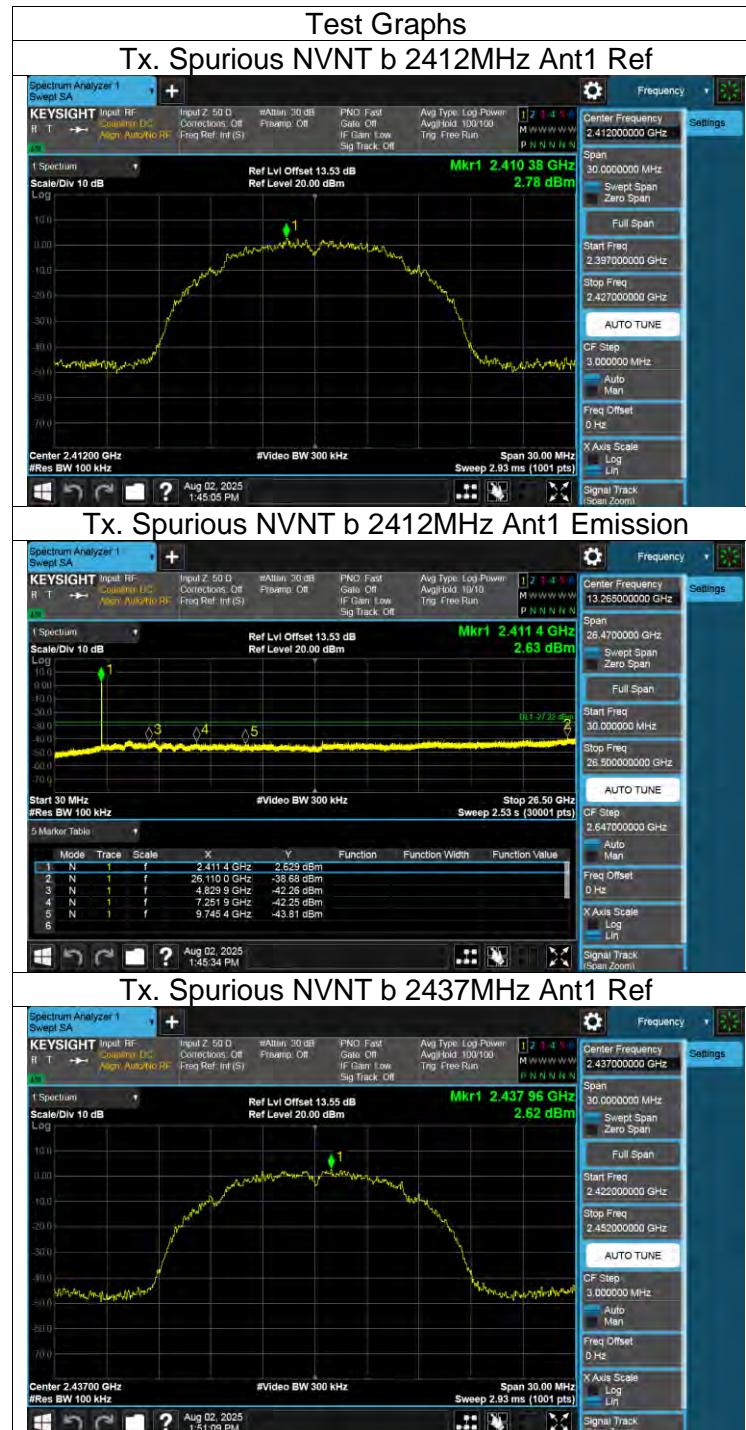

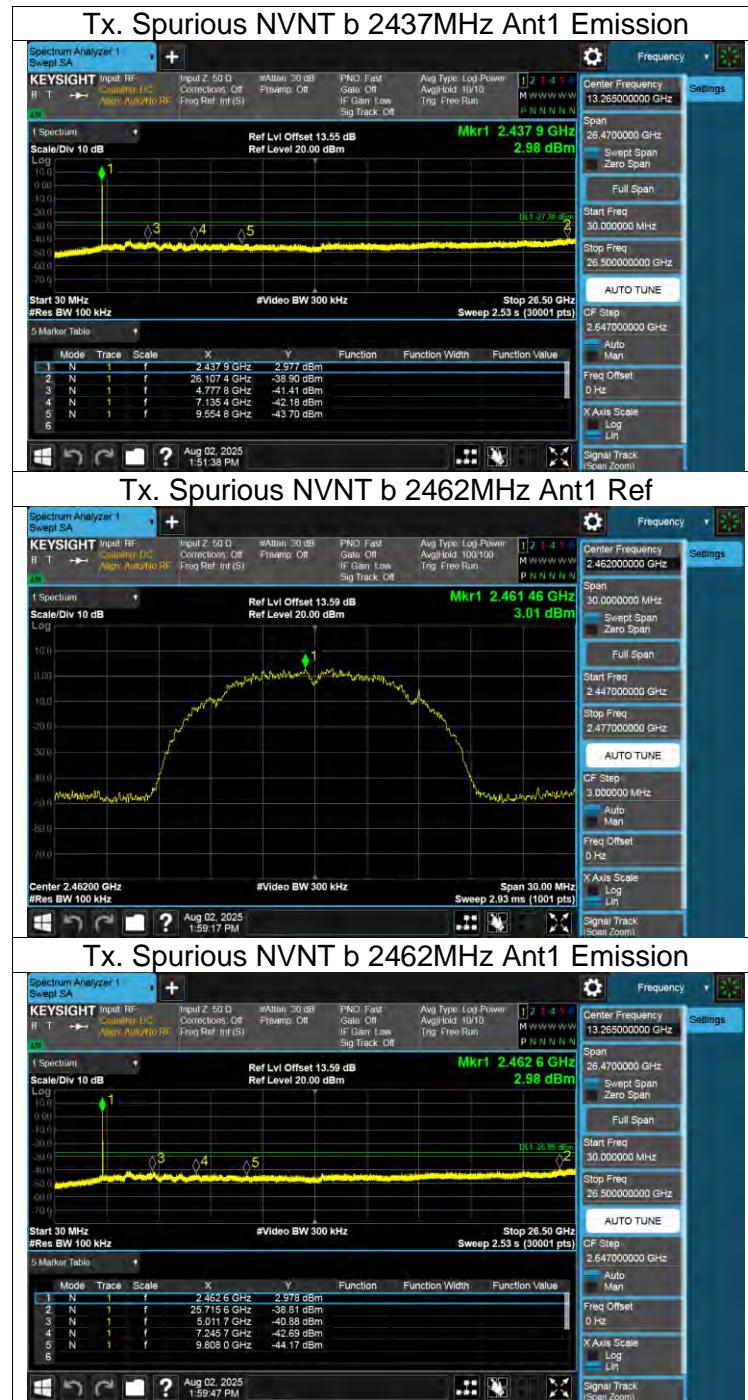

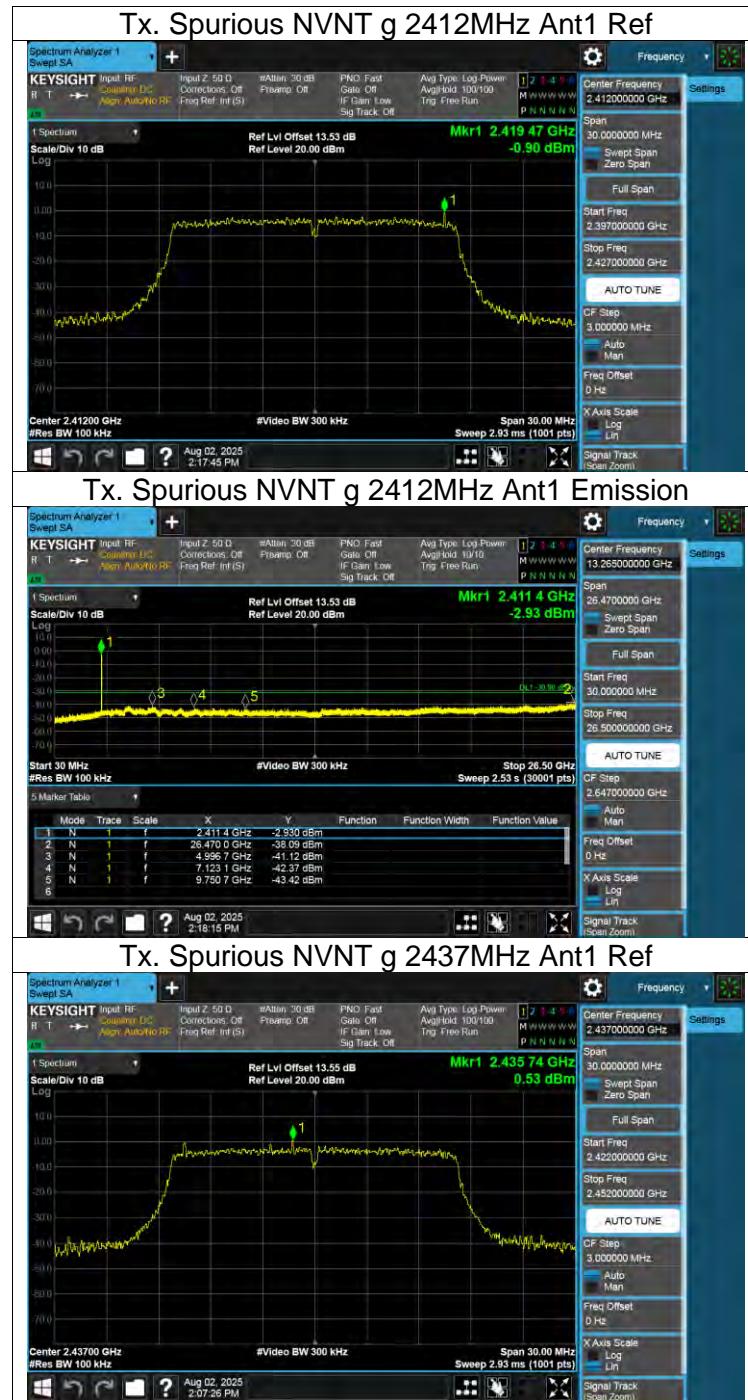

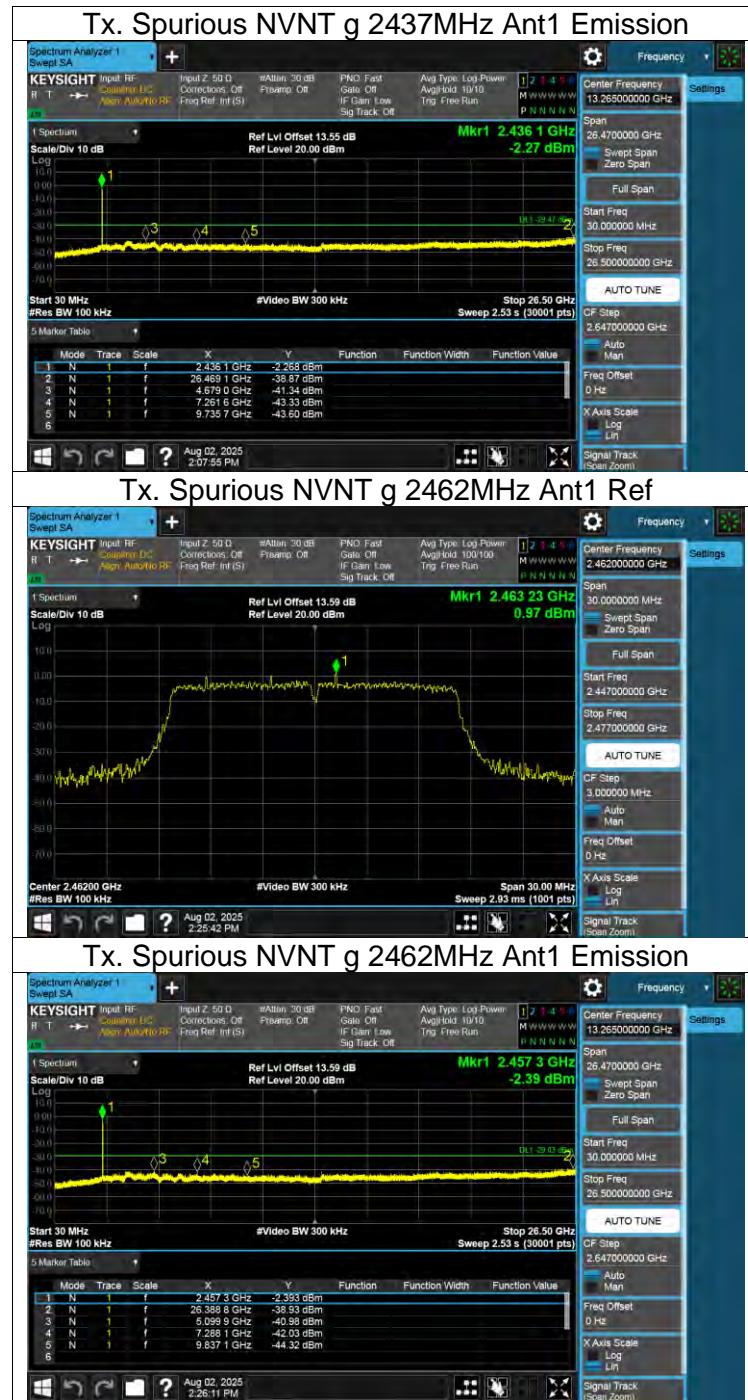

Tx. Spurious NVNT n20 2412MHz Ant1 Ref

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

Tx. Spurious NVNT n20 2437MHz Ant1 Ref




END OF REPORT