

TEST REPORT

Applicant Name : Guangzhou Chixiang Car Accessories Co., Ltd
Address : Room 408, Building 2, No. 87, Jiangxia East 1st Road,
Huangshi Street, Baiyun District GuangZhou, Guangdong
China
Report Number : SZNS1221018-47737E-RF-00
FCC ID: 2AVDT-B502M

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: HITCH CAMERA
Model No.: B502M
Multiple Model(s) No.: N/A
Trade Mark: N/A
Date Received: 2022/10/18
Report Date: 2022/11/29

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger Ling

Roger Ling
EMC Engineer

Approved By:

Candy Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	13
APPLICABLE STANDARD	13
RESULT	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
TRANSD FACTOR & MARGIN CALCULATION.....	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
APPENDIX	35
APPENDIX A: DTS BANDWIDTH	35
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	40
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	45
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	46
APPENDIX E: BAND EDGE MEASUREMENTS.....	51
APPENDIX F: DUTY CYCLE	54

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Wi-Fi: 2412-2472MHz
Maximum Conducted Peak Output Power	Wi-Fi: 802.11b: 17.73dBm, 802.11g: 22.41dBm, 802.11n-HT20: 22.49dBm 802.11n-HT40: 21.38dBm
Modulation Technique	Wi-Fi: DSSS, OFDM
Antenna Specification*	2.0dBi (provided by the applicant)
Voltage Range	DC 5 V from Typ-C Charging Port or DC 5-24V from DC Power Supply Port or DC 3.7V from Battery
Tested Voltage	Typ-C Charging Port: 5V _{DC} , DC Power Supply Port: 12V _{DC} (Worst case)
Sample serial number	1MJ1 for Conducted and Radiated Emissions Test 1MKO for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For Wi-Fi mode, total 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

802.11b, 802.11g, 802.11n-HT20 mode was tested with Channel 1, 7 and 13.
802.11n-HT40 mode was tested with Channel 3, 7 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“MT7601USB”* software was used to test and power level as below:

Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	01	01	01
802.11g	6Mbps	01	01	01
802.11n-HT20	MCS0	01	01	01
802.11n-HT40	MCS0	01	01	01

The software and power level was provided by applicant.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Chixiang	Adapter	12620	Unknown
UNI-T	DC power supply	UTP8305M	Unknown
Lenovo	Notebook	Y430P	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-detachable USB Cable	0.8	EUT	Adapter
Un-shielding Detachable DCCable	1.0	EUT	DC power supply
Un-shielding Detachable USB Cable	0.8	EUT	Notebook
Un-shielding Un-detachable AC Cable	1.0	AC Mains	DC power supply

Block Diagram of Test Setup


For conducted emission (Type-C Charging Port power supply)

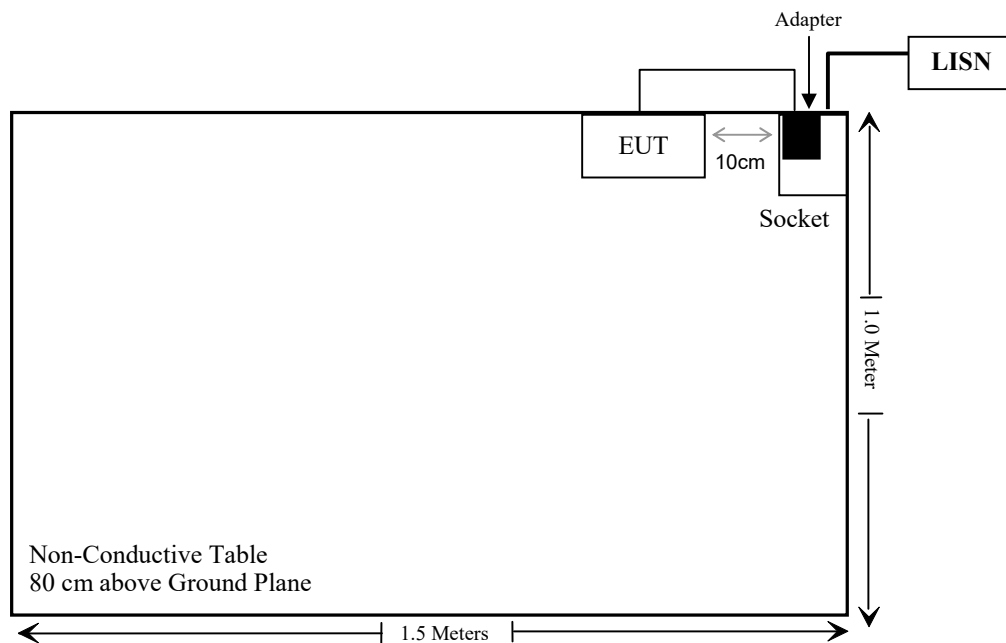

For Radiated Emissions: (Type-C Charging Port power supply)

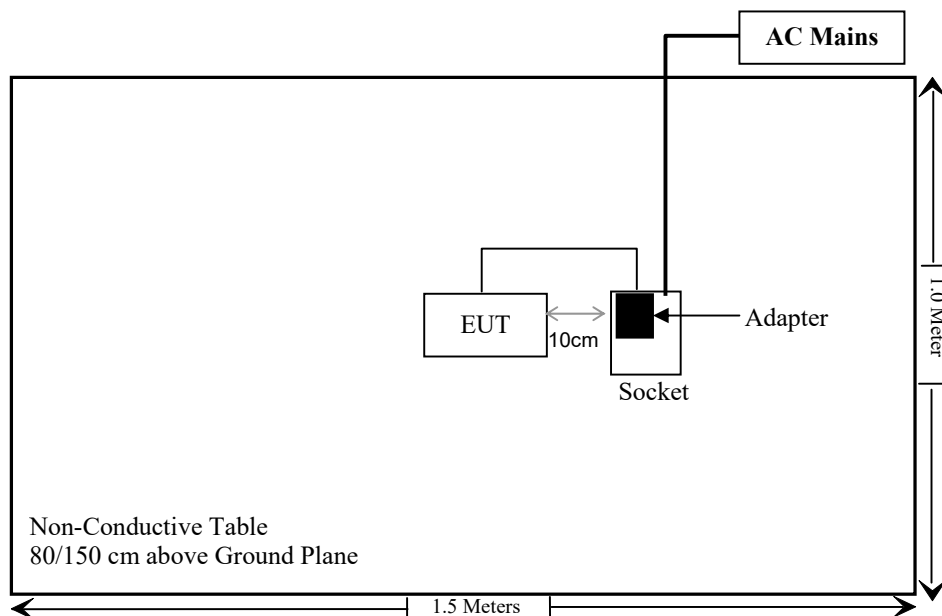

For Radiated Emissions: (DC power supply)

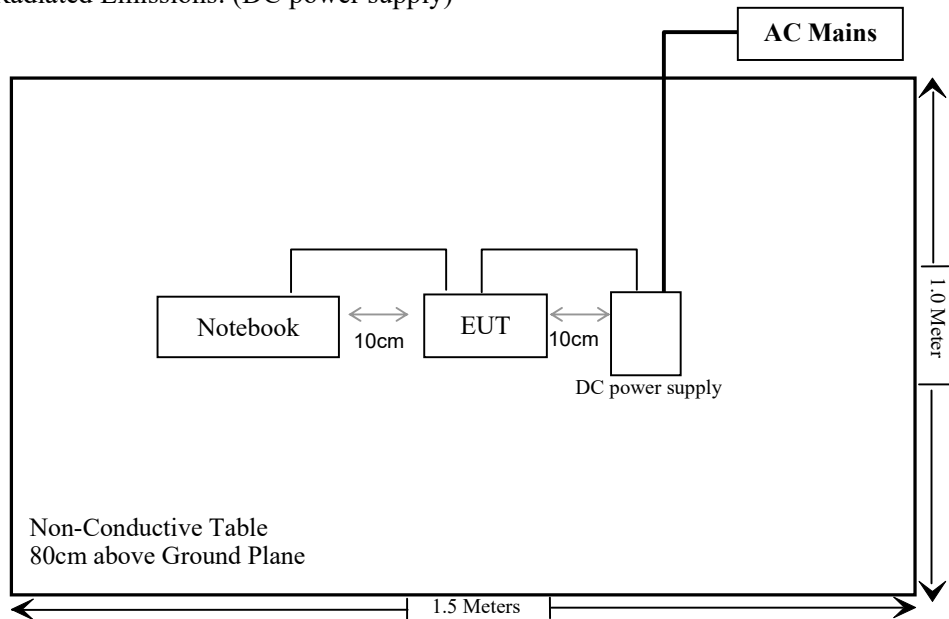

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1307 (b) (3) & §2.1091	Maximum Permissible Exposure(MPE)	Compliance
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test (30MHz-1GHz)					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test (Above 1GHz)					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/01/19	2023/01/18
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/07/06	2023/07/05
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	Each time

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Frequency (MHz)	Antenna Gain		Tune up conducted power	ERP		Evaluation Distance (m)	ERP Limit (W)
	(dBi)	(dBd)	(dBm)	(dBm)	(W)		
2412-2472	2.0	-0.15	22.5	22.35	0.172	0.2	0.768

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 2.0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

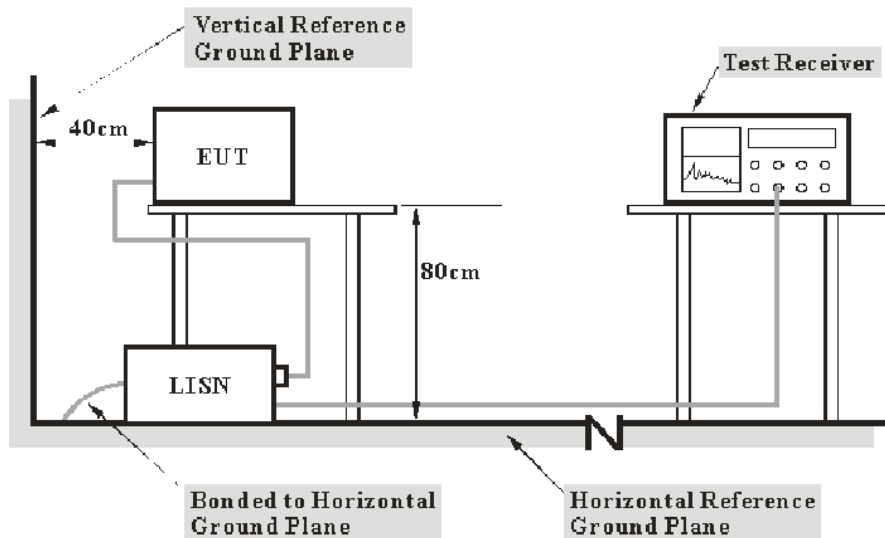

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the device was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{reading level} + \text{Transd Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Lipa on 2022-11-22.


EUT operation mode: Transmitting

Note: For DC Power supply, the EUT is used on vehicle.


Wi-Fi: (Worst case is 802.11G mode, low Channel)

Type-C Charging Port power supply

AC 120V/60 Hz, Line

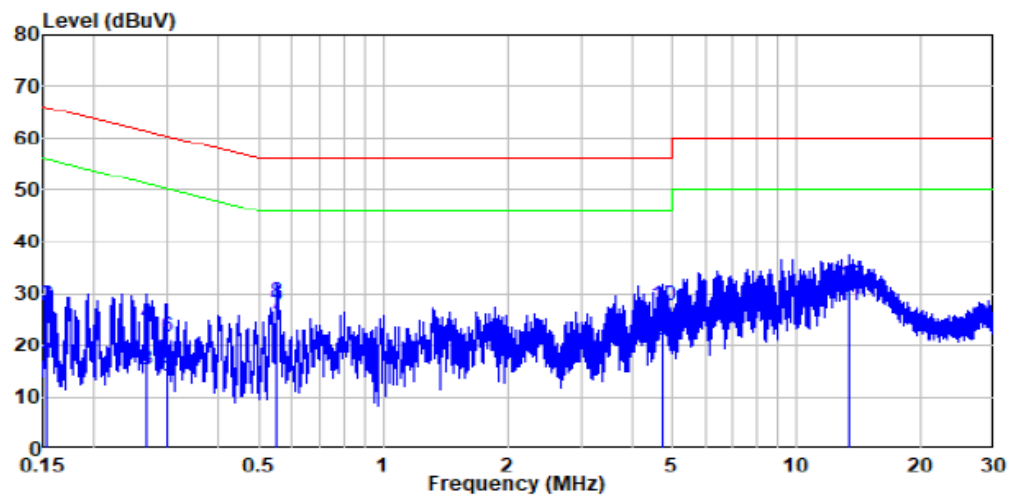

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	9.80	6.86	16.66	55.81	-39.15	Average
2	0.154	9.80	17.94	27.74	65.81	-38.07	QP
3	0.267	9.80	5.57	15.37	51.21	-35.84	Average
4	0.267	9.80	14.40	24.20	61.21	-37.01	QP
5	0.300	9.80	4.29	14.09	50.25	-36.16	Average
6	0.300	9.80	12.02	21.82	60.25	-38.43	QP
7	0.553	9.81	16.18	25.99	46.00	-20.01	Average
8	0.553	9.81	18.71	28.52	56.00	-27.48	QP
9	4.746	9.05	11.15	21.00	40.00	-25.00	Average
10	4.746	9.05	17.90	27.75	56.00	-28.25	QP
11	13.320	9.93	17.90	27.83	50.00	-22.17	Average
12	13.320	9.93	21.67	31.60	60.00	-28.40	QP

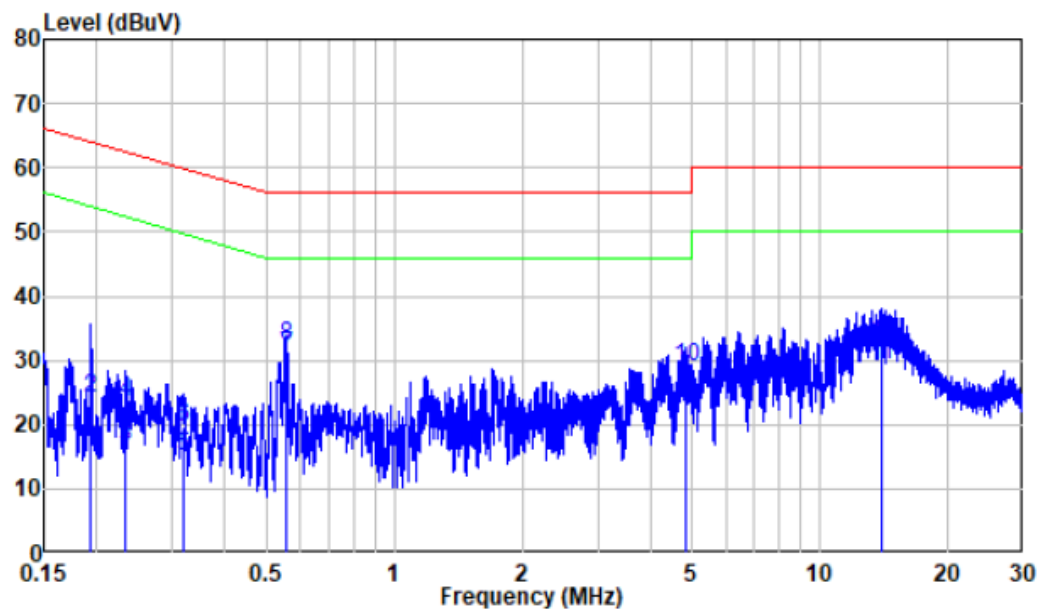AC 120V/60 Hz, Neutral

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.194	9.80	6.03	15.83	53.88	-38.05	Average
2	0.194	9.80	14.29	24.09	63.88	-39.79	QP
3	0.234	9.80	6.79	16.59	52.30	-35.71	Average
4	0.234	9.80	13.82	23.62	62.30	-38.68	QP
5	0.321	9.80	5.26	15.06	49.69	-34.63	Average
6	0.321	9.80	9.90	19.70	59.69	-39.99	QP
7	0.556	9.81	20.86	30.67	46.00	-15.33	Average
8	0.556	9.81	22.46	32.27	56.00	-23.73	QP
9	4.858	9.88	15.12	25.00	46.00	-21.00	Average
10	4.858	9.88	19.12	29.00	56.00	-27.00	QP
11	13.961	10.04	19.26	29.30	50.00	-20.70	Average
12	13.961	10.04	22.51	32.55	60.00	-27.45	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

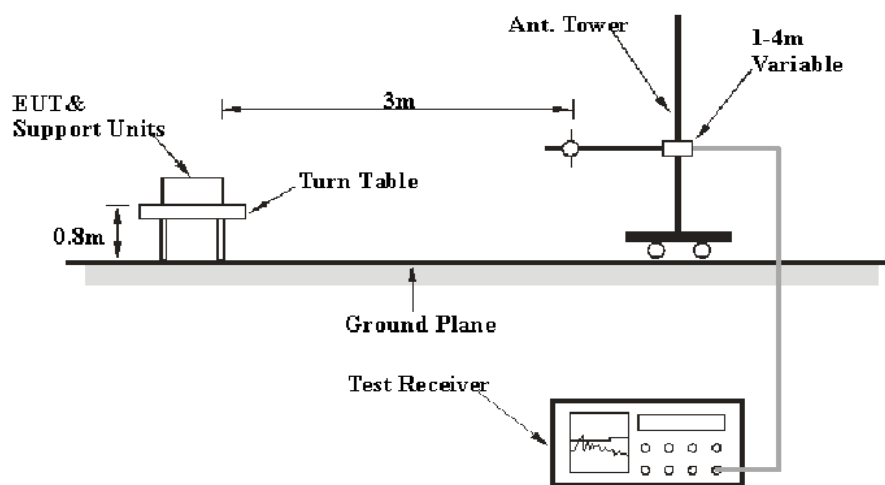

Above 1GHz:

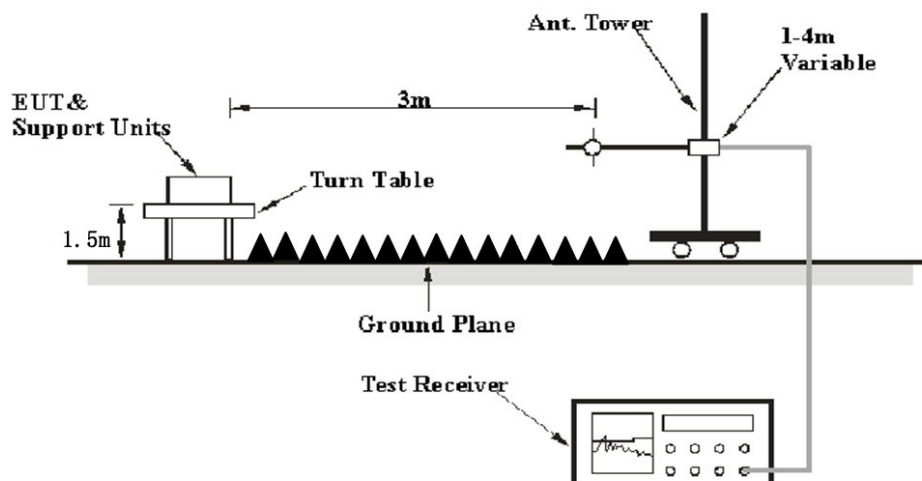

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a overlimit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

Test Data


Environmental Conditions

Temperature:	24~24.5 °C
Relative Humidity:	50~61 %
ATM Pressure:	101.0~101.1 kPa

The testing was performed by Level Li on 2022-11-23 for below 1GHz and Jeff Jiang on 2022-10-27 for above 1GHz. EUT operation mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


30MHz-1GHz: (Worst case is 802.11n20 mode, middle Channel)

Note: When the test result of peak was less than the limit of QP, just peak value were recorded.

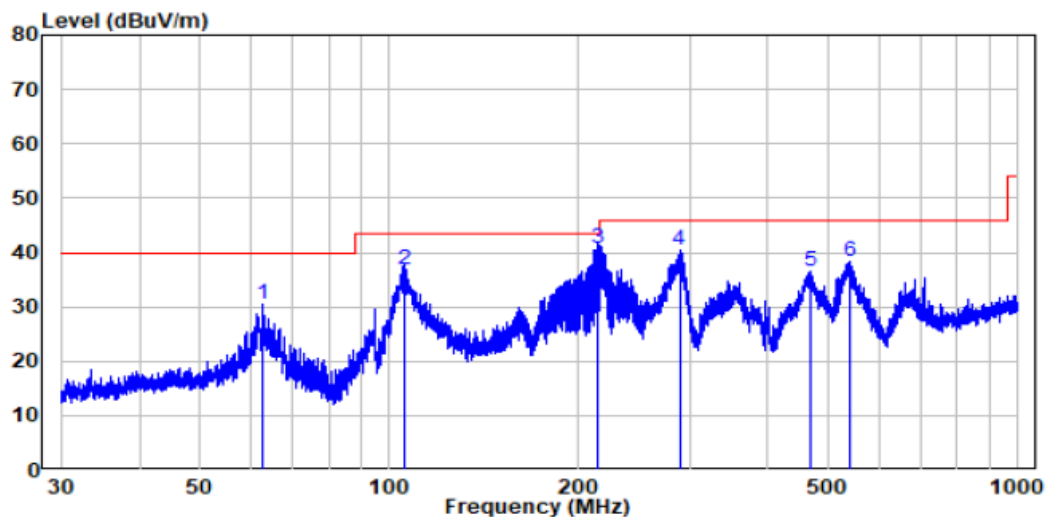
Tyep-C Charging Port Power supply:**Horizontal**

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	62.926	-11.76	42.17	30.41	40.00	-9.59	Peak
2	105.272	-11.86	48.70	36.84	43.50	-6.66	QP
3	214.608	-11.70	52.40	40.70	43.50	-2.80	QP
4	289.256	-9.32	49.69	40.37	46.00	-5.63	QP
5	466.008	-5.50	41.94	36.44	46.00	-9.56	Peak
6	540.187	-3.91	42.21	38.30	46.00	-7.70	Peak

Vertical

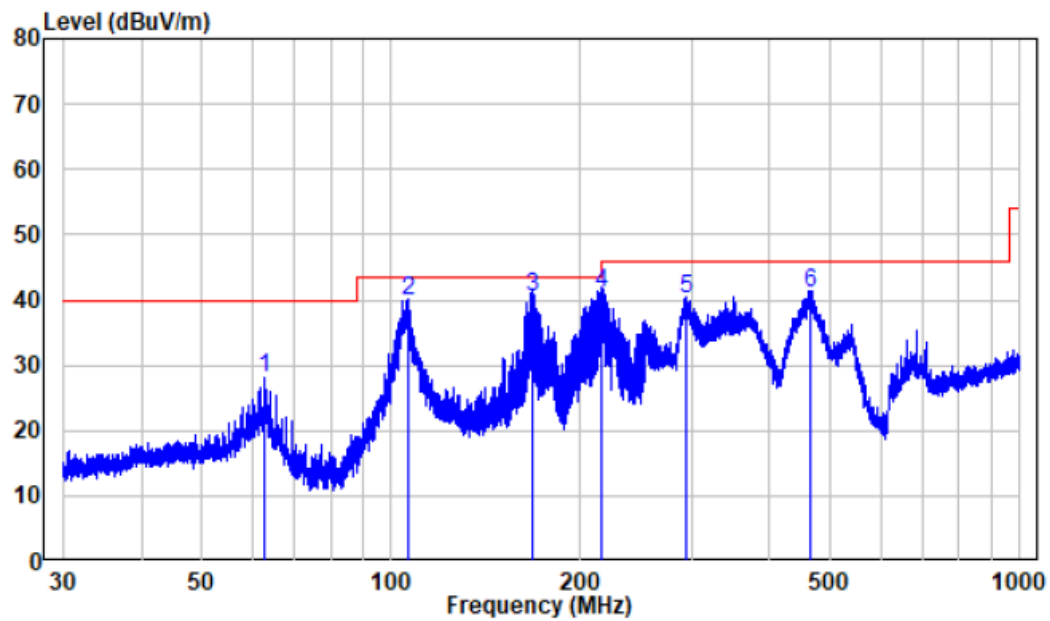


	Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	62.953	-11.77	39.92	28.15	40.00	-11.85	Peak
2	106.712	-11.95	51.71	39.76	43.50	-3.74	QP
3	168.119	-13.77	54.21	40.44	43.50	-3.06	QP
4	215.835	-11.64	52.66	41.02	43.50	-2.48	QP
5	293.985	-9.27	49.49	40.22	46.00	-5.78	QP
6	463.563	-5.46	46.50	41.04	46.00	-4.96	QP

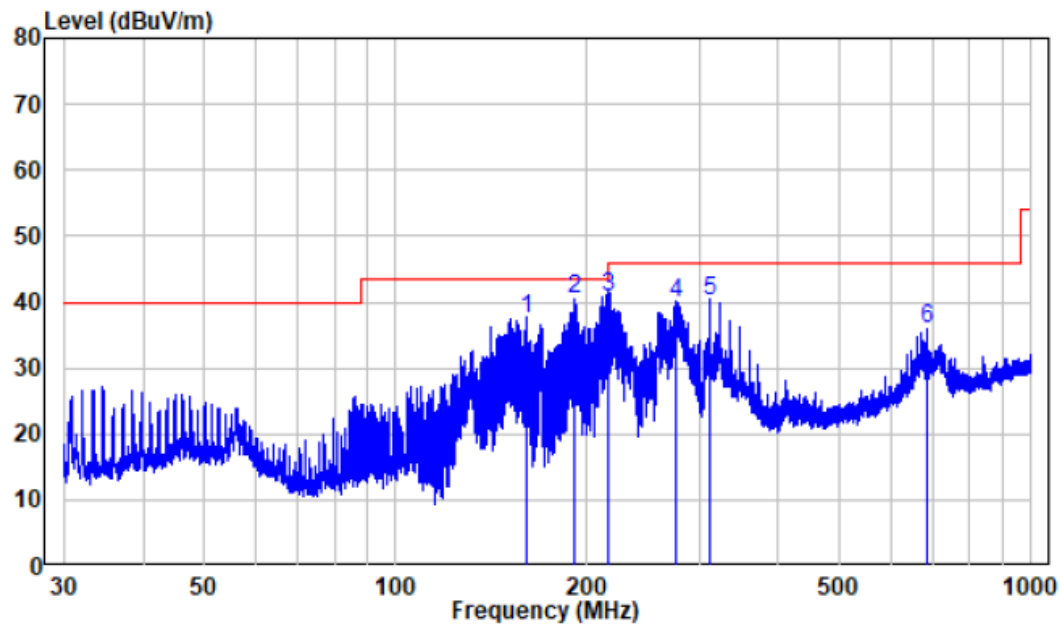DC Power Supply:**Horizontal**

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	160.346	-14.21	51.70	37.49	43.50	-6.01	QP
2	190.906	-11.43	51.78	40.35	43.50	-3.15	QP
3	215.740	-11.64	52.40	40.76	43.50	-2.74	QP
4	276.124	-9.83	49.80	39.97	46.00	-6.03	QP
5	311.906	-8.83	49.10	40.27	46.00	-5.73	QP
6	684.445	-1.51	37.56	36.05	46.00	-9.95	Peak

Vertical

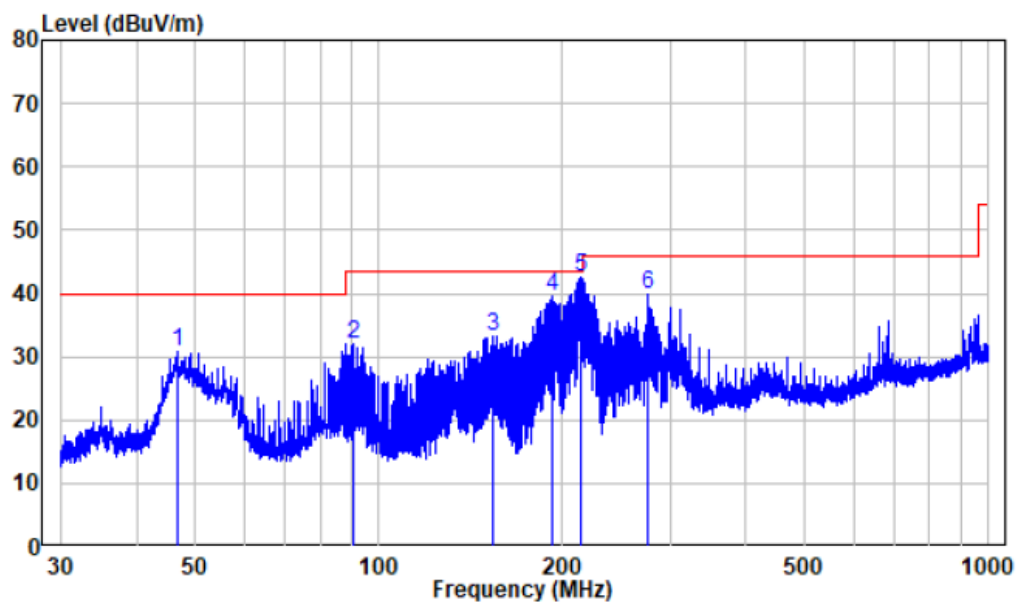

	Freq		Read	Limit	Over	Remark
	Factor	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	46.585	-10.00	40.77	30.77	40.00	-9.23 Peak
2	90.498	-13.85	45.88	32.03	43.50	-11.47 Peak
3	154.143	-15.03	48.19	33.16	43.50	-10.34 Peak
4	191.745	-11.29	50.77	39.48	43.50	-4.02 Peak
5	214.985	-11.68	54.21	42.53	43.50	-0.97 Peak
6	276.003	-9.84	49.66	39.82	46.00	-6.18 Peak

1-25 GHz: (Worst Case: Tyep-C Charging Port Power supply)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11b									
Low Channel(2412MHz)									
2310	61.80	PK	47	2.3	H	-7.24	54.56	74	-19.44
2310	48.06	AV	47	2.3	H	-7.24	40.82	54	-13.18
2310	61.57	PK	154	2.3	V	-7.24	54.33	74	-19.67
2310	48.25	AV	154	2.3	V	-7.24	41.01	54	-12.99
2390	63.37	PK	280	1.4	H	-7.22	56.15	74	-17.85
2390	50.57	AV	280	1.4	H	-7.22	43.35	54	-10.65
2390	63.27	PK	314	1.3	V	-7.22	56.05	74	-17.95
2390	49.64	AV	314	1.3	V	-7.22	42.42	54	-11.58
4824	59.55	PK	94	1.5	H	-3.52	56.03	74	-17.97
4824	51.01	AV	94	1.5	H	-3.52	47.49	54	-6.51
4824	59.80	PK	179	1.8	V	-3.52	56.28	74	-17.72
4824	52.09	AV	179	1.8	V	-3.52	48.57	54	-5.43
Middle Channel(2442MHz)									
4884	59.30	PK	282	2.2	H	-3.36	55.94	74	-18.06
4884	50.76	AV	282	2.2	H	-3.36	47.4	54	-6.60
4884	59.73	PK	294	2.4	V	-3.36	56.37	74	-17.63
4884	52.94	AV	294	2.4	V	-3.36	49.58	54	-4.42
High Channel(2472 MHz)									
2483.5	67.62	PK	186	1.5	H	-7.20	60.42	74	-13.58
2483.5	55.87	AV	186	1.5	H	-7.20	48.67	54	-5.33
2483.5	64.13	PK	296	1.3	V	-7.20	56.93	74	-17.07
2483.5	50.68	AV	296	1.3	V	-7.20	43.48	54	-10.52
2500	63.71	PK	82	2	H	-7.18	56.53	74	-17.47
2500	49.89	AV	82	2	H	-7.18	42.71	54	-11.29
2500	63.51	PK	111	1.3	V	-7.18	56.33	74	-17.67
2500	49.54	AV	111	1.3	V	-7.18	42.36	54	-11.64
4944	58.48	PK	79	1.1	H	-3.07	55.41	74	-18.59
4944	51.53	AV	79	1.1	H	-3.07	48.46	54	-5.54
4944	60.03	PK	78	2	V	-3.07	56.96	74	-17.04
4944	54.06	AV	78	2	V	-3.07	50.99	54	-3.01

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11g									
Low Channel(2412MHz)									
2310	62.63	PK	310	2	H	-7.24	55.39	74	-18.61
2310	48.92	AV	310	2	H	-7.24	41.68	54	-12.32
2310	62.18	PK	252	1.2	V	-7.24	54.94	74	-19.06
2310	48.52	AV	252	1.2	V	-7.24	41.28	54	-12.72
2390	74.08	PK	319	1.8	H	-7.22	66.86	74	-7.14
2390	57.01	AV	319	1.8	H	-7.22	49.79	54	-4.21
2390	73.08	PK	80	1.1	V	-7.22	65.86	74	-8.14
2390	53.97	AV	80	1.1	V	-7.22	46.75	54	-7.25
4824	56.78	PK	87	1	H	-3.52	53.26	74	-20.74
4824	56.63	PK	257	1	V	-3.52	53.11	74	-20.89
Middle Channel(2442MHz)									
4884	57.04	PK	285	1	H	-3.36	53.68	74	-20.32
4884	57.04	PK	339	1	V	-3.36	53.68	74	-20.32
High Channel(2472MHz)									
2483.5	77.89	PK	9	2.1	H	-7.20	70.69	74	-3.31
2483.5	59.12	AV	9	2.1	H	-7.20	51.92	54	-2.08
2483.5	71.10	PK	289	1.2	V	-7.20	63.9	74	-10.10
2483.5	55.48	AV	289	1.2	V	-7.20	48.28	54	-5.72
2500	64.79	PK	31	2.4	H	-7.18	57.61	74	-16.39
2500	50.63	AV	31	2.4	H	-7.18	43.45	54	-10.55
2500	63.56	PK	242	2.2	V	-7.18	56.38	74	-17.62
2500	49.91	AV	242	2.2	V	-7.18	42.73	54	-11.27
4944	58.47	PK	158	1.4	H	-3.07	55.40	74	-18.60
4944	45.29	AV	158	1.4	H	-3.07	42.22	54	-11.78
4944	59.93	PK	184	1.5	V	-3.07	56.86	74	-17.14
4944	46.67	AV	184	1.5	V	-3.07	43.60	54	-10.40

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11n20									
Low Channel(2412MHz)									
2310	62.68	PK	73	1.3	H	-7.24	55.44	74	-18.56
2310	48.86	AV	73	1.3	H	-7.24	41.62	54	-12.38
2310	62.40	PK	213	1.9	V	-7.24	55.16	74	-18.84
2310	48.41	AV	213	1.9	V	-7.24	41.17	54	-12.83
2390	78.85	PK	148	2.4	H	-7.22	71.63	74	-2.37
2390	59.09	AV	148	2.4	H	-7.22	51.87	54	-2.13
2390	73.13	PK	145	2.5	V	-7.22	65.91	74	-8.09
2390	55.31	AV	145	2.5	V	-7.22	48.09	54	-5.91
4824	58.52	PK	222	1.6	H	-3.52	55.00	74	-19.00
4824	45.47	AV	222	1.6	H	-3.52	41.95	54	-12.05
4824	59.57	PK	193	1.3	V	-3.52	56.05	74	-17.95
4824	45.95	AV	193	1.3	V	-3.52	42.43	54	-11.57
Middle Channel(2442MHz)									
4884	58.79	PK	20	1.7	H	-3.36	55.43	74	-18.57
4884	44.90	AV	20	1.7	H	-3.36	41.54	54	-12.46
4884	60.55	PK	173	1.2	V	-3.36	57.19	74	-16.81
4884	46.11	AV	173	1.2	V	-3.36	42.75	54	-11.25
High Channel(2472MHz)									
2483.5	78.14	PK	263	1.4	H	-7.20	70.94	74	-3.06
2483.5	59.24	AV	263	1.4	H	-7.20	52.04	54	-1.96
2483.5	72.36	PK	231	1.1	V	-7.20	65.16	74	-8.84
2483.5	56.65	AV	231	1.1	V	-7.20	49.45	54	-4.55
2500	66.40	PK	83	1.9	H	-7.18	59.22	74	-14.78
2500	50.78	AV	83	1.9	H	-7.18	43.6	54	-10.40
2500	63.31	PK	128	1.9	V	-7.18	56.13	74	-17.87
2500	49.80	AV	128	1.9	V	-7.18	42.62	54	-11.38
4944	58.72	PK	140	1.7	H	-3.07	55.65	74	-18.35
4944	46.57	AV	140	1.7	H	-3.07	43.50	54	-10.50
4944	60.98	PK	311	1.8	V	-3.07	57.91	74	-16.09
4944	46.45	AV	311	1.8	V	-3.07	43.38	54	-10.62

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11n40									
Low Channel(2422MHz)									
2310	61.81	PK	114	1.8	H	-7.24	54.57	74	-19.43
2310	49.56	AV	114	1.8	H	-7.24	42.32	54	-11.68
2310	61.95	PK	138	1.5	V	-7.24	54.71	74	-19.29
2310	48.91	AV	138	1.5	V	-7.24	41.67	54	-12.33
2390	77.21	PK	255	1.8	H	-7.22	69.99	74	-4.01
2390	58.32	AV	255	1.8	H	-7.22	51.10	54	-2.90
2390	74.39	PK	225	2	V	-7.22	67.17	74	-6.83
2390	57.12	AV	225	2	V	-7.22	49.90	54	-4.10
4844	57.69	PK	201	1.5	H	-3.54	54.15	74	-19.85
4844	44.62	AV	201	1.5	H	-3.54	41.08	54	-12.92
4844	57.90	PK	199	2	V	-3.54	54.36	74	-19.64
4844	45.42	AV	199	2	V	-3.54	41.88	54	-12.12
Middle Channel(2442MHz)									
4884	57.51	PK	262	1.8	H	-3.36	54.15	74	-19.85
4884	44.54	AV	262	1.8	H	-3.36	41.18	54	-12.82
4884	58.27	PK	24	1.1	V	-3.36	54.91	74	-19.09
4884	45.40	AV	24	1.1	V	-3.36	42.04	54	-11.96
High Channel(2462MHz)									
2483.5	78.34	PK	328	2.5	H	-7.20	71.14	74	-2.86
2483.5	59.49	AV	328	2.5	H	-7.20	52.29	54	-1.71
2483.5	69.52	PK	43	2	V	-7.20	62.32	74	-11.68
2483.5	54.79	AV	43	2	V	-7.20	47.59	54	-6.41
2500	69.95	PK	38	2.4	H	-7.18	62.77	74	-11.23
2500	53.69	AV	38	2.4	H	-7.18	46.51	54	-7.49
2500	65.74	PK	82	1.6	V	-7.18	58.56	74	-15.44
2500	51.08	AV	82	1.6	V	-7.18	43.9	54	-10.10
4924	57.36	PK	172	1.3	H	-3.16	54.20	74	-19.80
4924	44.50	AV	172	1.3	H	-3.16	41.34	54	-12.66
4924	57.86	PK	105	2.1	V	-3.16	54.70	74	-19.30
4924	45.49	AV	105	2.1	V	-3.16	42.33	54	-11.67

Note:



Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit

The other spurious emission which is 20dB below to the limit was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

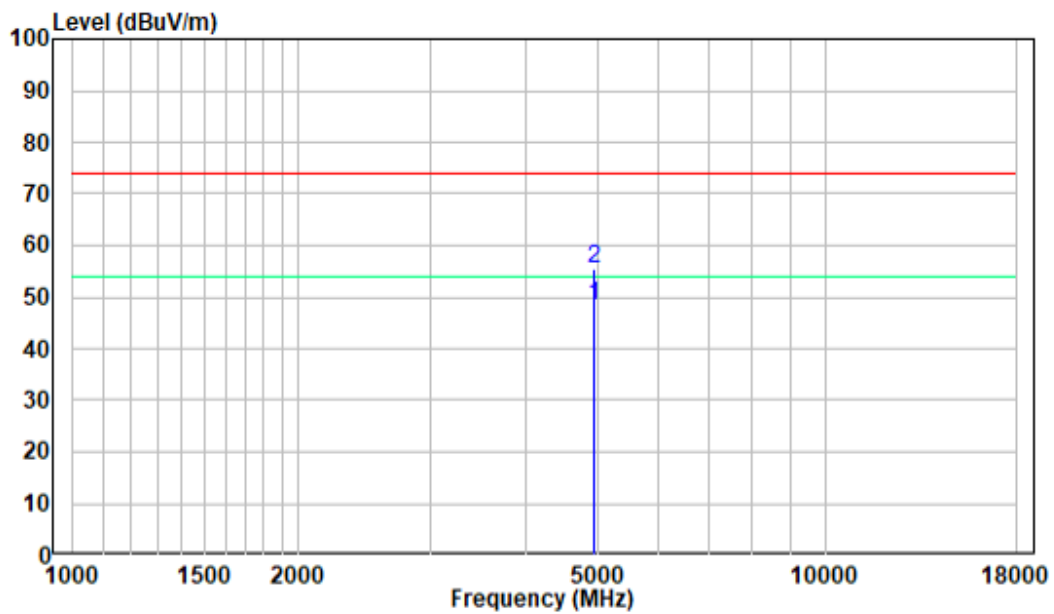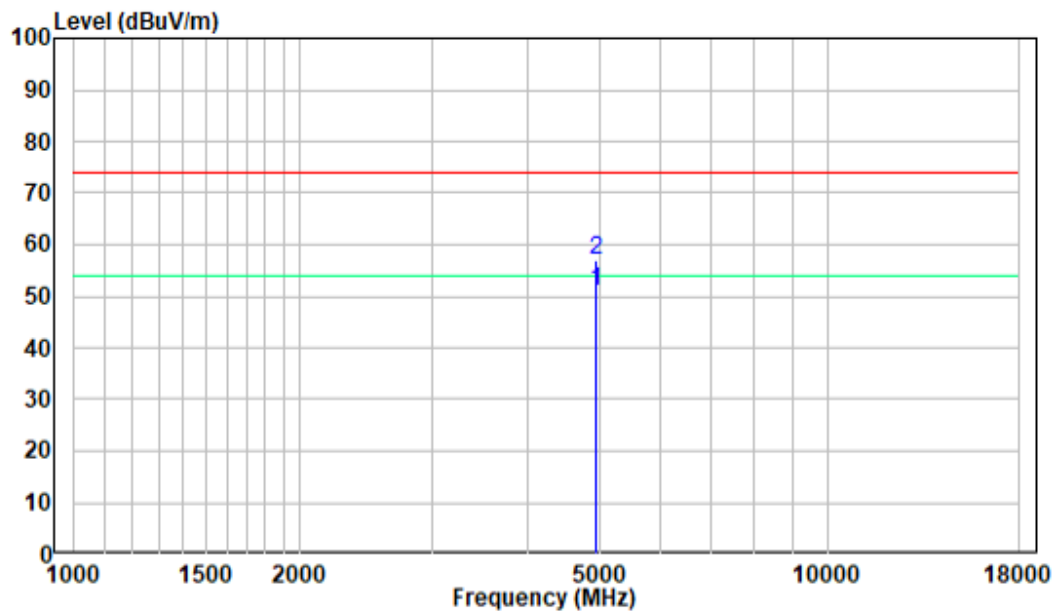1-18 GHz:**Pre-scan Plots:****802.11 b High Channel
Horizontal****Vertical**


18 -25GHz:

Pre-scan Plots:

802.11 b High Channel
Horizontal

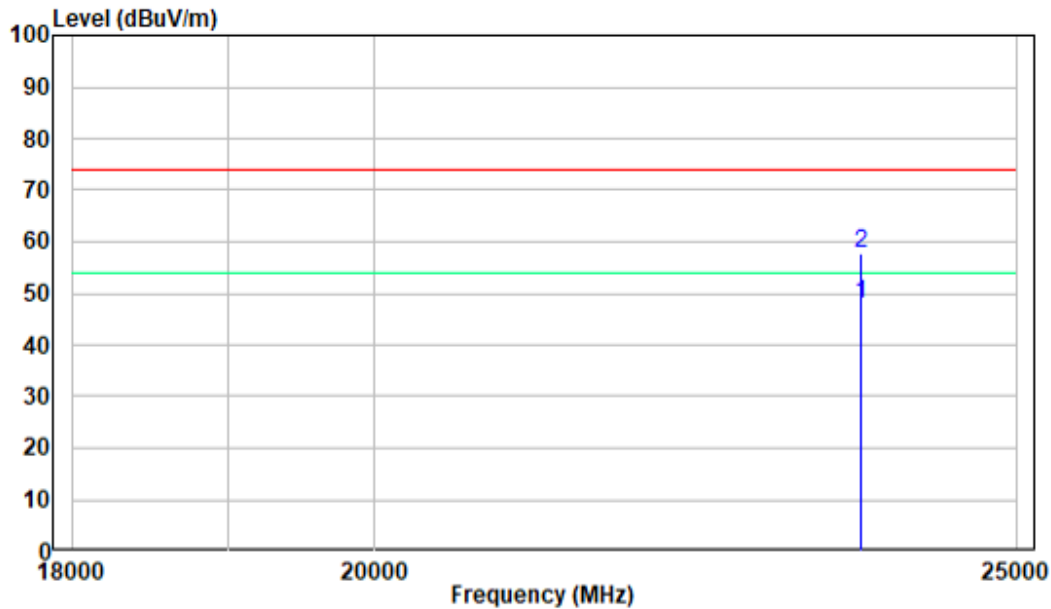

Vertical

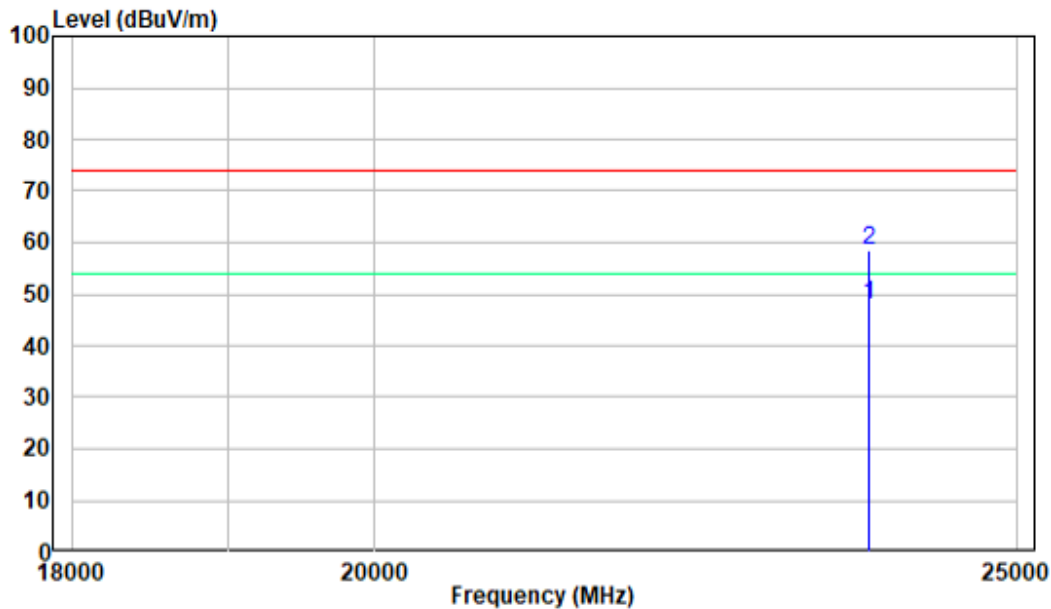


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

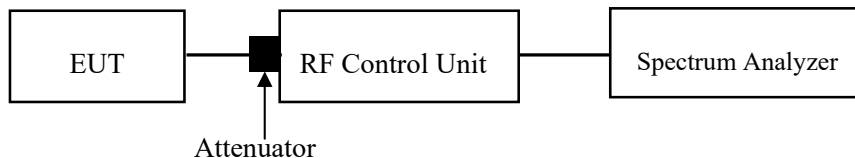

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2022-10-26 and 2022-11-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

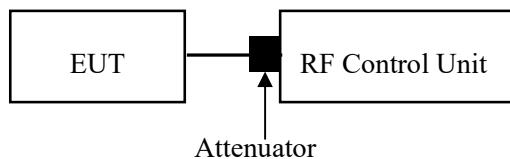

Note: the RF control unit has a built-in power sensor

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2022-10-26.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

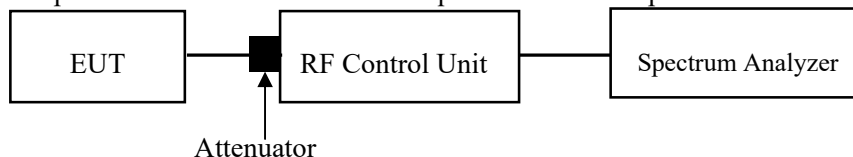

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2022-10-26.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the Appendix.


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

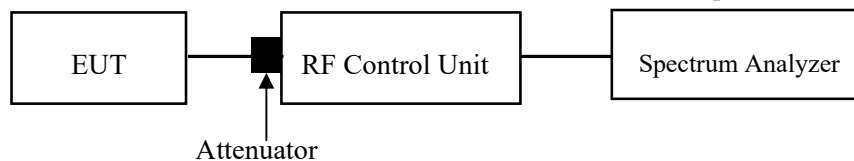

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2022-10-26.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.

APPENDIX


Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.56	0.5	PASS
		2442	9.56	0.5	PASS
		2472	9.56	0.5	PASS
11G	Ant1	2412	16.32	0.5	PASS
		2442	16.32	0.5	PASS
		2472	16.32	0.5	PASS
11N20SISO	Ant1	2412	17.16	0.5	PASS
		2442	17.04	0.5	PASS
		2472	17.04	0.5	PASS
11N40SISO	Ant1	2422	35.28	0.5	PASS
		2442	35.28	0.5	PASS
		2462	35.44	0.5	PASS

Test Graphs

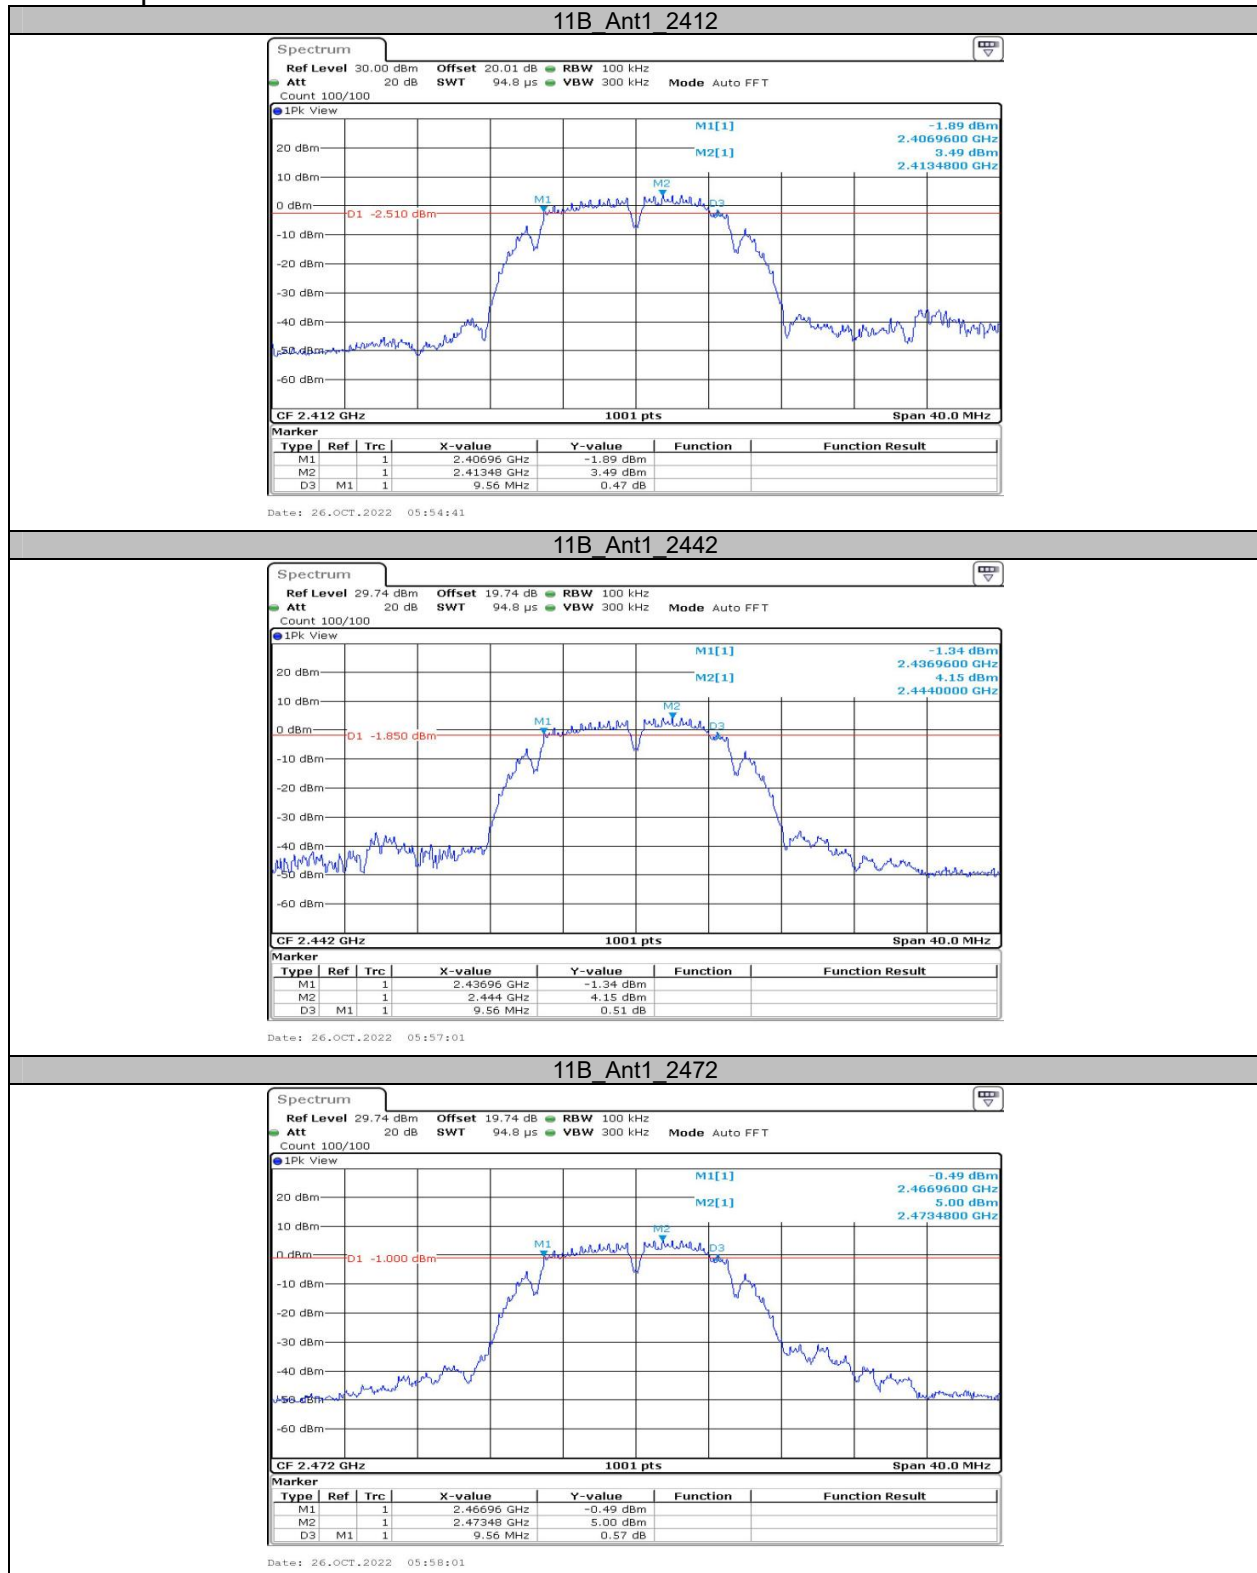


11G_Ant1_2412

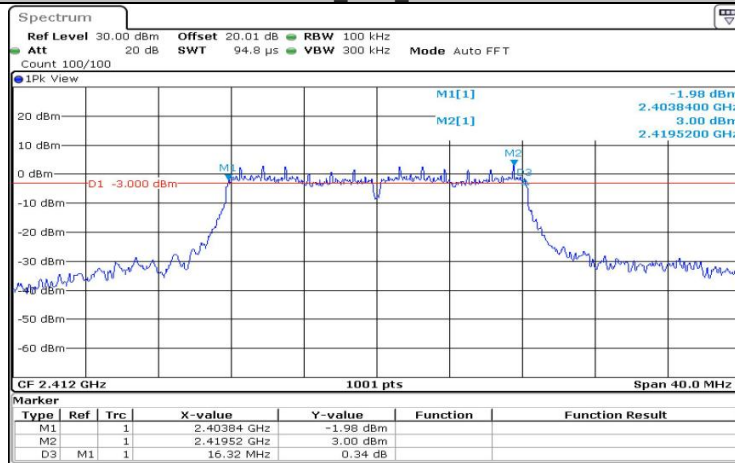


Date: 26.OCT.2022 05:59:58

11G_Ant1_2442

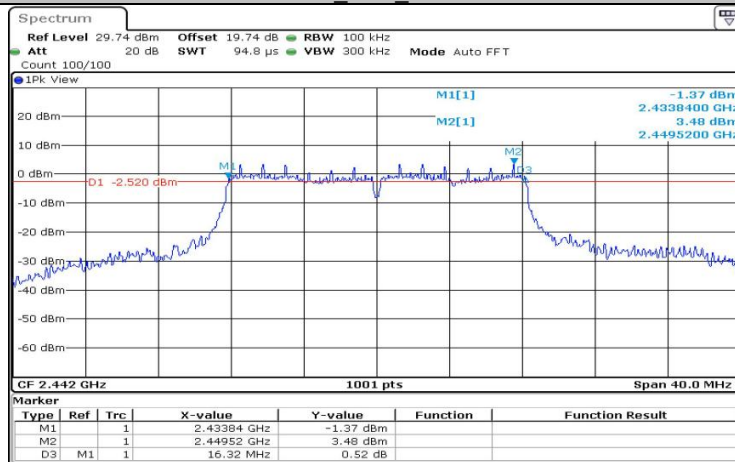


Date: 26.OCT.2022 06:01:19

11G_Ant1_2472

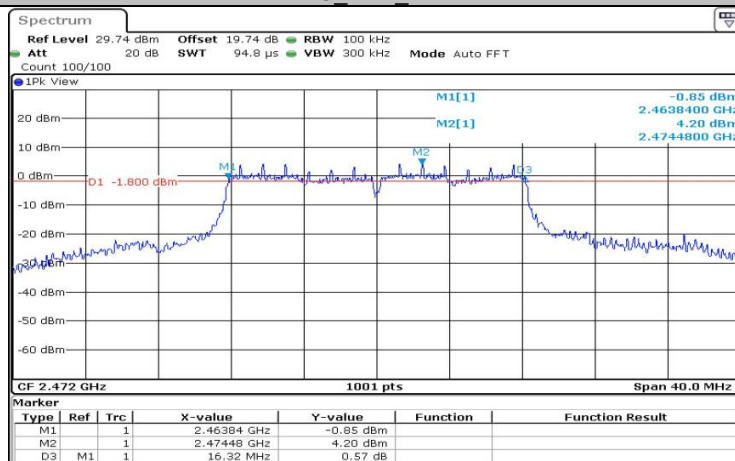


Date: 26.OCT.2022 06:02:15

11N20SISO Ant1 2412

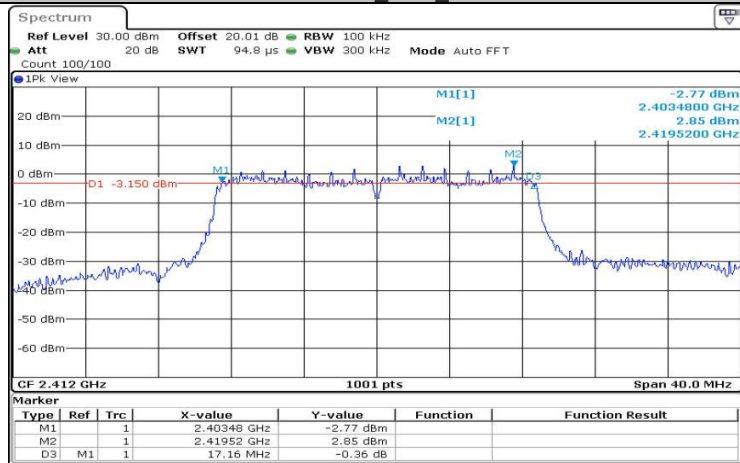


Date: 26.OCT.2022 06:03:47

11N20SISO Ant1 2442

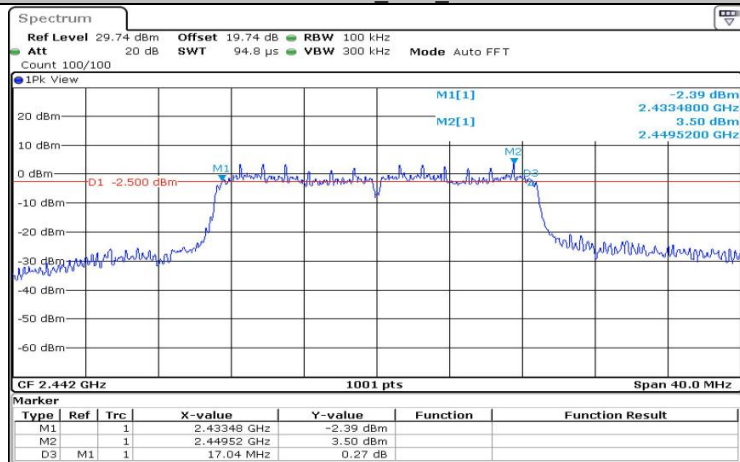


Date: 26.OCT.2022 06:05:12

11N20SISO Ant1 2472

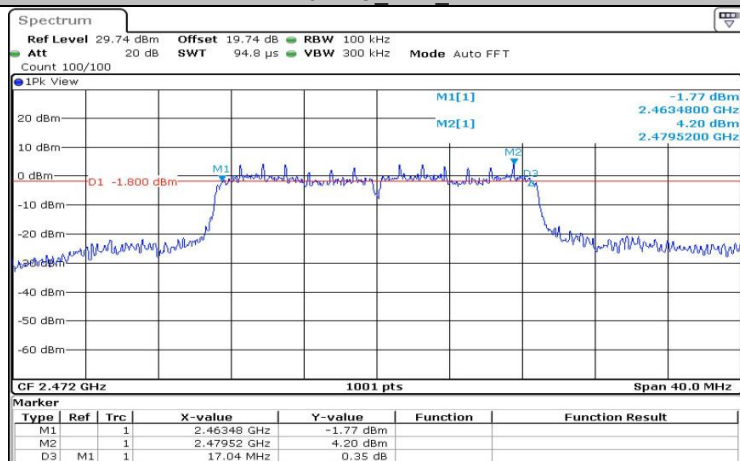


Date: 26.OCT.2022 06:16:07

11N40SISO Ant1 2422

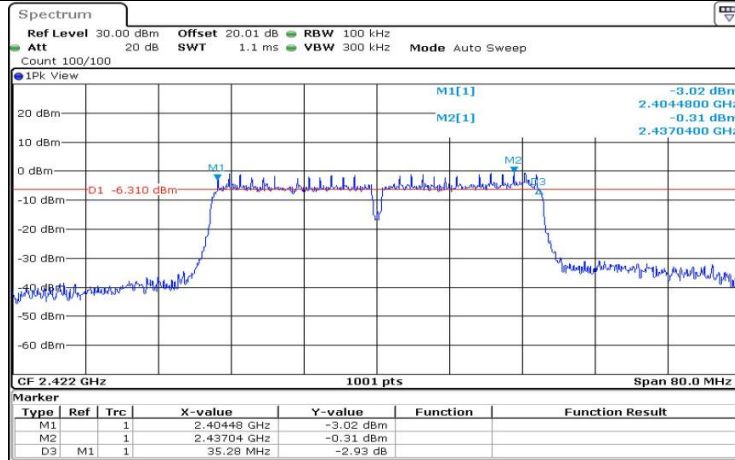


Date: 26.OCT.2022 06:07:18

11N40SISO Ant1 2442

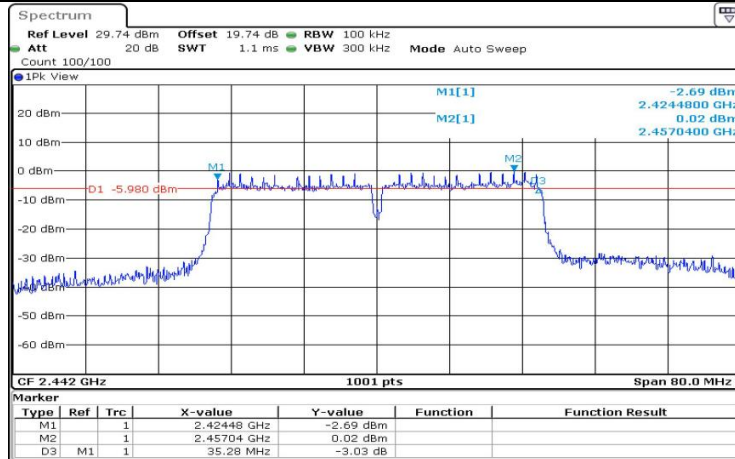

Date: 26.OCT.2022 06:08:40

11N40SISO Ant1 2462

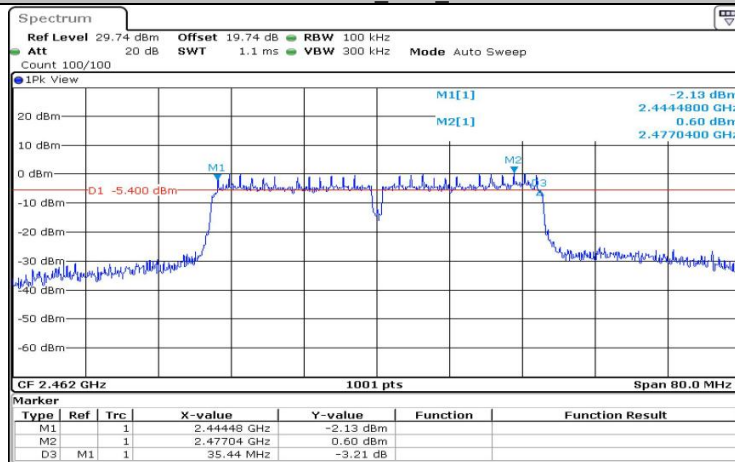


Date: 26.OCT.2022 06:09:39


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.348	---	---
		2442	12.308	---	---
		2472	12.348	---	---
11G	Ant1	2412	17.383	---	---
		2442	17.702	---	---
		2472	18.422	---	---
11N20SISO	Ant1	2412	18.182	---	---
		2442	18.981	---	---
		2472	18.182	---	---
11N40SISO	Ant1	2422	36.523	---	---
		2442	36.603	---	---
		2462	36.843	---	---


Test Graphs

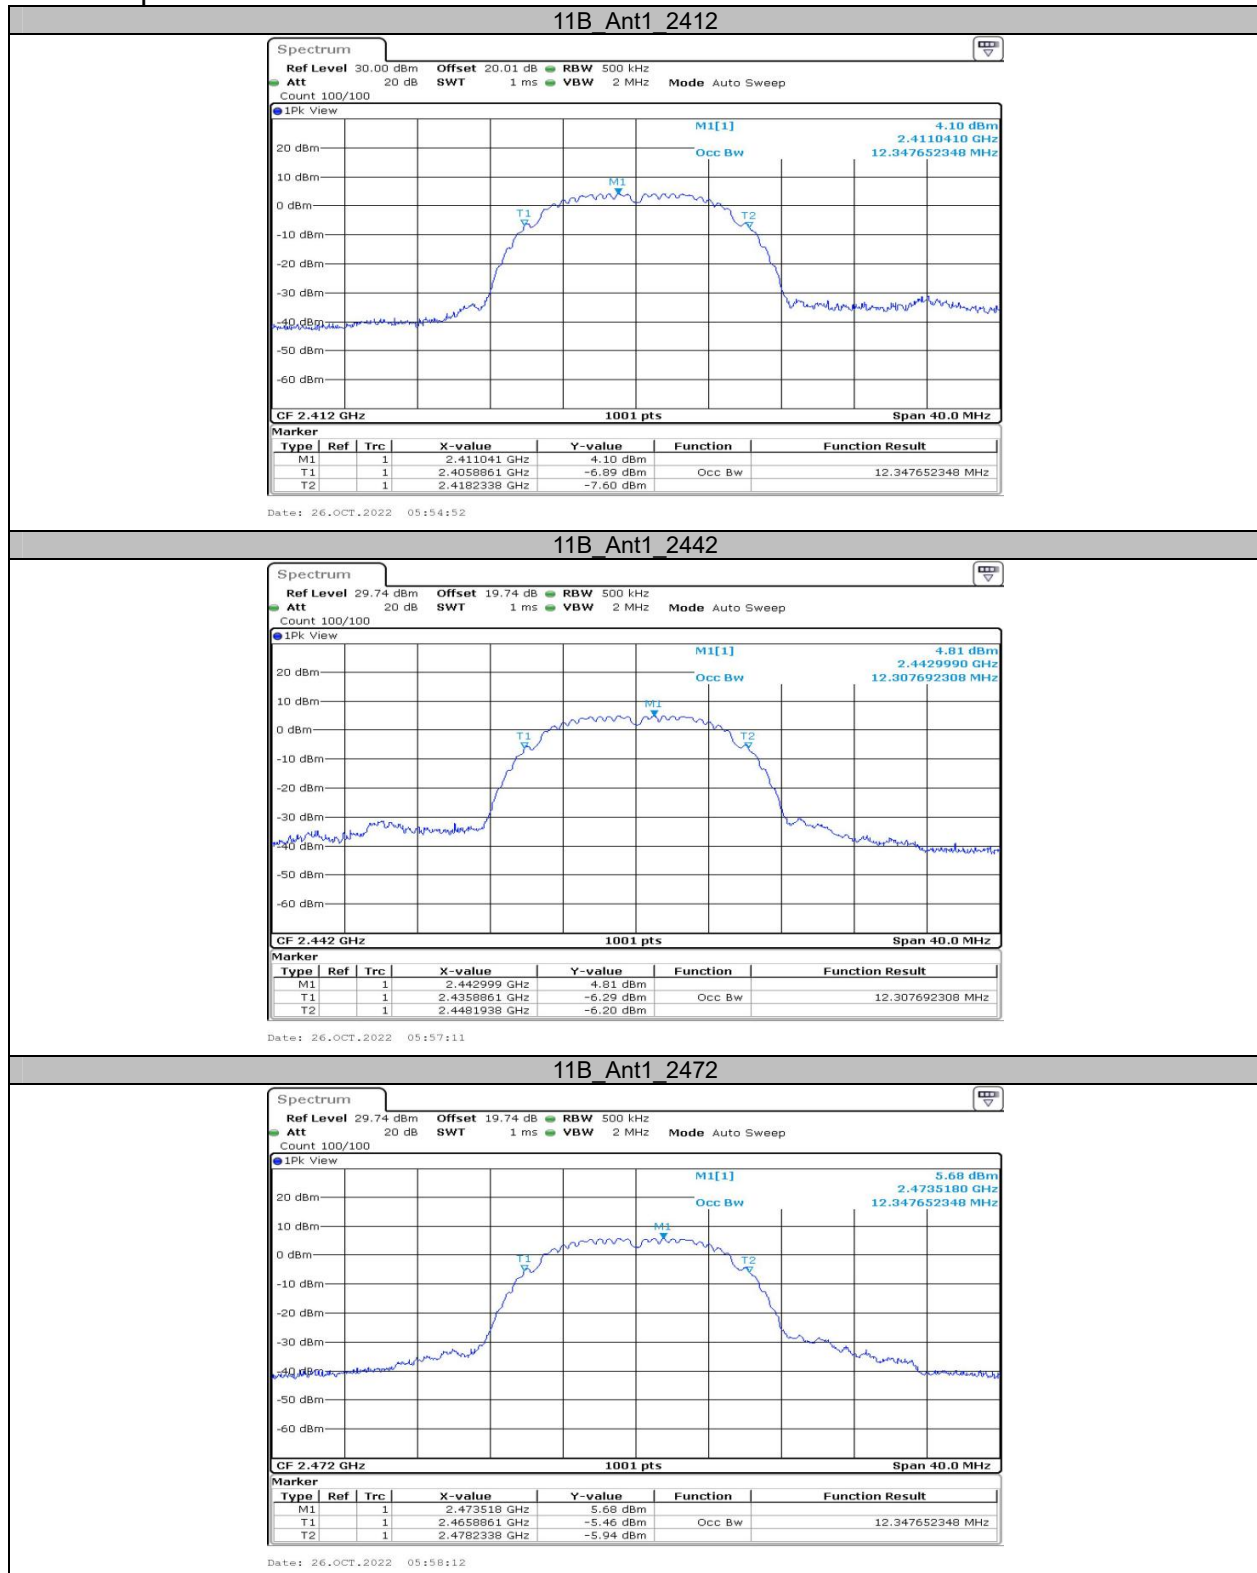

11G_Ant1_2412

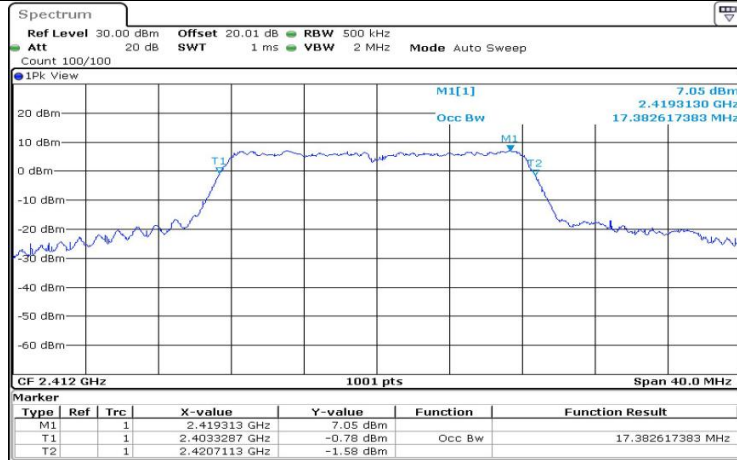


11G_Ant1_2442

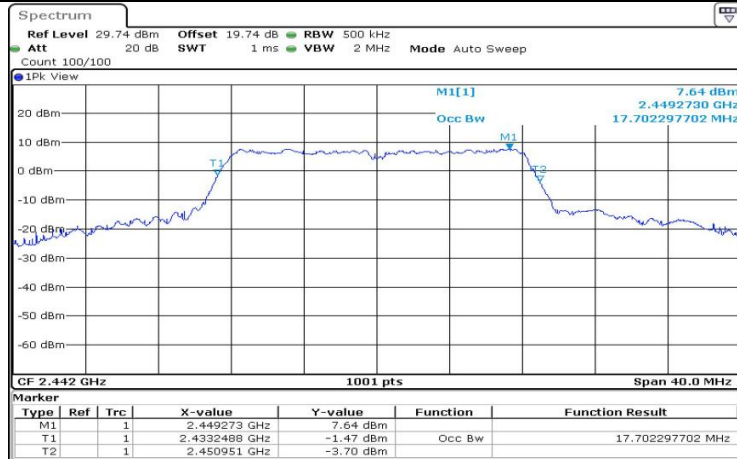


11G_Ant1_2472




11N20SISO Ant1 2412

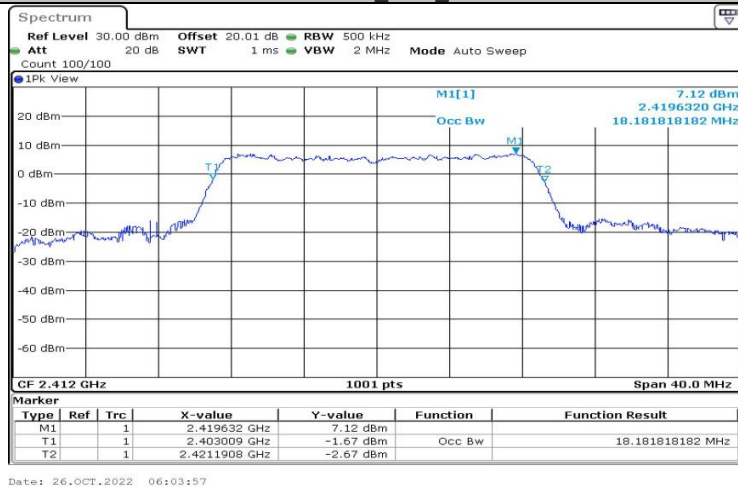


11N20SISO Ant1 2442

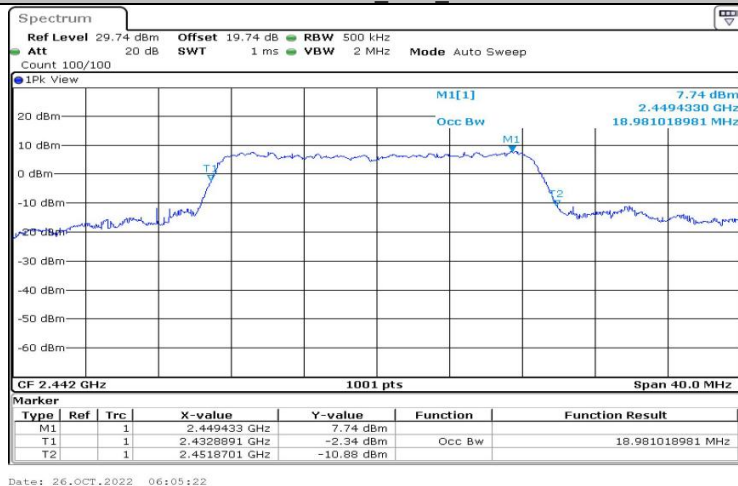

11N20SISO Ant1 2472

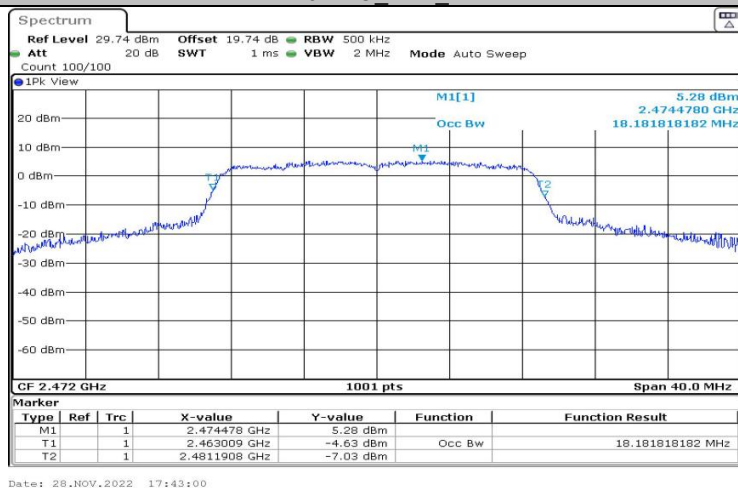


11N40SISO Ant1 2422

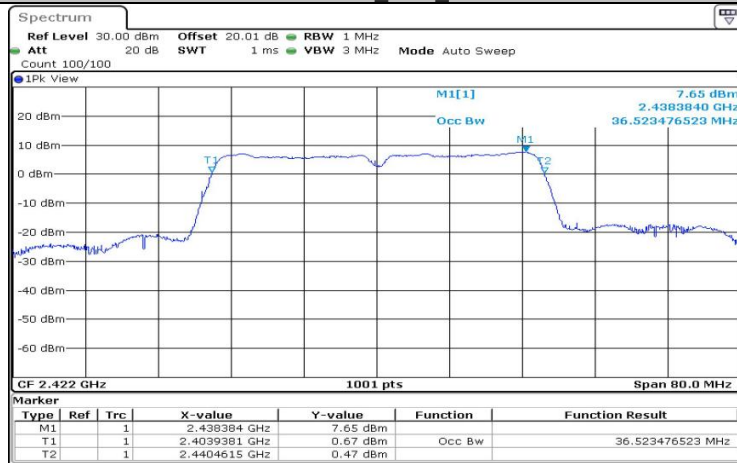


Date: 26.OCT.2022 06:07:29

11N40SISO Ant1 2442

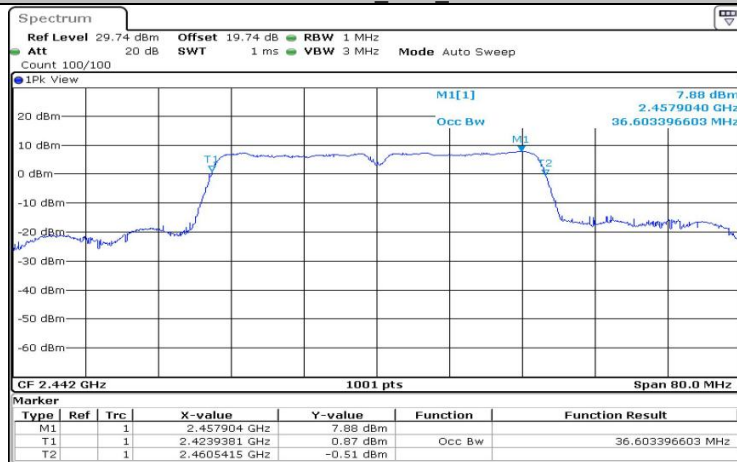

Date: 26.OCT.2022 06:08:51

11N40SISO Ant1 2462

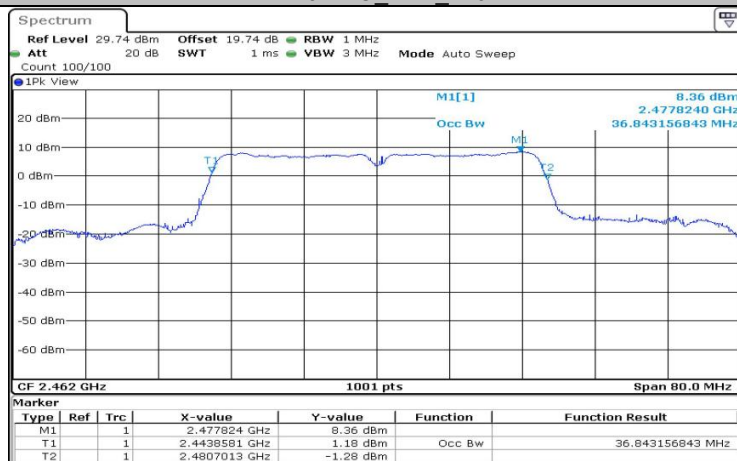

Date: 26.OCT.2022 06:09:49


**Appendix C: Maximum conducted output power
Test Result**

Test Mode	Antenna	Frequency[MHz]	Peak Power [dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	16.18	≤30.00	PASS
		2442	16.91	≤30.00	PASS
		2472	17.73	≤30.00	PASS
11G	Ant1	2412	21.05	≤30.00	PASS
		2442	21.77	≤30.00	PASS
		2472	22.41	≤30.00	PASS
11N20SISO	Ant1	2412	21.25	≤30.00	PASS
		2442	21.95	≤30.00	PASS
		2472	22.49	≤30.00	PASS
11N40SISO	Ant1	2422	20.45	≤30.00	PASS
		2442	20.81	≤30.00	PASS
		2462	21.38	≤30.00	PASS


**Appendix D: Maximum power spectral density
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	1.62	≤8.00	PASS
		2442	1.87	≤8.00	PASS
		2472	3.19	≤8.00	PASS
11G	Ant1	2412	-12.69	≤8.00	PASS
		2442	-12.15	≤8.00	PASS
		2472	-12.05	≤8.00	PASS
11N20SISO	Ant1	2412	-11.83	≤8.00	PASS
		2442	-12.52	≤8.00	PASS
		2472	-11.03	≤8.00	PASS
11N40SISO	Ant1	2422	-15.69	≤8.00	PASS
		2442	-15.98	≤8.00	PASS
		2462	-15.09	≤8.00	PASS


Test Graphs

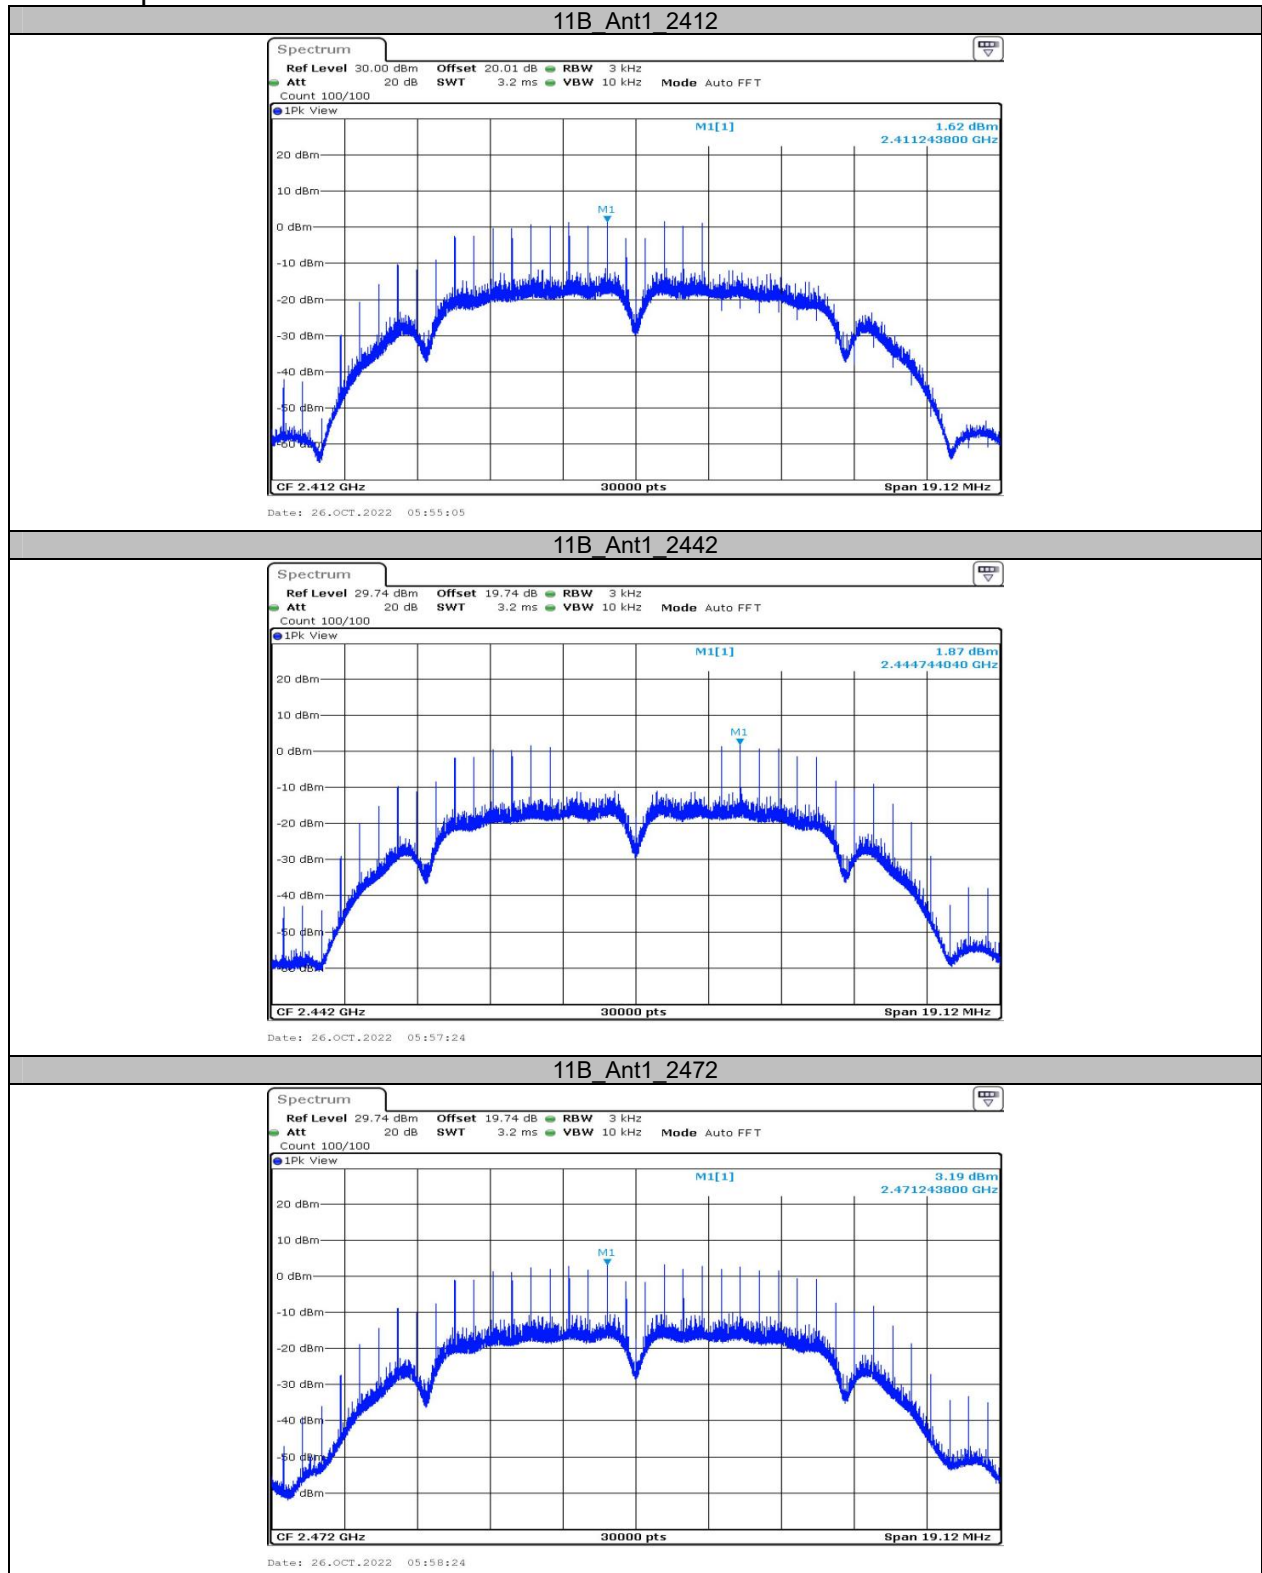


11G_Ant1_2412

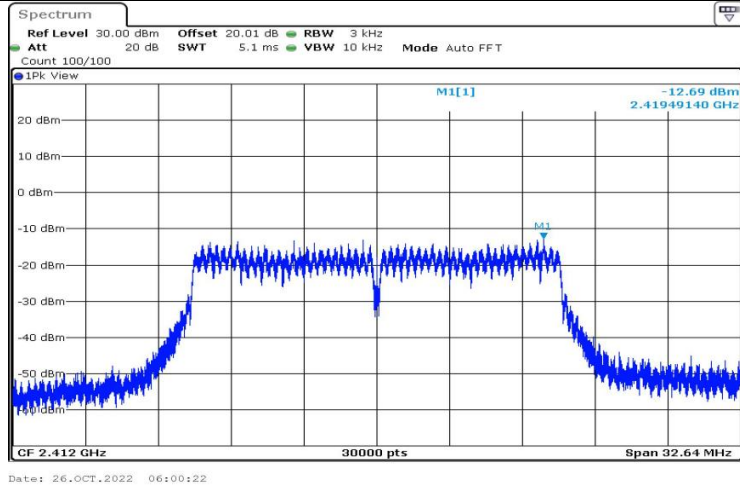


11G_Ant1_2442

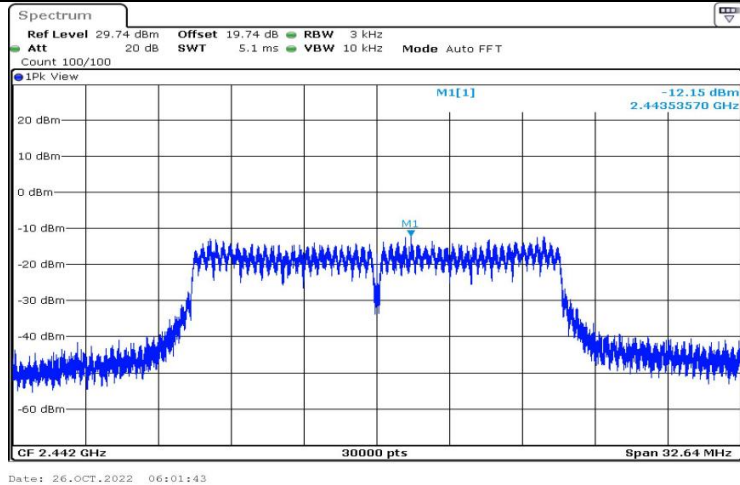


11G_Ant1_2472

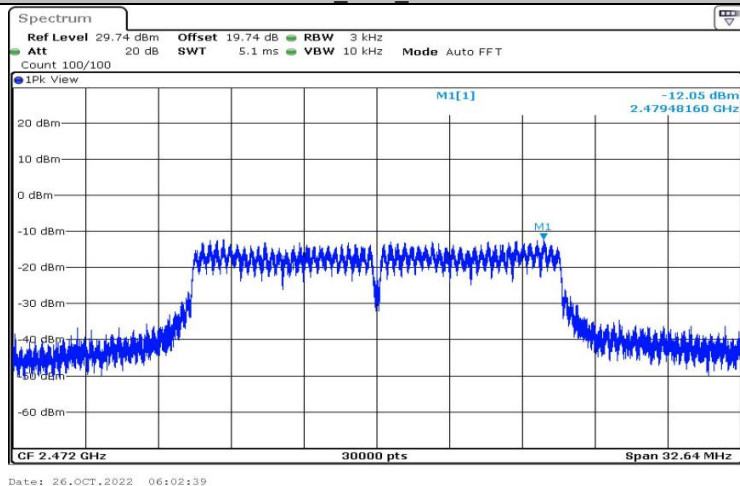


11N20SISO Ant1 2412

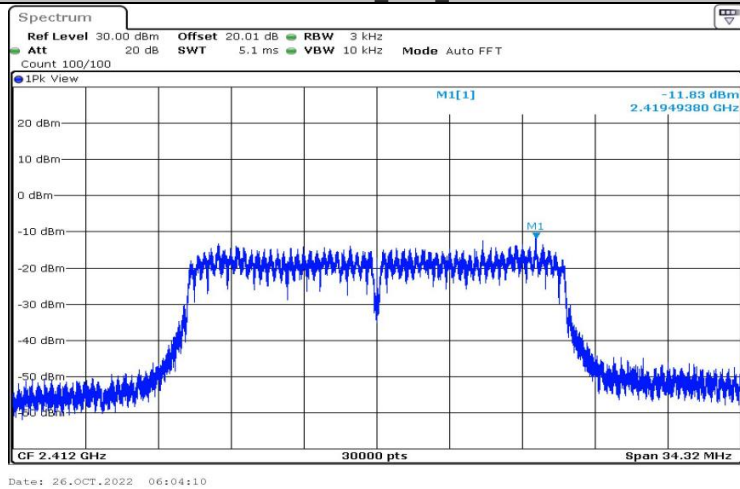


11N20SISO Ant1 2442

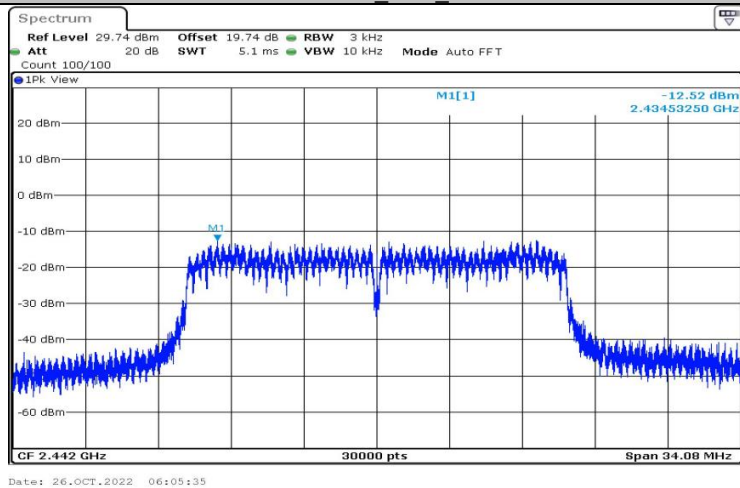


11N20SISO Ant1 2472

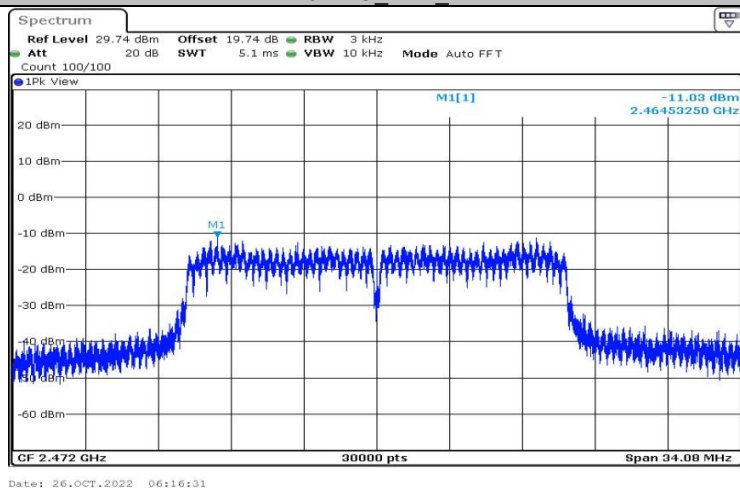


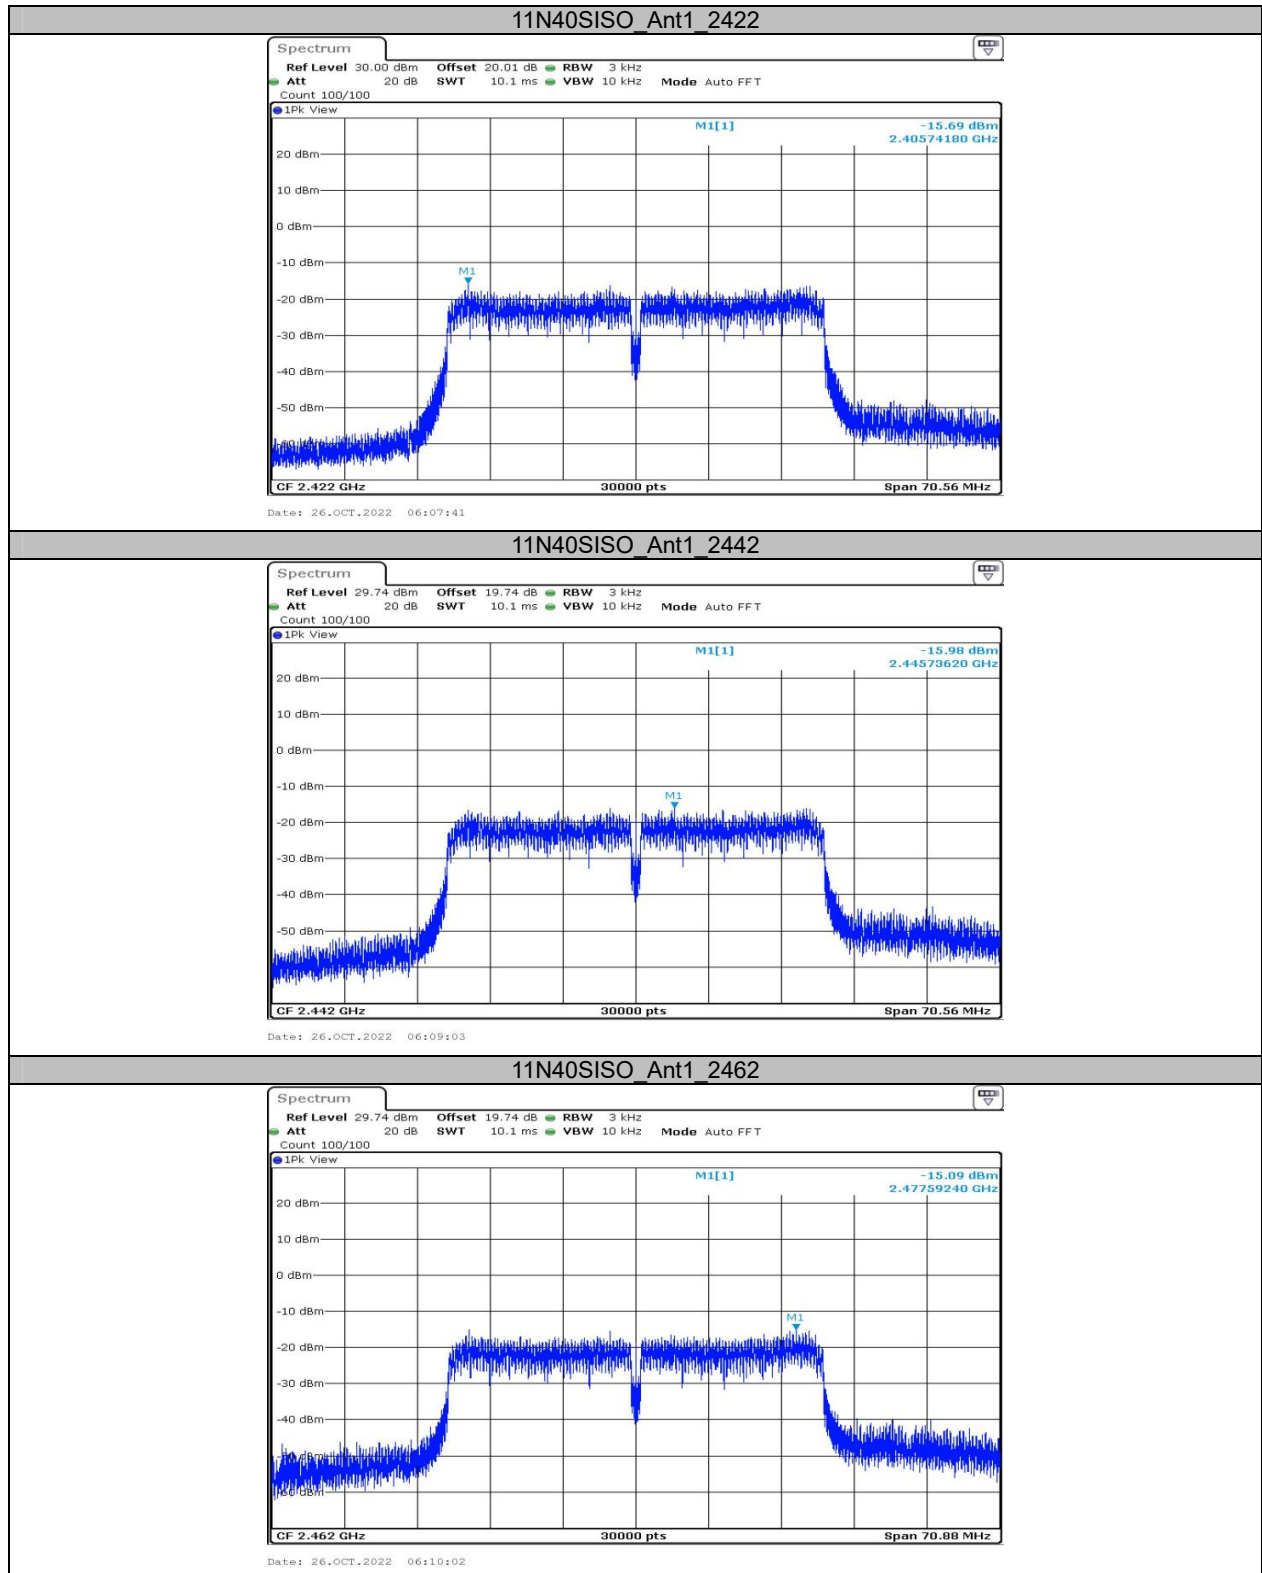

Appendix E: Band edge measurements Test Graphs

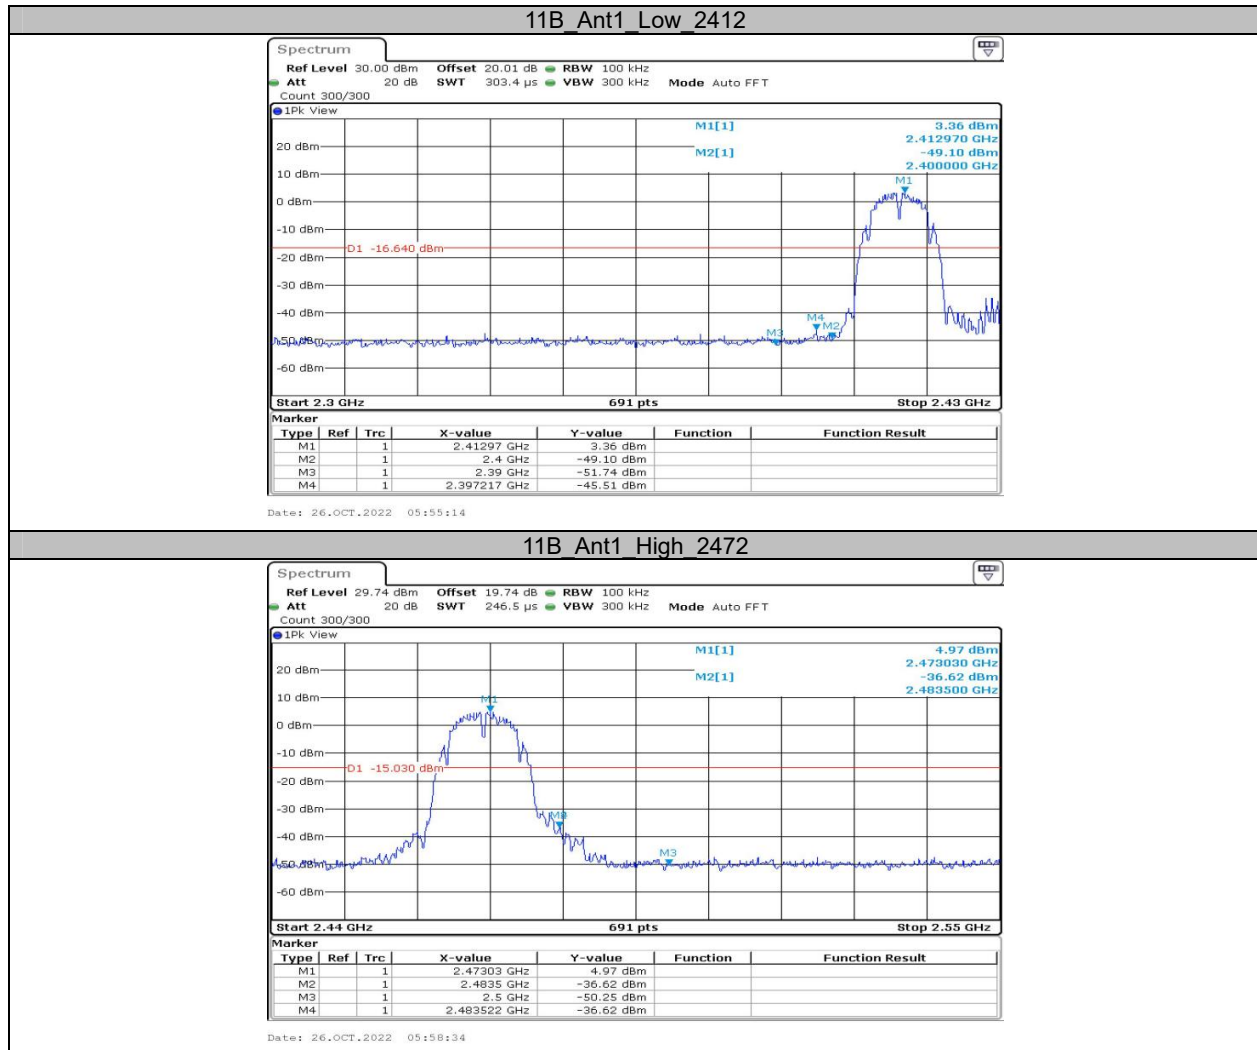


11G Ant1 Low 2412

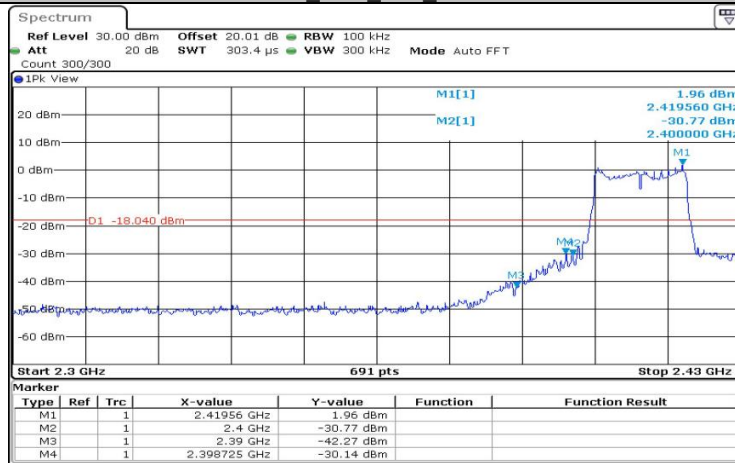


11G Ant1 High 2472



11N20SISO Ant1 Low 2412

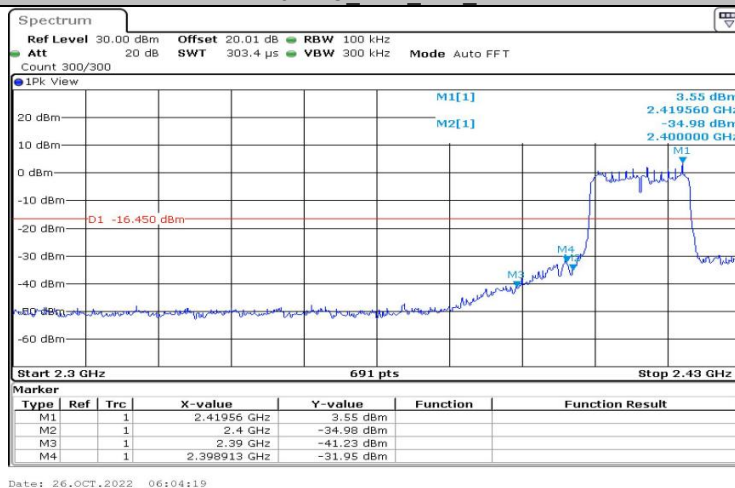

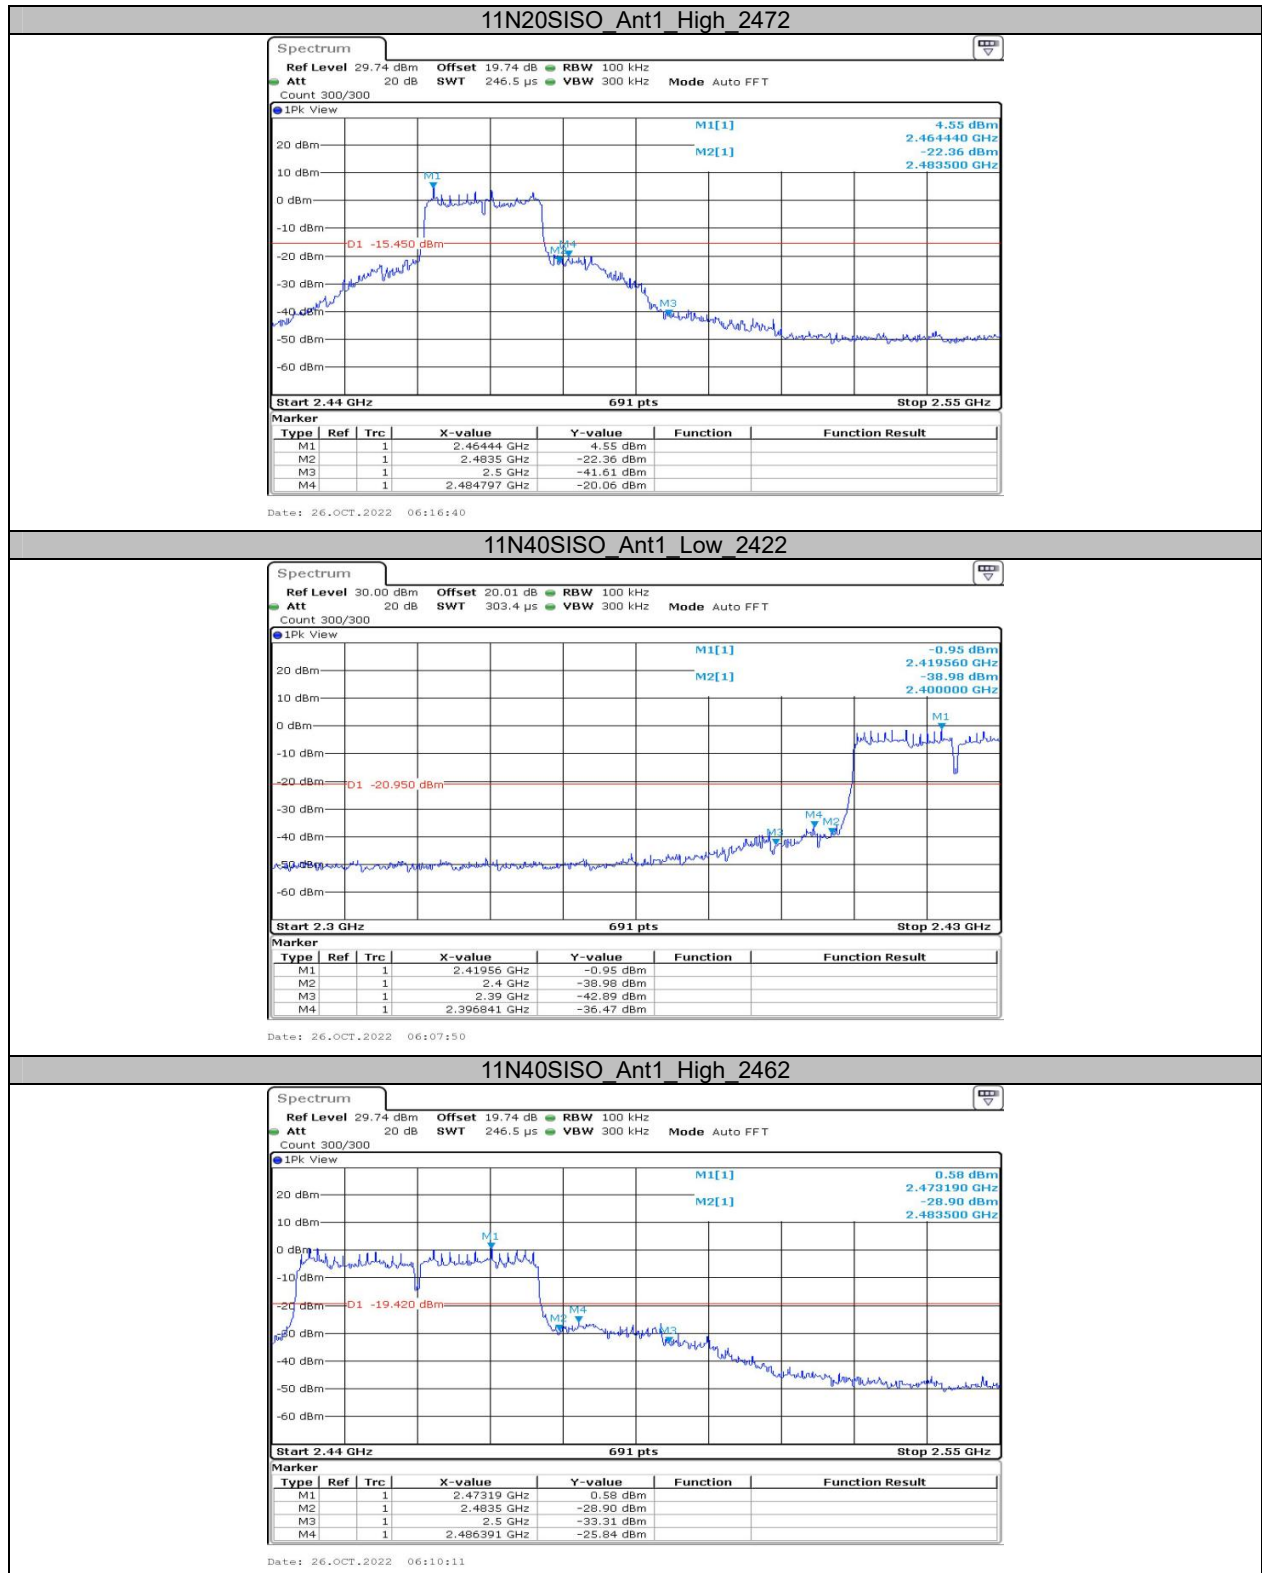


**Appendix F: Duty Cycle
Test Result**

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2442	8.68	8.90	97.53
11G	Ant1	2442	1.44	1.65	87.27
11N20SISO	Ant1	2442	1.35	1.55	87.10
11N40SISO	Ant1	2442	0.67	0.87	77.01


Test Graphs

11B_Ant1_2442

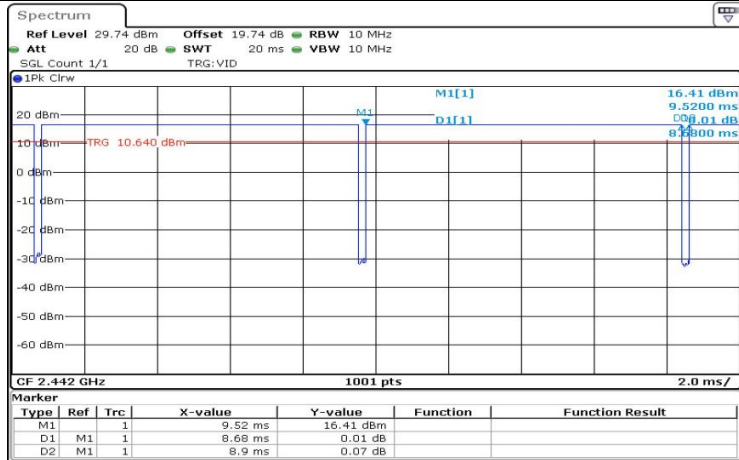


Date: 26.OCT.2022 05:56:51

11G_Ant1_2442

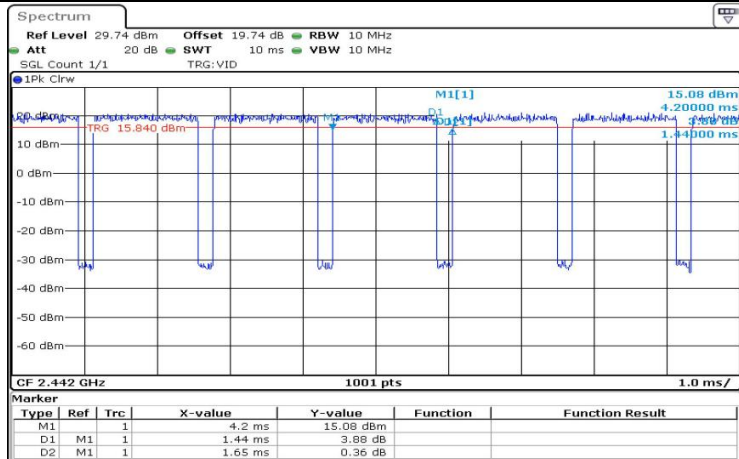


Date: 26.OCT.2022 06:01:10

11N20SISO_Ant1_2442

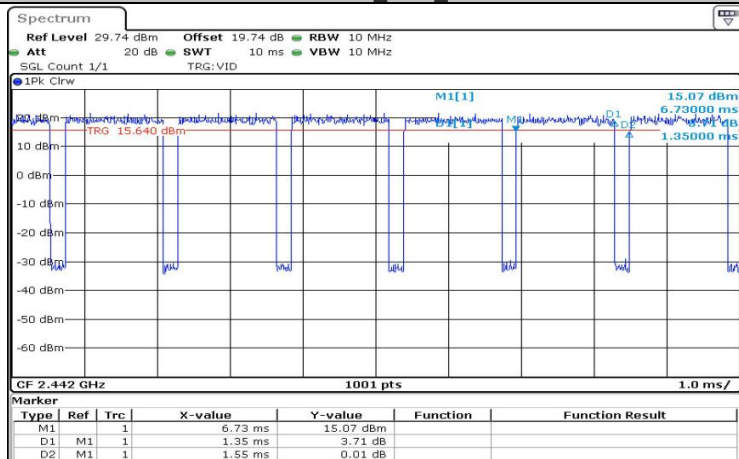

Date: 26.OCT.2022 06:05:02

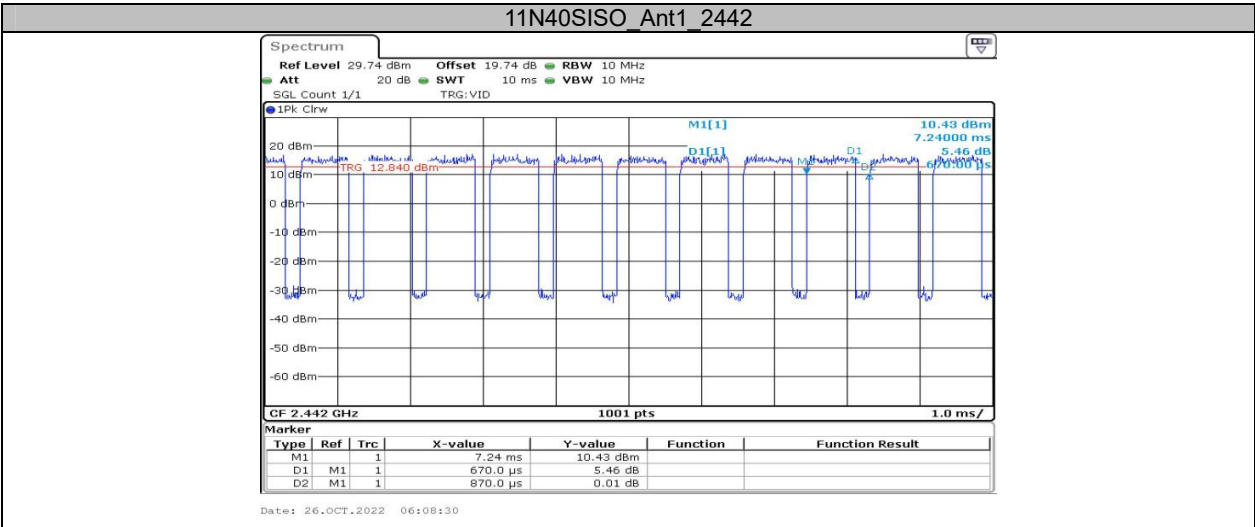

***** END OF REPORT *****