

FCC Part 15E Measurement and Test Report

For

Fortune Ship International Industrial Limited

Unit C, 24/F, Golden Bear Industrial Centre, 66-82 Chai Wan Kok Street,

Tsuen Wan NT, HONGKONG, China

FCC ID: 2AVFE-E1PLUS

FCC Rule(s): FCC Part 15.407

Product Description: 4G Smart Phone

Tested Model: Wildfire E1

Report No.: WTX19X11081161W-3

Sample Receipt Date: 2019-11-22


Tested Date: 2019-11-22 to 2019-12-25

Issued Date: 2019-12-26

Tested By: Jason Su / Engineer



Reviewed By: Silin Chen / EMC Manager



Approved & Authorized By: Jandy So / PSQ Manager



Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	5
1.5 EUT OPERATING DURING TEST	6
1.6 TEST FACILITY	6
1.7 EUT SETUP AND TEST MODE.....	7
1.8 MEASUREMENT UNCERTAINTY	8
1.9 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS	11
3. RF EXPOSURE	12
3.1 STANDARD APPLICABLE.....	12
3.2 TEST RESULT.....	12
4. ANTENNA REQUIREMENT	13
4.1 STANDARD APPLICABLE.....	13
4.2 EVALUATION INFORMATION	13
5. CONDUCTED EMISSIONS	14
5.1 TEST PROCEDURE.....	14
5.2 BASIC TEST SETUP BLOCK DIAGRAM.....	14
5.3 TEST RECEIVER SETUP	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
6. POWER SPECTRAL DENSITY	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	18
7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	25
7.1 STANDARD APPLICABLE.....	25
7.2 TEST PROCEDURE.....	25
7.3 SUMMARY OF TEST RESULTS/PLOTS	27
8. MAXIMUM CONDUCTED OUTPUT POWER.....	34
8.1 STANDARD APPLICABLE.....	34
8.2 TEST PROCEDURE.....	34
8.3 SUMMARY OF TEST RESULTS/PLOTS	35
9. RADIATED SPURIOUS EMISSIONS.....	42
9.1 STANDARD APPLICABLE.....	42
9.2 TEST PROCEDURE.....	42
9.3 TEST RECEIVER SETUP	44
9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	44
9.5 SUMMARY OF TEST RESULTS/PLOTS	44
10. FREQUENCY STABILITY	69
10.1 STANDARD APPLICABLE.....	69
10.2 TEST PROCEDURE.....	69
10.3 SUMMARY OF TEST RESULTS/PLOTS	69

Report version

Version No.	Date of issue	Description
Rev.00	2019-12-26	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Fortune Ship International Industrial Limited
Address of applicant: Unit C, 24/F, Golden Bear Industrial Centre, 66-82 Chai Wan Kok Street, Tsuen Wan NT, HONGKONG, China

Manufacturer: Guizhou Fortuneship Technology Co., Ltd
Address of manufacturer: No. 4 Plant, High-tech Industrial Park, Xindu Economic Development Zone, Zunyi, China

General Description of EUT	
Product Name:	4G Smart Phone
Brand Name:	HTC
Model No.:	Wildfire E1
Adding Model(s):	Wildfire E1 PLUS
Rated Voltage:	DC3.85V
Battery Capacity:	/
Power Adapter:	ES568-U050150XYE INPUT: AC100-20/60Hz, 0.5A, Max; Output: DC5V, 1500mA
Software Version:	HTC_WILDFIRE_E1_PLUS_RU_V005_20191106
Hardware Version:	YK676-V3.0
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model Wildfire E1, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	11.19dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM
Data Rate:	6-54Mbps, up to 200Mbps
Quantity of Channels:	15
Type of Antenna:	Integral Antenna
Antenna Gain:	1.15dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “*##3646633*##” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	14	14	14								14	14	14
802.11n-HT20 MCS0	13.5	13.5	13.5								13.5	13.5	13.5
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	17	17	17					17	17	17			

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, ,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Unshielded	Without Ferrite
Earphone Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the SAR Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

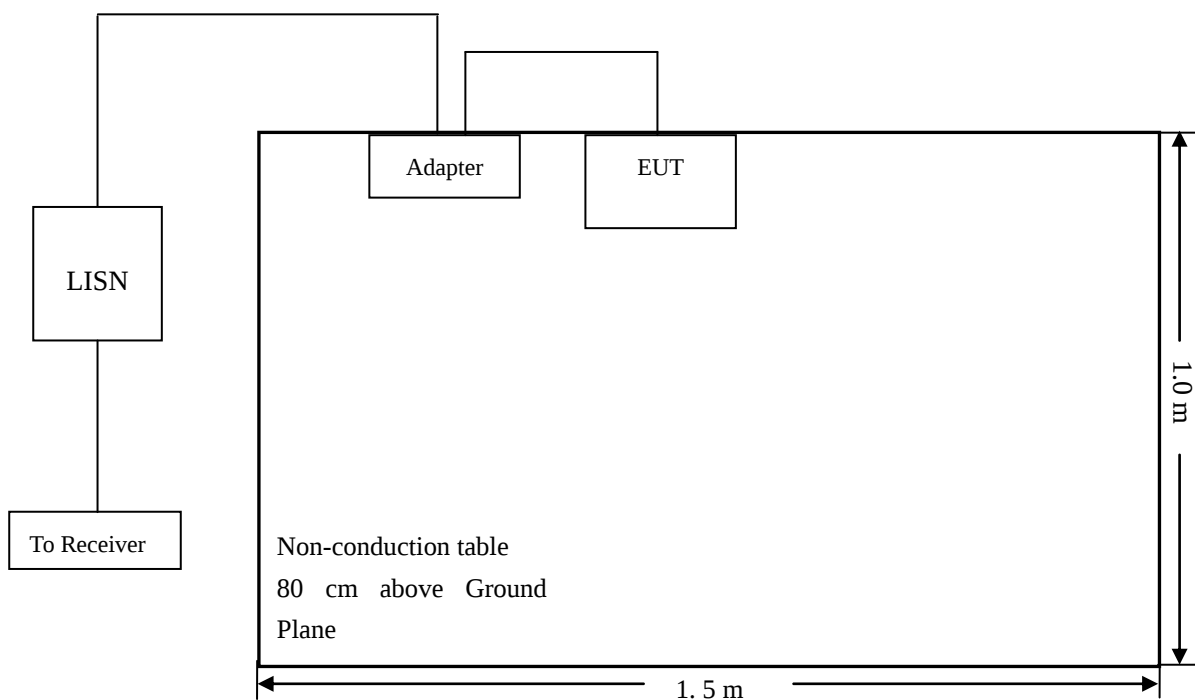
5. Conducted Emissions

5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

5.2 Basic Test Setup Block Diagram




5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


5.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

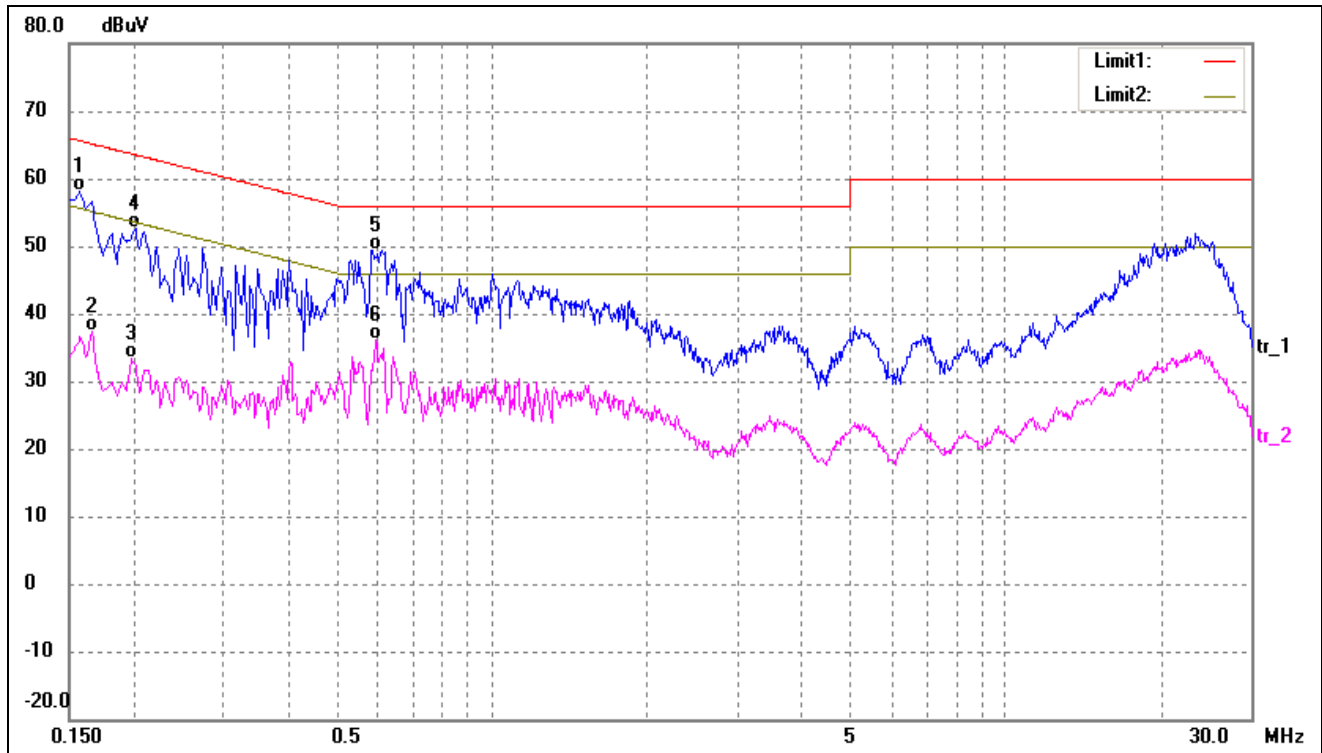

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	48.29	9.95	58.24	65.56	-7.32	QP
2	0.1660	27.34	9.95	37.29	55.15	-17.86	AVG
3	0.1980	23.33	9.97	33.30	53.69	-20.39	AVG
4	0.2020	42.71	9.97	52.68	63.52	-10.84	QP
5*	0.5860	39.32	10.05	49.37	56.00	-6.63	QP
6	0.5940	26.09	10.05	36.14	46.00	-9.86	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

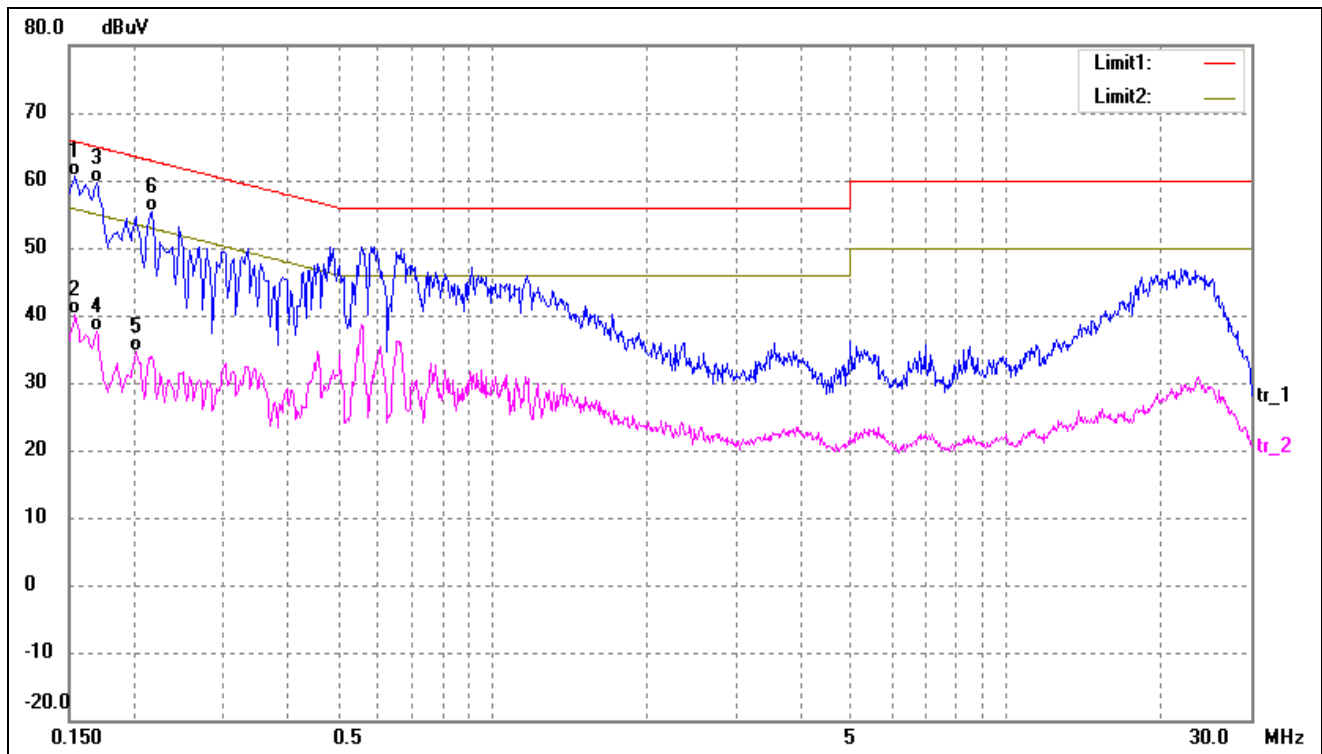

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1539	50.56	9.95	60.51	65.78	-5.27	QP
2	0.1539	30.10	9.95	40.05	55.78	-15.73	AVG
3	0.1700	49.63	9.95	59.58	64.96	-5.38	QP
4	0.1700	27.65	9.95	37.60	54.96	-17.36	AVG
5	0.2020	24.68	9.97	34.65	53.52	-18.87	AVG
6	0.2180	45.44	9.98	55.42	62.89	-7.47	QP

6. Power Spectral Density

6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.




Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.




6.3 Summary of Test Results/Plots



U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	6.344	11
	5200	3.211	11
	5240	6.827	11
802.11n-HT20	5180	5.589	11
	5200	6.318	11
	5240	5.962	11
802.11n-HT40	5190	2.628	11
	5230	3.094	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	1.434	2.22	3.654	30
	5785	1.160	2.22	3.380	30
	5825	1.154	2.22	3.374	30
802.11n-HT20	5745	2.176	2.22	4.396	30
	5785	-1.159	2.22	1.061	30
	5825	1.746	2.22	3.966	30
802.11n HT40	5755	-0.503	2.22	1.717	30
	5795	-1.233	2.22	0.987	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

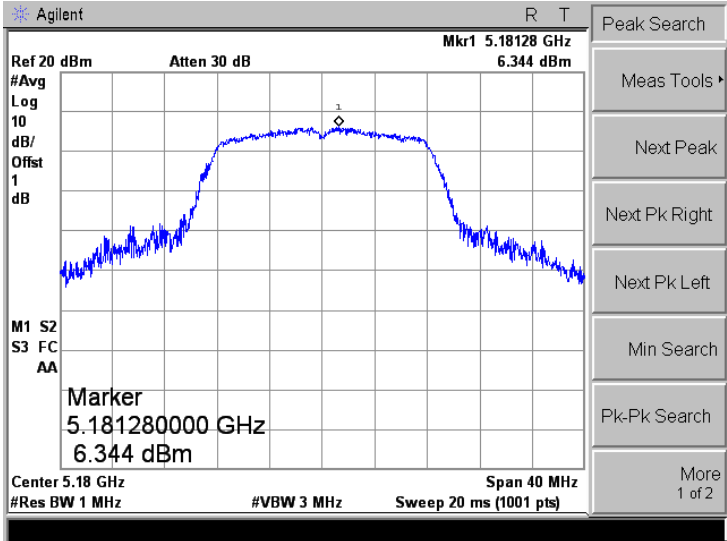
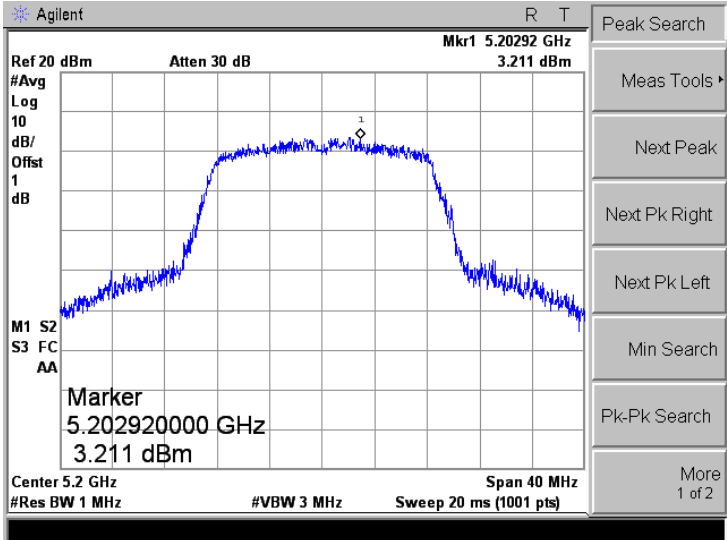
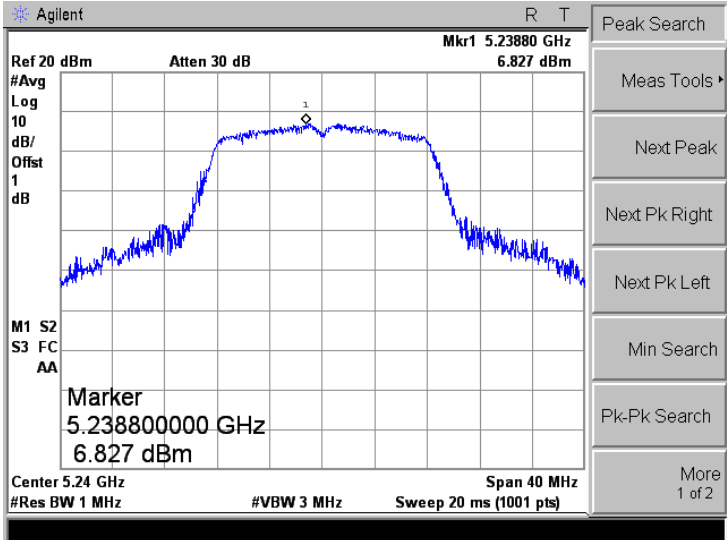
➤ 5150-5250MHz




Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

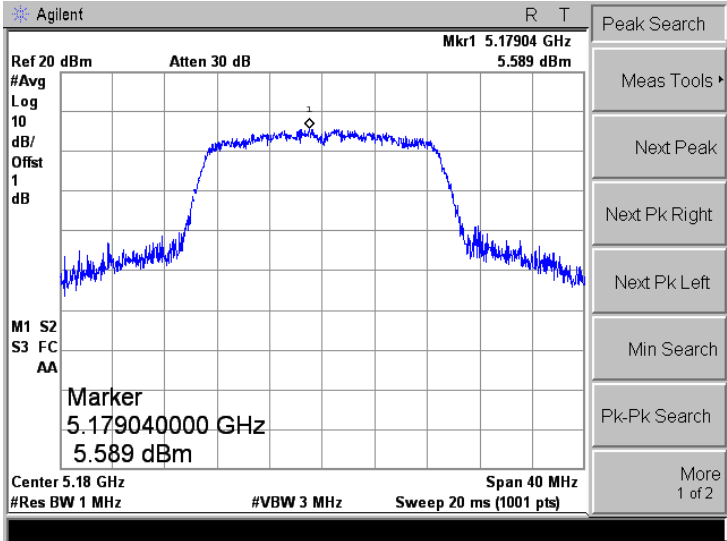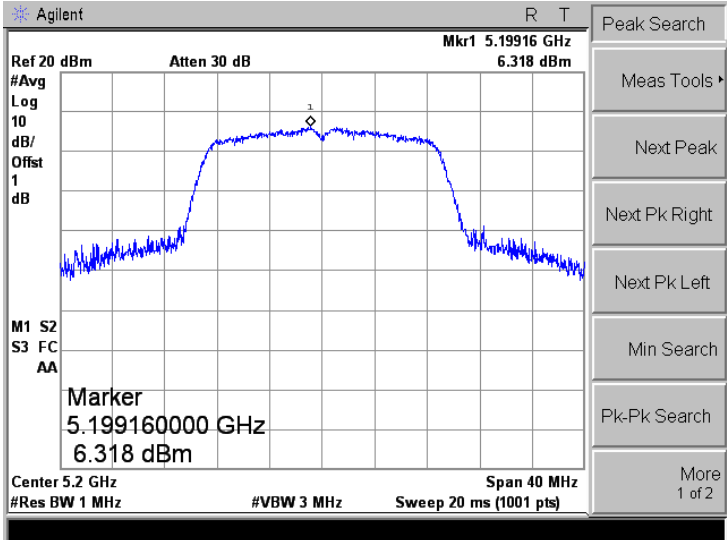
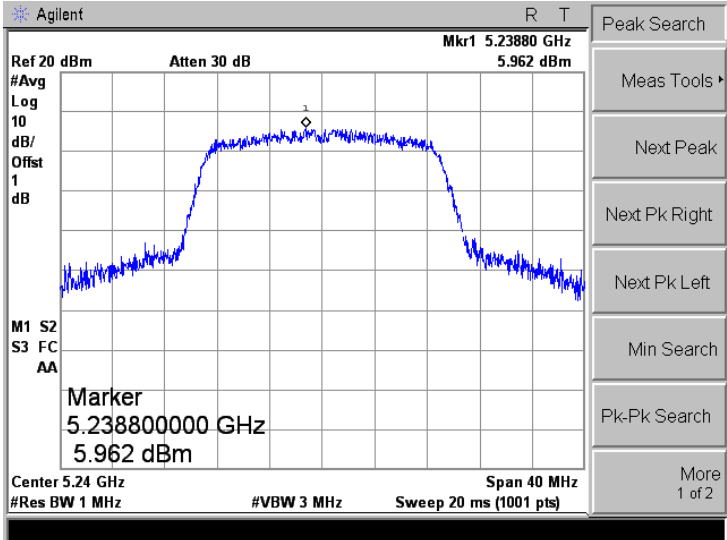
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

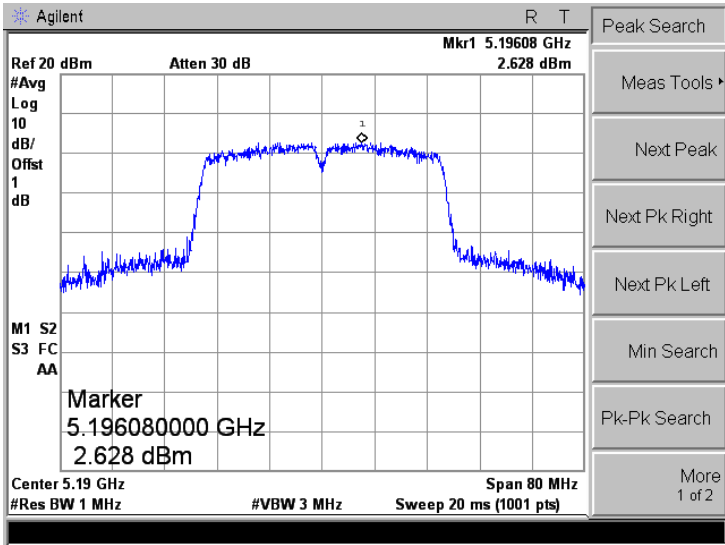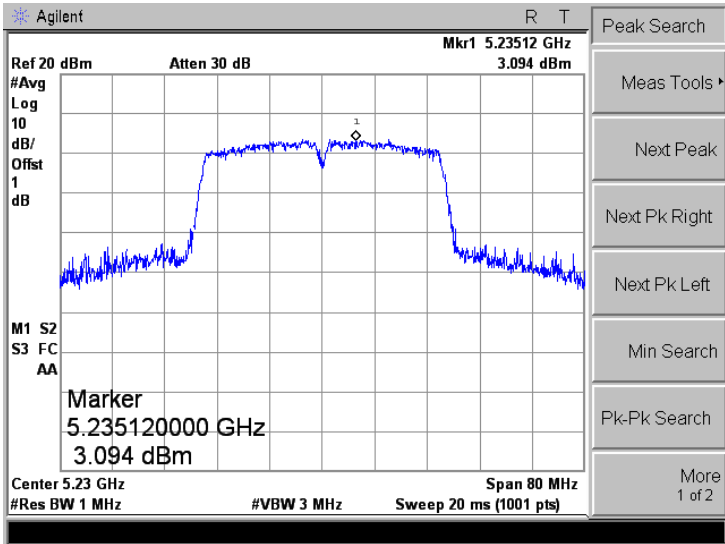Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

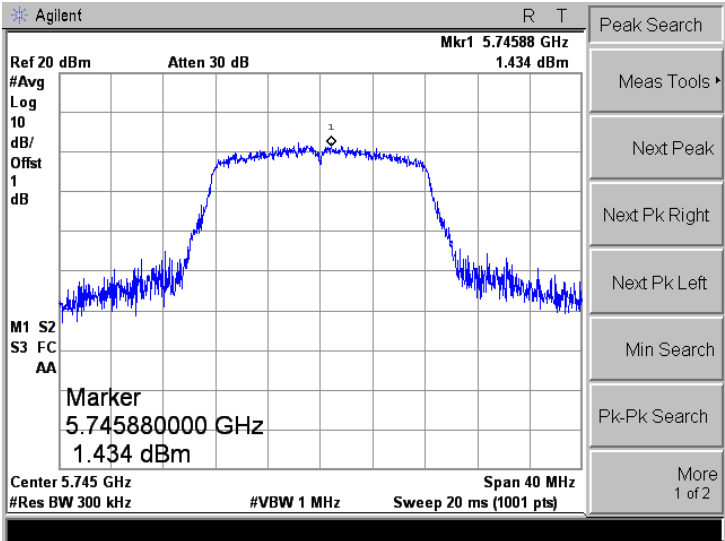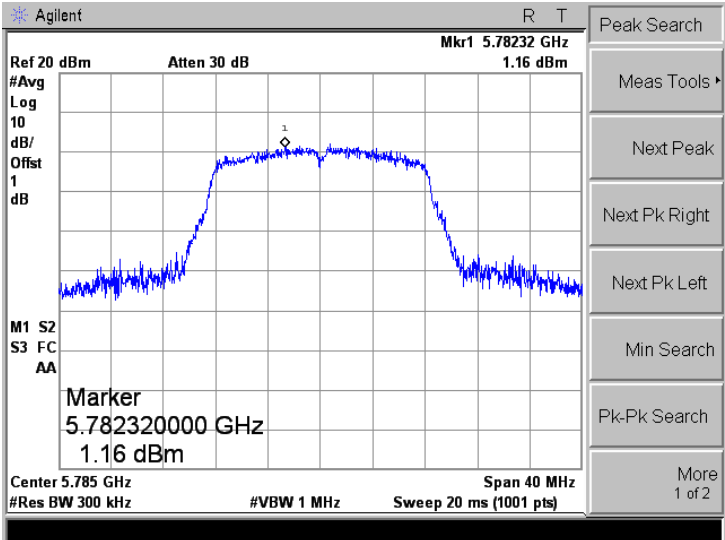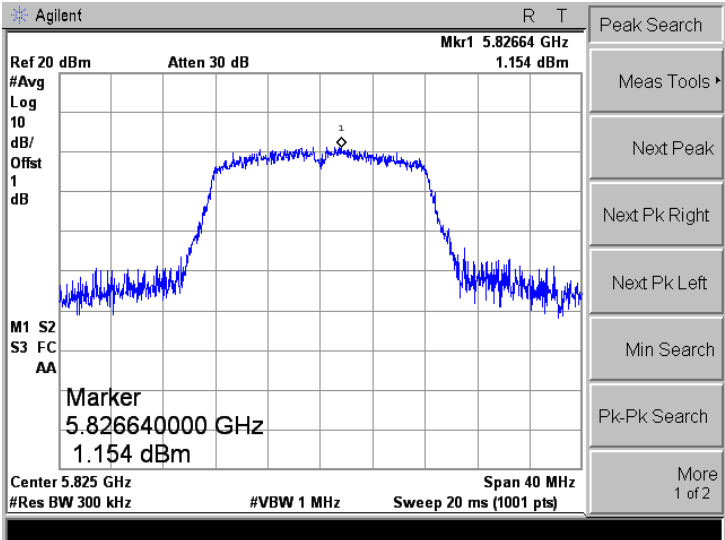➤ 5725-5850MHz

Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

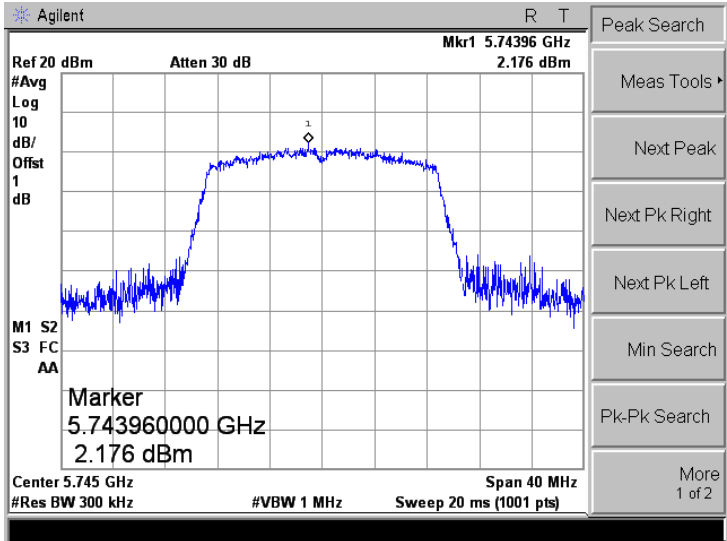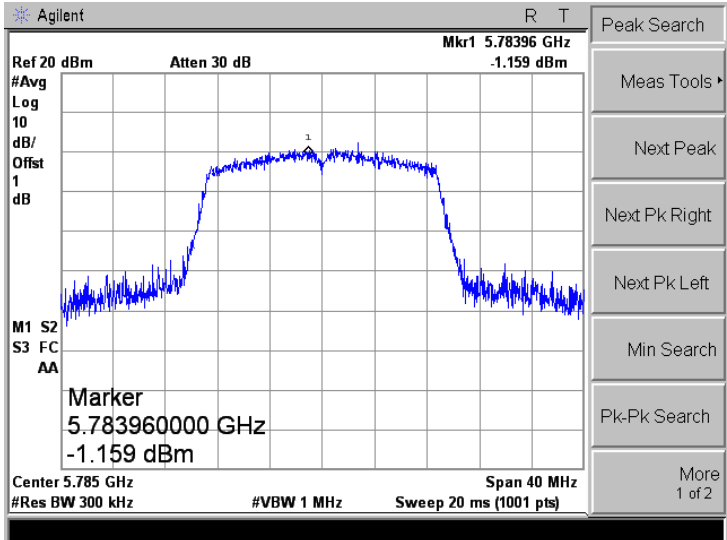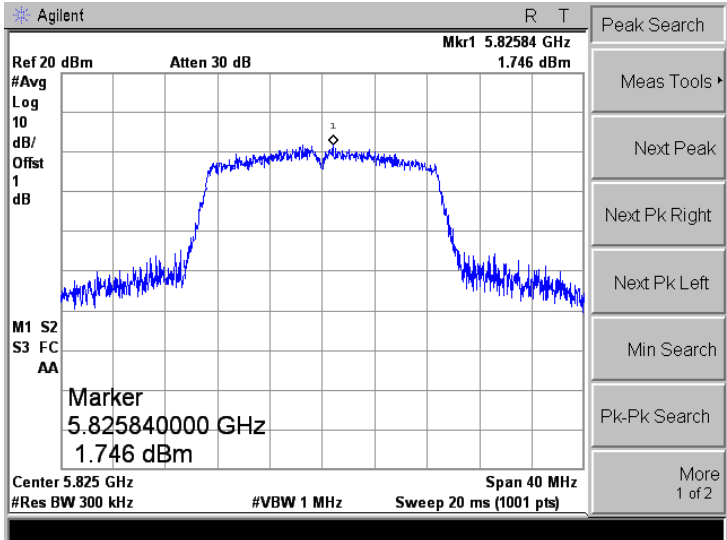Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

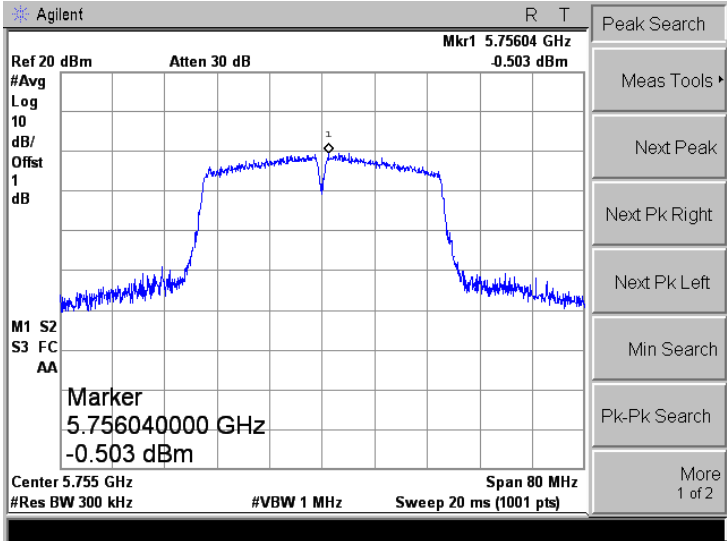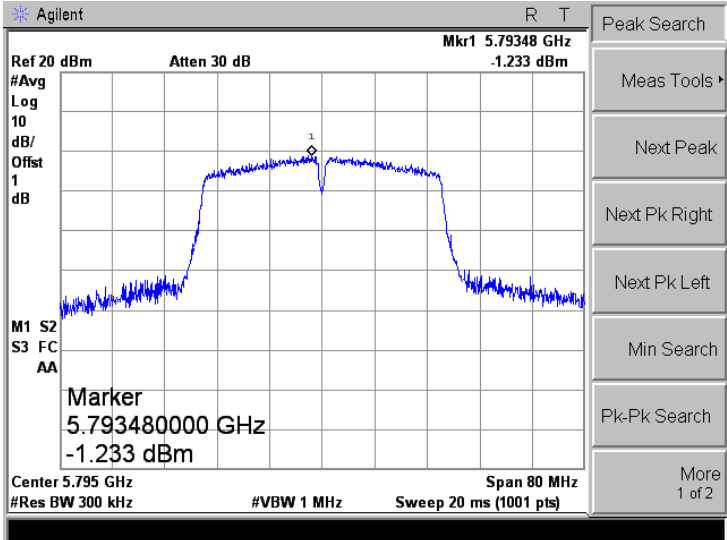Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.75604 GHz -0.503 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.756040000 GHz -0.503 dBm Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5795 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.79348 GHz -1.233 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.793480000 GHz -1.233 dBm Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

7. Emission Bandwidth and Occupied Bandwidth

7.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare

this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:




1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.




7.3 Summary of Test Results/Plots



U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	23.256	16.8957	Pass
	5200	23.410	17.1066	Pass
	5240	20.009	16.9410	Pass
802.11n-HT20	5180	20.153	17.7263	Pass
	5200	26.046	17.7353	Pass
	5240	20.037	17.6956	Pass
802.11n-HT40	5190	41.257	36.3187	Pass
	5230	45.241	36.3270	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	15.977	16.7151	≥500
	5785	16.077	16.7954	≥500
	5825	16.188	16.6714	≥500
802.11n-HT20	5745	17.160	17.7212	≥500
	5785	17.319	17.7844	≥500
	5825	17.211	17.7419	≥500
802.11n-HT40	5755	35.517	36.4639	≥500
	5795	35.392	36.4999	≥500

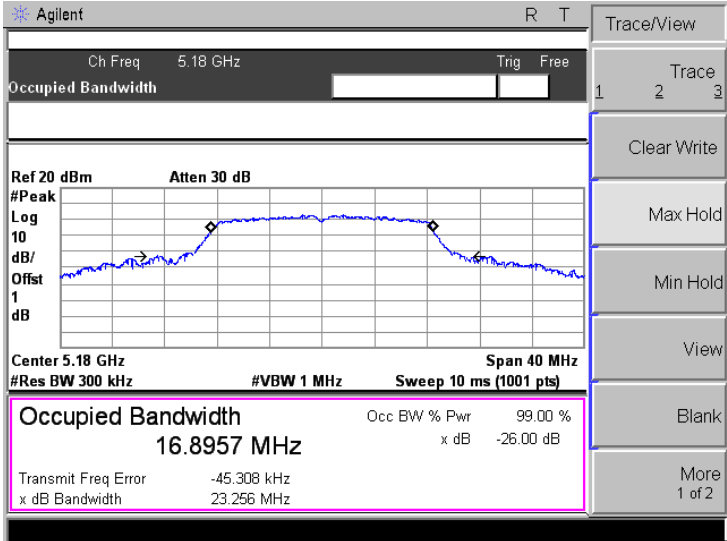
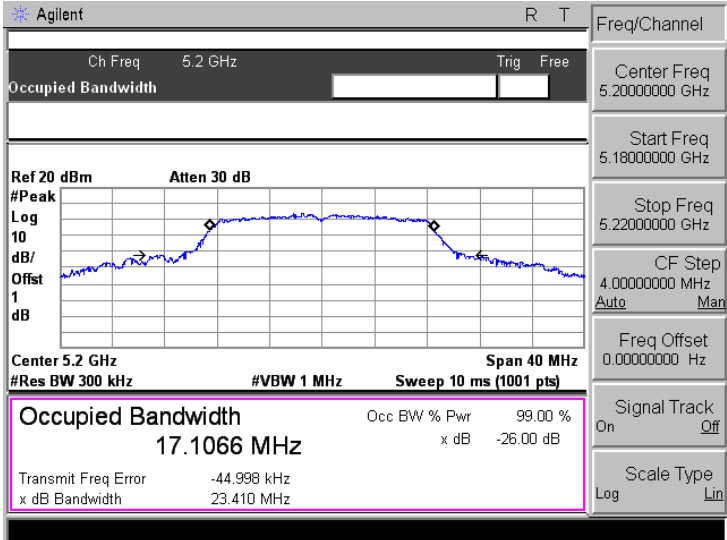
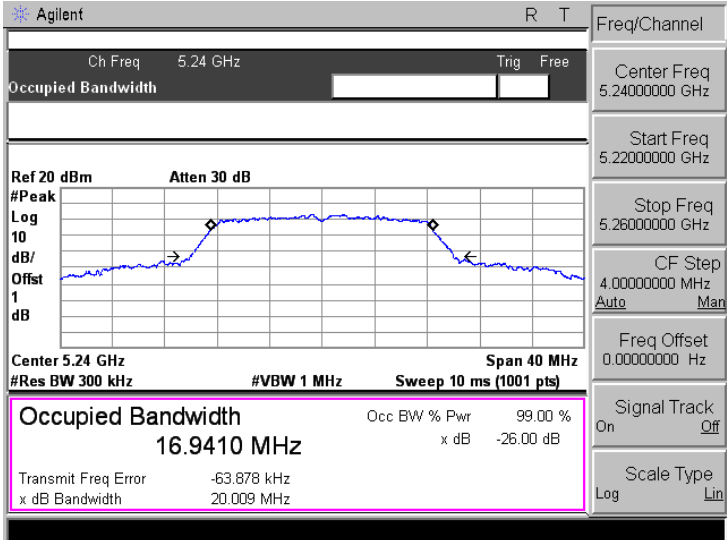
➤ 5150-5250MHz




Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

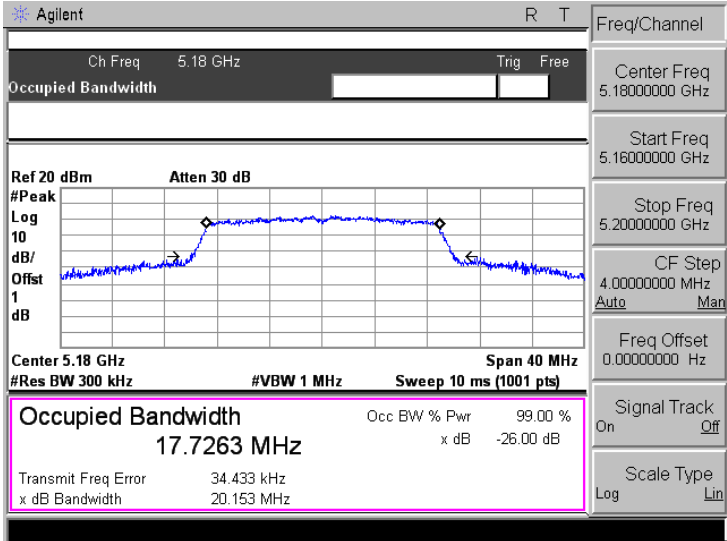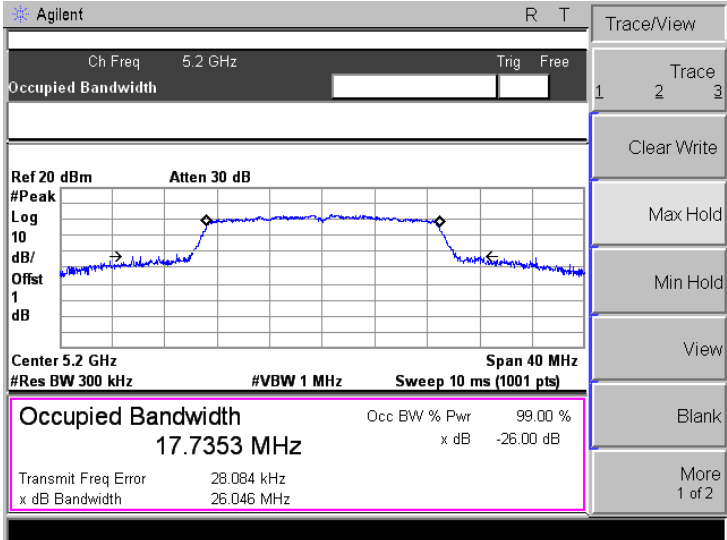
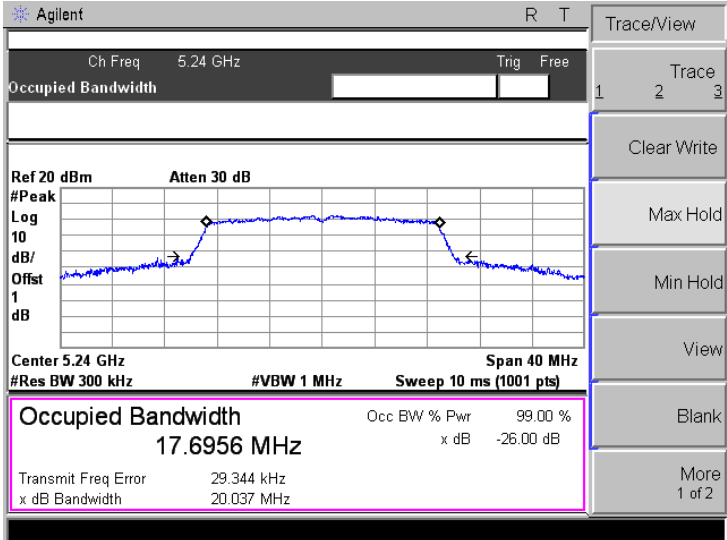
Mode:	802.11n-HT20
5180MHz	 Agilent R T Ch Freq 5.18 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.18 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.7263 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 34.433 kHz x dB Bandwidth 20.153 MHz Freq/Channel Center Freq 5.1800000 GHz Start Freq 5.1600000 GHz Stop Freq 5.2000000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Scale Type Log Lin
5200MHz	 Agilent R T Ch Freq 5.2 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.2 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.7353 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 28.084 kHz x dB Bandwidth 26.046 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
5240MHz	 Agilent R T Ch Freq 5.24 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.24 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.6956 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 29.344 kHz x dB Bandwidth 20.037 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

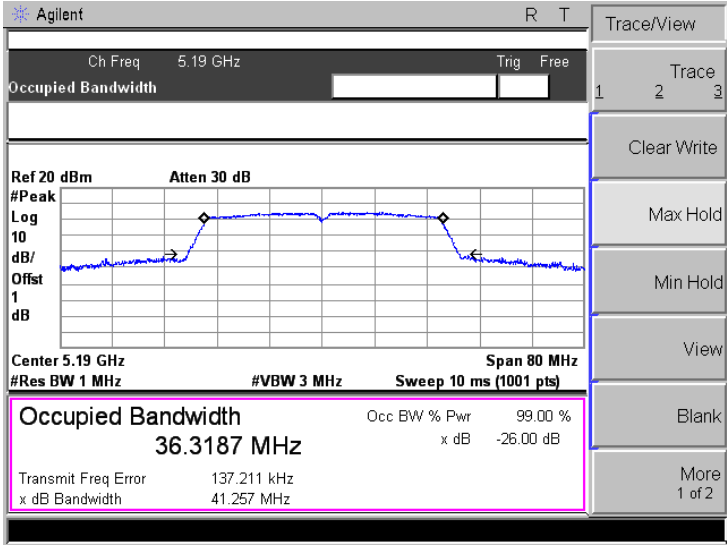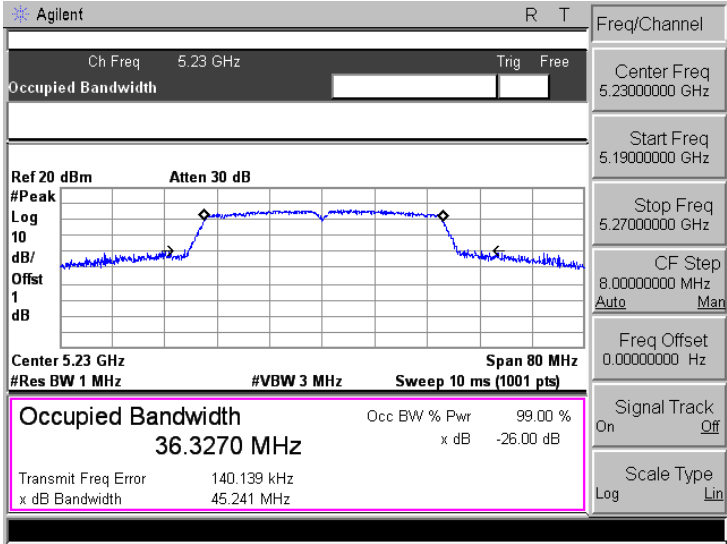Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

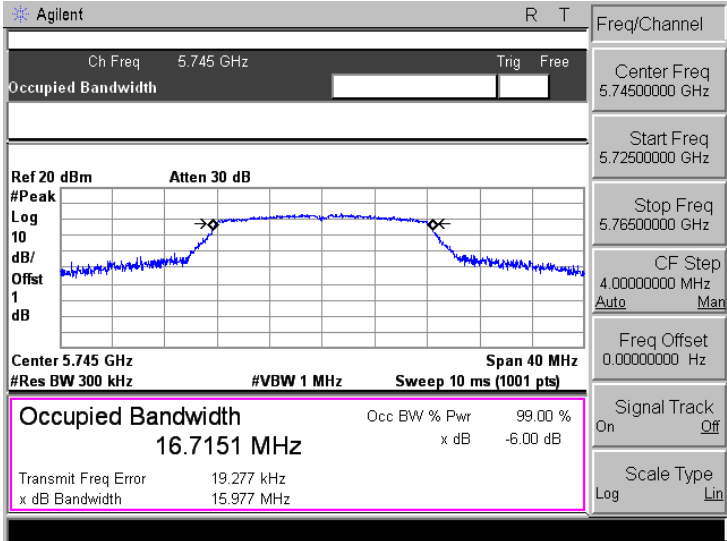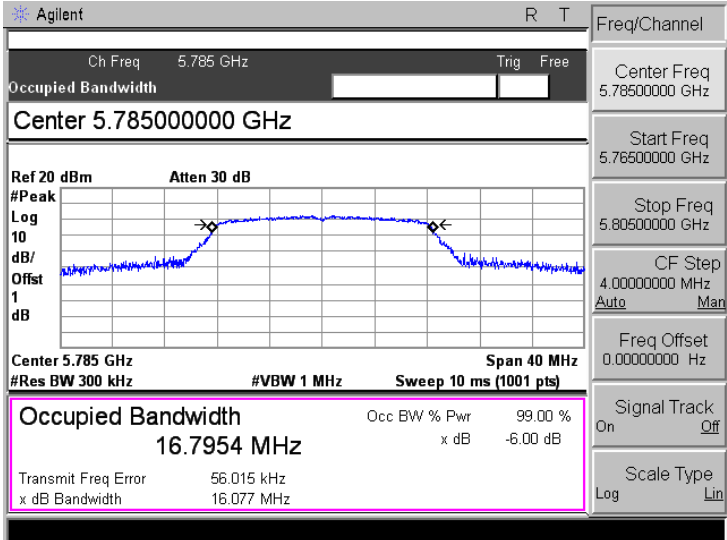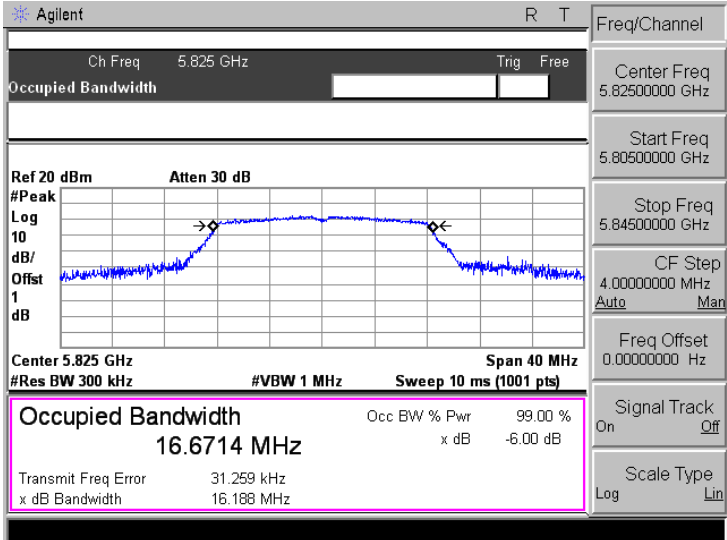➤ 5725-5850MHz

Mode:	802.11a
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.7151 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 19.277 kHz x dB Bandwidth 15.977 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.785000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.7954 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 56.015 kHz x dB Bandwidth 16.077 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.6714 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 31.259 kHz x dB Bandwidth 16.188 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

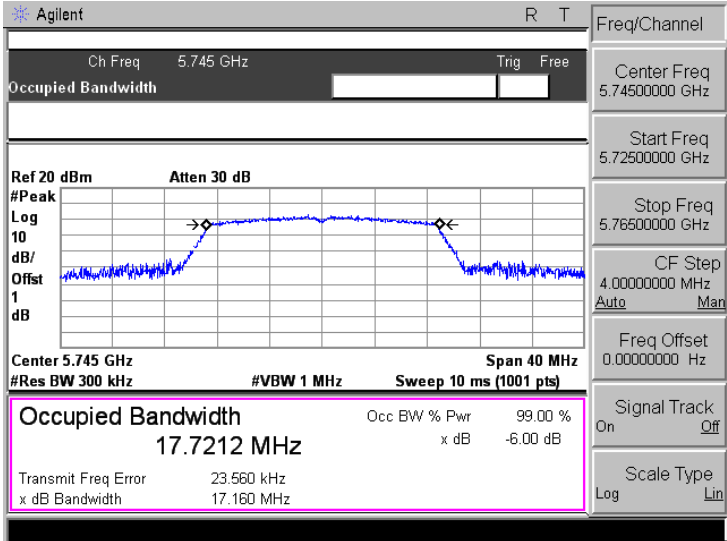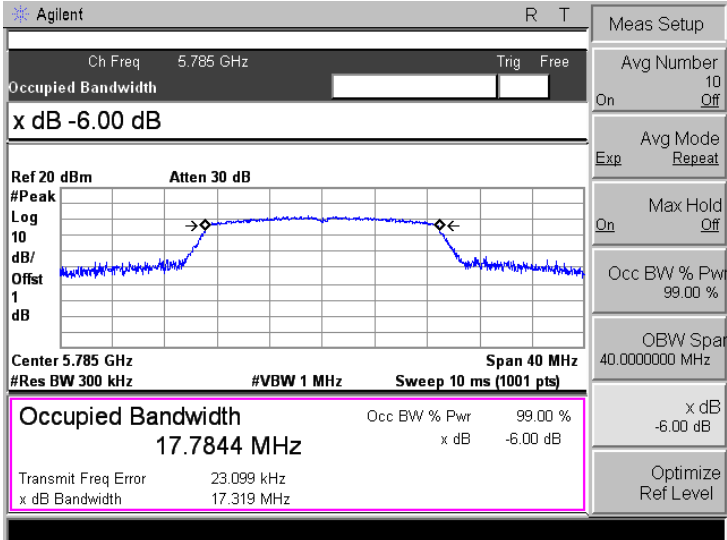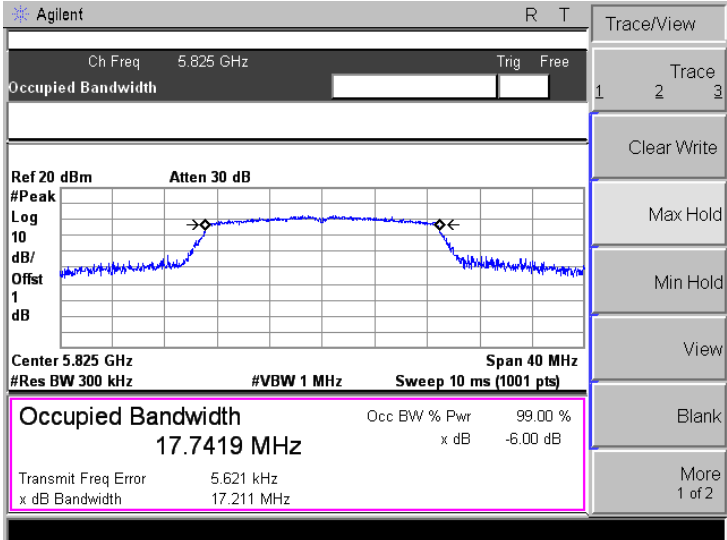Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

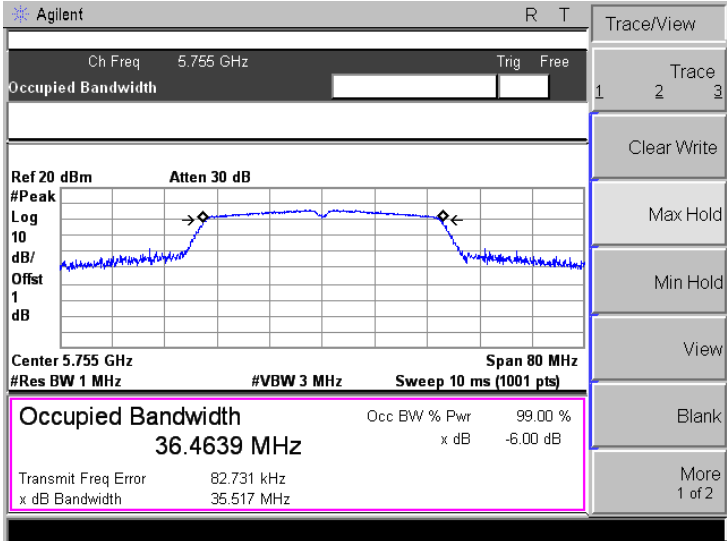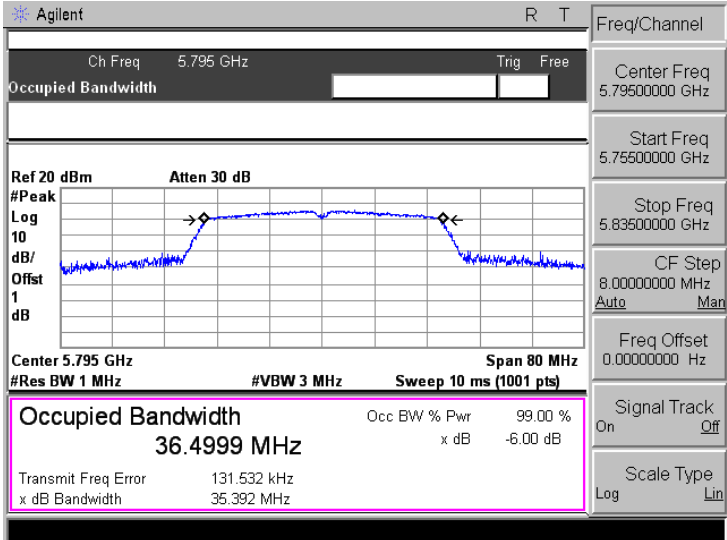Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.755 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 36.4639 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 82.731 kHz x dB Bandwidth 35.517 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
5795 MHz	 Agilent R T Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.795 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 36.4999 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 131.532 kHz x dB Bandwidth 35.392 MHz Freq/Channel Center Freq 5.79500000 GHz Start Freq 5.75500000 GHz Stop Freq 5.83500000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

8. Maximum Conducted Output Power

8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW ≥ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.




- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.




8.3 Summary of Test Results/Plots



U-NII-1:5150-5250MHz				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5180	10.75	11.89	250
	5200	11.19	13.15	250
	5240	10.79	11.99	250
802.11n-HT20	5180	10.35	10.84	250
	5200	10.81	12.05	250
	5240	10.76	11.91	250
802.11n-HT40	5190	10.18	10.42	250
	5230	10.62	11.53	250

U-NII-3: 5725-5850MHz				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5745	10.47	11.14	1000
	5785	9.67	9.27	1000
	5825	10.07	10.16	1000
802.11n-HT20	5745	9.24	8.39	1000
	5785	9.20	8.32	1000
	5825	9.66	9.25	1000
802.11n-HT40	5755	9.38	8.67	1000
	5795	8.93	7.82	1000

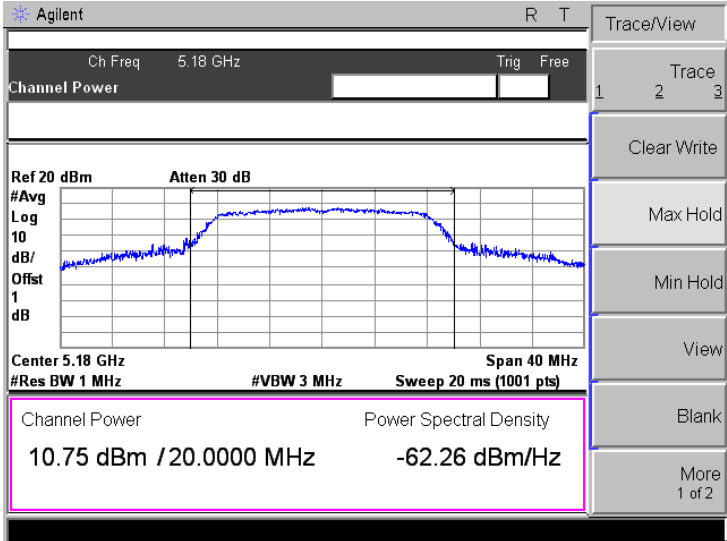
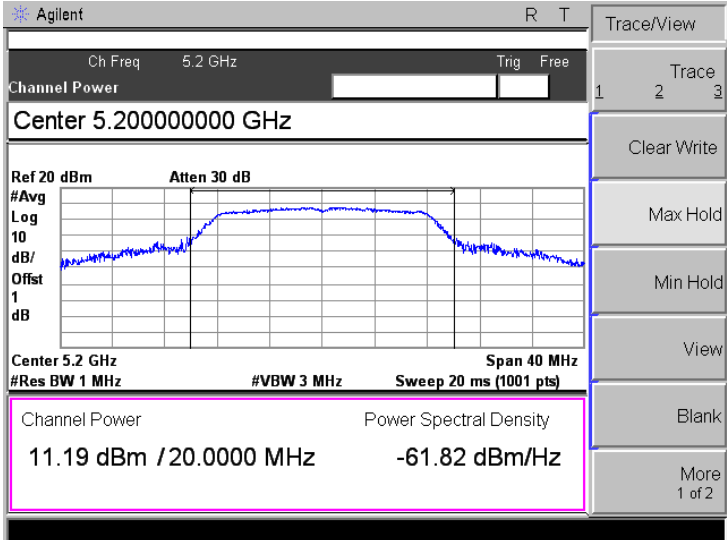
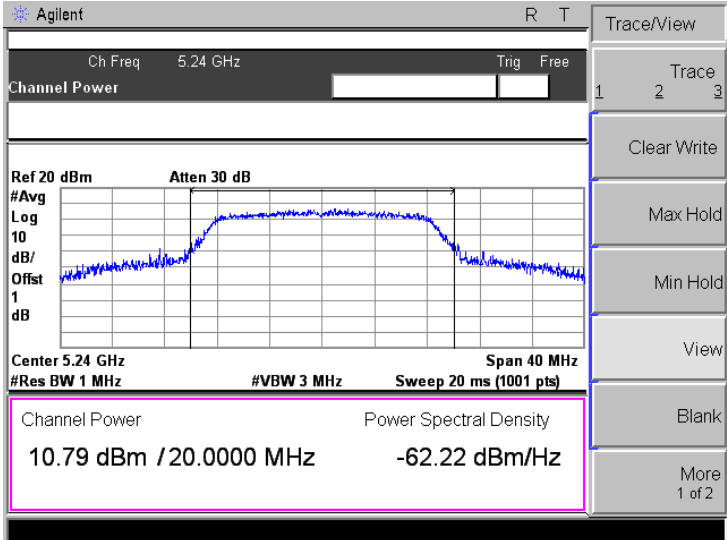
➤ 5150-5250MHz




Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

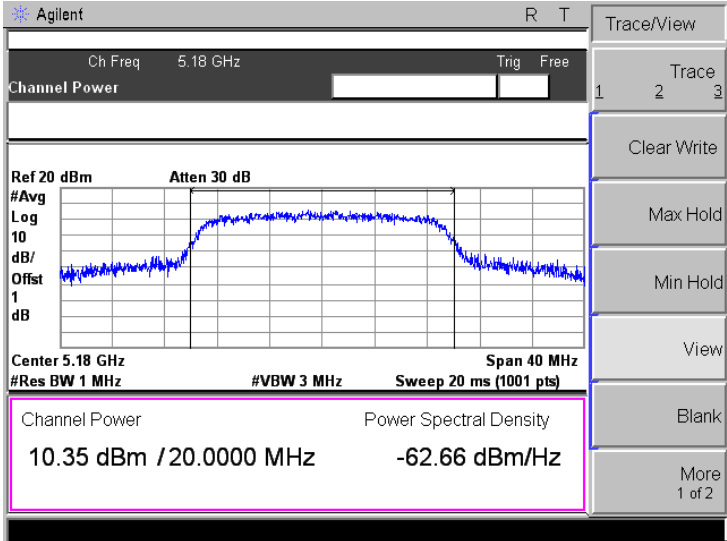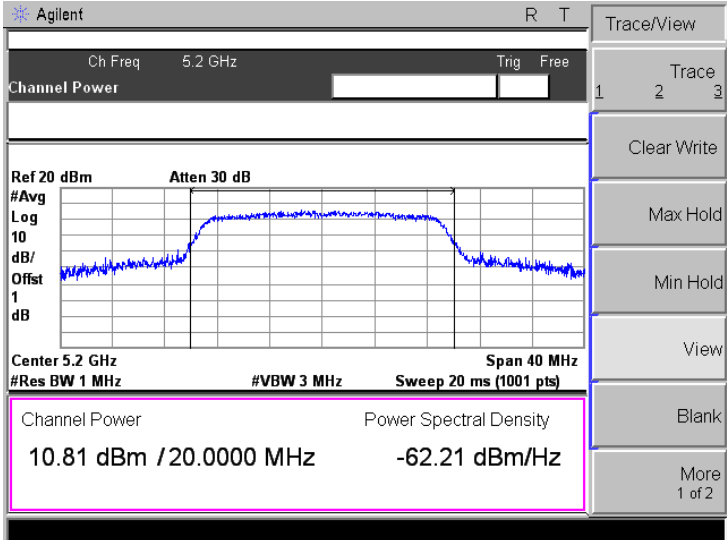
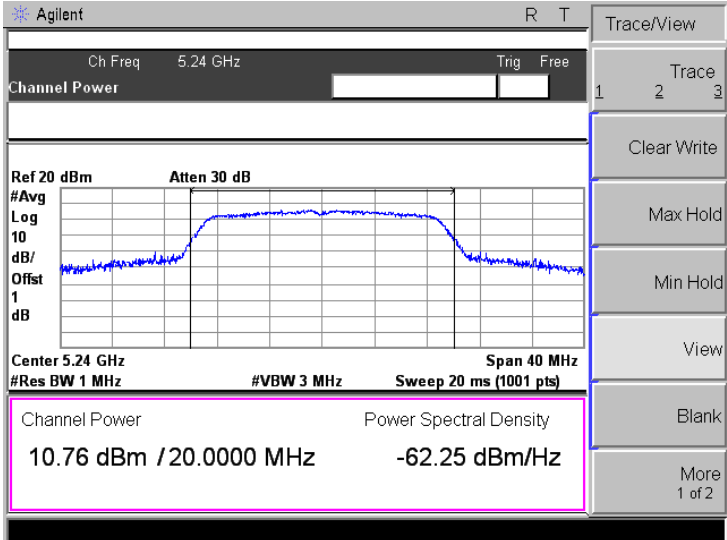
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

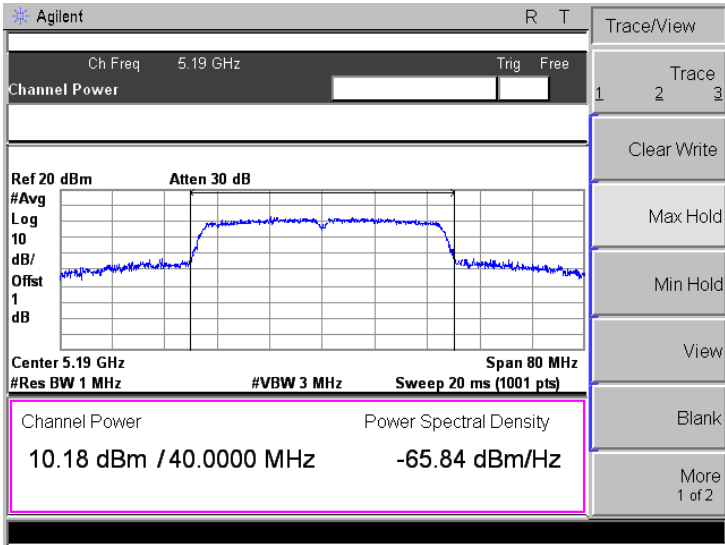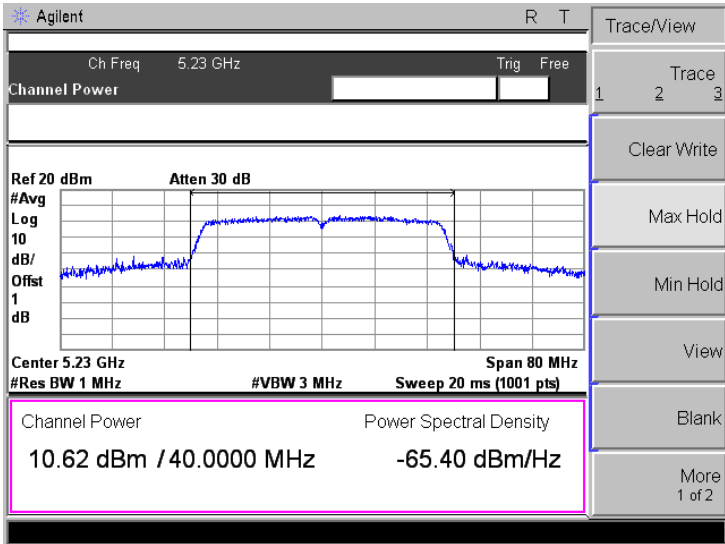Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

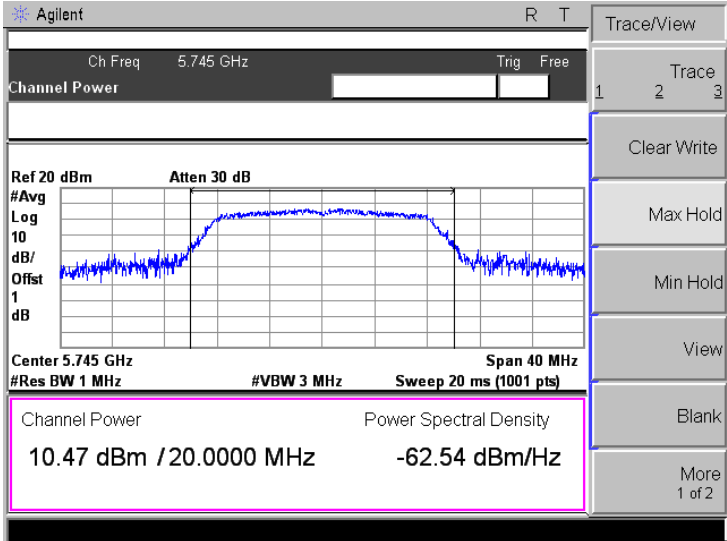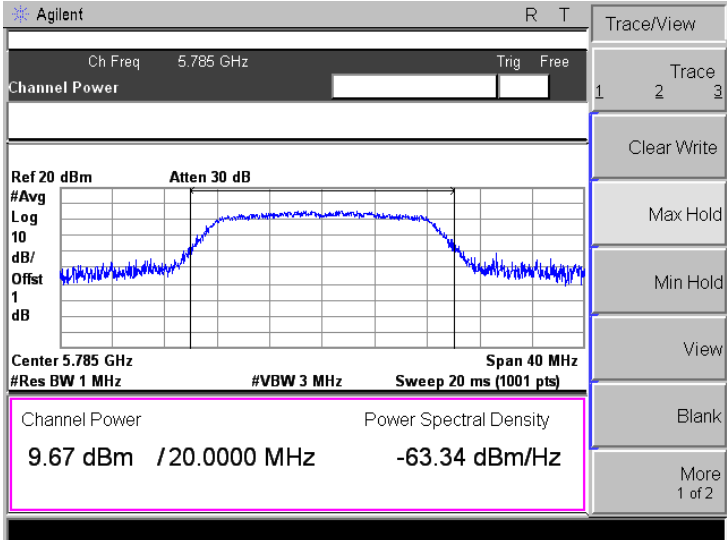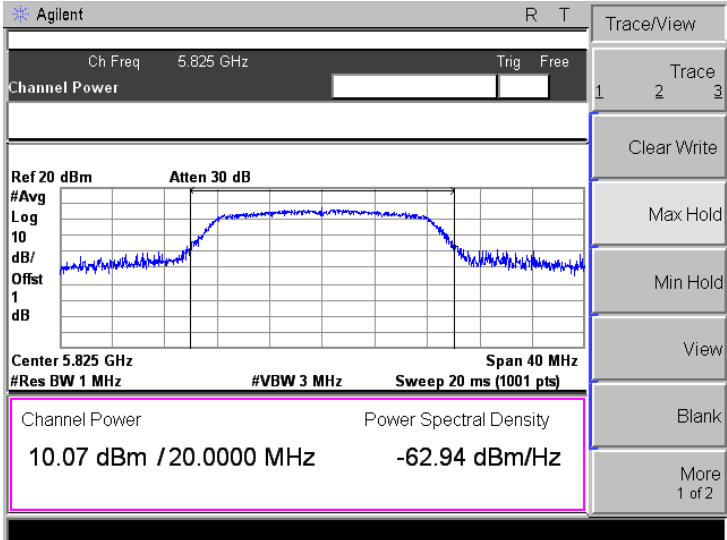➤ 5725-5850MHz

Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

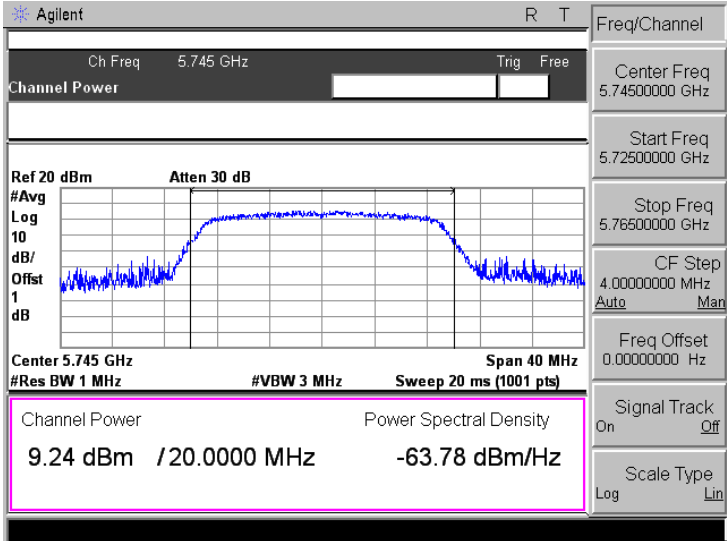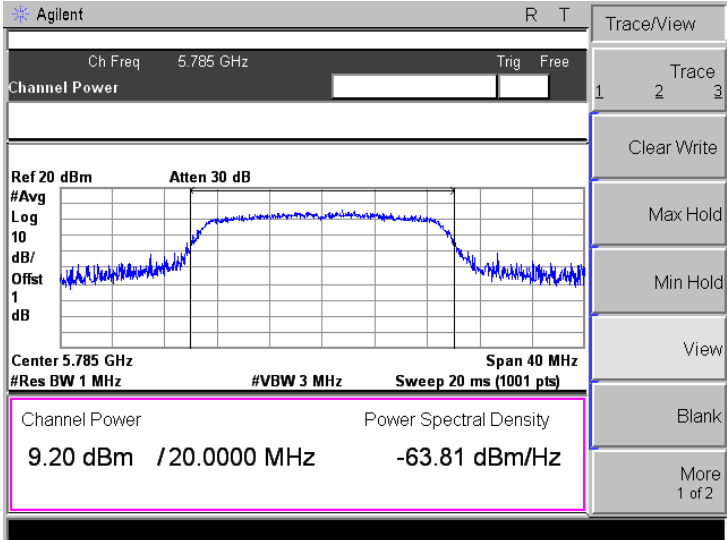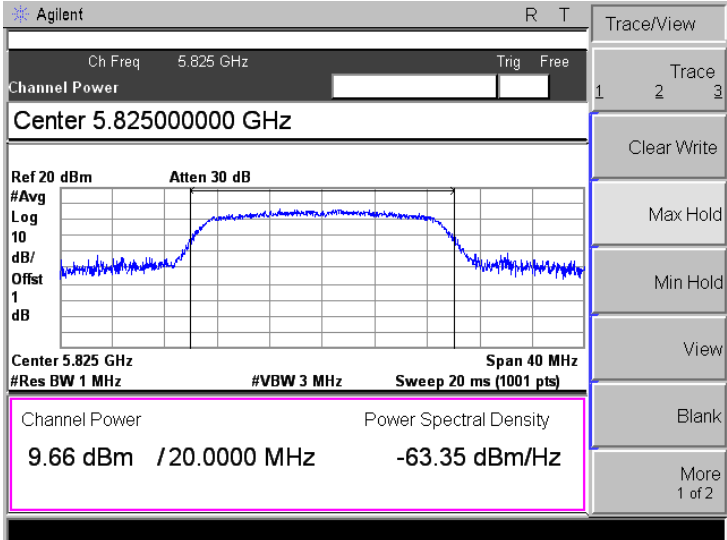Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

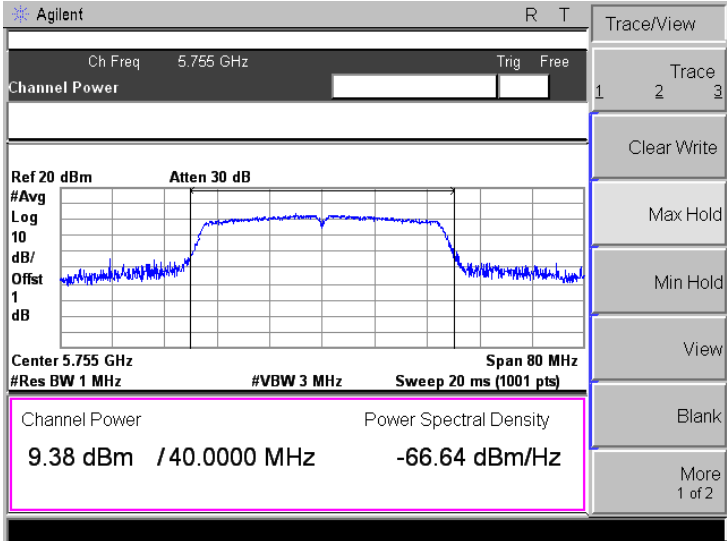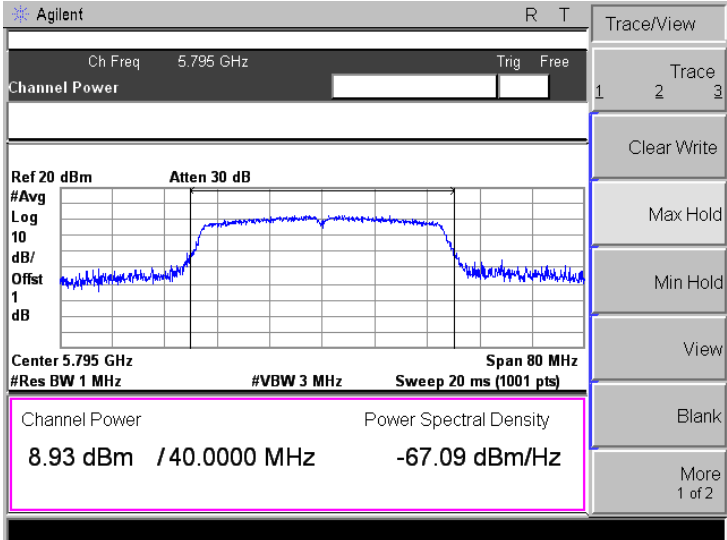Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ch Freq 5.755 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 5.755 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 9.38 dBm / 40.0000 MHz -66.64 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
5795 MHz	 Agilent R T Ch Freq 5.795 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 5.795 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 8.93 dBm / 40.0000 MHz -67.09 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

9. Radiated Spurious Emissions

9.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

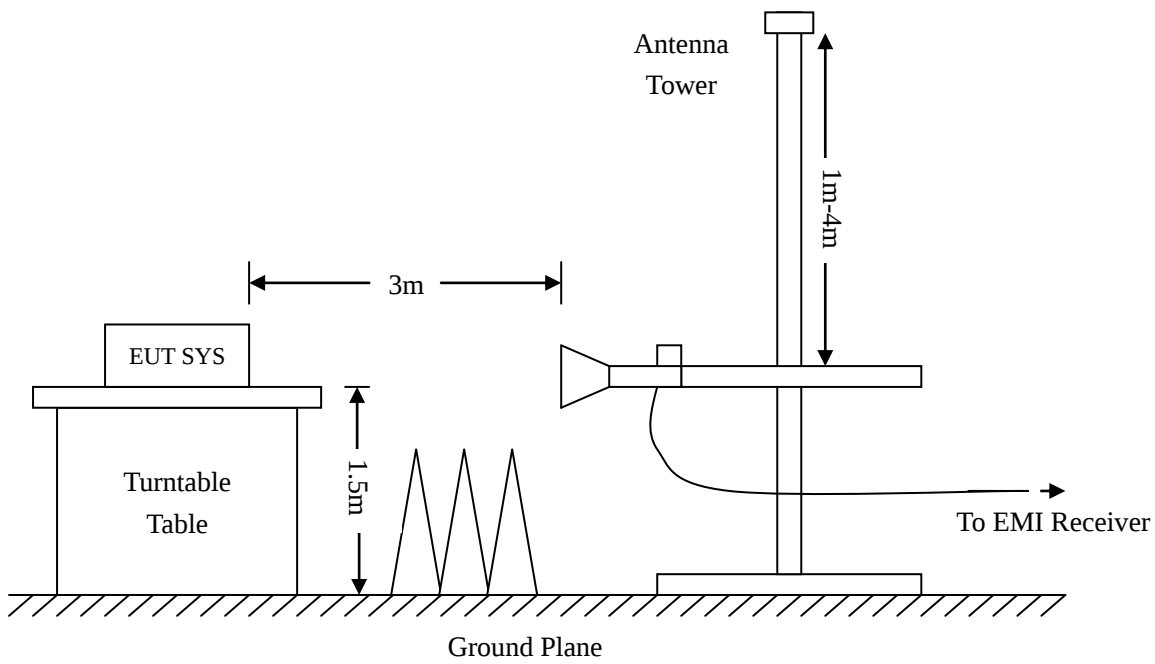
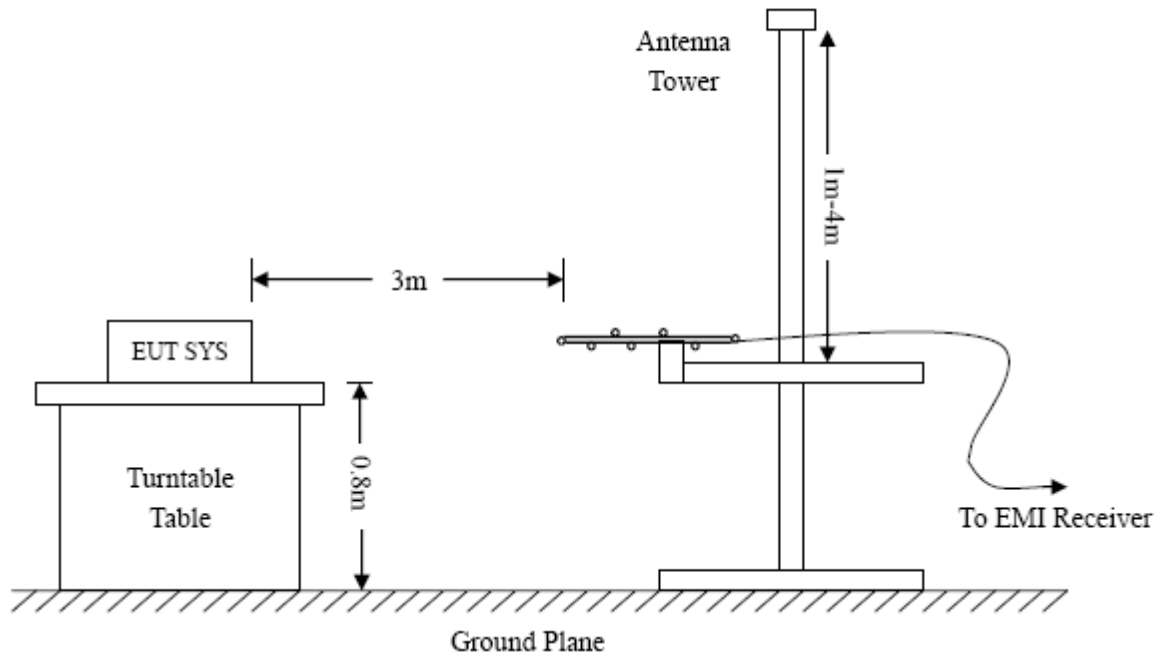
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


9.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz


802.11a

Test Channel	5180MHz(Worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

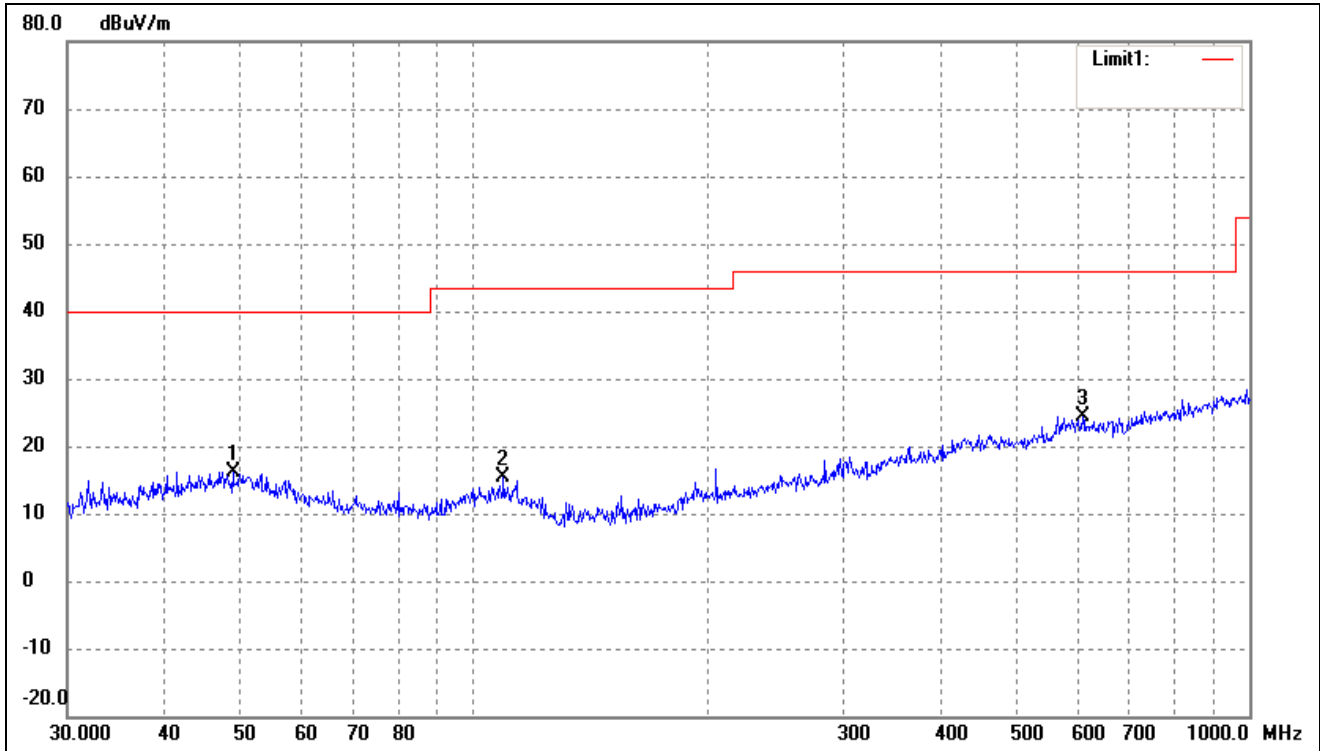


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.0145	27.30	-11.06	16.24	40.00	-23.76	126	100	peak
2	109.4116	28.31	-13.03	15.28	43.50	-28.22	323	100	peak
3	609.9217	28.55	-4.06	24.49	46.00	-21.51	63	100	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

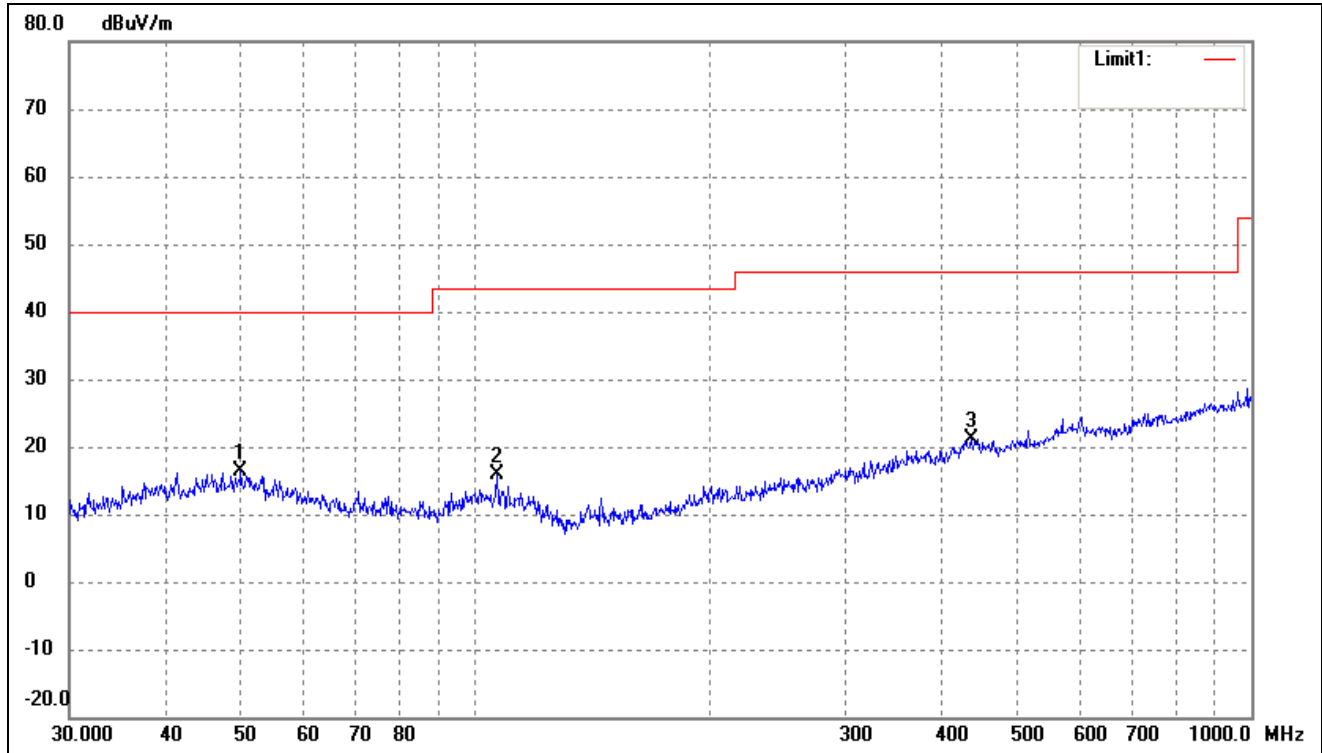

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.8814	27.31	-11.00	16.31	40.00	-23.69	157	100	peak
2	106.7587	28.95	-13.07	15.88	43.50	-27.62	92	100	peak
3	435.5898	27.40	-6.20	21.20	46.00	-24.80	292	100	peak


802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

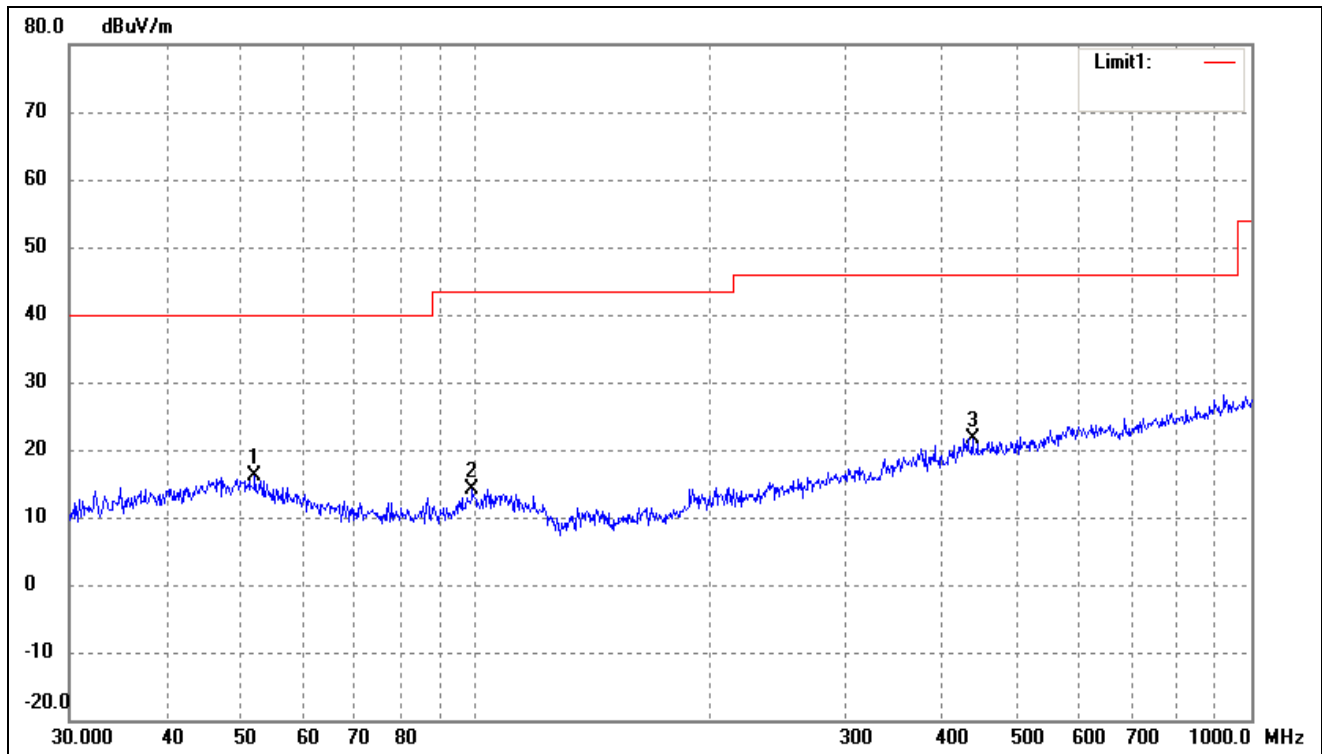

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.0251	27.47	-11.46	16.01	40.00	-23.99	154	100	peak
2	99.1797	27.58	-13.36	14.22	43.50	-29.28	143	100	peak
3	437.1199	27.87	-6.19	21.68	46.00	-24.32	142	100	peak

802.11n-HT20

Test Channel	5180MHz(worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

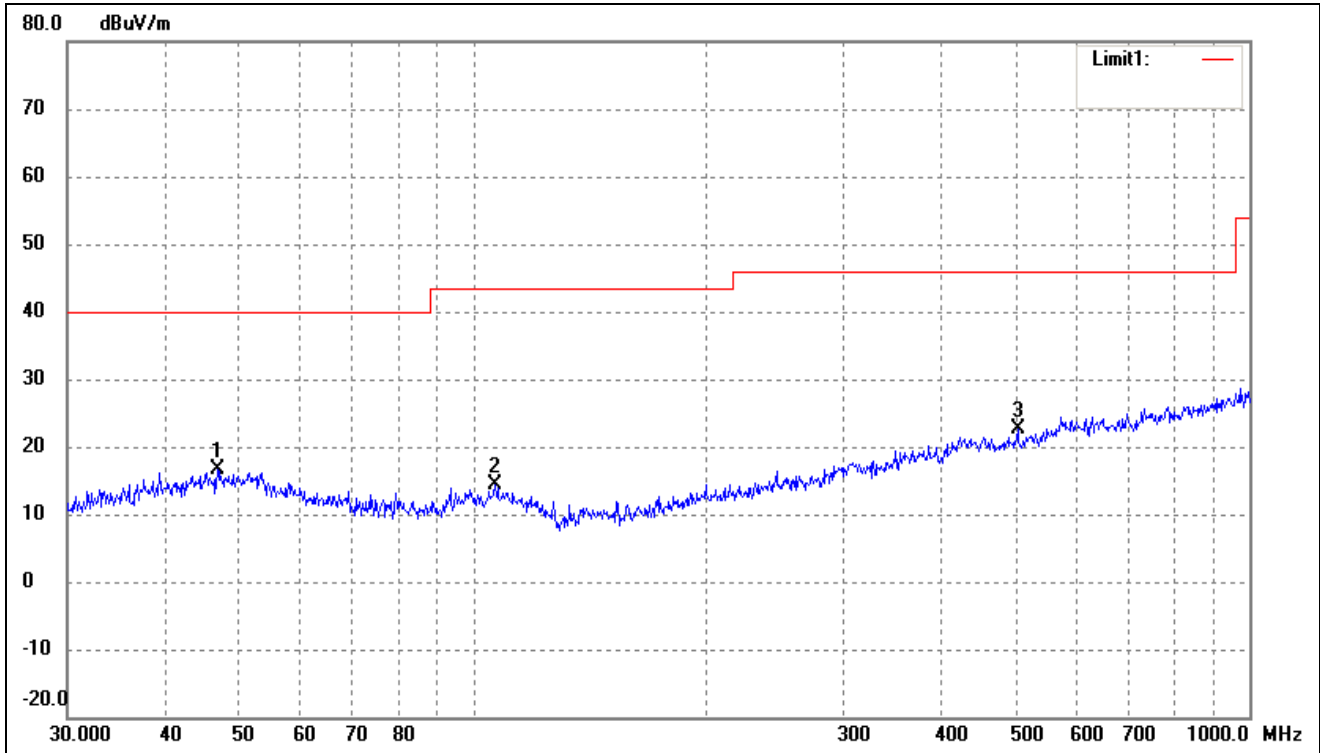

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.8303	27.92	-11.21	16.71	40.00	-23.29	243	100	peak
2	106.7587	27.48	-13.07	14.41	43.50	-29.09	201	100	peak
3	502.9395	28.93	-6.18	22.75	46.00	-23.25	61	100	peak

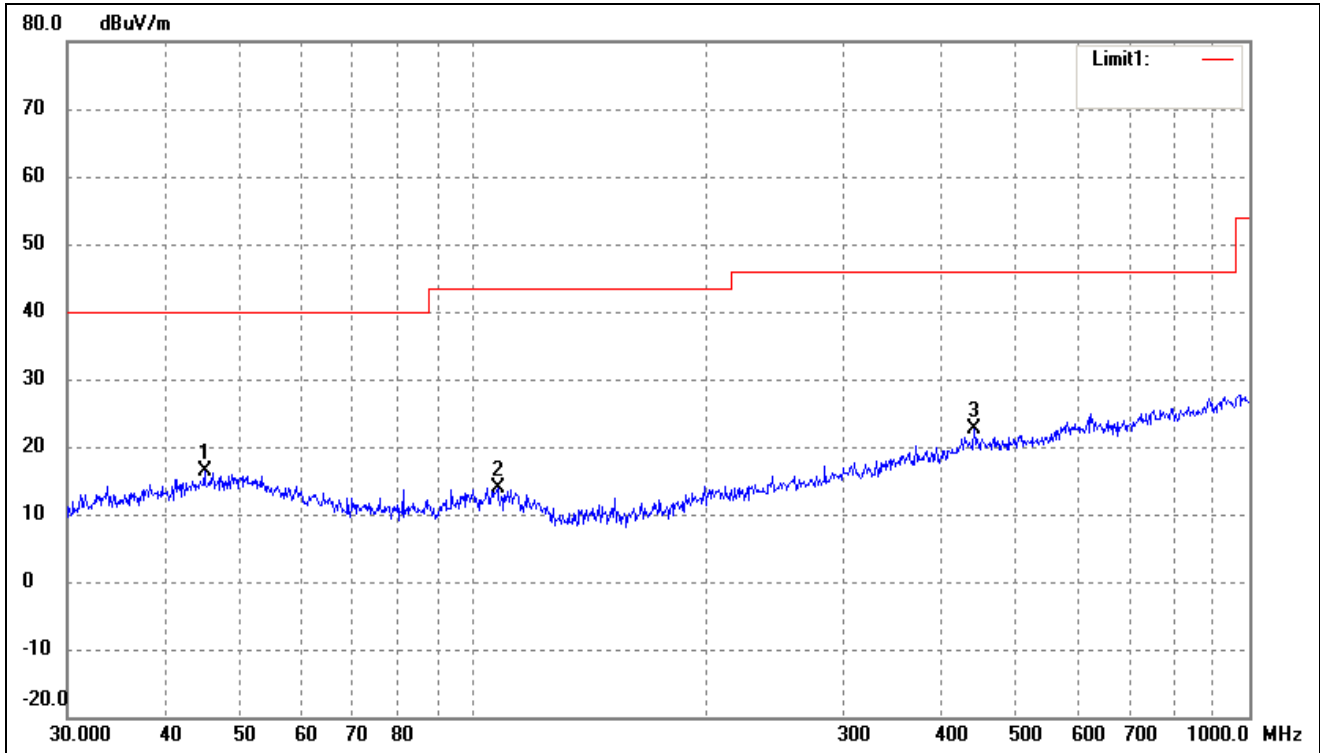
802.11n-HT40

Test Channel

5190MHz(worst case)


Polarity:

Horizontal



No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	45.0583	27.71	-11.34	16.37	40.00	-23.63	234	100	peak
2	107.5101	26.91	-13.05	13.86	43.50	-29.64	195	100	peak
3	441.7426	28.76	-6.23	22.53	46.00	-23.47	93	100	peak


802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

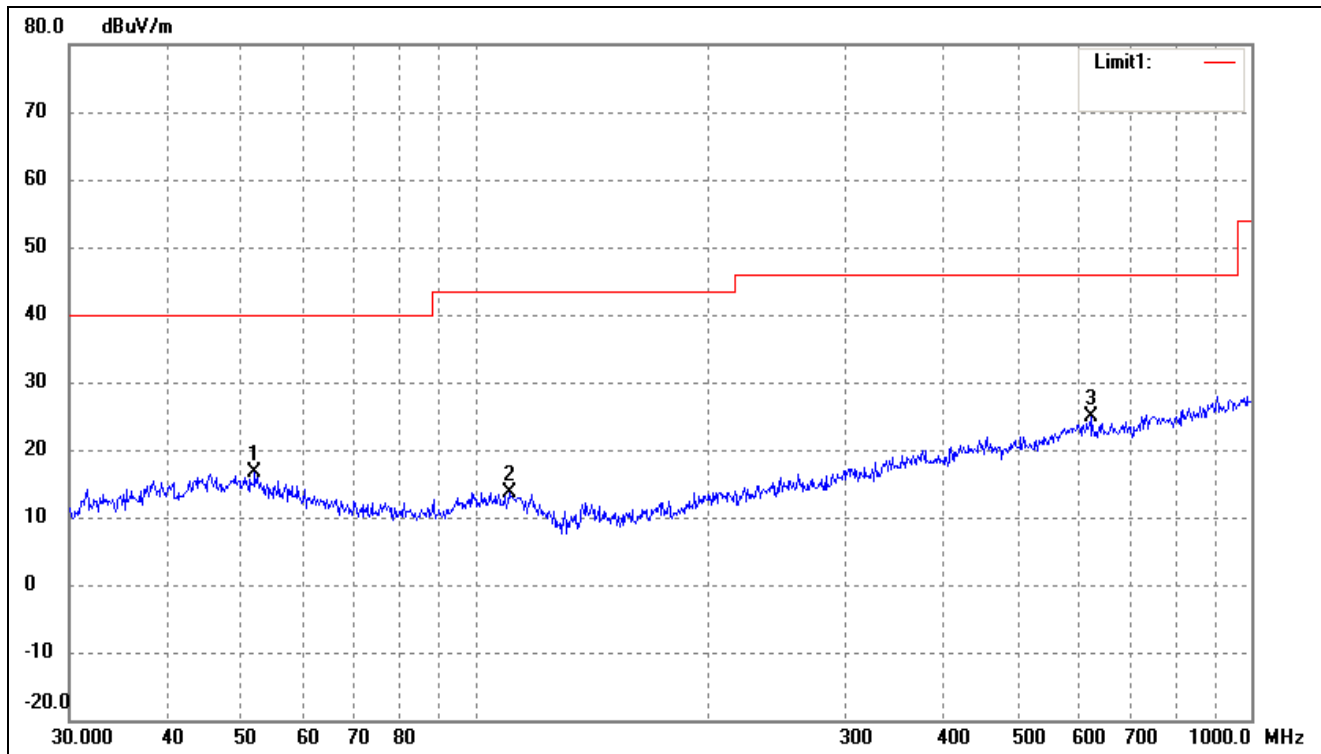

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.0251	28.04	-11.46	16.58	40.00	-23.42	83	100	peak
2	110.5687	26.73	-13.08	13.65	43.50	-29.85	119	100	peak
3	620.7096	28.94	-4.11	24.83	46.00	-21.17	124	100	peak

➤ 5725-5850MHz


802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

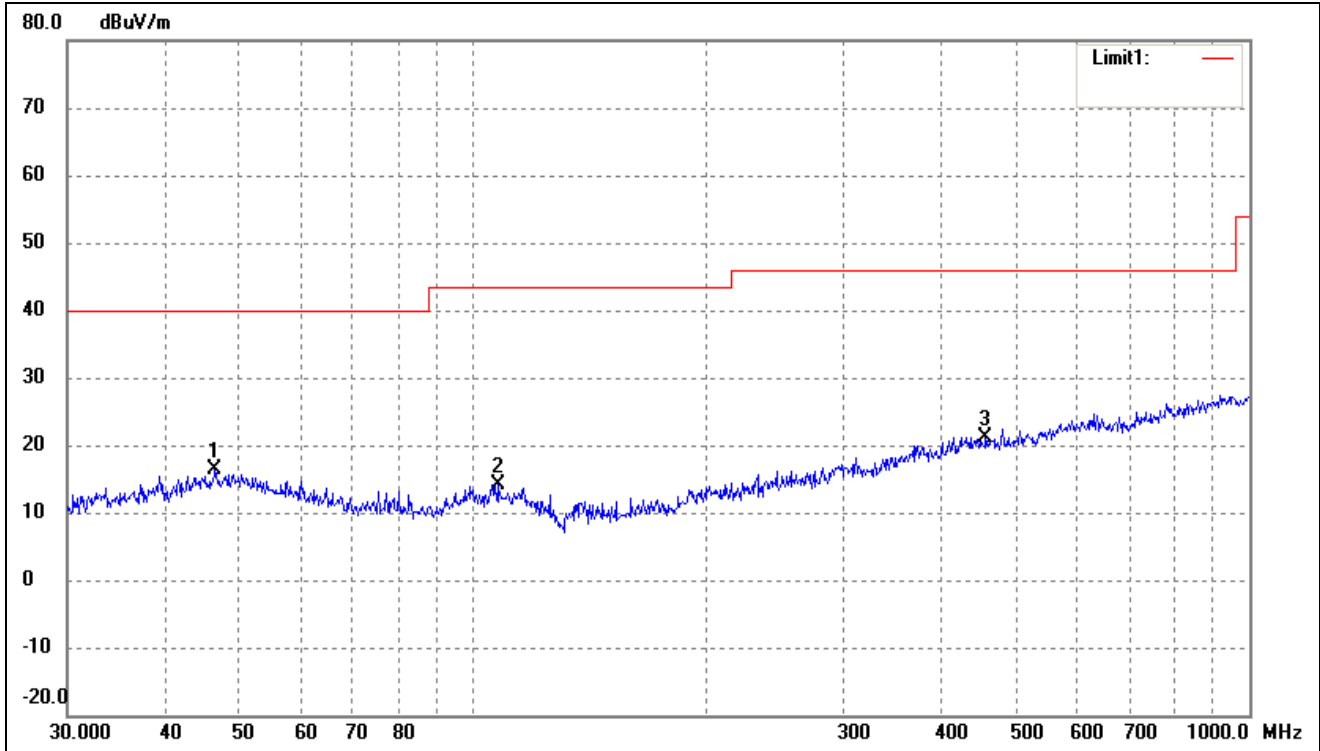

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.5030	27.59	-11.23	16.36	40.00	-23.64	241	100	peak
2	107.5101	27.27	-13.05	14.22	43.50	-29.28	183	100	peak
3	457.5073	27.70	-6.54	21.16	46.00	-24.84	72	100	peak

802.11a


Test Channel	5745MHz(worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

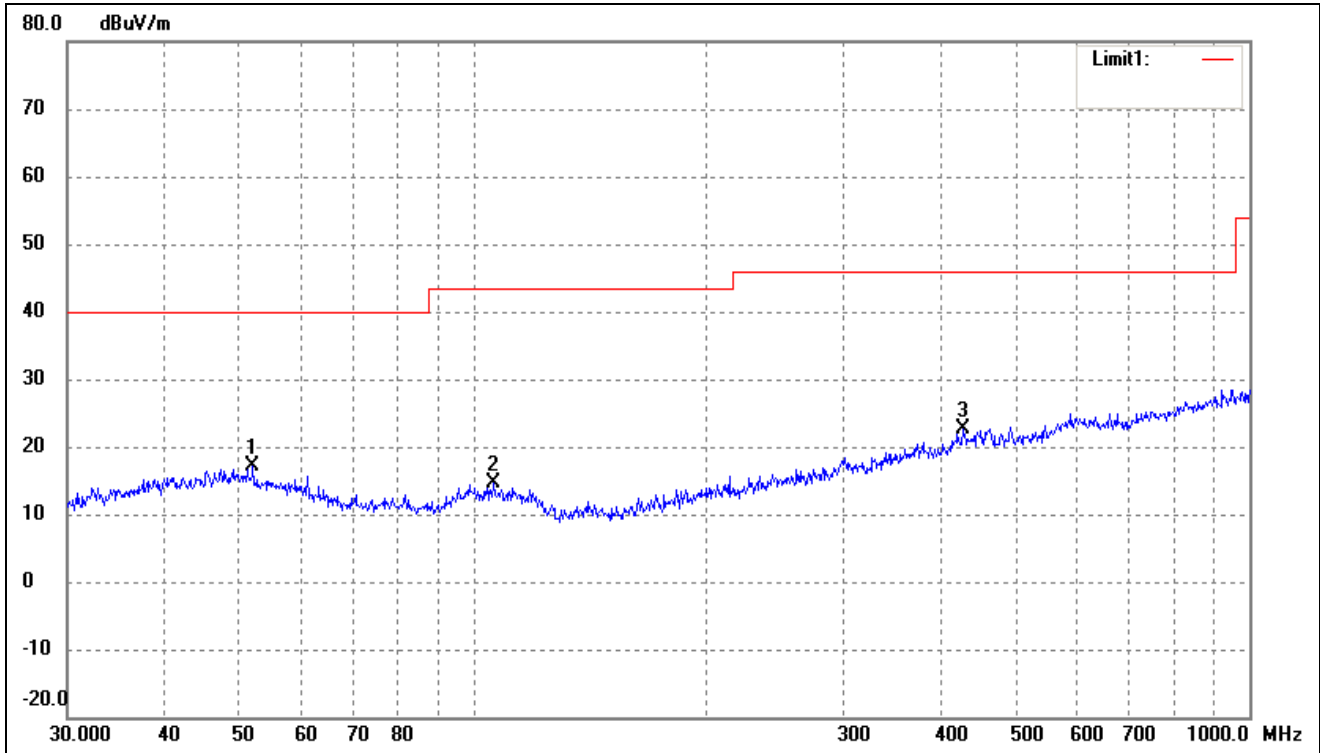

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.0251	28.48	-11.46	17.02	40.00	-22.98	97	100	peak
2	106.3850	27.81	-13.08	14.73	43.50	-28.77	297	100	peak
3	428.0193	28.77	-6.19	22.58	46.00	-23.42	105	100	peak

802.11n-HT20


Test Channel	5745MHz(worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

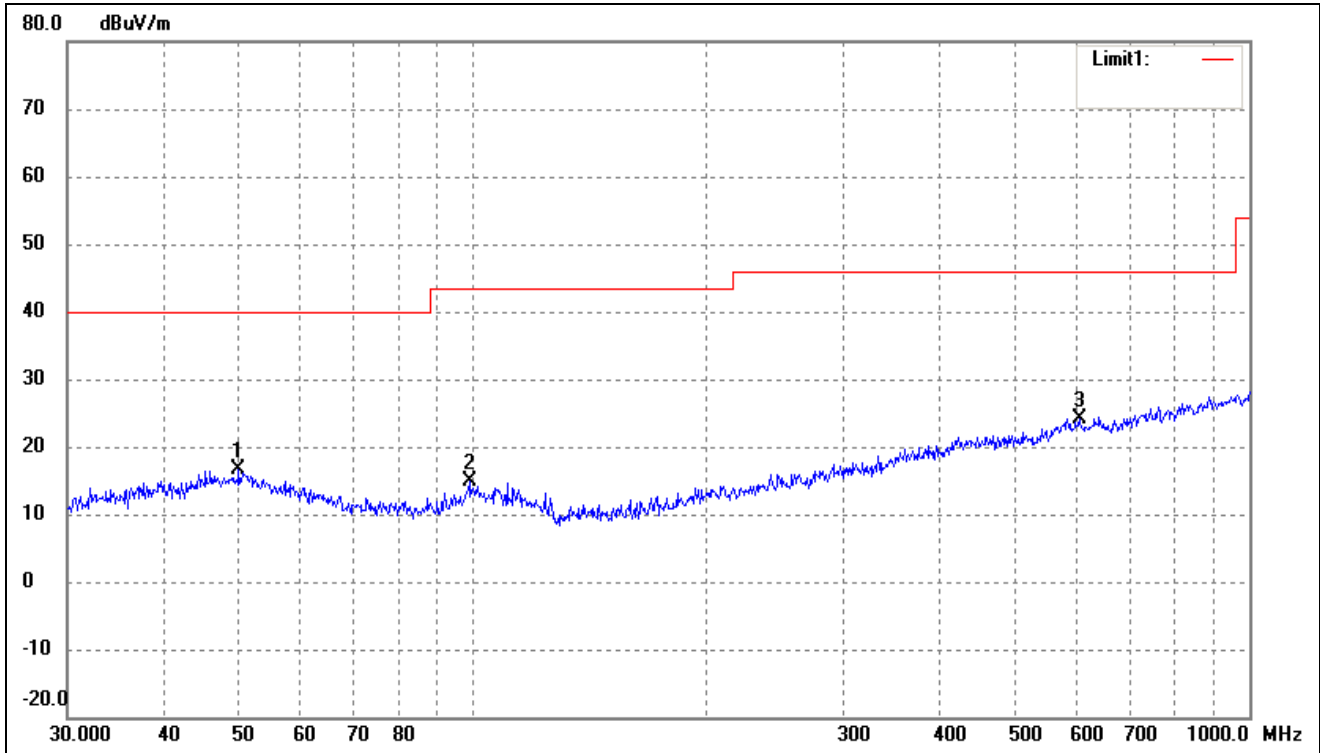

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.8814	27.51	-11.00	16.51	40.00	-23.49	277	100	peak
2	98.8326	28.23	-13.45	14.78	43.50	-28.72	97	100	peak
3	603.5392	28.16	-4.03	24.13	46.00	-21.87	75	100	peak


802.11n-HT20

Test Channel	5745MHz(worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

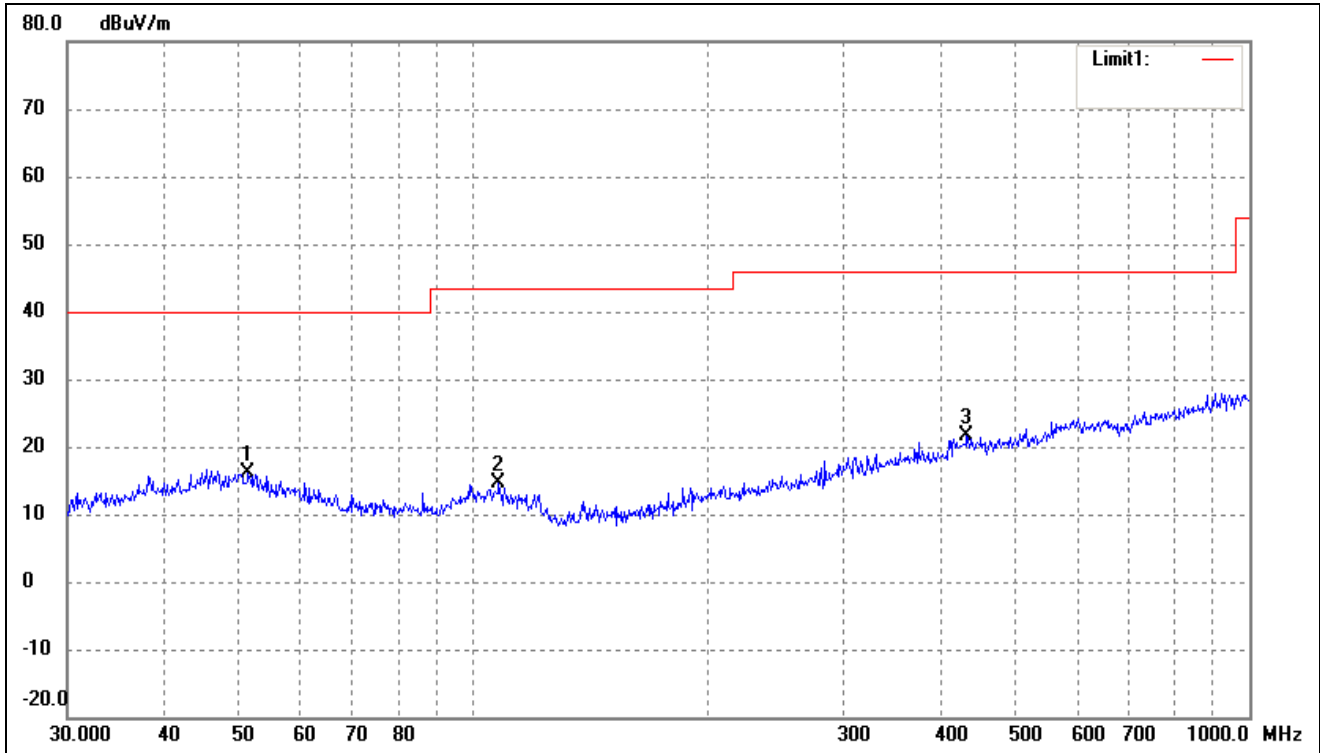

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.3005	27.53	-11.29	16.24	40.00	-23.76	72	100	peak
2	107.8877	27.61	-13.05	14.56	43.50	-28.94	340	100	peak
3	432.5457	27.73	-6.19	21.54	46.00	-24.46	99	100	peak


802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

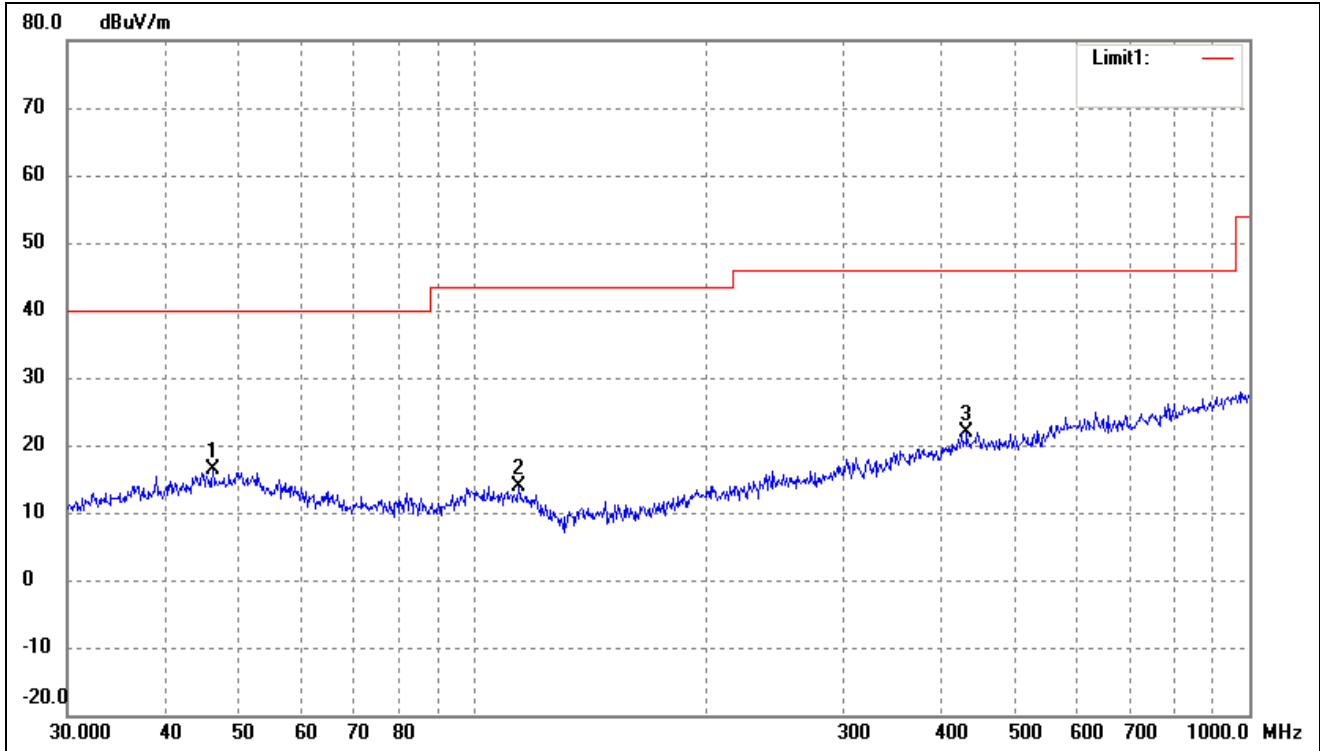

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.1780	27.57	-11.26	16.31	40.00	-23.69	119	100	peak
2	114.5146	27.44	-13.53	13.91	43.50	-29.59	99	100	peak
3	432.5457	28.10	-6.19	21.91	46.00	-24.09	113	100	peak

802.11n-HT40


Test Channel	5755MHz(worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------

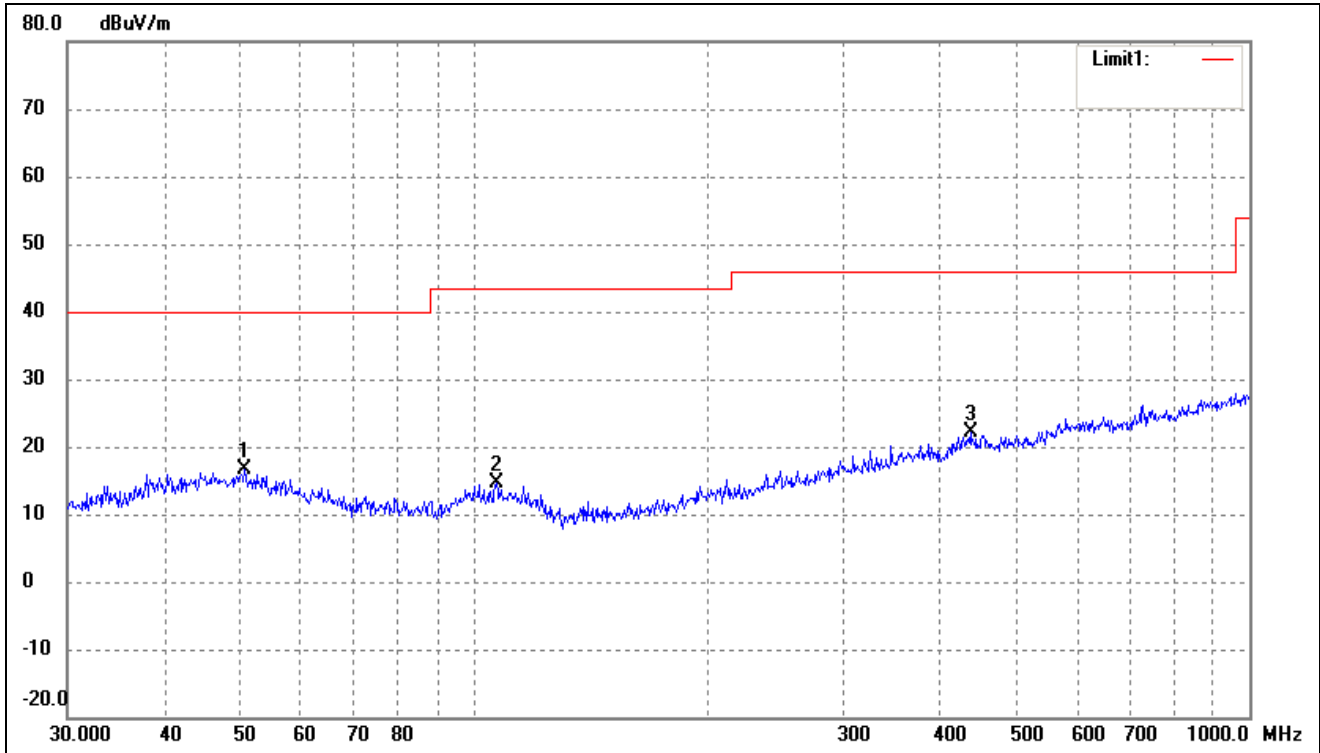

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.7637	27.89	-11.17	16.72	40.00	-23.28	215	100	peak
2	107.1337	27.78	-13.07	14.71	43.50	-28.79	168	100	peak
3	437.1199	28.30	-6.19	22.11	46.00	-23.89	52	100	peak


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

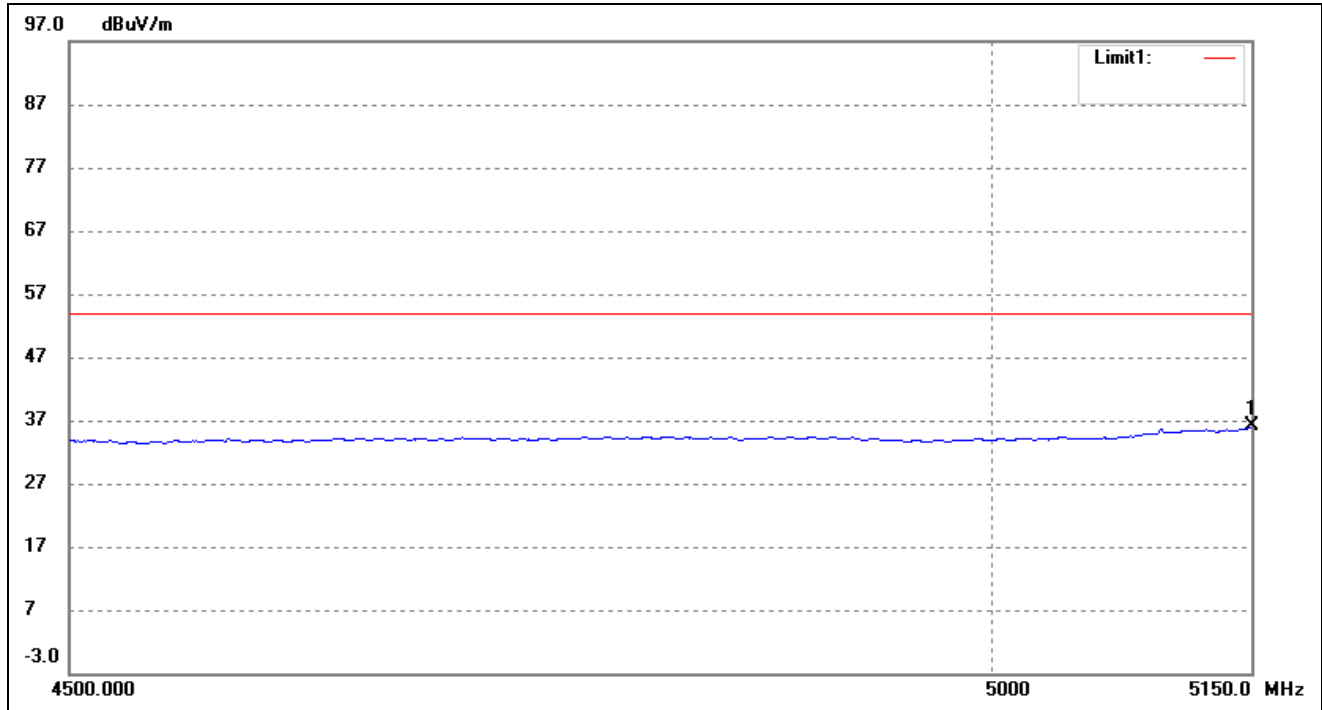


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	40.36	-4.32	36.04	54.00	-17.96	75	100	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

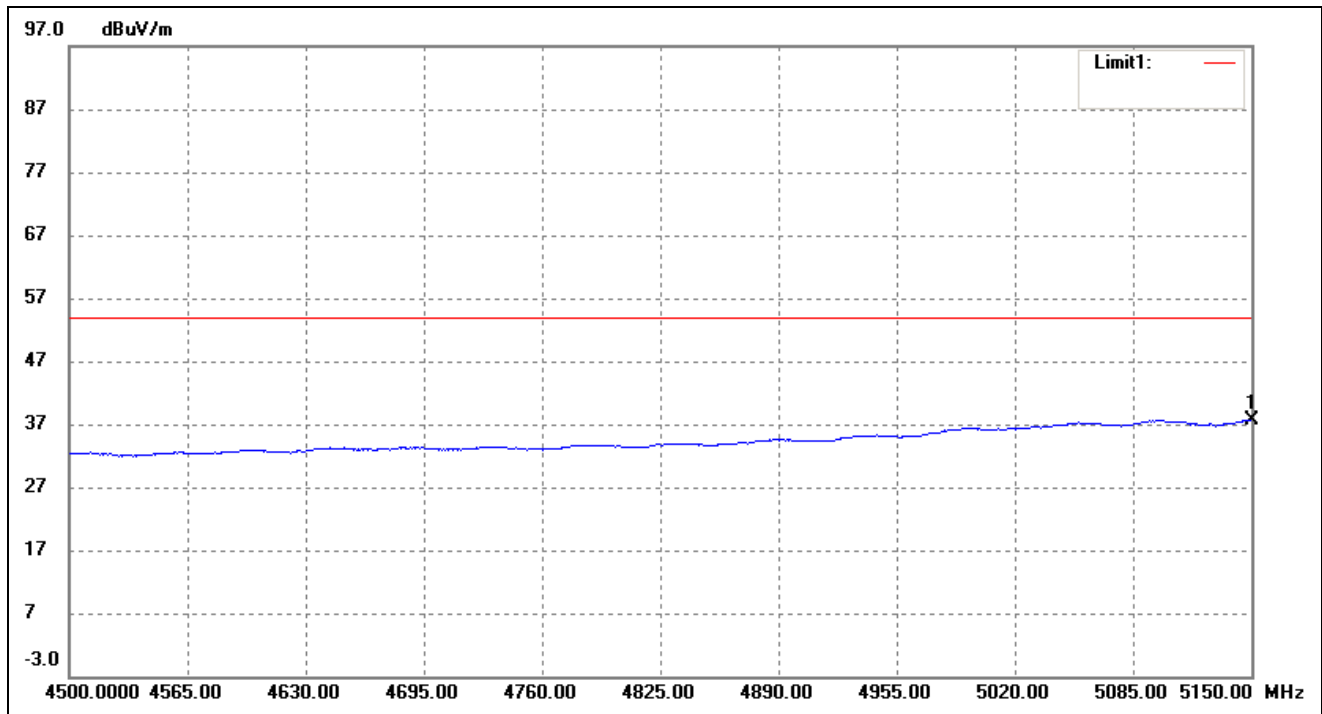


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	37.77	-0.13	37.64	54.00	-16.36	132	100	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

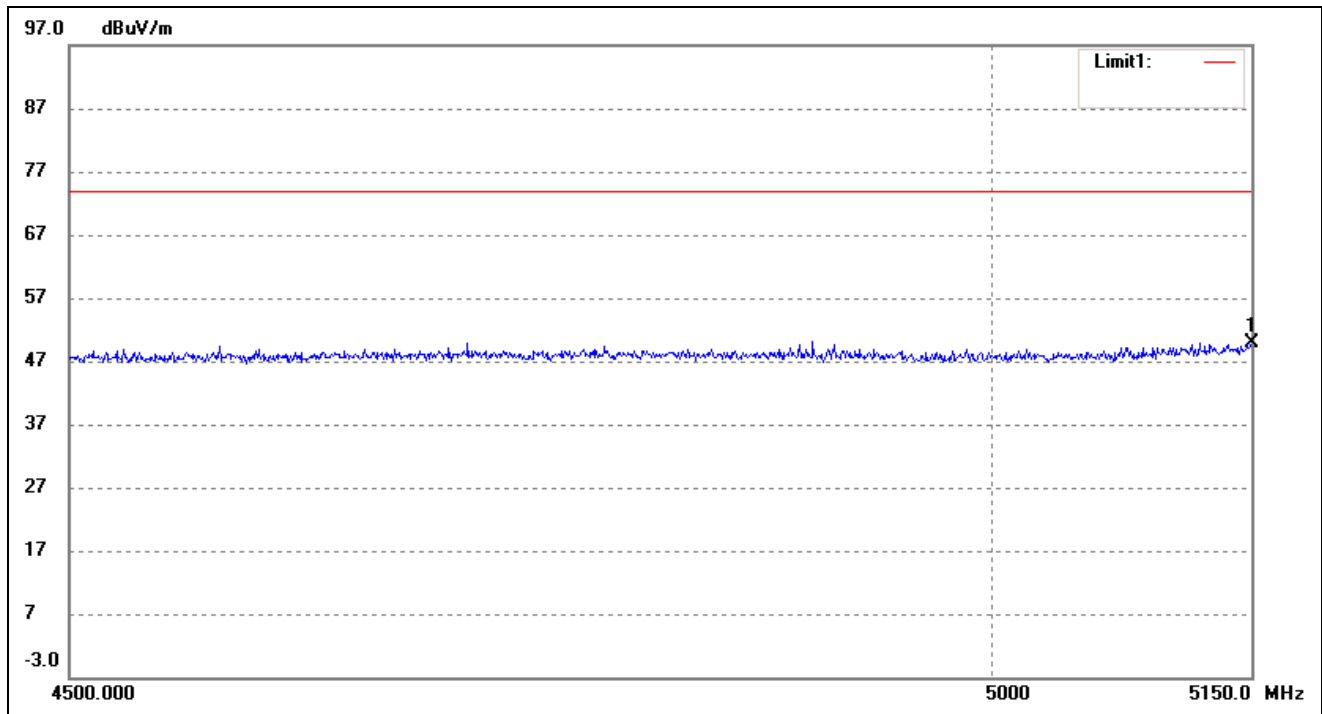


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	54.19	-4.32	49.87	74.00	-24.13	182	100	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

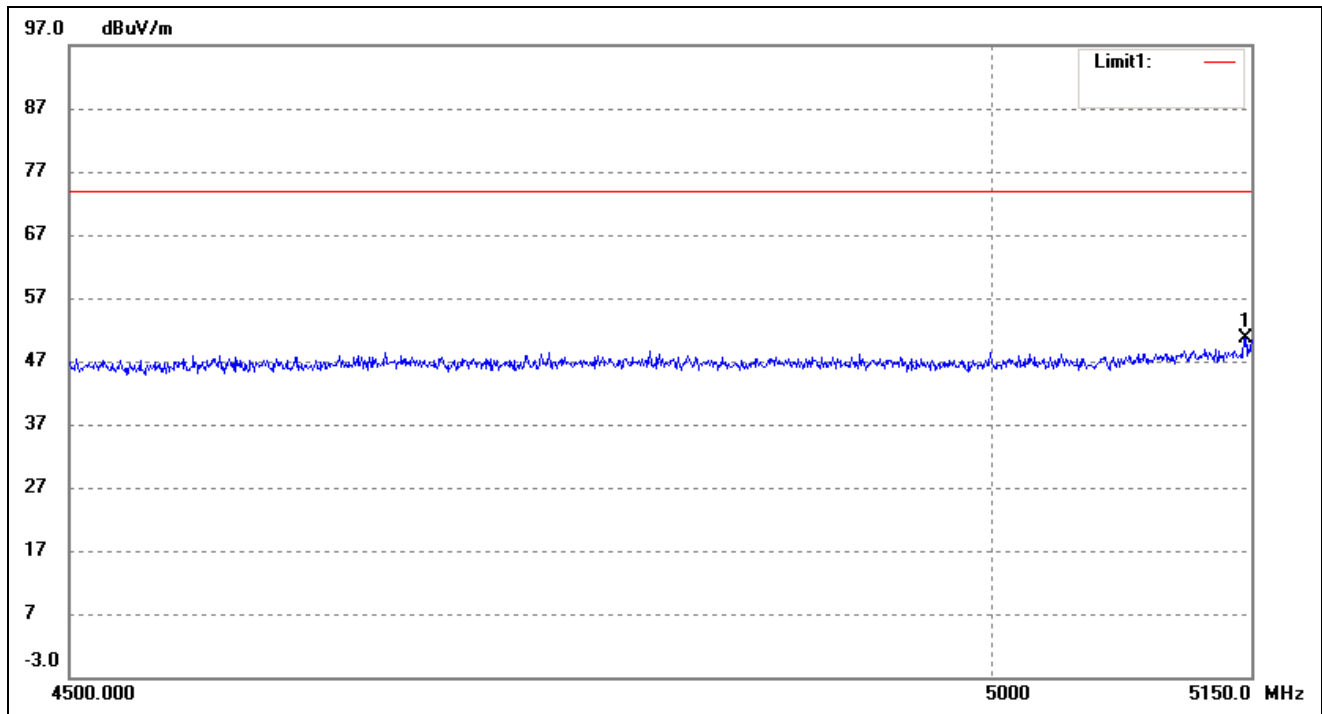


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5146.527	54.95	-4.32	50.63	74.00	-23.37	255	100	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

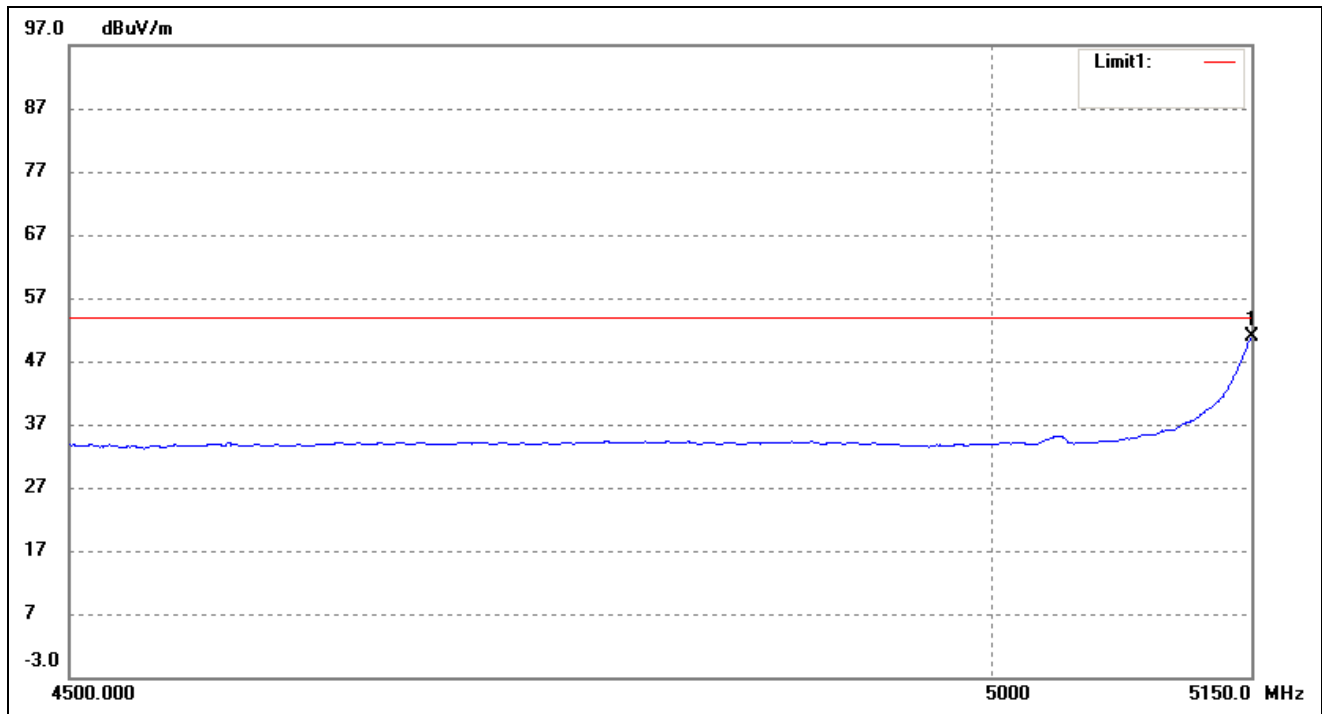

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	55.20	-4.32	50.88	54.00	-3.12	305	100	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

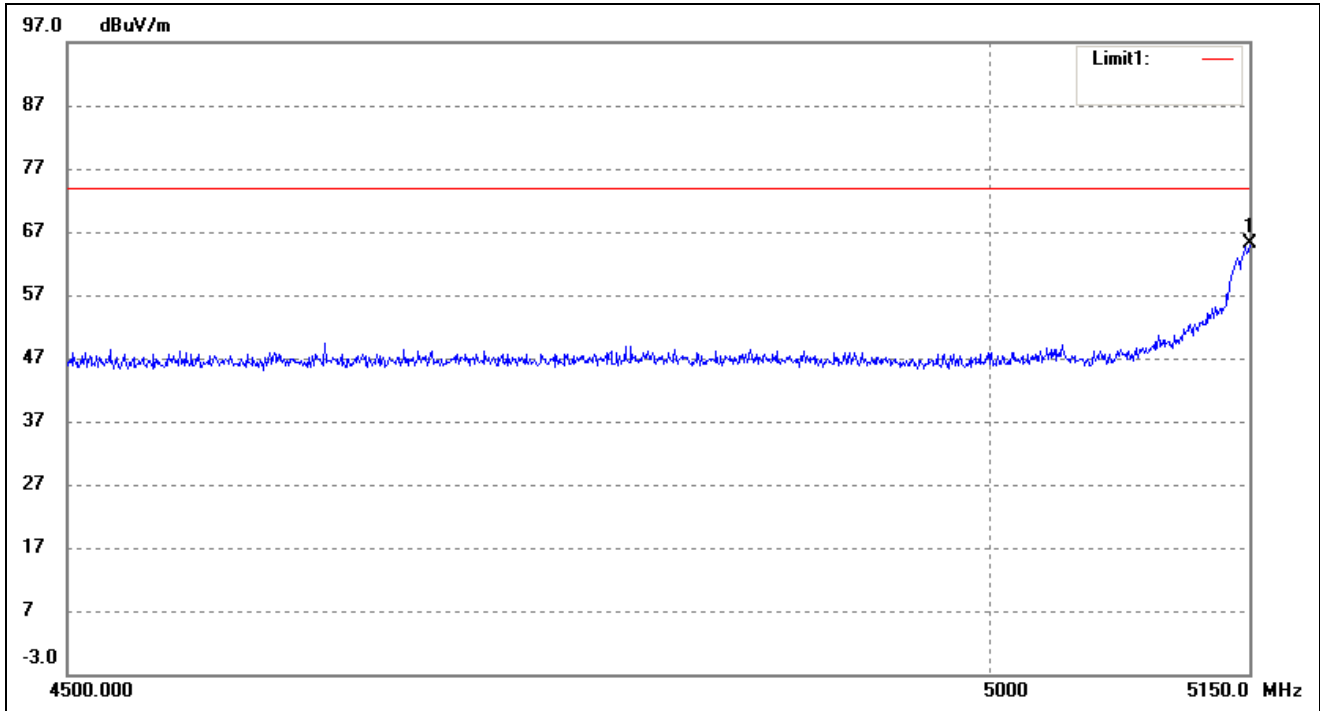

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	69.44	-4.32	65.12	74.00	-8.88	261	100	peak

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.14	7.11	61.25	74	-12.75	H	PK
10360	39.72	7.11	46.83	54	-7.17	H	AV
10360	52.46	7.11	59.57	74	-14.43	V	PK
10360	37.64	7.11	44.75	54	-9.25	V	AV
High Channel (5240MHz)							
10480	53.97	7.10	61.07	74	-12.93	H	PK
10480	38.56	7.10	45.66	54	-8.34	H	AV
10480	51.05	7.10	58.15	74	-15.85	V	PK
10480	37.62	7.10	44.72	54	-9.28	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	53.92	9.02	62.94	74	-11.06	H	PK
11490	36.54	9.02	45.56	54	-8.44	H	AV
11490	52.16	9.02	61.18	74	-12.82	V	PK
11490	35.89	9.02	44.91	54	-9.09	V	AV
High Channel (5825MHz)							
11610	55.65	8.94	64.59	74	-9.41	H	PK
11610	37.26	8.94	46.20	54	-7.80	H	AV
11610	52.47	8.94	61.41	74	-12.59	V	PK
11610	38.06	8.94	47.00	54	-7.00	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.52	-27
Highest	Above 5350	-37.63	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.14	-27
	5715 to 5725	-35.53	-17
Highest	5850 to 5860	-40.28	-17
	Above 5860	-33.54	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	53.87	7.11	60.98	74	-13.02	H	PK
10360	38.46	7.11	45.57	54	-8.43	H	AV
10360	56.54	7.11	63.65	74	-10.35	V	PK
10360	39.44	7.11	46.55	54	-7.45	V	AV
High Channel (5240MHz)							
10480	57.54	7.10	64.64	74	-9.36	H	PK
10480	38.65	7.10	45.75	54	-8.25	H	AV
10480	55.31	7.10	62.41	74	-11.59	V	PK
10480	40.14	7.10	47.24	54	-6.76	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.69	9.02	64.71	74	-9.29	H	PK
11490	36.75	9.02	45.77	54	-8.23	H	AV
11490	53.27	9.02	62.29	74	-11.71	V	PK
11490	36.65	9.02	45.67	54	-8.33	V	AV
High Channel (5825MHz)							
11610	53.97	8.94	62.91	74	-11.09	H	PK
11610	34.59	8.94	43.53	54	-10.47	H	AV
11610	54.01	8.94	62.95	74	-11.05	V	PK
11610	36.69	8.94	45.63	54	-8.37	V	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.54	-27
Highest	Above 5350	-34.30	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.91	-27
	5715 to 5725	-35.64	-17
Highest	5850 to 5860	-29.32	-17
	Above 5860	-38.41	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	57.68	7.11	64.79	74	-9.21	H	PK
10380	38.35	7.11	45.46	54	-8.54	H	AV
10380	52.15	7.11	59.26	74	-14.74	V	PK
10380	37.65	7.11	44.76	54	-9.24	V	AV
High Channel (5230MHz)							
10460	54.06	7.1	61.16	74	-12.84	H	PK
10460	36.97	7.1	44.07	54	-9.93	H	AV
10460	54.26	7.1	61.36	74	-12.64	V	PK
10460	36.98	7.1	44.08	54	-9.92	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	55.31	9.04	64.35	74	-9.65	H	PK
11510	36.28	9.04	45.32	54	-8.68	H	AV
11510	54.19	9.04	63.23	74	-10.77	V	PK
11510	34.64	9.04	43.68	54	-10.32	V	AV
High Channel (5795MHz)							
11590	55.36	8.96	64.32	74	-9.68	H	PK
11590	36.87	8.96	45.83	54	-8.17	H	AV
11590	53.74	8.96	62.70	74	-11.30	H	PK
11590	34.31	8.96	43.27	54	-10.73	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.52	-27
Highest	Above 5350	-38.44	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.52	-27
	5715 to 5725	-27.45	-17
Highest	5850 to 5860	-26.64	-17
	Above 5860	-40.31	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

10. Frequency Stability

10.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

10.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	158	0.0304
100%		-20	160	0.0308
100%		-10	103	0.0198
100%		0	107	0.0206
100%		+10	152	0.0292
100%		+20	117	0.0225
100%		+30	116	0.0223
100%		+40	132	0.0254
100%		+50	128	0.0246
Low Battery power	3.5	+20	132	0.0254
High Battery power	4.4	+20	166	0.0319

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	136	0.0235
100%		-20	143	0.0247
100%		-10	122	0.0211
100%		0	165	0.0285
100%		+10	151	0.0261
100%		+20	110	0.0190
100%		+30	103	0.0178
100%		+40	143	0.0247
100%		+50	171	0.0296
Low Battery power	3.5	+20	174	0.0301
High Battery power	4.4	+20	177	0.0306

***** END OF REPORT *****