



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: Apr 09, 2020 ~ Apr 20, 2020  
 Test Report S/N: LR500112004K  
 Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**2AVQGGW768**

APPLICANT

**Qlight Co., Ltd.**

<b>Equipment Class</b>	:	<b>Digital Transmission System (DTS)</b>
<b>Manufacturing Description</b>	:	<b>Gateway</b>
<b>Manufacturer</b>	:	<b>Qlight Co., Ltd.</b>
<b>Model name</b>	:	<b>GW768</b>
<b>Test Device Serial No.:</b>	:	<b>Identical prototype</b>
<b>Rule Part(s)</b>	:	<b>FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013</b>
<b>Frequency Range</b>	:	<b>Zigbee 2405 ~ 2480 MHz</b>
<b>Max. Output Power</b>	:	<b>Max 6.34 dBm – Conducted_Port1</b>
<b>Data of issue</b>	:	<b>April 21, 2020</b>

This test report is issued under the authority of:

The test was supervised by:

Ja-Beom Koo, Manager

Eun-Hwan Jung, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6 dB BANDWIDTH	-----	6
3.2.2 PEAK OUTPUT POWER	-----	8
3.2.3 POWER SPECTRAL DENSITY	-----	10
3.2.4 BAND EDGE	-----	12
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	14
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	16
3.2.7 AC Conducted Emissions	-----	37
<b>APPENDIX</b>		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	38

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2020-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2021-04-11	FCC CAB
VCCI	JAPAN	C-4948,	2020-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2020-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2020-10-15	VCCI registration
VCCI	JAPAN	G-847	2021-12-13	VCCI registration
IC	CANADA	5799A-1	2021-06-16	IC filing
KOLAS	KOREA	NO.551	2021-08-20	KOLAS accredited Lab.

## 2. Information about test item

## 2-1 Client & Manufacturer

Client Company name : Qlight Co., Ltd.

Tel / Fax : +82 55-344-4069 / +82 55-344-4222

Manufacturer Qlight Co., Ltd.

Address 185-25, Mukbang-ro, Sangdong-myeon, Gimhae-si, Gyeongsangnam-do, Republic of Korea

Tel / Fax +82 55-344-4069 / +82 55-344-4222

## **2-2 Equipment Under Test (EUT)**

Model name : GW768

Serial number : Identical prototype

Date of receipt : April 09, 2020

EUT condition : Pre-production, not damaged

Antenna type : Pattern Antenna (Max Gain : -5.27 dBi)

Frequency Range : 2405 ~ 2480 MHz

RF output power : Max 6.34 dBm – Conducted

Type of Modulation : DSSS, OQPSK

Power Source : DC 24 V

### **2-3 Tested frequency**

	LOW	MID	HIGH
Frequency (MHz)	2405	2440	2480

## **2-4 Ancillary Equipment**

Equipment	Model No.	Serial No.	Manufacturer
Notebook	-	MS-1736	MSI

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	Conducted	C
15.247(b)	Transmitter Peak Output Power		C
15.247(e)	Transmitter Power Spectral Density		C
15.247(d)	Band Edge & Conducted Spurious emission		C
15.209	Transmitter emission	Radiated	C
15.207	AC Conducted Emissions	Conducted	N/A
15.203	Antenna requirement	-	C

N/A : This product is battery-enabled and excludes the test.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247. The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

#### → Antenna Requirement

Qlight Co., Ltd.. FCC ID: 2AVQGGW768 unit complies with the requirement of §15.203.  
The antenna type is FPCB Antenna

## 3.2 Technical Characteristics Test

### 3.2.1 6 dB Bandwidth

#### Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 3 X RBW

VBW = 3 X RBW

Sweep = auto

Trace = max hold

Detector function = peak

#### Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2405	1.932	Complies
2440	1.983	Complies
2480	1.997	Complies

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

6 dB Bandwidth  $\geq$  500 kHz

#### Measurement Setup


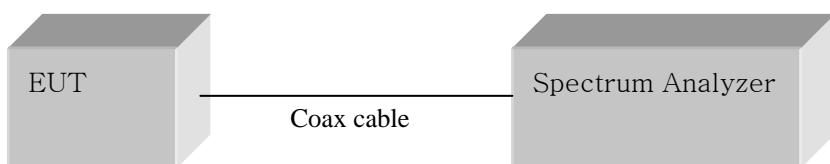


Figure 1: Measurement setup for the carrier frequency separation

## Zigbee

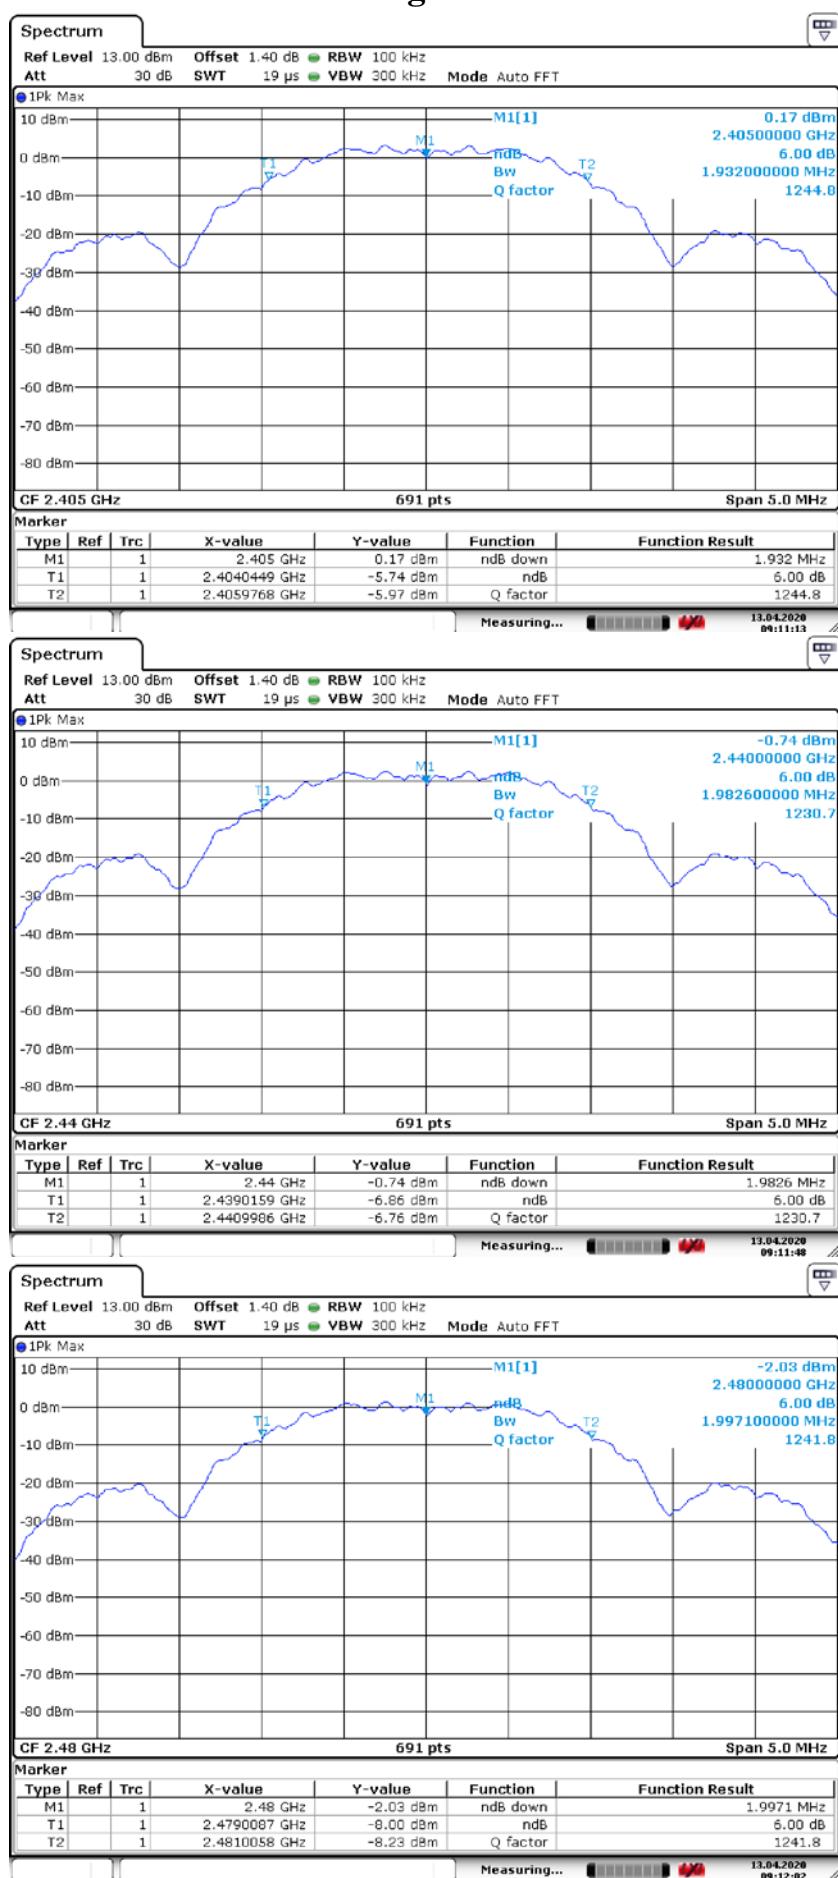

### 3.2.2 Peak Output Power Measurement

## Procedure:

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth :

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW  $\geq$  DTS Bandwidth Span  $\geq$  3 X RBW

Detector function = peak

### Measurement Data : Complies

Frequency (MHz)	Test Results	
	Measured data (dBm)	Result
2405	6.34	Complies
2440	6.25	Complies
2480	5.00	Complies

- See next pages for actual measured spectrum plots.


### **Minimum Standard:**

Peak output power	≤ 1 W(30 dBm)
-------------------	---------------

## Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

## Zigbee

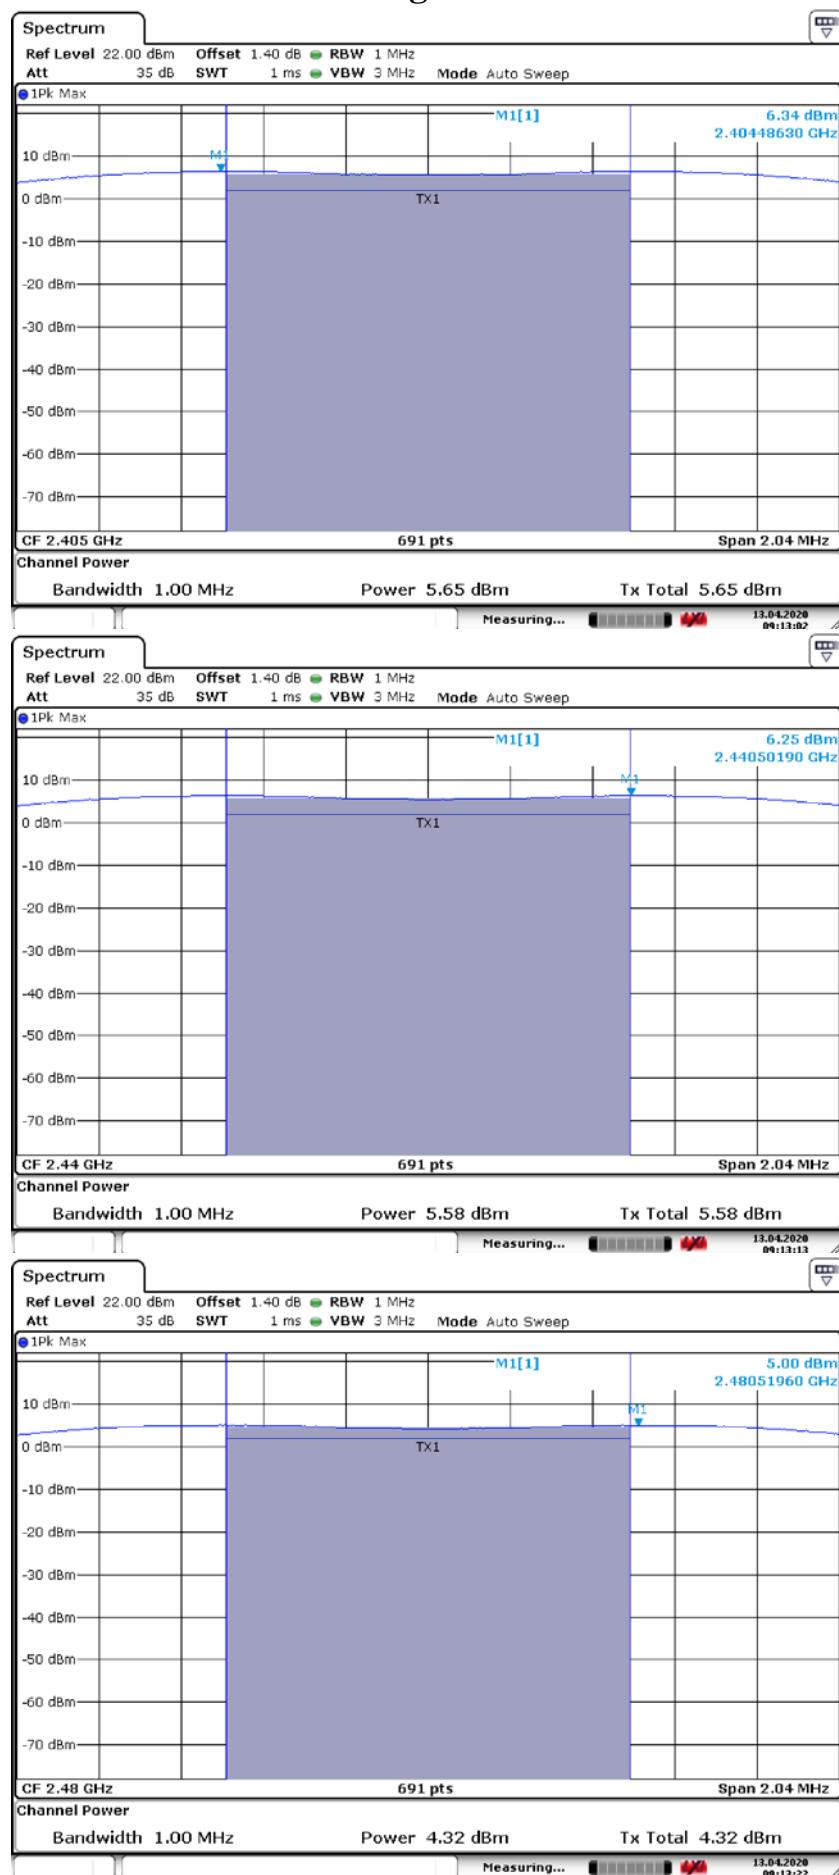

### 3.2.3 Power Spectral Density

#### Procedure:

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The spectrum analyzer is set to:

RBW = 3 kHz (3 kHz $\leq$ RBW $\leq$ 100 kHz)	Span $\geq$ 1.5 times the DTS bandwidth
VBW = 3 X RBW	Sweep = auto
Detector function = peak	Trace = max hold

**Measurement Data : Complies**

Frequency (MHz)	Test Results	
	dBm / 3 kHz BW	Result
2405	-6.46	Complies
2440	-6.79	Complies
2480	-8.41	Complies

- See next pages for actual measured spectrum plots.


**Minimum Standard:**

Power Spectral Density	$\leq$ 8 dBm @ 3 kHz BW
------------------------	-------------------------

**Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)

## Zigbee

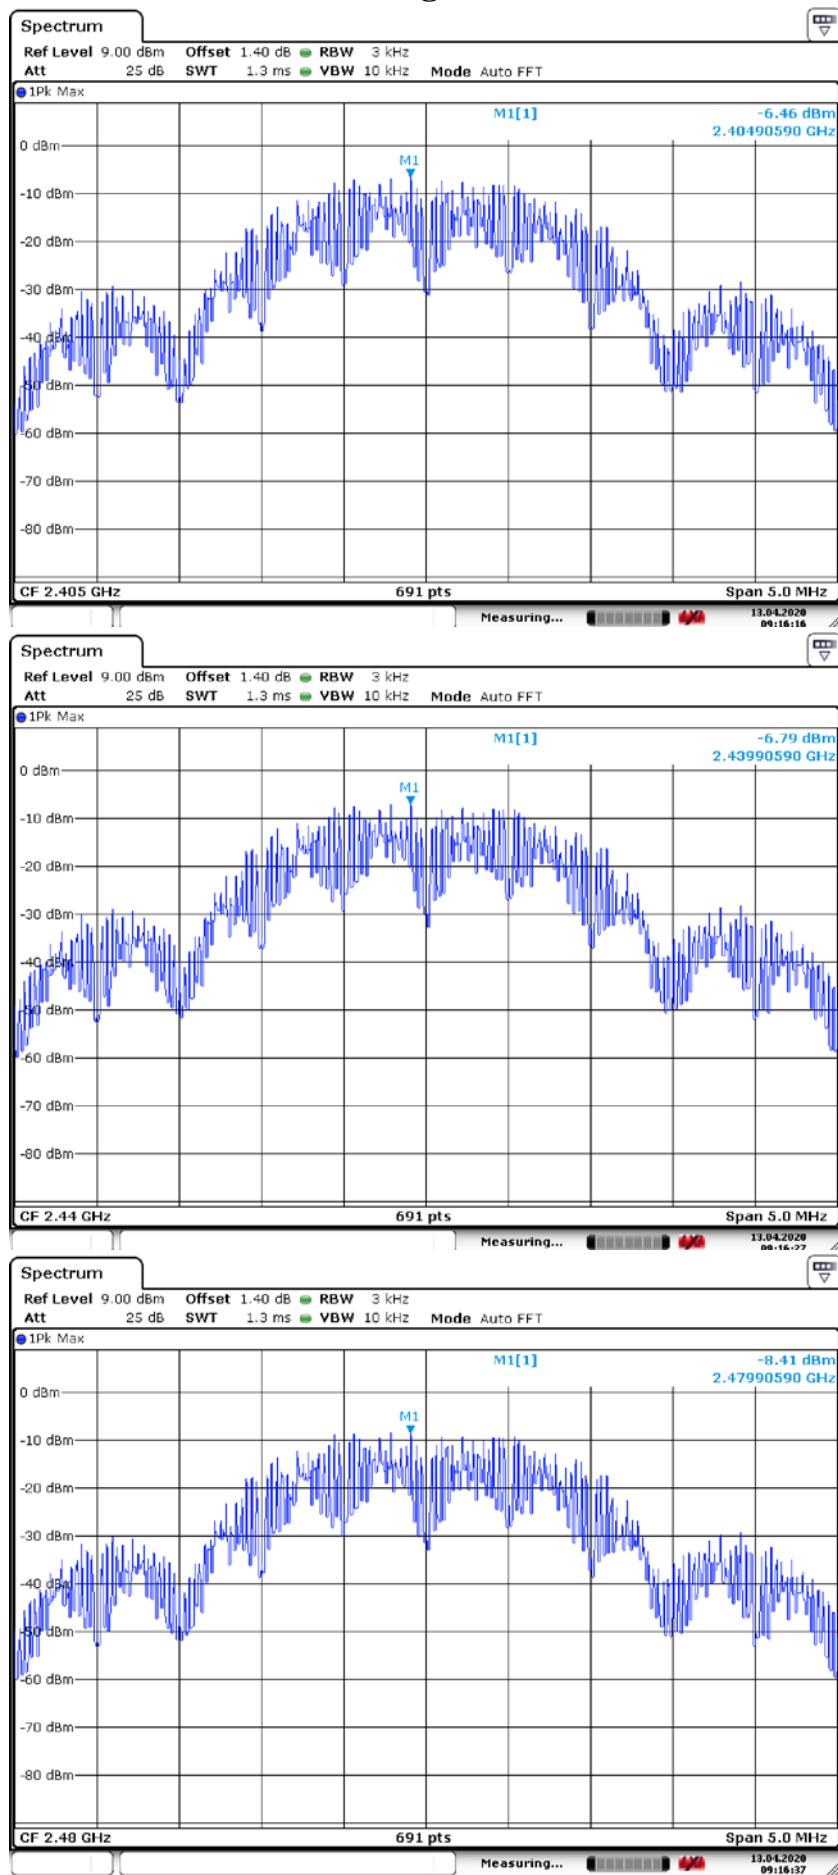

### 3.2.4 Band Edge

### Procedure:

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB..

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Detector function = peak Trace = max hold



Sweep = auto

#### Measurement Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

**Minimum Standard:**  $\leq 20 \text{ dBc}$

## Zigbee

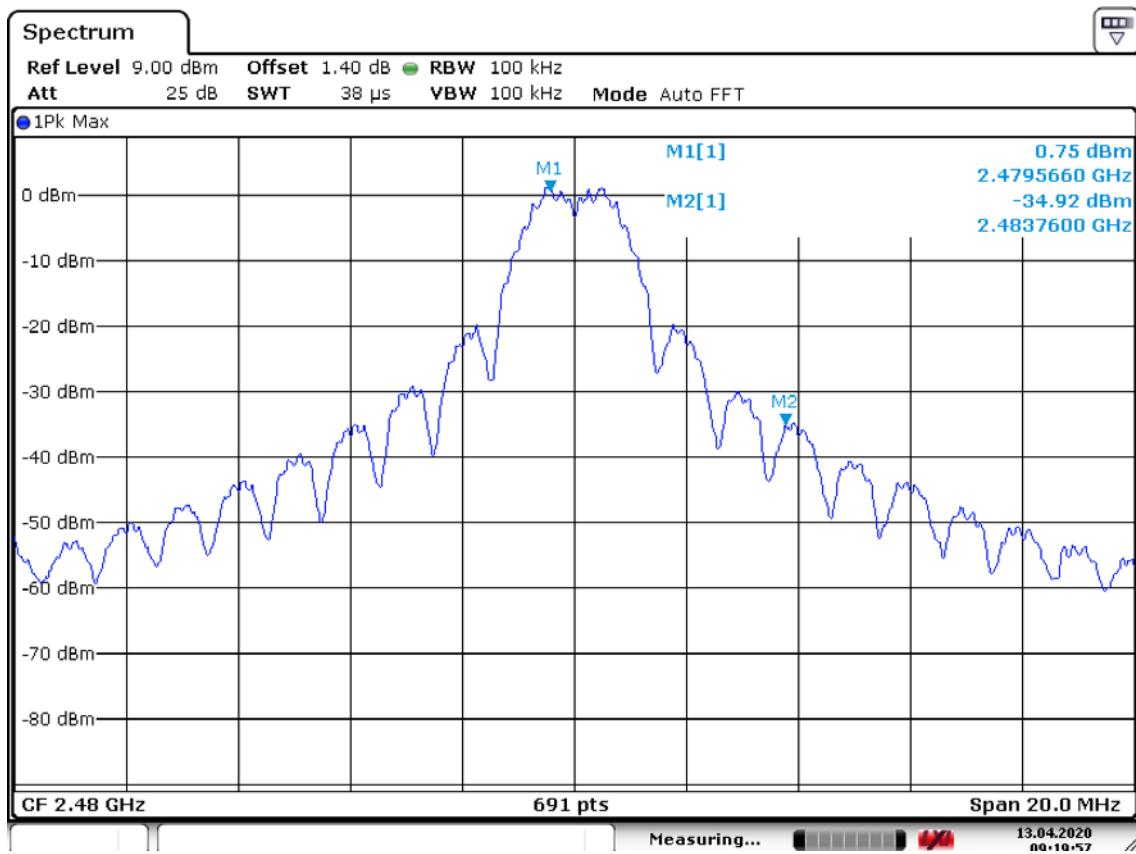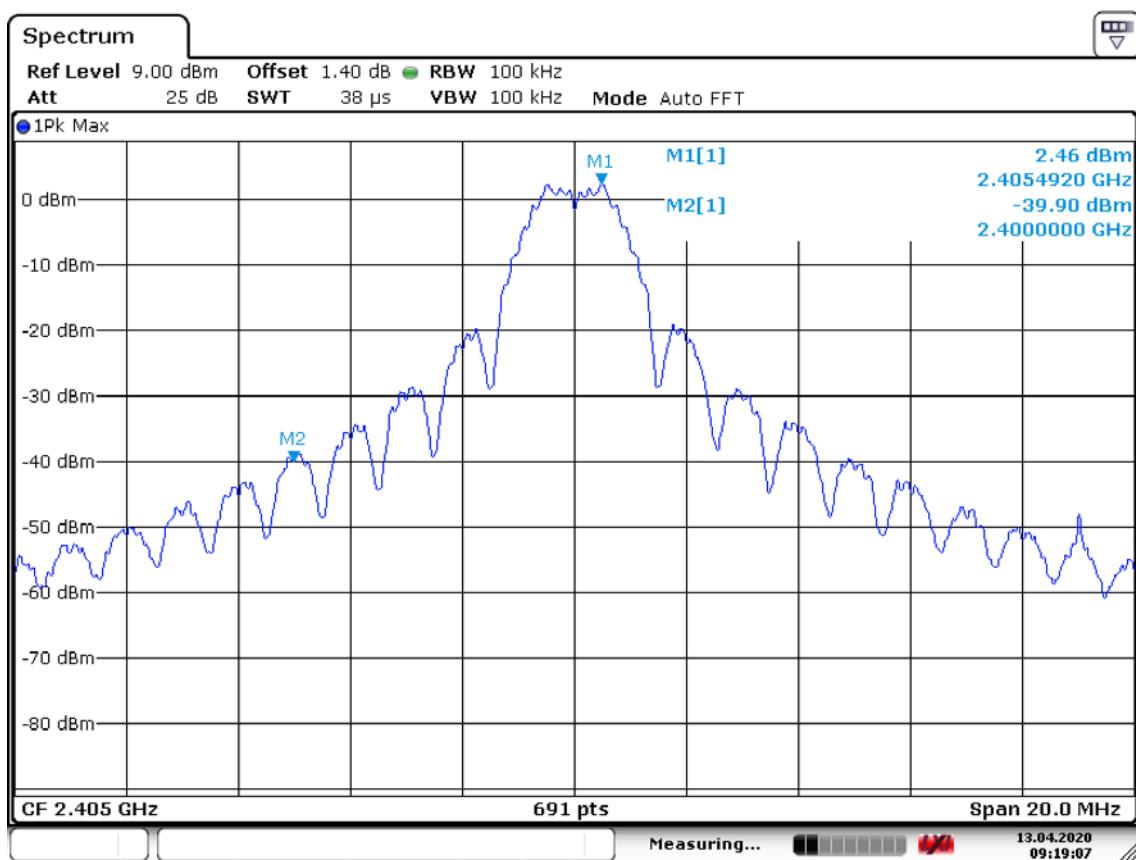

### 3.2.5 Conducted Spurious Emissions

### **Procedure:**

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz Sweep = auto

VBW = 100 kHz      Detector function = peak

Trace = max hold

### Measurement Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


---

<b>Minimum Standard:</b>	$\geq 20$ dBc
--------------------------	---------------

---

## Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

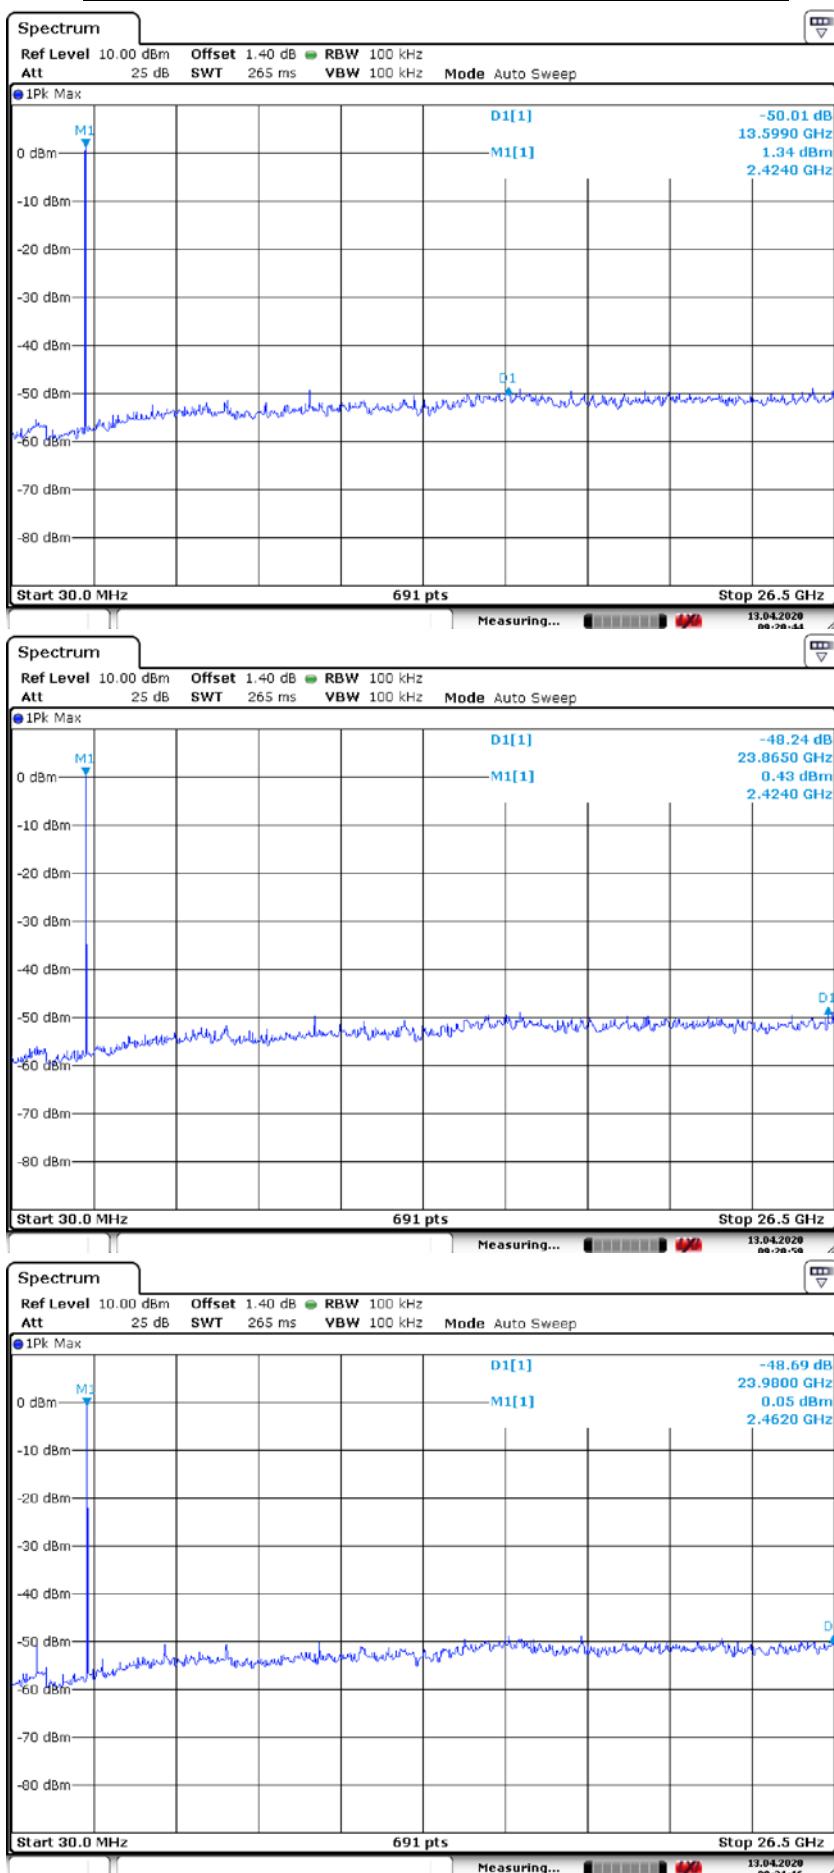Unwanted Emission – Zigbee (Low,Middle,High)

### 3.2.6 Radiated Spurious Emissions

#### Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defined in ANSI C63.10-2013.

The EUT is placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

#### The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30 MHz ~ 1 GHz)

VBW  $\geq$  RBW


= 1 MHz ( 1 GHz ~ 10<sup>th</sup> harmonic )



Trace = max hold

Detector function = peak

Sweep = auto

**below 30 MHz**

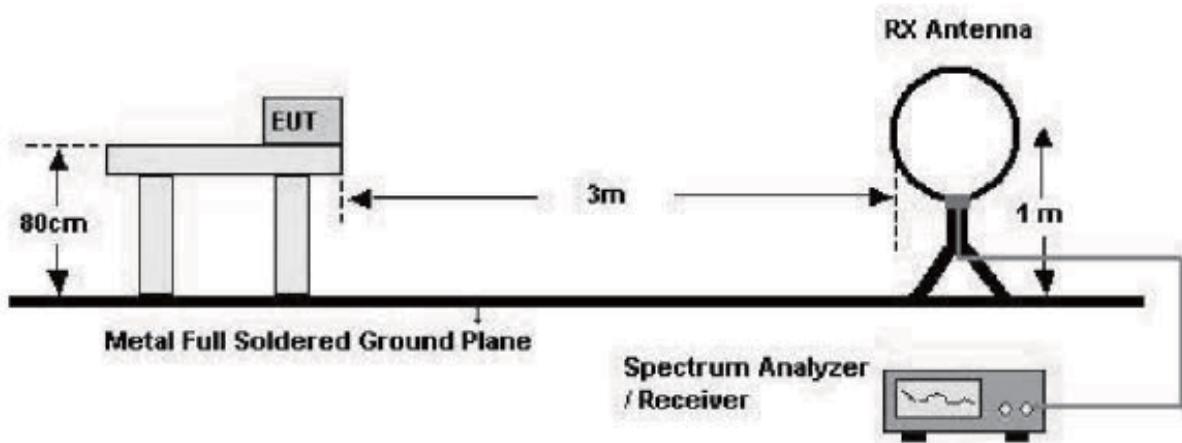

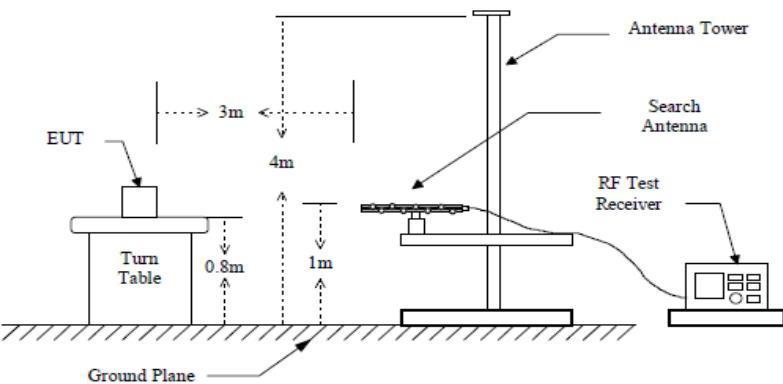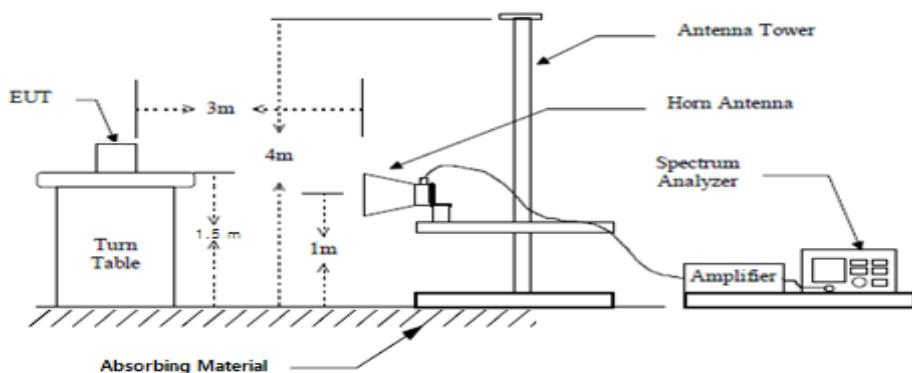**below 1 GHz (30 MHz to 1 GHz)****above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.

**Minimum Standard: FCC Part 15.209(a)**

<b>Frequency (MHz)</b>	<b>Limit (uV/m) @ 3 m</b>
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated Emissions – Zigbee

4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(LOW)

Tested by: JUNG E H

Power :

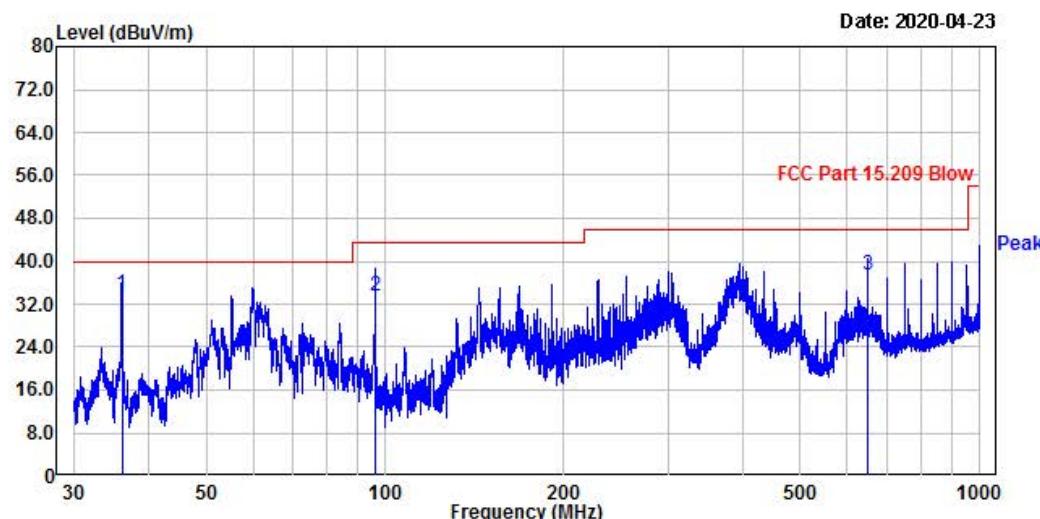

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	36.06	48.44	-14.50	33.94	40.00	6.06	100	280	horizontal
2.	96.18	51.76	-18.14	33.62	43.52	9.90	100	360	horizontal
3.	650.23	41.30	-3.86	37.44	46.02	8.58	100	302	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(LOW)

Tested by: JUNG E H

Power :

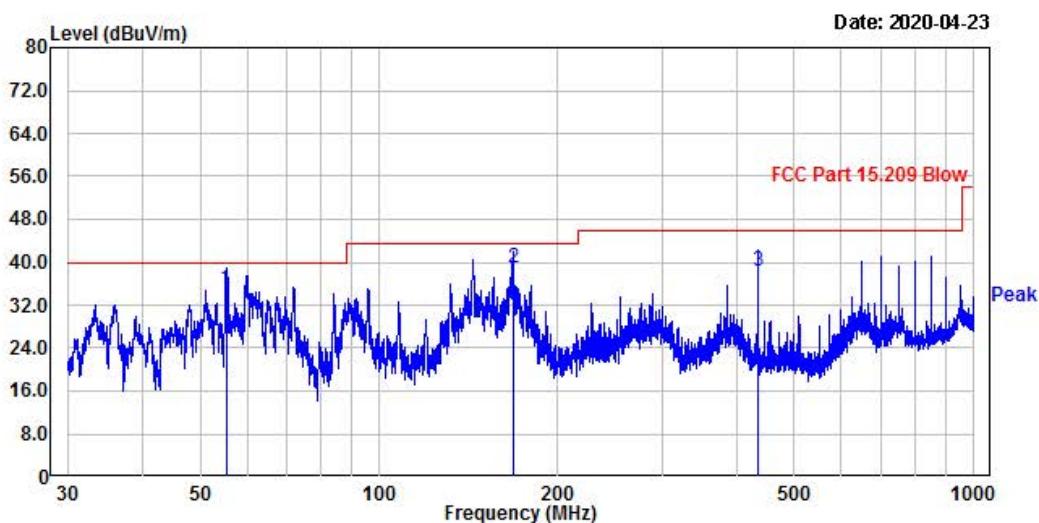

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	55.27	48.49	-13.48	35.01	40.00	4.99	100	290	vertical
2.	168.05	51.46	-12.52	38.94	43.52	4.58	100	360	vertical
3.	433.49	46.11	-7.78	38.33	46.02	7.69	100	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(LOW)

Tested by: JUNG E H

Power :

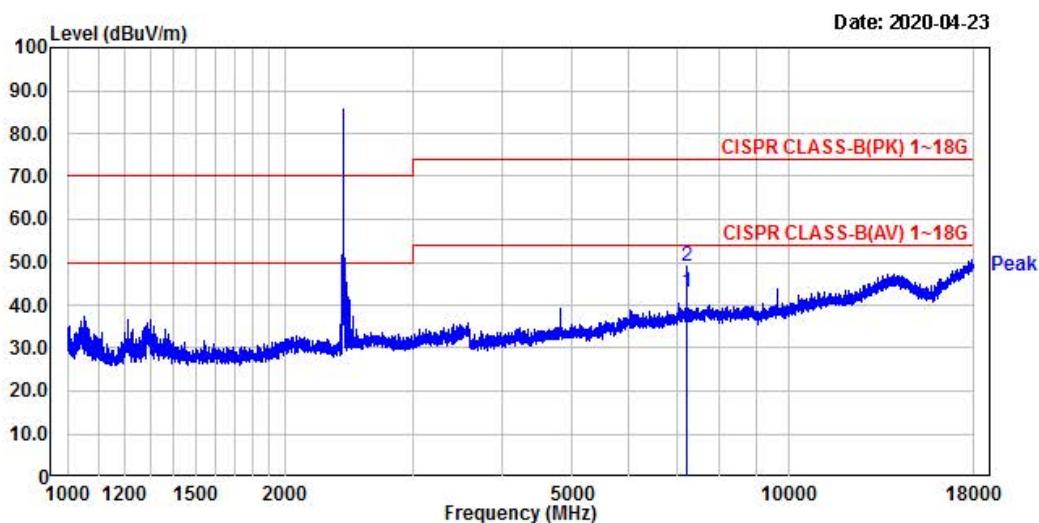

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
QP									
1.	7215.94	35.83	7.36	43.19	54.00	10.81	100	116	horizontal
2.	7215.94	41.76	7.36	49.12	74.00	24.88	100	116	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(LOW)

Tested by: JUNG E H

Power :

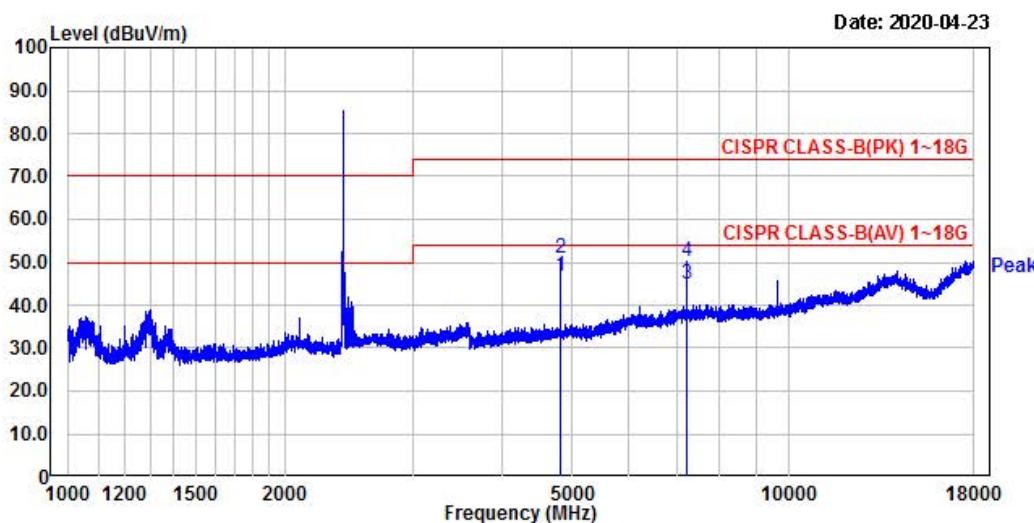

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	4811.06	45.12	1.61	46.73	54.00	7.27	100	1	vertical
2.	4811.06	49.29	1.61	50.90	74.00	23.10	100	1	vertical
3.	7213.33	37.67	7.36	45.03	54.00	8.97	100	80	vertical
4.	7213.33	42.97	7.36	50.33	74.00	23.67	100	80	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 22 'C / 41 % R.H.

Test Mode : Wireless mode(LOW)

Tested by:

Power :

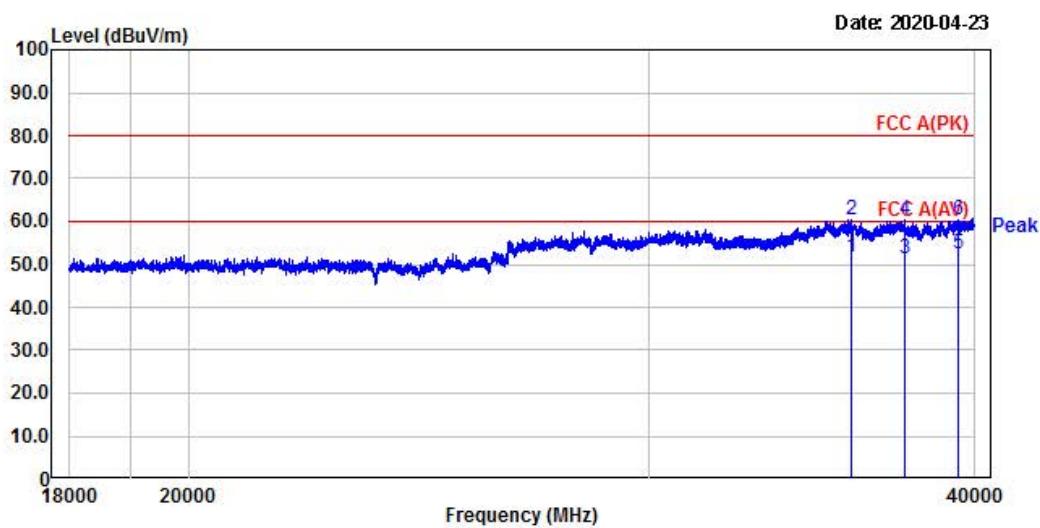

No.	Freq	RD	RD	C.F	Result		Result		Limit		Margin		Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV	PK	AV				
	MHz	dB $\mu$ V	dB $\mu$ V		dB	dB $\mu$ V	dB	dB $\mu$ V	dB	dB $\mu$ V	dB	dB	cm	deg		
2.	35883.25	37.28	28.20	23.32	60.52	51.52	80.00	69.00	19.48	8.48	100	50	horizontal			
4.	37629.50	36.53	27.53	23.66	60.19	51.19	80.00	69.00	19.81	8.81	100	7	horizontal			
6.	39447.25	36.40	28.40	23.88	60.28	52.28	80.00	69.00	19.72	7.72	100	96	horizontal			

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 22 'C / 41 % R.H.

Test Mode : Wireless mode(LOW)

Tested by:

Power :

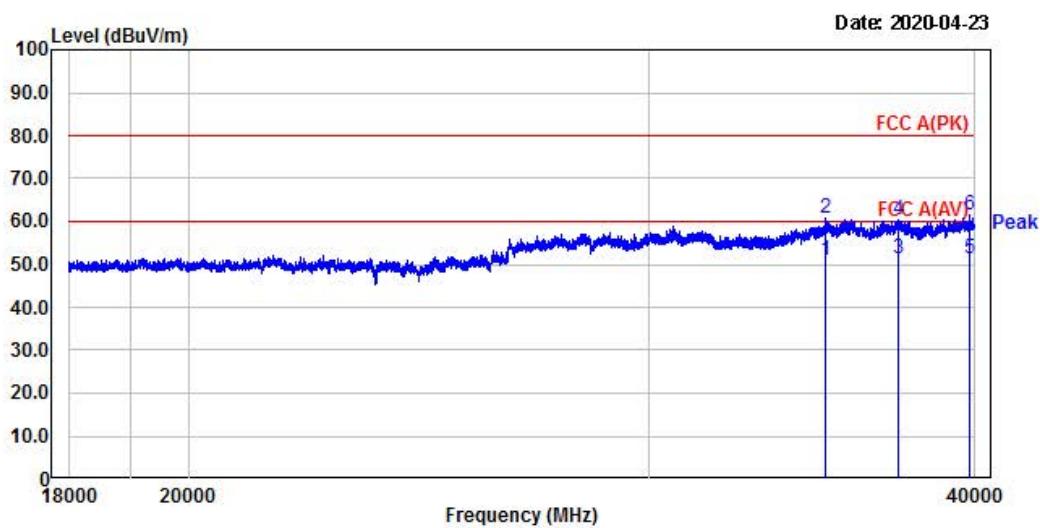

No.	Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Polarity
		PK	AV	PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
2.	35083.00	38.48	28.48	22.30	60.78	50.78	80.00	60.00	19.22	9.22	100	124	vertical
4.	37420.50	36.51	27.51	23.74	60.25	51.25	80.00	60.00	19.75	8.75	100	155	vertical
6.	39837.75	37.13	27.13	24.34	61.47	51.47	80.00	60.00	18.53	8.53	100	285	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(MID)

Tested by: JUNG E H

Power :

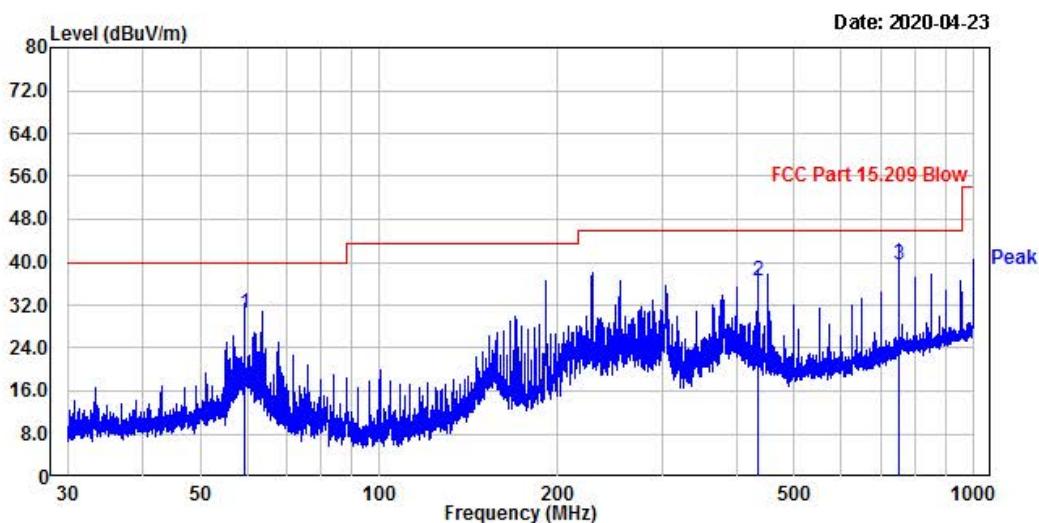

No.	Freq MHz	Reading dB <sub>uV</sub>	C.F dB	Result dB <sub>uV/m</sub>	Limit dB <sub>uV/m</sub>	Margin dB	Height cm	Angle deg	Polarity
									QP
1.	59.39	44.25	-13.82	30.43	40.00	9.57	100	220	horizontal
2.	433.49	44.31	-7.78	36.53	46.02	9.49	100	83	horizontal
3.	750.11	40.85	-1.44	39.41	46.02	6.61	100	60	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(MID)

Tested by: JUNG E H

Power :

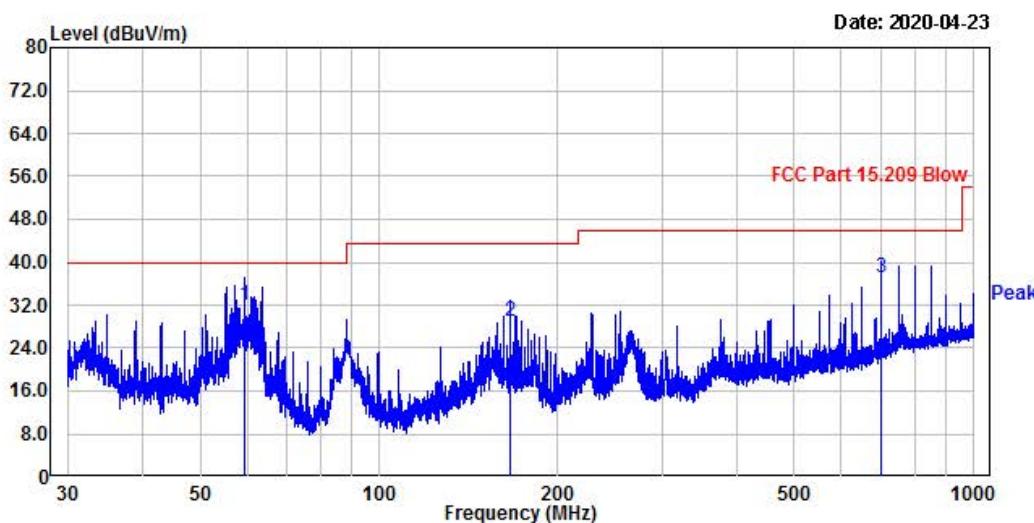

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	59.44	45.96	-13.82	32.14	40.00	7.86	100	1	vertical
2.	165.92	41.28	-12.34	28.94	43.52	14.58	100	16	vertical
3.	700.22	40.02	-2.87	37.15	46.02	8.87	100	168	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(MID)

Tested by: JUNG E H

Power :

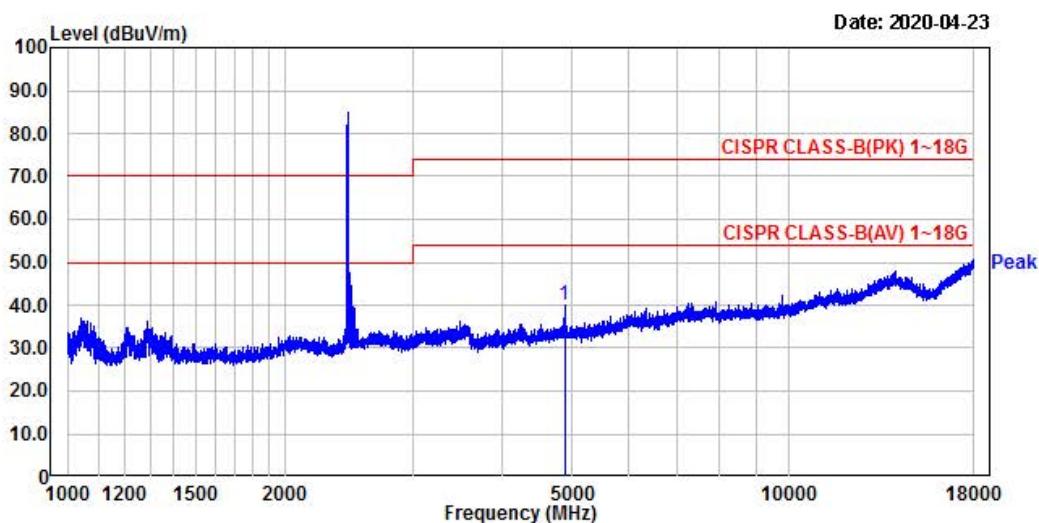

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	4879.33	38.23	1.78	40.01	74.00	33.99	100	333	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(MID)

Tested by: JUNG E H

Power :

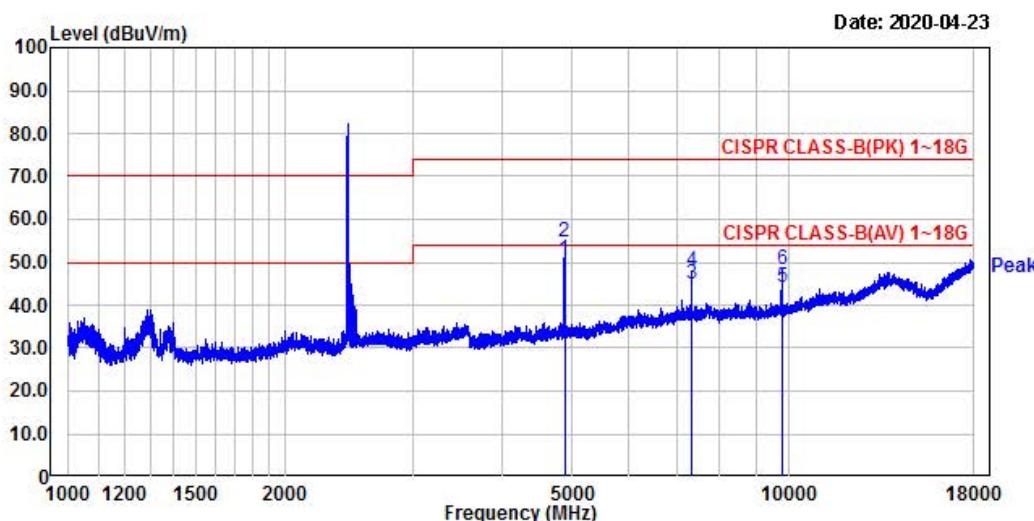

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result Q.P dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	4879.33	48.82	1.78	50.60	54.00	3.40	100	360	vertical
2.	4879.33	52.87	1.78	54.65	74.00	19.35	100	360	vertical
3.	7318.33	37.21	7.54	44.75	54.00	9.25	100	143	vertical
4.	7318.33	40.42	7.54	47.96	74.00	26.04	100	143	vertical
5.	9763.95	36.14	7.92	44.06	54.00	9.94	100	227	vertical
6.	9763.95	40.23	7.92	48.15	74.00	25.85	100	227	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 22 'C / 41 % R.H.

Test Mode : Wireless mode(MID)

Tested by:

Power :

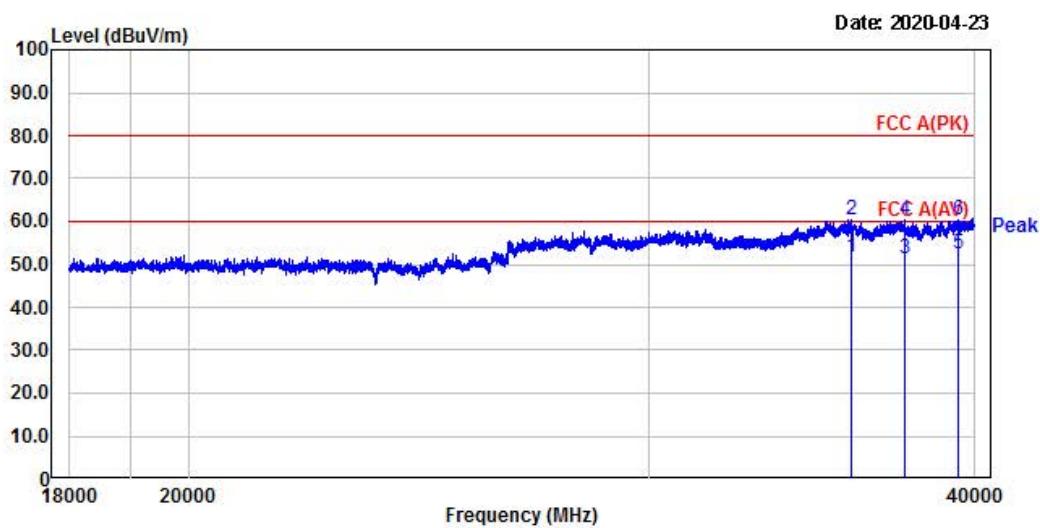

No.	Freq	RD	RD	C.F	Result		Result		Limit		Margin		Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV	PK	AV				
	MHz	dB $\mu$ V	dB $\mu$ V		dB	dB $\mu$ V	dB	dB $\mu$ V	dB	dB $\mu$ V	dB	dB	cm	deg		
2.	35883.25	37.28	28.20	23.32	60.52	51.52	80.00	69.00	19.48	8.48	100	50	horizontal			
4.	37629.50	36.53	27.53	23.66	60.19	51.19	80.00	69.00	19.81	8.81	100	7	horizontal			
6.	39447.25	36.40	28.40	23.88	60.28	52.28	80.00	69.00	19.72	7.72	100	96	horizontal			

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 22 'C / 41 % R.H.

Test Mode : Wireless mode(MID)

Tested by:

Power :

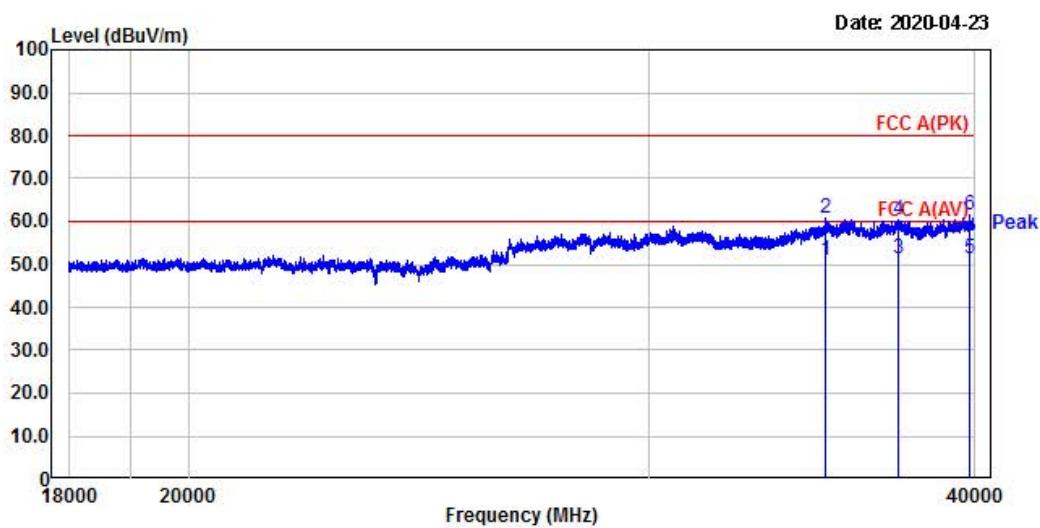

No.	Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Polarity
		PK	AV	PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
2.	35083.00	38.48	28.48	22.30	60.78	50.78	80.00	60.00	19.22	9.22	100	124	vertical
4.	37420.50	36.51	27.51	23.74	60.25	51.25	80.00	60.00	19.75	8.75	100	155	vertical
6.	39837.75	37.13	27.13	24.34	61.47	51.47	80.00	60.00	18.53	8.53	100	285	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(HIGH)

Tested by: JUNG E H

Power :

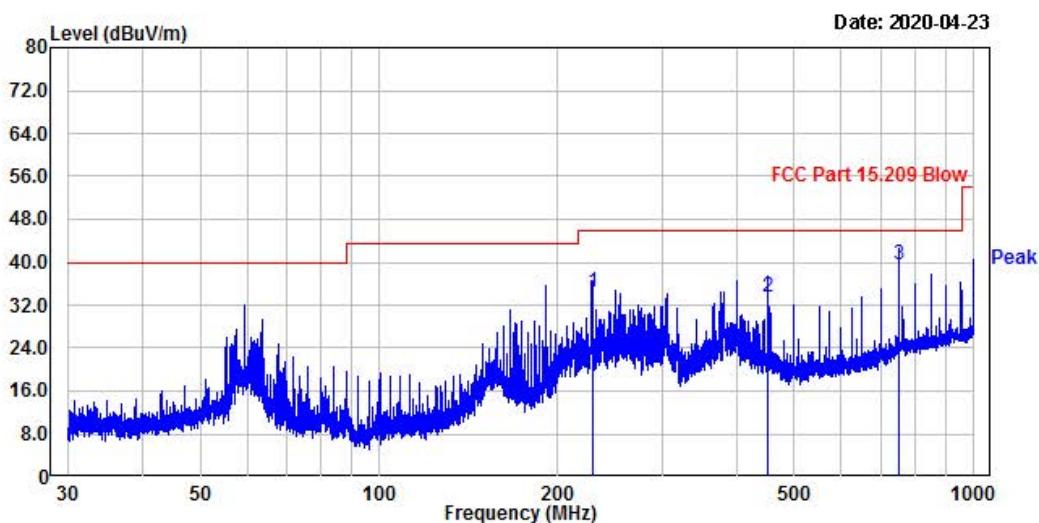

No.	Freq	Reading	C.F	Result dB	Limit dB <sub>uV/m</sub>	Margin dB	Height cm	Angle deg	Polarity
									MHz
1.	228.49	49.07	-14.61	34.46	46.02	11.56	100	278	horizontal
2.	450.15	41.11	-7.59	33.52	46.02	12.50	100	210	horizontal
3.	750.11	41.14	-1.44	39.70	46.02	6.32	100	58	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(HIGH)

Tested by: JUNG E H

Power :

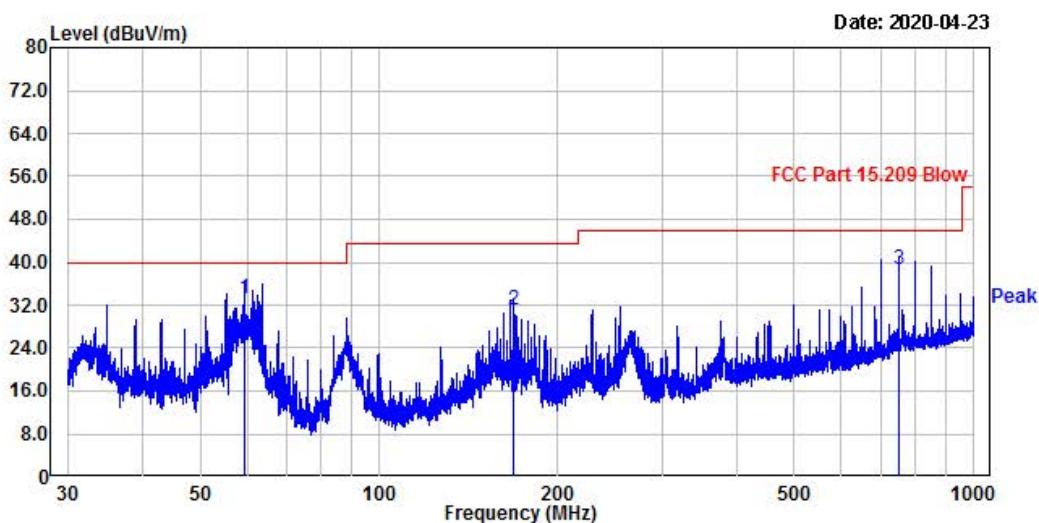

No.	Freq	Reading	C.F	Result dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
									MHz
1.	59.39	46.90	-13.82	33.08	40.00	6.92	100	279	vertical
2.	168.05	43.61	-12.52	31.09	43.52	12.43	100	360	vertical
3.	750.11	40.19	-1.44	38.75	46.02	7.27	100	3	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(HIGH)

Tested by: JUNG E H

Power :

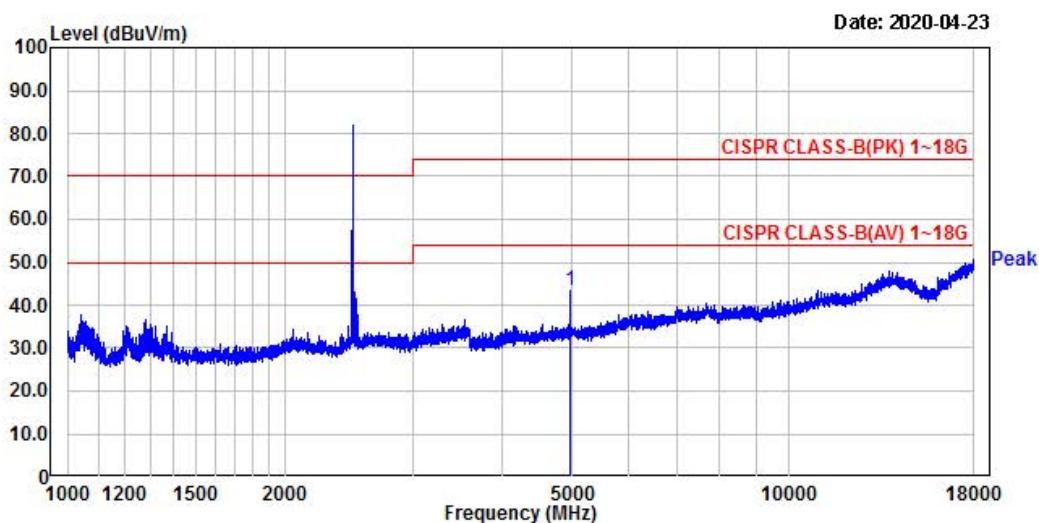

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	4959.31	41.33	2.07	43.40	74.00	30.60	100	250	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 23 'C / 33 % R.H.

Test Mode : Wireless mode(HIGH)

Tested by: JUNG E H

Power :

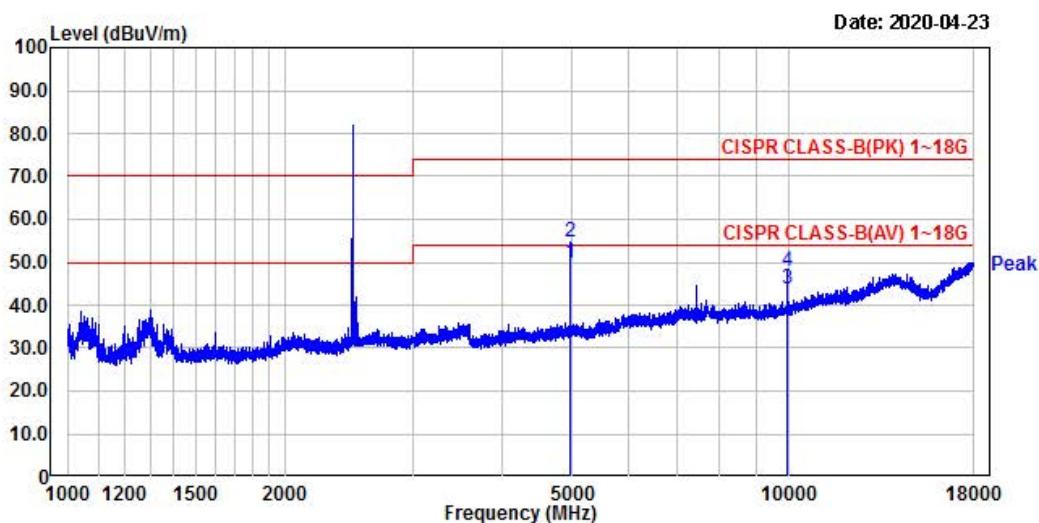

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	4961.10	47.66	2.07	49.73	54.00	4.27	100	356	vertical
2.	4961.10	52.51	2.07	54.58	74.00	19.42	100	356	vertical
3.	9920.41	35.44	8.20	43.64	54.00	10.36	100	218	vertical
4.	9920.41	39.88	8.20	48.08	74.00	25.92	100	218	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 22 'C / 41 % R.H.

Test Mode : Wireless mode(HIGH)

Tested by:

Power :

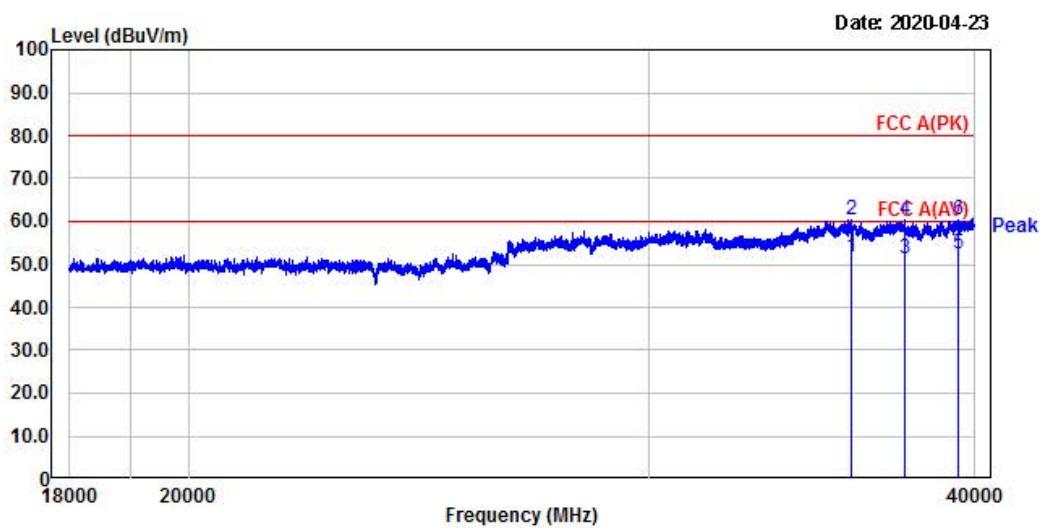

No.	Freq	RD	RD	C.F	Result		Result		Limit		Margin		Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV	PK	AV				
	MHz	dB $\mu$ V	dB $\mu$ V		dB	dB $\mu$ V	dB	dB $\mu$ V	dB	dB $\mu$ V	dB	dB	cm	deg		
2.	35883.25	37.28	28.20	23.32	60.52	51.52	80.00	69.00	19.48	8.48	100	50	horizontal			
4.	37629.50	36.53	27.53	23.66	60.19	51.19	80.00	69.00	19.81	8.81	100	7	horizontal			
6.	39447.25	36.40	28.40	23.88	60.28	52.28	80.00	69.00	19.72	7.72	100	96	horizontal			

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: GW768

Temp/Humi: 22 'C / 41 % R.H.

Test Mode : Wireless mode(HIGH)

Tested by:

Power :

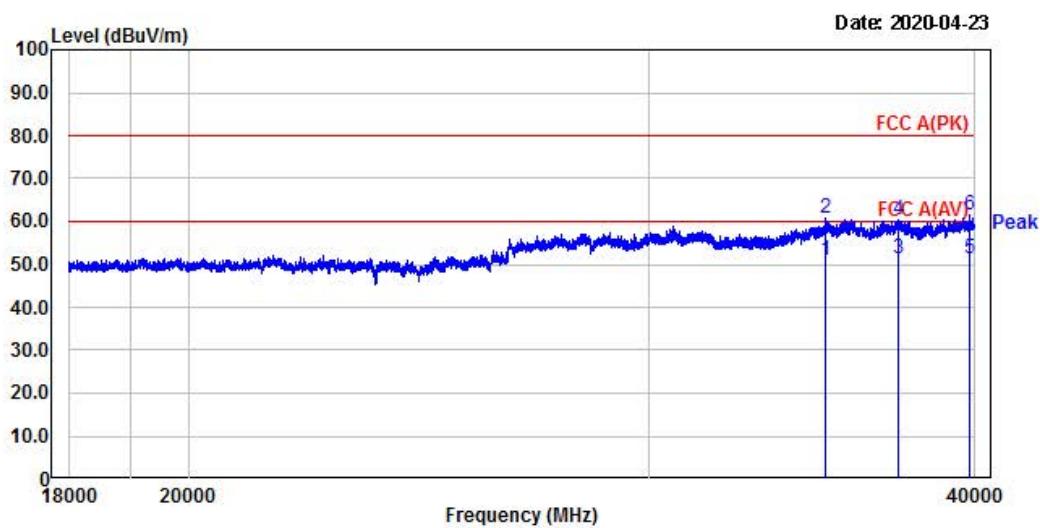

No.	Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Polarity
		PK	AV	PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
2.	35083.00	38.48	28.48	22.30	60.78	50.78	80.00	60.00	19.22	9.22	100	124	vertical
4.	37420.50	36.51	27.51	23.74	60.25	51.25	80.00	60.00	19.75	8.75	100	155	vertical
6.	39837.75	37.13	27.13	24.34	61.47	51.47	80.00	60.00	18.53	8.53	100	285	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.2.7 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**Minimum Standard: FCC Part 15.207(a) / EN 55022**

**Measurement Data: N/A**

#### Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

**APPENDIX**  
**TEST EQUIPMENT USED FOR TESTS**

Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2020-09-06
2	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2020-03-20
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2020-03-20
4	Attenuator (3 dB)	8491A	37822	HP	1 year	2020-09-06
5	Attenuator (10 dB)	8491A	63196	HP	1 year	2020-09-06
6	■ EMI Test Receiver (~40 GHz)	ESU	100092	R&S	1 year	2020-03-16
7	■ RF Amplifier (~40 GHz)	PAM-840A	461314	HP	1 year	2020-03-16
8	■ RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2020-03-20
9	■ Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2020-08-04
10	■ DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2020-03-18
11	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2020-03-18
12	■ TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2021-03-20
13	Temp. Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2020-03-20
14	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■ DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■ Power Meter	EPM-441A	GB32481702	HP	1 year	2020-03-20
18	■ Power Sensor	8481A	3318A94972	HP	1 year	2020-09-06
19	Audio Analyzer	8903B	3729A18901	HP	1 year	2020-09-06
20	Moduleation Analyzer	8901B	3749A05878	HP	1 year	2020-09-06
21	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	Jin Young Tech	1 year	2020-09-06
22	Stop Watch	HS-3	812Q08R	CASIO	2 year	2020-03-18
23	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2020-09-06
24	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2020-03-18
25	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2020-03-18
26	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2020-03-18
27	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2020-03-18
28	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2020-03-18
29	■ Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2020-03-18
30	■ Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2020-03-18
31	■ Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2021-02-26