

TEST REPORT

Report No.: BCTC2503744125-1E

Applicant: DP AUDIO VIDEO LLC

Product Name: 15.6" Laptop

Test Model: CLT2156RD

Tested Date: 2025-03-28 to 2025-04-27

Issued Date: 2025-04-27




Shenzhen BCTC Testing Co., Ltd.

FCC ID: 2AVRVCLT2156

Product Name: 15.6" Laptop
Trademark: Core Innovations
Model/Type Reference: CLT2156RD
CLT2156BL, CLT2156BU, CLT2156LC
Prepared For: DP AUDIO VIDEO LLC
Address: 1001 Gayley Avenue P.O. Box 24857, Los Angeles, CA, USA 90024
Manufacturer: SHEN ZHEN NST INDUSTRY AND TRADE CO., LTD
Address: Room 501, Building 2, Baolong Specialized and Sophisticated Industrial Park,
No. 16 Baolong Third Road, Baolong Community, Baolong Street, Longgang
District, Shenzhen, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No. 158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2025-03-28
Sample Tested Date: 2025-03-28 to 2025-04-27
Issue Date: 2025-04-27
Report No.: BCTC2503744125-1E
Test Standards: FCC Part 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth Classic radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 EUT operating Conditions	13
6.5 Test Result	14
7. Radiated emissions	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	19
7.3 Test procedure	20
7.4 EUT operating Conditions	21
7.5 Test Result	21
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	29
8.1 Block Diagram Of Test Setup	29
8.2 Limit	29
8.3 Test procedure	30
8.4 EUT operating Conditions	30
8.5 Test Result	31
9. Spurious RF Conducted Emissions	32
9.1 Block Diagram Of Test Setup	32
9.2 Limit	32
9.3 Test procedure	32
9.4 Test Result	32
10. 20 dB Bandwidth	54
10.1 Block Diagram Of Test Setup	54
10.2 Limit	54
10.3 Test procedure	54
10.4 Test Result	54
11. Maximum Peak Output Power	60
11.1 Block Diagram Of Test Setup	60
11.2 Limit	60
11.3 Test procedure	60
11.4 Test Result	60

12. Hopping Channel Separation	66
12.1 Block Diagram Of Test Setup.....	66
12.2 Limit	66
12.3 Test procedure	66
12.4 Test Result	66
13. Number Of Hopping Frequency.....	72
13.1 Block Diagram Of Test Setup.....	72
13.2 Limit	72
13.3 Test procedure	72
13.4 Test Result	72
14. Dwell Time.....	75
14.1 Block Diagram Of Test Setup.....	75
14.2 Limit	75
14.3 Test procedure	75
14.4 Test Result	75
15. Antenna Requirement	85
15.1 Limit	85
15.2 Test Result	85
16. EUT Photographs.....	86
17. EUT Test Setup Photographs.....	87

(Note: N/A Means Not Applicable)

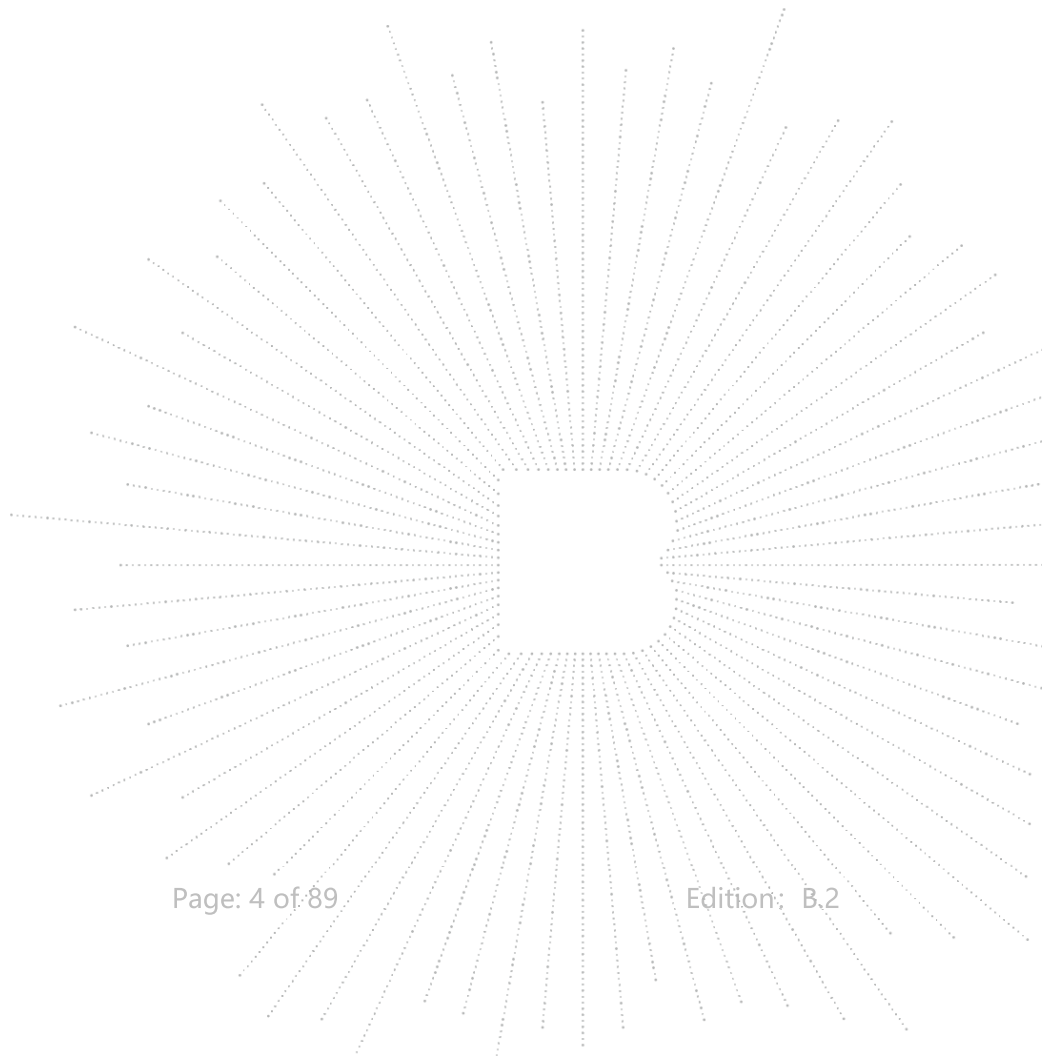

1. Version

Report No.	Issue Date	Description	Approved
BCTC2503744125-1E	2025-04-27	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted emission AC power port	§15.207	PASS
2	Conducted peak output power for FHSS	§15.247(b)(1)	PASS
3	20dB Occupied bandwidth	§15.247(a)(1)	PASS
4	Hopping channel separation	§15.247(a)(1)	PASS
5	Number of hopping frequencies	§15.247(a)(1)(iii)	PASS
6	Dwell Time	§15.247(a)(1)(iii)	PASS
7	Spurious RF conducted emissions	§15.247(d)	PASS
8	Band edge	§15.247(d)	PASS
9	Spurious radiated emissions for transmitter	§15.247(d) & §15.209 & §15.205	PASS
10	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Power Spectral Density	U=1.19dB
8	Conducted output power uncertainty Above 1G	U=1.576dB
9	Conducted output power uncertainty below 1G	U=1.28dB
10	Conducted spurious emissions	U=0.55dB
11	Occupied Bandwidth/Frequency Range	U=3.46%
12	humidity uncertainty	U=5.3%
13	Temperature uncertainty	U=0.59°C
14	Frequency Error	U=53.50Hz
15	Frequency Drift	U=0.64kHz

4. Product Information And Test Setup


4.1 Product Information

Model/Type Reference:	CLT2156RD CLT2156BL, CLT2156BU, CLT2156LC
Model Differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number Of Channel:	79CH
Antenna installation:	Internal antenna
Antenna Gain:	1.93 dBi Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 12V from adapter/ DC 7.6 from battery
Adapter Information:	MODEL: J301-1202000UX INPUT: 100-240V~50/60Hz 1.0A OUTPUT: 12.0V $\Rightarrow$ 2.0A 24.0W
Adapter Information:	MODEL: J031-1202000UX INPUT: 100-240V~50/60Hz 1.0A OUTPUT: 12.0V $\Rightarrow$ 2.0A 24.0W

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission and Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	15.6" Laptop	---	CLT2156RD	---	EUT
E-2	Adapter	---	J301-1202000UX	---	---
E-3	Adapter	---	J031-1202000UX	---	---
E-4	HDMI Cable	Belkin	HDMI2.0	---	---
E-5	TF card	SanDisk	128G	---	---
E-6	U disk	SanDisk	32G	---	---
E-7	Earphone	SONY	IER-M7	---	---
E-8	Display	ChangHong	55DBK	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	---	---	1m	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Test mode	Low channel	Middle channel	High channel
1	Transmitting(GFSK)	2402MHz	2441MHz	2480MHz
2	Transmitting($\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz
3	Transmitting(8DPSK)	2402MHz	2441MHz	2480MHz
4	BT Link (Conducted emission & Radiated emission)			

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	FCCAssist		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

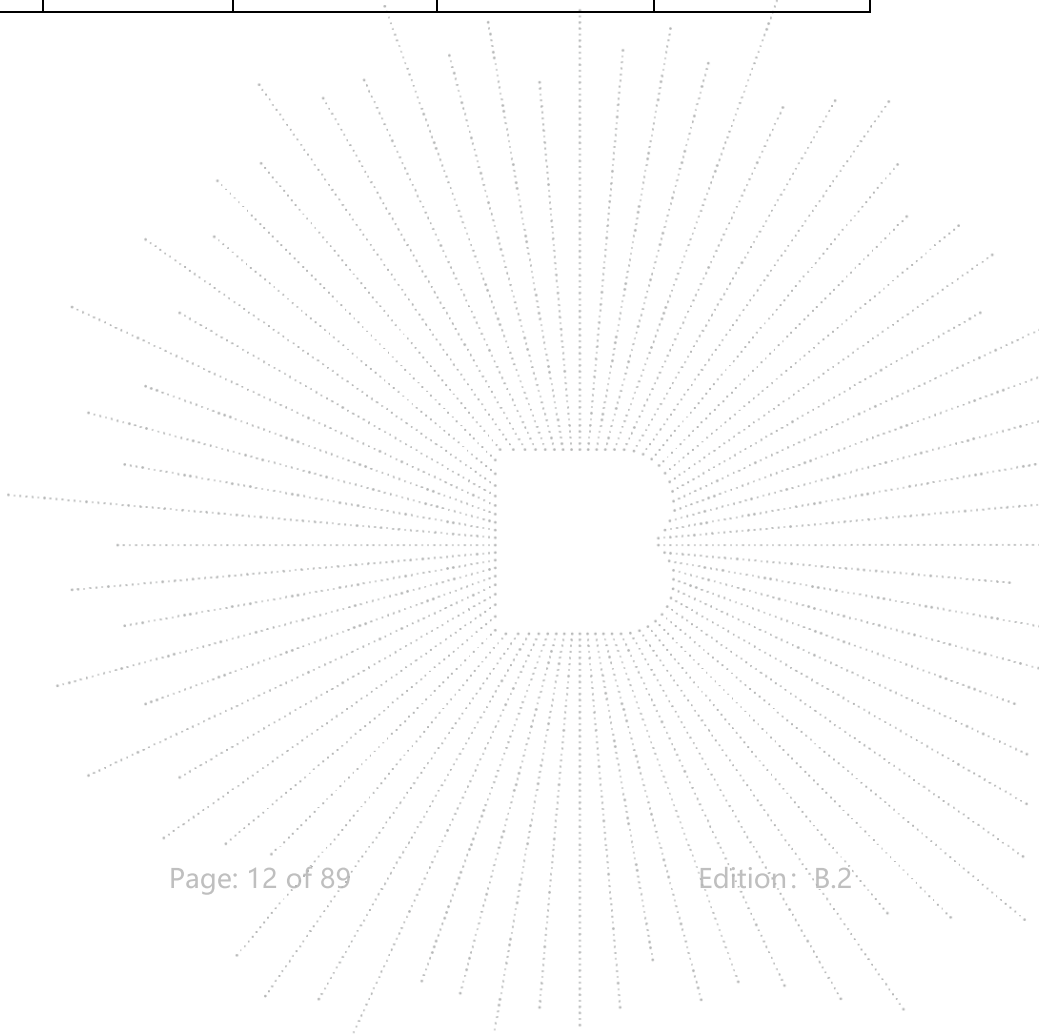

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

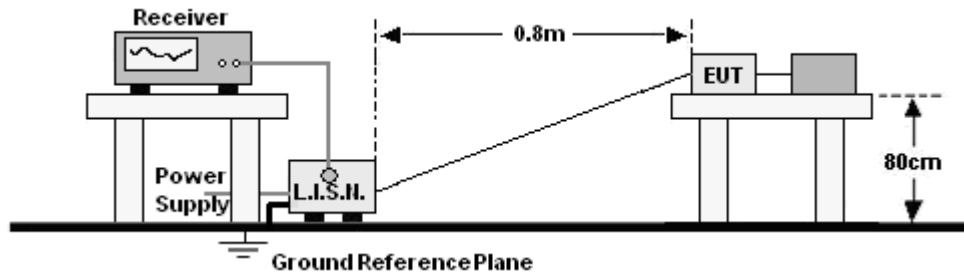

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

J301-1202000UX

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4	Polarization:	L

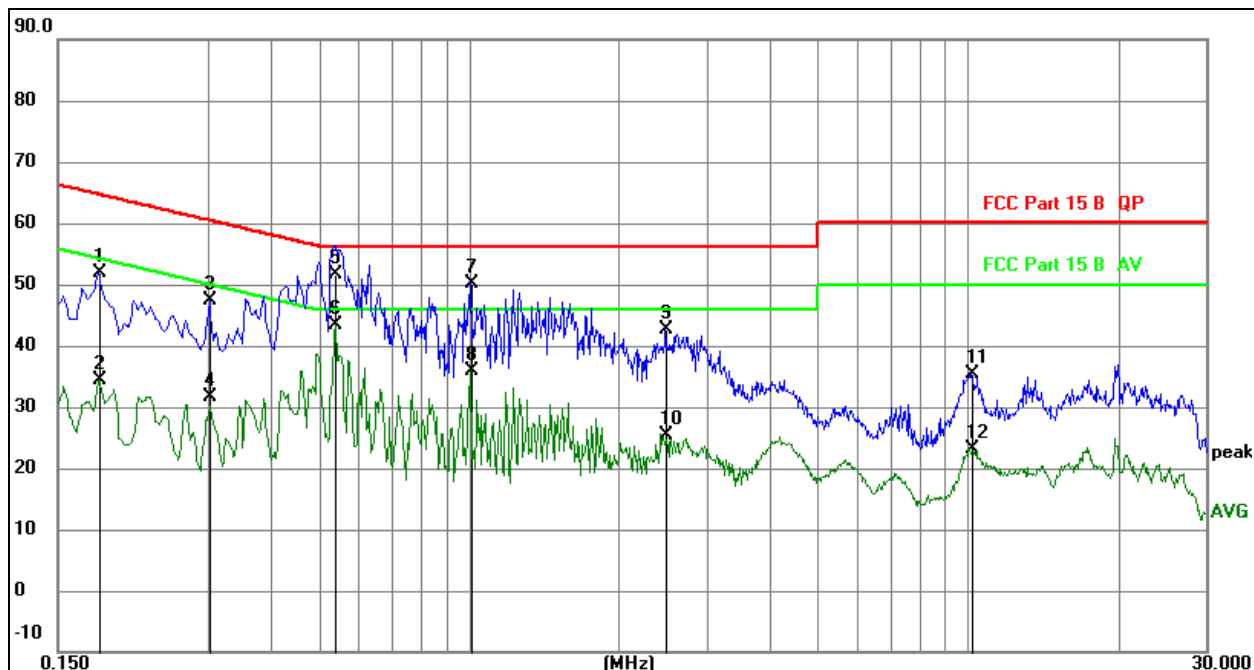


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.1815	31.85	20.07	51.92	64.42	-12.50	QP
2		0.1815	14.41	20.07	34.48	54.42	-19.94	AVG
3		0.3030	27.23	20.07	47.30	60.16	-12.86	QP
4		0.3030	11.51	20.07	31.58	50.16	-18.58	AVG
5		0.5380	31.51	20.08	51.59	56.00	-4.41	QP
6	*	0.5380	23.37	20.08	43.45	46.00	-2.55	AVG
7		1.0095	30.04	20.09	50.13	56.00	-5.87	QP
8		1.0095	15.69	20.09	35.78	46.00	-10.22	AVG
9		2.4855	22.48	20.11	42.59	56.00	-13.41	QP
10		2.4855	5.39	20.11	25.50	46.00	-20.50	AVG
11		10.1489	15.24	20.17	35.41	60.00	-24.59	QP
12		10.1489	3.05	20.17	23.22	50.00	-26.78	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4	Polarization:	N

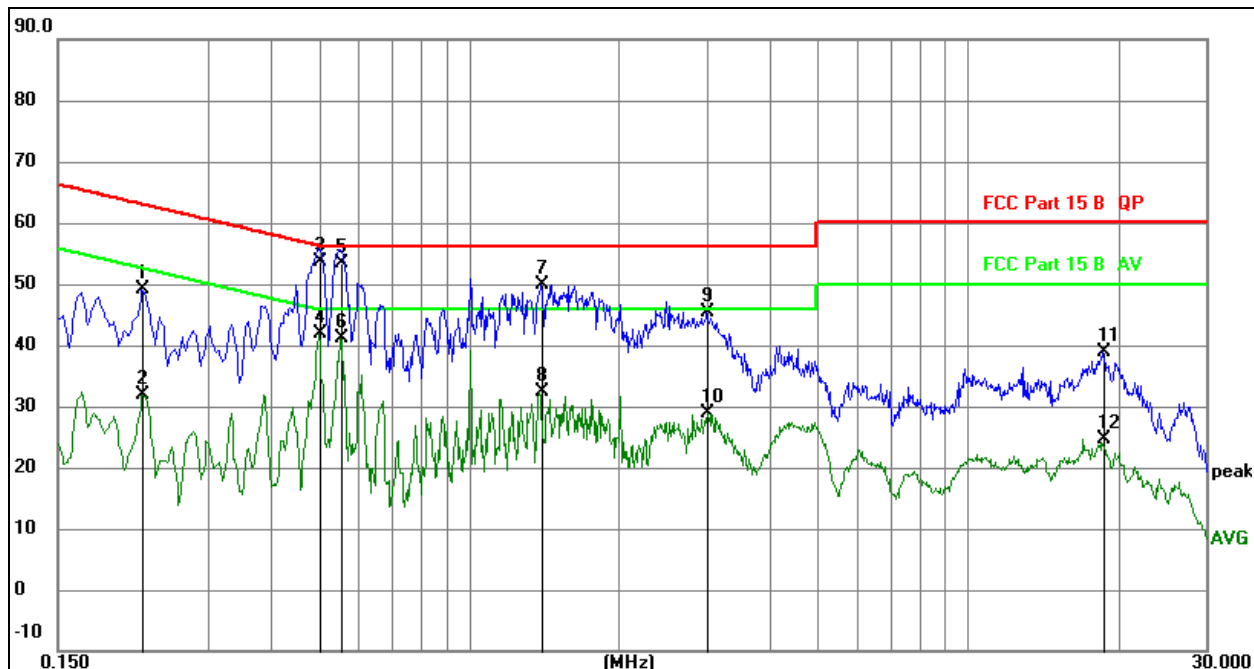


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.2220	29.15	20.07	49.22	62.74	-13.52	QP
2		0.2220	11.73	20.07	31.80	52.74	-20.94	AVG
3	*	0.5010	33.67	20.08	53.75	56.00	-2.25	QP
4		0.5010	21.82	20.08	41.90	46.00	-4.10	AVG
5		0.5550	33.41	20.08	53.49	56.00	-2.51	QP
6		0.5550	21.00	20.08	41.08	46.00	-4.92	AVG
7		1.3964	29.86	20.09	49.95	56.00	-6.05	QP
8		1.3964	12.37	20.09	32.46	46.00	-13.54	AVG
9		3.0075	25.15	20.12	45.27	56.00	-10.73	QP
10		3.0075	8.85	20.12	28.97	46.00	-17.03	AVG
11		18.6450	18.62	20.32	38.94	60.00	-21.06	QP
12		18.6450	4.22	20.32	24.54	50.00	-25.46	AVG

J031-1202000UX

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4	Polarization:	L

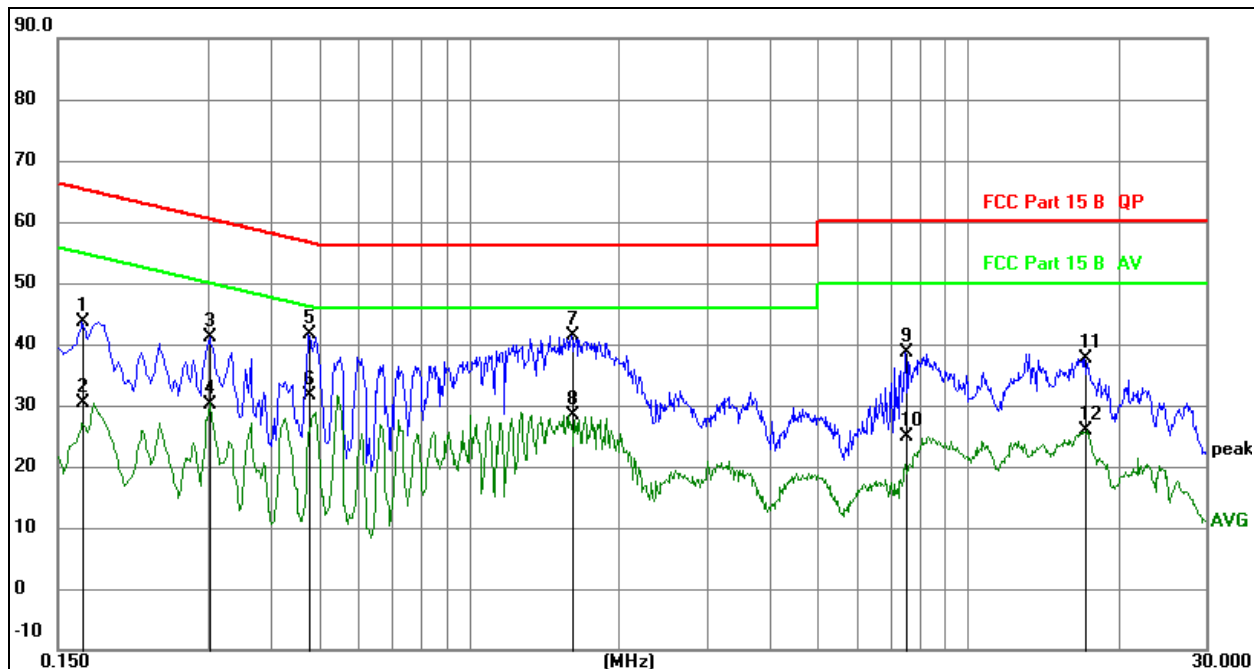


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1680	23.53	20.07	43.60	65.06	-21.46	QP
2		0.1680	10.20	20.07	30.27	55.06	-24.79	AVG
3		0.3030	21.02	20.07	41.09	60.16	-19.07	QP
4		0.3030	10.18	20.07	30.25	50.16	-19.91	AVG
5		0.4785	21.65	20.08	41.73	56.37	-14.64	QP
6		0.4785	11.44	20.08	31.52	46.37	-14.85	AVG
7	*	1.6035	21.34	20.10	41.44	56.00	-14.56	QP
8		1.6035	8.32	20.10	28.42	46.00	-17.58	AVG
9		7.5165	18.43	20.16	38.59	60.00	-21.41	QP
10		7.5165	4.70	20.16	24.86	50.00	-25.14	AVG
11		17.1645	17.38	20.32	37.70	60.00	-22.30	QP
12		17.1645	5.45	20.32	25.77	50.00	-24.23	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4	Polarization:	N

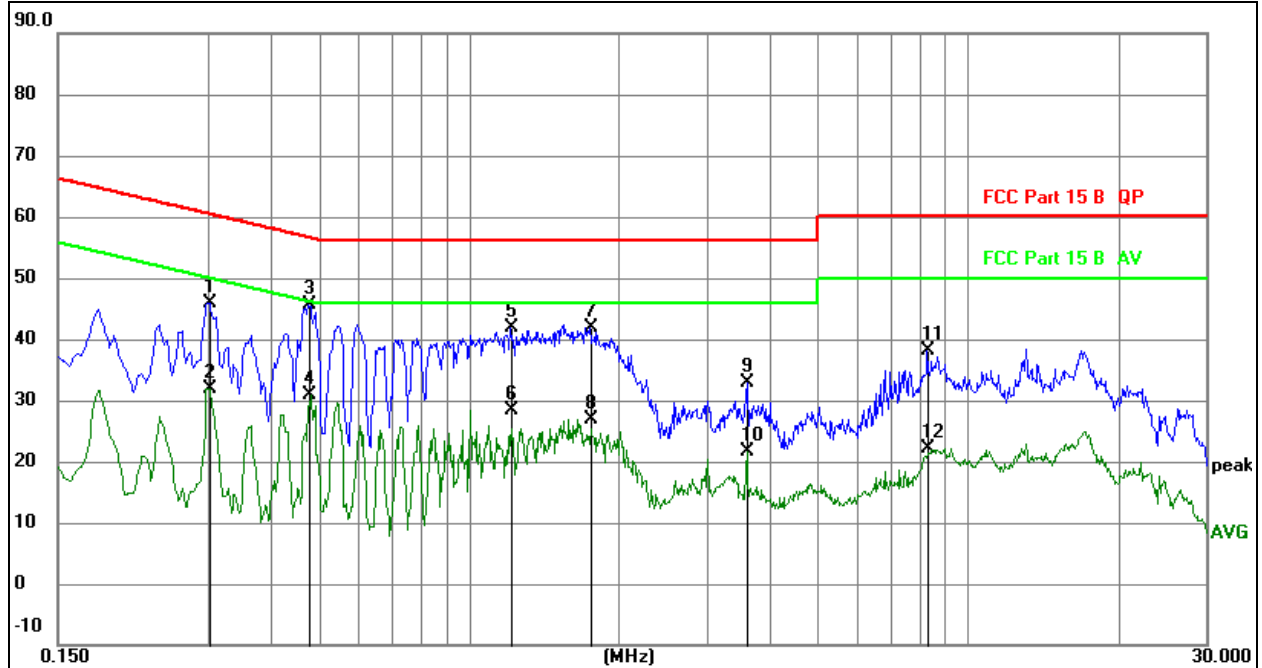

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3030	25.89	20.07	45.96	60.16	-14.20	QP
2		0.3030	11.83	20.07	31.90	50.16	-18.26	AVG
3	*	0.4785	25.47	20.08	45.55	56.37	-10.82	QP
4		0.4785	10.88	20.08	30.96	46.37	-15.41	AVG
5		1.2120	21.76	20.09	41.85	56.00	-14.15	QP
6		1.2120	8.25	20.09	28.34	46.00	-17.66	AVG
7		1.7475	21.86	20.10	41.96	56.00	-14.04	QP
8		1.7475	6.87	20.10	26.97	46.00	-19.03	AVG
9		3.6060	12.64	20.13	32.77	56.00	-23.23	QP
10		3.6060	1.58	20.13	21.71	46.00	-24.29	AVG
11		8.2995	17.94	20.16	38.10	60.00	-21.90	QP
12		8.2995	2.08	20.16	22.24	50.00	-27.76	AVG


7. Radiated emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

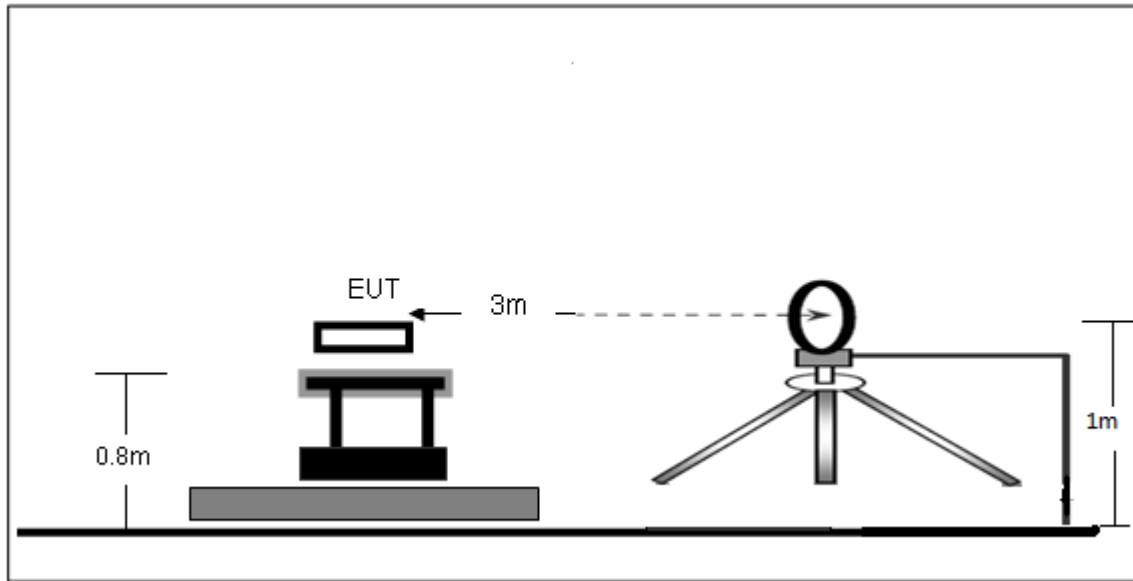

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

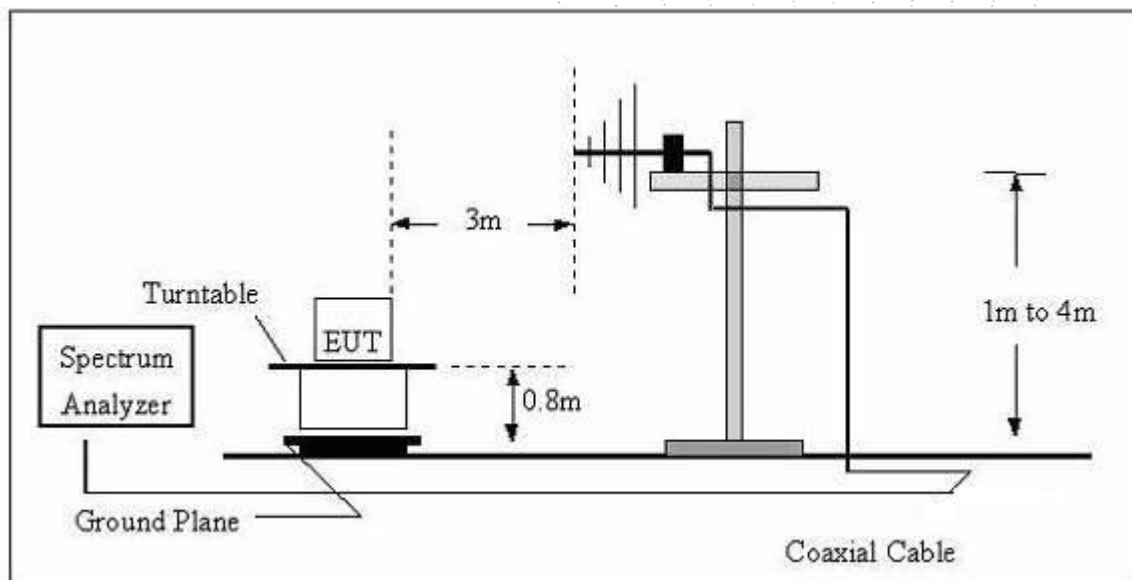

(C) Radiated Emission Test-Up Frequency Above 1GHz

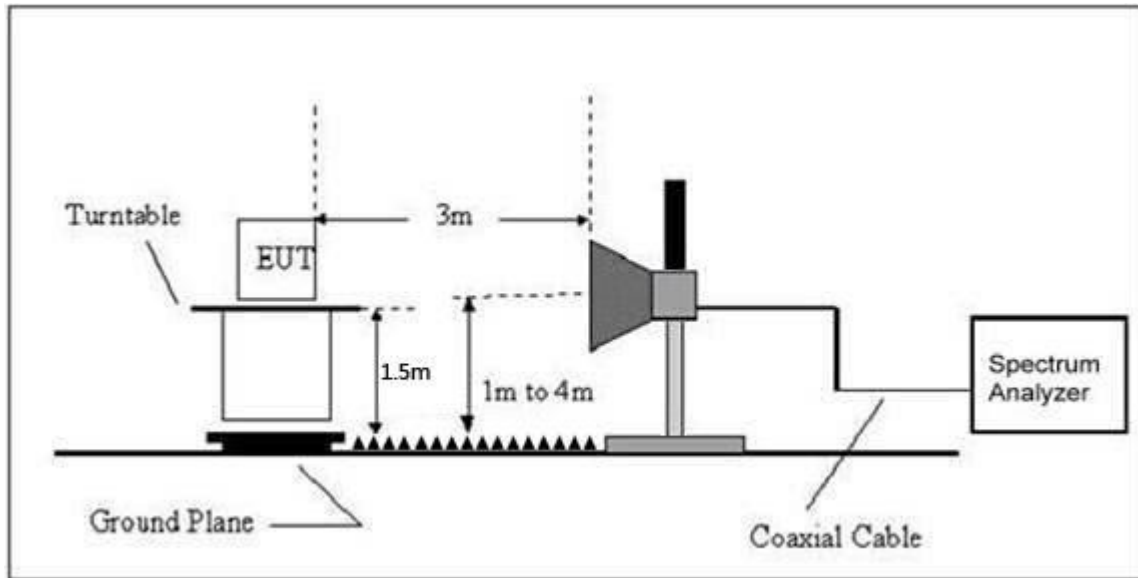

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1) through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 7.6V
Test Mode:	Mode 4		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

J301-1202000UX

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 7.6V
Test Mode:	Mode 4	Polarization:	Horizontal

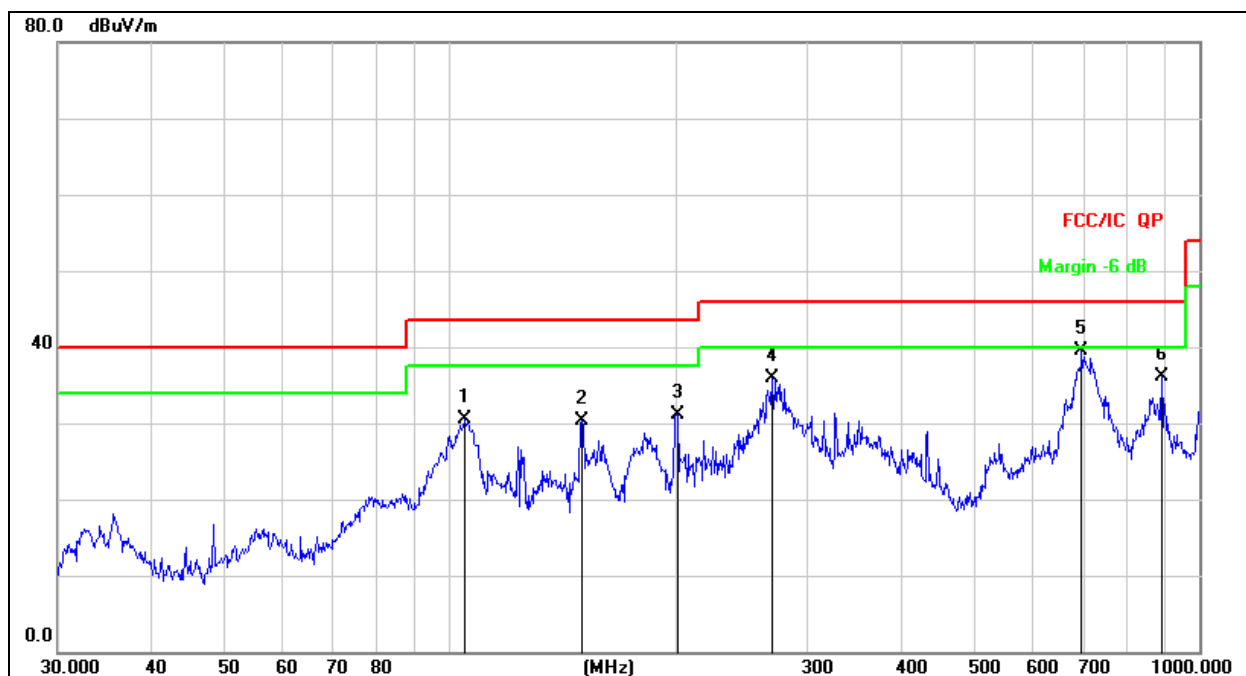

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Measurement = Reading Level + Correct Factor

3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		104.5361	46.39	-15.88	30.51	43.50	-12.99	QP
2		150.0108	45.46	-15.17	30.29	43.50	-13.21	QP
3		201.3930	45.50	-14.36	31.14	43.50	-12.36	QP
4		269.4284	48.71	-12.86	35.85	46.00	-10.15	QP
5	*	696.8567	44.62	-5.11	39.51	46.00	-6.49	QP
6		890.7278	38.45	-2.25	36.20	46.00	-9.80	QP

Temperature:	26°C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 7.6V
Test Mode:	Mode 4	Polarization:	Vertical

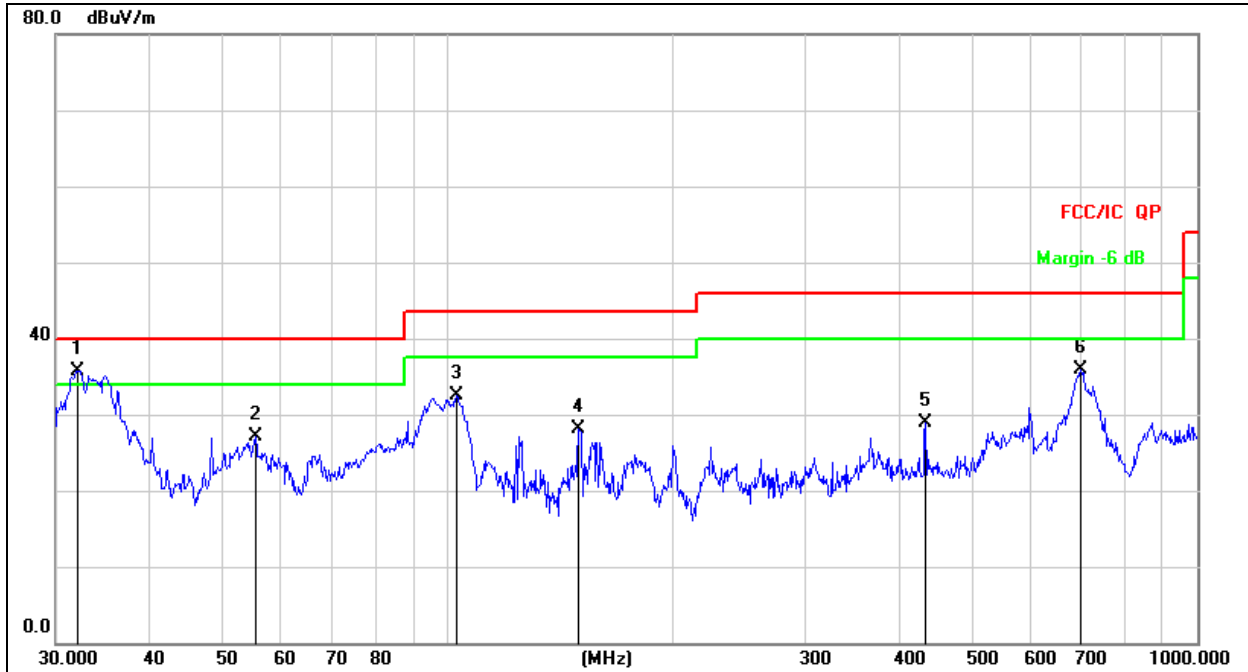

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	32.0667	51.60	-15.80	35.80	40.00	-4.20	QP
2		55.4147	41.56	-14.49	27.07	40.00	-12.93	QP
3		102.7192	48.32	-15.91	32.41	43.50	-11.09	QP
4		149.4857	43.25	-15.18	28.07	43.50	-15.43	QP
5		434.0651	38.11	-9.22	28.89	46.00	-17.11	QP
6		699.3046	40.94	-5.08	35.86	46.00	-10.14	QP

J031-1202000UX

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 7.6V
Test Mode:	Mode 4	Polarization:	Horizontal

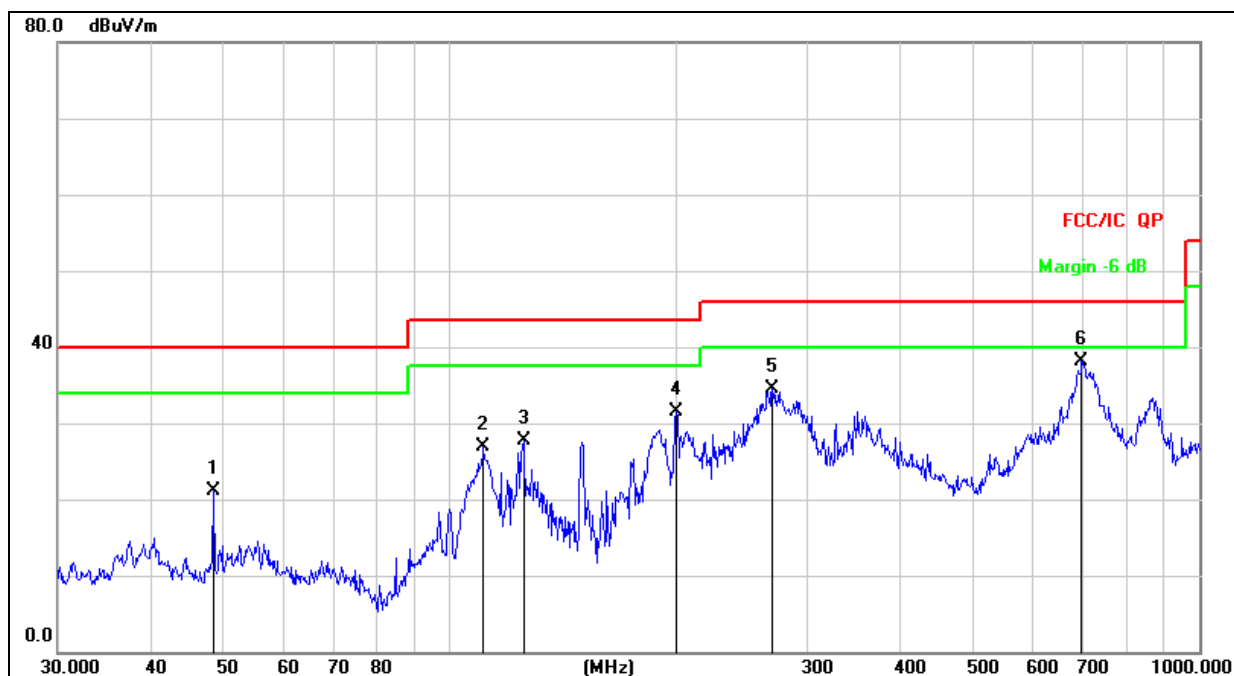


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		48.3318	35.19	-14.04	21.15	40.00	-18.85	QP
2		110.9570	43.68	-16.70	26.98	43.50	-16.52	QP
3		125.4457	45.34	-17.71	27.63	43.50	-15.87	QP
4		200.6880	47.27	-15.70	31.57	43.50	-11.93	QP
5		269.4284	48.31	-13.88	34.43	46.00	-11.57	QP
6	*	696.8567	43.82	-5.74	38.08	46.00	-7.92	QP

Temperature:	26°C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 7.6V
Test Mode:	Mode 4	Polarization:	Vertical

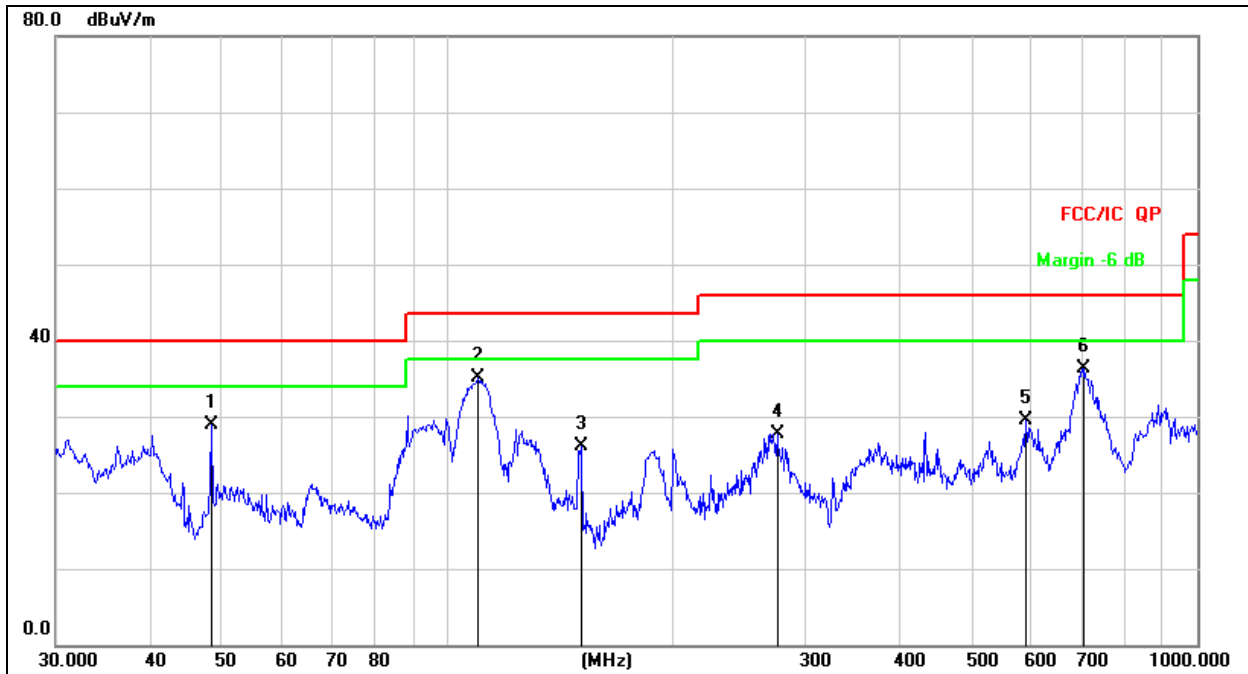

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		48.3318	42.88	-14.04	28.84	40.00	-11.16	QP
2	*	109.7960	51.70	-16.62	35.08	43.50	-8.42	QP
3		150.5378	45.46	-19.39	26.07	43.50	-17.43	QP
4		275.1570	41.45	-13.76	27.69	46.00	-18.31	QP
5		590.9737	37.15	-7.63	29.52	46.00	-16.48	QP
6		706.6999	42.01	-5.61	36.40	46.00	-9.60	QP

Between 1GHz – 25GHz

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
GFSK Low channel							
V	4804.00	72.33	-19.99	52.34	74.00	-21.66	PK
V	4804.00	63.64	-19.99	43.65	54.00	-10.35	AV
V	7206.00	63.83	-14.22	49.61	74.00	-24.39	PK
V	7206.00	53.09	-14.22	38.87	54.00	-15.13	AV
H	4804.00	69.31	-19.99	49.32	74.00	-24.68	PK
H	4804.00	60.05	-19.99	40.06	54.00	-13.94	AV
H	7206.00	61.70	-14.22	47.48	74.00	-26.52	PK
H	7206.00	53.02	-14.22	38.80	54.00	-15.20	AV
GFSK Middle channel							
V	4882.00	69.85	-19.84	50.01	74.00	-23.99	PK
V	4882.00	61.53	-19.84	41.69	54.00	-12.31	AV
V	7323.00	59.67	-13.90	45.77	74.00	-28.23	PK
V	7323.00	51.48	-13.90	37.58	54.00	-16.42	AV
H	4882.00	68.10	-19.84	48.26	74.00	-25.74	PK
H	4882.00	57.18	-19.84	37.34	54.00	-16.66	AV
H	7323.00	56.78	-13.90	42.88	74.00	-31.12	PK
H	7323.00	48.27	-13.90	34.37	54.00	-19.63	AV
GFSK High channel							
V	4960.00	71.52	-19.68	51.84	74.00	-22.16	PK
V	4960.00	63.45	-19.68	43.77	54.00	-10.23	AV
V	7440.00	62.71	-13.57	49.14	74.00	-24.86	PK
V	7440.00	52.04	-13.57	38.47	54.00	-15.53	AV
H	4960.00	70.20	-19.68	50.52	74.00	-23.48	PK
H	4960.00	59.51	-19.68	39.83	54.00	-14.17	AV
H	7440.00	61.65	-13.57	48.08	74.00	-25.92	PK
H	7440.00	54.65	-13.57	41.08	54.00	-12.92	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
π/4 DQPSK Low channel							
V	4804.00	71.46	-19.99	51.47	74.00	-22.53	PK
V	4804.00	60.81	-19.99	40.82	54.00	-13.18	AV
V	7206.00	60.59	-14.22	46.37	74.00	-27.63	PK
V	7206.00	50.90	-14.22	36.68	54.00	-17.32	AV
H	4804.00	68.31	-19.99	48.32	74.00	-25.68	PK
H	4804.00	58.23	-19.99	38.24	54.00	-15.76	AV
H	7206.00	59.26	-14.22	45.04	74.00	-28.96	PK
H	7206.00	51.75	-14.22	37.53	54.00	-16.47	AV
π/4 DQPSK Middle channel							
V	4882.00	69.38	-19.84	49.54	74.00	-24.46	PK
V	4882.00	60.39	-19.84	40.55	54.00	-13.45	AV
V	7323.00	61.57	-13.90	47.67	74.00	-26.33	PK
V	7323.00	53.26	-13.90	39.36	54.00	-14.64	AV
H	4882.00	68.09	-19.84	48.25	74.00	-25.75	PK
H	4882.00	58.20	-19.84	38.36	54.00	-15.64	AV
H	7323.00	60.06	-13.90	46.16	74.00	-27.84	PK
H	7323.00	51.13	-13.90	37.23	54.00	-16.77	AV
π/4 DQPSK High channel							
V	4960.00	71.24	-19.68	51.56	74.00	-22.44	PK
V	4960.00	63.13	-19.68	43.45	54.00	-10.55	AV
V	7440.00	64.18	-13.57	50.61	74.00	-23.39	PK
V	7440.00	54.91	-13.57	41.34	54.00	-12.66	AV
H	4960.00	70.00	-19.68	50.32	74.00	-23.68	PK
H	4960.00	59.58	-19.68	39.90	54.00	-14.10	AV
H	7440.00	61.51	-13.57	47.94	74.00	-26.06	PK
H	7440.00	52.80	-13.57	39.23	54.00	-14.77	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
8DPSK Low channel							
V	4804.00	72.56	-19.99	52.57	74.00	-21.43	PK
V	4804.00	62.23	-19.99	42.24	54.00	-11.76	AV
V	7206.00	63.56	-14.22	49.34	74.00	-24.66	PK
V	7206.00	54.05	-14.22	39.83	54.00	-14.17	AV
H	4804.00	70.21	-19.99	50.22	74.00	-23.78	PK
H	4804.00	60.28	-19.99	40.29	54.00	-13.71	AV
H	7206.00	61.43	-14.22	47.21	74.00	-26.79	PK
H	7206.00	52.63	-14.22	38.41	54.00	-15.59	AV
8DPSK Middle channel							
V	4882.00	70.81	-19.84	50.97	74.00	-23.03	PK
V	4882.00	63.59	-19.84	43.75	54.00	-10.25	AV
V	7323.00	63.22	-13.90	49.32	74.00	-24.68	PK
V	7323.00	53.29	-13.90	39.39	54.00	-14.61	AV
H	4882.00	69.64	-19.84	49.80	74.00	-24.20	PK
H	4882.00	60.14	-19.84	40.30	54.00	-13.70	AV
H	7323.00	60.86	-13.90	46.96	74.00	-27.04	PK
H	7323.00	53.40	-13.90	39.50	54.00	-14.50	AV
8DPSK High channel							
V	4960.00	73.80	-19.68	54.12	74.00	-19.88	PK
V	4960.00	65.01	-19.68	45.33	54.00	-8.67	AV
V	7440.00	66.60	-13.57	53.03	74.00	-20.97	PK
V	7440.00	57.32	-13.57	43.75	54.00	-10.25	AV
H	4960.00	71.19	-19.68	51.51	74.00	-22.49	PK
H	4960.00	61.19	-19.68	41.51	54.00	-12.49	AV
H	7440.00	64.18	-13.57	50.61	74.00	-23.39	PK
H	7440.00	56.91	-13.57	43.34	54.00	-10.66	AV


Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement – Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

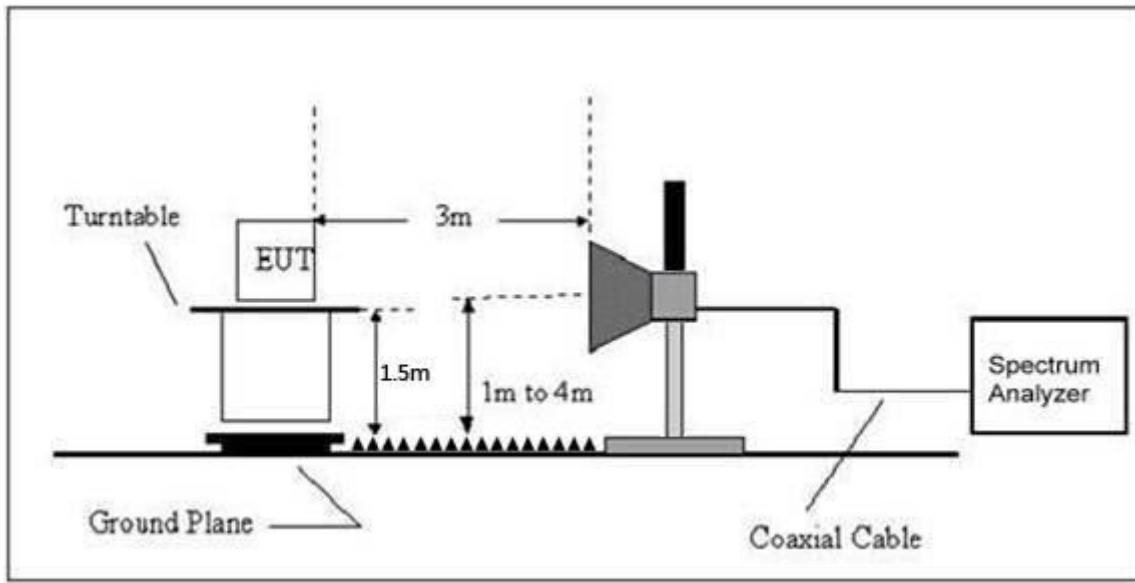

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (Emission In Restricted Band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Over	Result
					PK	PK	AV	PK	
GFSK	Low Channel 2402MHz								
	H	2390.00	73.28	-25.43	47.85	74.00	54.00	-26.15	PASS
	H	2400.00	75.35	-25.40	49.95	74.00	54.00	-24.05	PASS
	V	2390.00	73.22	-25.43	47.79	74.00	54.00	-26.21	PASS
	V	2400.00	74.80	-25.40	49.40	74.00	54.00	-24.60	PASS
	High Channel 2480MHz								
	H	2483.50	73.54	-25.15	48.39	74.00	54.00	-25.61	PASS
	H	2500.00	68.39	-25.10	43.29	74.00	54.00	-30.71	PASS
	V	2483.50	71.78	-25.15	46.63	74.00	54.00	-27.37	PASS
	V	2500.00	68.73	-25.10	43.63	74.00	54.00	-30.37	PASS
π/4DQPSK	Low Channel 2402MHz								
	H	2390.00	72.42	-25.43	46.99	74.00	54.00	-27.01	PASS
	H	2400.00	74.80	-25.40	49.40	74.00	54.00	-24.60	PASS
	V	2390.00	72.42	-25.43	46.99	74.00	54.00	-27.01	PASS
	V	2400.00	73.35	-25.40	47.95	74.00	54.00	-26.05	PASS
	High Channel 2480MHz								
	H	2483.50	72.46	-25.15	47.31	74.00	54.00	-26.69	PASS
	H	2500.00	68.79	-25.10	43.69	74.00	54.00	-30.31	PASS
	V	2483.50	72.00	-25.15	46.85	74.00	54.00	-27.15	PASS
	V	2500.00	68.78	-25.10	43.68	74.00	54.00	-30.32	PASS
8DPSK	Low Channel 2402MHz								
	H	2390.00	73.66	-25.43	48.23	74.00	54.00	-25.77	PASS
	H	2400.00	76.50	-25.40	51.10	74.00	54.00	-22.90	PASS
	V	2390.00	73.50	-25.43	48.07	74.00	54.00	-25.93	PASS
	V	2400.00	74.88	-25.40	49.48	74.00	54.00	-24.52	PASS
	High Channel 2480MHz								
	H	2483.50	72.52	-25.15	47.37	74.00	54.00	-26.63	PASS
	H	2500.00	69.82	-25.10	44.72	74.00	54.00	-29.28	PASS
	V	2483.50	71.79	-25.15	46.64	74.00	54.00	-27.36	PASS
	V	2500.00	68.03	-25.10	42.93	74.00	54.00	-31.07	PASS

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. Spurious RF Conducted Emissions

9.1 Block Diagram Of Test Setup



9.2 Limit


Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))



9.3 Test procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold



9.4 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage :	DC 7.6V


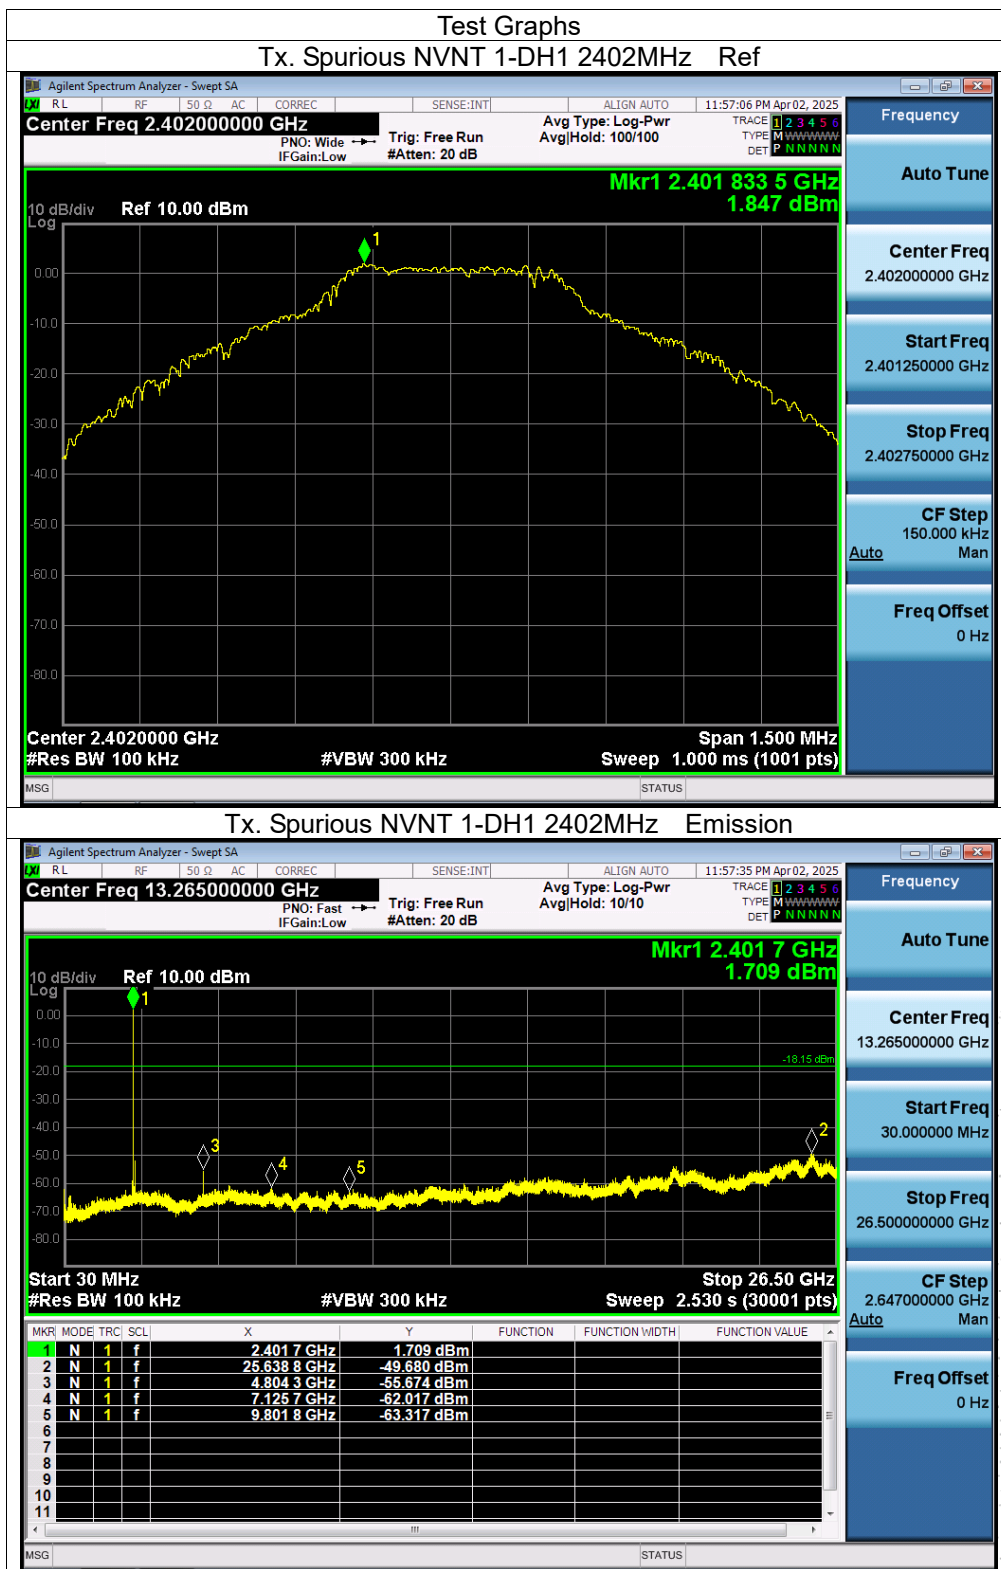


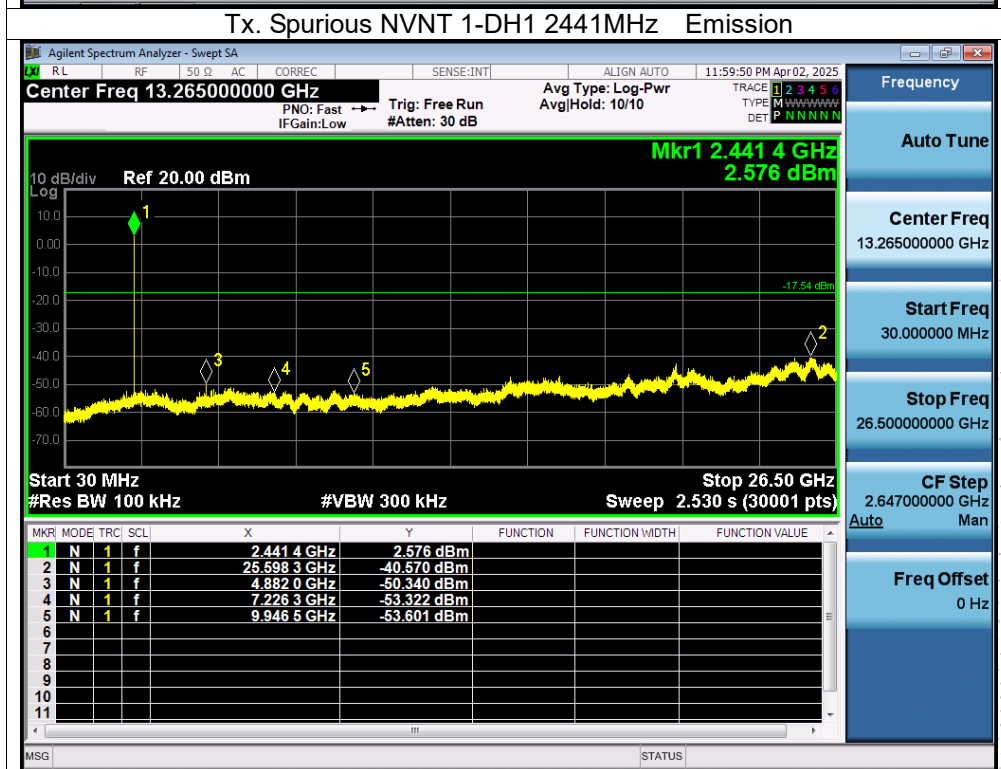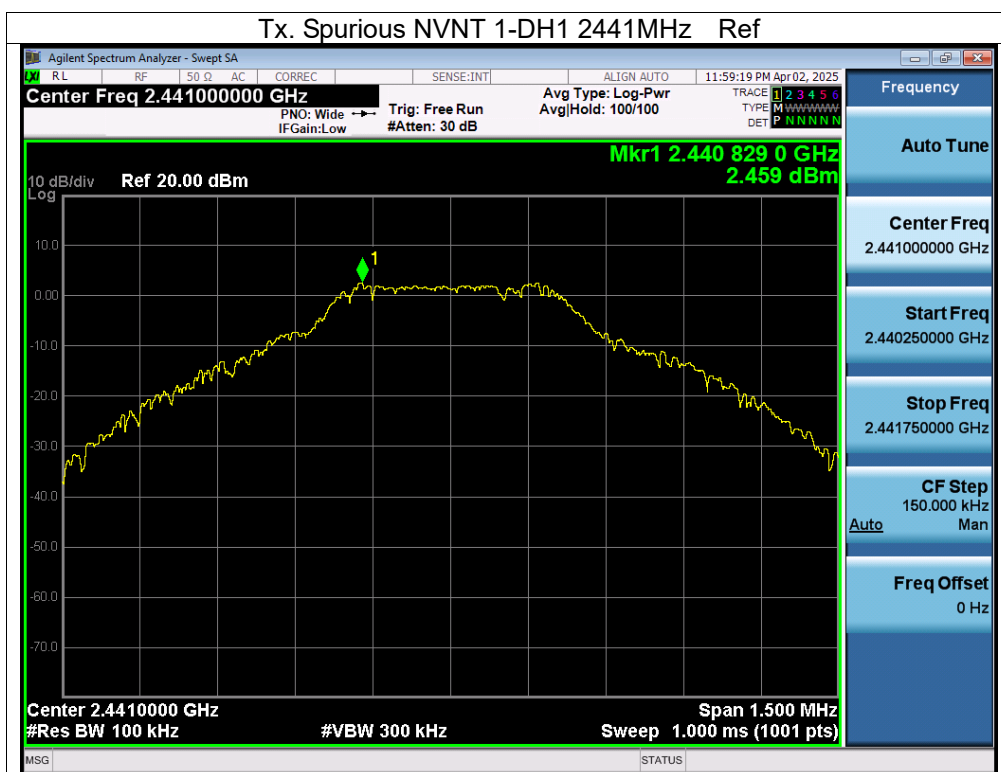


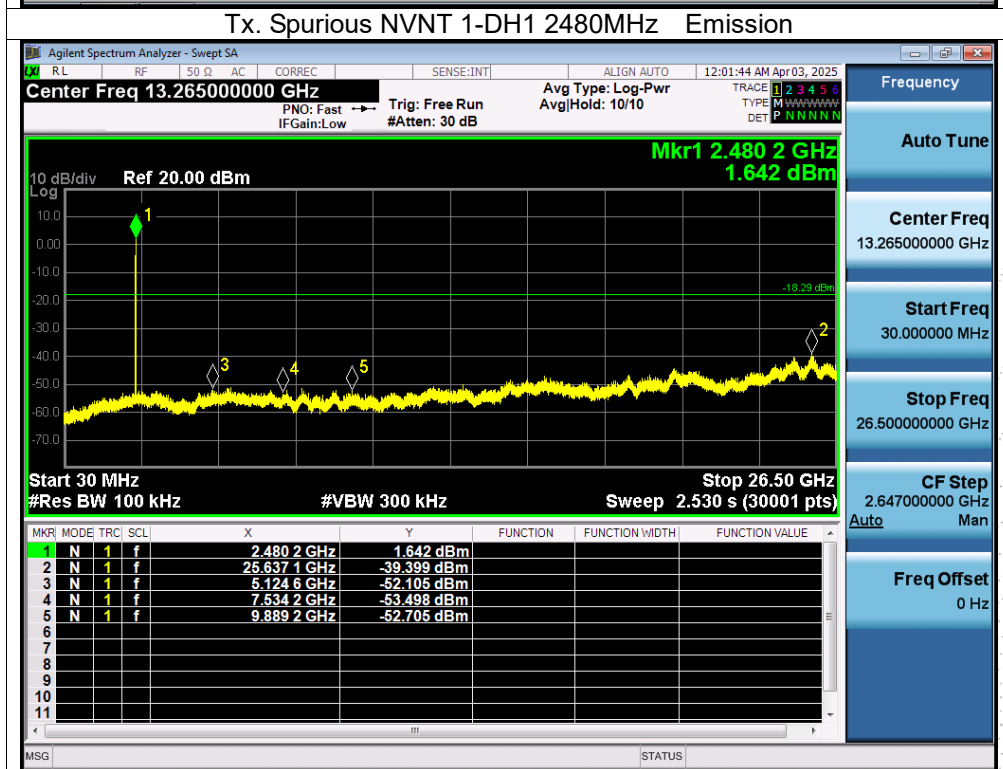
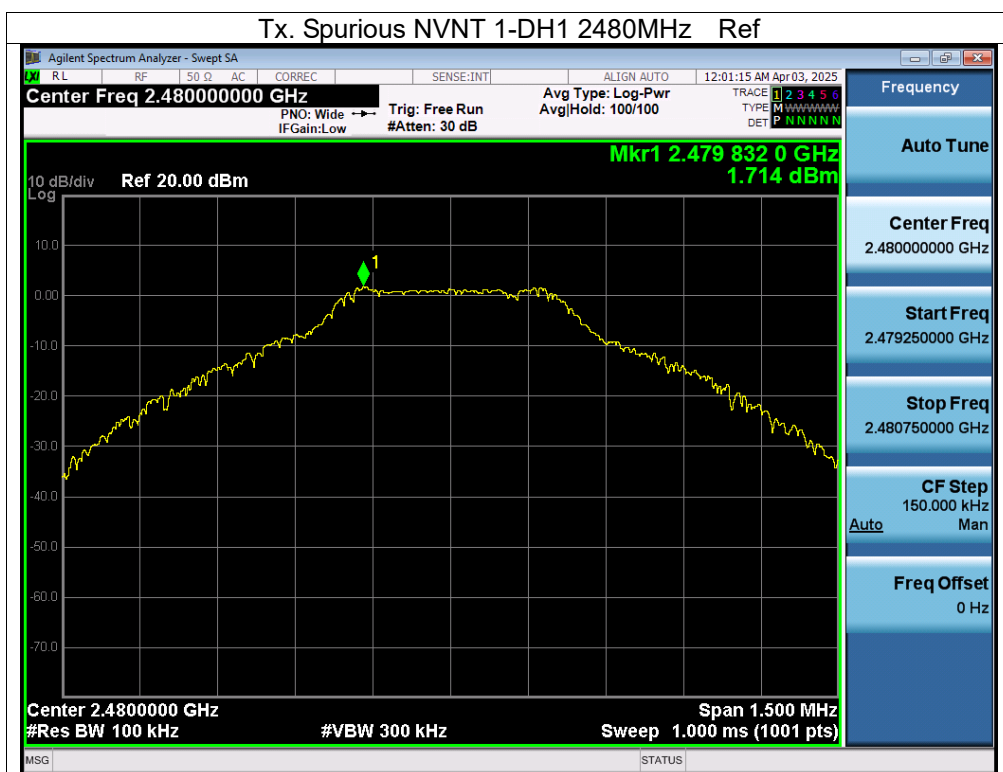


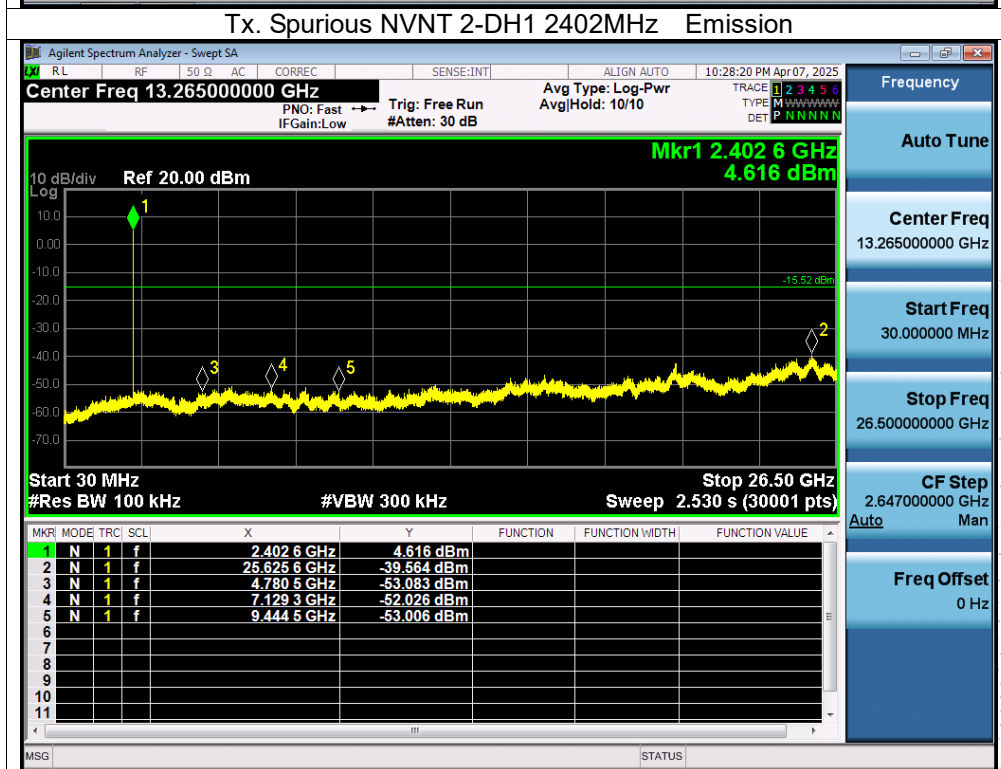
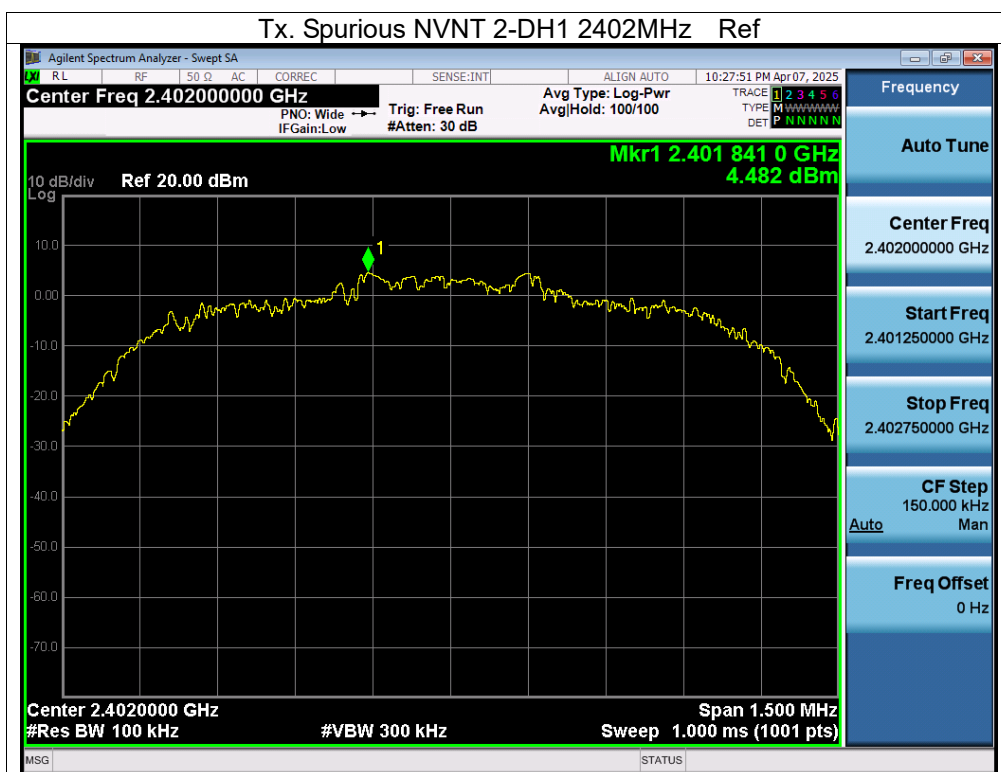


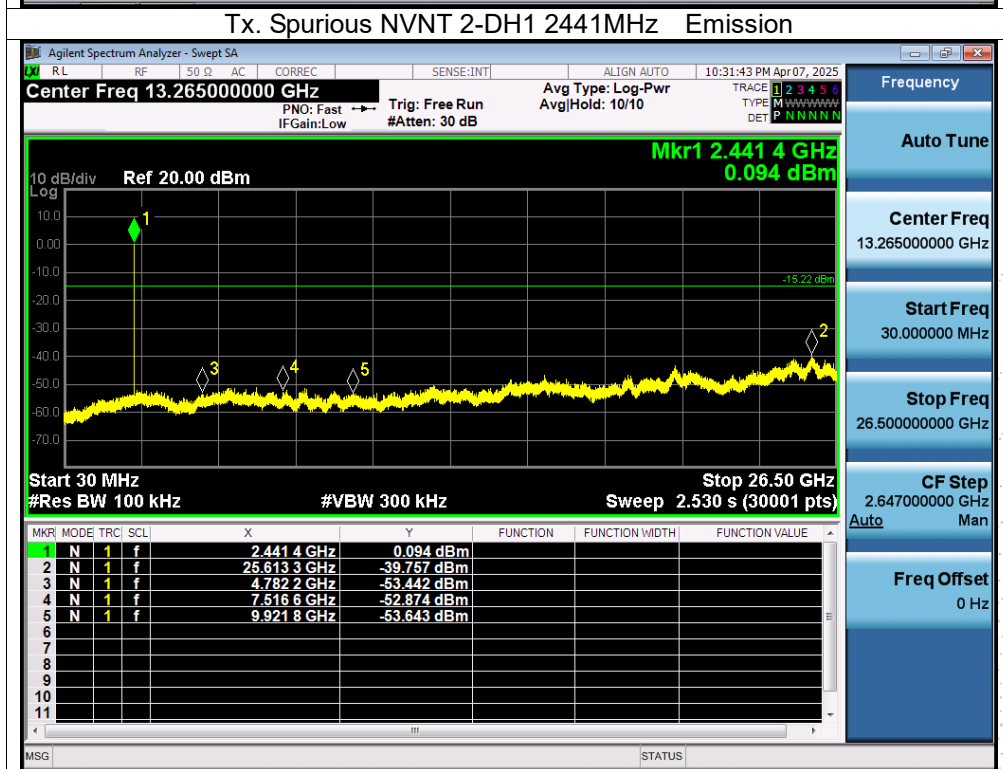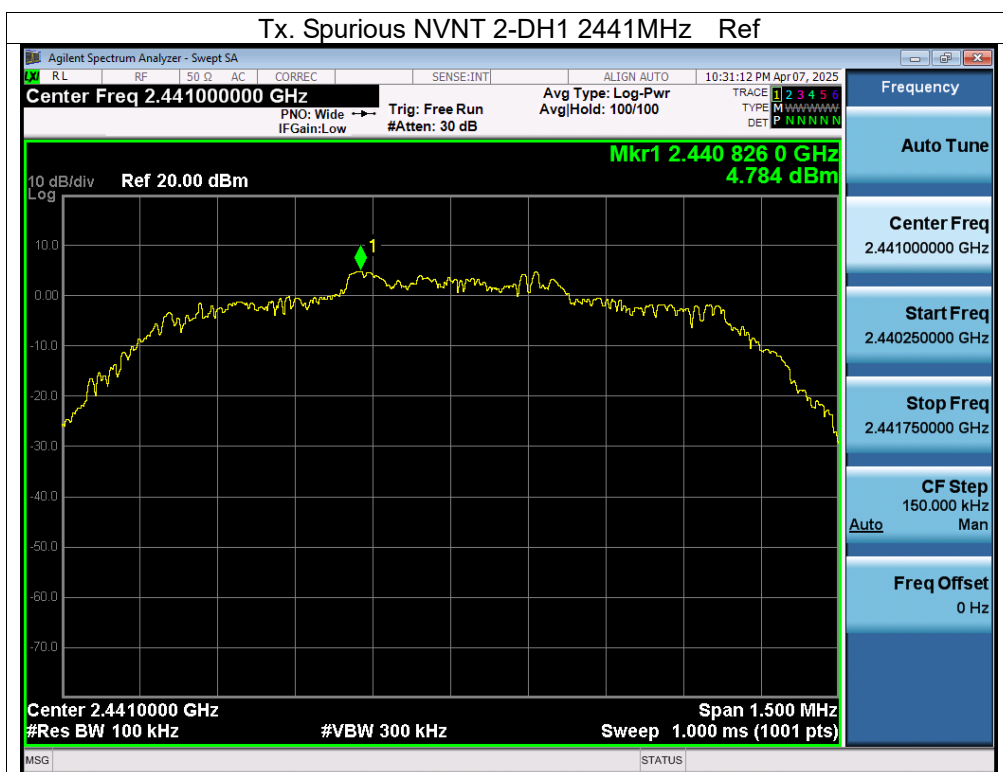


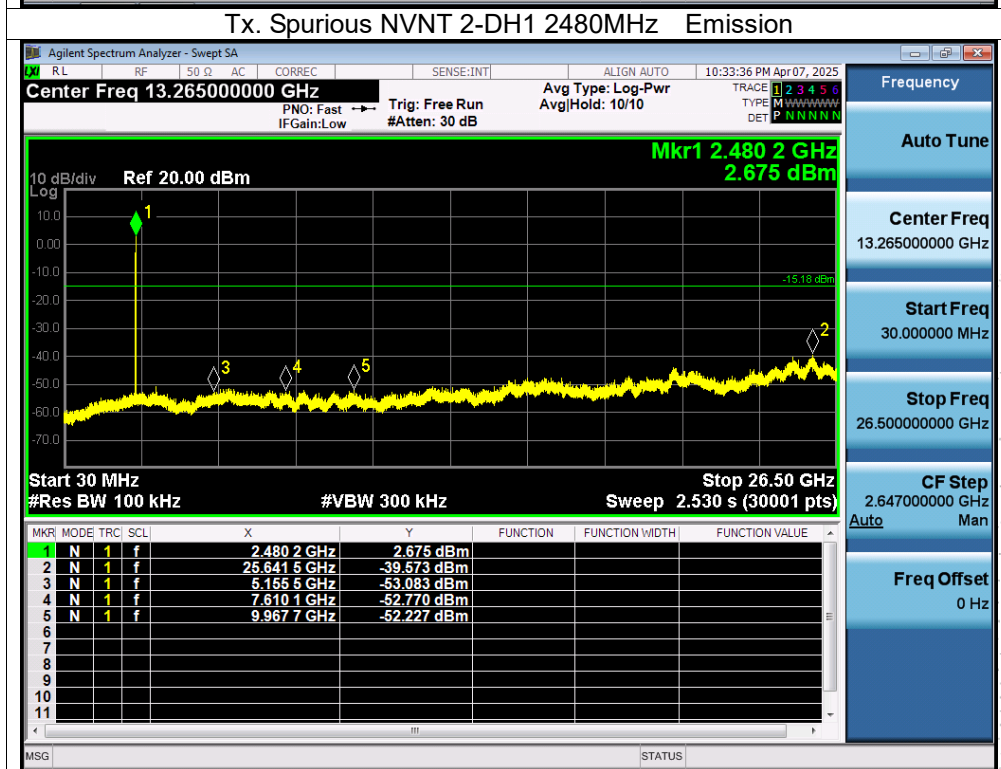
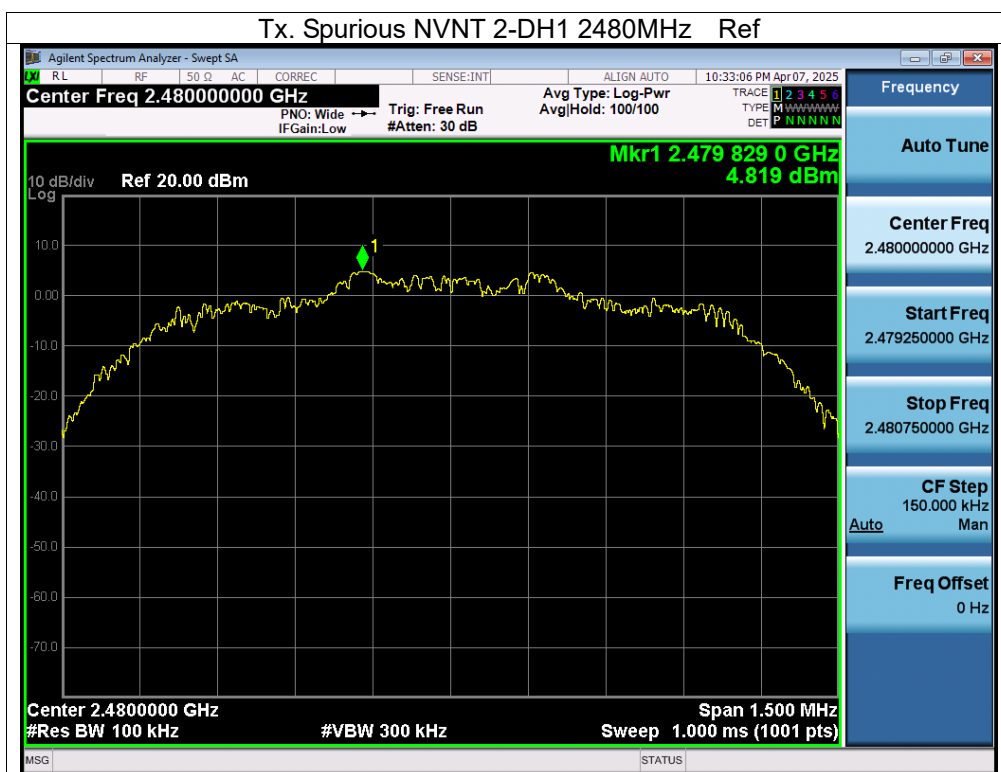



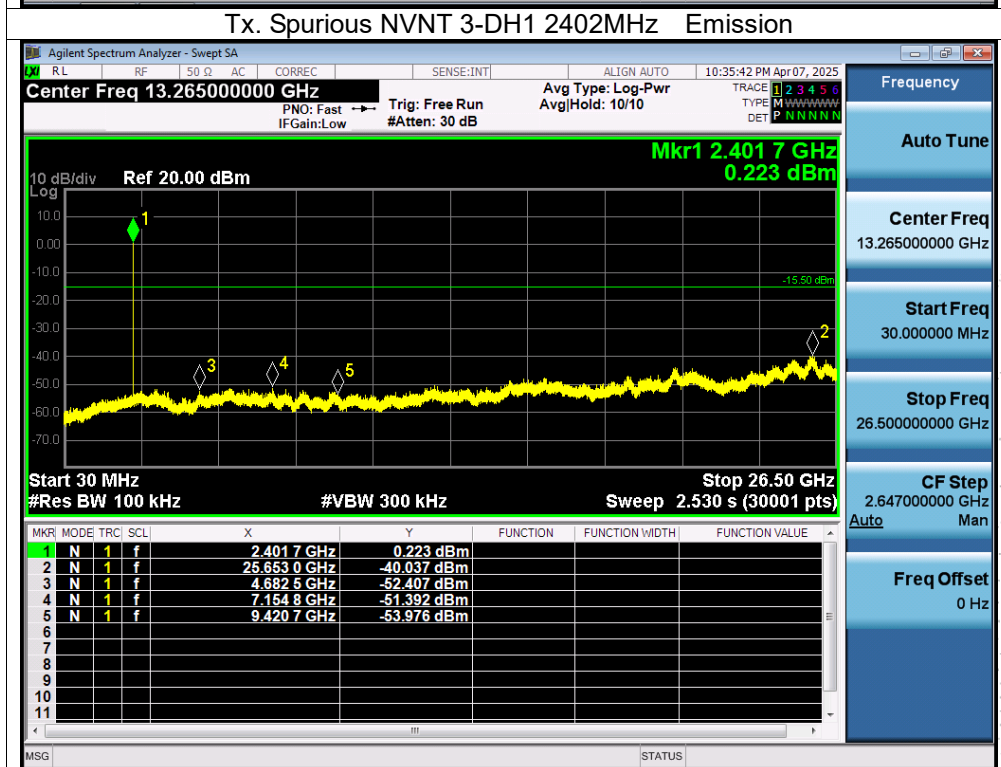


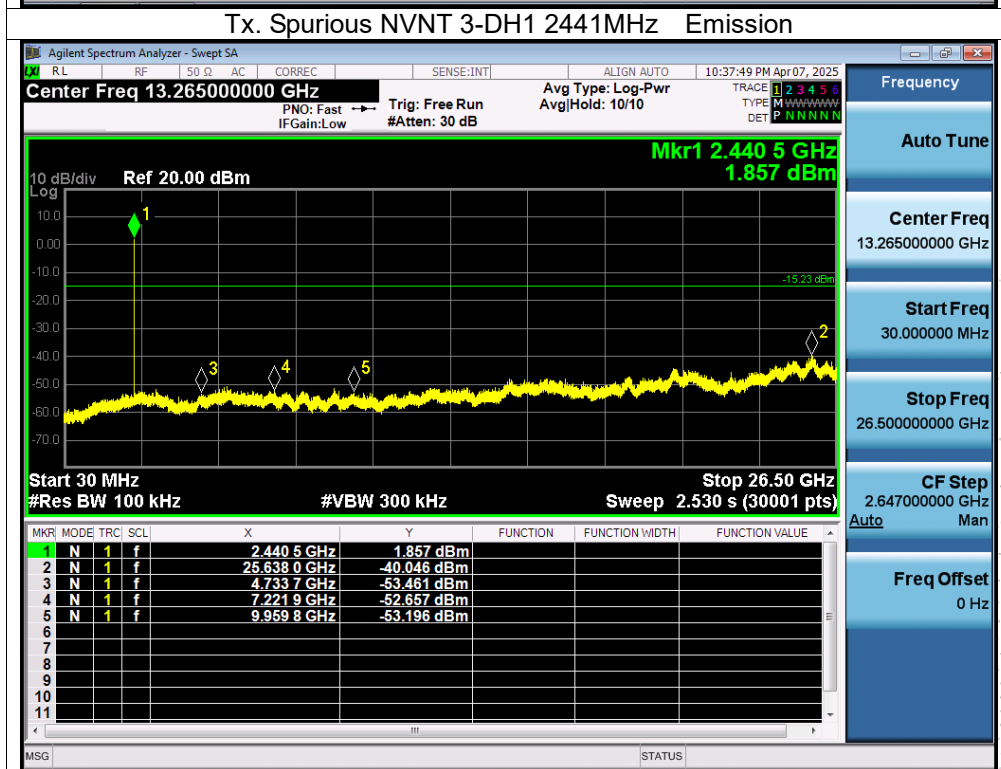
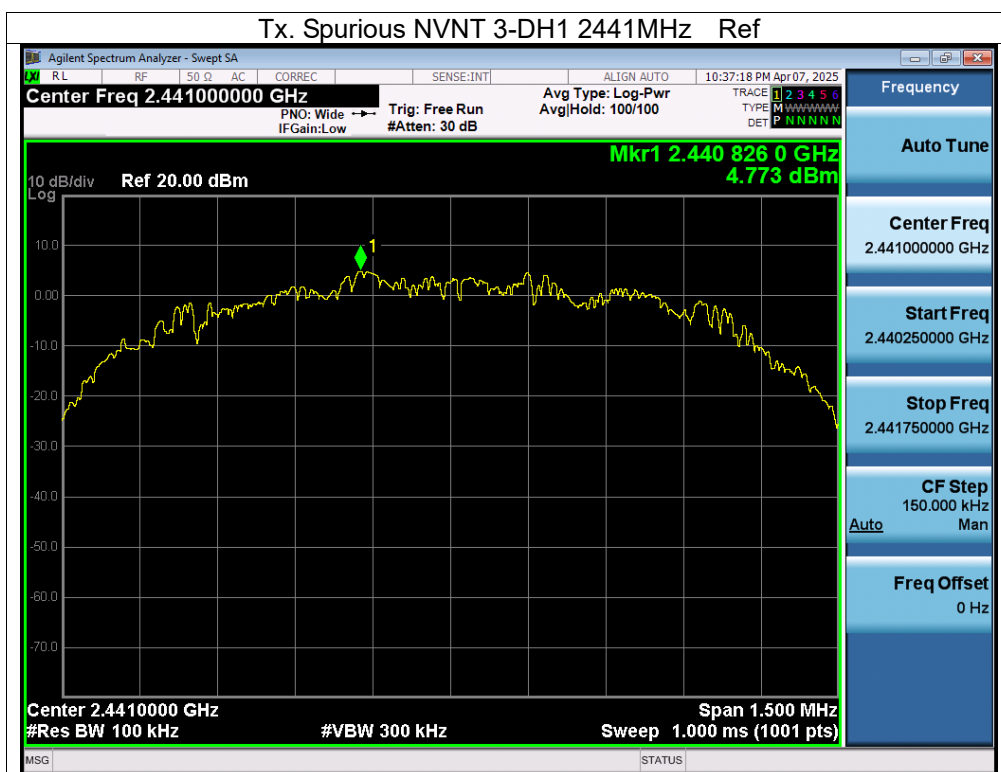


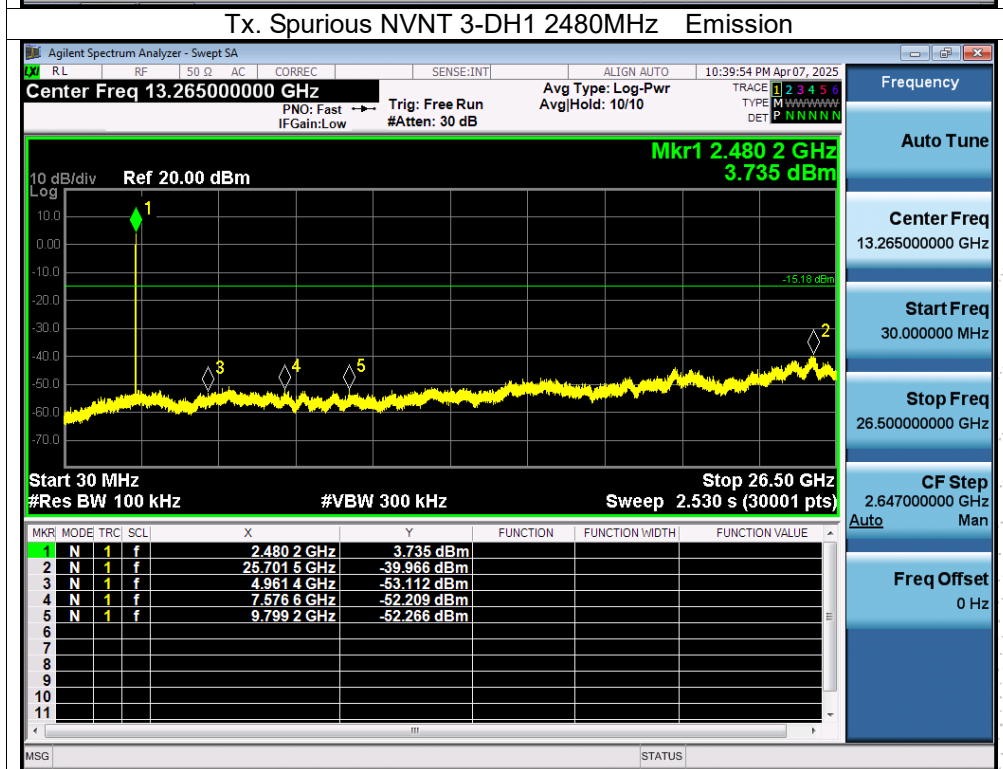
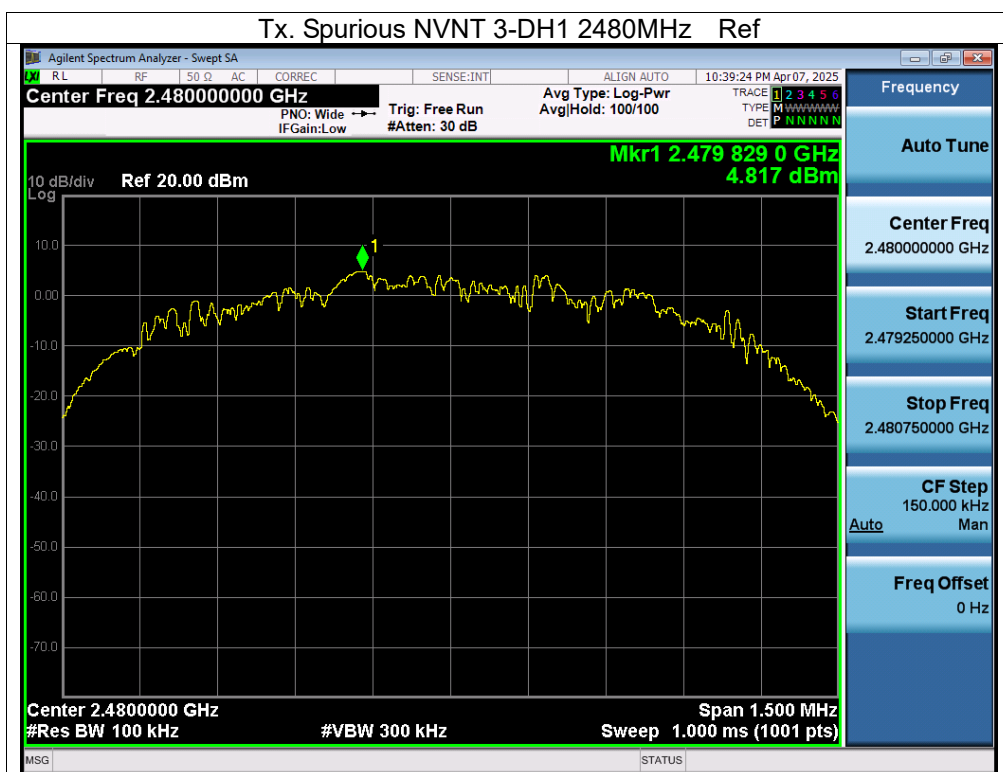



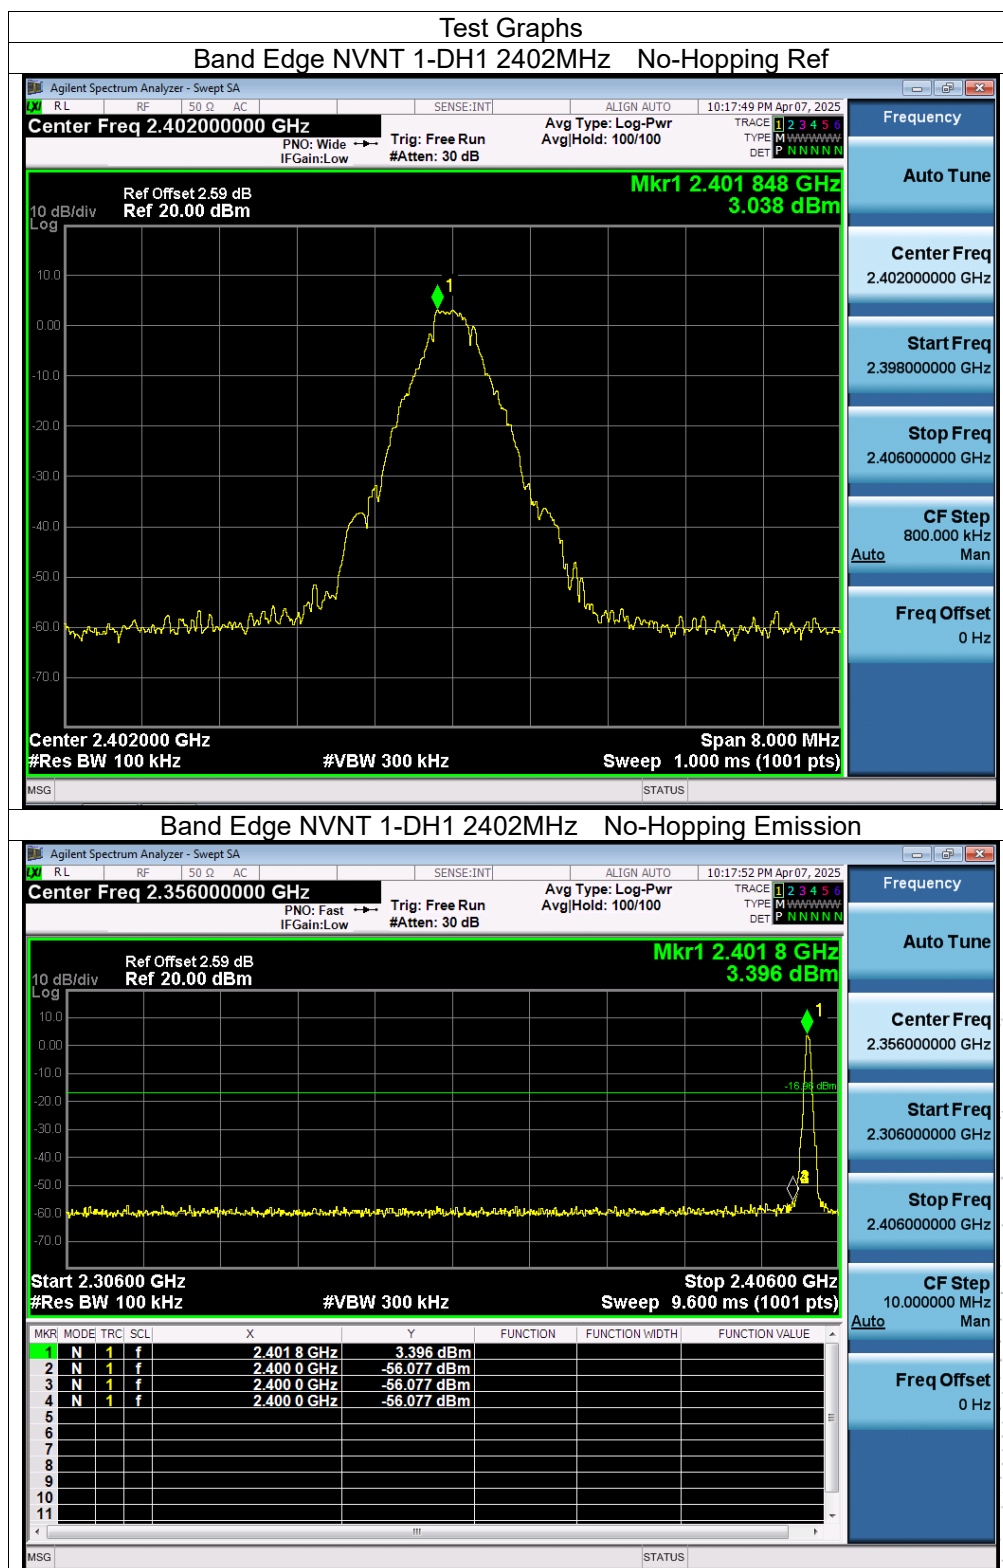


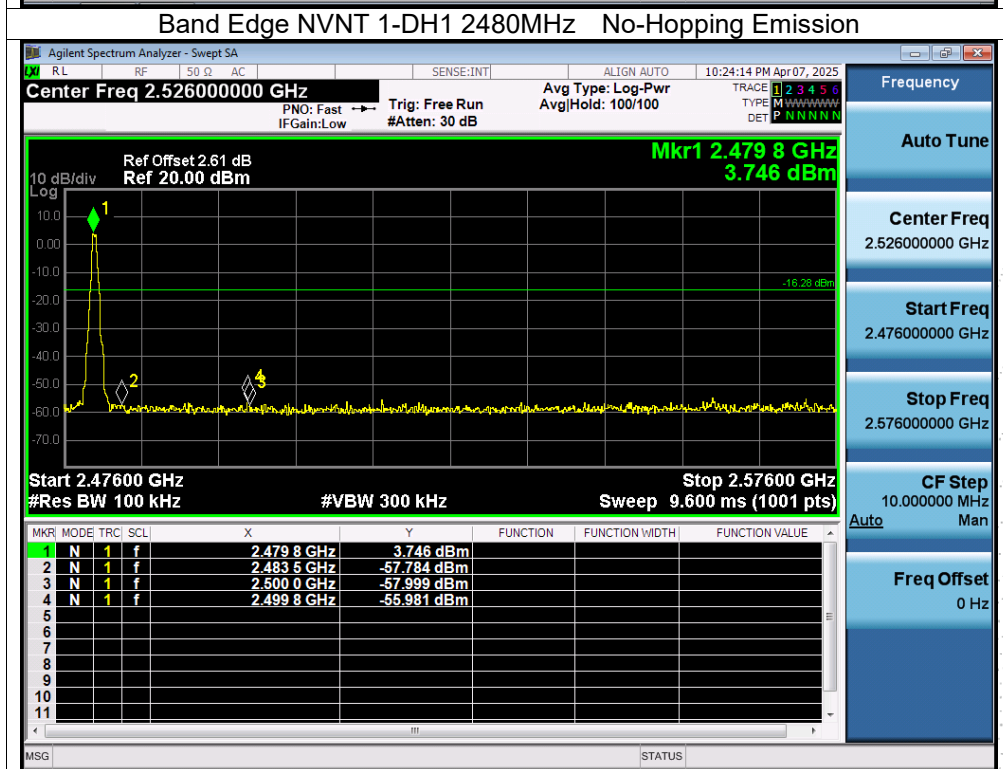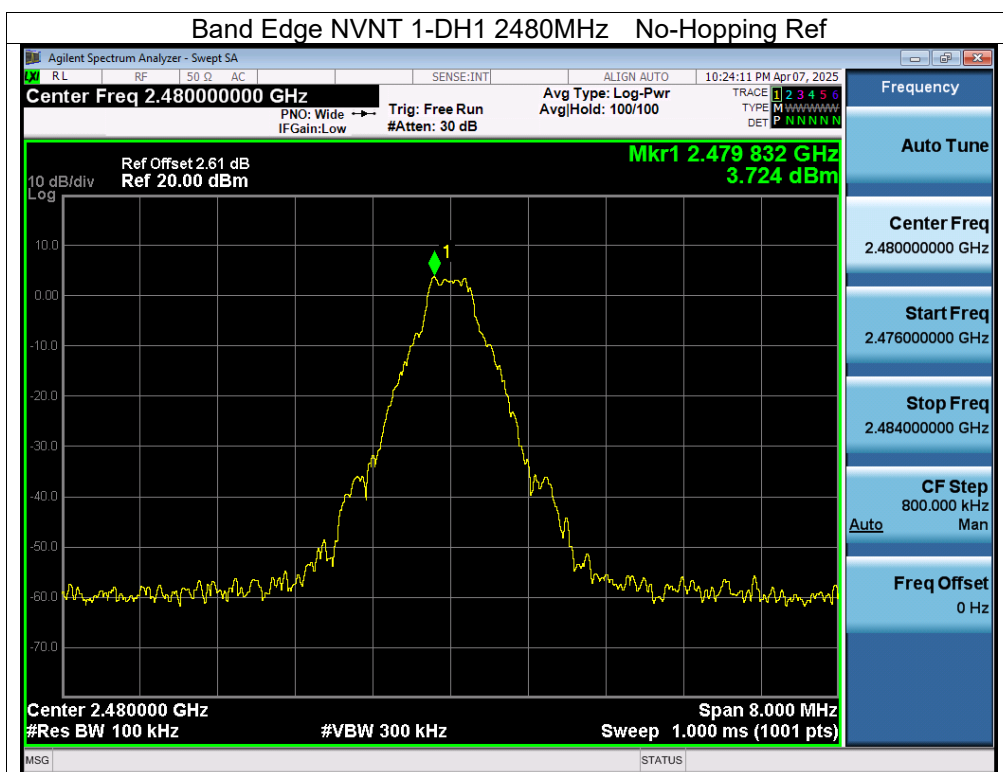


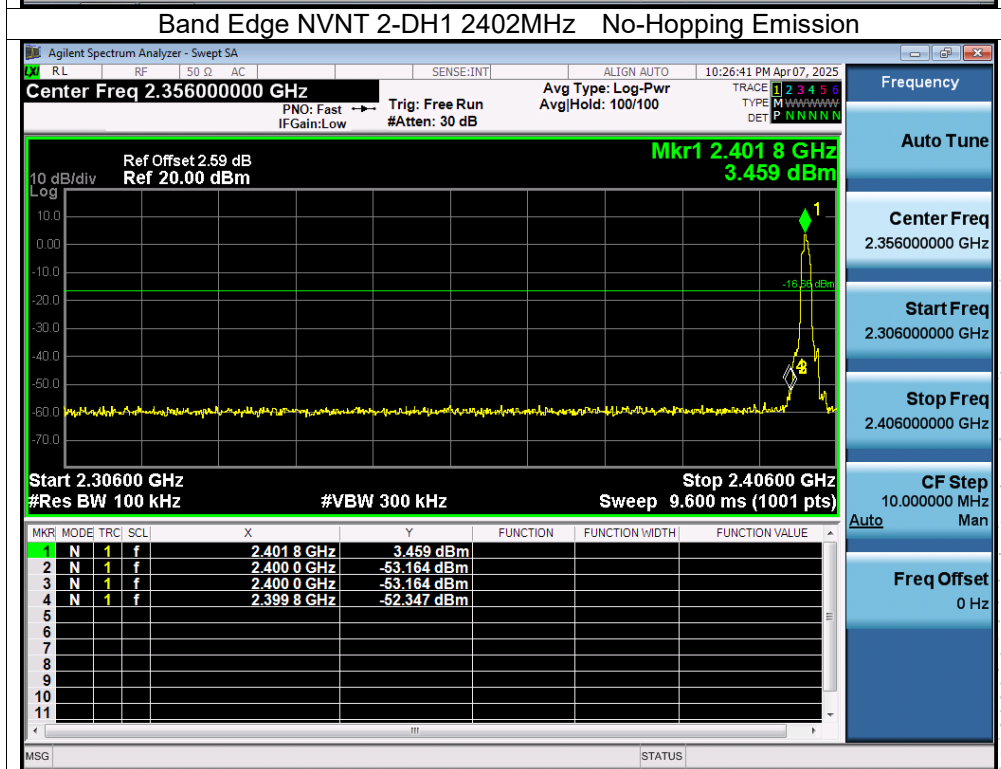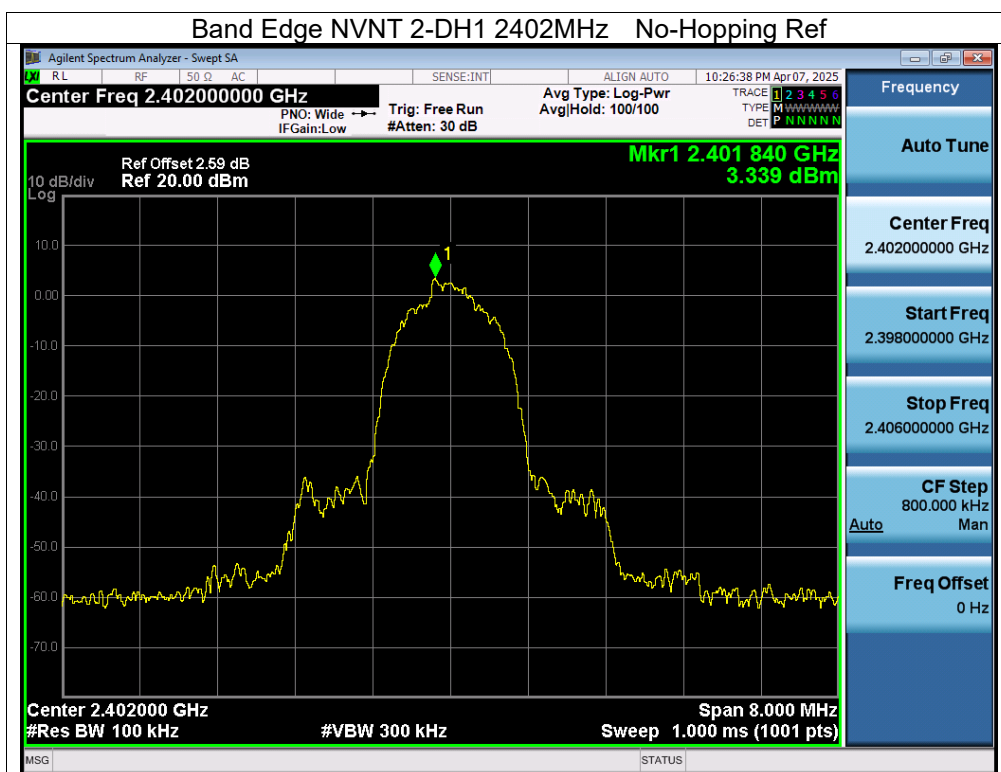


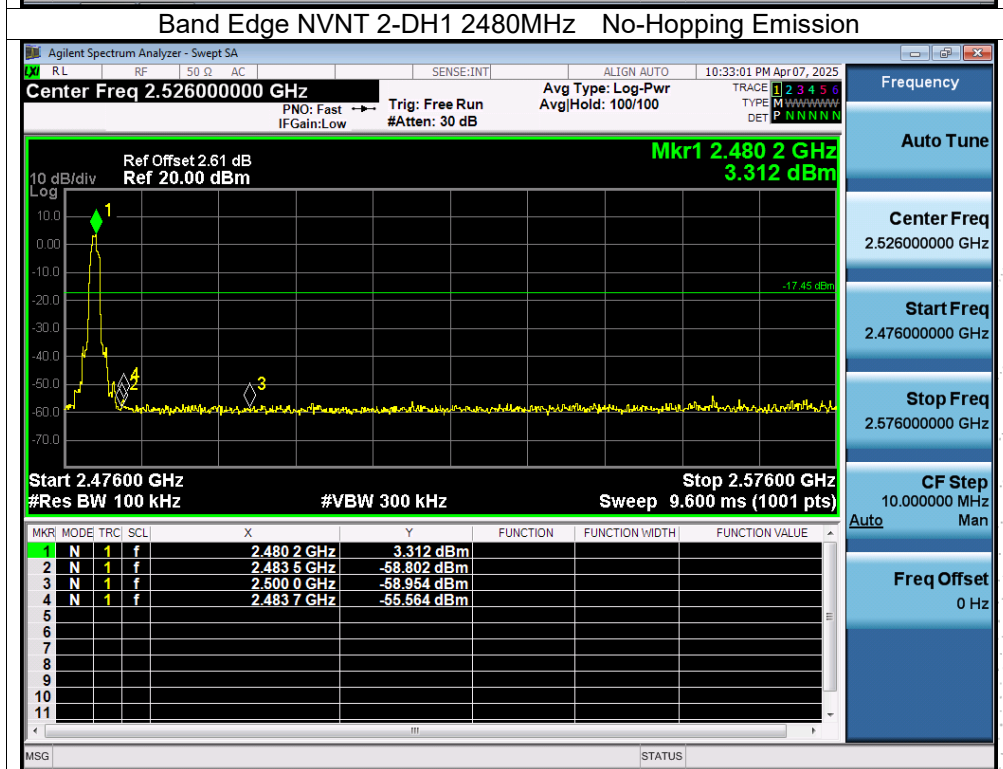
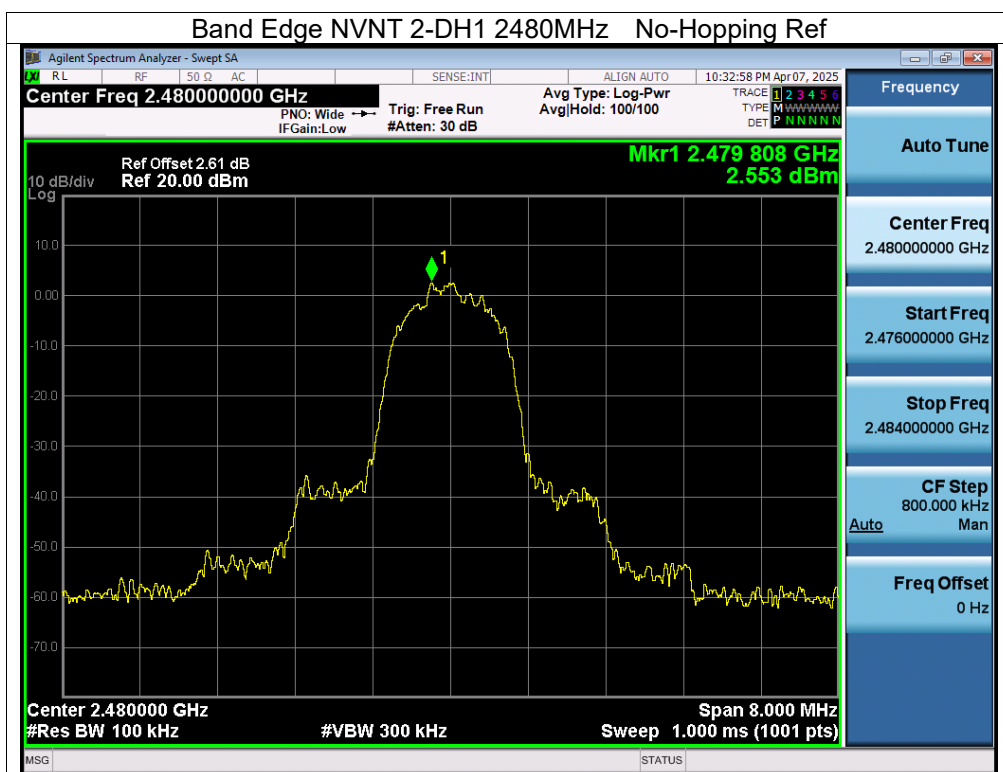


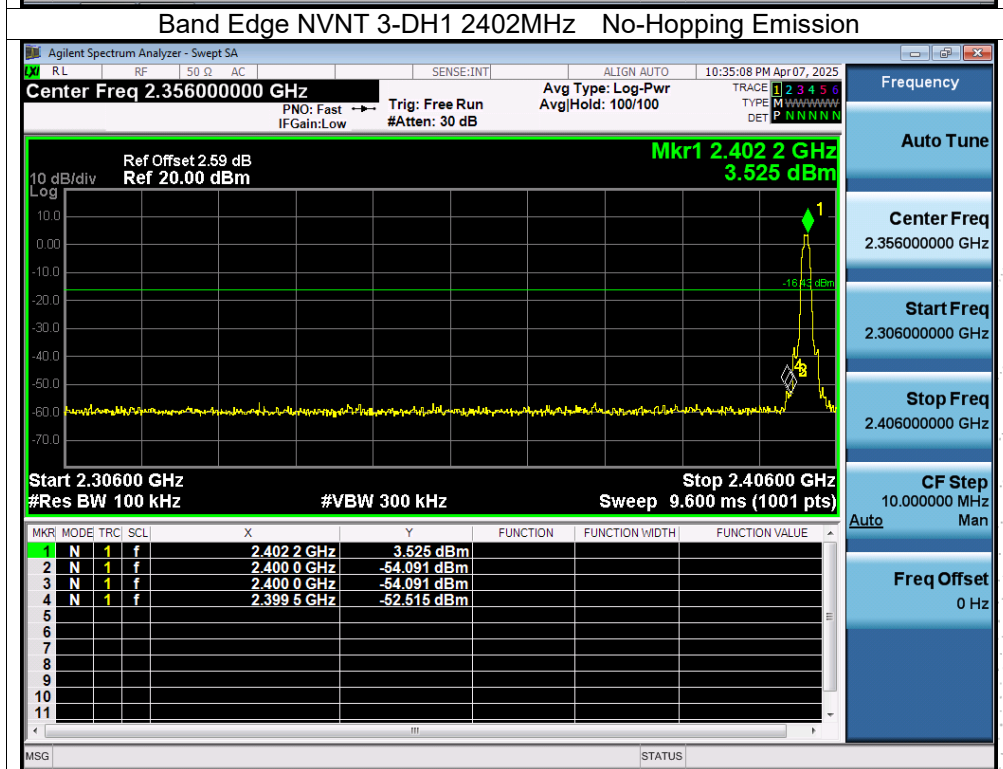
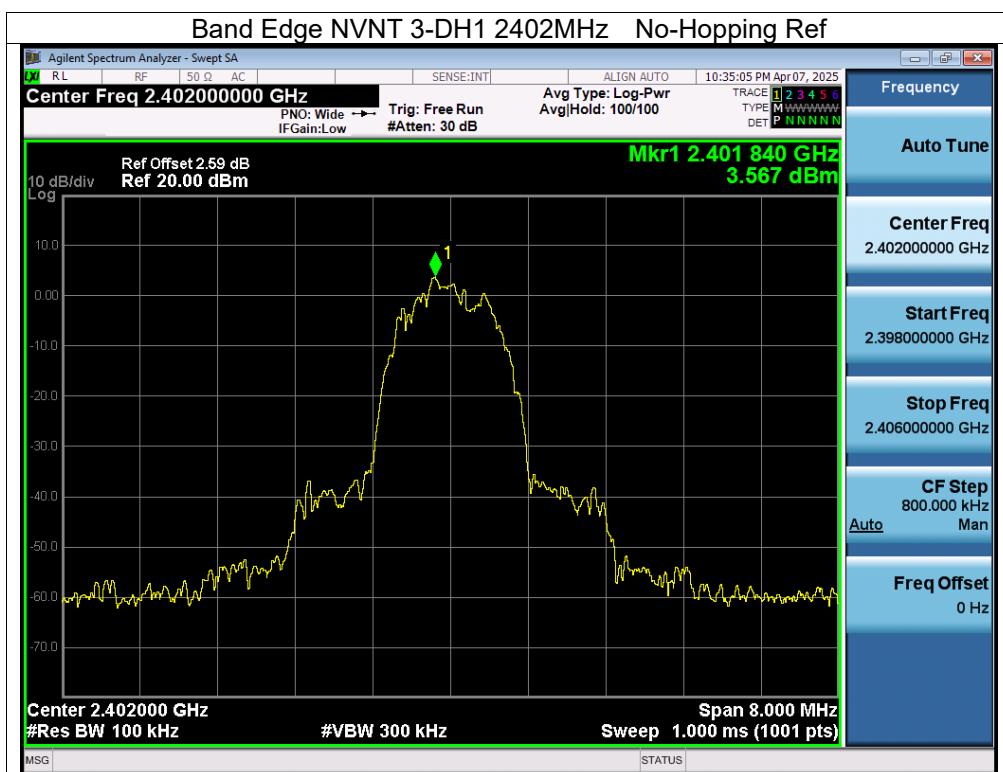


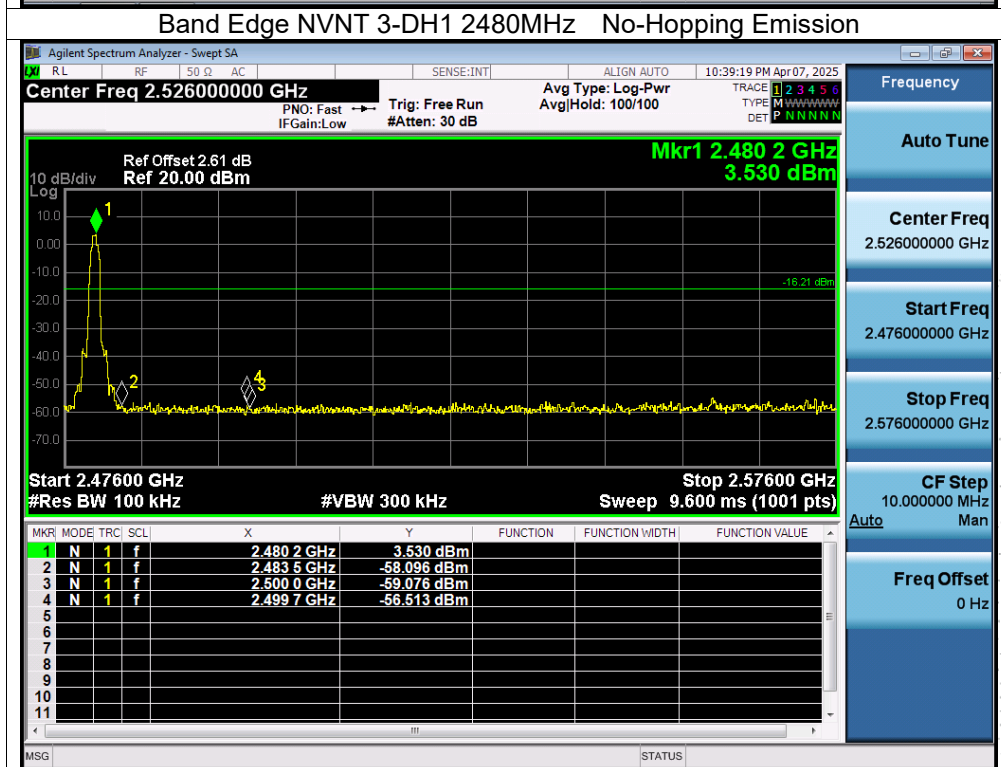
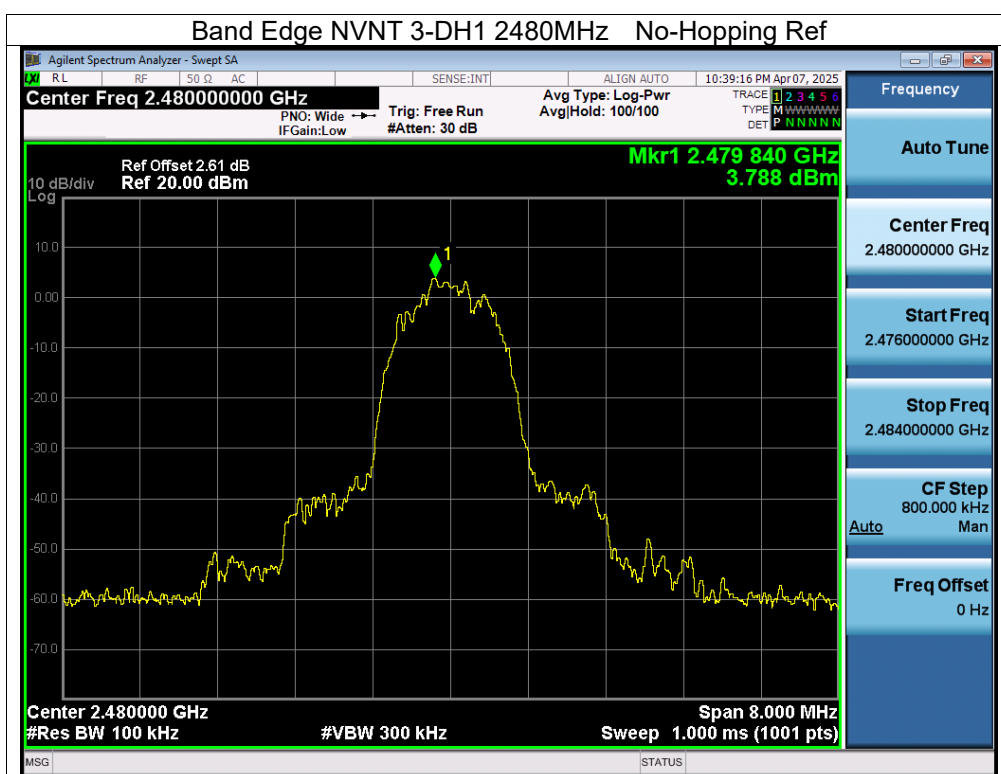



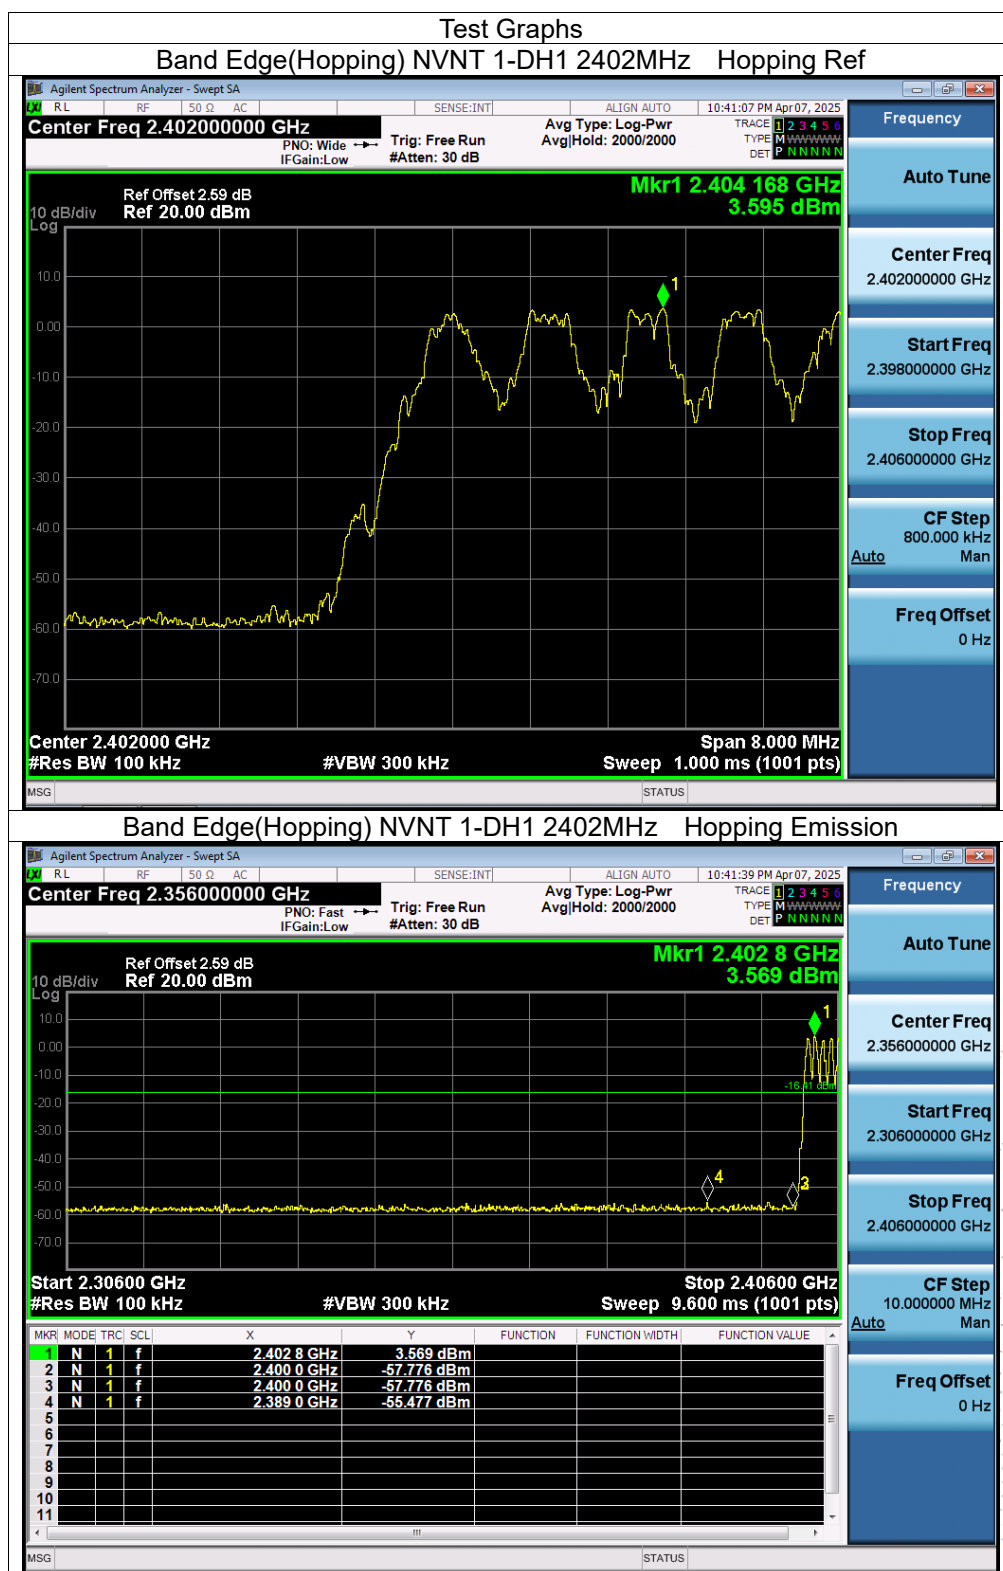


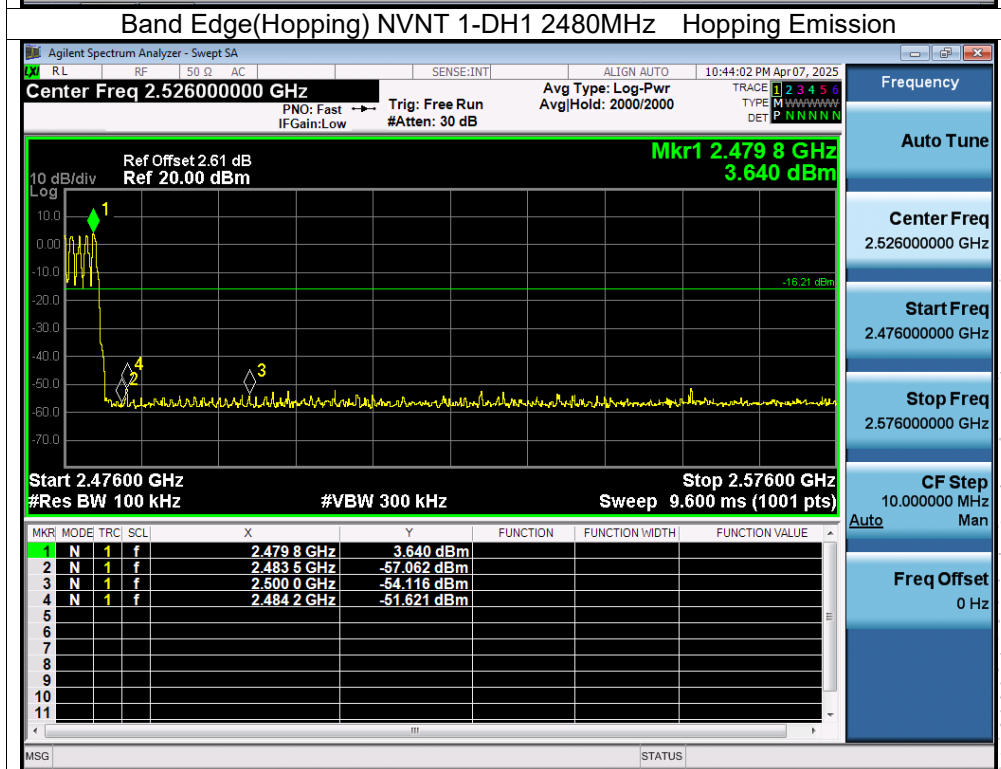

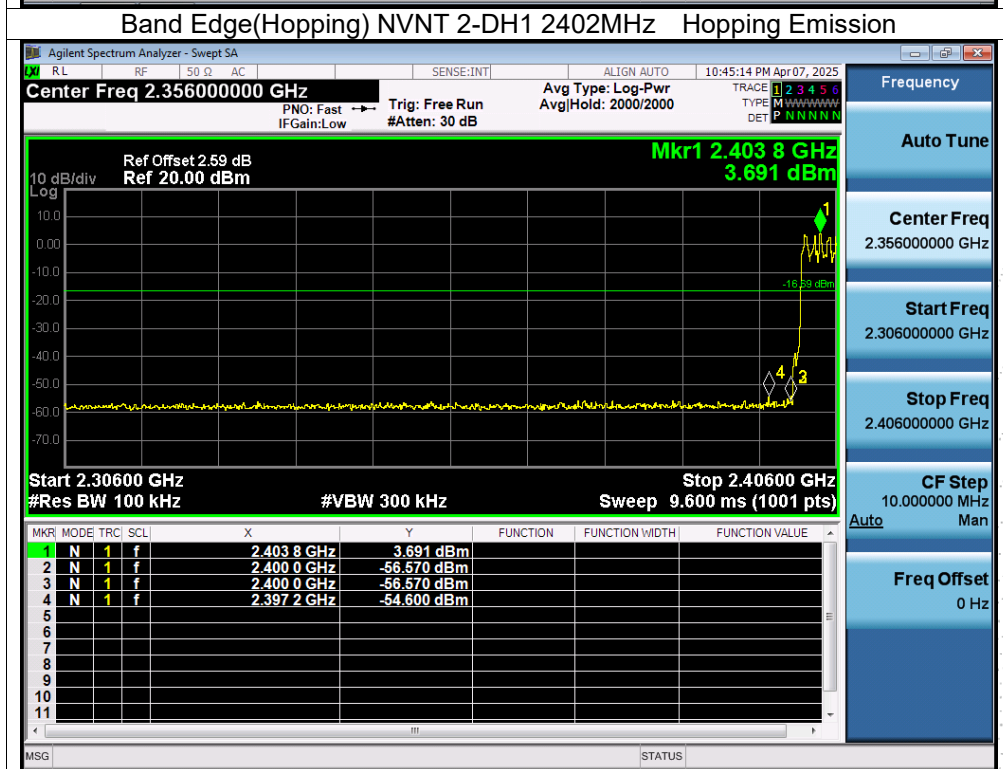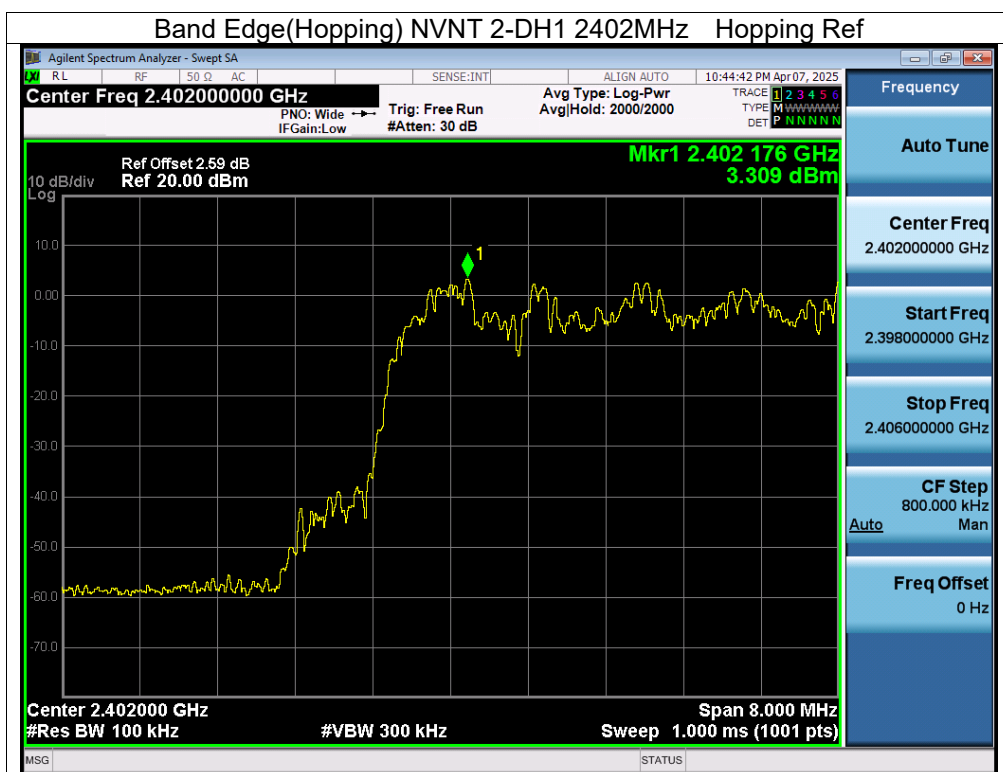

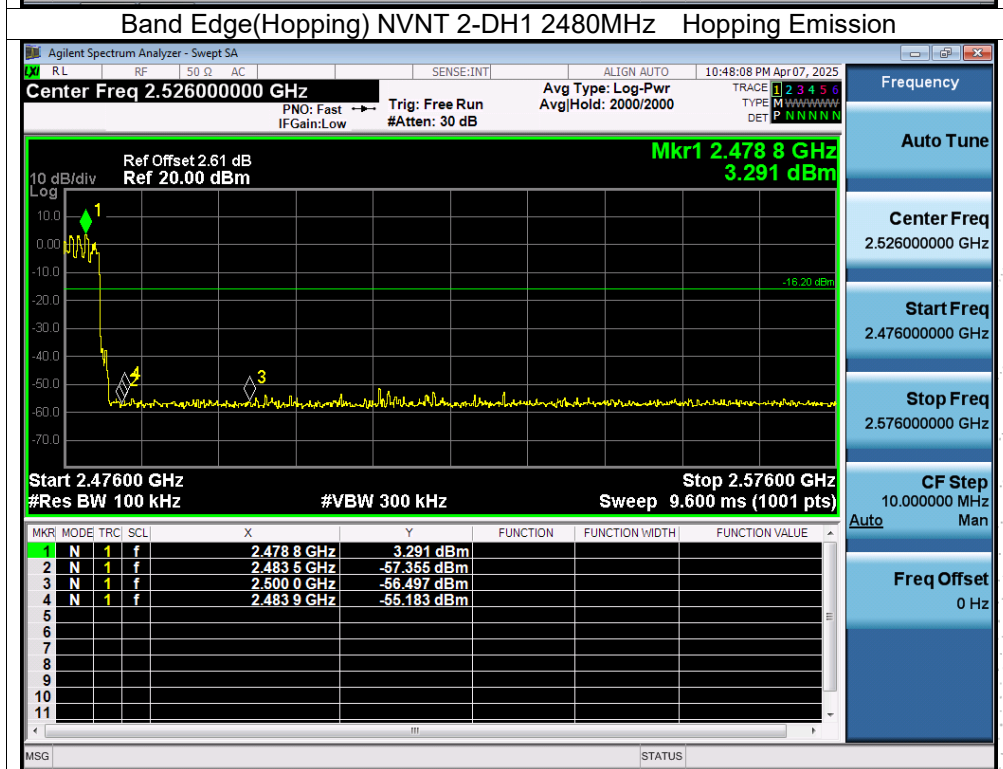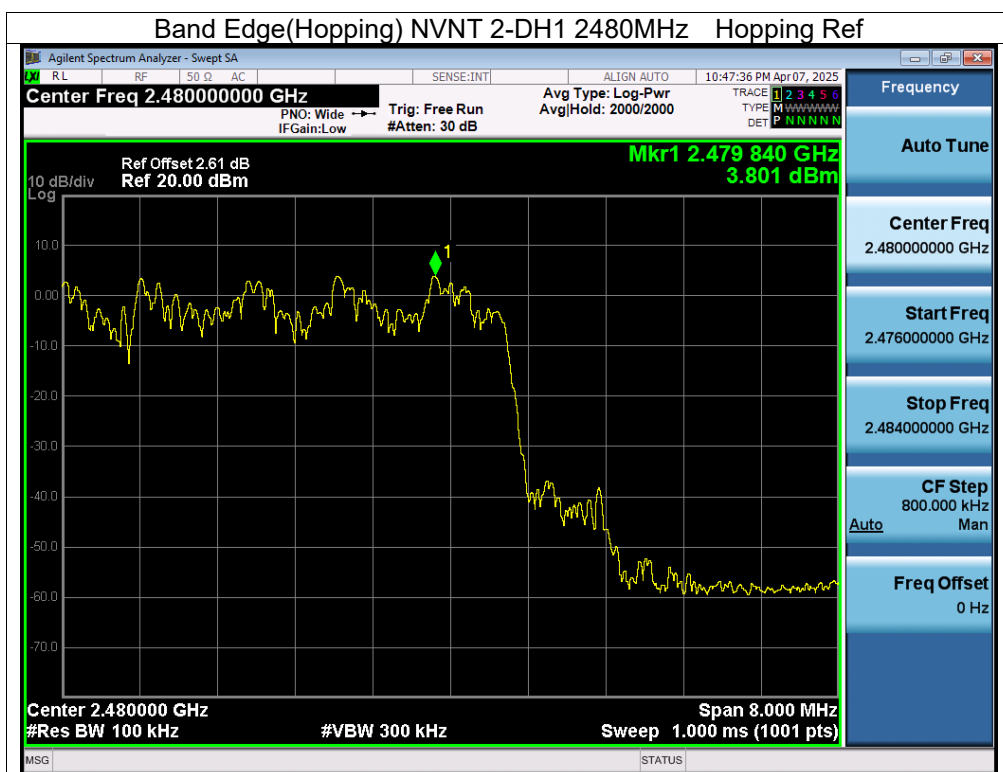

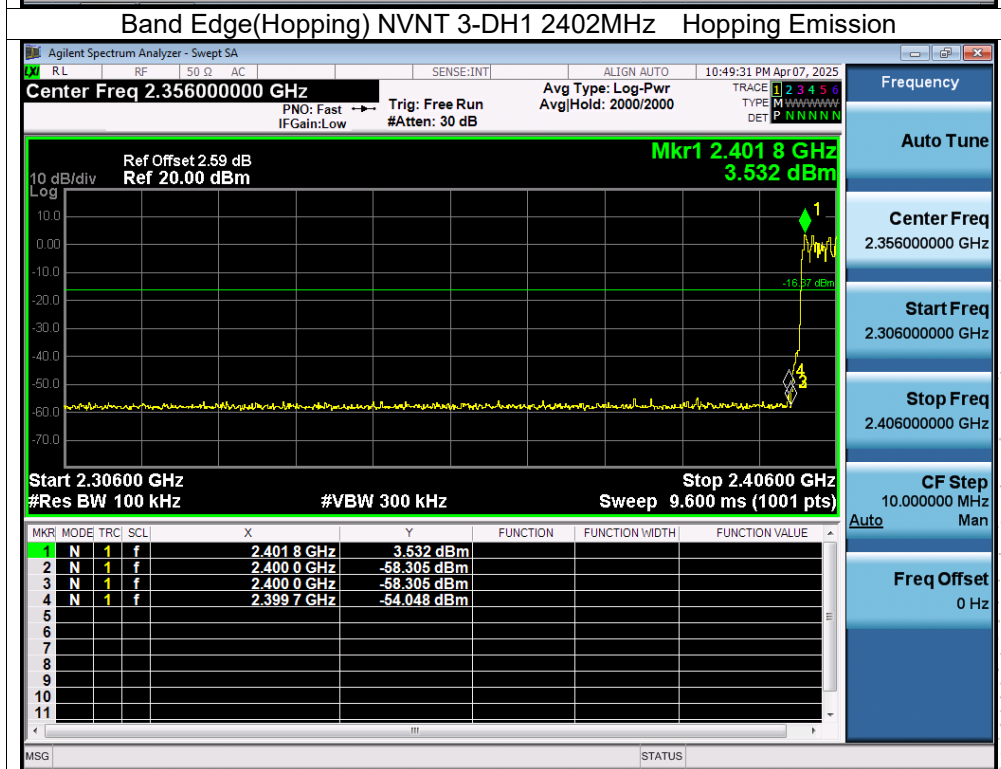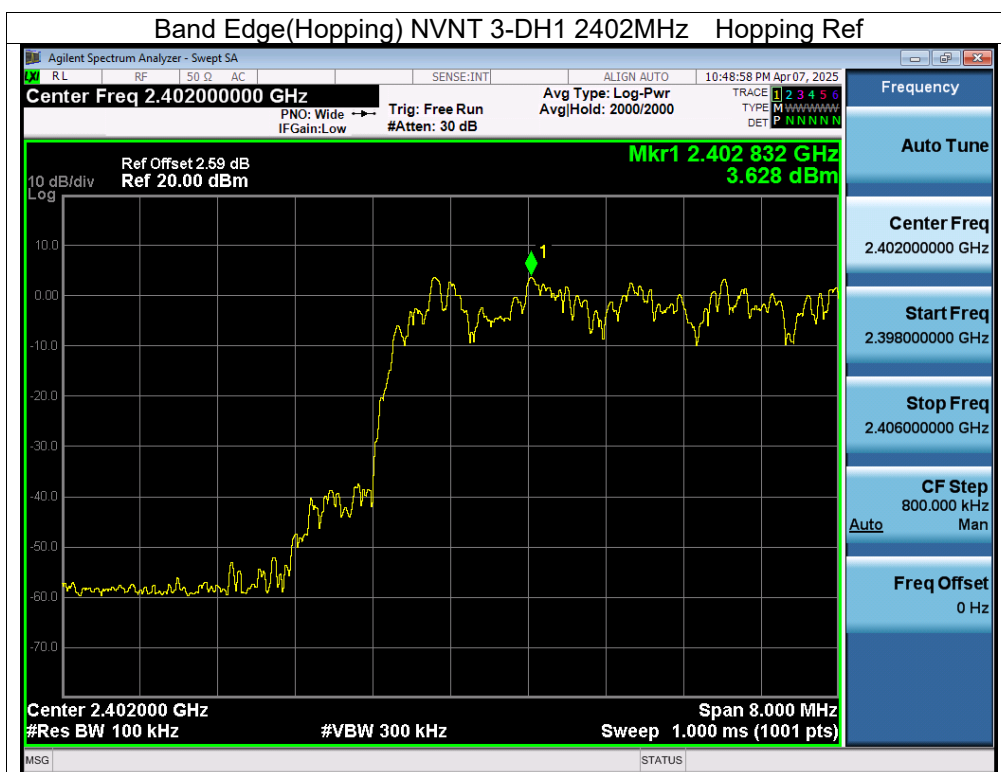

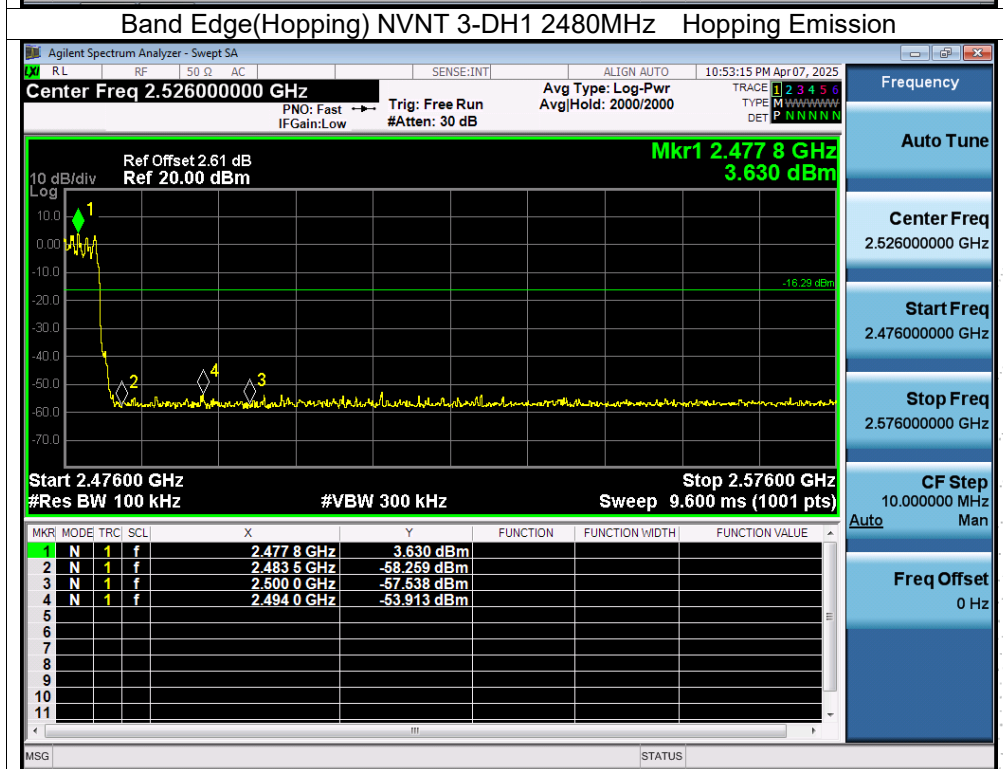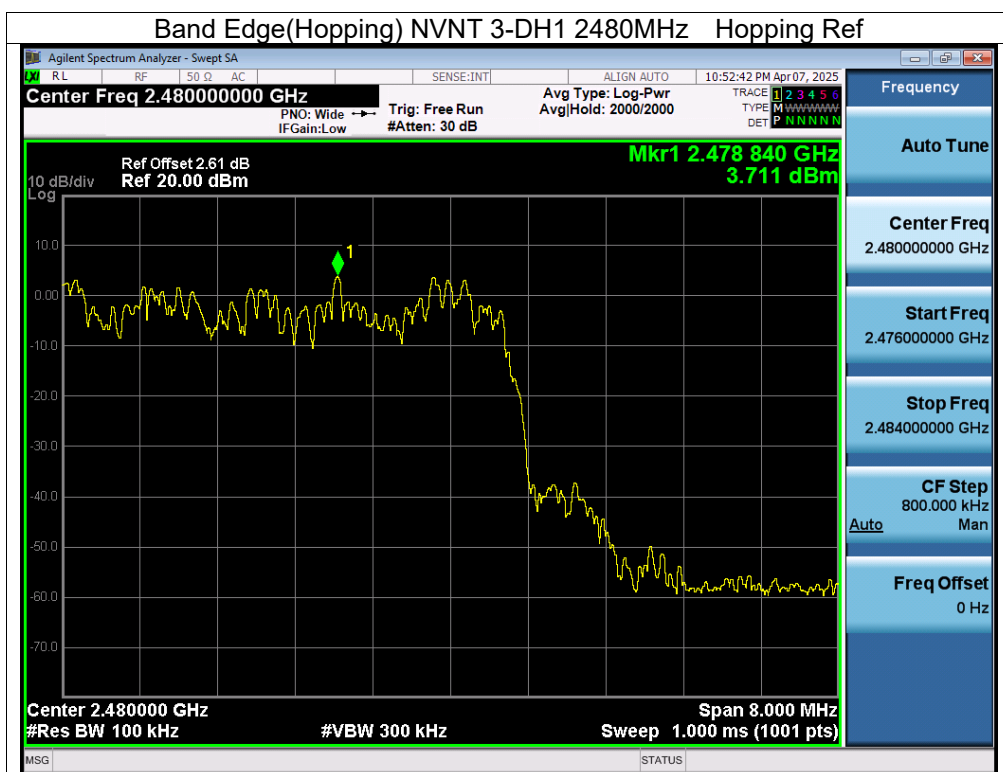

10. 20 dB Bandwidth

10.1 Block Diagram Of Test Setup



10.2 Limit

N/A


10.3 Test procedure



1. Set RBW = 30kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage :	DC 7.6V


Condition	Mode	Frequency (MHz)	-20dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	0.933	Pass
NVNT	1-DH1	2441	0.999	Pass
NVNT	1-DH1	2480	1.015	Pass
NVNT	2-DH1	2402	1.226	Pass
NVNT	2-DH1	2441	1.246	Pass
NVNT	2-DH1	2480	1.245	Pass
NVNT	3-DH1	2402	1.299	Pass
NVNT	3-DH1	2441	1.287	Pass
NVNT	3-DH1	2480	1.291	Pass

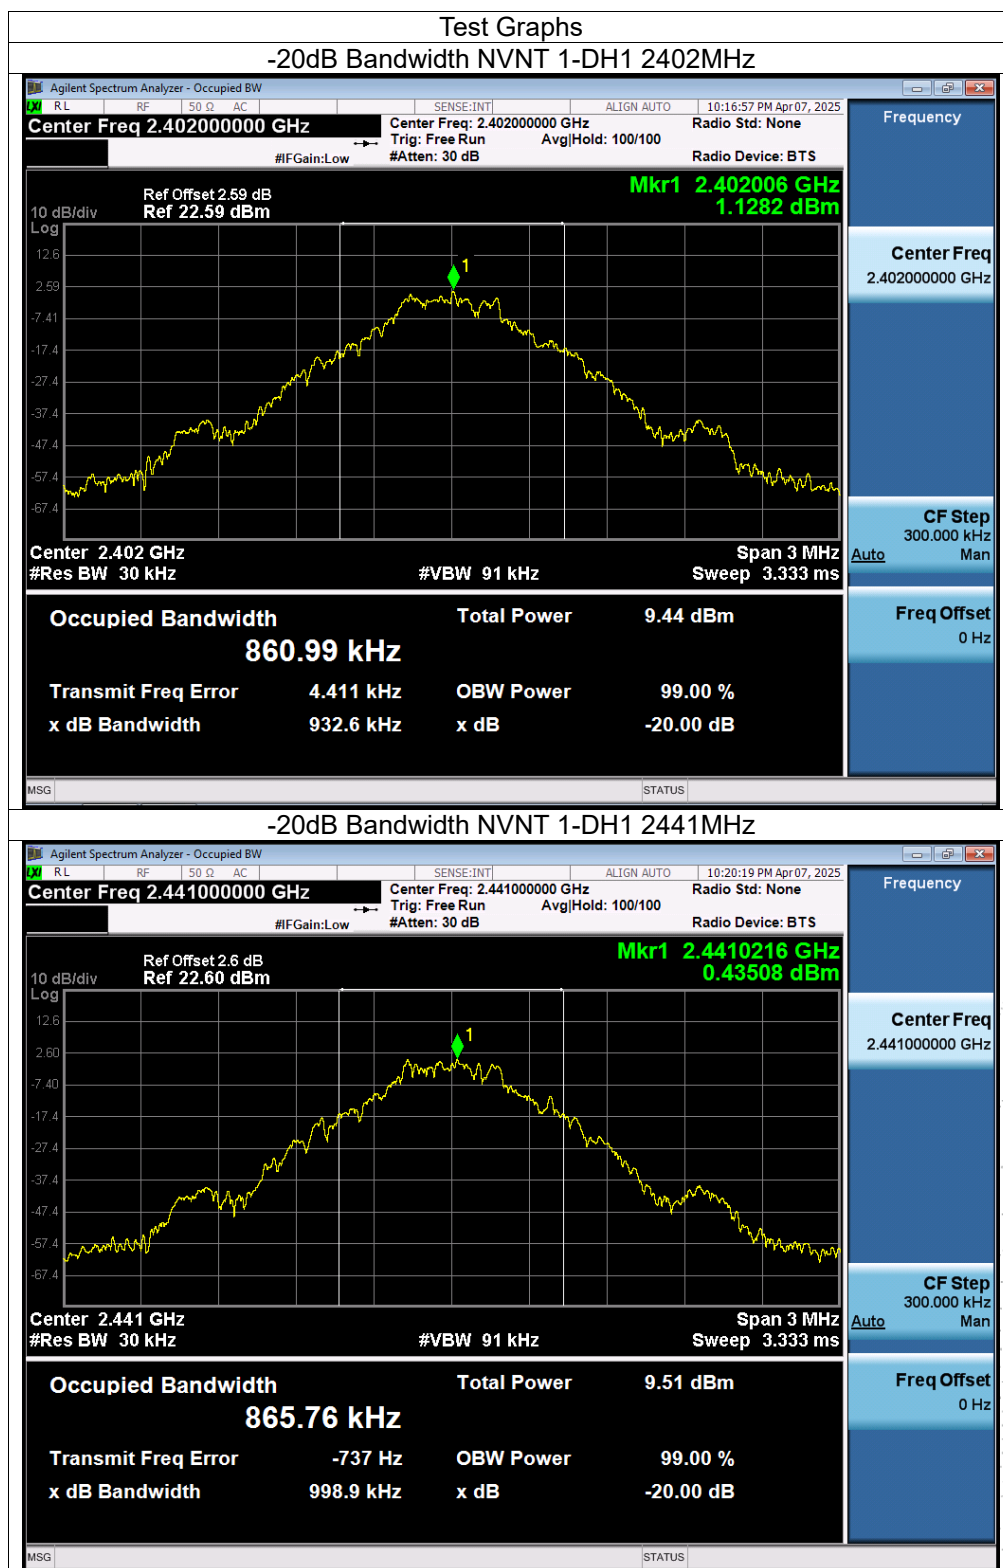

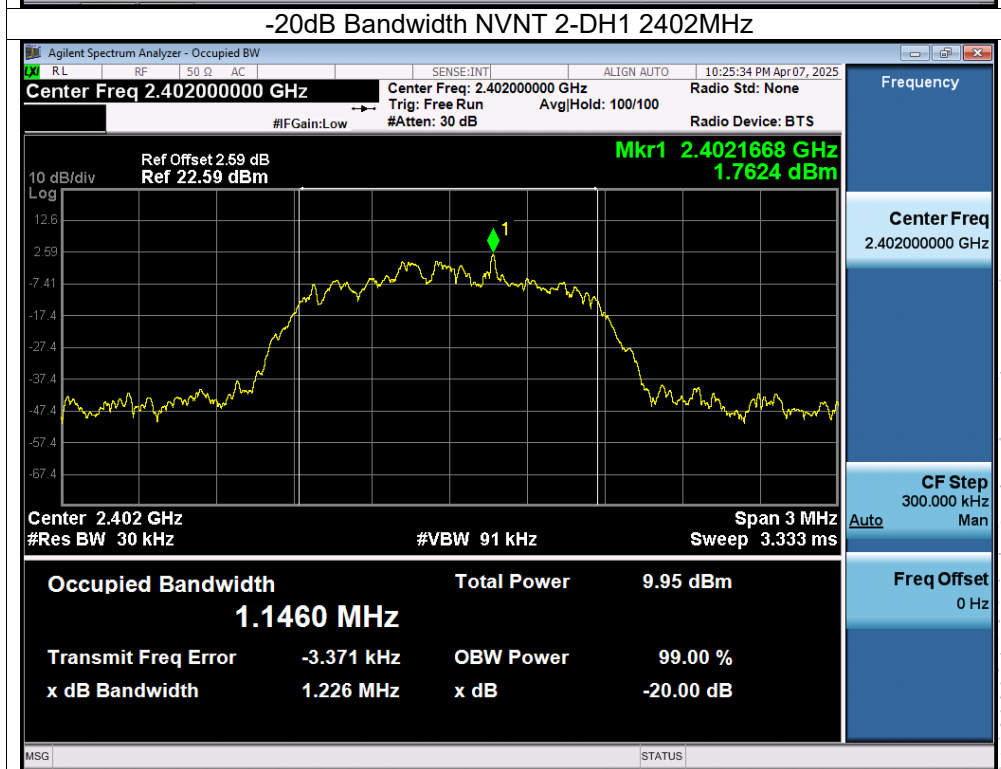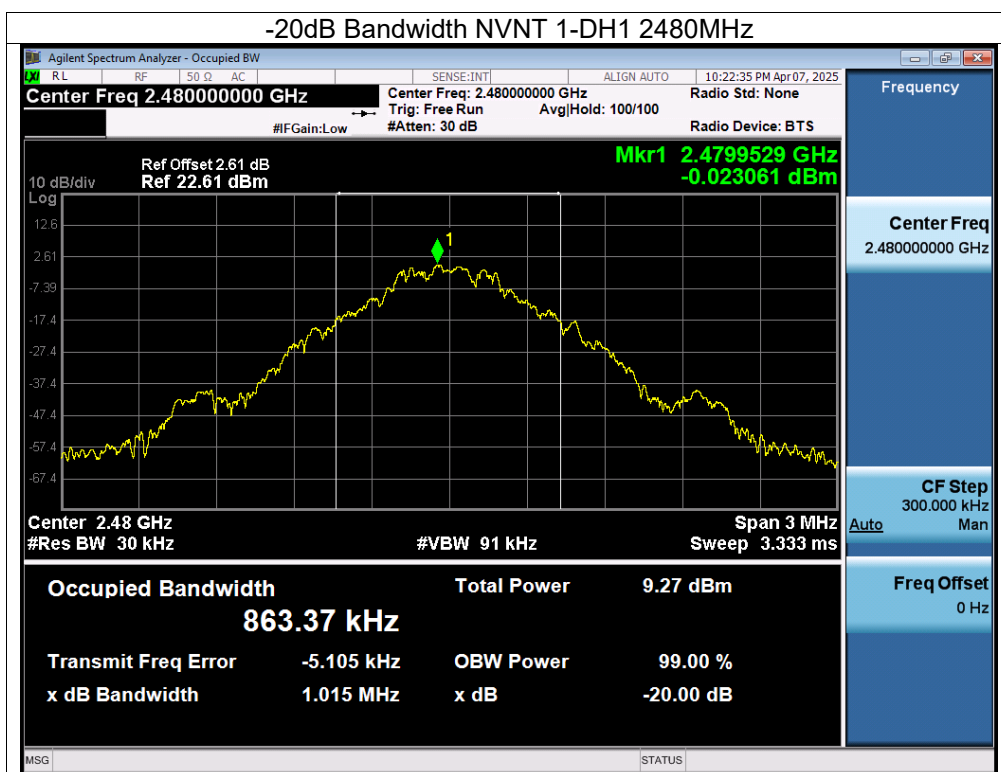

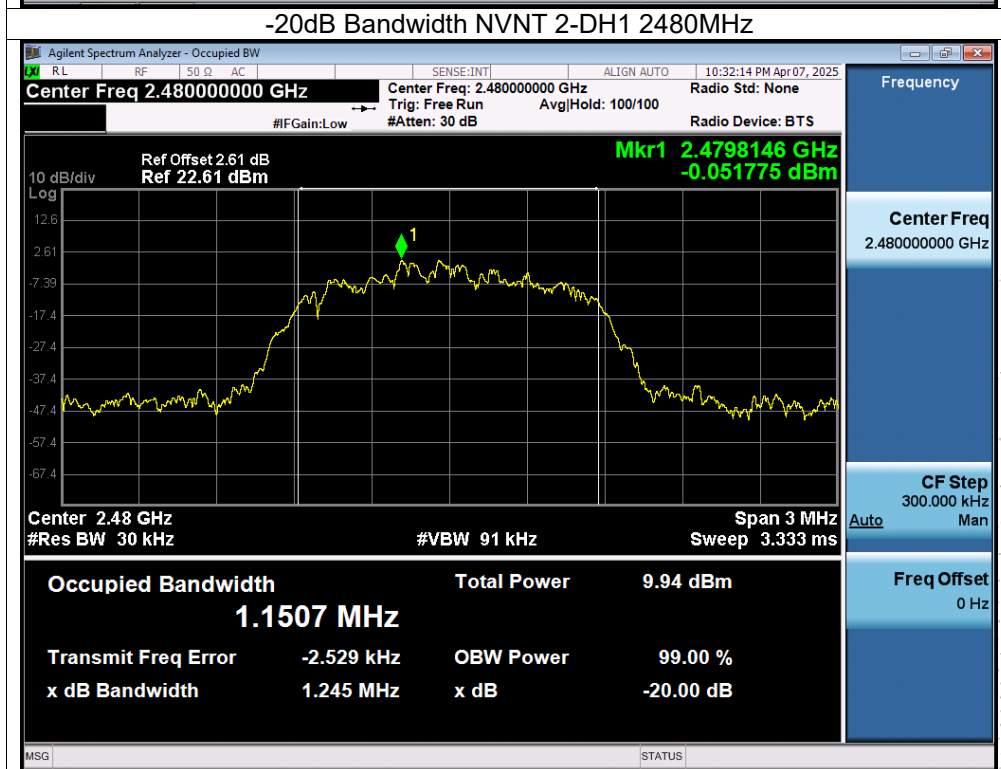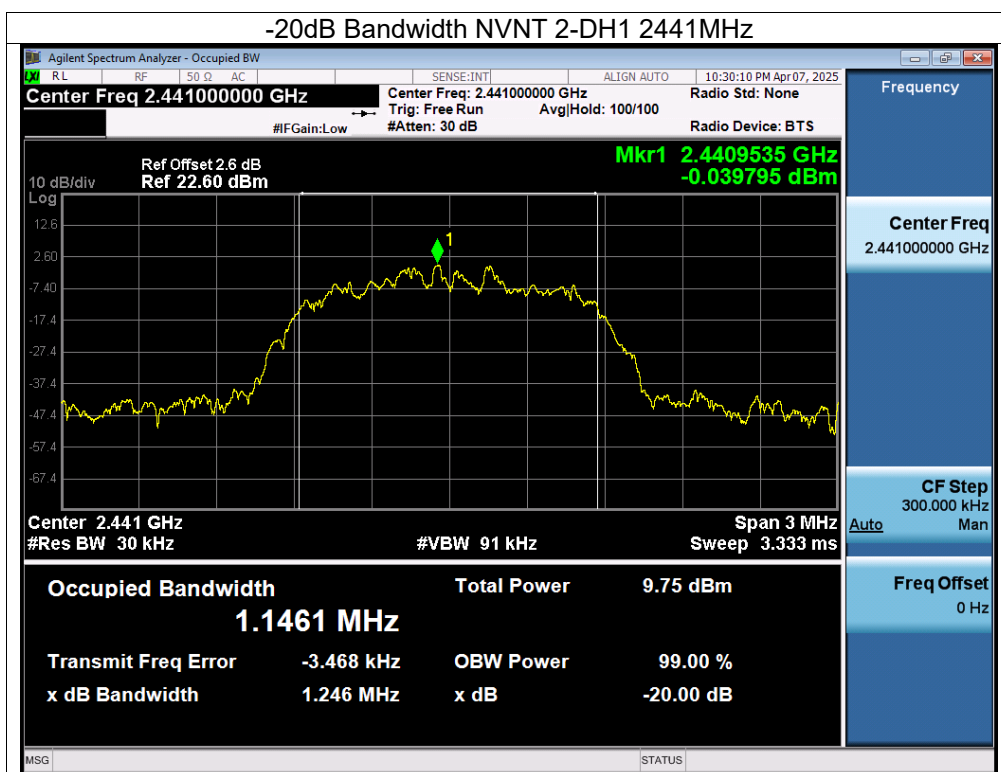

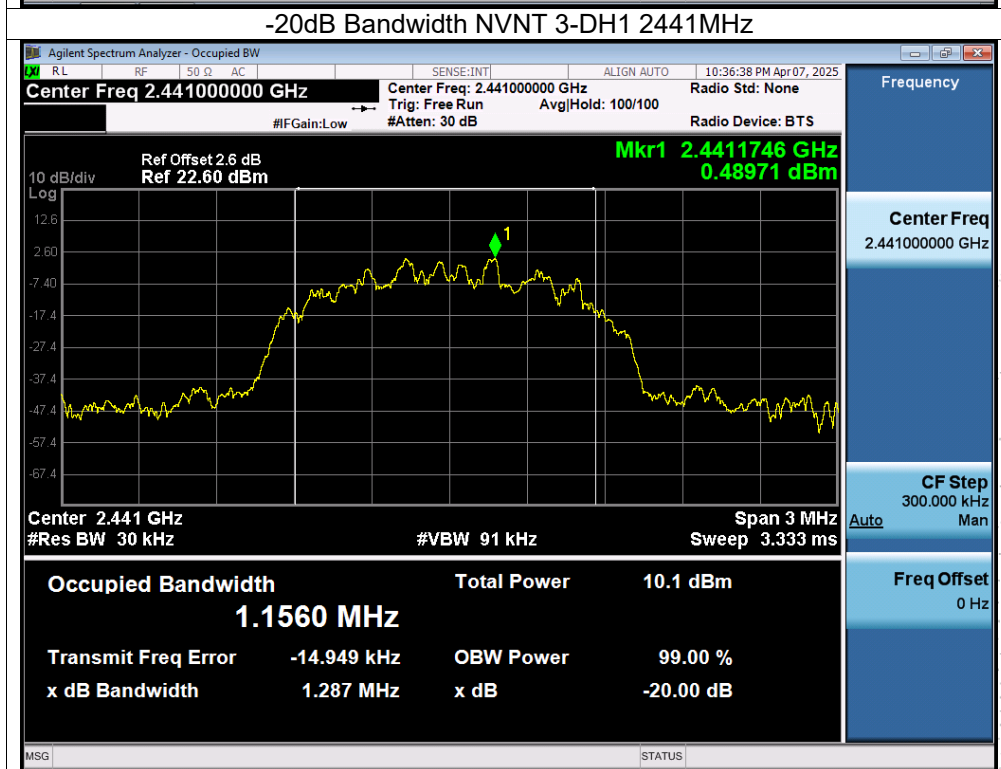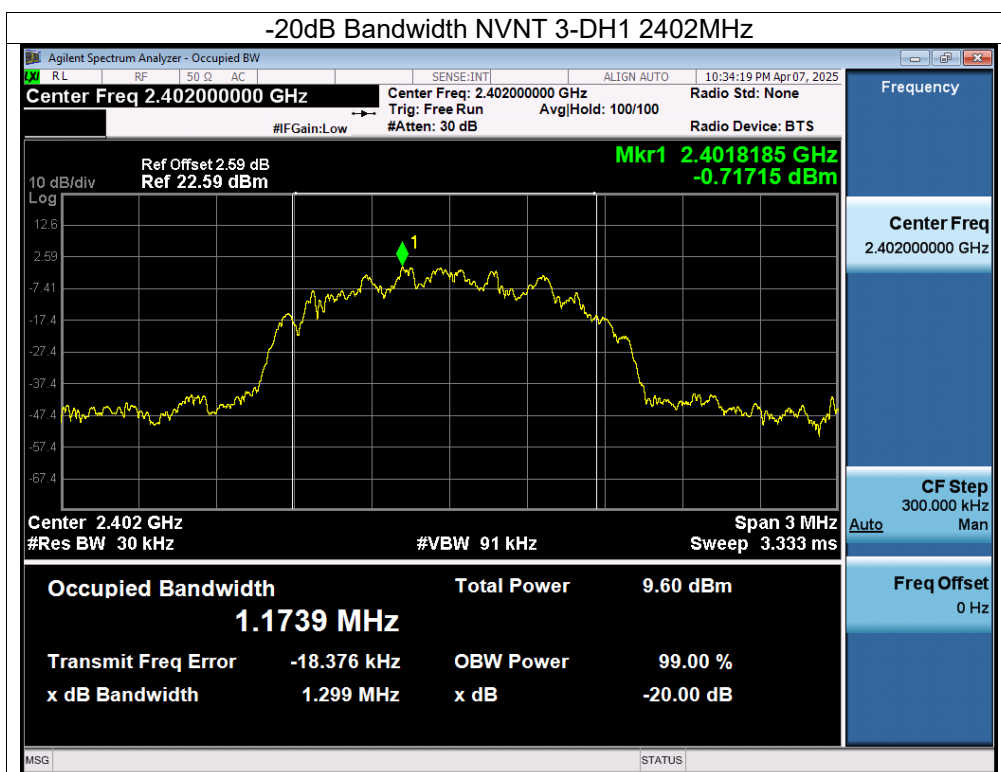

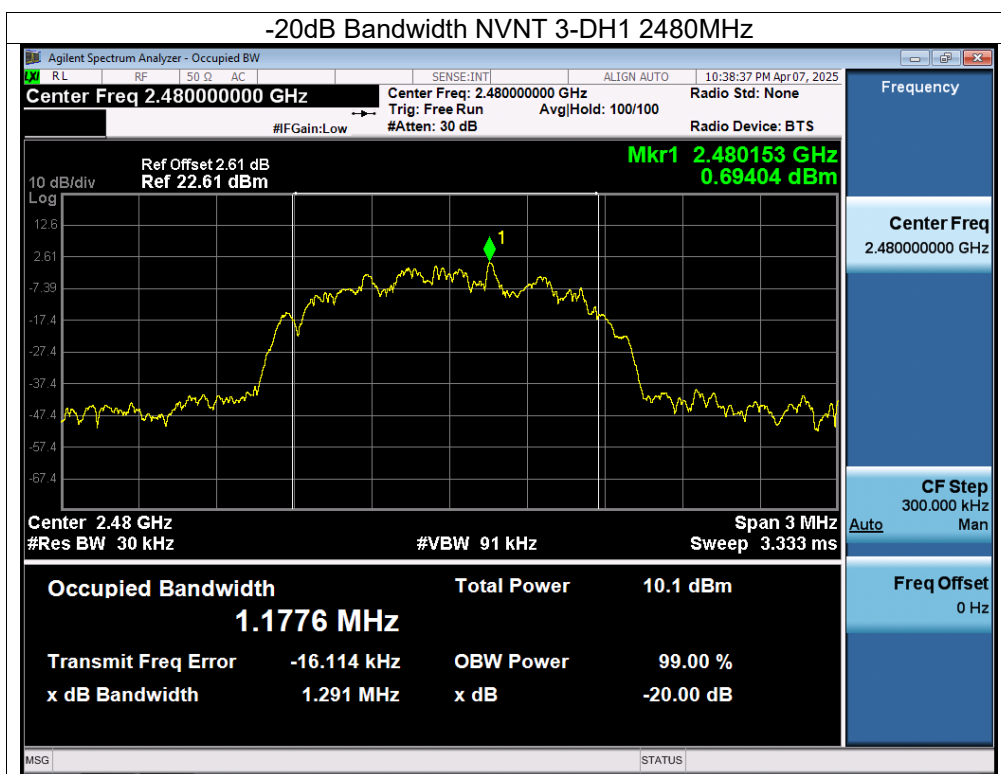

11. Maximum Peak Output Power

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS


11.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



11.4 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage :	DC 7.6V


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	3.81	21	Pass
NVNT	1-DH1	2441	4.05	21	Pass
NVNT	1-DH1	2480	4.11	21	Pass
NVNT	2-DH1	2402	4.98	21	Pass
NVNT	2-DH1	2441	5.19	21	Pass
NVNT	2-DH1	2480	5.23	21	Pass
NVNT	3-DH1	2402	5.27	21	Pass
NVNT	3-DH1	2441	5.60	21	Pass
NVNT	3-DH1	2480	5.39	21	Pass

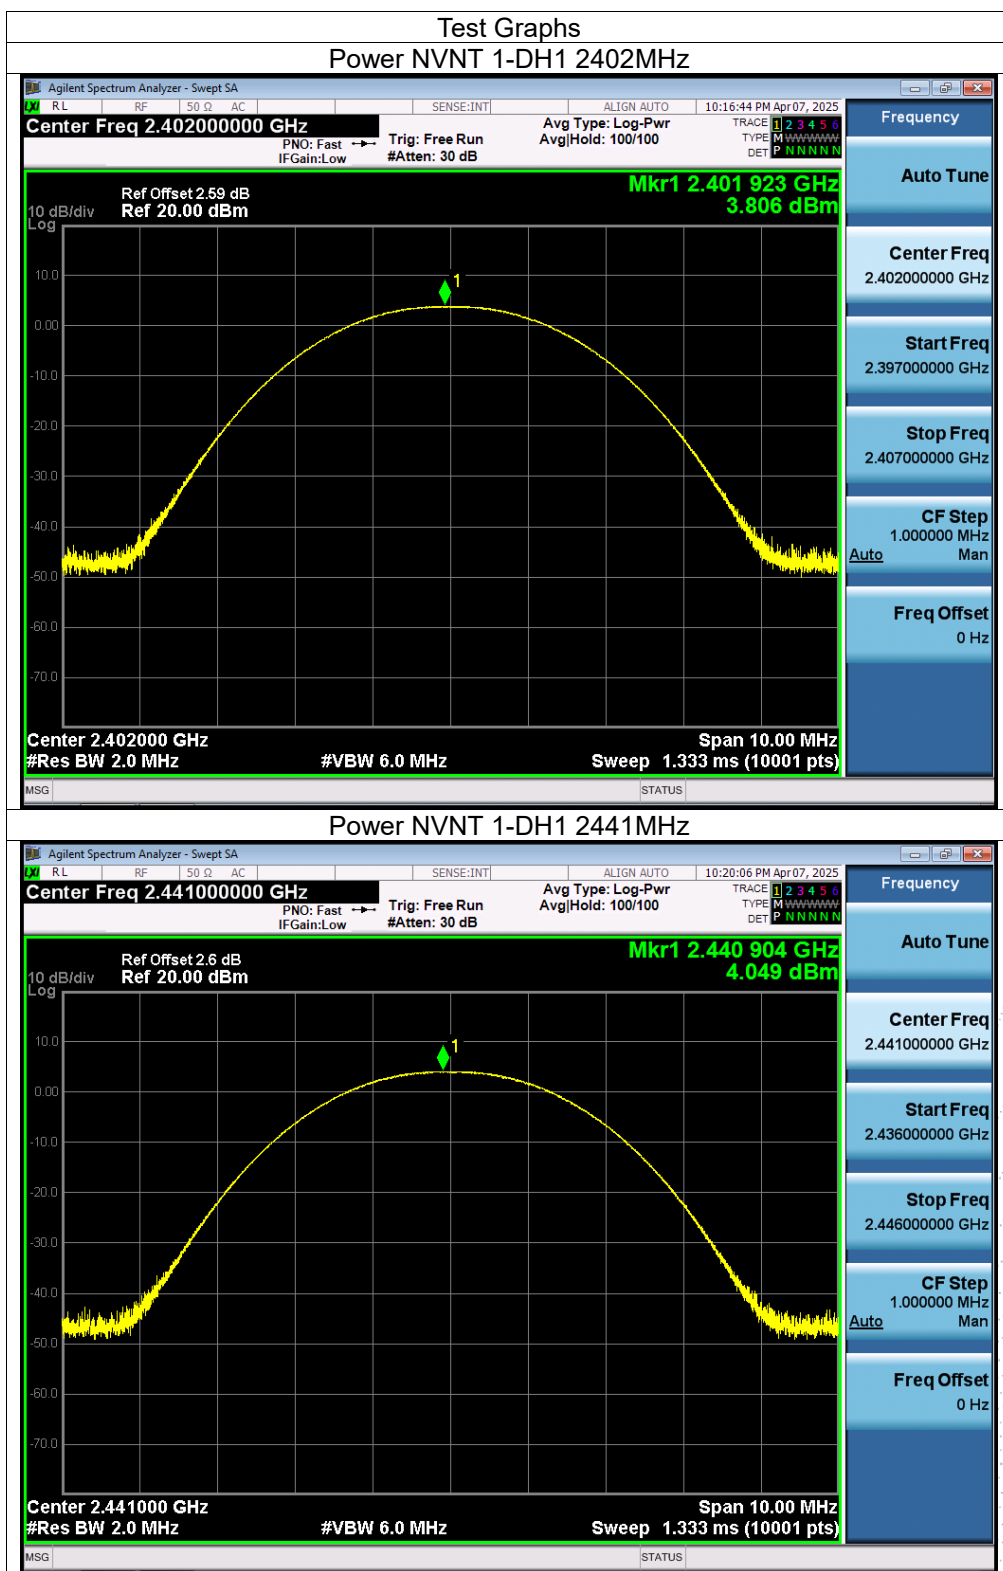

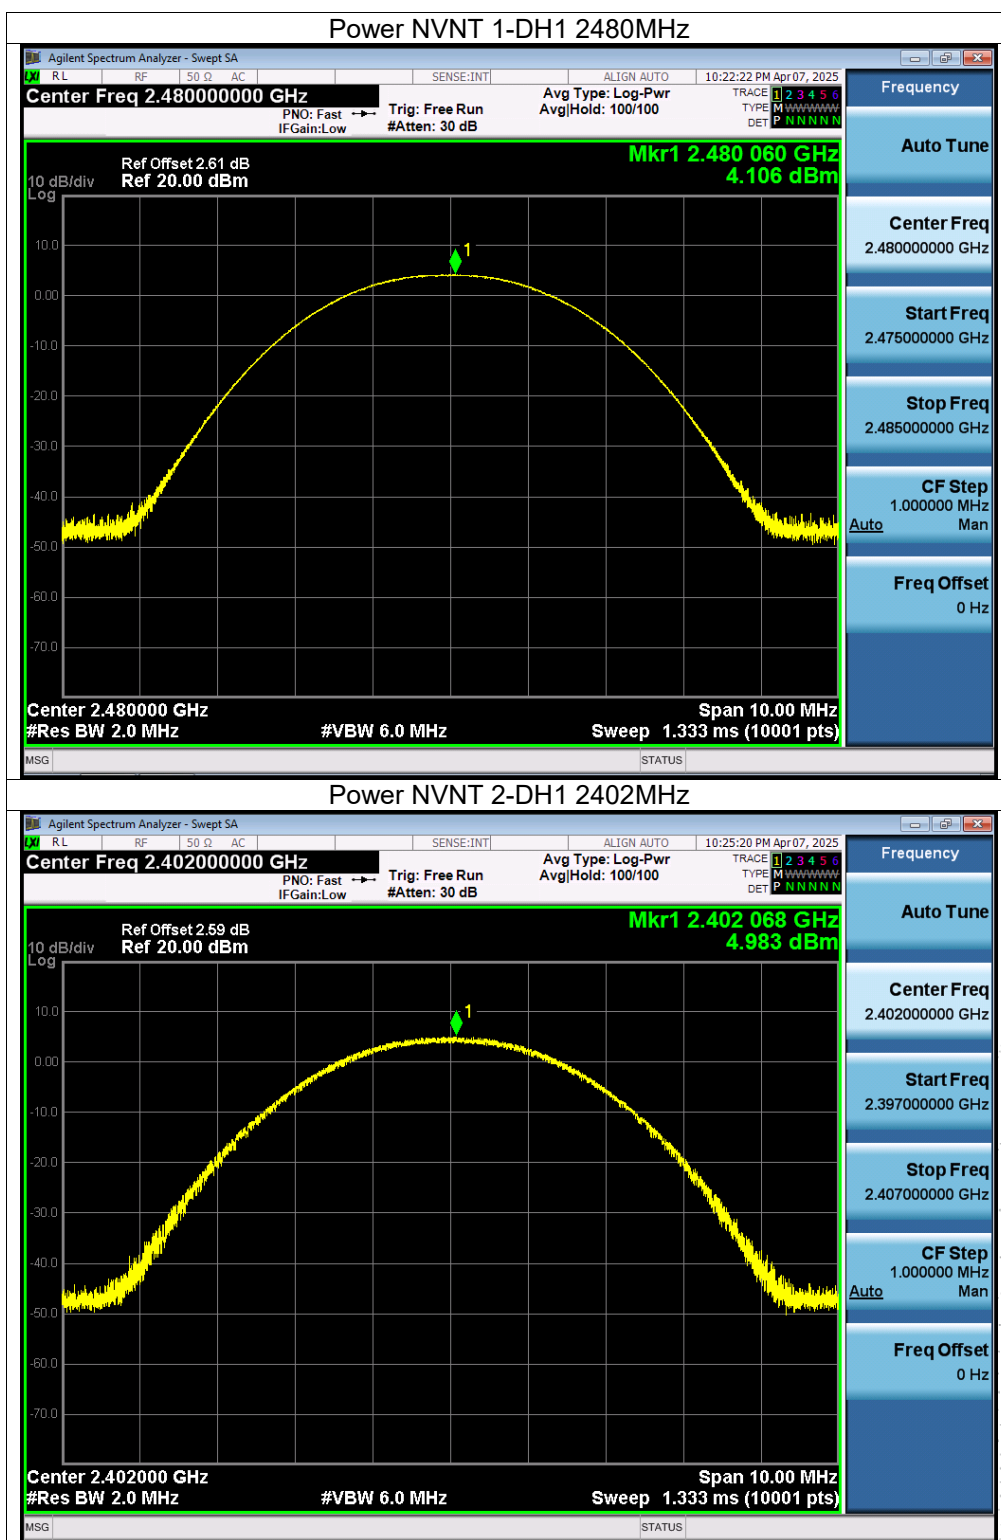

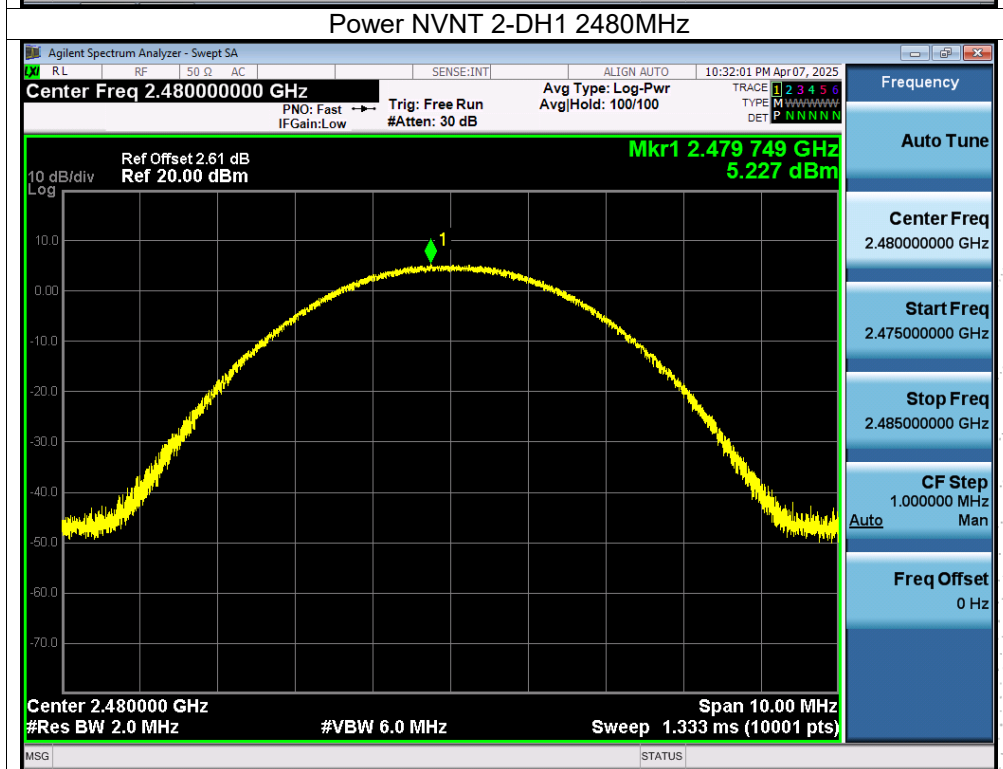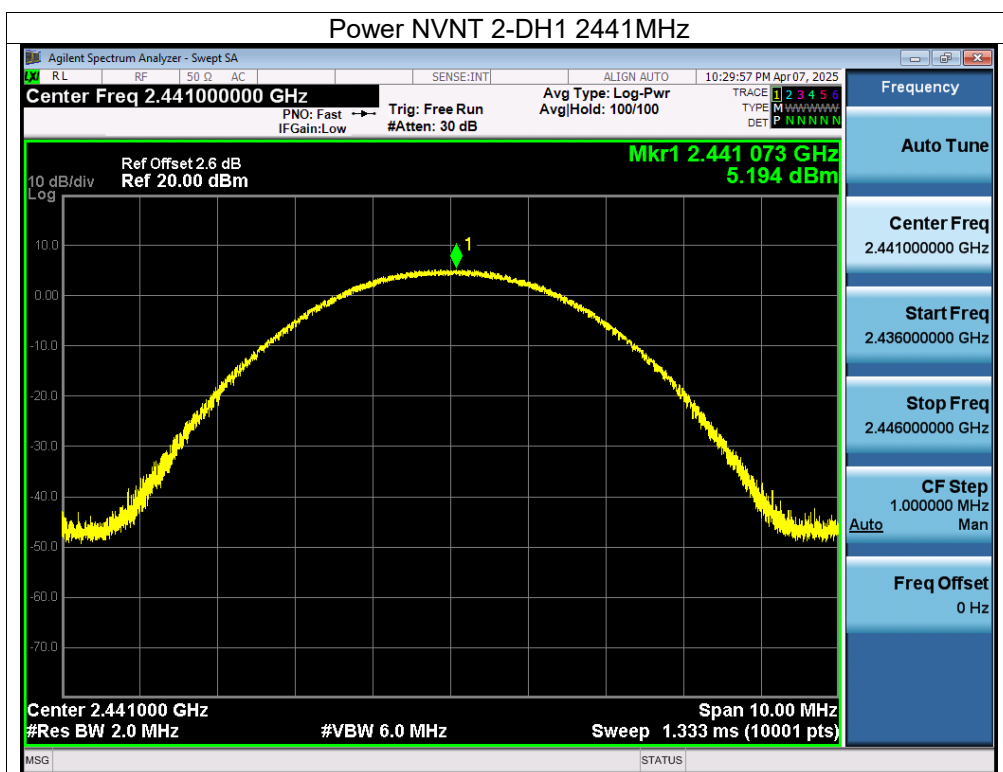


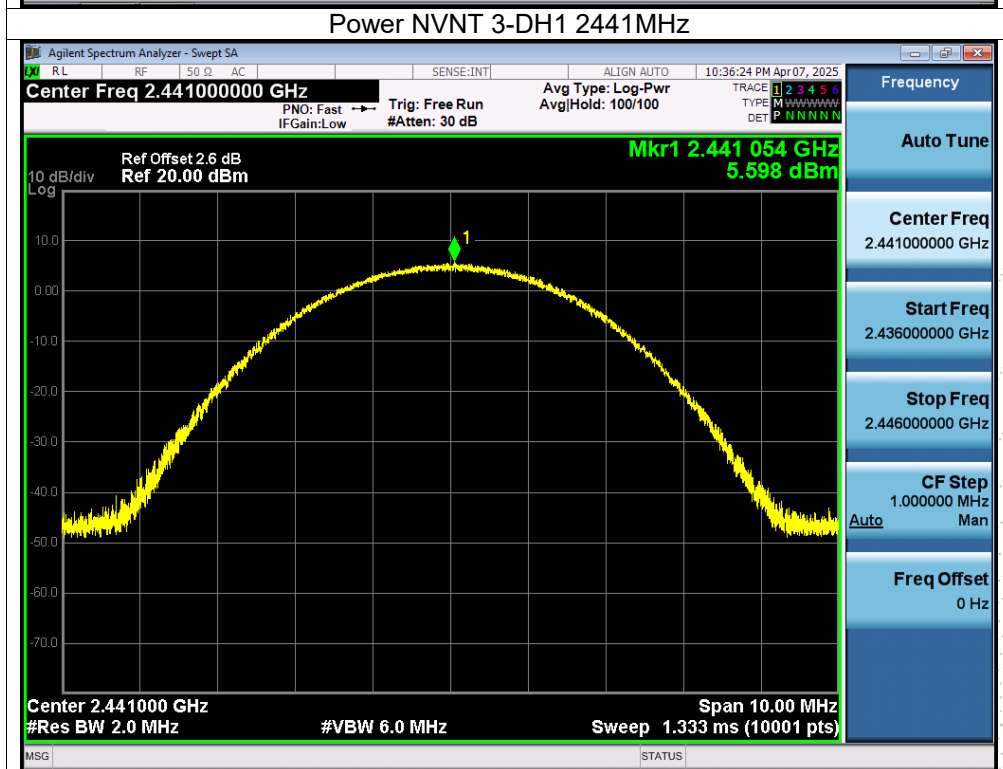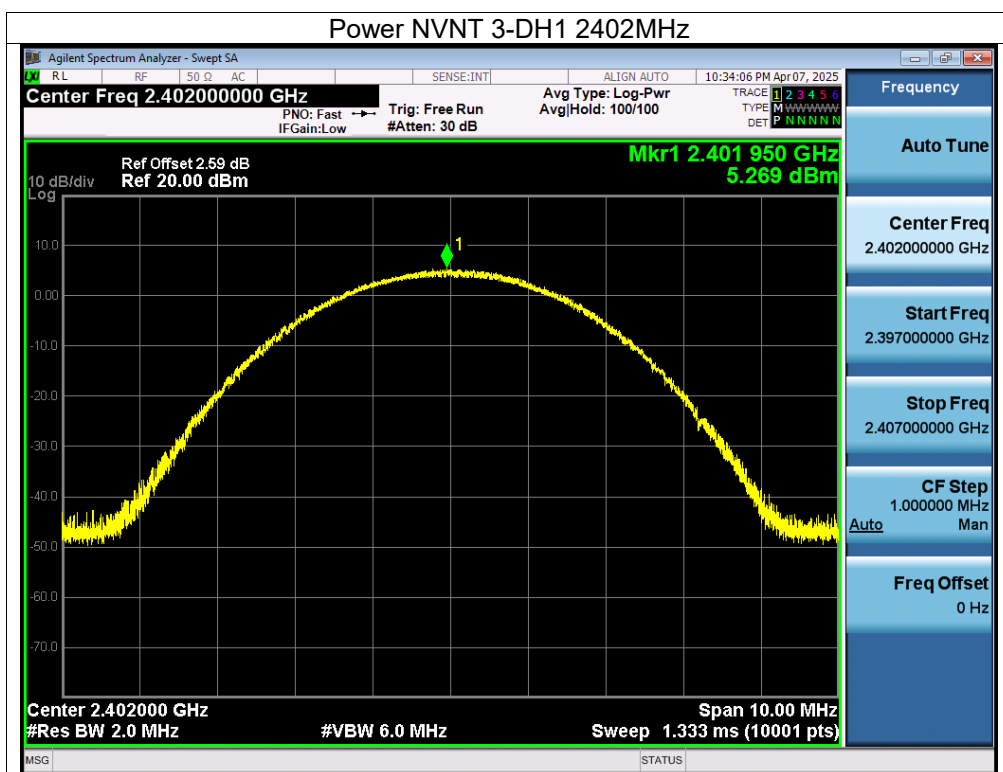

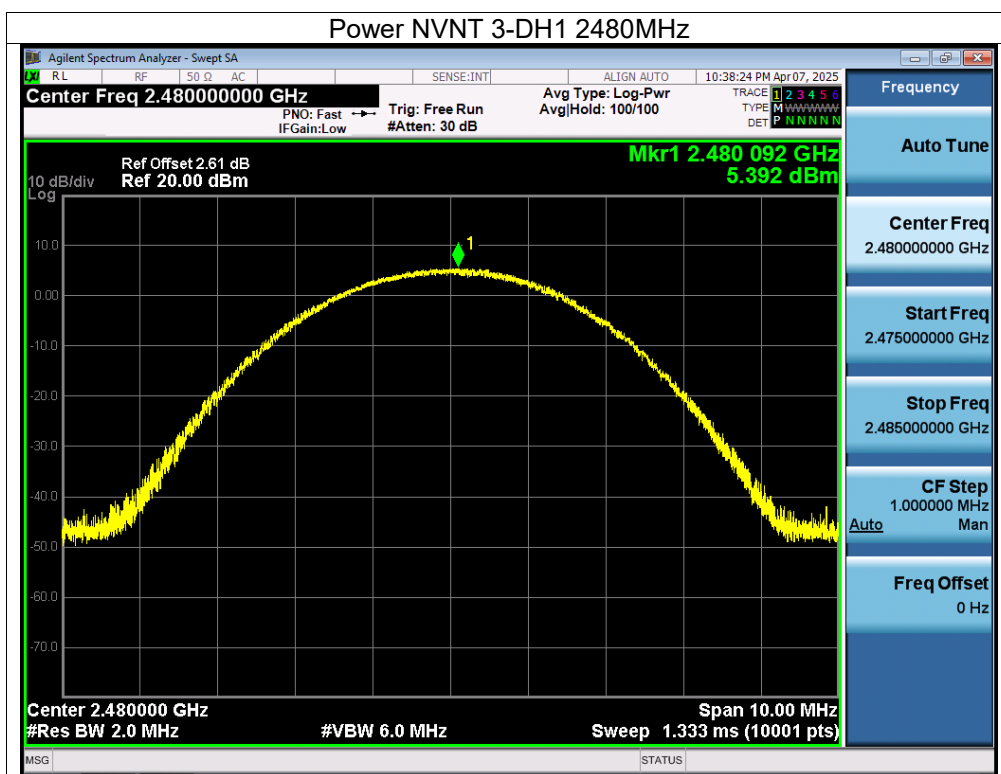

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup

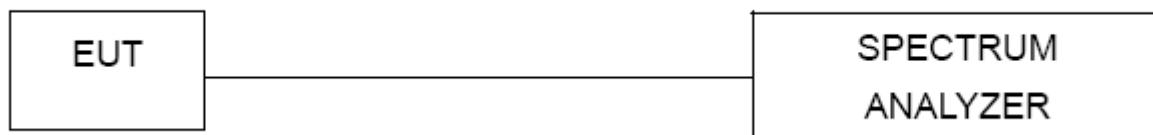

12.2 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.



12.3 Test procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



12.4 Test Result


Mode	Test Channel	Separation (MHz)	Limit(MHz)	Result
1-DH1	Low	0.996	0.622	PASS
1-DH1	Middle	1.000	0.666	PASS
1-DH1	High	1.002	0.677	PASS
2-DH1	Low	1.000	0.817	PASS
2-DH1	Middle	1.006	0.831	PASS
2-DH1	High	0.998	0.830	PASS
3-DH1	Low	1.004	0.866	PASS
3-DH1	Middle	1.004	0.858	PASS
3-DH1	High	1.002	0.861	PASS

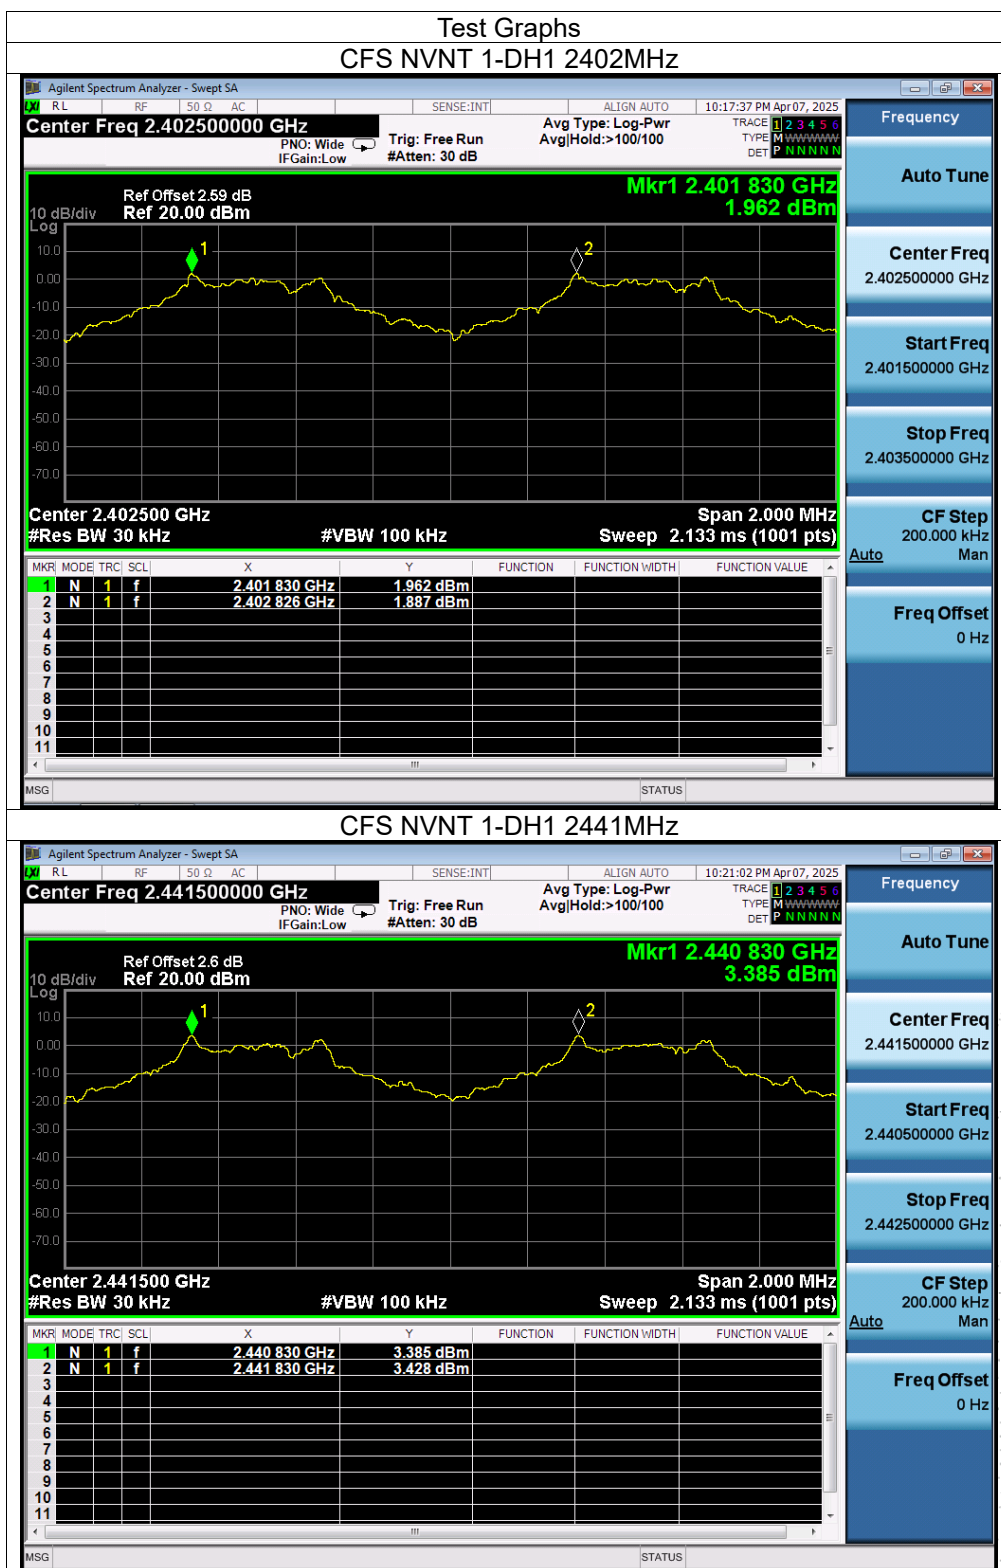

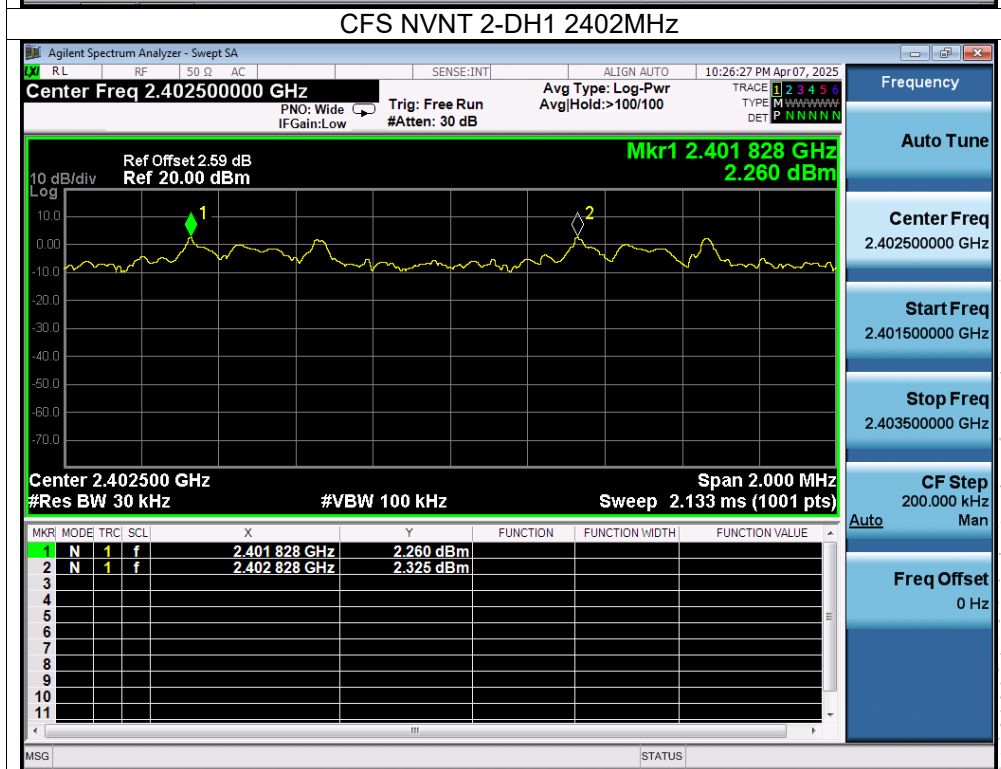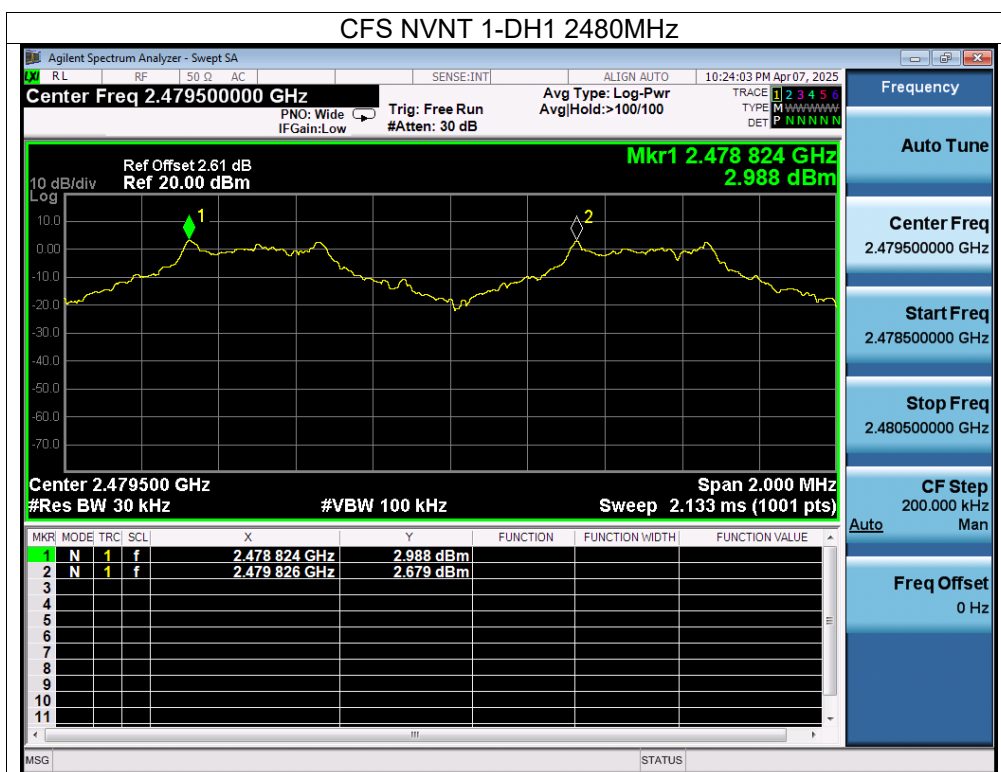

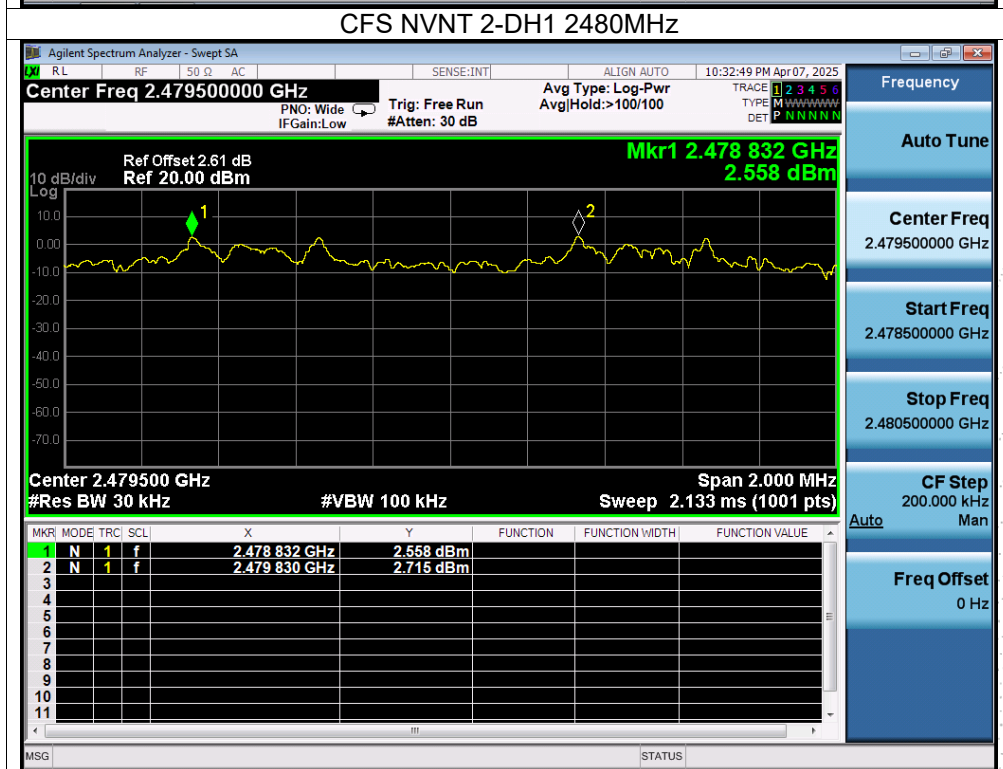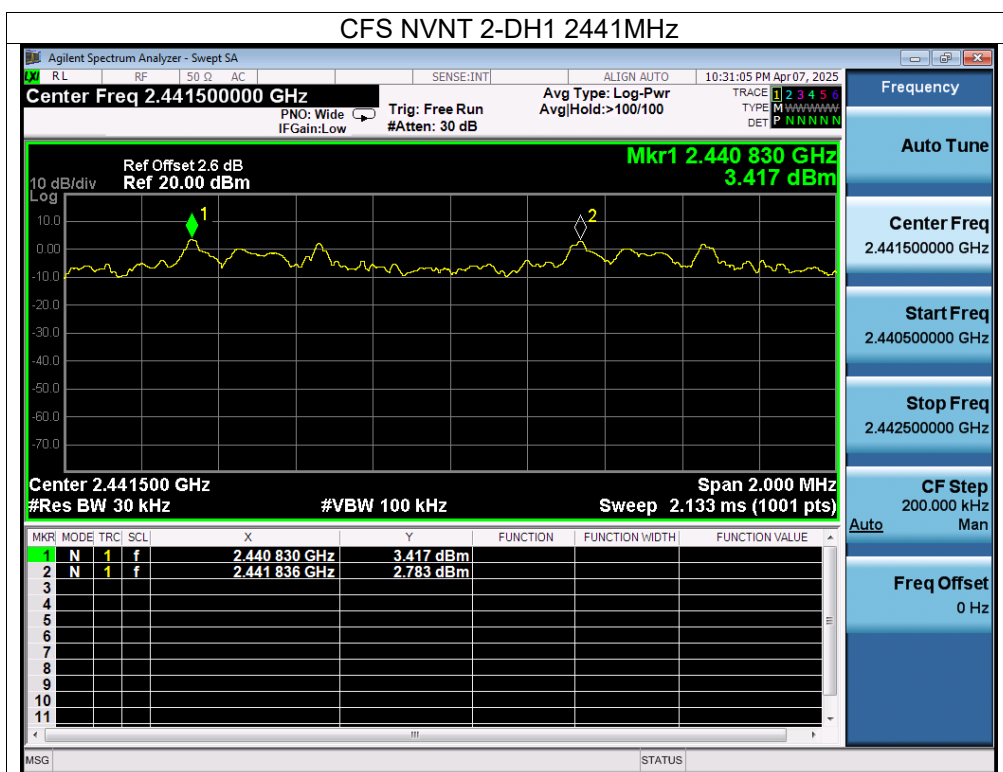

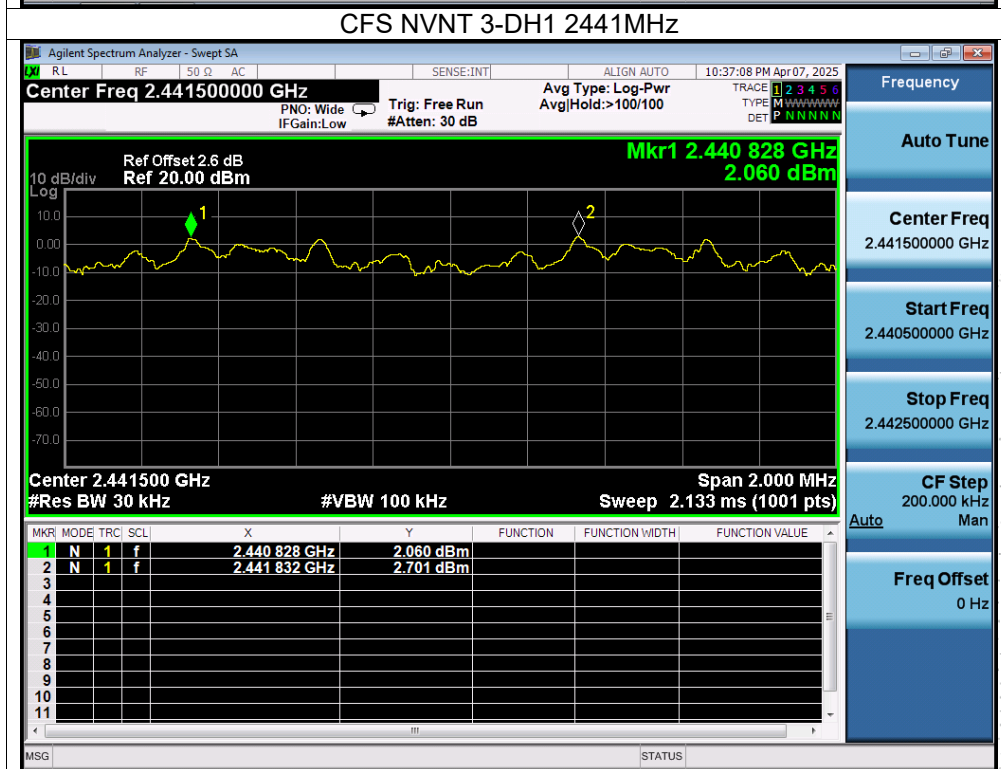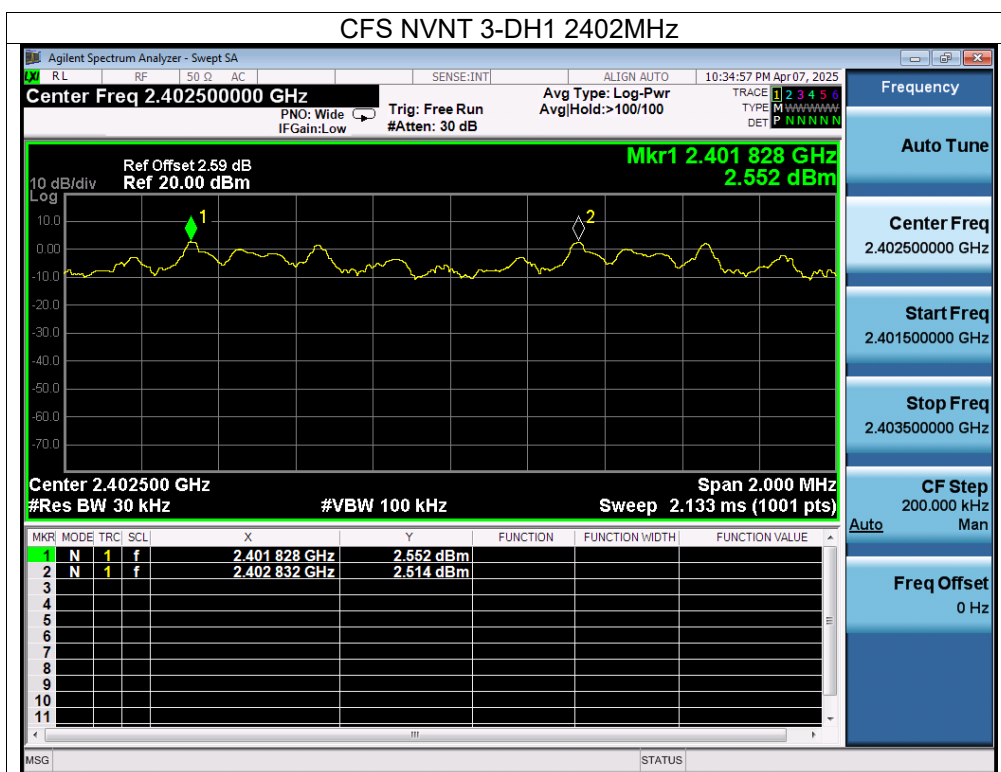

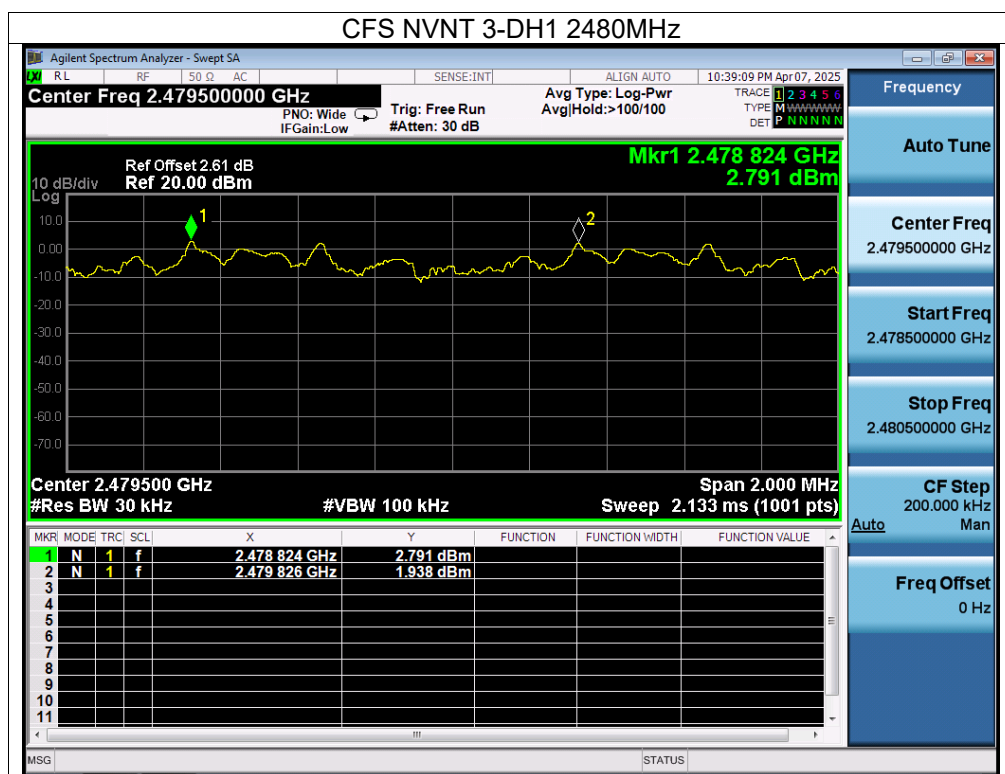

13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup



13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.4 Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

