

Test Report

19-1-0055004T02a-C1**Number of pages:** 36 **Date of Report:** 2020-Aug-06**Testing company:** CETECOM GmbH
Im Teelbruch 116
45219 Essen Germany
Tel. + 49 (0) 20 54 / 95 19-0
Fax: + 49 (0) 20 54 / 95 19-150 **Applicant:** AEV SPOL. S R.O.**Test Object / Tested Device(s):** Wireless sensor part, wireless Seat Belt Reminder - car unit**FCC ID:** 2AVXWWBRC001 **ISED:** 25953-WSBRC001**Testing has been carried out in accordance with:** **Title 47 CFR, Chapter I FCC Regulations, Subchapter A**
Subpart C: §15.247 (DTS) ,

RSS-247, Issue 2 (DTS)
RSS-Gen., Issue 5

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".**Tested Technology:** Bluetooth Low Energy**Test Results:** **The EUT complies with the requirements in respect of all parameters subject to the test.**
The test results relate only to devices specified in this document**Signatures:**

Dipl.-Ing. Markus Ridder
Managing Director (COO)
Authorization of test report

M.Sc. Patrick Marzotko
Test manager
Responsible of test report

Table of Contents

Table of Annex.....	3
1.1 Disclaimer and Notes.....	4
1.1. Summary of Test Results	5
1.2. Summary of Test Methods	5
2.1 Identification of the Testing Laboratory.....	6
2.2 General limits for environmental conditions.....	6
2.3 Test Laboratories sub-contracted.....	6
2.4 Organizational Items	6
2.5 Applicant's details	6
2.6 Manufacturer's details	6
2.7 EUT: Type, S/N etc. and short descriptions used in this test report	7
2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	7
2.9 Connected cables	7
2.10 Software.....	8
2.11 EUT set-ups	9
2.12 EUT operation modes.....	9
3.1 General Data of Main EUT as Declared by Applicant.....	10
3.2 Detailed Technical data of Main EUT as Declared by Applicant	10
3.3 Modifications on Test sample.....	10
4.1 Duty-Cycle	11
4.2 Peak output power (Sweep).....	12
4.3 Power spectral density	14
4.4 Minimum Emission Bandwidth 6 dB.....	16
4.5 Occupied Channel Bandwidth 99%.....	18
4.6 Emissions in non-restricted frequency bands.....	20
4.7 Radiated field strength emissions below 30 MHz	22
4.8 Radiated field strength emissions 30 MHz – 1 GHz.....	26
4.9 Radiated field strength emissions above 1 GHz	28
4.10 Radiated Band-Edge emissions	30
4.11 Results from external laboratory	32
4.12 Opinions and interpretations	32

Table of Annex

Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_19_1_0055004T02a_A1	61
Annex 2	Internal photographs of EUT	please refer to External photographs	--
Annex 3	External photographs of EUT	CETECOM_19_1_0055004T02a_A3	8
Annex 4	Test set-up photographs	CETECOM_19_1_0055004T02a_A4	6

The listed attachments are separate documents.

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.1. Summary of Test Results

The EUT integrates a BTLE transmitter. Other implemented wireless technologies were not considered within this test report.

Test case	Reference Clause FCC <input checked="" type="checkbox"/>	Reference Clause ISED <input checked="" type="checkbox"/>	Page	Remark	Result
Duty-Cycle	§15.35(c)	RSS-Gen Issue 5, §8.2	11		NP
Minimum Emission Bandwidth 6 dB	§15.247 5.2(a)	RSS-247, § 5.2(a) RSS-Gen Issue 5,; § 6.7	14		PASSED
Occupied Channel Bandwidth 99%	2.1049(h)	RSS-Gen Issue 5, § 6.7	15		PASSED
Peak output power (Sweep)	§15.247(b)(3)	RSS-247, § 5.4(d)	12		PASSED
Transmitter Peak output power radiated	§15.247(b)(4)(c)(i)	RSS-247, § 5.4(d)	--		NP
Emissions in non-restricted frequency bands	§15.247(d)	RSS-247, § 5.5	16		PASSED
Radiated Band-Edge emissions	§15.205(b) §15.247(d)	RSS-Gen: Issue 5 §8.9, §8.10 RSS-247, § 5.5	24		PASSED
Power spectral density	§15.247(e)	RSS-247, § 5.2(b)	13		PASSED
Radiated field strength emissions below 30 MHz	§15.205(a) §15.209(a)	RSS-Gen: Issue 5 §8.9 Table 6	18		PASSED
Radiated field strength emissions 30 MHz – 1 GHz	§15.209 §15.247(d)	RSS-Gen: Issue 5 §8.9 Table 5 RSS-247, § 5.5	22		PASSED
Radiated field strength emissions above 1 GHz	§15.209(a) §15.247(d)	RSS-Gen: Issue 5: §8.9 Table 5+7 RSS-247, § 5.5	24		PASSED
AC-Power Lines Conducted Emissions	§15.207	RSS-Gen Issue 5: § 8.8, Table 4	--		NP

PASSED The EUT complies with the essential requirements in the standard.

FAILED The EUT does not comply with the essential requirements in the standard.

NP The test was not performed by the CETECOM Laboratory.

NT Not tested

N/A Not applicable

*The calculation of the measurement uncertainty shows compliance with the "maximum measurement uncertainties" of the tested standard and therefore for result evaluation the stated uncertainties will not be additionally added to the measured results.

1.2. Summary of Test Methods

Test case	Test method
Duty-Cycle	ANSI 63.10:2013, §11.6(b)
Minimum Emission Bandwidth 6 dB	ANSI C63.10:2013, §6.9.2, §11.8
Occupied Channel Bandwidth 99%	ANSI C63.10:2013, §6.9.3
Peak output power (Sweep)	ANSI C63.10:2013, §11.9
Power spectral density	ANSI C63.10:2013, §11.10
Emissions in non-restricted frequency bands	ANSI C63.10:2013, §11.11, §6.10.5
Radiated Band-Edge emissions	ANSI C63.10-2013; "Marker-Delta method", §6.10.5, §11.13
Transmitter Peak output power radiated	Result calculated with measured conducted RF-power value and stated/measured antenna gain for band of interest
Radiated field strength emissions below 30 MHz	ANSI C63.10-2013 §6.3, §6.4
Radiated field strength emissions 30 MHz- 1 GHz	ANSI C63.4-2014 §8.2.3, ANSI C63.10-2013 §6.3, § 6.5
Radiated field strength emissions above 1 GHz	ANSI C63.4-2014 §8.3, ANSI C63.10-2013 §6.3, § 6.6
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 §7, ANSI C63.10-2013 § 6.2

And reference also to Test methods in KDB558074

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Volker Wittmann
Accreditation scope:	DAkkS Webpage
Test location:	CETECOM GmbH; Im Teelbruch 116 ;45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:

2.4 Organizational Items

Order No.:	4
Responsible test manager:	B.Sc. Patrick Marzotko
Responsible for test report	Dipl.-Ing. Ninovic Perez
Receipt of EUT:	2020-Jul-06
Date(s) of test:	2019-Jul-06 – 2019-Jul-08
Version of template:	14.1

2.5 Applicant's details

Applicant's name:	AEV spol. s r.o.
Address:	Jozky Silného 2783 767 01 Kromeríz Czech Republic
Contact Person:	Milan Trubelik
Contact Person's Email:	trubelik@aev.cz

2.6 Manufacturer's details

Manufacturer's name:	Please refer to applicant's details
Address:	Please refer to applicant's details

2.7 EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	PMT Sample No.	EUT	Type	S/N	HW status	SW status
EUT 1	19-1-00550S104_C01	wireless Seat Belt Reminder - car unit	wireless sensor part	tbd	036	165
EUT 2	19-1-00550S167_C01	wireless Seat Belt Reminder - car unit	wireless sensor part	tbd	037	165
EUT 3	19-1-00550S169_C01	wireless Seat Belt Reminder - car unit	wireless sensor part	tbd	037	165

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

Short description*)	PMT Sample No.	Auxiliary Equipment	Type	S/N	HW status	SW status
AE 1	19-1-00550S45_C01	TTL-232RG-VSW3V3-WE	USB to TTL Serial Cable	--	--	--
AE 2	--	Laptop	DELL			

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.9 Connected cables

Short description*)	PMT Sample No.	Cable	Type	S/N	HW status	SW status
CAB 1	19-1-00550S129_C01	Power Cable	--	--	--	--

*) CAB short description is used to simplify the identification of the connected cables in this test report.

2.10 Software

Via terminal tool TeraTerm installed on AE 3 NXP test mode terminal tool "frdmkw36_TAG_genfsk_conn_test_KW35" was used to set the right mode:

2.11 EUT set-ups

set-up no. *1)	Combination of EUT and AE *2)	Description
Set 1	EUT 1 (+ AE 1 + AE 2) + CAB 1	Used for Radiated measurements
Set 2	EUT 2 (+ AE 1 + AE 2) + CAB 1	Used for Radiated measurements
Set 3	EUT 3 (+ AE 1 + AE 2) + CAB 1	Used for Conducted measurements

*1) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

*2) AE 1 + AE 2 were only temporary used to setup right test mode via terminal tool.

2.12 EUT operation modes

EUT operating mode no.*)	Operating modes	Additional information
op. 1	BTLE_TX-Mode	With help of special test firmware TX-mode was set-up. We refer to applicants information/papers for details about necessary commands. According customer test mode “[5]: Continuous Modulated Transmission pseudo-random” was used for transmission tests with power setting 10

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Product name	wireless Seat Belt Reminder - car unit			
Kind of product	wireless sensor part			
Firmware	<input type="checkbox"/> for normal use	<input checked="" type="checkbox"/> Special version for test execution		
	<input type="checkbox"/> AC Mains			
	<input checked="" type="checkbox"/> DC Mains	12 VDC via CAB 1		
	<input type="checkbox"/> Battery			
EUT sample type	Pre-Production			
Interfaces/Ports	UART			
For further details refer Applicants Declaration & following technical documents				
For further details regarding radio parameters, please refer to Bluetooth Core Specification				

3.2 Detailed Technical data of Main EUT as Declared by Applicant

Frequency Band	2.4 GHz ISM Band (2400 MHz - 2483.5 MHz)	
Number of Channels (USA/Canada -bands)	40 (37 Hopping + 3 Advertising)	
Nominal Channel Bandwidth	1 MHz	
Type of Modulation Data Rate	<input checked="" type="checkbox"/> GFSK 1 Mbit / s	<input type="checkbox"/> GFSK 2 Mbit / s
	<input type="checkbox"/> GFSK 500 kbit / s	<input type="checkbox"/> GFSK 125 kbit / s
Other wireless options	<input type="checkbox"/> a/n/ac mode <input type="checkbox"/> b/g/n mode <input type="checkbox"/> Bluetooth EDR <input type="checkbox"/> Cellular transceiver	
Max. Conducted Output Power	-10.2 dBm	
EIRP Power (Calculated EIRP)	-10.2 dBm - 0.8 dBi = -1.0 dBm	
Antenna Type(s)	PCB	
Antenna Gain(s)	-0.8 dBi	
FCC label attached	No	
Test firmware / software and storage location	Via terminal tool TeraTerm installed on test laptop NXP test mode terminal tool "frdmkw36_TAG_genfsk_conn_test_KW35"	

3.3 Modifications on Test sample

Additions/deviations or exclusions	-
------------------------------------	---

4 Measurements

4.1 Duty-Cycle

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

The necessary duty-cycle correction factor is determined on nominal conditions on middle channel only. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

A special firmware program is used for test purposes. In opposite to normal operating mode a higher duty-cycle is set in order to facilitate the measurements. This is maximized at the extent possible.

The necessary duty-cycle correction factor is determined on nominal conditions on one channel in each operable frequency-band. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions. The Duty-Cycle was constant, means without variations.

Formula to calculate Duty-Cycle:

Duty cycle calculations: $x = \frac{TX_{ON}}{(TX_{ON} + TX_{OFF})}$	Duty cycle factor: DC = $\text{Regarding power: } 10 * \log(\frac{1}{x}) \text{ dB}$
	$\text{Regarding field strength: } 20 * \log(\frac{1}{x}) \text{ dB}$

- The results were corrected in order to evaluate for worst-case result each time when average values are necessary for example average radiated emissions or similar
- No correction necessary: Duty-Cycle > 98%

4.1.1 Measurement Location

Test site


120910 - Radio Laboratory 1 (TS 8997)

4.2 Peak output power (Sweep)

4.2.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to power meter (3) or spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings.

Schematic:

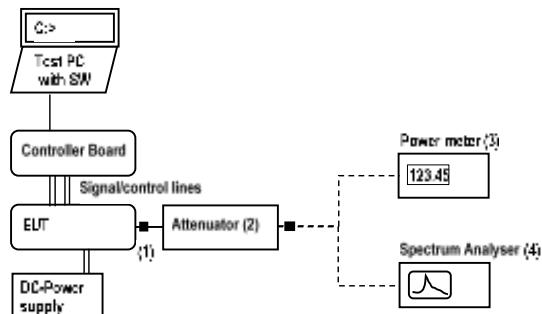

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

Test method	Maximum peak conducted output power(RBW = DTS-bandwidth of the signal)
Remarks	

The measurement was performed in non-hopping transmission mode with the carrier set to lowest/middle and highest channel.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.
Different modulation characteristics have been checked, e.g. data rates which EUT can operate

4.2.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
-----------	---------------------------------------

4.2.3 Limit

Frequency Range [MHz]	Limit [W]	Limit [dBm]	Detector	RBW / VBW [MHz]
2400 - 2483.5	1	30	MaxPeak	3 / 10

4.2.4 Result

Mode	Channel	Frequency [MHz]	Max Peak Power [dBm]	Result
GFSK 1Mbps PWR 10	0	2402	-10.2	PASS
GFSK 1Mbps PWR 10	19	2440	-10.6	PASS
GFSK 1Mbps PWR 10	39	2480	-10.5	PASS


Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

4.3 Power spectral density

4.3.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

Schematic:

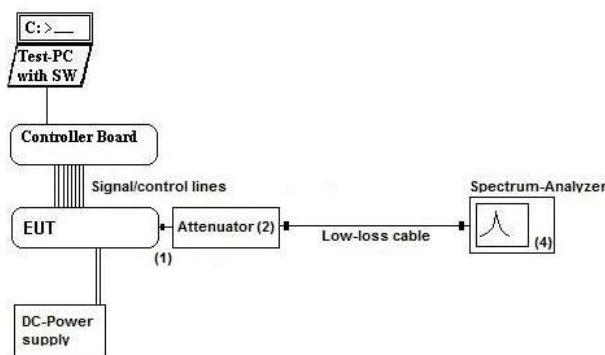

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

Test method	AVG PSD Method
Remarks	--

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

4.3.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
-----------	---------------------------------------

4.3.3 Limit

Limit [dBm] @ 3 kHz	Detector [MaxHold]	RBW / VBW [kHz]
<= 8	Peak	3 / 10

4.3.4 Result

Mode	Channel	Frequency [MHz]	PSD [dBm] @ 3kHz	Result
GFSK 1Mbps PWR 10	0	2402	-10.310	PASS
GFSK 1Mbps PWR 10	19	2440	-10.755	PASS
GFSK 1Mbps PWR 10	39	2480	-10.682	PASS


Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

4.4 Minimum Emission Bandwidth 6 dB

4.4.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

Schematic:

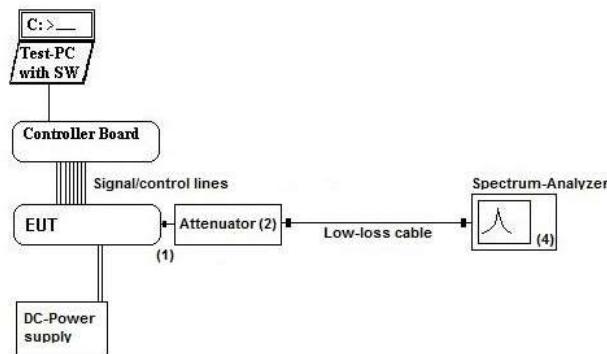

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

4.4.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
-----------	---------------------------------------

4.4.3 Limit

Limit [kHz]	Detector [MaxHold]	RBW / VBW [kHz]
>= 500	MaxPeak	100 / 300

4.4.4 Result

Mode	Channel	Frequency [MHz]	6 dB bandwidth [MHz]	Result
GFSK 1Mbps PWR 10	0	2402	0.752476	PASS
GFSK 1Mbps PWR 10	19	2440	0.752476	PASS
GFSK 1Mbps PWR 10	39	2480	0.752476	PASS


Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

4.5 Occupied Channel Bandwidth 99%

4.5.1 Description of the general test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

Schematic:

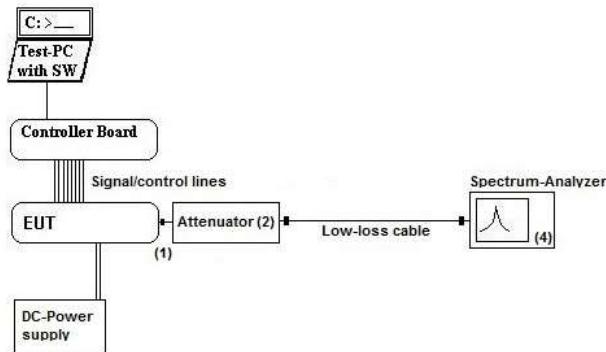

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

4.5.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
-----------	---------------------------------------

4.5.3 Limit

When the occupied bandwidth limit is not stated in the applicable reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

4.5.4 Result

Mode	Channel	Frequency [MHz]	99% Occupied bandwidth [MHz]
GFSK 1Mbps PWR 10	0	2402	0.660000
GFSK 1Mbps PWR 10	19	2440	0.660000
GFSK 1Mbps PWR 10	39	2480	0.660000


Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

4.6 Emissions in non-restricted frequency bands

4.6.1 Description of the general conducted test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

Schematic:

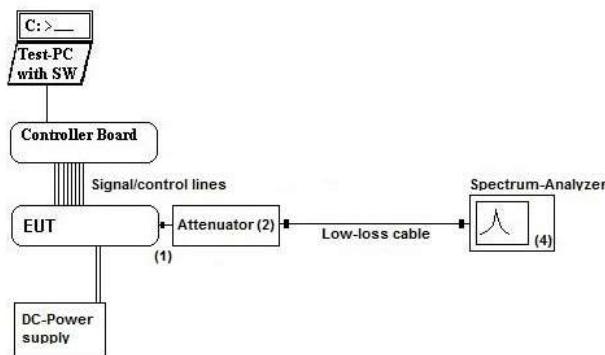

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Measurement is made using Rohde & Schwarz TS8997 test system.

The measurements were performed with the RBW set to 100 kHz & maximum carrier level was indicated with MAX-Hold positive peak detector using markers. Then a frequency line was set 20 or 30 dB below this measured maximum carrier level.

Then using RBW 100 kHz & spectrum analyzer span from 150 kHz to 25 GHz in three steps spurious emissions were measured with MAX-Hold positive peak detector.

The sweep time set as long as necessary to capture the full signal burst per hopping channel. The burst on-period is captured by setting appropriate markers in the rising and falling edges.

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions. Different modulation characteristics have been checked e.g. data rates which EUT can operate.

4.6.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
-----------	---------------------------------------

4.6.3 Limit

Frequency Range [MHz]	Limit [dBc]
0.15 – 25000	-20 / -30

4.6.4 Result

Maximum Level Peak [dBc]

Mode	Channel	Frequency [MHz]	Result
GFSK 1Mbps PWR 10	0	2402	PASS
GFSK 1Mbps PWR 10	19	2440	PASS
GFSK 1Mbps PWR 10	39	2480	PASS

Remark1: every RF-Port tested separately in case on MIMO device

Remark2: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**


4.7 Radiated field strength emissions below 30 MHz

4.7.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz”. The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

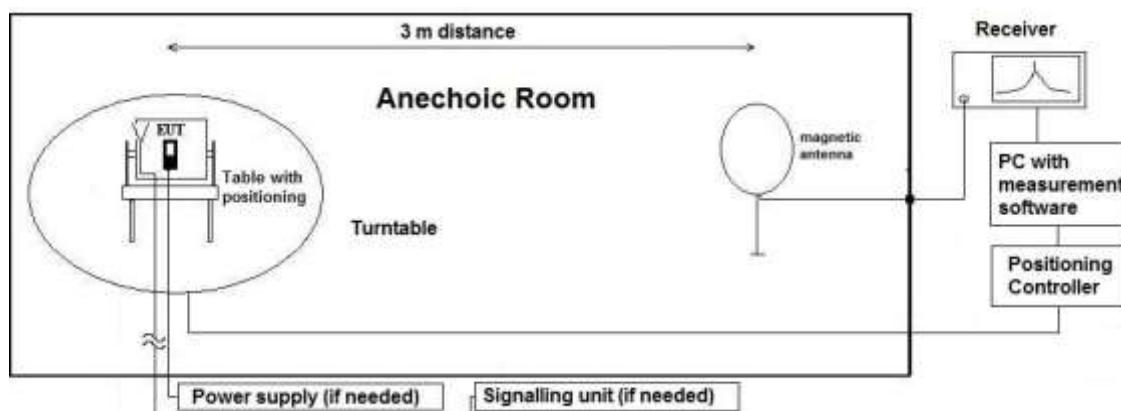

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

AF = Antenna factor

$$M = L_T - E_C$$

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.7.2 Measurement Location

Test site	120902 – SAC – Radiated Emission > 1GHz
-----------	---

Correction factors due to reduced meas. distance (f < 30 MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency -Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]		1st Condition (dmeas < Dnear-field)	2ndCondition (Limit distance bigger Dnear-field)	Distance Correction accord. Formula
kHz	9.00E+03	33333.33	5305.17	300		fullfilled	not fullfilled	-80.00
	1.00E+04	30000.00	4774.65			fullfilled	not fullfilled	-80.00
	2.00E+04	15000.00	2387.33			fullfilled	not fullfilled	-80.00
	3.00E+04	10000.00	1591.55			fullfilled	not fullfilled	-80.00
	4.00E+04	7500.00	1193.66			fullfilled	not fullfilled	-80.00
	5.00E+04	6000.00	954.93			fullfilled	not fullfilled	-80.00
	6.00E+04	5000.00	795.78			fullfilled	not fullfilled	-80.00
	7.00E+04	4285.71	682.09			fullfilled	not fullfilled	-80.00
	8.00E+04	3750.00	596.83			fullfilled	not fullfilled	-80.00
	9.00E+04	3333.33	530.52			fullfilled	not fullfilled	-80.00
	1.00E+05	3000.00	477.47			fullfilled	not fullfilled	-80.00
	1.25E+05	2400.00	381.97			fullfilled	not fullfilled	-80.00
	2.00E+05	1500.00	238.73			fullfilled	fullfilled	-78.02
	3.00E+05	1000.00	159.16			fullfilled	fullfilled	-74.49
	4.00E+05	750.00	119.37			fullfilled	fullfilled	-72.00
	4.90E+05	612.24	97.44			fullfilled	fullfilled	-70.23
	5.00E+05	600.00	95.49	30		fullfilled	not fullfilled	-40.00
	6.00E+05	500.00	79.58			fullfilled	not fullfilled	-40.00
	7.00E+05	428.57	68.21			fullfilled	not fullfilled	-40.00
	8.00E+05	375.00	59.68			fullfilled	not fullfilled	-40.00
	9.00E+05	333.33	53.05			fullfilled	not fullfilled	-40.00
MHz	1.00	300.00	47.75			fullfilled	not fullfilled	-40.00
	1.59	188.50	30.00			fullfilled	not fullfilled	-40.00
	2.00	150.00	23.87			fullfilled	fullfilled	-38.02
	3.00	100.00	15.92			fullfilled	fullfilled	-34.49
	4.00	75.00	11.94			fullfilled	fullfilled	-32.00
	5.00	60.00	9.55			fullfilled	fullfilled	-30.06
	6.00	50.00	7.96			fullfilled	fullfilled	-28.47
	7.00	42.86	6.82			fullfilled	fullfilled	-27.13
	8.00	37.50	5.97			fullfilled	fullfilled	-25.97
	9.00	33.33	5.31			fullfilled	fullfilled	-24.95
	10.00	30.00	4.77			fullfilled	fullfilled	-24.04
	10.60	28.30	4.50			fullfilled	fullfilled	-23.53
	11.00	27.27	4.34			fullfilled	fullfilled	-23.21
	12.00	25.00	3.98			fullfilled	fullfilled	-22.45
	13.56	22.12	3.52			fullfilled	fullfilled	-21.39
	15.00	20.00	3.18			fullfilled	fullfilled	-20.51
	15.92	18.85	3.00			fullfilled	fullfilled	-20.00
	17.00	17.65	2.81			not fullfilled	fullfilled	-20.00
	18.00	16.67	2.65			not fullfilled	fullfilled	-20.00
	20.00	15.00	2.39			not fullfilled	fullfilled	-20.00
	21.00	14.29	2.27			not fullfilled	fullfilled	-20.00
	23.00	13.04	2.08			not fullfilled	fullfilled	-20.00
	25.00	12.00	1.91			not fullfilled	fullfilled	-20.00
	27.00	11.11	1.77			not fullfilled	fullfilled	-20.00
	29.00	10.34	1.65			not fullfilled	fullfilled	-20.00
	30.00	10.00	1.59			not fullfilled	fullfilled	-20.00

4.7.3 Limit

Radiated emissions limits, (3 meters)					
Frequency Range [MHz]	Limit [μ V/m]	Limit [$\text{dB}\mu\text{V/m}$] *	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 – 30	30	29.5	30	Quasi peak	9

*Remark: In Canada same limits apply, just unit reference is different

4.7.4 Result

Diagram	Channel	Mode	Maximum Level [$\text{dB}\mu\text{V/m}$] Frequency Range 0.009 – 30 MHz	Result
2.01a	Low	BLE TX 2402 MHz_laying	No peaks found	Passed
2.01b	Low	BLE TX 2402 MHz_standing	No peaks found	Passed
2.02a	Mid	BLE TX 2440 MHz_standing	No peaks found	Passed
2.02b	Mid	BLE TX 2440 MHz_laying	No peaks found	Passed
2.03a	High	BLE TX 2480 MHz_standing	No peaks found	Passed
2.03b	High	BLE TX 2480 MHz_laying	No peaks found	Passed


Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

4.8 Radiated field strength emissions 30 MHz – 1 GHz

4.8.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant semi anechoic room (SAR) and fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

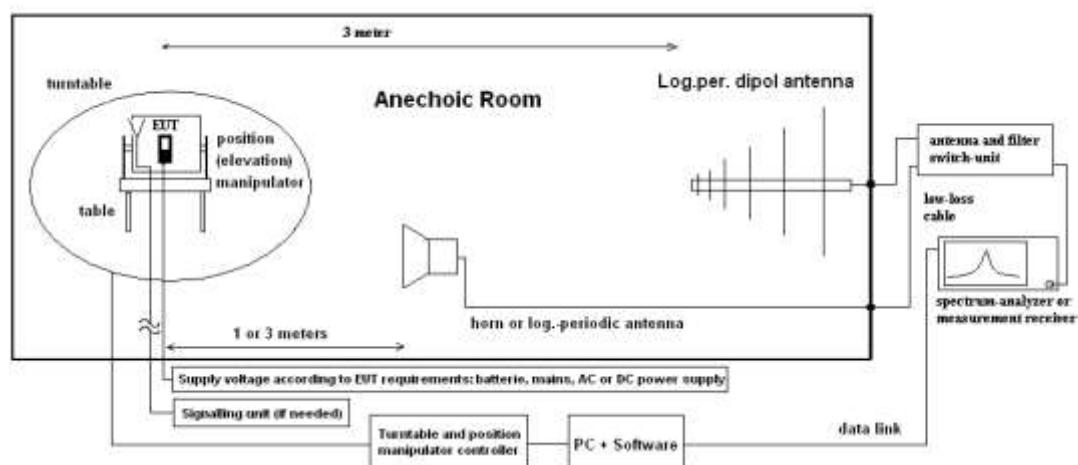

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1.0 m and 1.82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

AF = Antenna factor

$$M = L_T - E_C \quad (2)$$

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.8.2 Measurement Location

Test site	120902 – SAC – Radiated Emission > 1 GHz
-----------	--

4.8.3 Limit

Radiated emissions limits, (3 meters)				
Frequency Range [MHz]	Limit [µV/m]	Limit [dBµV/m]	Detector	RBW / VBW [kHz]
30 - 88	100	40.0	Quasi peak	100 / 300
88 - 216	150	43.5	Quasi peak	100 / 300
216 - 960	200	46.0	Quasi peak	100 / 300
960 - 1000	500	54.0	Quasi peak	100 / 300

4.8.4 Result

Diagram	Channel	Mode	Maximum Level [dBµV/m] Frequency Range 30 – 1000 MHz	Result
3.01a	Low	BLE TX 2402 MHz	29.16	Passed
3.01b	Low	BLE TX 2402 MHz	25.99	Passed
3.02a	Mid	BLE TX 2440 MHz	26.50	Passed
3.02b	Mid	BLE TX 2440 MHz	28.27	Passed
3.03a	High	BLE TX 2480 MHz	33.16	Passed
3.03b	High	BLE TX 2480 MHz	30.11	Passed


Remark: for more information and graphical plot see annex A1 [CETECOM_19_1_0055004T02a_A1](#)

4.9 Radiated field strength emissions above 1 GHz

4.9.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

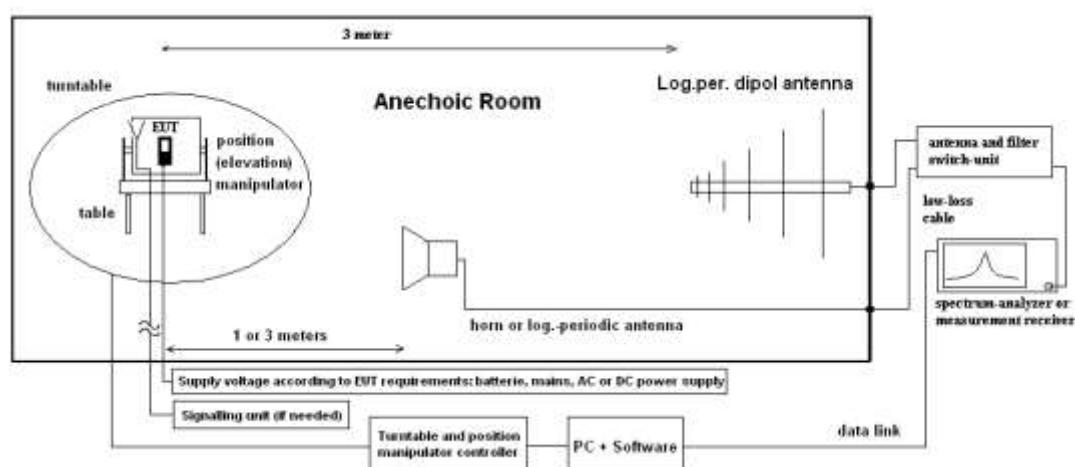

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions or three axis scan for portable/small equipment.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + A_F + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

A_F = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

4.9.2 Measurement Location

Test site 1 – 18 GHz	120904 – FAC1 – Radiated Emissions
Test site 18 – 26.5 GHz	120907 – FAC2

4.9.3 Limit

Radiated emissions limits, (3 meters)				
Frequency Range [MHz]	Limit [μ V/m]	Limit [dB μ V/m]	Detector	RBW / VBW [kHz]
Above 1000	500	54	Average	1000 / 3000
Above 1000	5000	74	Peak	1000 / 3000

4.9.4 Result

Diagram	Channel	Mode	Maximum Level [dB μ V/m] Frequency Range 1 – 2.8 GHz	Result
4.01a	Low	GFSK 1Mbps PWR 10	60.21	Passed
4.02a	Mid	GFSK 1Mbps PWR 10	60.95	Passed
4.03a	High	GFSK 1Mbps PWR 10	60.96	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

Diagram	Channel	Mode	Maximum Level [dB μ V/m] Frequency Range 2.8 – 18 GHz	Result
4.01b	Low	GFSK 1Mbps PWR 10	63.05	Passed
4.02b	Mid	GFSK 1Mbps PWR 10	63.09	Passed
4.03b	High	GFSK 1Mbps PWR 10	63.13	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**


Diagram	Channel	Mode	Maximum Level [dB μ V/m] Frequency Range 18 – 26 GHz	Result
4.01c	Low	GFSK 1Mbps PWR 10	56.92	Passed
4.02c	Mid	GFSK 1Mbps PWR 10	57.34	Passed
4.03c	High	GFSK 1Mbps PWR 10	57.23	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

4.10 Radiated Band-Edge emissions

4.10.1 Description of the general test setup and methodology, see below example:

Schematic:

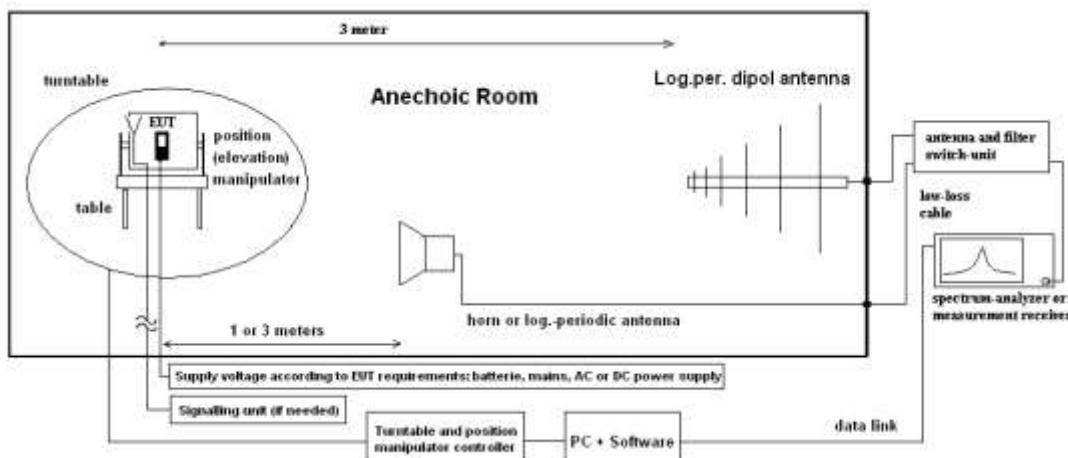

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

For uncritical results where a measurement resolution bandwidth of 1MHz can clearly show the compliance without influencing the results, a field strength measurement was performed to show compliance.

For critical results a Marker-Delta marker method was used for showing compliance to restricted bands.

The method consists of three independent steps:

1. Step: Prior to the measurement the fundamental radiated In-Band field strength was performed. The determined value is used as reference value.
2. Step: Second step consist of finding the relative attenuation between the fundamental emission and the maximum local out-of-band emission (within 2 MHz range around the band edge either on the band-edge directly or some modulation product if the level is greater than that on the band-edge) when measured with lower resolution bandwidth.
3. Step: The delta value recorded in step 2 will be subtracted from value recorded in step 1, thus giving the required field strength at the band-edge. This value must fulfil the requirements for radiated spurious emissions in restricted bands in FCC §15.205 with the general limits of FCC §15.209

The EUT was instructed to send with maximum power (if adjustable) according to applicants instructions.

4.10.2 Measurement Location

Test site	120904 – FAC1 – Radiated Emissions
-----------	------------------------------------

4.10.3 Limit

Frequency Range [MHz]	Pk Limit [dBc]	Avg Limit [dBc]	Avg Limit [dB μ V/m]	Pk Limit [dB μ V/m]	Detector	RBW / VBW [kHz]
Below 2390	-	-	54	74	Average / Peak	100 / 300
Above 2483.5	-	-	54	74	Average / Peak	1000 / 3000
2390 - 2400	-20	-	-	-	Peak	100 / 300
2390 - 2400	-	-30	-	-	Average	100 / 300

4.10.4 Result

Non-restricted bands near-by

Diagram	Channel	Mode	Peak [dBc]	Average [dBc]	Result
9.01	Low	GFSK 1Mbps PWR 10	25.23	42.17	PASSED

Remark: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

Restricted bands near-by

Diagram	Channel	Mode	Peak [dB μ V/m]	Average [dB μ V/m]	Result
9.02	High	GFSK 1Mbps PWR 10	58.08	46.38	PASSED

Remark1: Average value corrected with Duty Cycle - Factor

Remark2: for more information and graphical plot see annex A1 **CETECOM_19_1_0055004T02a_A1**

4.11 Results from external laboratory

None

-

4.12 Opinions and interpretations

None

-

5 Equipment lists

ID	Description	Manufacturer	SerNo	Cal due date
	120901 - SAC - Radiated Emission <1GHz			21.07.2025
205 74	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH	980026L	03.05.2022
204 87	CETECOM Semi Anechoic Chamber < 1GHz	ETS-Lindgren GmbH	-	15.07.2025
206 20	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH	100362	13.05.2021
204 82	filter matrix Filter matrix SAR 1	CETECOM GmbH	-	
208 85	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	
	120902 - SAC - Radiated Emission >1GHz			15.07.2027
205 50	CETECOM Semi anechoic Chamber > 1Ghz	ETS-Lindgren GmbH	-	15.07.2025
203 76	Horn Antenna BBHA9120 E	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 E 179	08.04.2023
	120904 - FAC1 - Radiated Emissions			
203 41	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	81650455	25.05.2022
207 20	EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.xx	
204 89	EMI Test Receiver ESU40	Rohde & Schwarz Messgerätebau GmbH	1000-30	13.05.2021

ID	Description	Manufacturer	SerNo	Cal due date
202 54	High Pass Filter 5HC 2600/12750-1.5KK (GSM1800/1900/DECT)	Trilithic	23042	
208 68	High Pass Filter AFH-07000	AtlanTecRF	16071300004	
202 91	High Pass Filter WHJ 2200-4EE (GSM 850/900)	Wainwright Instruments GmbH	14	
200 20	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	19.07.2021
203 02	Horn Antenna BBHA9170 (Meas 1)	Schwarzbeck Mess-Elektronik OHG	155	15.04.2023
205 49	Log.Per-Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	31.07.2021
205 12	Notch Filter WRCA 800/960-02/40-6EEK (GSM 850)	Wainwright Instruments GmbH	24	
202 90	Notch Filter WRCA 901,9/903,1SS (GSM 900)	Wainwright Instruments GmbH	3RR	
201 22	Notch Filter WRCB 1747/1748 (GSM 1800)	Wainwright Instruments GmbH	12	
201 21	Notch Filter WRCB 1879,5/1880,5EE (GSM 1900)	Wainwright Instruments GmbH	15	
204 48	Notch Filter WRCT 1850.0/2170.0-5/40-10SSK (WCDMA-FDD II)	Wainwright Instruments GmbH	5	
200 66	Notch Filter WRCT 1900/2200-5/40-10EEK (WCDMA - FDDI)	Wainwright Instruments GmbH	5	
204 49	Notch Filter WRCT 824.0/894.0-5/40-8SSK (WCDMA FDD V)	Wainwright Instruments GmbH	1	
206 11	Power Supply E3632A	Agilent Technologies Deutschland GmbH	KR 75305854	
203 38	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	

ID	Description	Manufacturer	SerNo	Cal due date
204 84	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	
202 87	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	
206 70	Radio Communication Tester CMU200	Rohde & Schwarz Messgerätebau GmbH	106833	16.06.2022
206 90	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	23.05.2021
204 39	UltraLog-Antenna HL 562	Rohde & Schwarz Messgerätebau GmbH	100248	10.03.2023
120907 - FAC2				
208 11	Horn Antenna ASY-SGH-124-SMA	Antenna Systems Solutions S.L	29F14182337	08.10.2021
207 32	Signal- and Spectrum Analyzer FSW67	Rohde & Schwarz Messgerätebau GmbH	104023	27.05.2021

6 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%							
Conducted emissions (U CISPR)	-	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB						-	
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method	
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--		
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--	-	
		12.75 GHz - 26.5 GHz	N/A	0.82	--	N/A	N/A	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable	
		2.8 GHz - 12.75 GHz	1.48	N/A	1.51	N/A	1.43	--		
		12.75 GHz - 18 GHz	1.81	N/A	1.83	N/A	1.77	--		
		18 GHz - 26.5 GHz	1.83	N/A	1.85	N/A	1.79	--		
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error	
			1.0 dB						Power	
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error	
			See above: 0.70 dB						Power	
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-	
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.01dB						Magnetic field strength	
		30 MHz - 1 GHz	5.83 dB						Electrical Field strength	
		1 GHz - 18 GHz	4.91 dB							
		18 GHz - 26.5 GHz	5.06 dB							

7 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2020-Jul-30
C1	- Updated EUT information in chapter 3.2 - Updated results in chapter 4.3 and 4.4	2020-Aug-06
--	--	--

End Of Test Report