



EMC TEST REPORT

Product Name: smart phone

Model Name: UW505, GEMINI, GENESIS

FCC ID: 2AVYL-UW505

Issued For : SHENZHEN ETERNITY TECHNOLOGY CO., LTD

A2, Yingzhan Industrial Park, Longtian, Pingshan,
Shenzhen, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsiong Industrial Park,
No.177 Renmin West Road, Jinsha Community, Kengzi
Street, Pingshan New District, Shenzhen, China

Report Number: LGT23C062RF01

Sample Received Date: Mar. 23, 2023

Date of Test: Mar. 23, 2023 ~ Apr. 10, 2023

Date of Issue: Apr. 12, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: SHENZHEN ETERNITY TECHNOLOGY CO., LTD
Address: A2, Yingzhan Industrial Park, Longtian, Pingshan, Shenzhen, China

Manufacture: SHENZHEN ETERNITY TECHNOLOGY CO., LTD
Address: A2, Yingzhan Industrial Park, Longtian, Pingshan, Shenzhen, China

Product Name: smart phone

Trademark: KOOLMAAX

Model Name: UW505, GEMINI, GENESIS

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

Terry Zhao

Terry Zhao
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

1. TEST SUMMARY	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.5 MEASUREMENT INSTRUMENTS LIST	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	14
APPENDIX I - TEST SETUP	22



Revision History

Rev.	Issue Date	Revisions
00	Apr. 12, 2023	Initial Issue



1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	PASS	
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 1 Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.40
Radiated Emissions	1000 ~ 18000	5.49

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	smart phone
Trademark:	KOOLMAAX
Model Name:	UW505
Series Model:	GEMINI, GENESIS
Model Difference:	Only the model is different.
Adapter:	Input: 100-240V ~ 50/60Hz 0.3A Output: 5V, 1000mA
Battery:	Capacity: 2500mAh Rated Voltage: 3.8V
Test Voltage:	AC 120V/60Hz Battery: 3.8V
Hardware Version:	8149TQ_MMI_V01
Software Version:	N/A

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	Charging+GSM link+BT+Wi-Fi+GPS+Camera recording+Earphone
Mode 2	Charging+WCDMA link+BT+Wi-Fi+GPS+Camera recording+Earphone
Mode 3	Charging+LTE link+BT+Wi-Fi+GPS+Camera recording+Earphone
Mode 4	USB Data Transmission

Note: Only the data of worst-case mode 1 was recorded in this report.

2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	N/A	XS12-050100U	N/A	Input: 100-240V ~ 50/60Hz 0.3A Output: 5V, 1000mA
USB-A to Micro-USB	N/A	N/A	N/A	1m, unshielded, without ferrite core

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	HUAWEI	HKF-16	N/A	N/A
Earphone	VESAFE	39630078	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in «Length» column.



2.5 MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
LISN	COM-POWER	LI-115	02032	2022.04.13	2023.04.12
LISN	SCHWARZBECK	NNLK 8121	00847	2022.08.19	2023.08.18
CE Cable	N.A	C01	N.A	2022.05.05	2023.05.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2022.08.19	2023.08.18
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				
Radiated Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
Active loop Antenna	R&S	HFH2-Z2	POS871398181	2022.06.02	2024.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2022.04.29	2023.04.28
Bilog Antenna	SCHWARZBECK	VULB 9168	01447	2022.12.12	2024.12.11
Horn Antenna	SCHWARZBECK	3115	10SL0060	2022.06.02	2024.06.01
Pre-amplifier(0.1M-3GHz)	HP	8447D	2727A05655	2022.04.11	2023.04.10
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2022.04.13	2023.04.12
RE Cable (9K-1G)	N.A	R01	N.A	2022.05.05	2023.05.04
RE Cable (1-26G)	N.A	R02	N.A	2022.05.05	2023.05.04
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.




3.1.3 TEST SETUP

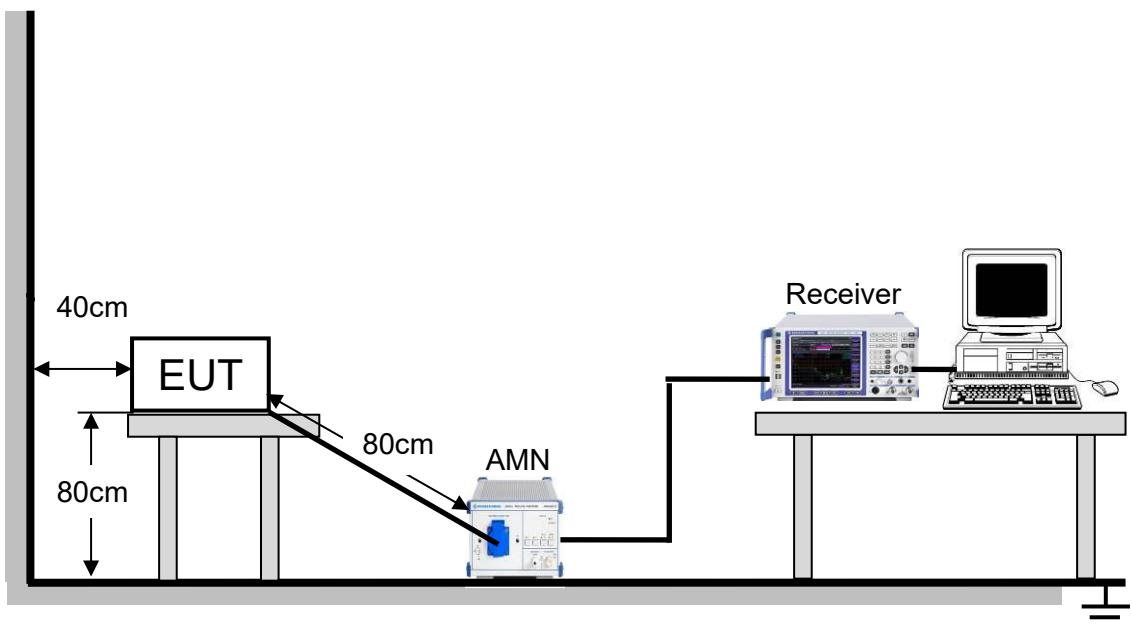



3.1.4 TEST RESULTS


Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 21.6°C
M/N: UW505	Humidity: 58%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-03
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+Camera recording+Earphone	
Note:	

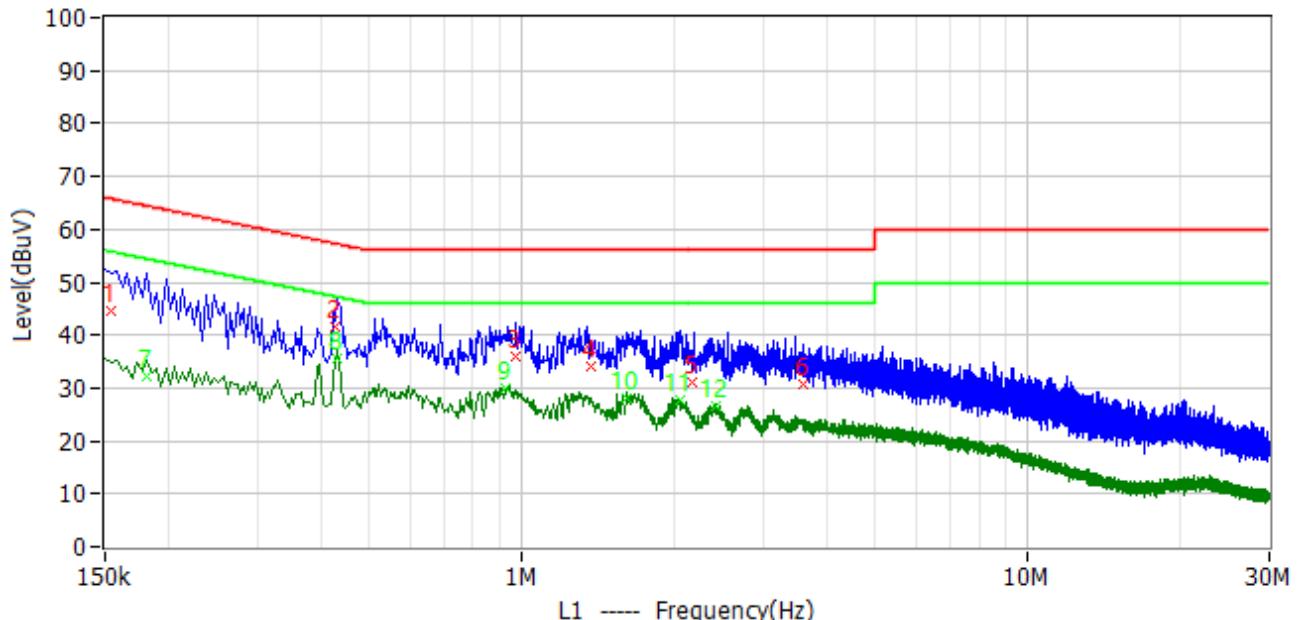

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	154.000kHz	34.09	10.60	44.69	65.78	-21.09	QP	L1
2	426.000kHz	31.10	10.60	41.70	57.33	-15.63	QP	L1
3	970.000kHz	25.18	10.60	35.78	56.00	-20.22	QP	L1
4	1.366MHz	23.35	10.60	33.95	56.00	-22.05	QP	L1
5	2.174MHz	20.57	10.70	31.27	56.00	-24.73	QP	L1
6	3.590MHz	19.89	10.70	30.59	56.00	-25.41	QP	L1
7	182.000kHz	21.57	10.60	32.17	54.39	-22.23	AV	L1
8	430.000kHz	25.12	10.60	35.72	47.25	-11.54	AV	L1
9	930.000kHz	19.34	10.60	29.94	46.00	-16.06	AV	L1
10	1.606MHz	17.36	10.70	28.06	46.00	-17.94	AV	L1
11	2.050MHz	16.93	10.70	27.63	46.00	-18.37	AV	L1
12	2.414MHz	16.07	10.70	26.77	46.00	-19.23	AV	L1



Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 21.6°C
M/N: UW505	Humidity: 58%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-03
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+Camera recording+Earphone	
Note:	

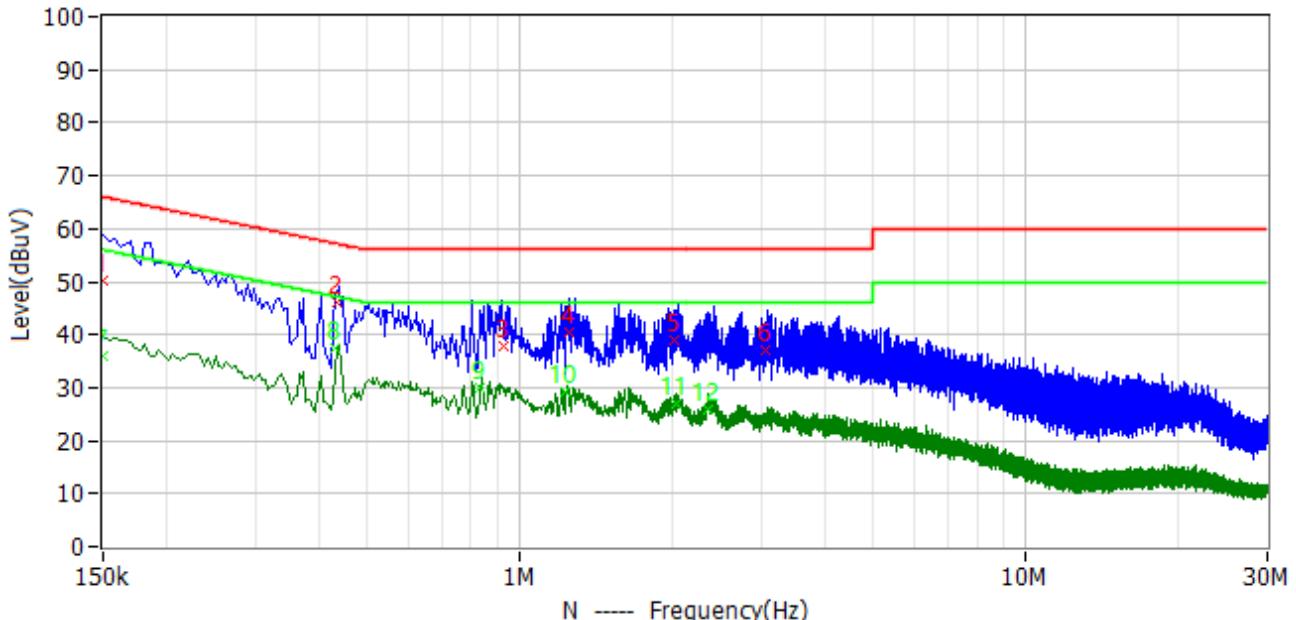

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	150.000kHz	39.60	10.60	50.20	66.00	-15.80	QP	N
2	434.000kHz	35.33	10.60	45.93	57.18	-11.25	QP	N
3	930.000kHz	27.24	10.60	37.84	56.00	-18.16	QP	N
4	1.246MHz	29.95	10.60	40.55	56.00	-15.45	QP	N
5	2.026MHz	28.11	10.70	38.81	56.00	-17.19	QP	N
6	3.066MHz	26.23	10.70	36.93	56.00	-19.07	QP	N
7	150.000kHz	25.29	10.60	35.89	56.00	-20.11	AV	N
8	430.000kHz	26.72	10.60	37.32	47.25	-9.93	AV	N
9	830.000kHz	19.48	10.60	30.08	46.00	-15.92	AV	N
10	1.226MHz	18.50	10.60	29.10	46.00	-16.90	AV	N
11	2.042MHz	16.44	10.70	27.14	46.00	-18.86	AV	N
12	2.354MHz	15.24	10.70	25.94	46.00	-20.06	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS

Below 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
30 - 88	49.5		40	
88 - 216	53.9		43.5	
216 - 960	56.9		46	
Above 960	60		54	

Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),


Margin Level = Measurement Value - Limit Value.

3.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

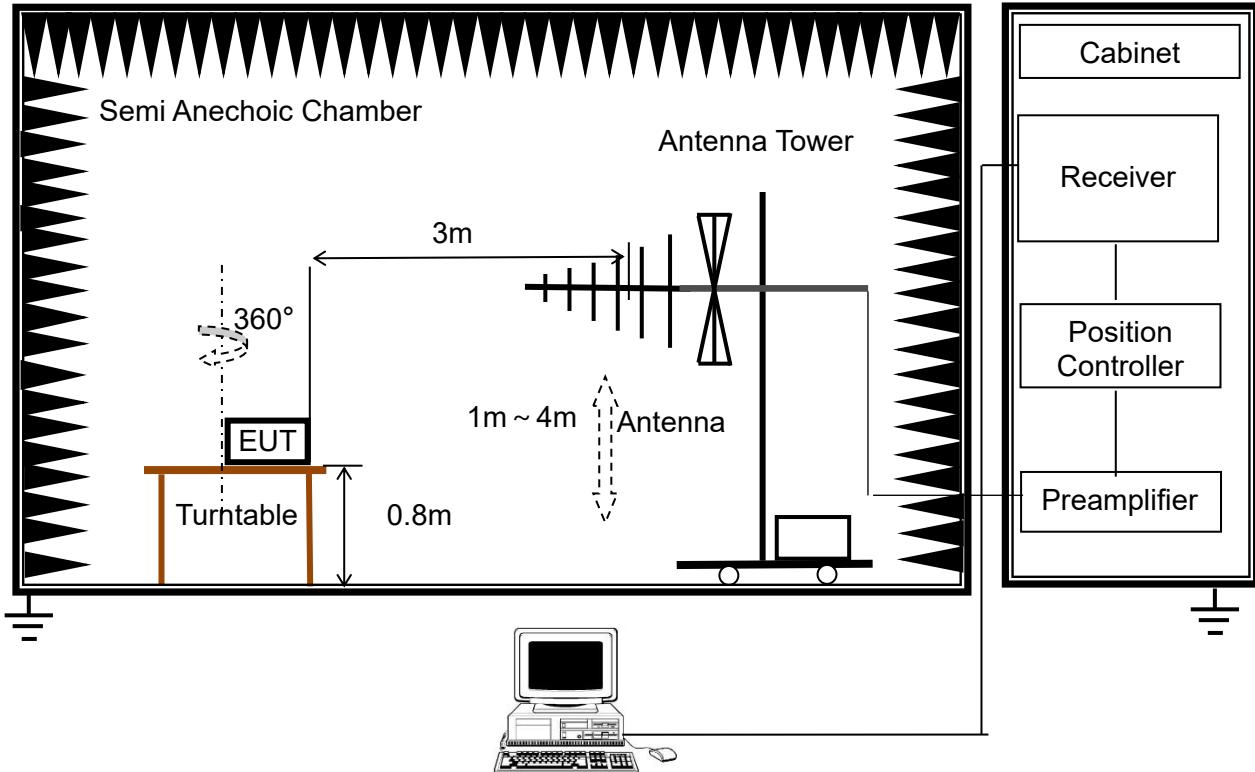


(B) Radiated Emission Test Set-Up Frequency Above 1GHz

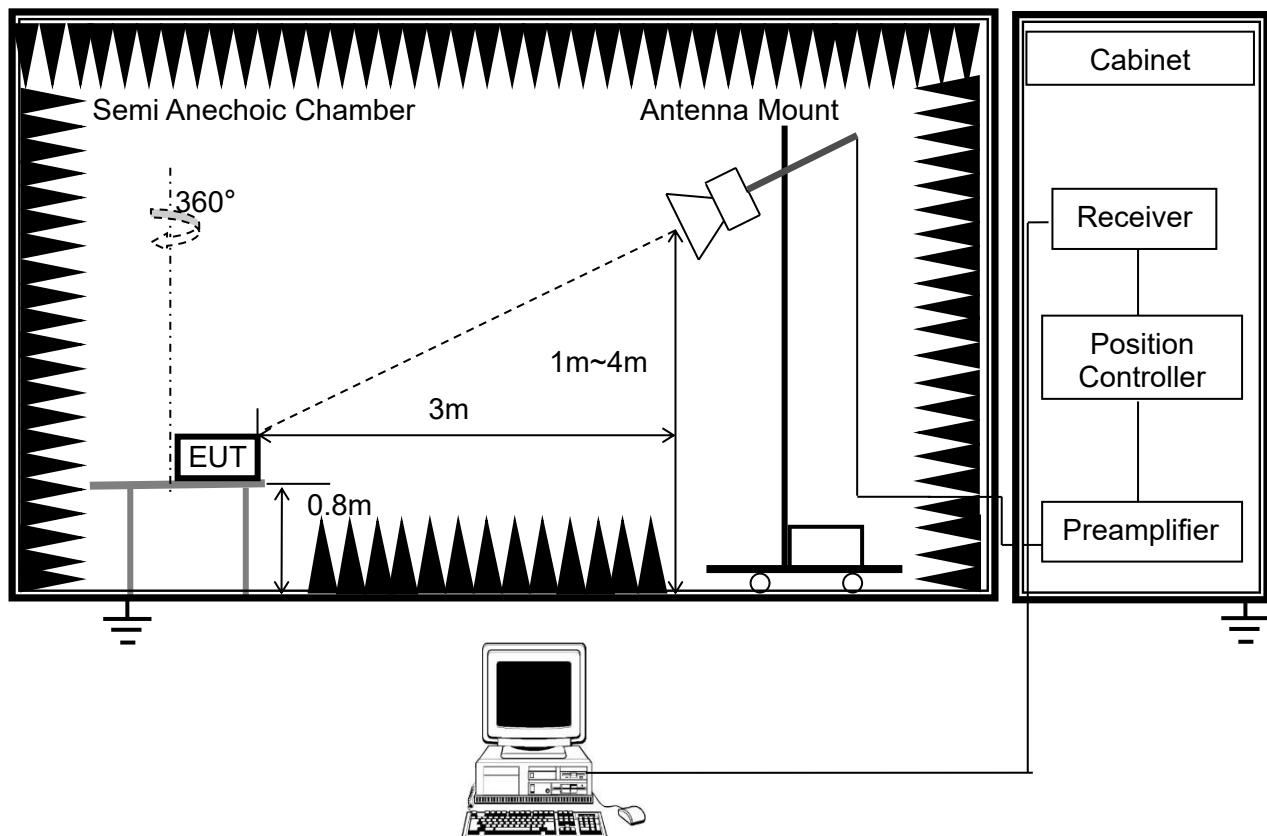



3.2.4 TEST RESULTS - BELOW 1GHZ


Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 25.1°C
M/N: UW505	Humidity: 62%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-03
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+Camera recording+Earphone	
Note:	

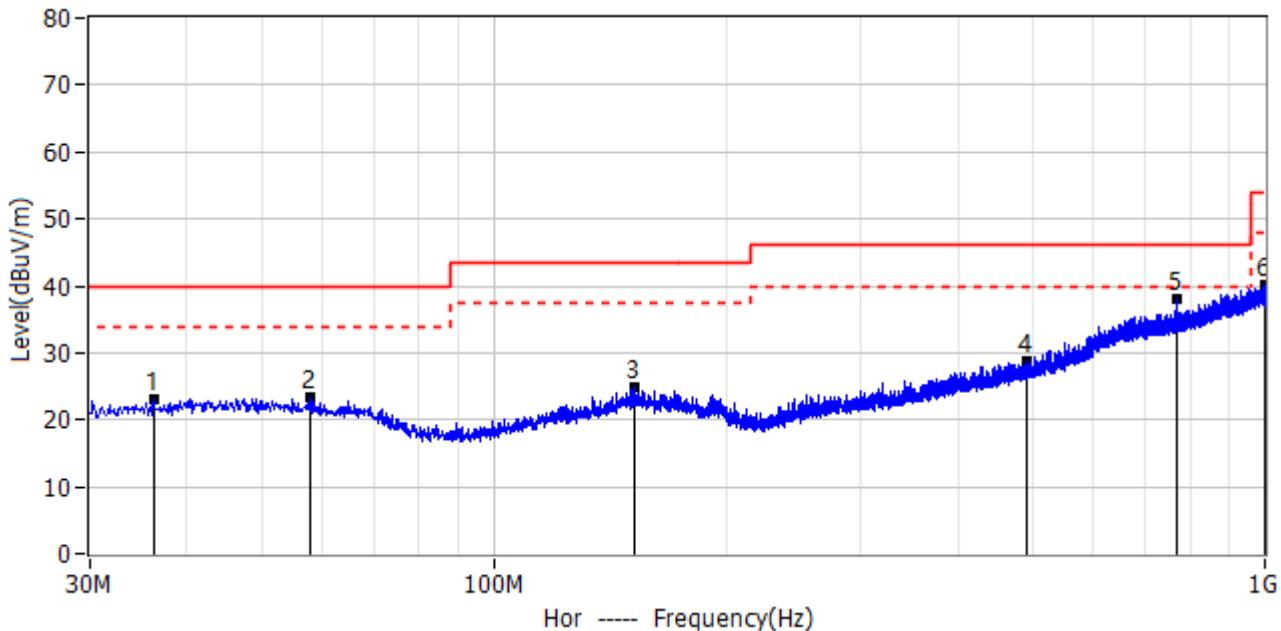

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	36.305MHz	4.41	18.76	23.17	40.00	-16.83	QP	Hor
2*	58.009MHz	4.69	18.78	23.47	40.00	-16.53	QP	Hor
3*	151.978MHz	4.80	19.96	24.76	43.50	-18.74	QP	Hor
4*	490.023MHz	4.17	24.70	28.87	46.00	-17.13	QP	Hor
5*	768.049MHz	7.17	30.76	37.93	46.00	-8.07	QP	Hor
6*	998.424MHz	5.63	34.56	40.19	54.00	-13.81	QP	Hor




Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 25.1°C
M/N: UW505	Humidity: 62%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-04-03
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+Camera recording+Earphone	
Note:	

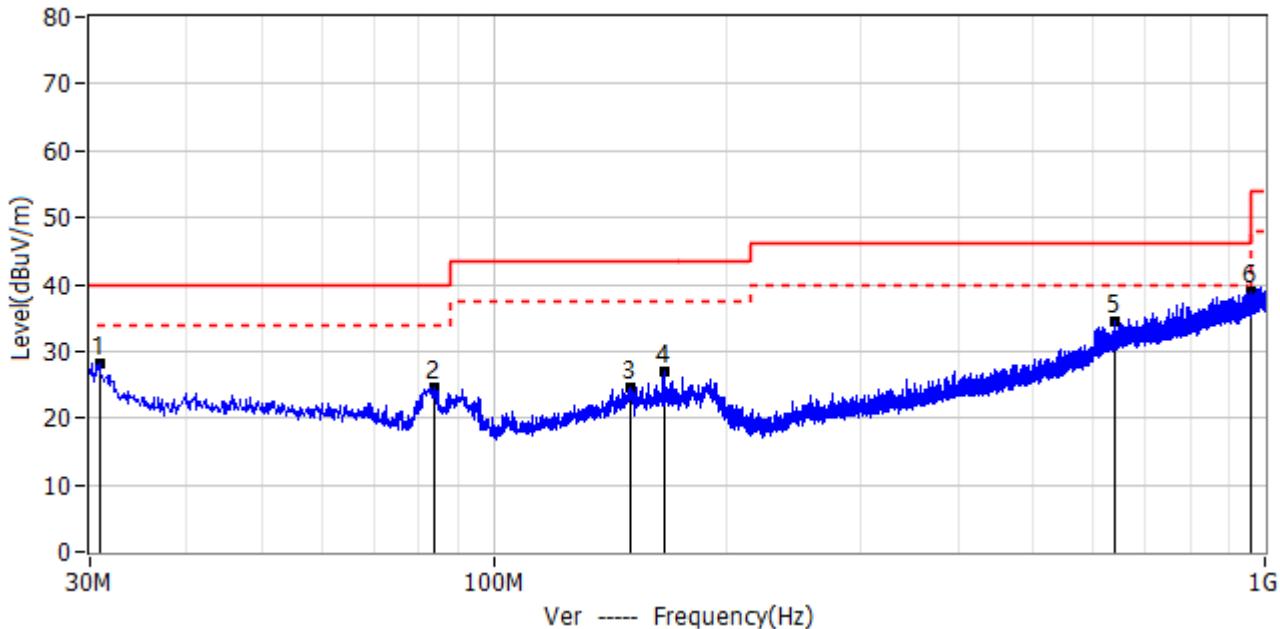

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	30.849MHz	10.04	18.26	28.30	40.00	-11.70	QP	Ver
2*	83.593MHz	9.53	15.15	24.68	40.00	-15.32	QP	Ver
3*	150.523MHz	4.71	19.98	24.69	43.50	-18.81	QP	Ver
4*	166.770MHz	7.08	19.80	26.88	43.50	-16.62	QP	Ver
5*	637.220MHz	5.44	28.91	34.35	46.00	-11.65	QP	Ver
6*	957.805MHz	4.87	34.11	38.98	46.00	-7.02	QP	Ver




Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 23.4°C
M/N: UW505	Humidity: 65%RH
Test Voltage: Battery	Test Data: 2023-03-31
Test Mode: USB Data Transmission	
Note:	

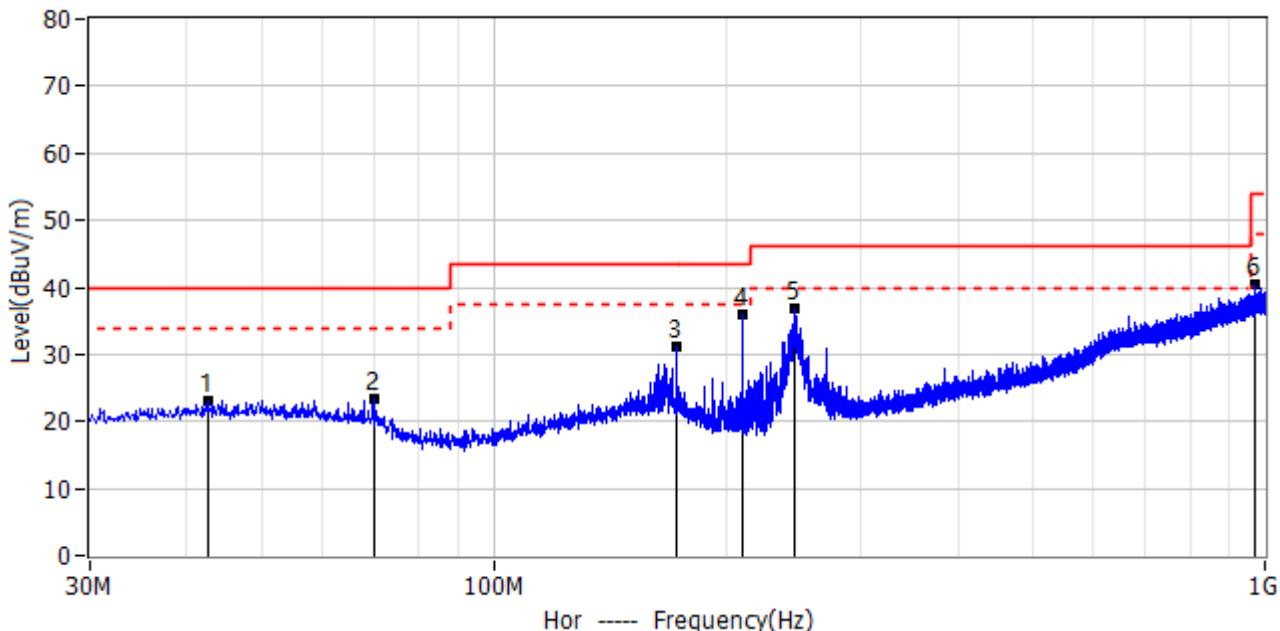

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	42.610MHz	3.89	19.30	23.19	40.00	-16.81	QP	Hor
2*	70.013MHz	5.43	18.02	23.45	40.00	-16.55	QP	Hor
3*	172.590MHz	11.58	19.54	31.12	43.50	-12.38	QP	Hor
4*	209.935MHz	18.96	17.01	35.97	43.50	-7.53	QP	Hor
5*	245.704MHz	18.81	17.99	36.80	46.00	-9.20	QP	Hor
6*	968.718MHz	5.99	34.32	40.31	54.00	-13.69	QP	Hor




Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 23.4°C
M/N: UW505	Humidity: 65%RH
Test Voltage: Battery	Test Data: 2023-03-31
Test Mode: USB Data Transmission	
Note:	

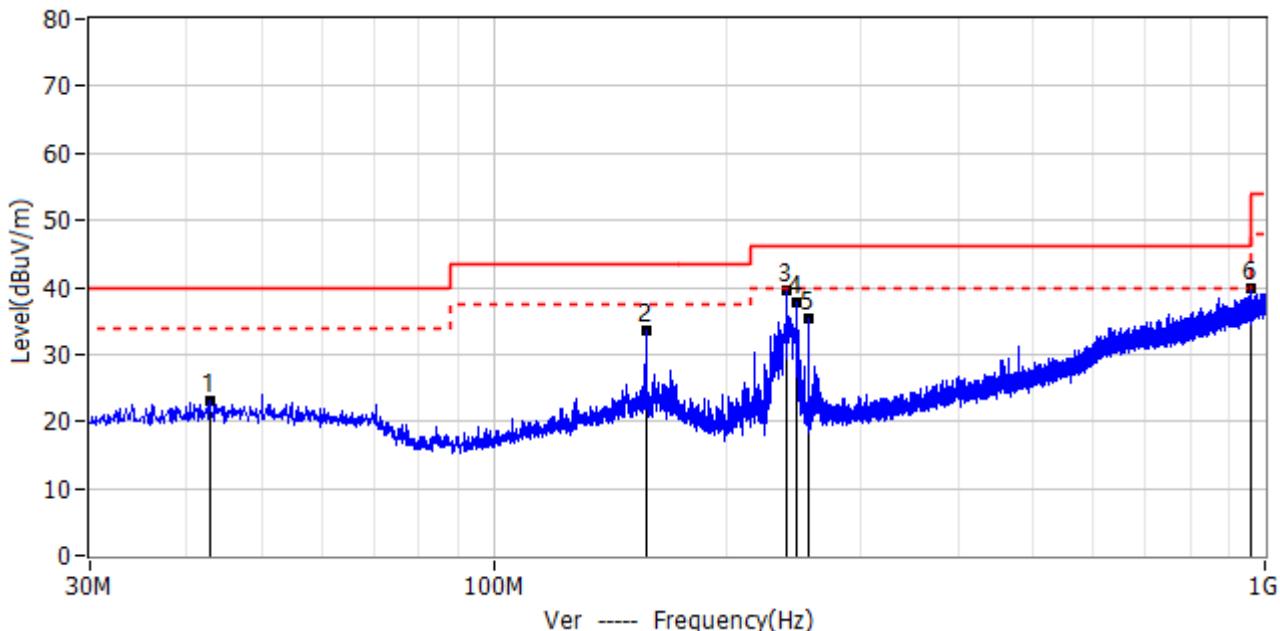

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	42.853MHz	3.75	19.29	23.04	40.00	-16.96	QP	Ver
2*	157.434MHz	13.80	19.88	33.68	43.50	-9.82	QP	Ver
3*	239.763MHz	21.82	17.66	39.48	46.00	-6.52	QP	Ver
4*	247.401MHz	19.74	18.09	37.83	46.00	-8.17	QP	Ver
5*	256.131MHz	16.83	18.52	35.35	46.00	-10.65	QP	Ver
6*	959.988MHz	5.83	34.15	39.98	46.00	-6.02	QP	Ver




Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 25°C
M/N: UW505	Humidity: 62%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-30
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+Camera recording+Earphone	
Note:	

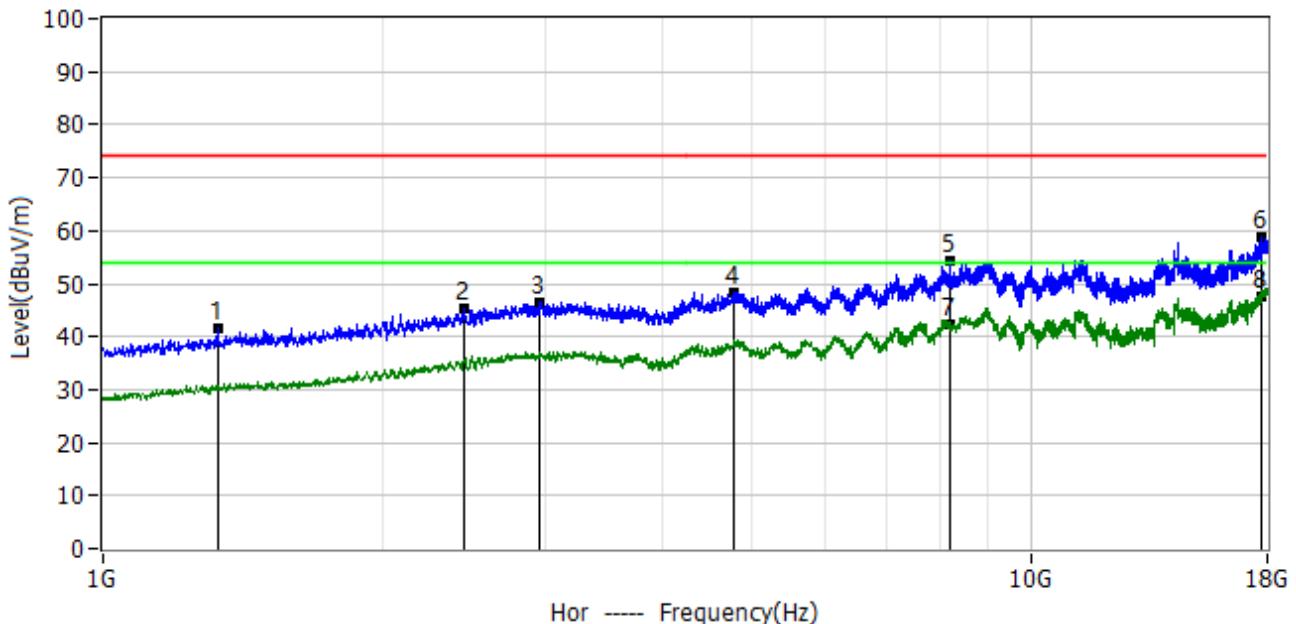

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.329GHz	63.56	-21.94	41.62	74.00	-32.38	PK	Hor
2*	2.451GHz	56.69	-11.50	45.19	74.00	-28.81	PK	Hor
3*	2.953GHz	55.11	-8.59	46.52	74.00	-27.48	PK	Hor
4*	4.793GHz	54.37	-5.98	48.39	74.00	-25.61	PK	Hor
5*	8.185GHz	57.63	-3.48	54.15	74.00	-19.85	PK	Hor
6*	17.779GHz	50.46	8.37	58.83	74.00	-15.17	PK	Hor
7*	8.185GHz	45.78	-3.48	42.30	54.00	-11.70	AV	Hor
8*	17.779GHz	39.23	8.37	47.60	54.00	-6.40	AV	Hor



Project: LGT23C062	Test Engineer: Dylan.shi
EUT: smart phone	Temperature: 25°C
M/N: UW505	Humidity: 62%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-03-30
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+Camera recording+Earphone	
Note:	

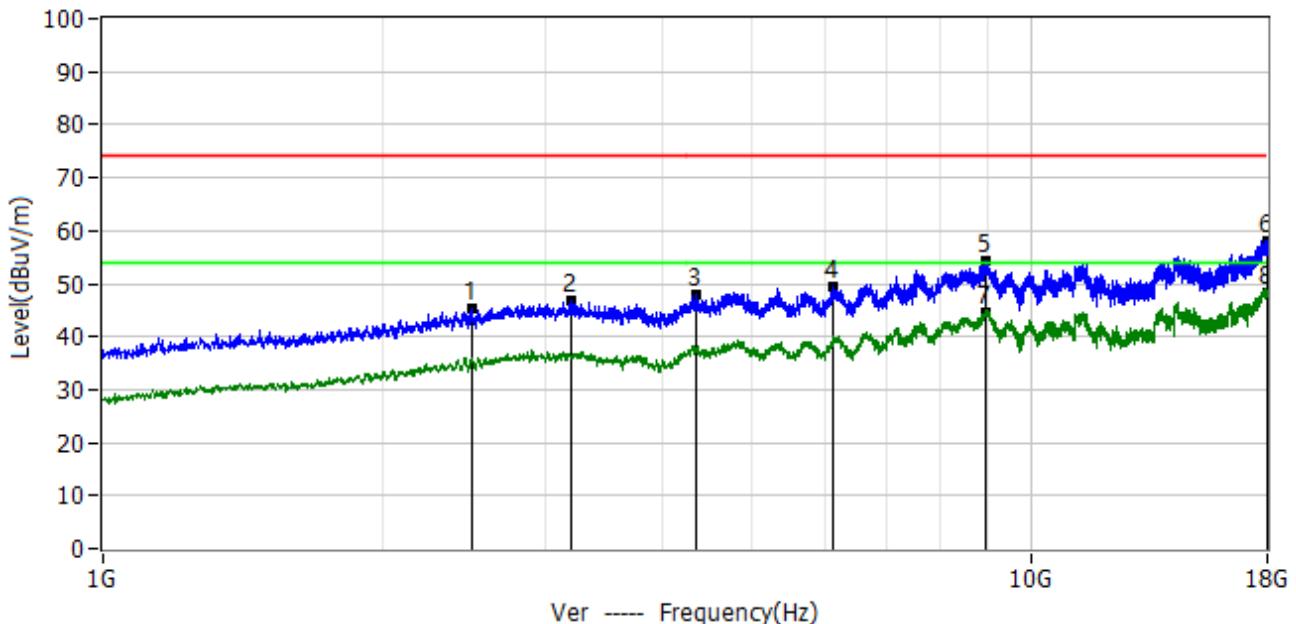

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.500GHz	56.37	-10.98	45.39	74.00	-28.61	PK	Ver
2*	3.204GHz	55.10	-8.41	46.69	74.00	-27.31	PK	Ver
3*	4.368GHz	54.26	-6.31	47.95	74.00	-26.05	PK	Ver
4*	6.121GHz	56.75	-7.30	49.45	74.00	-24.55	PK	Ver
5*	8.933GHz	55.65	-1.36	54.29	74.00	-19.71	PK	Ver
6*	17.964GHz	49.64	8.49	58.13	74.00	-15.87	PK	Ver
7*	8.933GHz	45.96	-1.36	44.60	54.00	-9.40	AV	Ver
8*	17.964GHz	40.01	8.49	48.50	54.00	-5.50	AV	Ver



APPENDIX I - TEST SETUP

Radiated Spurious Emission Test Setup Photo - Below 1GHz




Radiated Spurious Emission Test Setup Photo - Above 1GHz





Conducted Emission Test Setup Photo

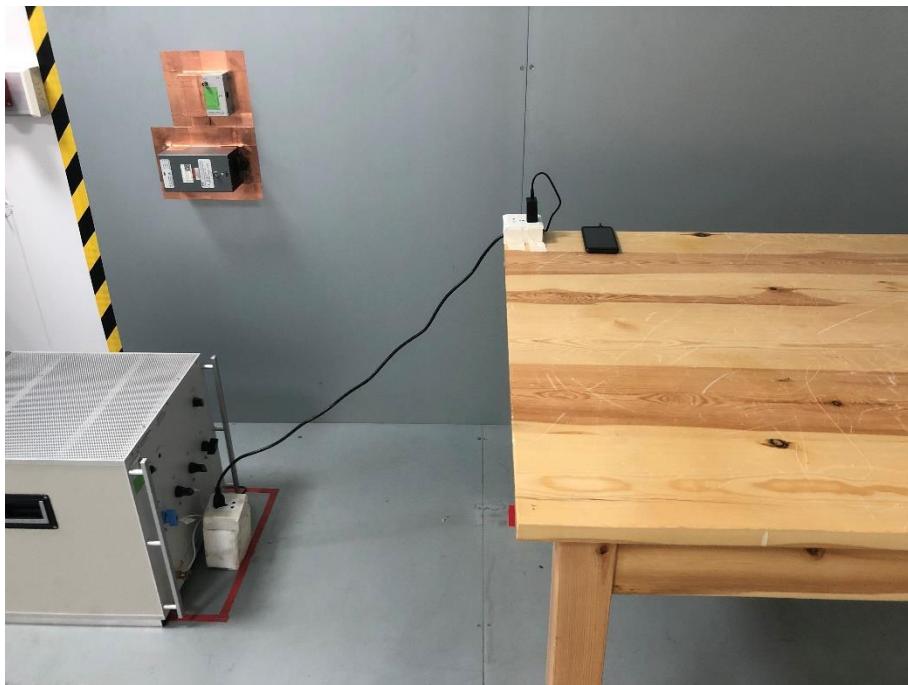

※※※※END OF THE REPORT※※※※