



FCC TEST REPORT

FCC ID:2AVZVL15Q5

Product	:	POS SYSTEM
Model Name	:	L15Q5
Brand	:	CITAQ
Report No.	:	PTC21071503901E-FC01
Prepared for		
CITAQ CO., LTD		
9F&13F, Chuangye Bldg, Keji Middle Road, Hi-Tech Zone, Shantou, Guangdong, China		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : CITAQ CO., LTD
Address : 9F&13F, Chuangye Bldg, Keji Middle Road, Hi-Tech Zone, Shantou, Guangdong, China
Manufacture's name : CITAQ CO., LTD
Address : 9F&13F, Chuangye Bldg, Keji Middle Road, Hi-Tech Zone, Shantou, Guangdong, China
Product name : POS SYSTEM
Model name : L15Q5
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Test Date : Aug. 1, 2021 to Aug. 6, 2021
Date of Issue : Aug. 6, 2021
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads 'Leo Yang' with a long, sweeping horizontal stroke at the end.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read 'Chris Du' in a stylized, cursive script.

Chris Du / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST.....	7
3.3 TEST SITE.....	11
4 EQUIPMENT DURING TEST.....	12
4.1 EQUIPMENTS LIST.....	12
4.2 MEASUREMENT UNCERTAINTY.....	14
4.3 DESCRIPTION OF SUPPORT UNITS.....	15
5 CONDUCTED EMISSION.....	16
5.1 E.U.T. OPERATION.....	16
5.2 EUT SETUP.....	16
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	17
5.4 MEASUREMENT PROCEDURE.....	17
5.5 CONDUCTED EMISSION LIMIT.....	17
5.6 MEASUREMENT DESCRIPTION.....	17
5.7 CONDUCTED EMISSION TEST RESULT.....	17
6 RADIATED SPURIOUS EMISSIONS.....	20
6.1 EUT OPERATION.....	20
6.2 TEST SETUP.....	21
6.3 SPECTRUM ANALYZER SETUP.....	22
6.4 TEST PROCEDURE.....	23
6.5 SUMMARY OF TEST RESULTS.....	24
7 CONDUCTED SPURIOUS EMISSION.....	31
7.1 TEST PROCEDURE.....	31
7.2 TEST RESULT.....	31
8 BAND EDGE MEASUREMENT.....	34



8.1 TEST PROCEDURE.....	34
8.2 TEST RESULT.....	35
9 6DB BANDWIDTH MEASUREMENT.....	39
9.1 TEST PROCEDURE.....	39
9.2 TEST RESULT.....	39
10 MAXIMUM PEAK OUTPUT POWER.....	46
10.1 TEST PROCEDURE.....	46
10.2 TEST RESULT.....	46
11 POWER SPECTRAL DENSITY.....	47
11.1 TEST PROCEDURE.....	47
11.2 TEST RESULT.....	47
12 ANTENNA APPLICATION.....	54
12.1 ANTENNA REQUIREMENT.....	54
12.2 RESULT.....	54
13 TEST SETUP.....	55
14 EUT PHOTOS.....	57



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable



3 General Information

3.1 General Description of E.U.T.

Product Name	:	POS SYSTEM
Model Name	:	L15Q5
Additional model	:	L15Q1,L15Q1-1, L15Q1-2, L15Q1-3, L15Q1-4,L15Q1-5 L15Q2,L15Q2-1, L15Q2-2, L15Q2-3, L15Q2-4, L15Q2-5 L15Q3,L15Q3-1, L15Q3-2, L15Q3-3, L15Q3-4, L15Q3-5 L15Q4,L15Q4-1, L15Q4-2, L15Q4-3, L15Q4-4, L15Q4-5 L15Q5-1, L15Q5-2, L15Q5-3, L15Q5-4, L15Q5-5 L15K1,L15K1-1, L15K1-2, L15K1-3, L15K1-4, L15 K1-5 L15K2,L15K2-1, L15K2-2, L15K2-3, L15K2-4, L15 K2-5
Specification	:	BT 5.0 BDR+EDR; BLE 802.11b/g/n HT20/HT40
Operation Frequency	:	2412-2462MHz for 802.11b/g;/ n(HT20) 2422-2452 MHz for 802.11 n(HT20) 2402-2480MHz for BT
Number of Channel	:	11 channels for 802.11b/g; n(HT20) 9 channels for 802.11; n(HT40) 79 channels For BR+EDR; 40 channels For BLE
Type of Modulation	:	GFSK, $\pi/4$ -DQPSK,8DPSK For DSS; GFSK For BLE; DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Antenna installation	:	PIFA antenna
Antenna Gain	:	0 dBi
Power supply	:	Input:100-240V~2.5A,50-60Hz;Output: 24V/3.75A
Hardware Version	:	N/A
Software Version	:	N/A



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	6	2437	9	2452



The maximum duty cycle as following table:

Test Mode	Duty Cycle(%)
802.11b	100%
802.11g	100%
802.11n(HT20)	100%
802.11n(HT40)	100%


Test Plots:

802.11b






802.11g

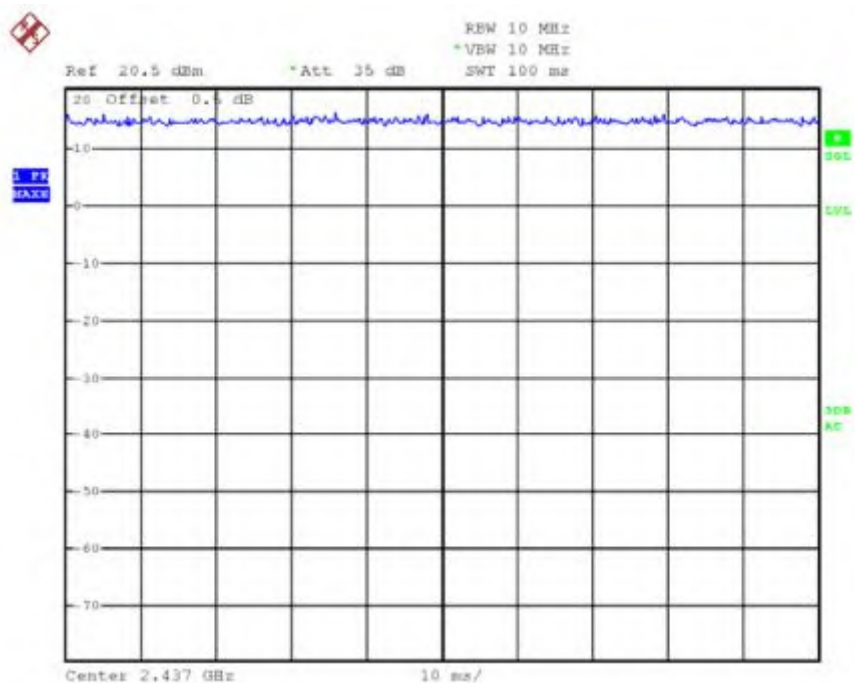


802.11n(HT20)

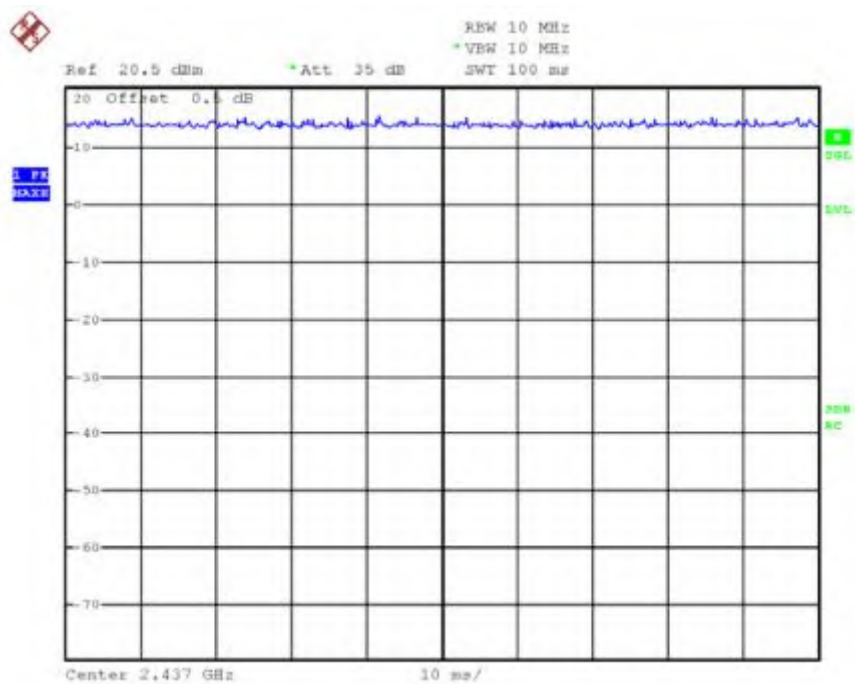



802.11n(HT40)

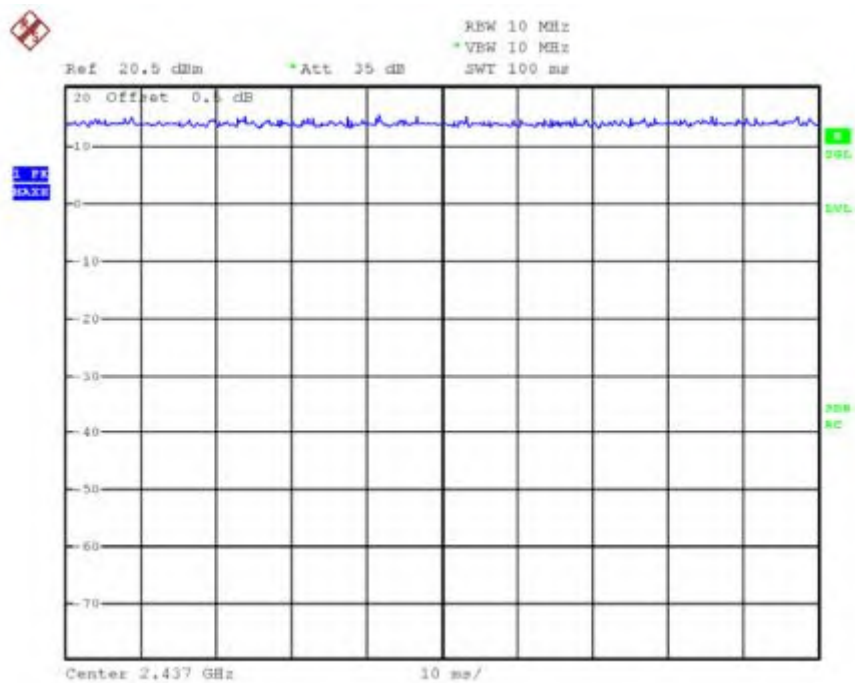



Report No.: PTC21071503901E-FC01

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2021
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2021
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2021
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2021

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2021
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2021
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2021
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2021
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2021
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2021
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2021



Report No.: PTC21071503901E-FC01

Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2021
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2021

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 21, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 21, 2021



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$



Report No.: PTC21071503901E-FC01

4.3 Description of Support Units

Equipment	Model No.	Series No.
N/A	N/A	N/A

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207

Test Method : ANSI C63.10: 2013

Test Result : PASS

Frequency Range : 150kHz to 30MHz

Class/Severity : Class B

5.1 E.U.T. Operation

Operating Environment :


Temperature : 23.9 °C

Humidity : 51.4 % RH


Atmospheric Pressure : 101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

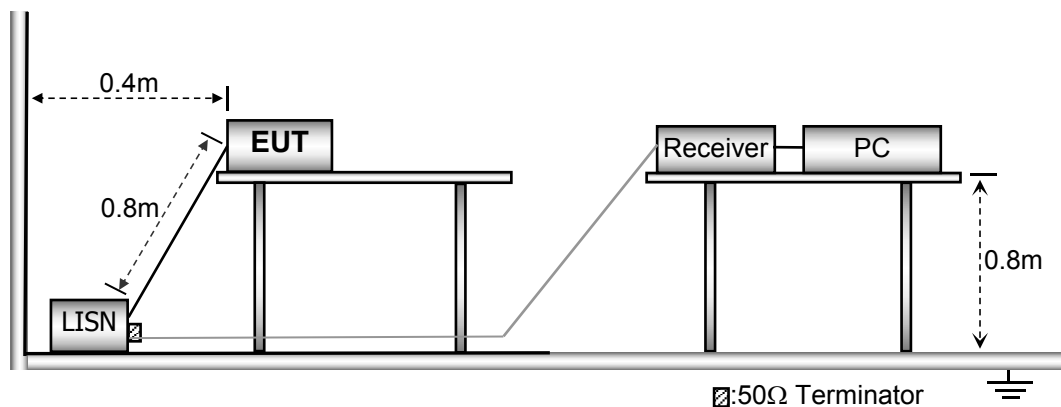

5.3 Test SET-UP (Block Diagram of Configuration)

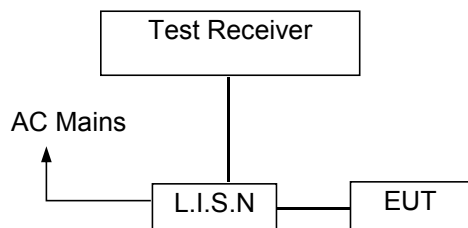

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result


Pass.

During the test, the 120Vac/60Hz and 240Vac/60Hz power supplies were scanned in advance, and it was found that (120Vac/60Hz, TX 802.11b Low Channel) was a poor mode, and the report only reflected the poor mode.

Please refer to the following pages.




Line- AC 120V/60Hz

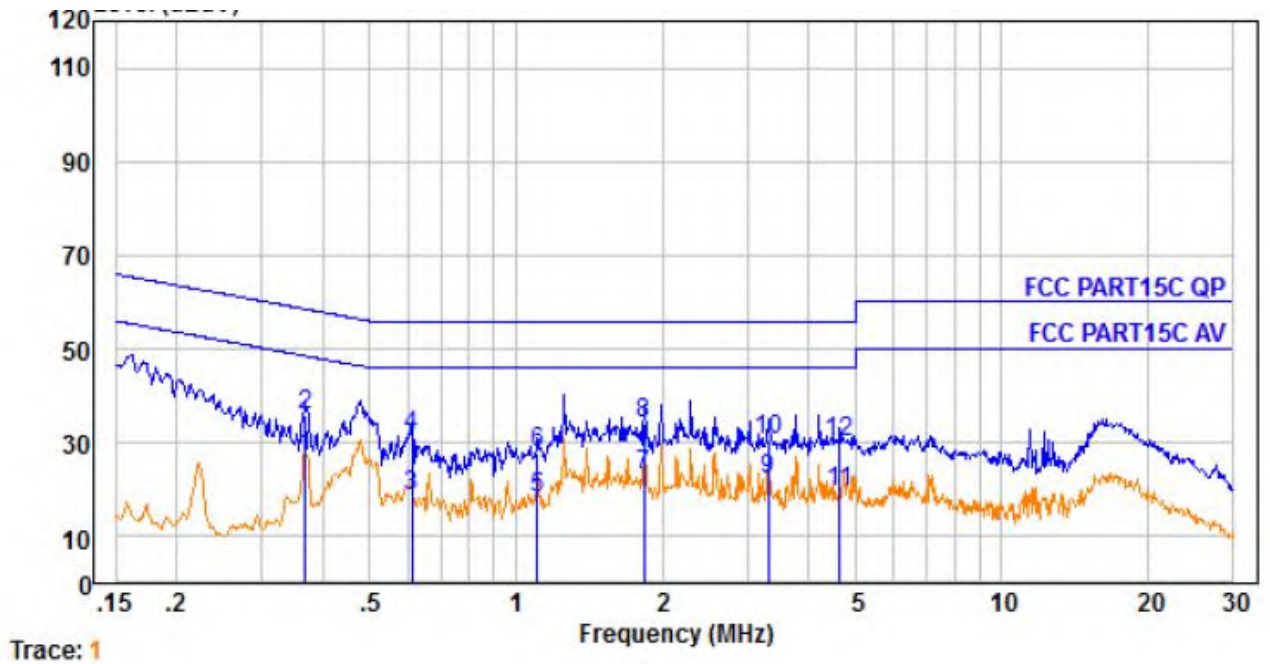

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.369	0.39	9.60	16.91	26.90	48.52	-21.62	Average
2.	0.369	0.39	9.60	25.93	35.92	58.52	-22.60	QP
3.	0.611	0.44	9.61	8.35	18.40	46.00	-27.60	Average
4.	0.611	0.44	9.61	21.33	31.38	56.00	-24.62	QP
5.	1.106	0.46	9.61	8.03	18.10	46.00	-27.90	Average
6.	1.106	0.46	9.61	18.02	28.09	56.00	-27.91	QP
7.	1.839	0.47	9.61	13.00	23.08	46.00	-22.92	Average
8.	1.839	0.47	9.61	24.00	34.08	56.00	-21.92	QP
9.	3.310	0.47	9.64	11.83	21.94	46.00	-24.06	Average
10.	3.310	0.47	9.64	20.60	30.71	56.00	-25.29	QP
11.	4.647	0.49	9.67	9.12	19.28	46.00	-26.72	Average
12.	4.647	0.49	9.67	20.12	30.28	56.00	-25.72	QP



Neutral-AC 120V/60Hz

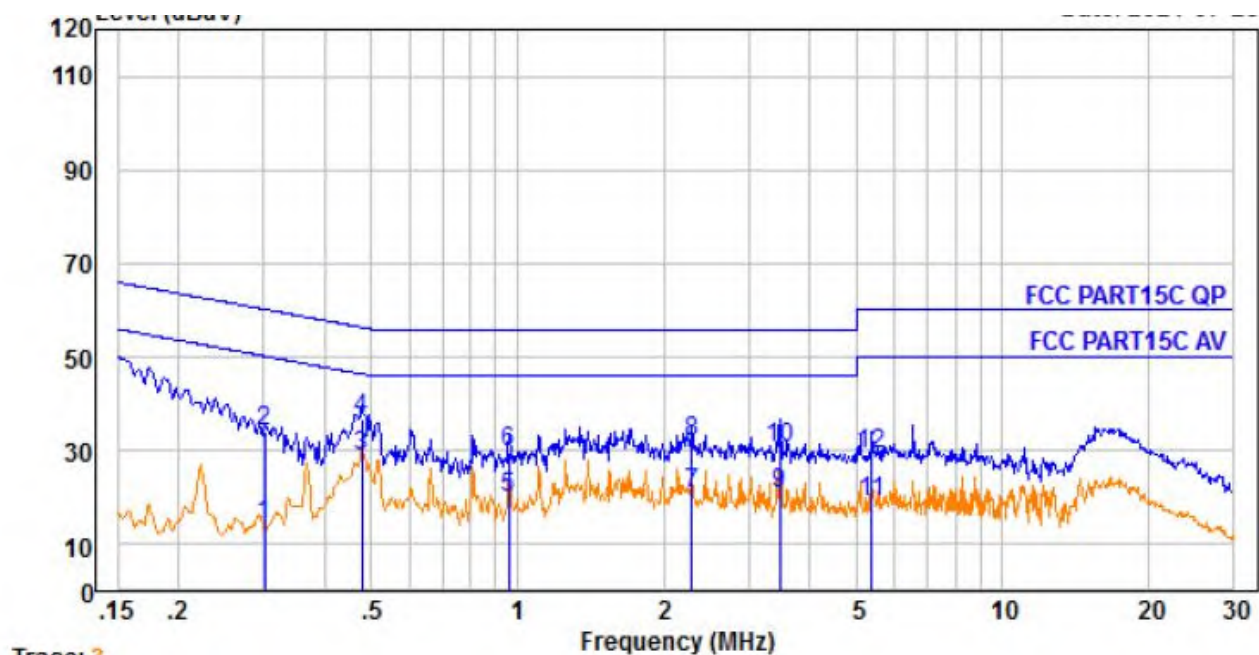

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.302	0.37	9.62	4.28	14.27	50.19	-35.92	Average
2.	0.302	0.37	9.62	24.20	34.19	60.19	-26.00	QP
3.	0.479	0.42	9.63	18.64	28.69	46.36	-17.67	Average
4.	0.479	0.42	9.63	26.78	36.83	56.36	-19.53	QP
5.	0.958	0.46	9.64	9.61	19.71	46.00	-26.29	Average
6.	0.958	0.46	9.64	19.63	29.73	56.00	-26.27	QP
7.	2.285	0.47	9.65	10.64	20.76	46.00	-25.24	Average
8.	2.285	0.47	9.65	21.68	31.80	56.00	-24.20	QP
9.	3.472	0.47	9.67	10.59	20.73	46.00	-25.27	Average
10.	3.472	0.47	9.67	20.53	30.67	56.00	-25.33	QP
11.	5.390	0.51	9.72	8.92	19.15	50.00	-30.85	Average
12.	5.390	0.51	9.72	18.99	29.22	60.00	-30.78	QP



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 24.5 °C
 Humidity: : 52 % RH
 Atmospheric Pressure: : 101.3kPa
 Test Voltage : AC 120V 60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

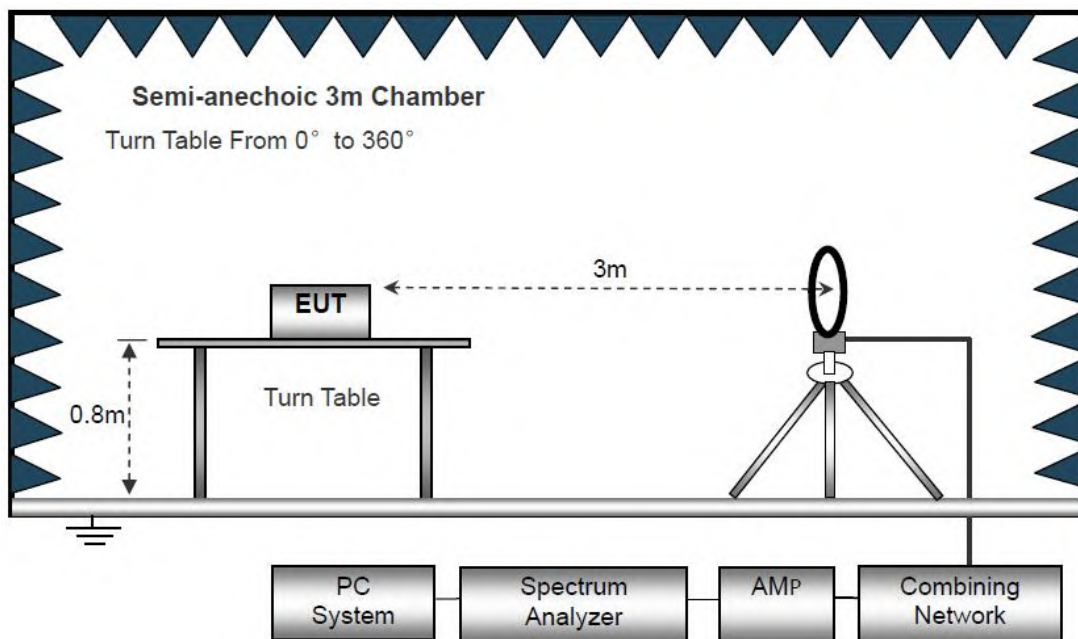

The test setup for emission measurement from 30 MHz to 1 GHz.

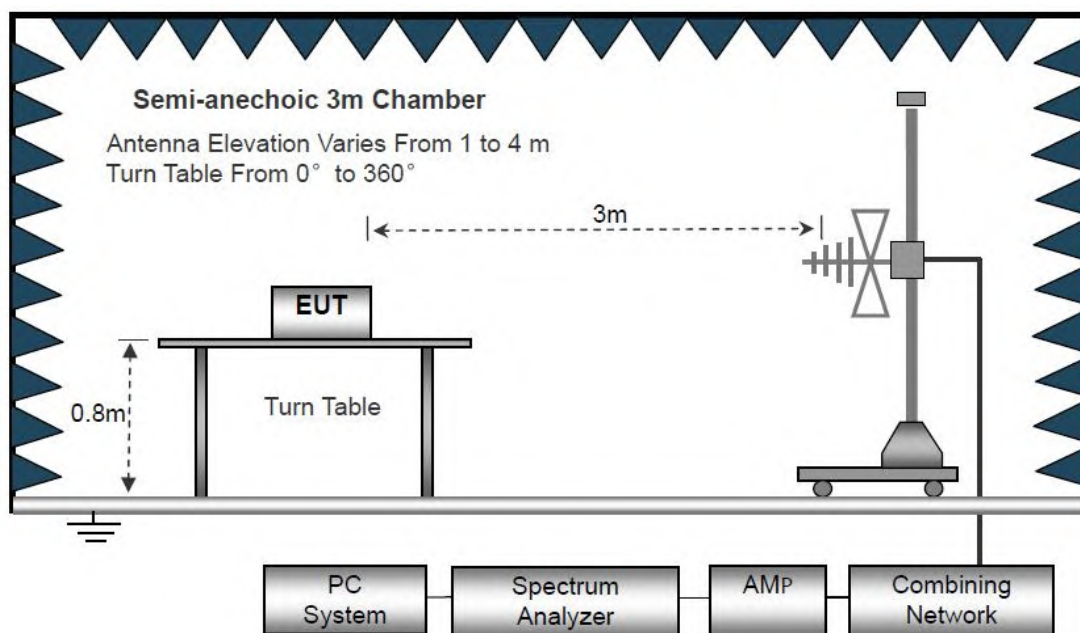

The test setup for emission measurement above 1 GHz

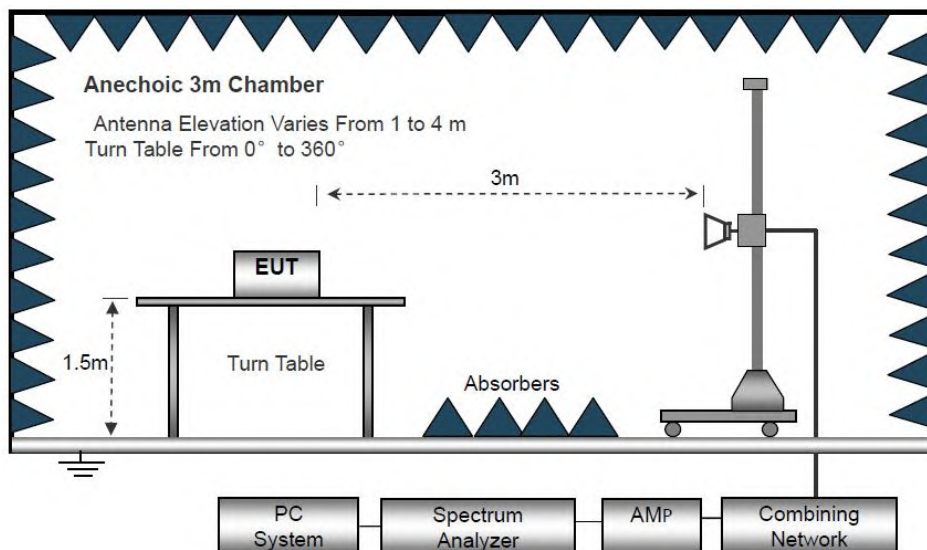

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



Antenna Polarization: Horizontal

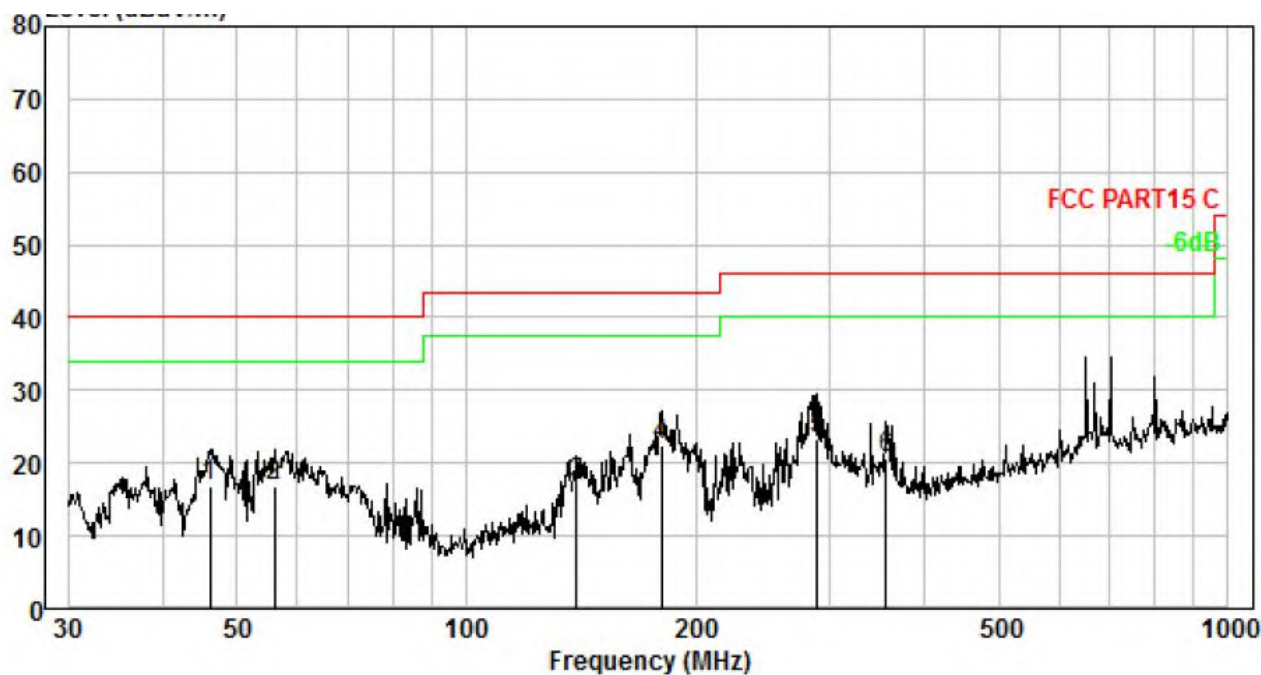


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	46.016	1.94	12.26	32.54	29.92	16.82	40.00	-23.18	QP
2.	56.001	2.27	12.02	32.61	29.93	16.97	40.00	-23.03	QP
3.	139.361	3.84	13.26	29.90	30.01	16.99	43.50	-26.51	QP
4.	180.649	4.29	12.45	35.59	30.03	22.30	43.50	-21.20	QP
5.	289.002	5.10	13.06	35.57	30.29	23.44	46.00	-22.56	QP
6.	355.427	5.45	14.45	31.41	30.54	20.77	46.00	-25.23	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical

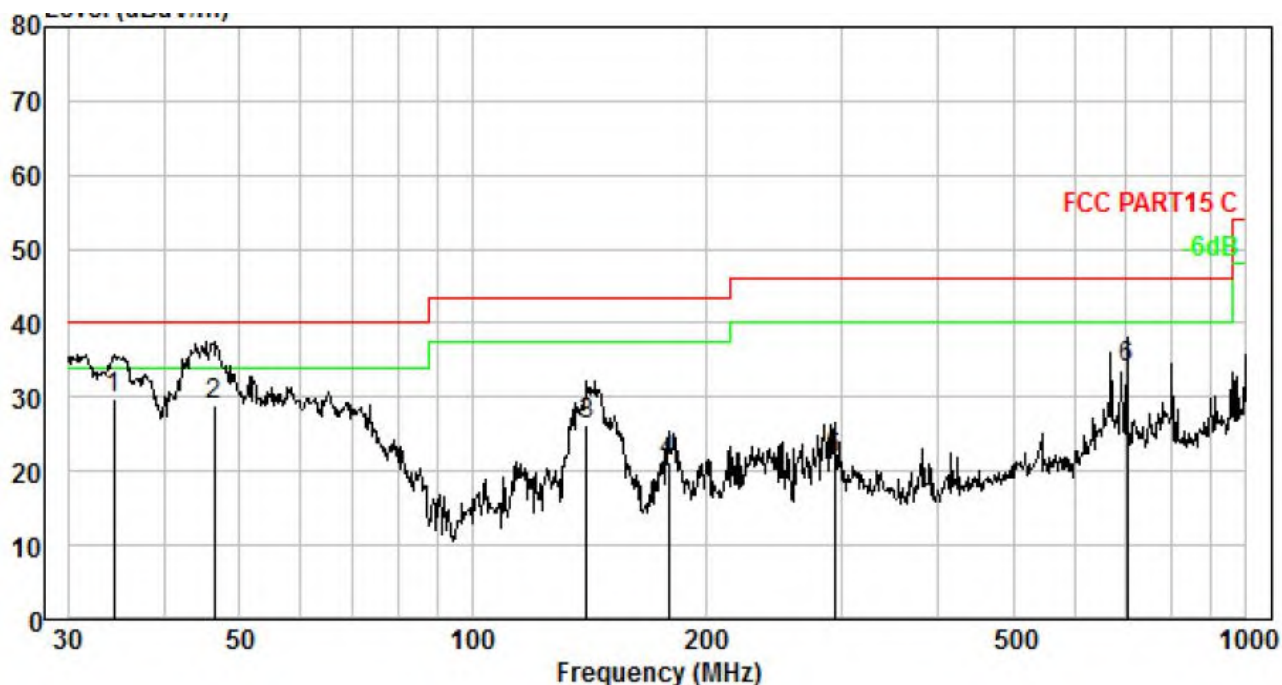

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	34.396	1.44	12.14	46.13	29.90	29.81	40.00	-10.19	QP
2.	46.340	1.95	12.24	44.71	29.92	28.98	40.00	-11.02	QP
3.	140.342	3.85	13.31	39.12	30.01	26.27	43.50	-17.23	QP
4.	179.386	4.27	12.55	34.50	30.03	21.29	43.50	-22.21	QP
5.	294.114	5.13	13.12	33.53	30.31	21.47	46.00	-24.53	QP
6.	701.761	6.62	20.12	38.39	31.08	34.05	46.00	-11.95	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test Frequency: From 1GHz to 18GHz

Worst case 802.11b

Test Mode: 2412					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	43.11	32.29	4.1	28.45	51.05	74	-22.95	V
7236	36.52	35.99	6.22	27.83	50.9	74	-23.1	V
9648	35.04	38.11	7.83	25.1	55.88	74	-18.12	V
4824	41.09	32.29	4.1	28.45	49.03	74	-24.97	H
7236	35.21	35.99	6.22	27.83	49.59	74	-24.41	H
9648	33.87	38.11	7.83	25.1	54.71	74	-19.29	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	30.97	32.29	4.1	28.45	38.91	54	-15.09	V
7236	25.06	35.99	6.22	27.83	39.44	54	-14.56	V
9648	26.11	38.11	7.83	25.1	46.95	54	-7.05	V
4824	34.08	32.29	4.1	28.45	42.02	54	-11.98	H
7236	29.05	35.99	6.22	27.83	43.43	54	-10.57	H
9648	24.13	38.11	7.83	25.1	44.97	54	-9.03	H



Worst case 802.11b

Test Mode: 2437					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	41.85	32.35	4.12	28.44	49.88	74	-24.12	V
7311	33.67	36.08	6.3	27.74	48.31	74	-25.69	V
9748	35.94	38.25	7.91	24.65	57.45	74	-16.55	V
4874	40.15	32.35	4.12	28.44	48.18	74	-25.82	H
7311	36.63	36.08	6.3	27.74	51.27	74	-22.73	H
9748	35.79	38.25	7.91	24.65	57.3	74	-16.7	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	33.11	32.35	4.12	28.44	41.14	54	-12.86	V
7311	27.05	36.08	6.3	27.74	41.69	54	-12.31	V
9748	25.31	38.25	7.91	24.65	46.82	54	-7.18	V
4874	30.99	32.35	4.12	28.44	39.02	54	-14.98	H
7311	26.12	36.08	6.3	27.74	40.76	54	-13.24	H
9748	25.21	38.25	7.91	24.65	46.72	54	-7.28	H



Worst case 802.11b

Test Mode: 2462					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	46.35	32.41	4.14	28.42	54.48	74	-19.52	V
7386	37.79	36.15	6.36	27.68	52.62	74	-21.38	V
9848	38.85	38.35	7.97	24.33	60.84	74	-13.16	V
4924	42.29	32.41	4.14	28.42	50.42	74	-23.58	H
7386	36.18	36.15	6.36	27.68	51.01	74	-22.99	H
9848	35.22	38.35	7.97	24.33	57.21	74	-16.79	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	33.88	32.41	4.14	28.42	42.01	54	-11.99	V
7386	27.74	36.15	6.36	27.68	42.57	54	-11.43	V
9848	22.06	38.35	7.97	24.33	44.05	54	-9.95	V
4924	33.41	32.41	4.14	28.42	41.54	54	-12.46	H
7386	27.45	36.15	6.36	27.68	42.28	54	-11.72	H
9848	24.22	38.35	7.97	24.33	46.21	54	-7.79	H

Note:

1. The testing has been conformed to 10*2462MHz=24620MHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

2.4G WiFi (802.11b/g/n)mode have been tested, and the worst result(802.11g) was report as below



Test Mode: Worst case 802.11g Low Channel 2412MHz

Test Mode: 802.11g Low Channel 2412MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2390	55.11	27.39	2.77	34.01	51.26	74	-22.74	H	Peak
2400	28.87	27.42	2.78	34.01	25.06	74	-48.94	H	
2390	54.97	27.39	2.77	34.01	51.12	74	-22.88	V	
2400	62.21	27.42	2.78	34.01	58.4	74	-15.6	V	
2390	41.58	27.39	2.77	34.01	37.73	54	-16.27	H	Average
2400	46.32	27.42	2.78	34.01	42.51	54	-11.49	H	
2390	42.89	27.39	2.77	34.01	39.04	54	-14.96	V	
2400	48.17	27.42	2.78	34.01	44.36	54	-9.64	V	

Test Mode: Worst case 802.11g High Channel 2462MHz

Test Mode: 802.11g High Channel 2462MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2483.5	55.69	27.7	2.84	34.03	52.2	74	-21.8	H	Peak
2500	53.36	27.75	2.86	34.03	49.94	74	-24.06	H	
2483.5	56.12	27.7	2.84	34.03	52.63	74	-21.37	V	
2500	54.21	27.75	2.86	34.03	50.79	74	-23.21	V	
2483.5	40.97	27.7	2.84	34.03	37.48	54	-16.52	H	Average
2500	38.85	27.75	2.86	34.03	35.43	54	-18.57	H	
2483.5	43.39	27.7	2.84	34.03	39.9	54	-14.1	V	
2500	39.52	27.75	2.86	34.03	36.1	54	-17.9	V	

Test Frequency: From 18GHz to 25GHz

The measurements were more than 20dB below the limit and not reported.



7 Conducted Spurious Emission

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result




802.11 b

Low Channel Worstcase mode

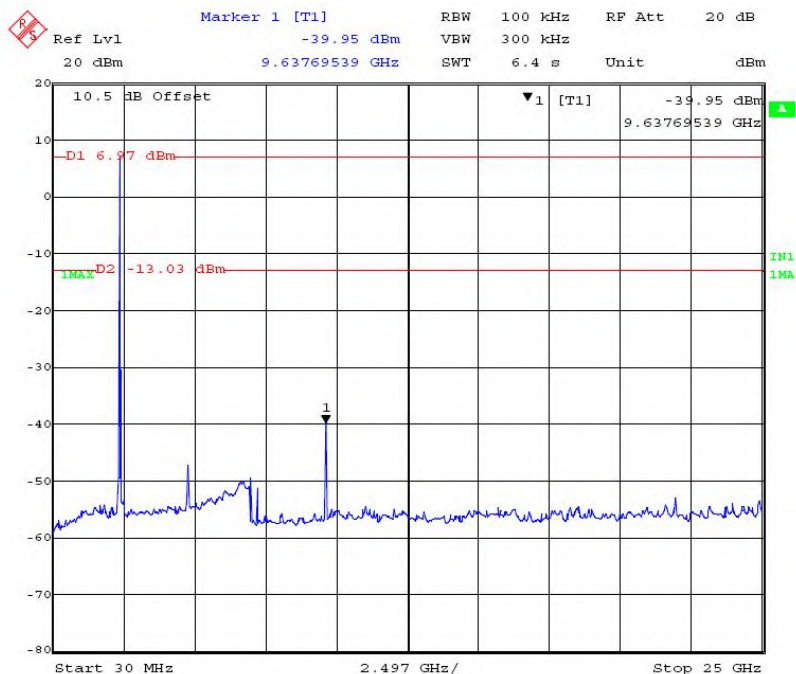


802.11 g

Low Channel Worstcase mode

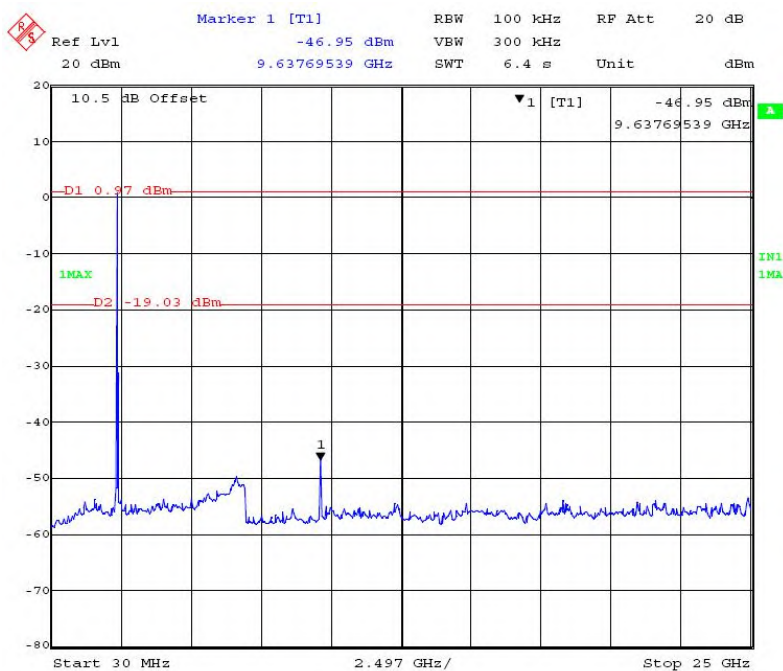


802.11 HT20

Low Channel Worstcase mode

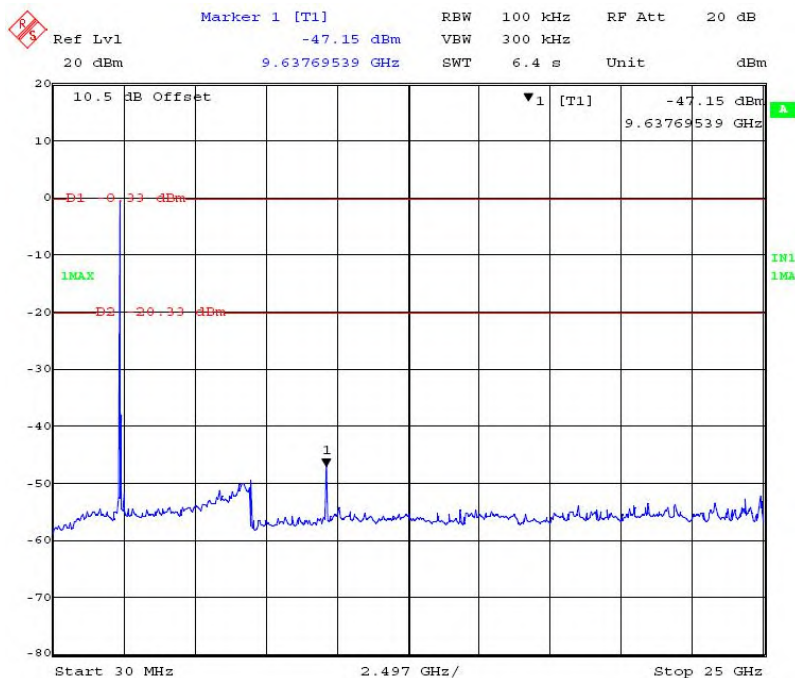

802.11 HT40

Low Channel Worstcase mode

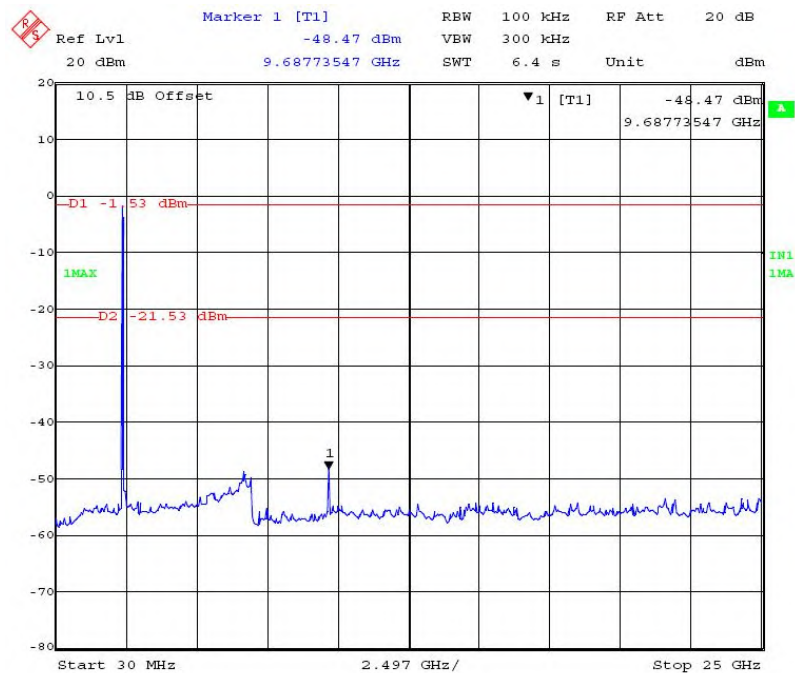




8 Band Edge Measurement


Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold





802.11b

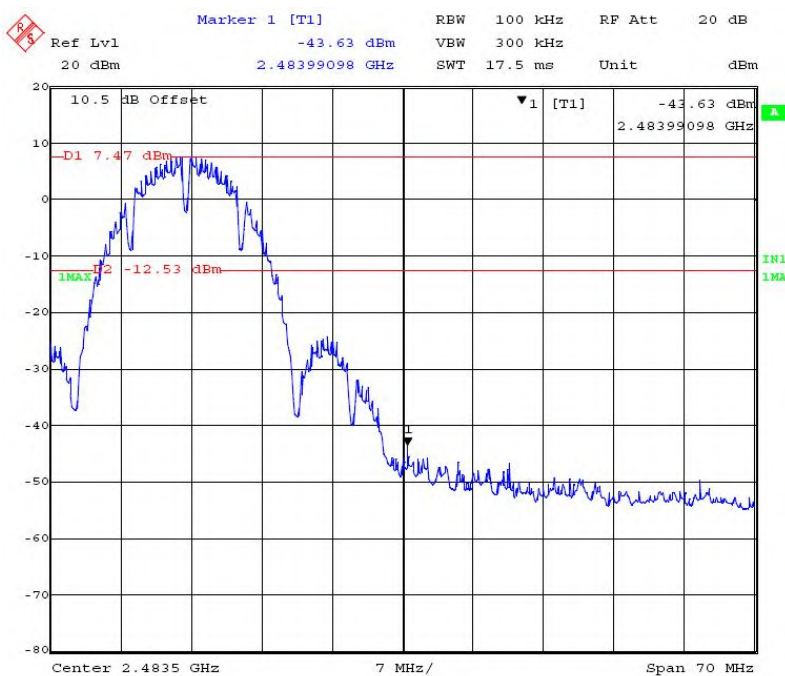





802.11g

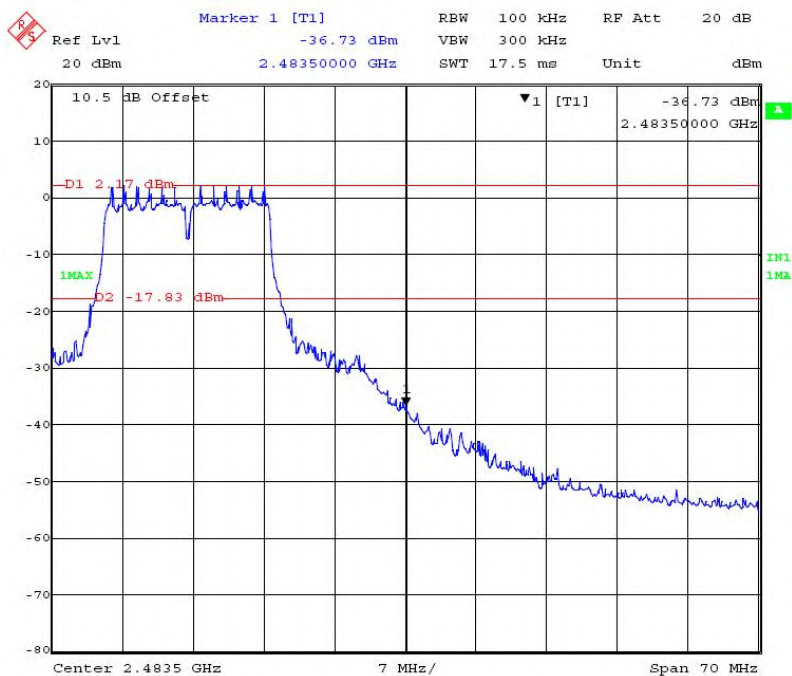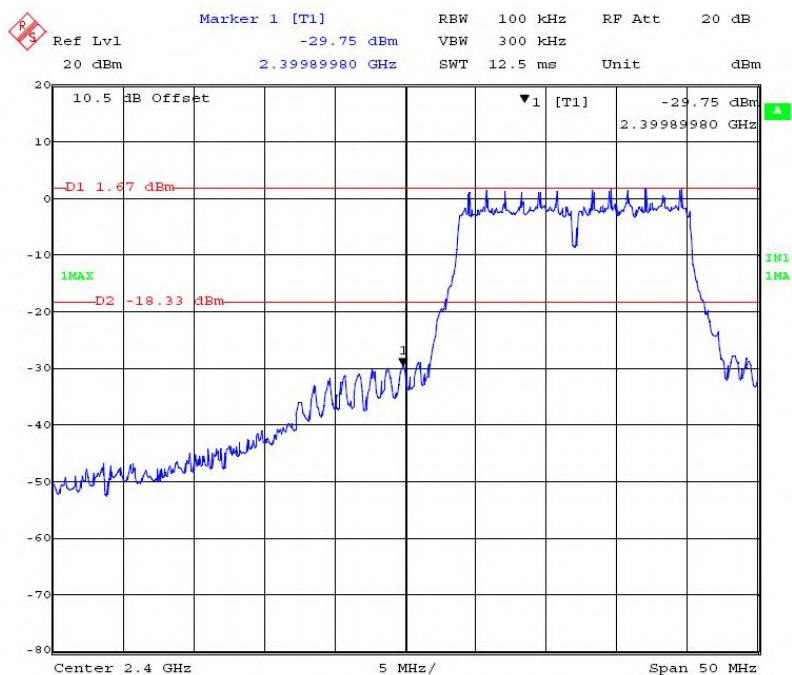





802.11n-H20

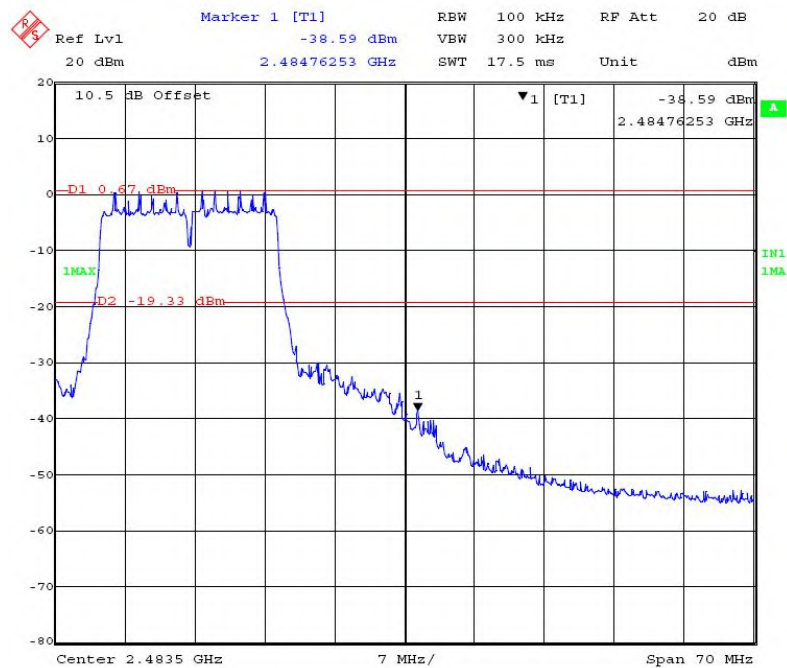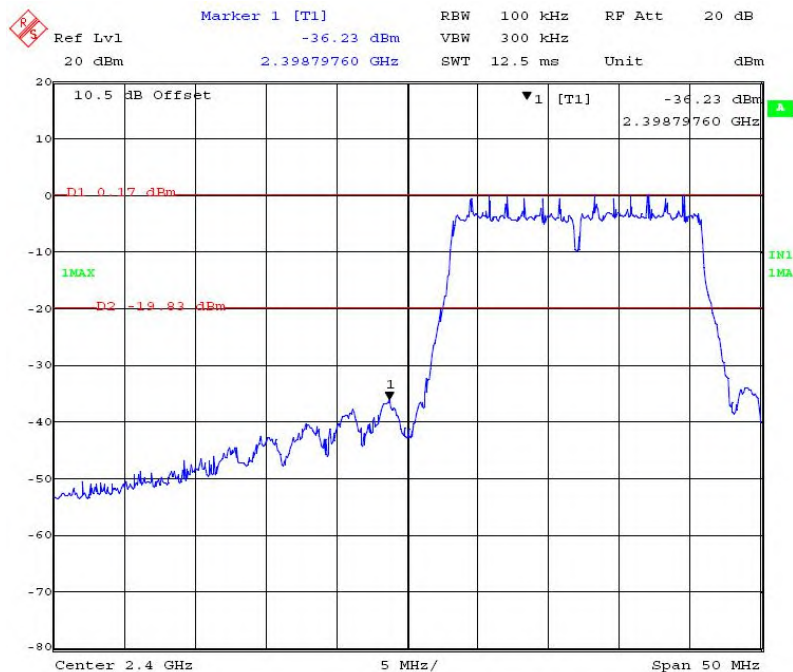



802.11n-H40

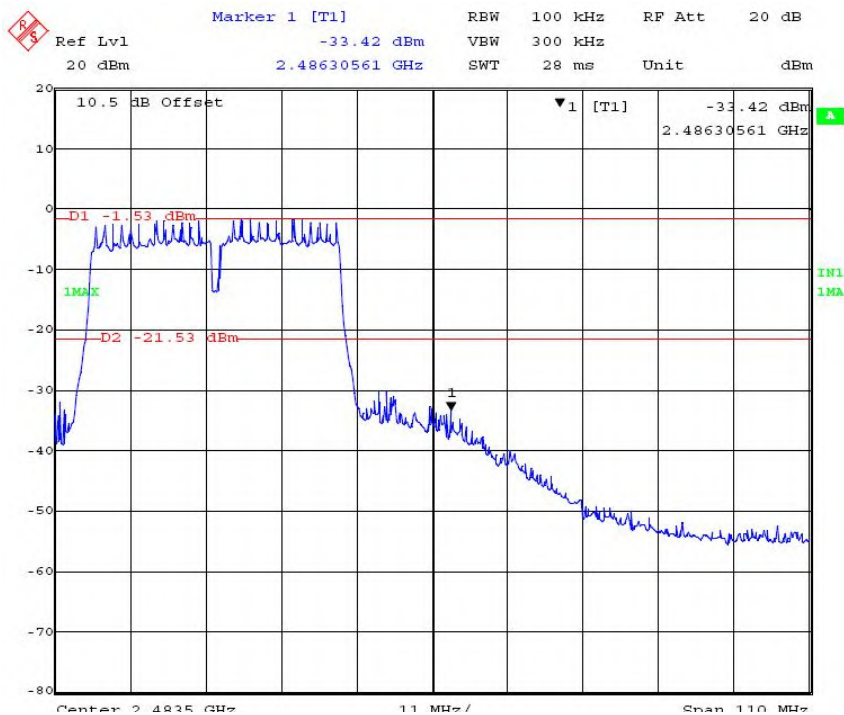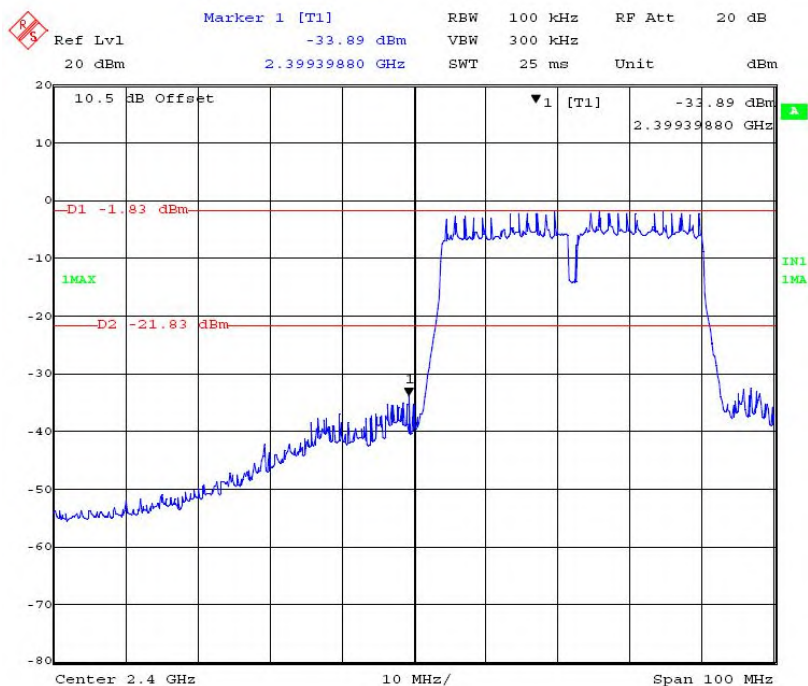



9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013


Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Result

Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	10.261	10.190	10.200	≥500kHz
802.11g	16.513	16.523	16.533	≥500kHz
802.11n-HT20	17.816	17.806	17.816	≥500kHz
802.11n-HT40	36.733	36.733	36.733	≥500kHz



Ref Lvl 20 dBm Delta 1 [T1] -1.44 dB RBW 100 kHz RF Att 20 dB

10.5 dB Offset

D1 7.14 dBm D2 1.14 dBm

10.26052104 MHz

▼1 [T1] -0.47 dBm

▲1 [T1] -1.44 dB

10.26052104 MHz

1MAX

IN1 IMA

Center 2.412 GHz 4 MHz/ Span 40 MHz

Delta 1 [T1]

Ref Lvl 20 dBm

1.46 dB

10.19038076 MHz

RBW 100 kHz

VBW 300 kHz

SWT 10 ms

RF Att 20 dB

Unit dBm

10.5 dB Offset

▼1 [T1] -0.25 dBm

▲1 [T1] 1.46 dB

10.19038076 MHz

D1 7.14 dBm

D2 1.14 dBm

1MAX

IN1

IMA


Center 2.437 GHz

4 MHz/


Span 40 MHz




802.11b High Channel

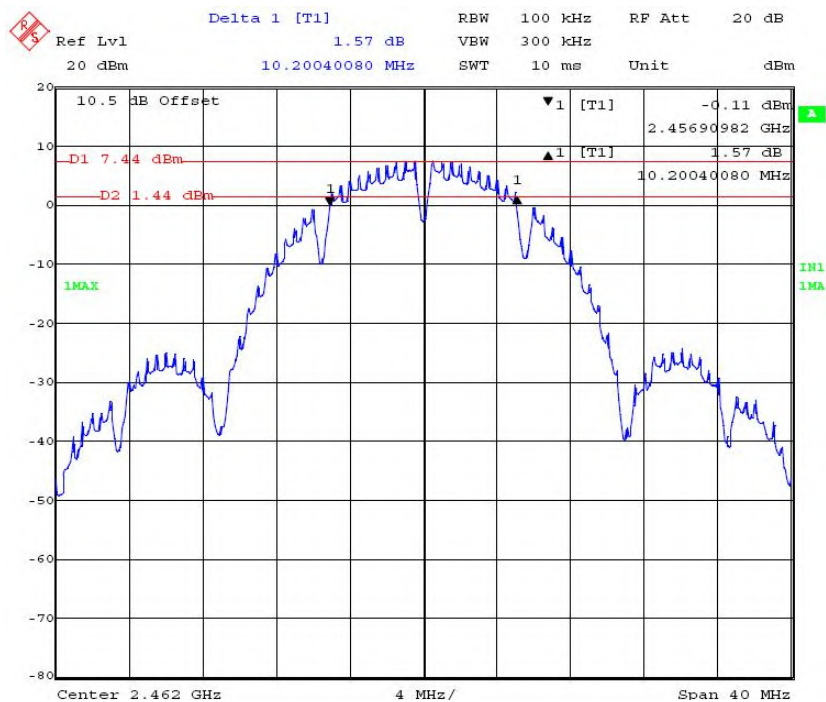

802.11g Low Channel

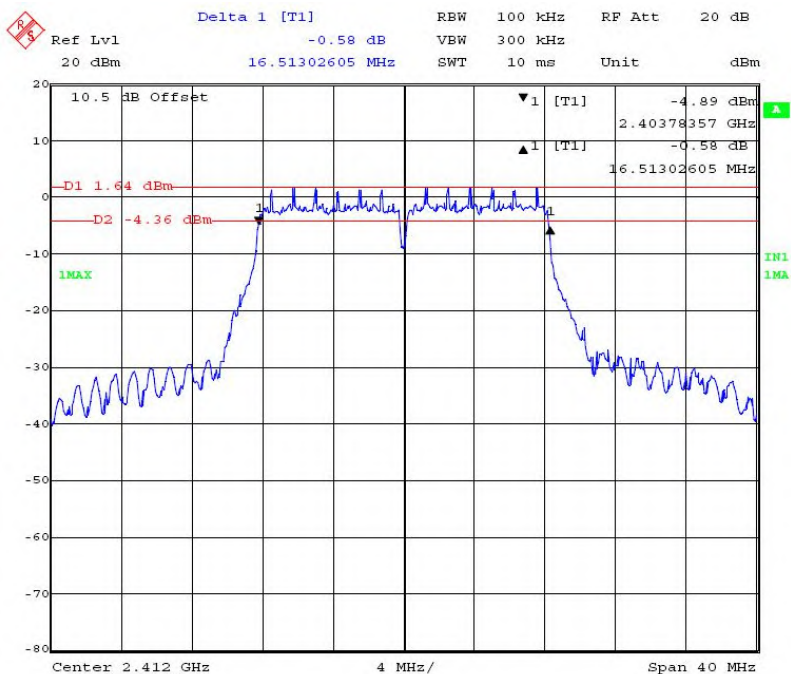



Delta 1 [T1]

Ref Lvl -0.64 dB

RBW 100 kHz

RF Att 20 dB

20 dBm

16.52304609 MHz

SWT 10 ms

Unit dBm

10.5 dB Offset

▼1 [T1] -4.88 dBm

▲1 [T1] -0.64 dB

16.52304609 MHz

D1 1.64 dBm

D2 -4.36 dBm

1MAX

IN1 IMA

Center 2.437 GHz

4 MHz/

Span 40 MHz

Delta 1 [T1] -0.78 dB RBW 100 kHz RF Att 20 dB

Ref Lvl 20 dBm 16.53306613 MHz SWT 10 ms Unit dBm

10.5 dB Offset

▼ 1 [T1] -4.24 dBm

▲ 1 [T1] -0.78 dB

D1 2.14 dBm

D2 -3.86 dBm


IN1

IMA


Center 2.462 GHz 4 MHz/ Span 40 MHz



802.11n-HT20 Low Channel

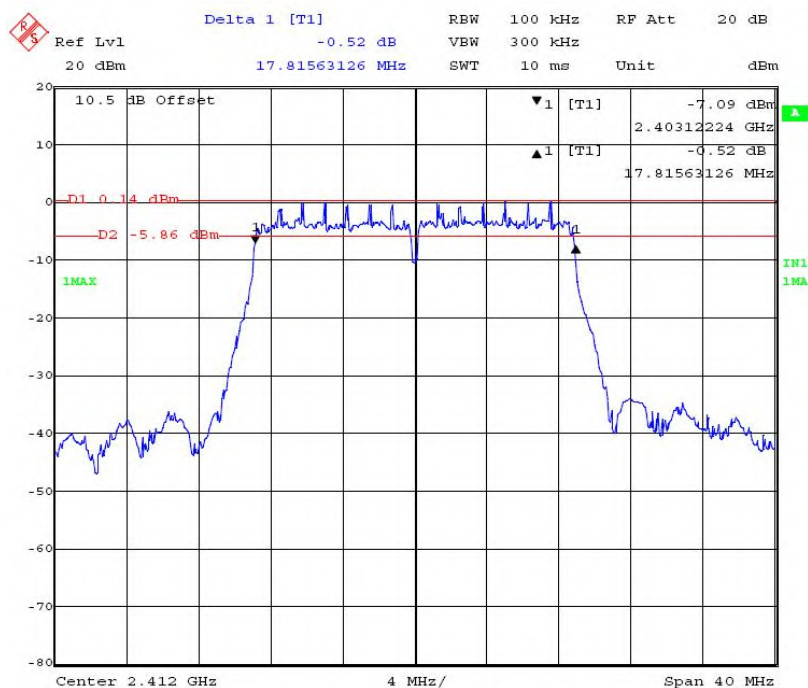


802.11n-HT20 Middle Channel

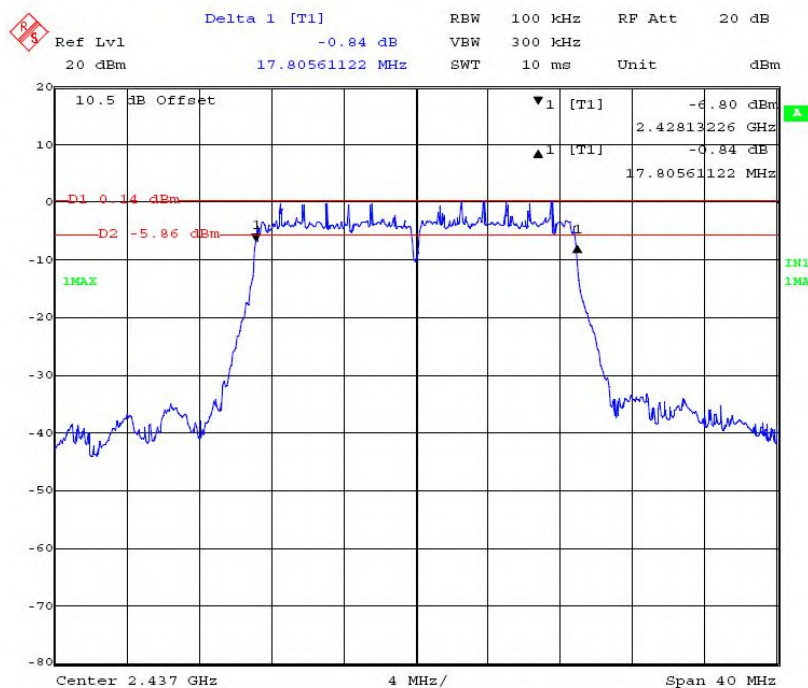




802.11n-HT20 High Channel

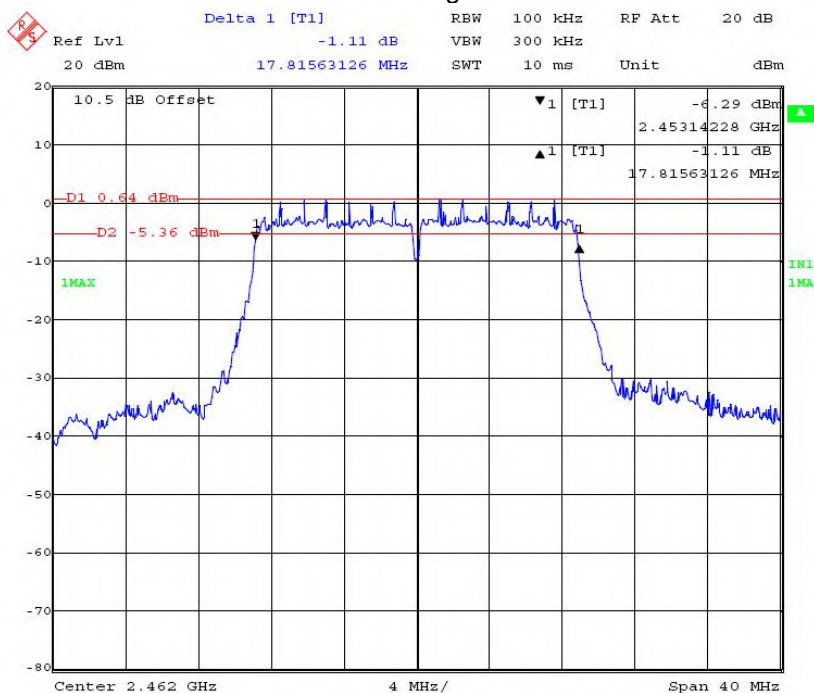


802.11n-HT40 Low Channel

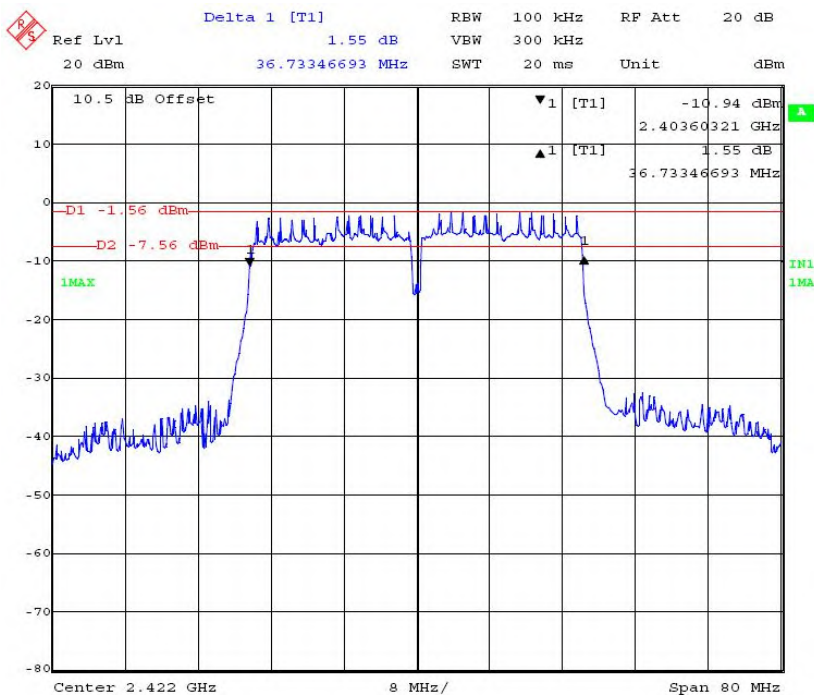




802.11n-HT40 Middle Channel

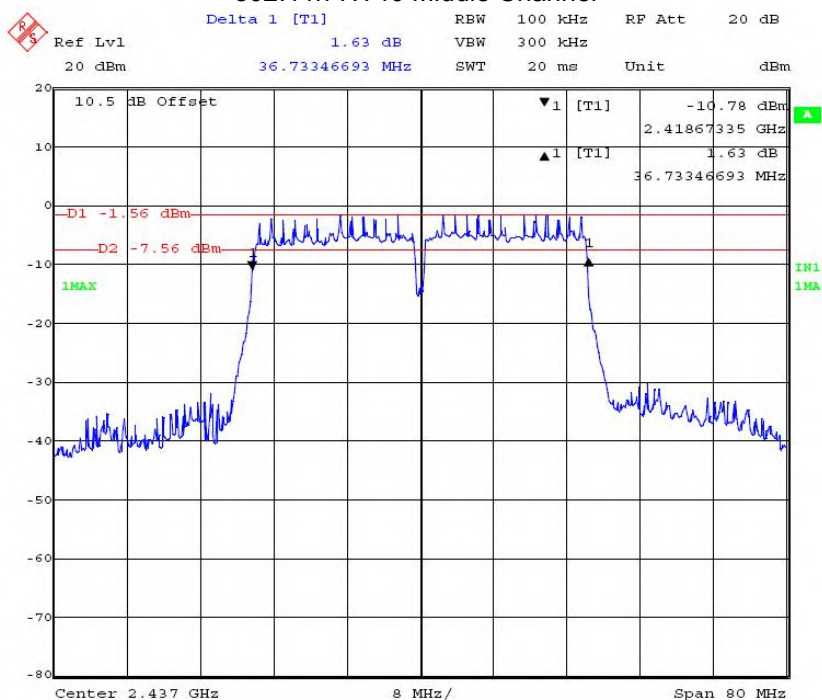

802.11n-HT40 High Channel

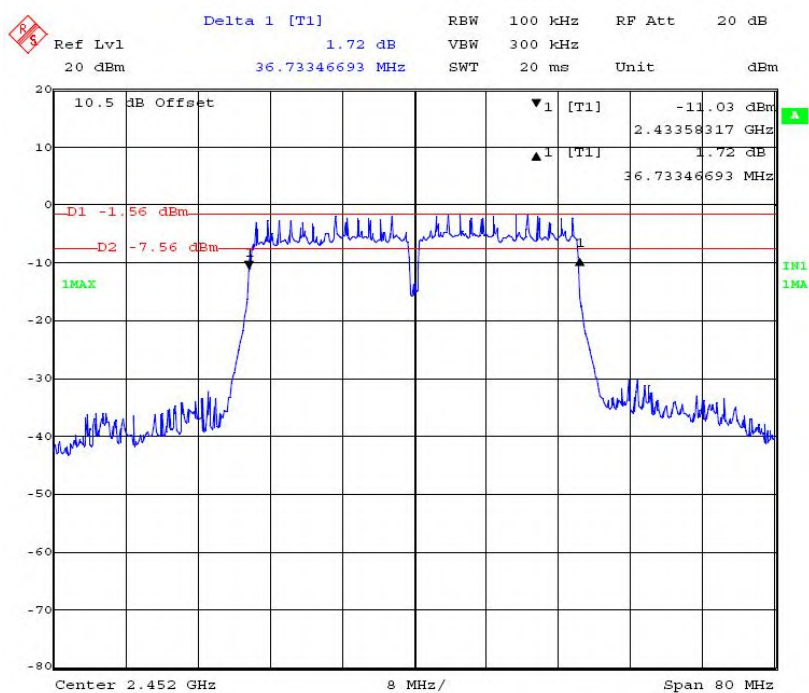



10 Maximum Peak Output Power

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

10.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.1.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

10.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	17.27	17.32	17.76	1W(30dBm)
802.11g	17.48	17.54	17.94	1W(30dBm)
802.11n-HT20	17.09	17.13	17.62	1W(30dBm)
802.11n-HT40	16.75	16.10	16.85	1W(30dBm)



11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.1 Test Procedure


1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span = 1.5 times the DTS bandwidth
RBW = 3KHz, VBW = 10KHz
Sweep time = auto couple
Detector = peak
Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

11.2 Test Result


Modulation	Power Spectral density (dBm/3kHz)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	-8.84	-9.19	-8.86	8dBm/3kHz
802.11g	-14.33	-14.25	-13.98	8dBm/3kHz
802.11n-HT20	-15.72	-16.38	-15.06	8dBm/3kHz
802.11n-HT40	-17.60	-17.08	-17.78	8dBm/3kHz



802.11b Low Channel

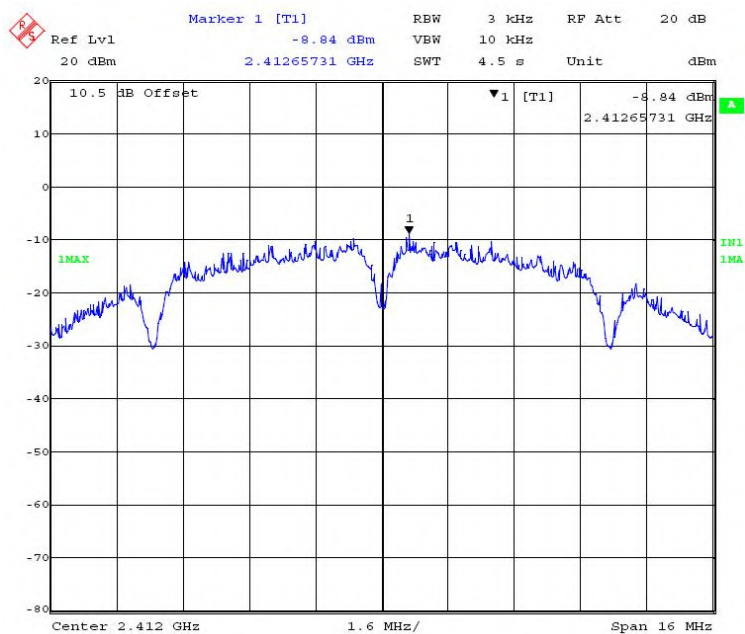


802.11b Middle Channel

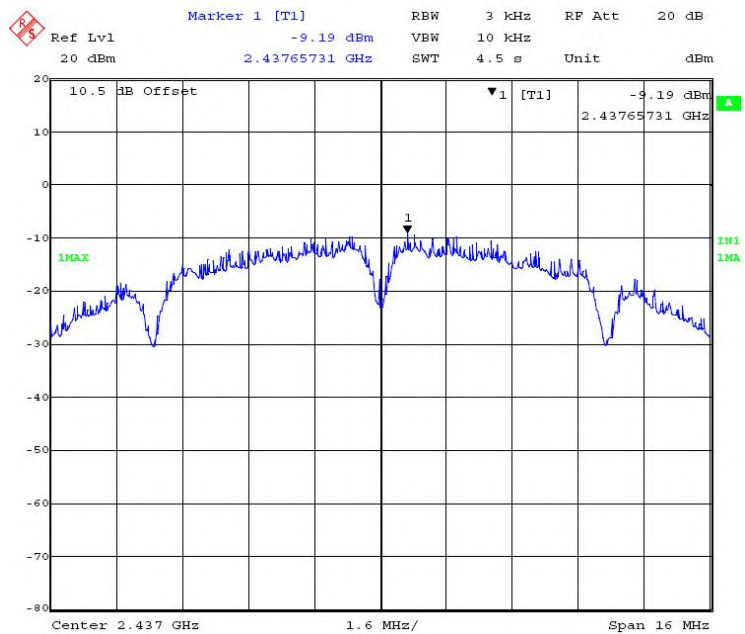




802.11b High Channel

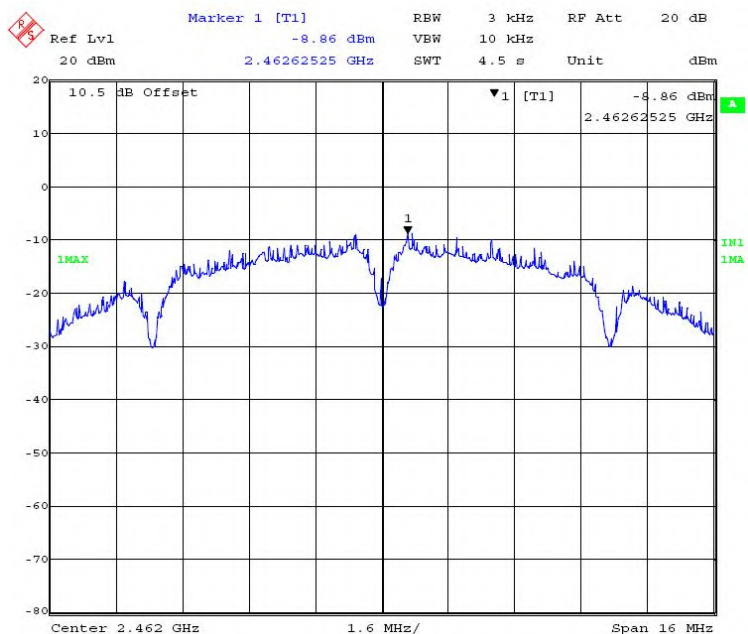


802.11g Low Channel

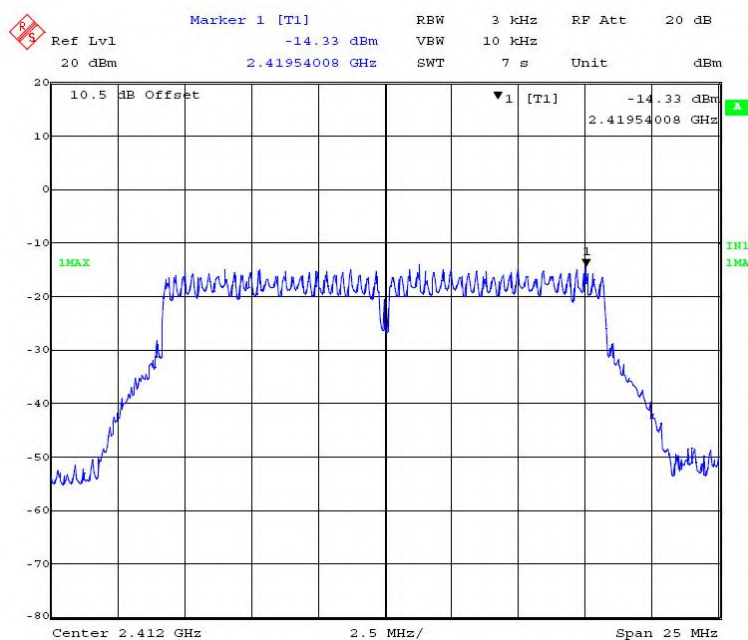




802.11g Middle Channel

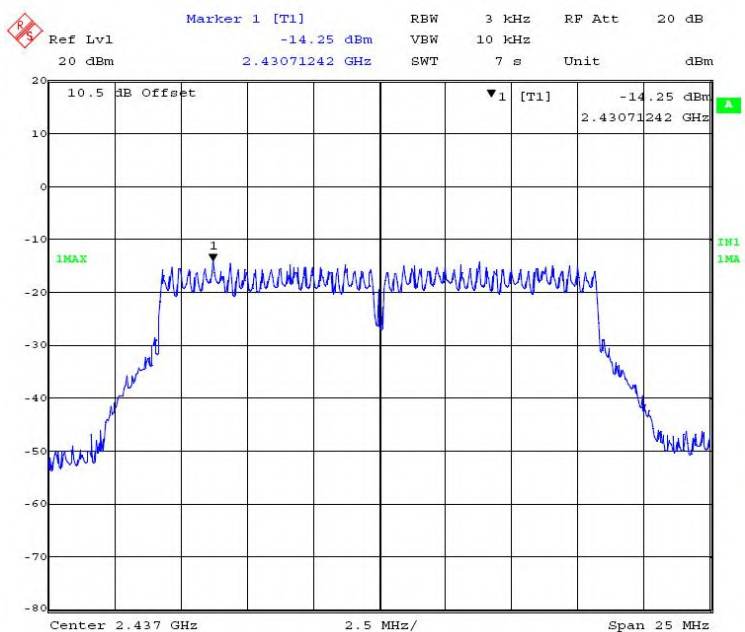


802.11g High Channel

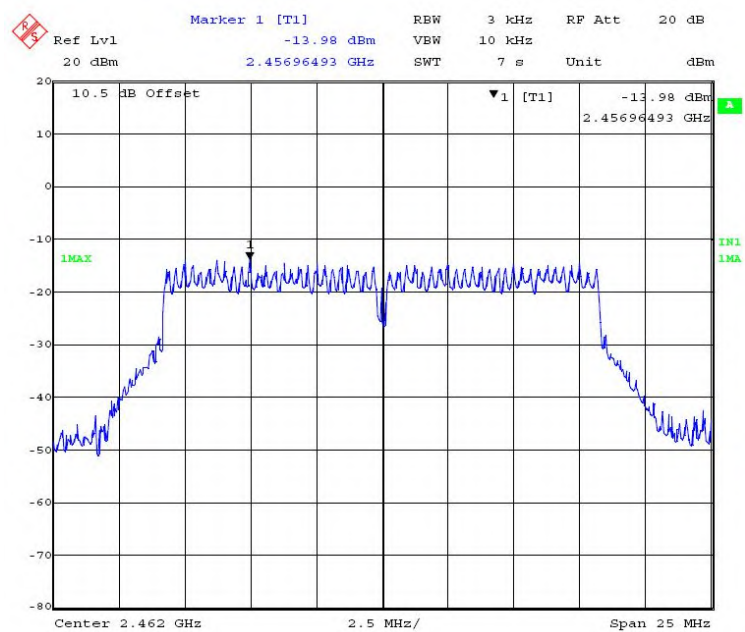




802.11n-HT20 Low Channel

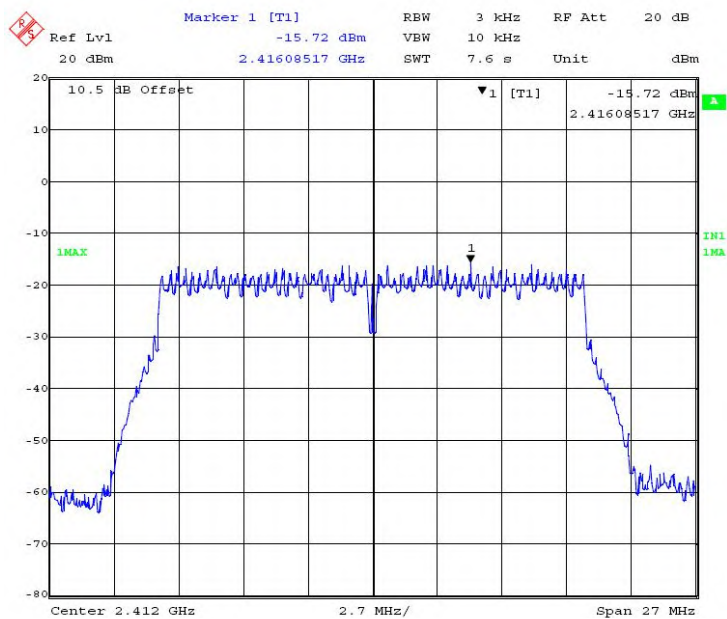


802.11n-HT20 Middle Channel

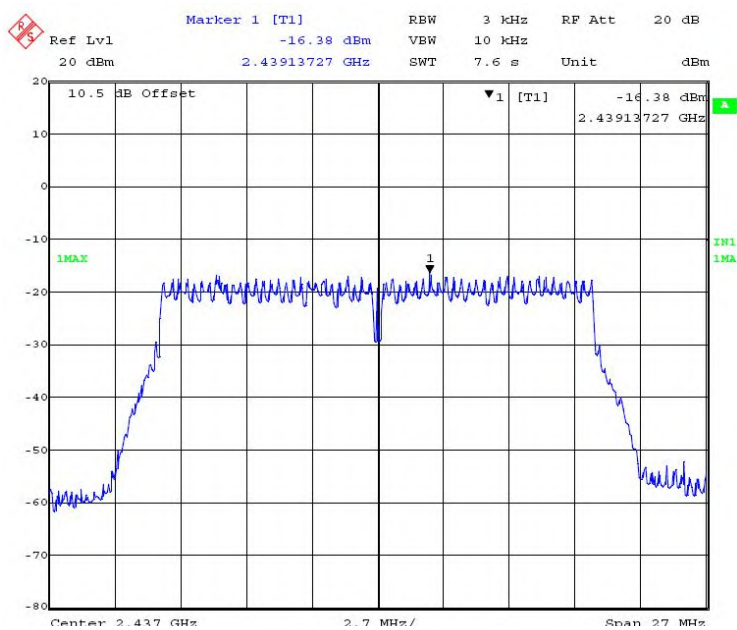





802.11n-HT20 High Channel

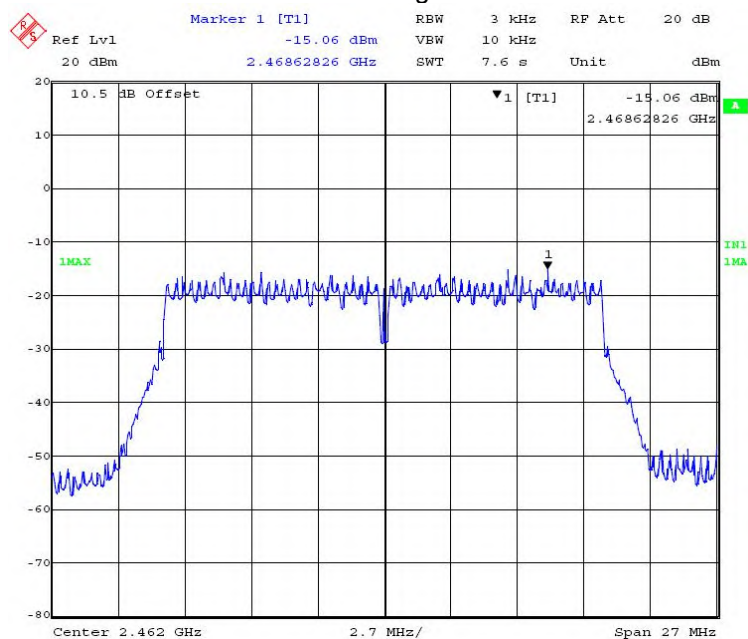


802.11n-HT40 Low Channel

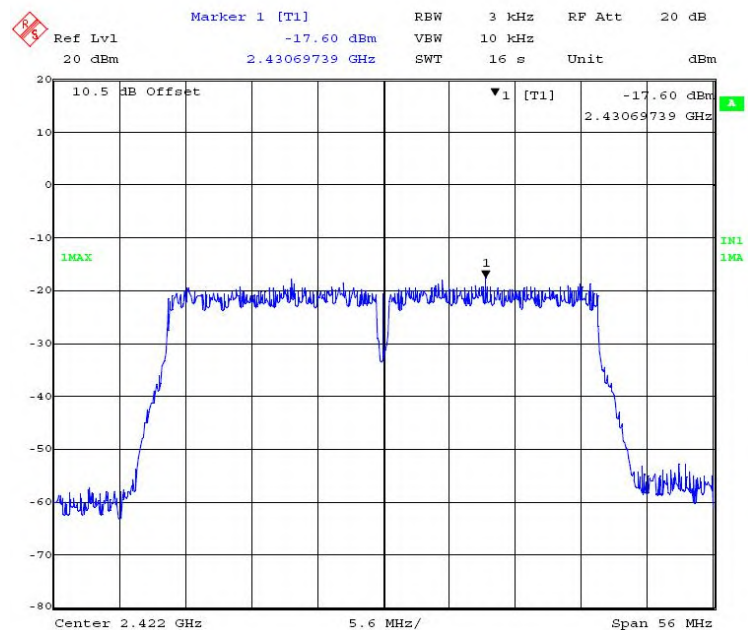

802.11n-HT40 Middle Channel

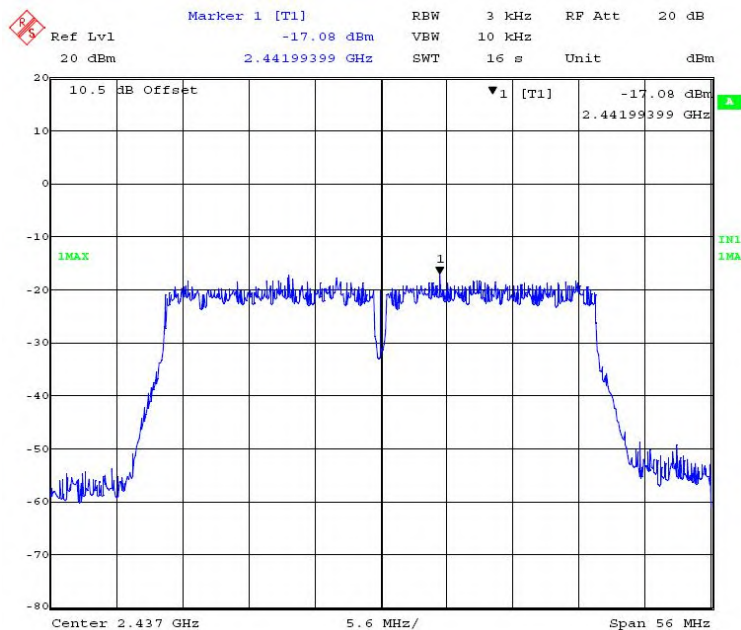

802.11n-HT40 High Channel

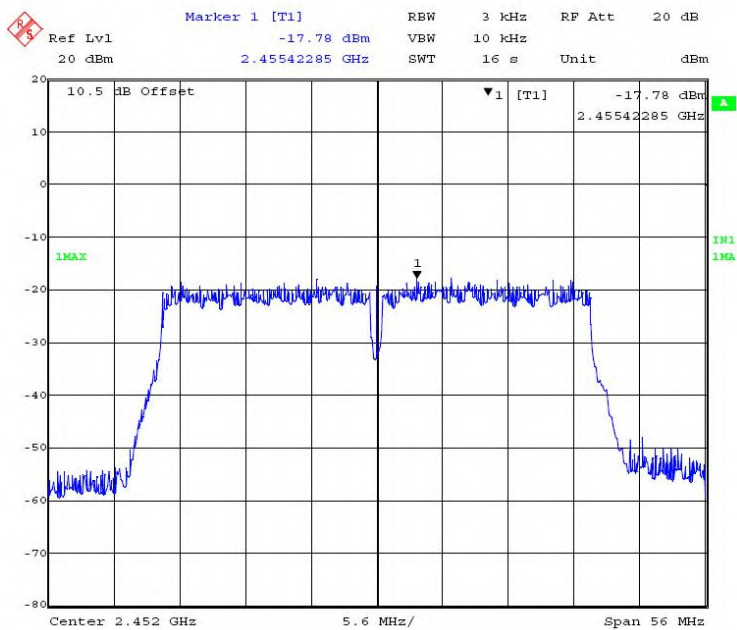



12 Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna, permanent attached antenna, is PIFA Antenna. The antenna's gain is 0 dBi and meets the requirement.

13 Test Setup


Conducted Emissions



Radiated Spurious Emissions
From 30MHz-1000MHz





Test frequency from Above 1GHz

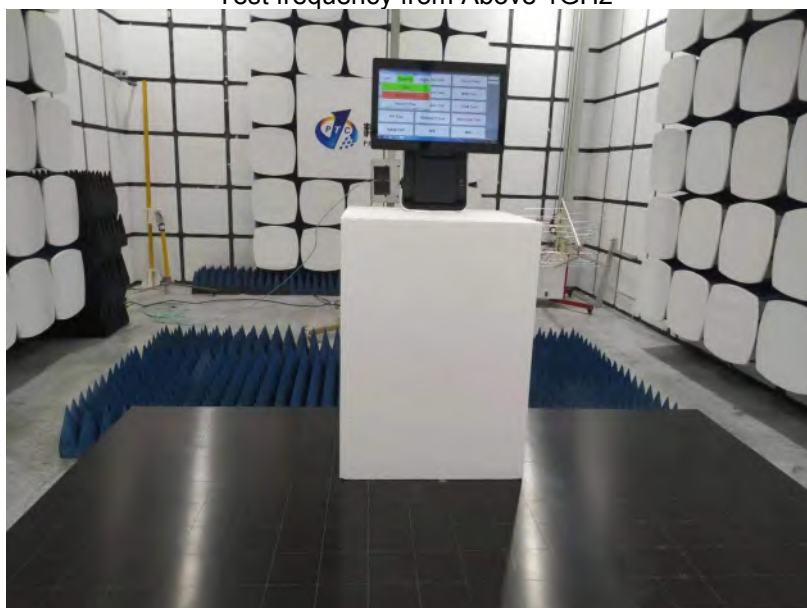


14 EUT PHOTOS





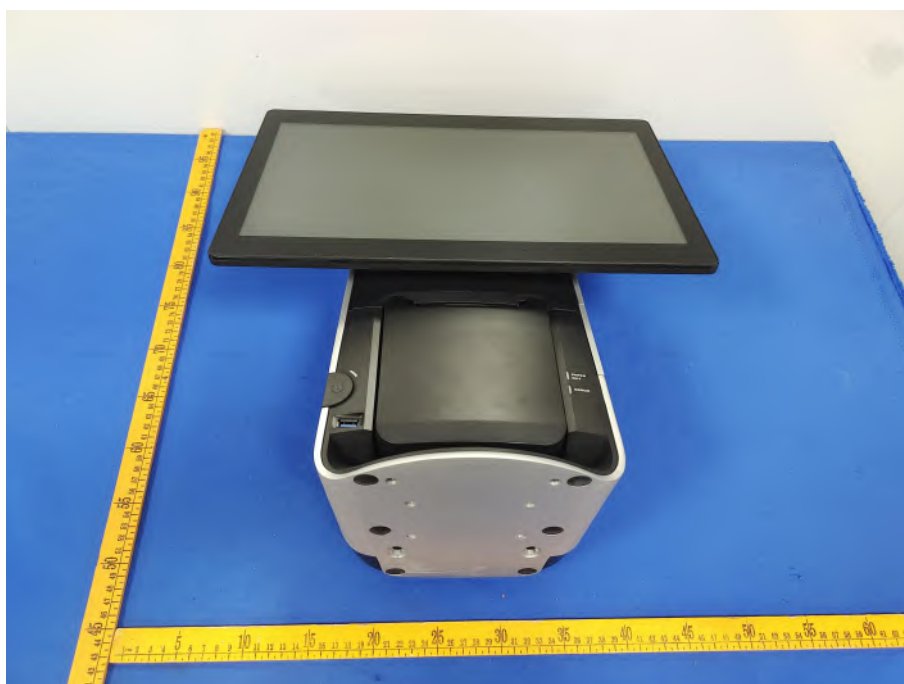



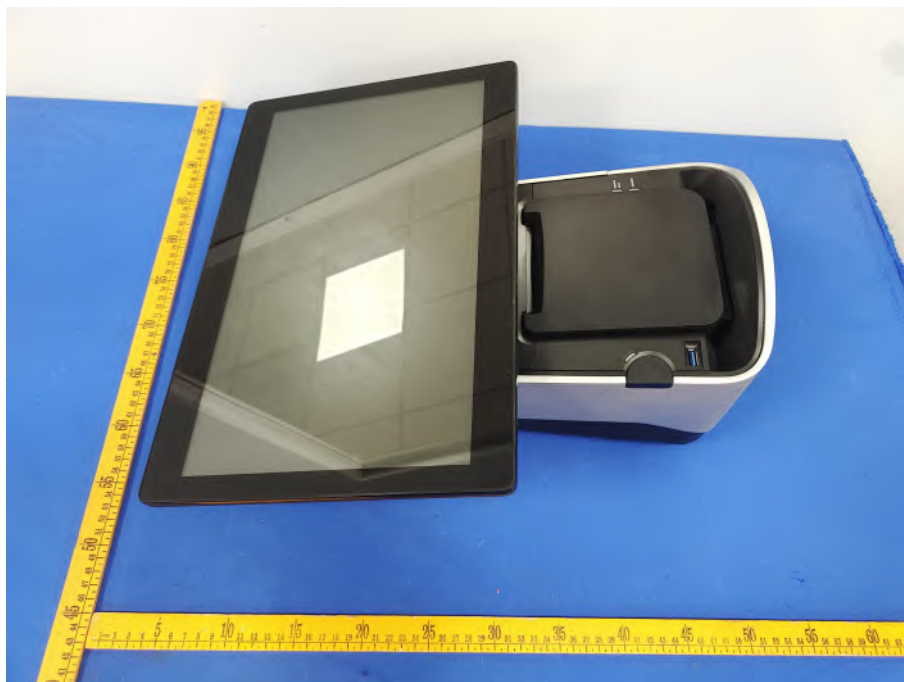






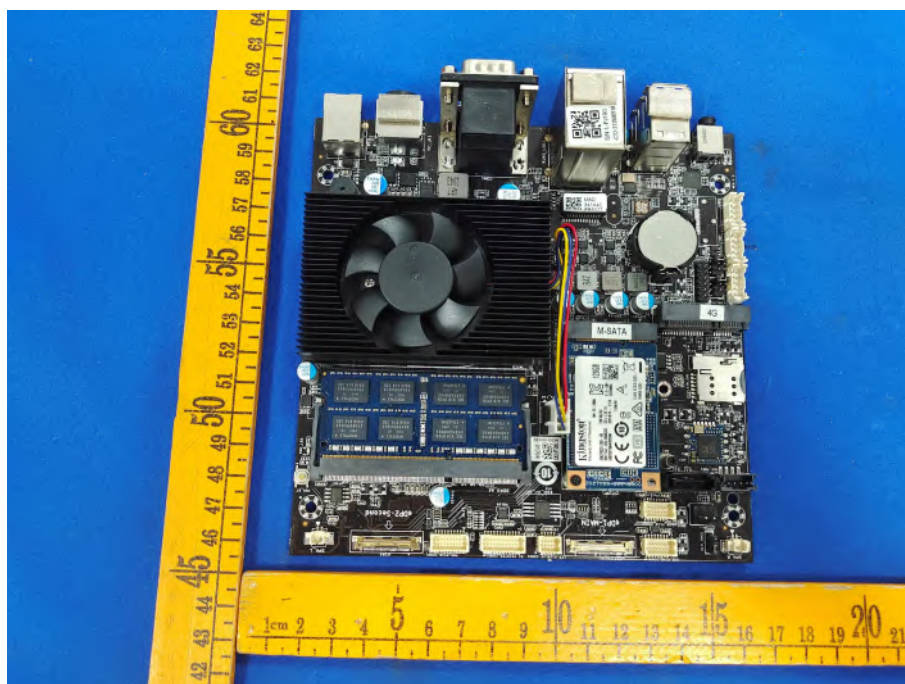

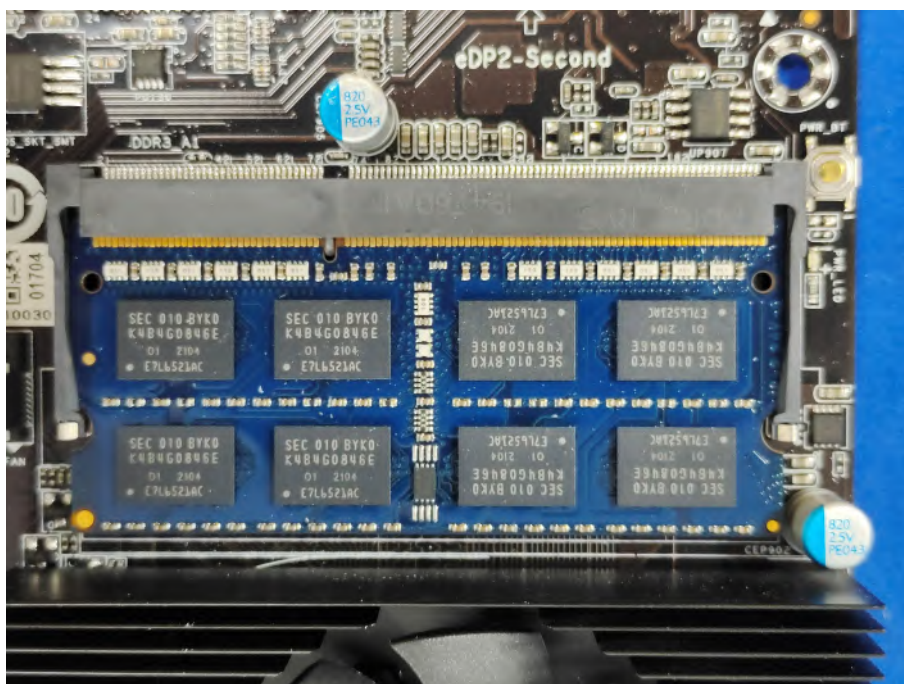

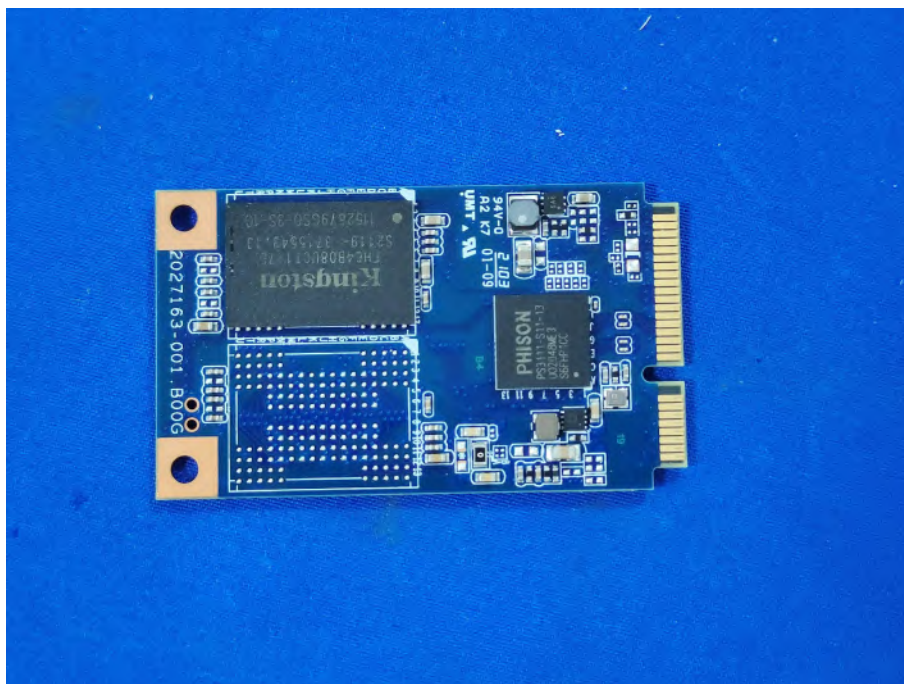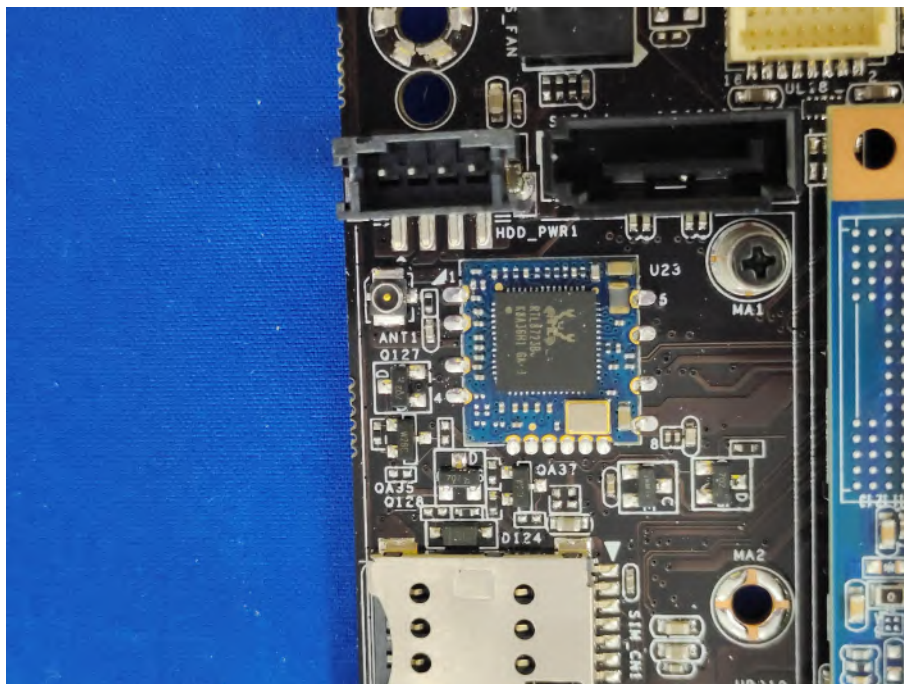

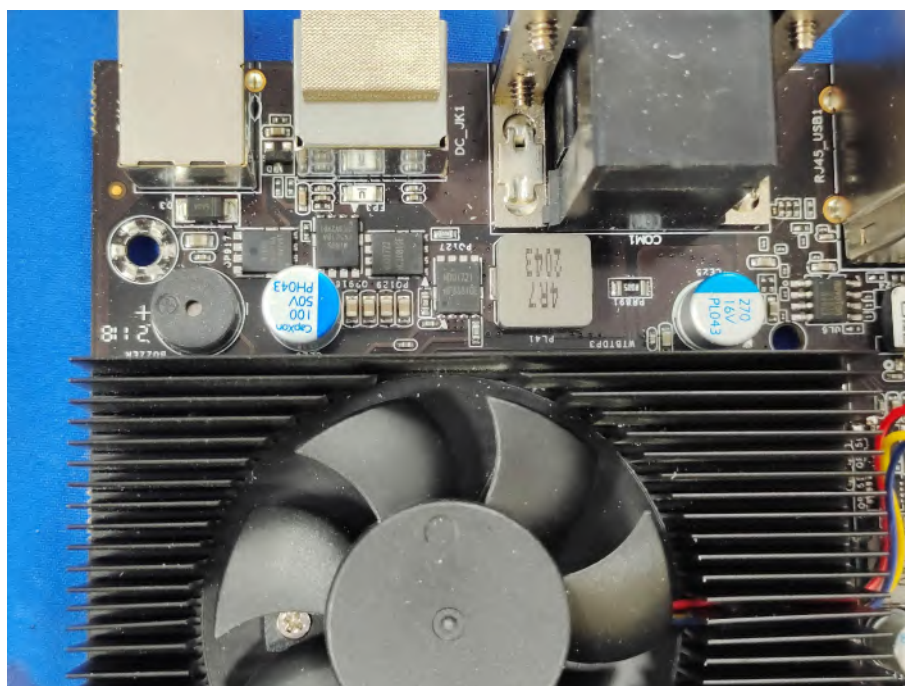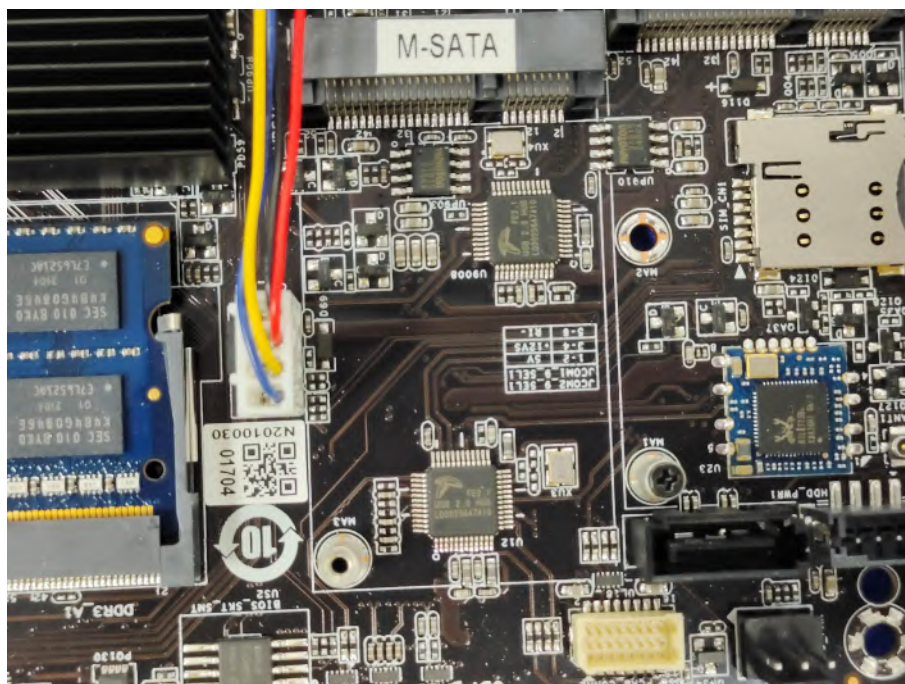

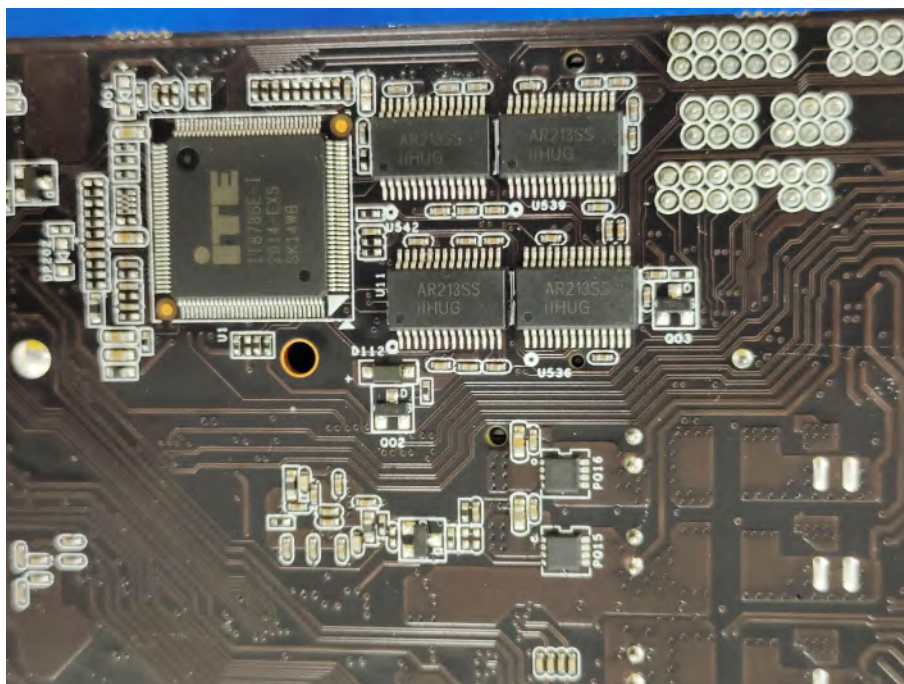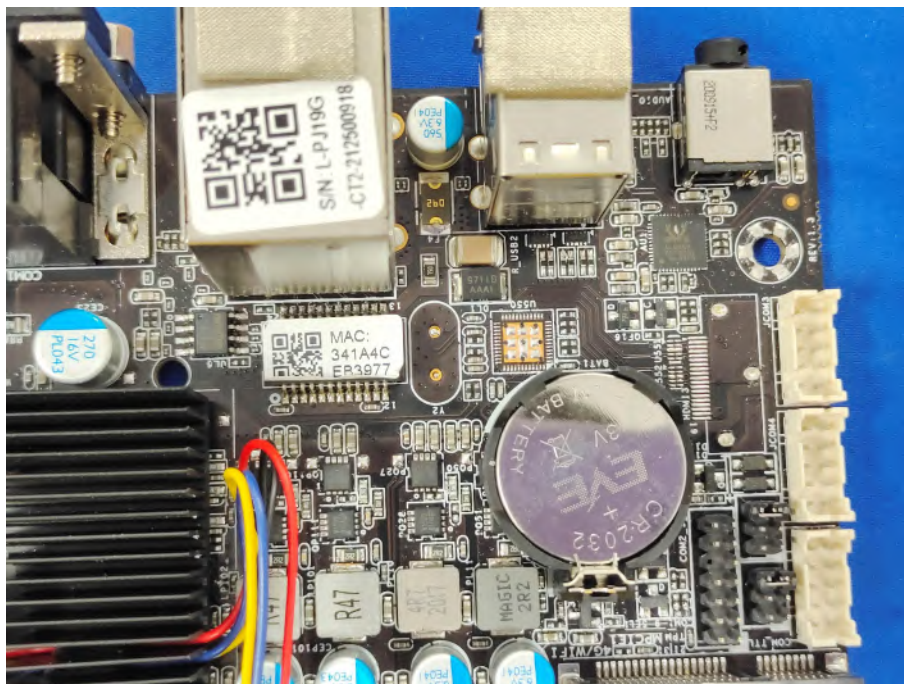

----- End of Report -----