

Prüfbericht-Nr.: <i>Test report no.:</i>	50403623 001	Auftrags-Nr.: <i>Order no.:</i>	238488545	Seite 1 von 28 Page 1 of 28
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	02-Jul-2020	
Auftraggeber: <i>Client:</i>	Creatidea Co., Ltd. 9F., No. 1, Sec. 4, Nanjing E. Rd., Songshan Dist., Taipei City 10595, Taiwan (R.O.C.)			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Mesh/Beacon			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	CI-BLE MESH			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (BLE)			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	06-Jul-2020			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A002860774-010			
Prüfzeitraum: <i>Testing period:</i>	12-Aug-2020~17-Aug-2020			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
überprüft von: <i>reviewed by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: 25-Aug-2020 <i>Date:</i>	Mars Y.J. Lin		Datum: 25-Aug-2020 <i>Date:</i>	Brenda S.H. Chen
Stellung / Position:	Project Engineer		Stellung / Position:	Project Manager
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass
6.1	FCC KDB 447498 D01 v06	RF Exposure Compliance	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1 Antenna Requirement	15
5.1.2 Peak Output Power	16
5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth.....	18
5.1.4 Power Spectral Density.....	19
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....	20
5.1.6 Radiated Spurious Emissions and Band Edges	21
5.2 MAINS EMISSION	26
5.2.1 Mains Conducted Emission.....	26
6. SAFETY HUMAN EXPOSURE.....	28

6.1	RF EXPOSURE COMPLIANCE	28
6.1.1	SAR Test Exclusion Thresholds.....	28

APPENDIX A - TEST RESULT OF CONDUCTED**APPENDIX B - TEST RESULT OF RADIATED SPURIOUS EMISSIONS & MAINS CONDUCTED
EMISSION****APPENDIX SP - PHOTOGRAPHS OF TEST SETUP****APPENDIX EP - PHOTOGRAPHS OF EUT**

Prüfbericht - Nr.: 50403623 001
Test Report No.**Seite 5 von 28**
Page 5 of 28**HISTORY OF THIS TEST REPORT**

Report No.	Description	Date Issued
50403623 001	Original Release	25-Aug-2020

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Spurious Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247
FCC CFR47 Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 447498 D01 General RF Exposure Guidance v06

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563



2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Mesh/Beacon. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Bluetooth Mesh/Beacon
Type Identification	CI-BLE MESH
FCC ID	2AW3O-SDC001

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel number	40
Data Rate	1Mbps
Operation Voltage	5Vdc
Modulation	GFSK
Maximum Output Power (mW)	0.18
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	Default
2440	Default
2480	Default

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	Python2.7.2
---------------	-------------

The samples were used as follows:

A002860774-010

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
A	√	√	√	√	Chip 1
B	√	√	√	√	Chip 2

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **X-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
A, B	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
A, B	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
A	2402 to 2480	2440	1
B	2402 to 2480	2402	1

Mains Conducted Emission

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
A	2402 to 2480	2440	1
B	2402 to 2480	2402	1

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22-26 °C	50-65 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	22-26 °C	50-65 %	Simon Tsai
Radiated Spurious Emissions below 1 GHz	22-26 °C	50-65 %	Simon Tsai
Mains Conducted Emission	22-26 °C	50-65 %	Eagle Tsai

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT

N/A


Support Unit

Support Unit					
No.	Description	Brand	Model	S/N	Remark
1	Notebook	HP	15s-du0007TX	CND93662VF	Radiated
2	UART	N/A	CP2102	N/A	Radiated
3	UART	N/A	CP2102	N/A	Radiated
4	Adapter	HP	TPN-CA16	N/A	Radiated
1	Notebook	HP	15s-du0007TX	CND93662VF	Mains Conducted
2	Adapter	HP	TPN-CA16	N/A	Mains Conducted


Interface Cable					
No.	Description	Shielded Type	Ferrite Core (Qty)	Length	Remark
A	USB 3.0 Cable	YES	0	4m (chip 1) 4.9m (chip 2)	Radiated
B	USB 3.0 Cable	YES	0	1m	Radiated
C	Adapter Cable	YES	0	1.8m	Radiated
A	USB Cable	YES	0	1m (chip 1) 3m (chip 2)	Mains Conducted
B	Adapter Cable	YES	0	1.8m	Mains Conducted
C	Adapter Cable	YES	0	1m	Mains Conducted

4.5 Test Setup Diagram

<Radiated Spurious Emissions Tx mode >

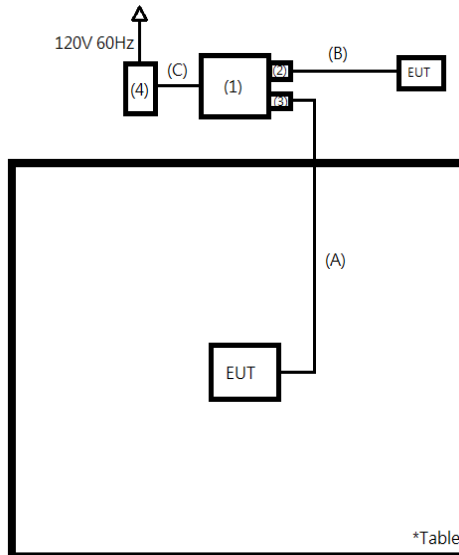

<Mains Conducted Emission mode >

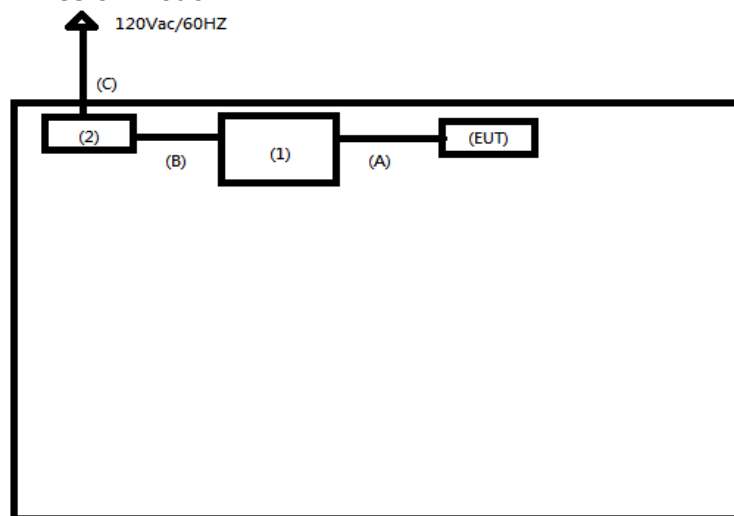

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only


According to the manufacturer declaration, the EUT has an antenna with a directional gain of 0 dBi. The antenna is a Chip Antenna soldered to the PCB with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision. Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Power Meter	Anritsu	ML2495A	1901008	2020/4/6	2021/4/5
Power Sensor	Anritsu	MA2411B	1725269	2020/4/7	2021/4/6

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<Chip 1>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	-8.37	0.15	30
Middle Channel	2442	-7.91	0.16	30
High Channel	2480	-7.66	0.17	30

<Chip 2>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	-7.86	0.16	30
Middle Channel	2442	-7.56	0.18	30
High Channel	2480	-7.68	0.17	30

Average Power
<Chip 1>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	-8.48	0.14
Middle Channel	2442	-8.03	0.16
High Channel	2480	-7.79	0.17

<Chip 2>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	-7.97	0.16
Middle Channel	2442	-7.67	0.17
High Channel	2480	-7.79	0.17

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/17

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/17

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.

5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth


Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site

Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/17

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

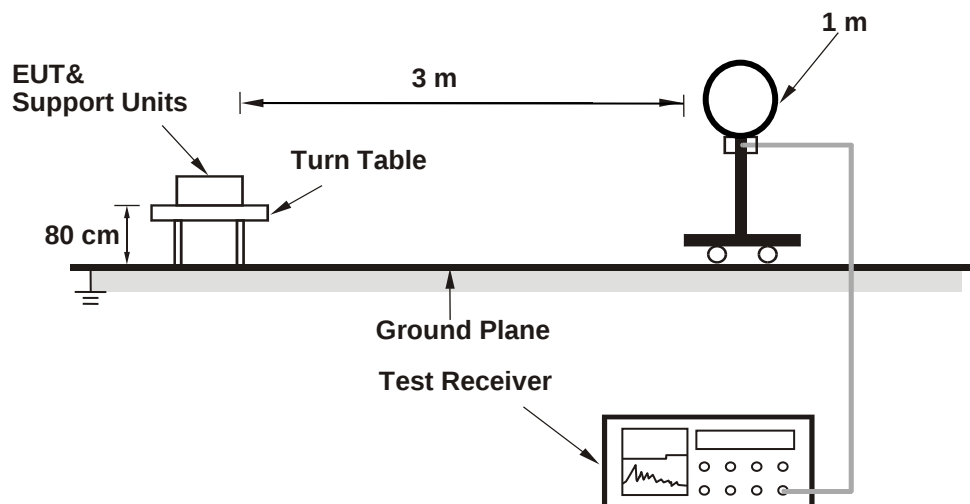

<Radiated Emissions 30 MHz to 1 GHz>

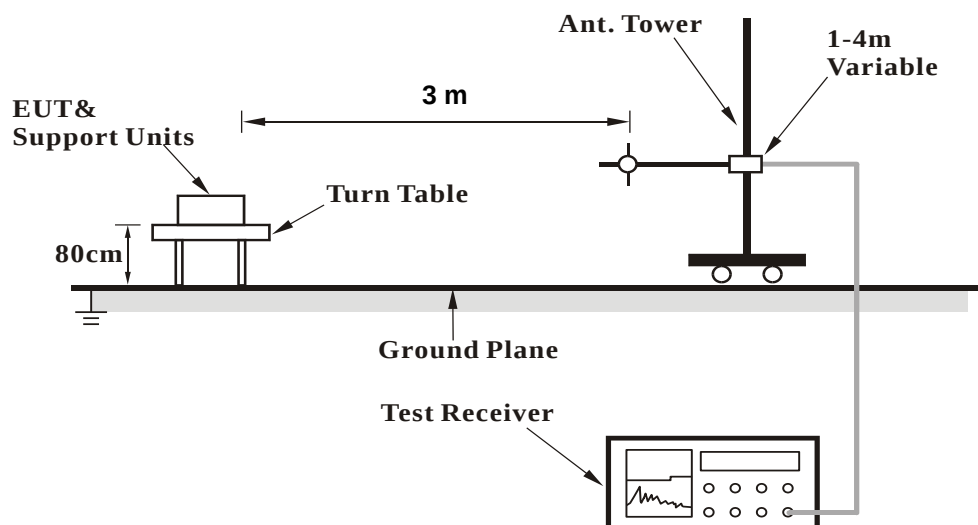

<Radiated Emissions above 1 GHz>

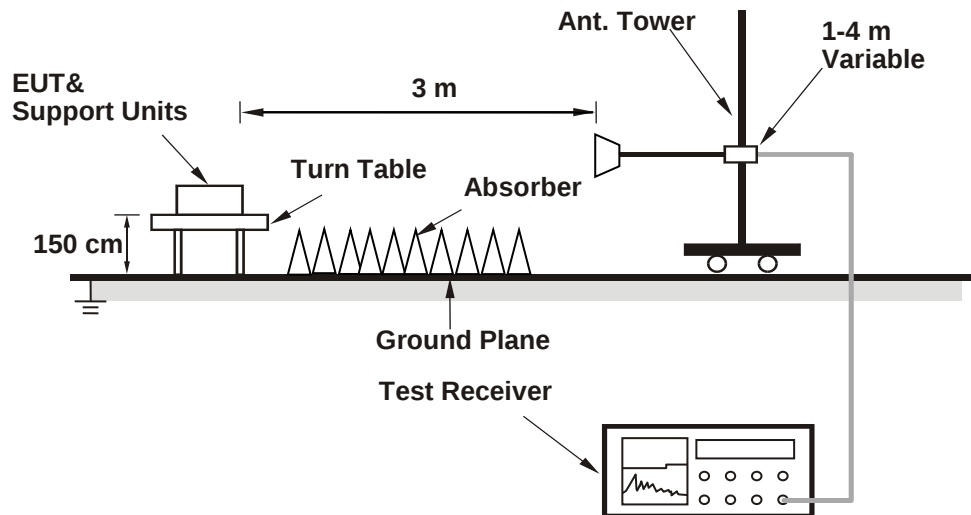

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101508	2020/3/16	2021/3/15
Receiver	R&S	ESR7	102108	2020/4/22	2021/4/21
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2020/2/14	2021/2/13
Horn Antenna	ETS-Lindgren	3117	00218930	2019/12/6	2020/12/5
LF-AMP	Agilent	8447D	2944A10772	2020/2/11	2021/2/10
HF-AMP + AC source	EMCI	EMC051845SE	980633	2020/2/17	2021/2/16
HF-AMP + AC source	EMCI	EMC184045SE	980657	2020/2/17	2021/2/16
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2020/4/10	2021/4/9
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2020/4/22	2021/4/21
Loop Antenna	Chance Most	EMCILPA600 +calibration	287	2020/1/9	2021/1/8

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: 50403623 001
Test Report No.

Seite 25 von 28
Page 25 of 28

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

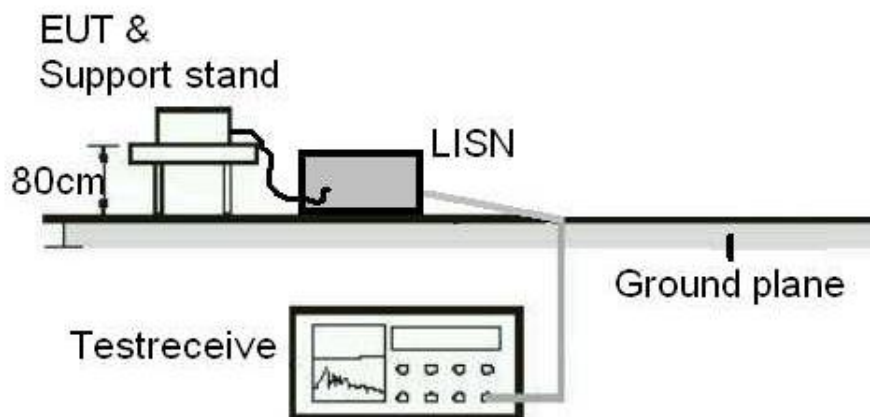

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	SCHHWARZBECK	NSLK 8127	8127-00976	2019/10/2	2020/10/1
EMI Test Receiver	R&S	ESR7	102108	2020/4/22	2021/4/21
10dB attenuation	SCHHWARZBECK	VTSD 9561 F-N	660	2020/2/24	2021/2/23
Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A	N/A

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.

6. Safety Human Exposure

6.1 RF Exposure Compliance

6.1.1 SAR Test Exclusion Thresholds

Results

Since the maximum output power of the transmitter is $0.18 \text{ mW} < 10 \text{ mW}$ (Distance: 5 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.


Appendix A: Test Results of Conducted Test

<Chip 1>

Test Result of 6 dB Bandwidth

BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	647.35	> 500	Pass
Middle Channel	2440	647.35	> 500	Pass
High Channel	2480	647.35	> 500	Pass

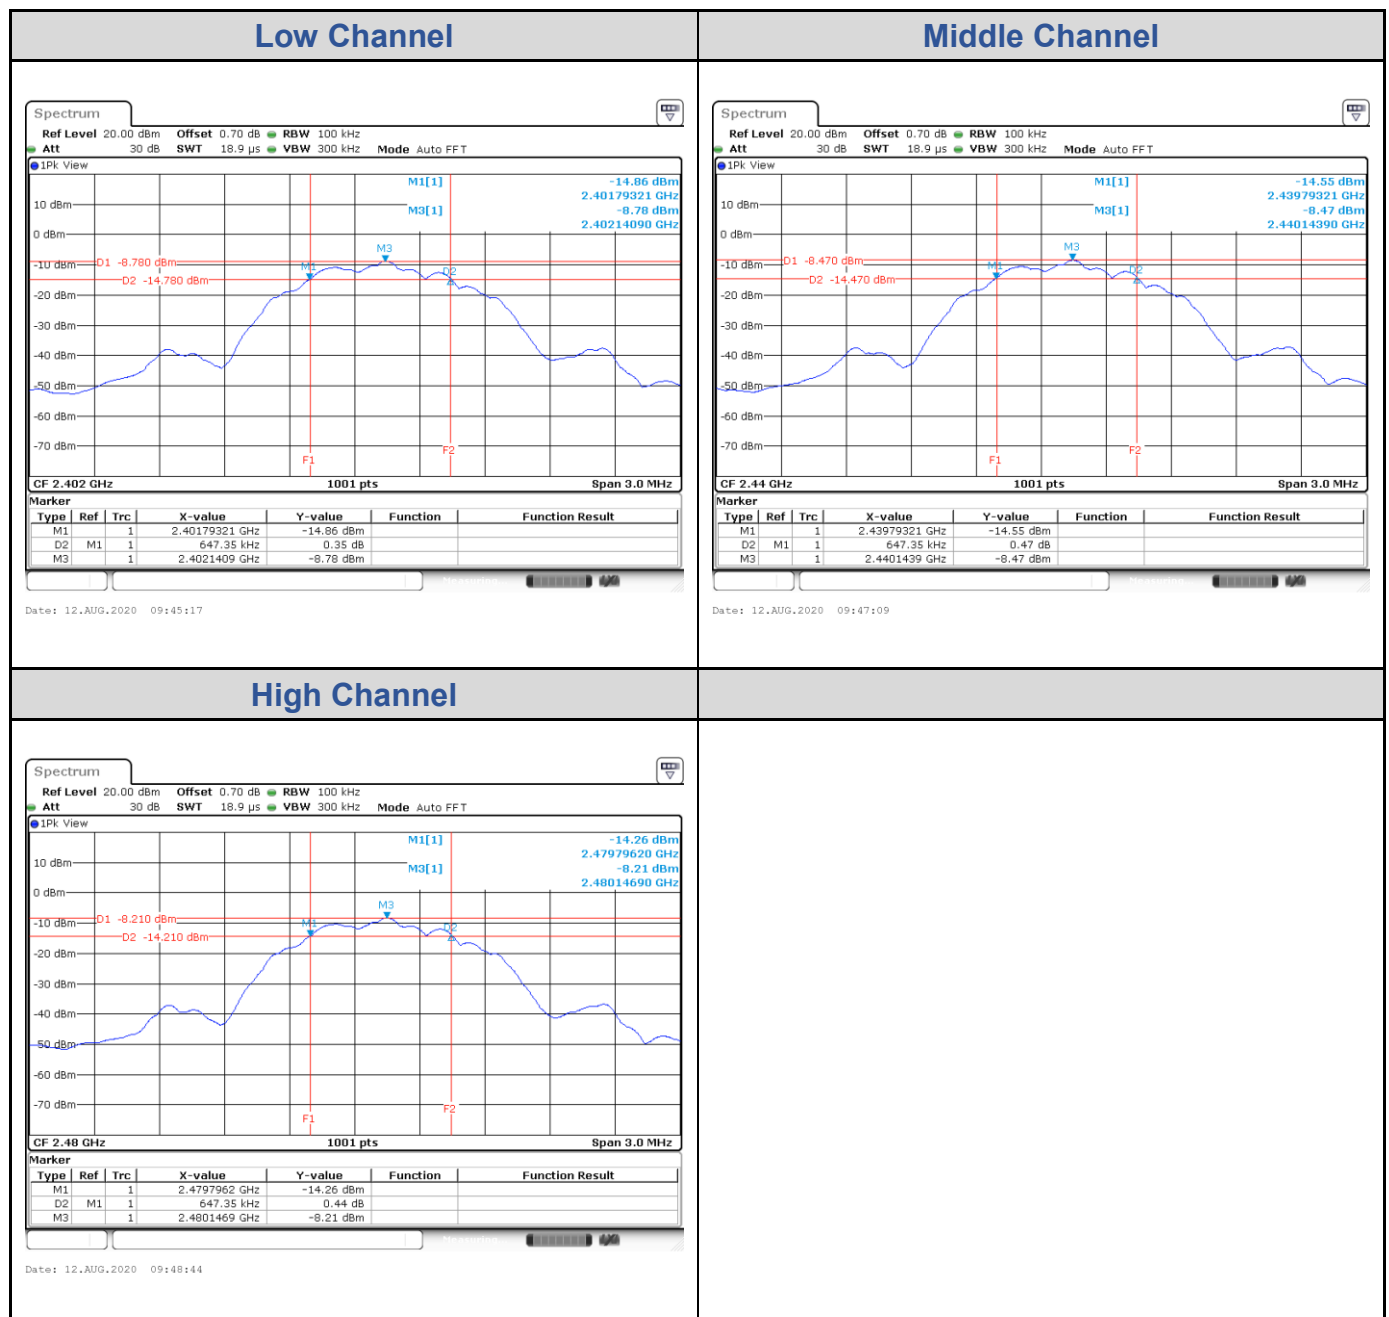


Test Result of 99% Occupied Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.06
Middle Channel	2440	1.06
High Channel	2480	1.06


Low Channel

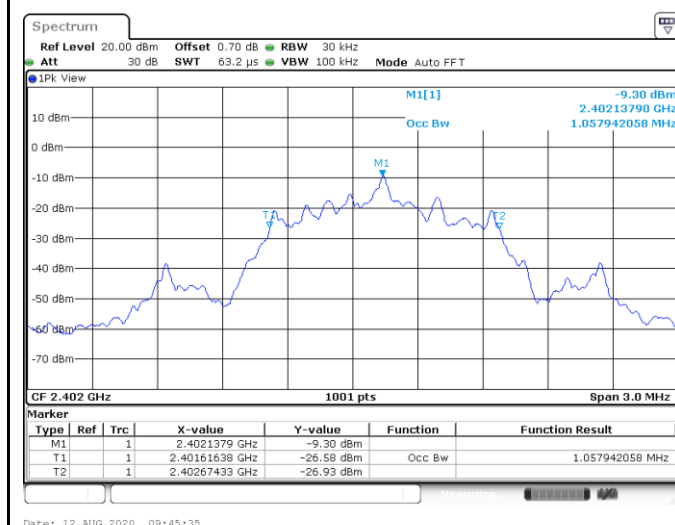

Middle Channel

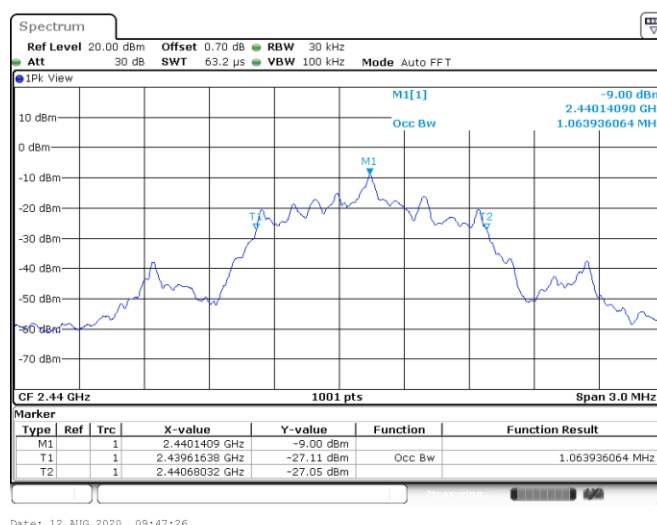

High Channel

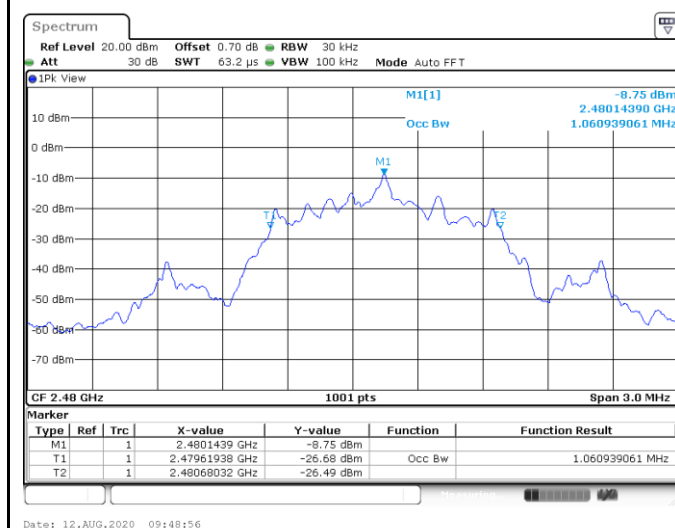


Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-18.66	8	Pass
Middle Channel	2440	-18.26	8	Pass
High Channel	2480	-18.06	8	Pass


Low Channel

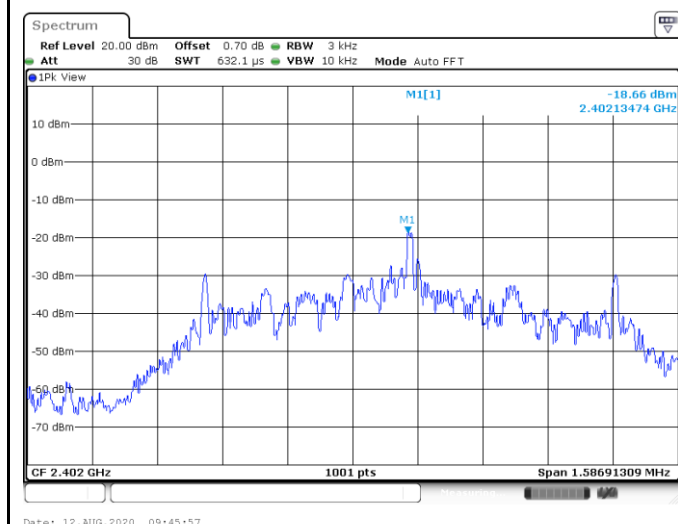

Middle Channel

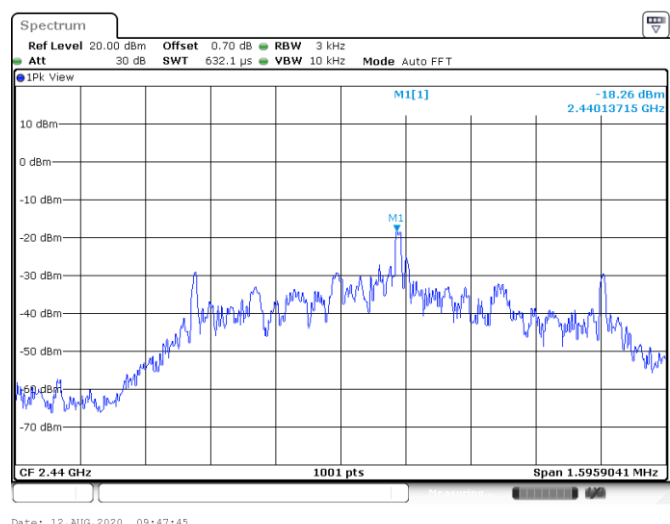


High Channel

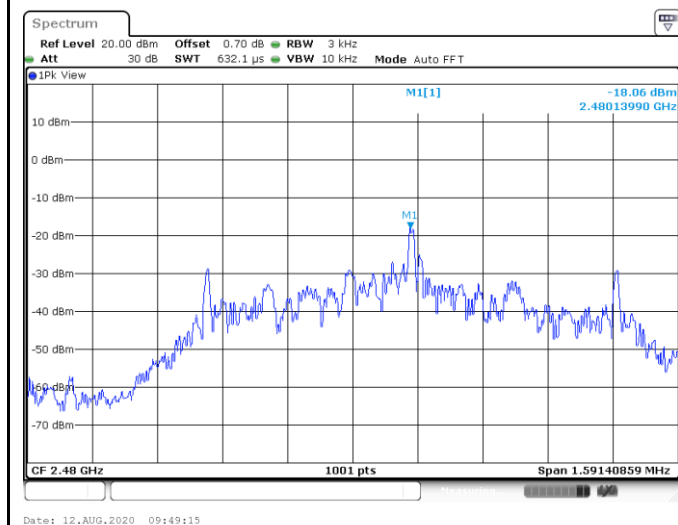


Test Result of Conducted Spurious Emissions, Tx Mode

BLE_1M

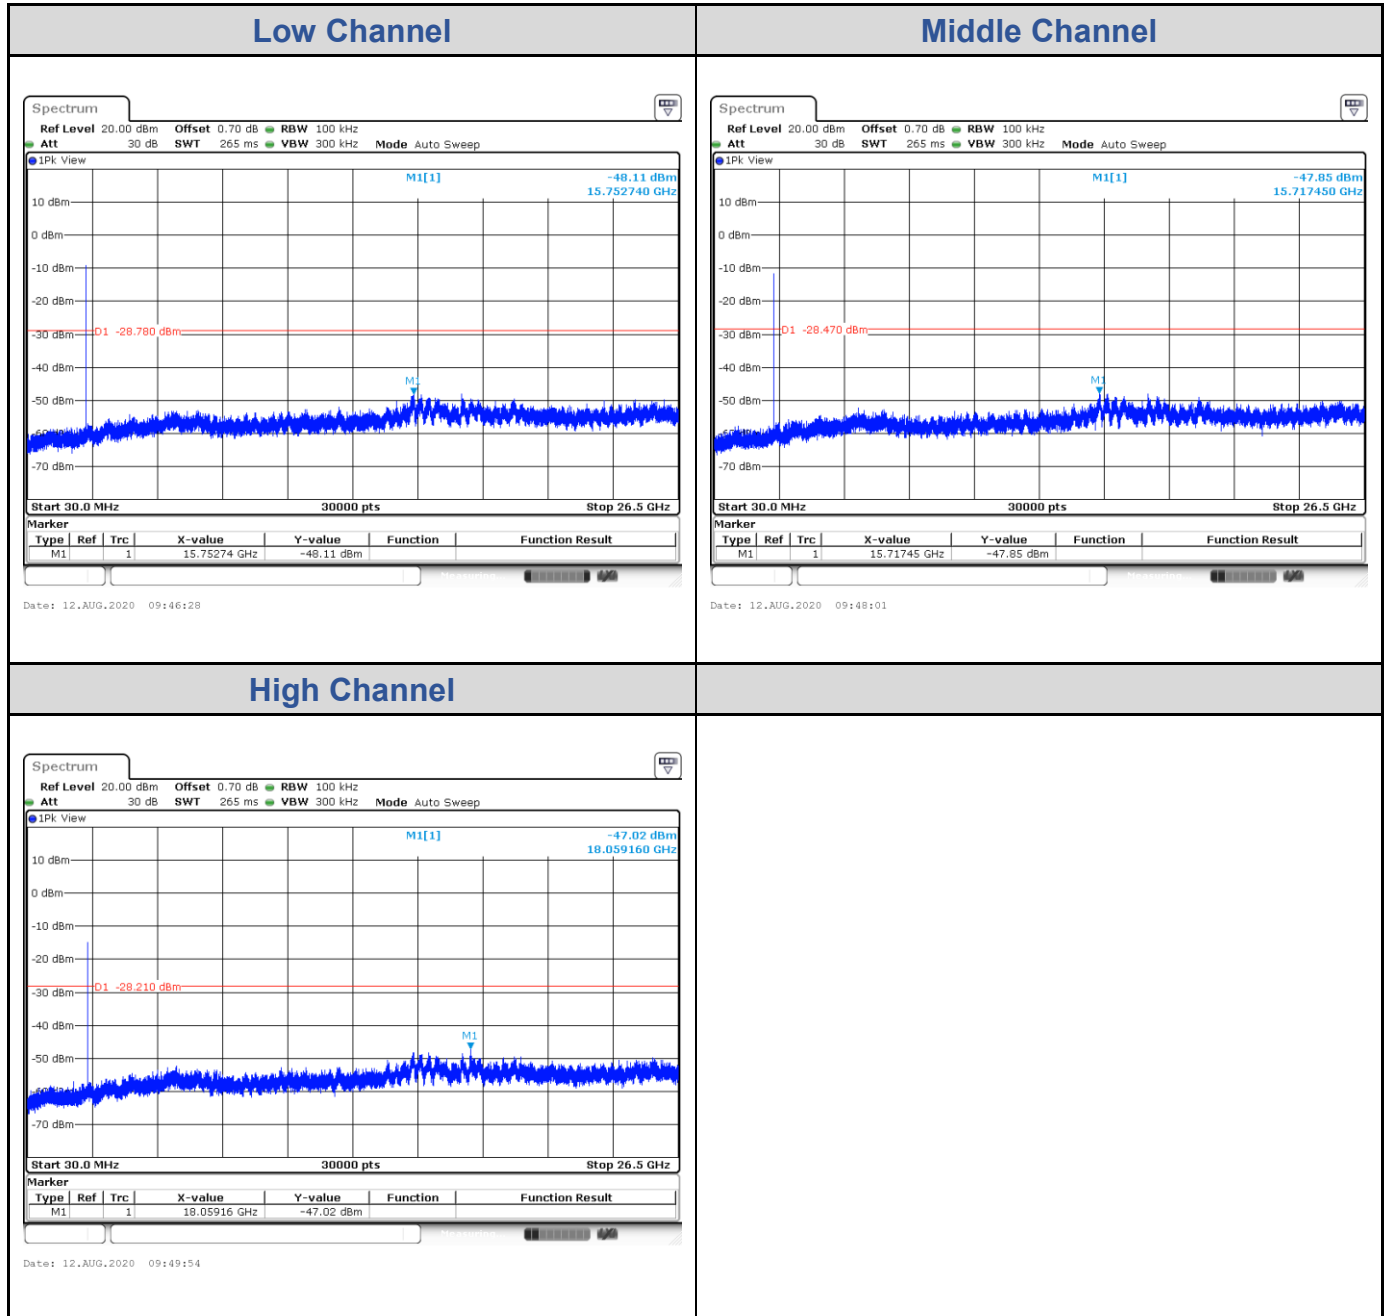

Test Result of Conducted Band Edge, Tx Mode

BLE_1M

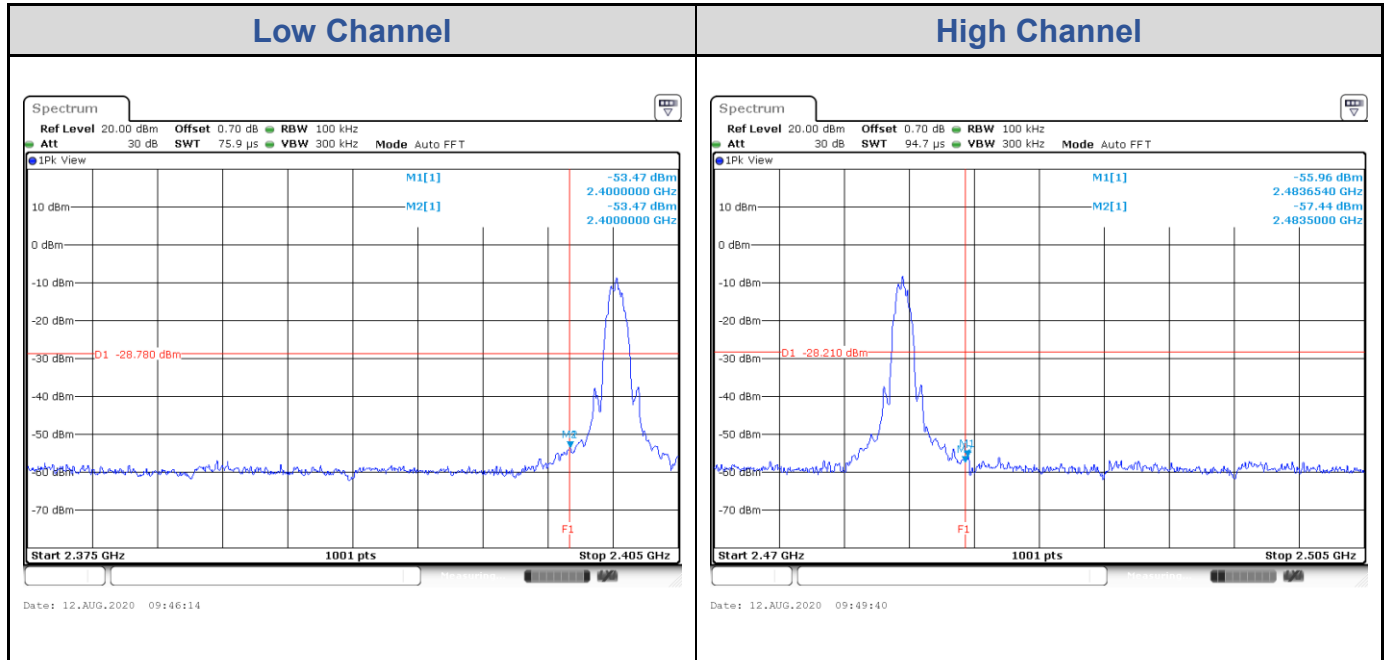


<Chip 2>

Test Result of 6 dB Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	650.35	> 500	Pass
Middle Channel	2440	650.35	> 500	Pass
High Channel	2480	650.35	> 500	Pass


Low Channel

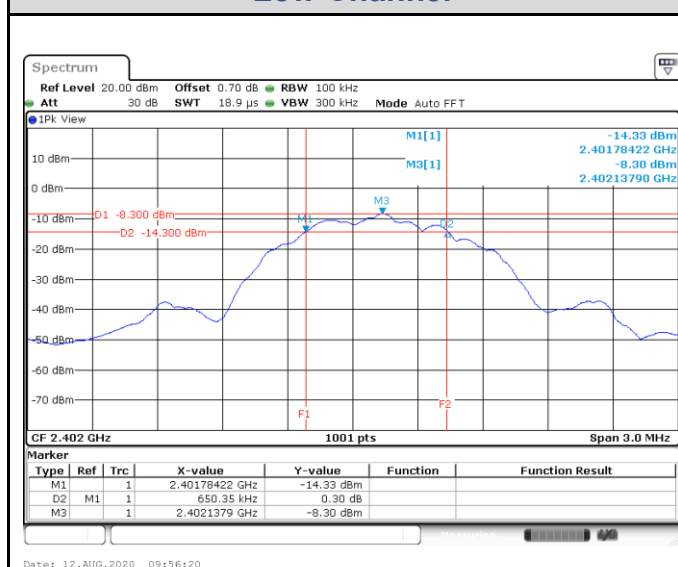

Middle Channel

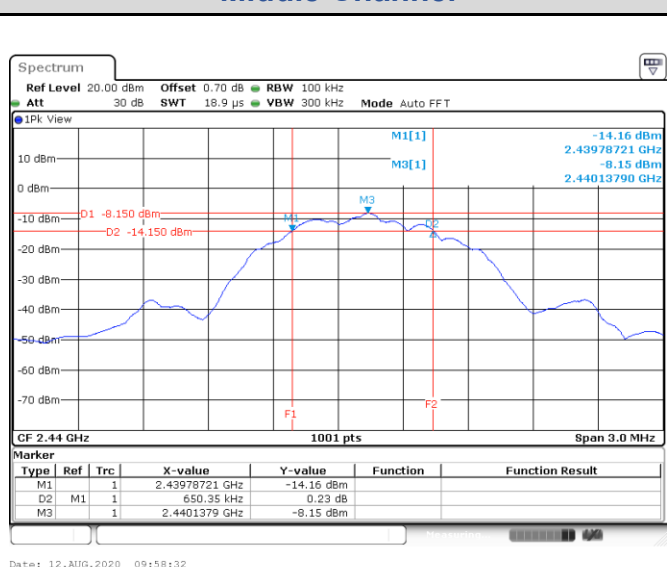


High Channel

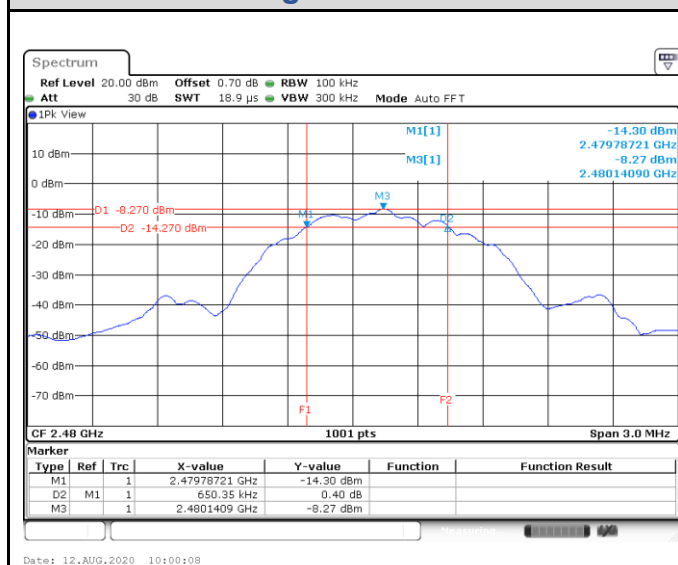

Test Result of 99% Occupied Bandwidth

BLE_1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.06
Middle Channel	2440	1.06
High Channel	2480	1.06

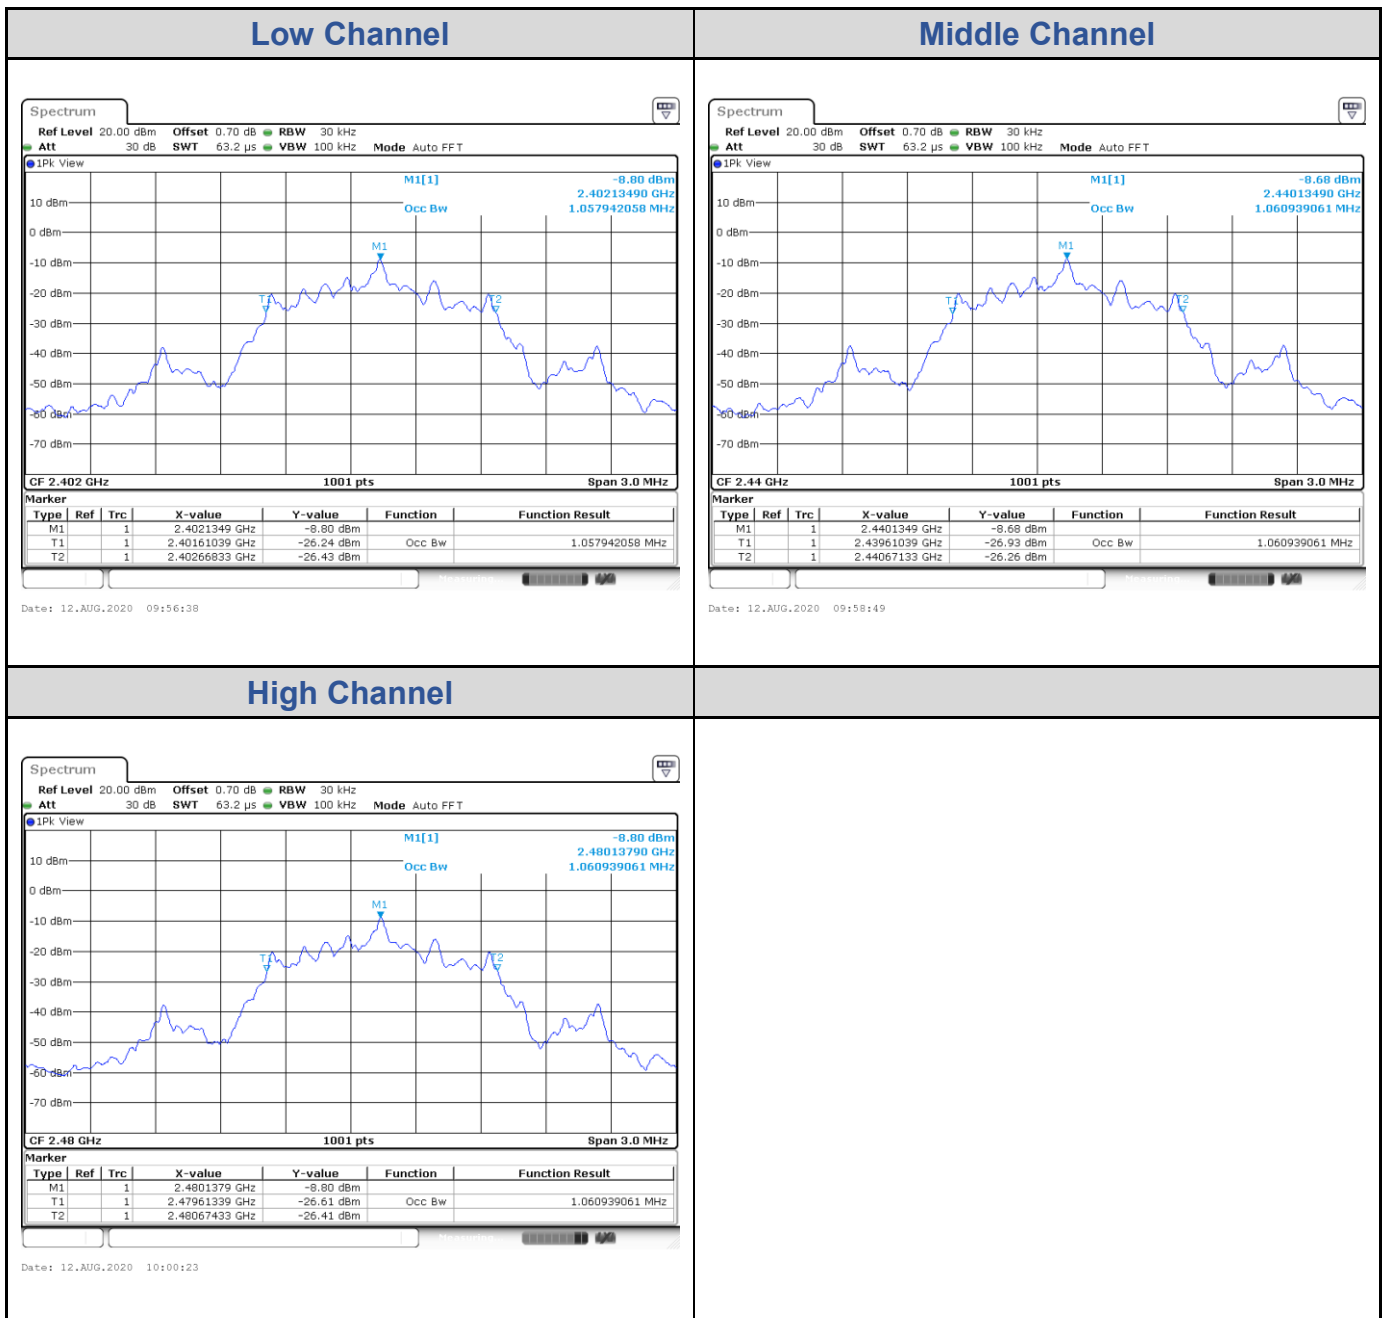


Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-18.18	8	Pass
Middle Channel	2440	-17.99	8	Pass
High Channel	2480	-18.16	8	Pass


Low Channel

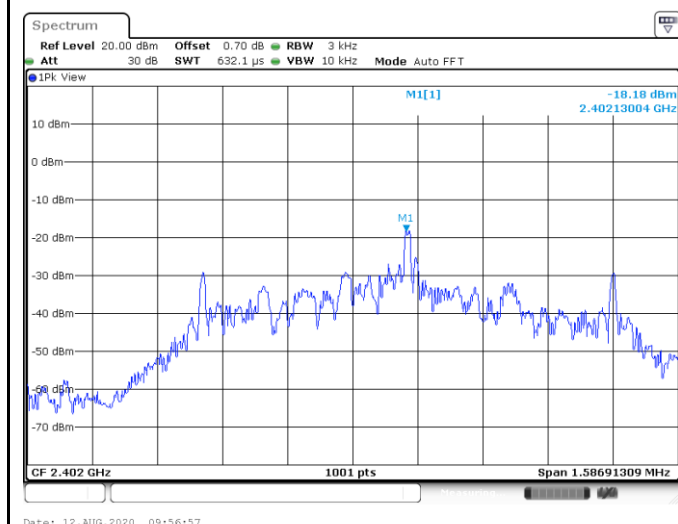

Middle Channel

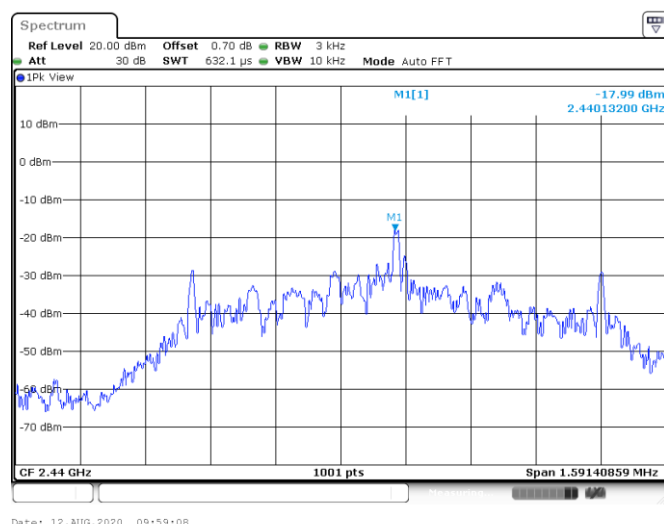


High Channel

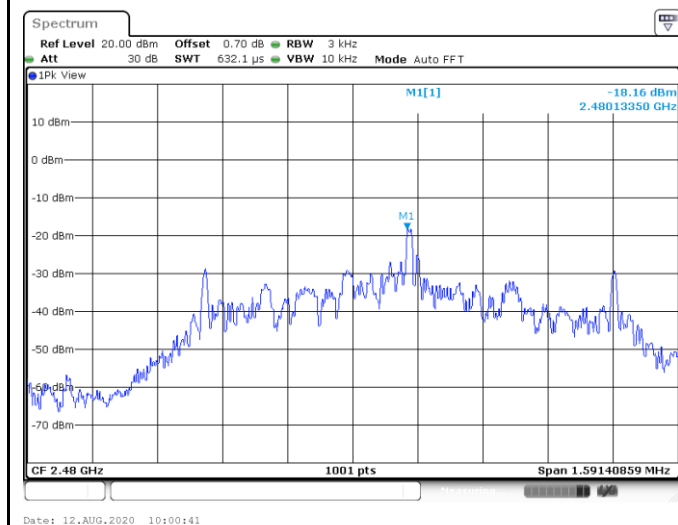


Test Result of Conducted Spurious Emissions, Tx Mode

BLE_1M

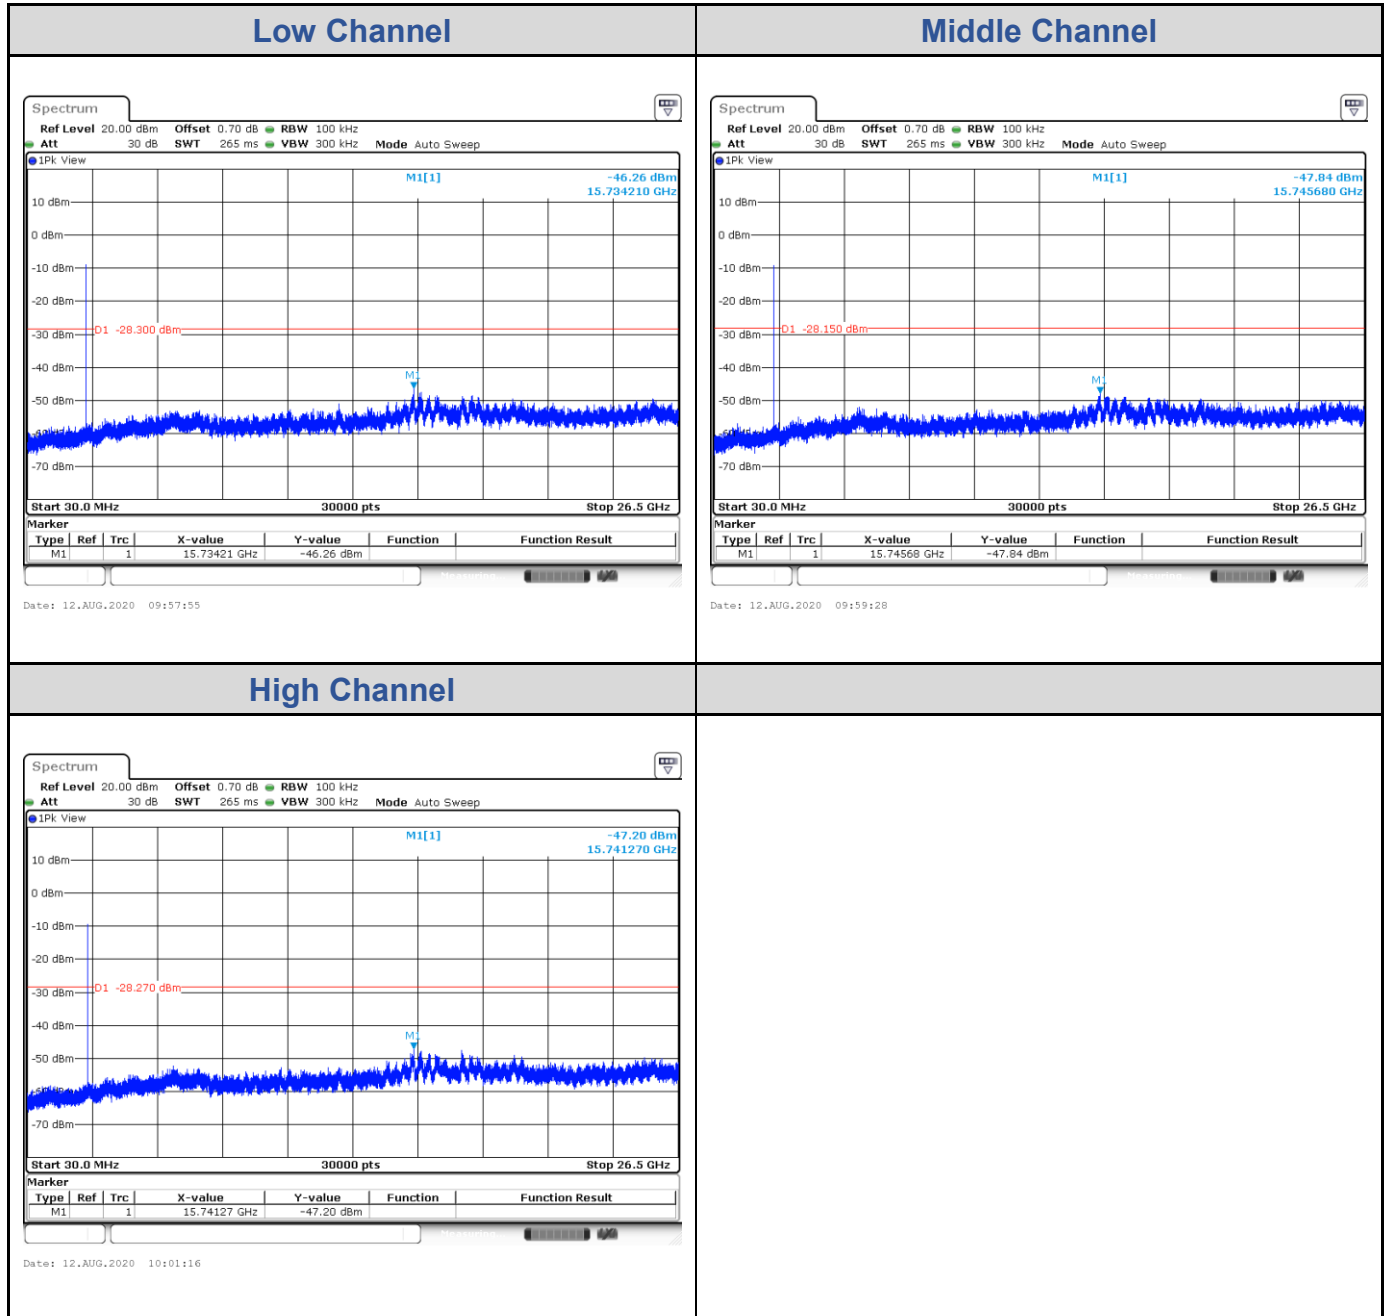

Test Result of Conducted Band Edge, Tx Mode

BLE_1M

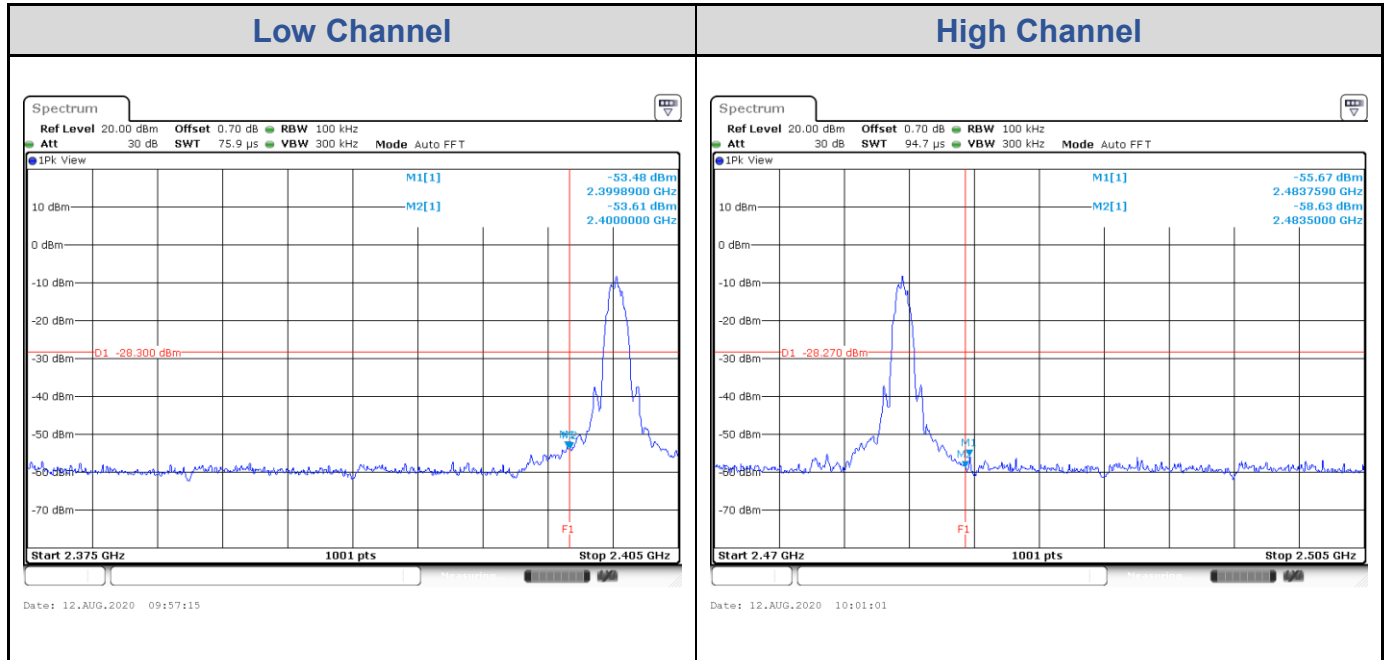

Appendix B: Test Results of Radiated Spurious Emissions & Mains

Conducted Emission Test

<Chip 1>


Band Edges, 2.31GHz ~ 2.9GHz

BLE_1M

Low Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

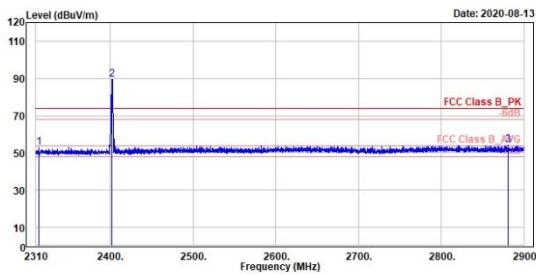


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2313.09	53.12	16.03	37.09	74.00	-20.88	144	197	Peak	Horizontal		
2 *	2402.00	89.53	52.16	37.37	74.00	15.53	144	197	Peak	Horizontal		
3	2880.88	54.19	15.97	38.22	74.00	-19.81	144	197	Peak	Horizontal		

Low Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

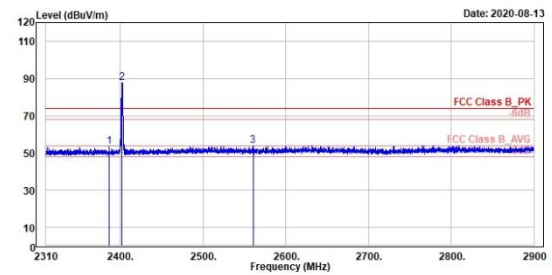


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2306.23	53.28	15.96	37.32	74.00	-20.72	100	184	Peak	Vertical		
2 *	2402.00	87.74	50.37	37.37	74.00	13.74	100	184	Peak	Vertical		
3	2560.40	53.94	16.07	37.87	74.00	-20.06	100	184	Peak	Vertical		

BLE_1M

Low Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

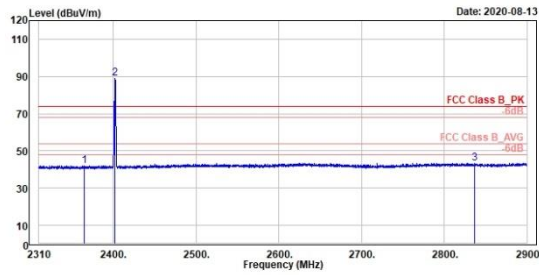

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2364.87	42.14	4.89	37.25	54.00	-11.86	144	197	Average	Horizontal	
2 *	2402.00	89.06	51.69	37.37	54.00	35.06	144	197	Average	Horizontal	
3	2836.87	43.57	5.55	38.02	54.00	-10.43	144	197	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

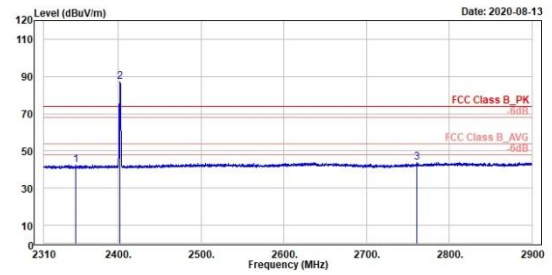


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2348.82	42.34	5.14	37.20	54.00	-11.66	180	184	Average	Vertical	
2 *	2402.00	87.28	49.91	37.37	54.00	33.28	180	184	Average	Vertical	
3	2761.00	43.93	6.06	37.87	54.00	-10.07	180	184	Average	Vertical	

BLE_1M


High Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

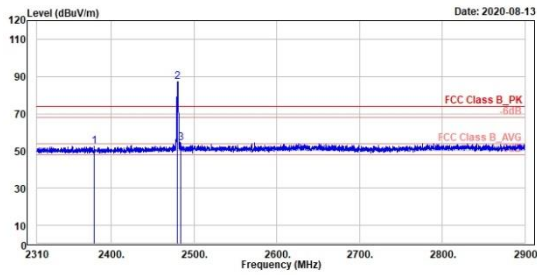

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

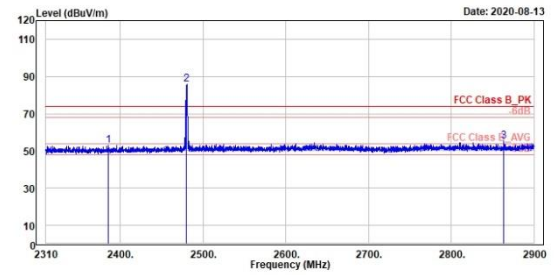


BLE_1M

High Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

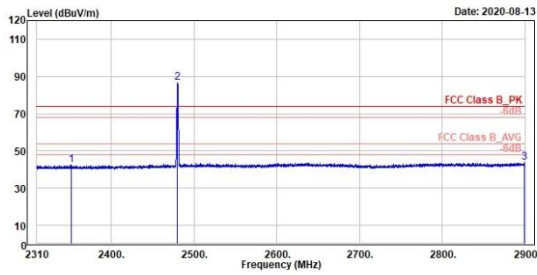

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2351.09	42.49	5.28	37.21	54.00	-11.51	177	197	Average	Horizontal	
2 *	2480.00	86.65	49.09	37.56	54.00	32.65	177	197	Average	Horizontal	
3	2899.29	43.87	5.55	38.32	54.00	-10.13	177	197	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

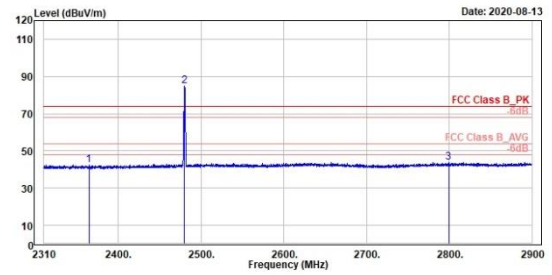

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2364.40	42.44	5.19	37.25	54.00	-11.56	180	164	Average	Vertical	
2 *	2480.00	85.09	47.53	37.56	54.00	31.09	180	164	Average	Vertical	
3	2799.46	43.98	6.07	37.91	54.00	-10.02	180	164	Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE_1M

Middle Channel 9kHz~150kHz

Middle Channel 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

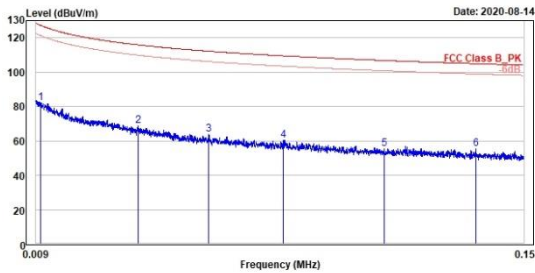

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	82.10	3.52	78.58	127.24	-45.14	100	350 QP	vertical		
2	0.04	68.58	0.55	68.03	115.88	-47.30	100	164 QP	vertical		
3	0.06	63.94	0.15	63.79	112.18	-48.24	100	315 QP	vertical		
4	0.08	60.25	-0.95	61.20	109.47	-49.22	100	173 QP	vertical		
5	0.11	55.43	-3.26	58.69	106.80	-51.37	100	1 QP	vertical		
6	0.14	55.34	-1.82	57.16	104.92	-49.58	100	220 QP	vertical		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

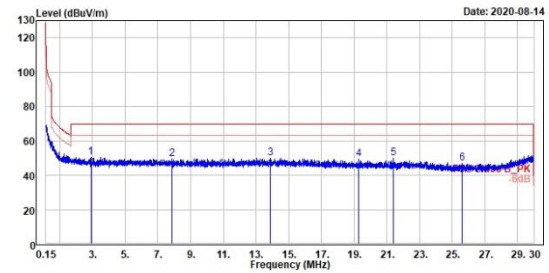

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2.90	50.40	12.14	38.26	69.50	-19.10	100	204 QP	vertical		
2	7.86	49.59	11.48	38.11	69.50	-19.91	100	330 QP	vertical		
3	13.90	49.79	12.19	37.60	69.50	-19.71	100	204 QP	vertical		
4	19.27	49.56	13.16	36.40	69.50	-19.94	100	318 QP	vertical		
5	21.39	49.84	13.85	35.99	69.50	-19.66	100	291 QP	vertical		
6	25.60	47.01	12.83	34.18	69.50	-22.49	100	284 QP	vertical		


Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

BLE_1M

Middle Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

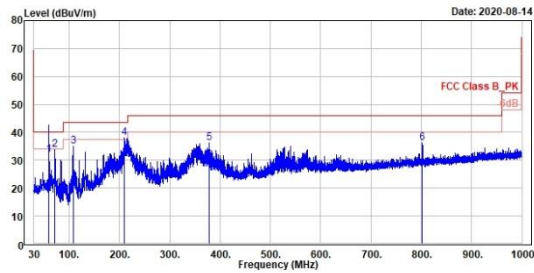

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	59.97	32.04	40.31	-8.27	40.00	-7.96	200	110	QP	horizontal		
2	72.00	33.62	44.11	-10.49	40.00	-6.38	200	202	QP	horizontal		
3	107.99	35.01	46.36	-11.35	43.50	-8.49	300	127	QP	horizontal		
4	210.03	37.95	47.75	-9.80	43.50	-5.55	200	278	QP	horizontal		
5	378.91	36.21	41.24	-5.03	46.00	-9.79	100	166	QP	horizontal		
6	802.02	36.15	34.43	1.72	46.00	-9.85	100	172	QP	horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

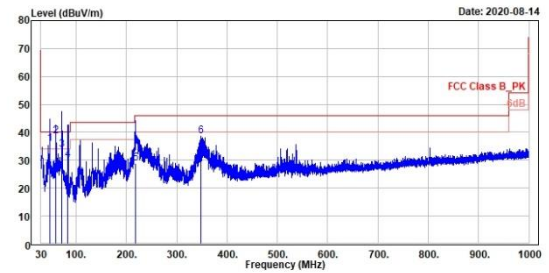

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	48.04	35.88	43.40	-7.52	40.00	-4.12	100	160	QP	vertical		
2	60.17	38.71	47.00	-8.29	40.00	-1.29	100	160	QP	vertical		
3	72.00	33.62	44.11	-10.49	40.00	-6.38	100	110	QP	vertical		
4	83.93	30.21	43.04	-12.83	40.00	-9.79	100	159	QP	vertical		
5	217.40	28.76	38.40	-9.64	46.00	-17.24	100	169	QP	vertical		
6	348.05	38.65	44.36	-5.71	46.00	-7.35	100	169	QP	vertical		


Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

BLE_1M


Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

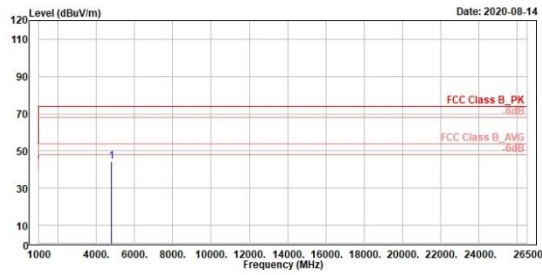

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

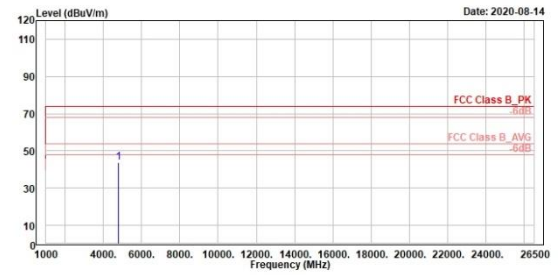


BLE_1M


Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

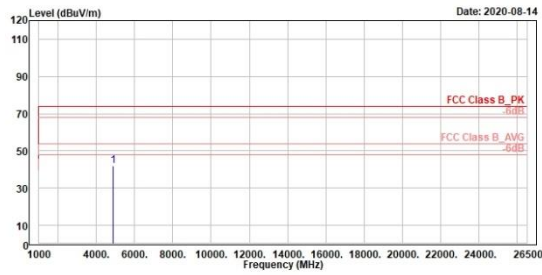

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

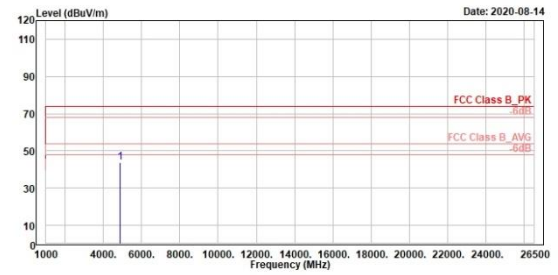


BLE_1M


High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

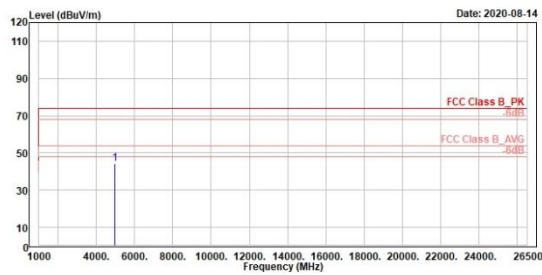

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

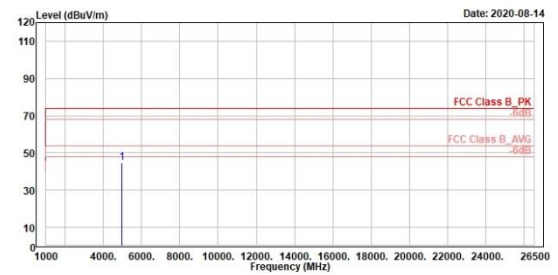

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)




TÜV Rheinland Taiwan Ltd(New Taipei City Branch),
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
 Tel:+886-2172-1000 Fax:+886-2172-1322

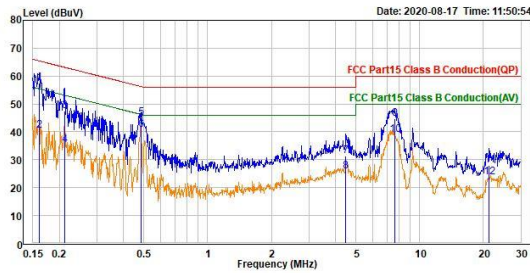

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.161	37.33	20.17	57.50	65.42	-7.92	QP	line1	
2	0.161	20.19	20.17	40.36	55.42	-15.06	Average	line1	
3	0.212	27.33	20.17	47.50	63.14	-15.64	QP	line1	
4	0.212	15.04	20.17	35.21	53.14	-17.93	Average	line1	
5	0.484	24.80	20.18	44.98	56.27	-11.29	QP	line1	
6	0.484	20.55	20.18	40.73	46.27	-5.54	Average	line1	
7	4.491	11.12	20.29	31.41	56.00	-24.59	QP	line1	
8	4.491	5.48	20.29	25.77	46.00	-20.23	Average	line1	
9	7.618	24.24	20.37	44.61	60.00	-15.39	QP	line1	
10	7.618	18.49	20.37	38.86	50.00	-11.14	Average	line1	
11	21.270	7.25	20.63	27.88	60.00	-32.12	QP	line1	
12	21.270	3.18	20.63	23.81	50.00	-26.19	Average	line1	





TÜV Rheinland Taiwan Ltd(New Taipei City Branch),
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
 Tel:+886-2172-1000 Fax:+886-2172-1322

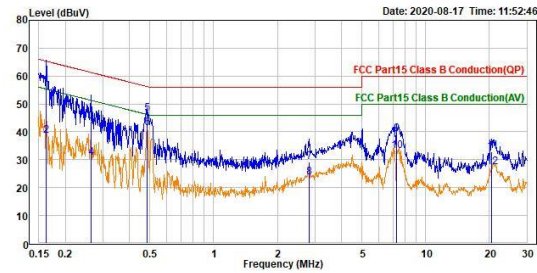

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.162	36.79	20.17	56.96	65.34	-8.38	QP	neutral	
2	0.162	18.47	20.17	38.64	55.34	-16.70	Average	neutral	
3	0.263	23.68	20.17	43.85	61.32	-17.47	QP	neutral	
4	0.263	10.58	20.17	30.75	51.32	-20.57	Average	neutral	
5	0.486	26.29	20.17	46.46	56.23	-9.77	QP	neutral	
6	0.486	21.34	20.17	41.51	46.23	-4.72	Average	neutral	
7	2.825	9.06	20.24	29.30	56.00	-26.70	QP	neutral	
8	2.825	3.36	20.24	23.60	46.00	-22.40	Average	neutral	
9	7.320	18.85	20.36	39.21	60.00	-20.79	QP	neutral	
10	7.320	12.74	20.36	33.10	50.00	-16.90	Average	neutral	
11	20.540	12.12	20.65	32.77	60.00	-27.23	QP	neutral	
12	20.540	6.64	20.65	27.29	50.00	-22.71	Average	neutral	

<Chip 2>
Band Edges, 2.31GHz ~ 2.9GHz
BLE_1M
Low Channel (Horizontal) Peak
Low Channel (Vertical) Peak

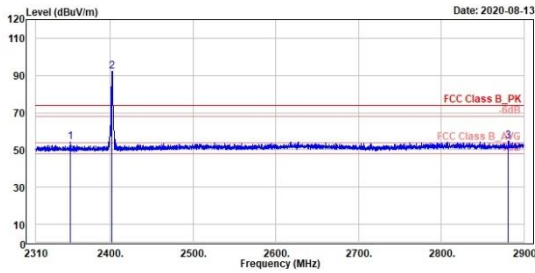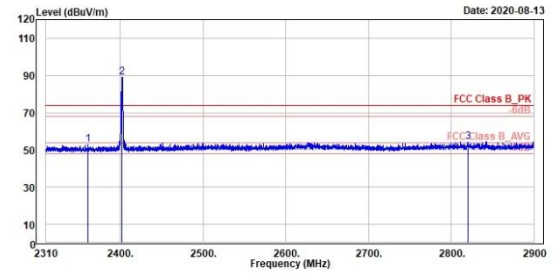
 TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

 TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


BLE_1M

Low Channel (Horizontal) Average

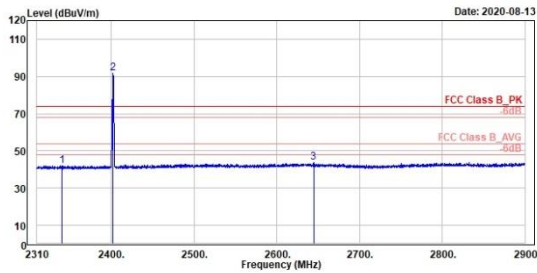

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322




Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2340.44	42.05	4.88	37.17	54.00	-11.95	390	247	Average	Horizontal	
2 *	2402.00	91.67	54.39	37.37	54.00	37.67	390	247	Average	Horizontal	
3	2644.53	43.69	5.83	37.86	54.00	-10.31	300	247	Average	Horizontal	

Low Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

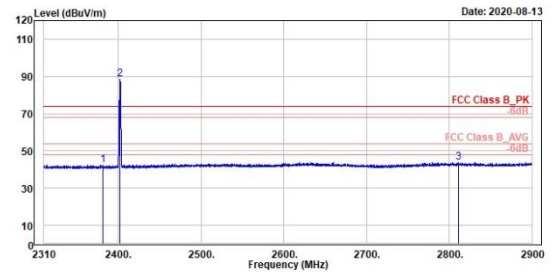


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2381.74	42.44	5.14	37.30	54.00	-11.56	396	181	Average	Vertical	
2 *	2402.00	88.44	51.87	37.37	54.00	34.44	396	181	Average	Vertical	
3	2811.15	43.78	5.84	37.94	54.00	-10.22	396	181	Average	Vertical	

BLE_1M

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

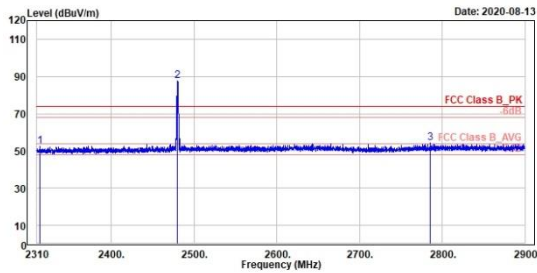

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2313.66	52.57	15.48	37.09	74.00	-21.43	103	104	Peak	Horizontal	
2 *	2480.00	87.41	49.85	37.56	74.00	13.41	103	104	Peak	Horizontal	
3	2785.30	54.18	16.29	37.89	74.00	-19.82	103	104	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

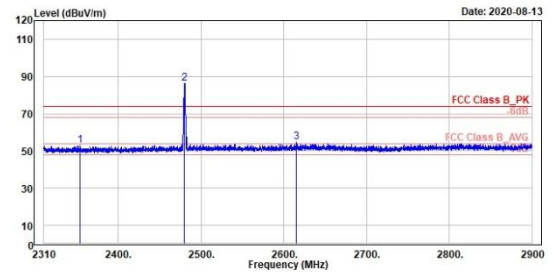


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2353.78	52.82	15.60	37.22	74.00	-21.18	362	181	Peak	Vertical	
2 *	2480.00	86.46	48.90	37.56	74.00	12.46	362	181	Peak	Vertical	
3	2615.74	54.67	16.72	37.95	74.00	-19.33	362	181	Peak	Vertical	

BLE_1M

High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

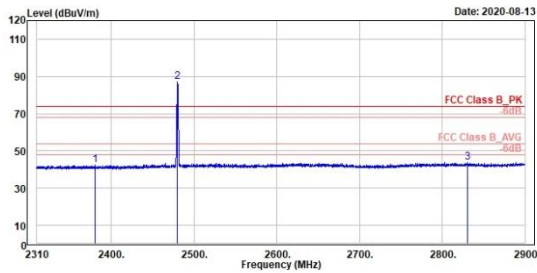


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2380.09	42.21	4.91	37.30	54.00	-11.79	103	104	Average	Horizontal		
2 *	2400.00	86.92	49.36	37.56	54.00	32.92	103	104	Average	Horizontal		
3	2830.97	43.78	5.78	38.00	54.00	-10.22	103	104	Average	Horizontal		

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

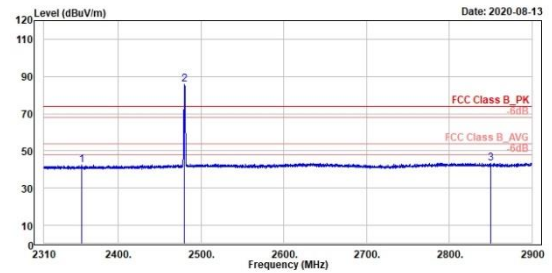

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2356.14	42.37	5.15	37.22	54.00	-11.63	362	181	Average	Vertical		
2 *	2400.00	85.89	48.33	37.56	54.00	31.89	362	181	Average	Vertical		
3	2850.20	43.56	5.49	38.07	54.00	-10.44	362	181	Average	Vertical		


Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

BLE_1M

Low Channel 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

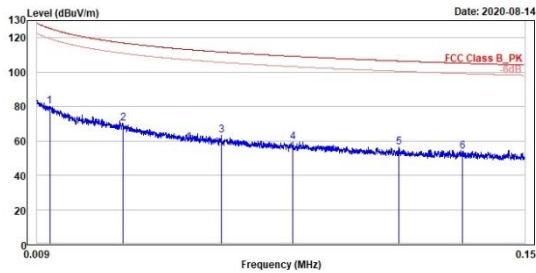

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	79.97	2.82	77.15	125.52	-45.55	100	279	QP	vertical		
2	0.03	70.34	0.83	69.51	116.99	-46.65	100	73	QP	vertical		
3	0.06	63.48	0.13	63.35	111.70	-48.22	100	83	QP	vertical		
4	0.08	59.49	-1.53	61.02	109.23	-49.74	100	144	QP	vertical		
5	0.11	56.18	-2.28	58.46	106.48	-50.30	100	193	QP	vertical		
6	0.13	53.96	-3.43	57.39	105.18	-51.22	100	218	QP	vertical		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

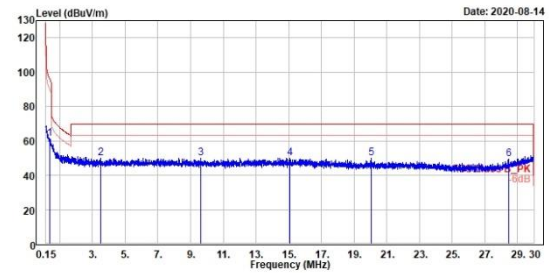

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.36	61.42	12.32	49.10	96.36	-34.94	100	230	QP	vertical		
2	3.50	50.07	11.80	38.27	69.50	-19.43	100	130	QP	vertical		
3	9.61	50.10	12.43	37.67	69.50	-19.40	100	136	QP	vertical		
4	15.08	50.00	12.30	37.70	69.50	-19.50	100	60	QP	vertical		
5	20.04	50.03	13.78	36.25	69.50	-19.47	100	90	QP	vertical		
6	28.45	49.63	13.58	36.05	69.50	-19.87	100	127	QP	vertical		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

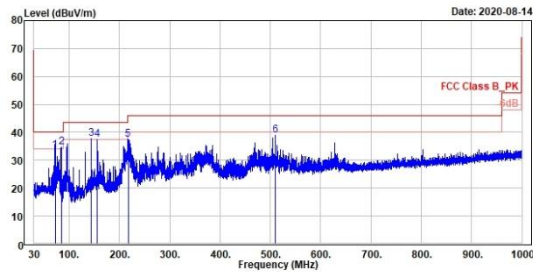

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	72.20	33.48	44.00	-10.52	40.00	-6.52	300	285	QP	horizontal		
2	84.13	34.67	47.51	-12.84	40.00	-5.33	200	243	QP	horizontal		
3	143.78	37.64	45.30	-7.66	43.50	-5.86	300	277	QP	horizontal		
4	156.10	37.42	45.01	-7.59	43.50	-6.08	300	233	QP	horizontal		
5	217.31	37.43	47.07	-9.64	46.00	-8.57	200	118	QP	horizontal		
6	510.25	39.00	41.97	-2.97	46.00	-7.00	100	202	QP	horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

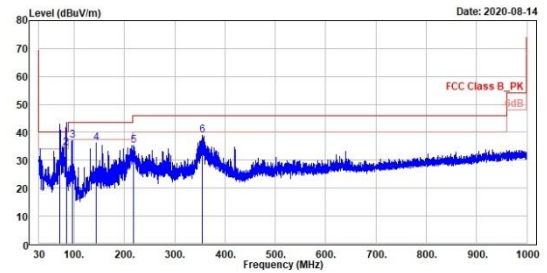

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	72.00	37.12	47.61	-10.49	40.00	-2.88	156	234	QP	vertical		
2	84.03	34.47	47.29	-12.82	40.00	-5.53	200	200	QP	vertical		
3	96.06	37.09	50.46	-13.37	43.50	-6.41	100	276	QP	vertical		
4	144.17	36.35	44.00	-7.65	43.50	-7.15	100	210	QP	vertical		
5	217.50	35.42	45.06	-9.64	46.00	-10.58	100	140	QP	vertical		
6	355.34	38.85	44.50	-5.65	46.00	-7.15	100	162	QP	vertical		

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


BLE_1M

Low Channel (Horizontal)


Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

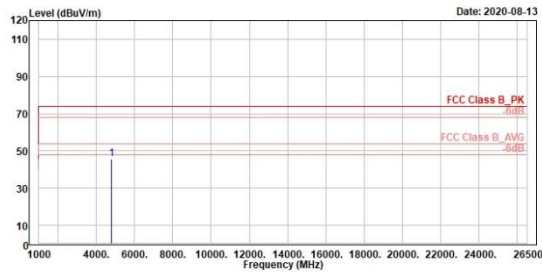

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

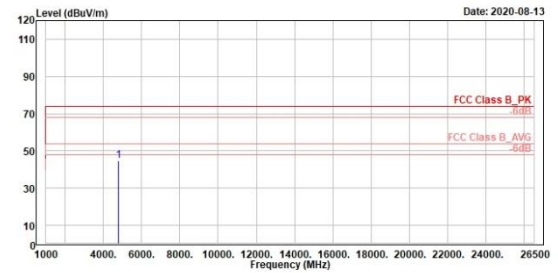


BLE_1M


Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

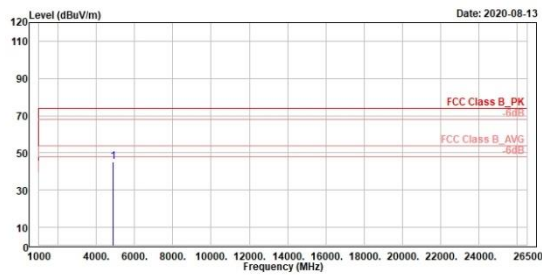

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

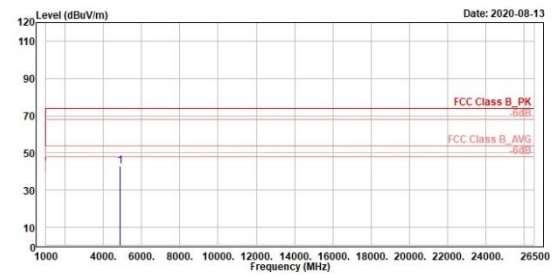


BLE_1M


High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

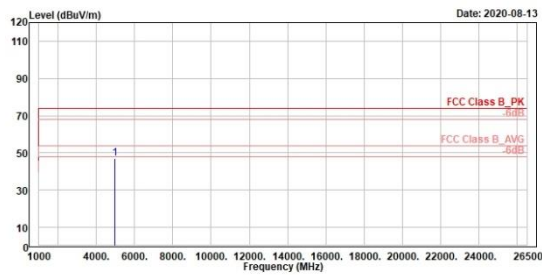

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

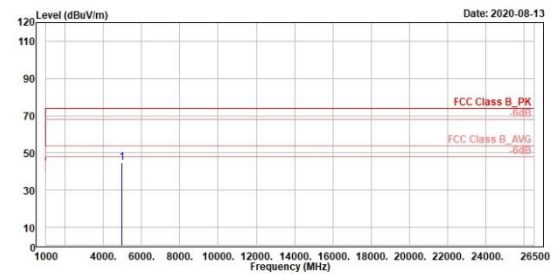

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)




TÜV Rheinland Taiwan Ltd(New Taipei City Branch),
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
 Tel:+886-2172-1000 Fax:+886-2172-1322

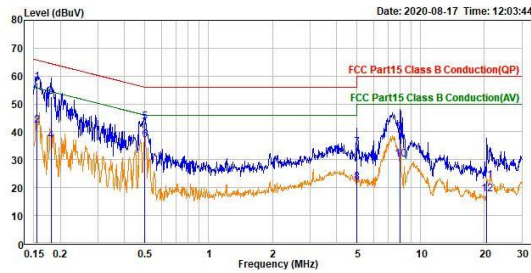

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.155	37.54	20.17	57.71	65.75	-8.04	QP	line1	
2	0.155	22.11	20.17	42.28	55.75	-13.47	Average	line1	
3	0.180	32.54	20.17	52.71	64.47	-11.76	QP	line1	
4	0.180	16.70	20.17	36.87	54.47	-17.60	Average	line1	
5	0.499	23.31	20.18	43.49	56.02	-12.53	QP	line1	
6	0.499	16.96	20.18	37.14	46.02	-8.88	Average	line1	
7	4.987	14.09	20.31	34.40	56.00	-21.60	QP	line1	
8	4.987	1.48	20.31	21.79	46.00	-24.21	Average	line1	
9	8.007	19.33	20.37	39.70	60.00	-20.30	QP	line1	
10	8.007	9.65	20.37	30.02	50.00	-19.98	Average	line1	
11	20.540	1.87	20.62	22.49	60.00	-37.51	QP	line1	
12	20.540	-2.85	20.62	17.77	50.00	-32.23	Average	line1	



TÜV Rheinland Taiwan Ltd(New Taipei City Branch),
 No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
 Tel:+886-2172-1000 Fax:+886-2172-1322

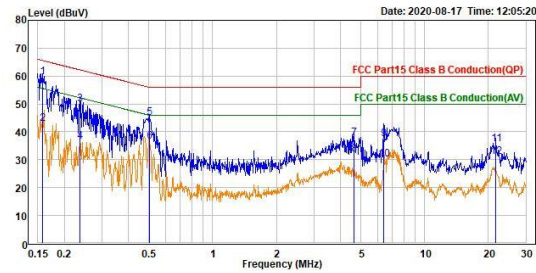

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.158	39.55	20.17	59.72	65.54	-5.82	QP	neutral	
2	0.158	22.79	20.17	42.96	55.54	-12.58	Average	neutral	
3	0.237	29.77	20.17	49.94	62.19	-12.25	QP	neutral	
4	0.237	16.43	20.17	36.60	52.19	-15.59	Average	neutral	
5	0.504	24.86	20.18	45.04	56.00	-10.96	QP	neutral	
6	0.504	16.28	20.18	36.46	46.00	-9.54	Average	neutral	
7	4.628	17.50	20.29	37.79	56.00	-18.21	QP	neutral	
8	4.628	11.78	20.29	32.07	46.00	-13.93	Average	neutral	
9	6.430	16.94	20.34	37.28	60.00	-22.72	QP	neutral	
10	6.430	9.84	20.34	30.18	50.00	-19.82	Average	neutral	
11	21.698	15.07	20.66	35.73	60.00	-24.27	QP	neutral	
12	21.698	10.28	20.66	30.94	50.00	-19.06	Average	neutral	