

FCC RADIO TEST REPORT

FCC ID: 2AW68-W8919B

Product: WOWtv

Trade Mark: WOWtv

Model No.: DV8919-F

Family Model: N/A

Report No.: S21011900702004

Issue Date: 23 Mar. 2021

Prepared for

Shenzhen SDMC Technology Co.,Ltd.

19/F, Changhong Technology Building, No.18, Keji South 12th Road, High-tech
Industrial Park, Nanshan District, Shenzhen, China, 518022

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

Tel: 400-800-6106, 0755-2320 0050 / 2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen SDMC Technology Co.,Ltd.
 Address : 19/F,Changhong Technology Building,No.18,Keji South 12th Road,
 High-tech Industrial Park, Nanshan District, Shenzhen, China, 518022
 Manufacturer's Name : Shenzhen SDMC Technology Co.,Ltd.
 Address : 19/F,Changhong Technology Building,No.18,Keji South 12th Road,
 High-tech Industrial Park, Nanshan District, Shenzhen, China, 518022

Product description

Product name : WOWtv
 Model and/or type reference : DV8919-F
 Family Model : N/A

Standards : FCC Part15.407

Test procedure ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures
 New Rules v02r01
 FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules
 v02
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01
 KDB 905462 D03 Client Without DFS New Rules v01r02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 19 Jan. 2021 ~ 23 Mar. 2021

Date of Issue 23 Mar. 2021

Test Result..... **Pass**

Testing Engineer : 
(Mary Hu)

Technical Manager : 
(Jason Chen)

Authorized Signatory : 
(Alex Li)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	8
1.1 FACILITIES AND ACCREDITATIONS	9
1.2 MEASUREMENT UNCERTAINTY	9
1 . GENERAL INFORMATION	10
1.1 GENERAL DESCRIPTION OF EUT	10
1.2 DESCRIPTION OF TEST MODES	14
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	16
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	17
2 . EMC EMISSION TEST	19
2.1 CONDUCTED EMISSION MEASUREMENT	19
2.1.1 APPLICABLE STANDARD	19
2.1.2 CONFORMANCE LIMIT	19
2.1.3 TEST CONFIGURATION	19
2.1.4 TEST PROCEDURE	19
2.2 RADIATED EMISSION MEASUREMENT	36
2.2.1 APPLICABLE STANDARD	36
2.2.2 CONFORMANCE LIMIT	36
2.2.3 MEASURING INSTRUMENTS	36
2.2.4 TEST CONFIGURATION	37
2.2.5 TEST PROCEDURE	38
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	39
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	40
2.2.8 TEST RESULTS (1GHZ-18GHZ)	56
2.2.10 TEST RESULTS (18GHZ-40GHZ)	61
3 . POWER SPECTRAL DENSITY TEST	72
3.1 APPLIED PROCEDURES / LIMIT	72
3.2 TEST PROCEDURE	73
3.3 DEVIATION FROM STANDARD	73
3.4 TEST SETUP	73
3.5 EUT OPERATION CONDITIONS	73
3.6 TEST RESULTS	74
4 . 26DB & 99% EMISSION BANDWIDTH	75
4.1 APPLIED PROCEDURES / LIMIT	75
4.2 TEST PROCEDURE	75
4.3 EUT OPERATION CONDITIONS	76
4.4 TEST RESULTS	76

Table of Contents

	Page
5 . MINIMUM 6 DB BANDWIDTH	77
5.1 APPLIED PROCEDURES / LIMIT	77
5.2 TEST PROCEDURE	77
5.3 DEVIATION FROM STANDARD	77
5.4 TEST SETUP	77
5.5 EUT OPERATION CONDITIONS	77
5.6 TEST RESULTS	78
6 . MAXIMUM CONDUCTED OUTPUT POWER	79
6.1 PPLIED PROCEDURES / LIMIT	79
6.2 TEST RESULTS	81
7 . OUT OF BAND EMISSIONS	82
7.1 APPLICABLE STANDARD	82
7.2 TEST PROCEDURE	82
7.3 DEVIATION FROM STANDARD	82
7.4 TEST SETUP	82
7.5 EUT OPERATION CONDITIONS	83
7.6 TEST RESULTS	84
8. FREQUENCY STABILITY MEASUREMENT	85
8.1 LIMIT	85
8.2 TEST PROCEDURES	85
8.3 TEST SETUP LAYOUT	85
8.4 EUT OPERATION DURING TEST	85
8.5 TEST RESULTS	86
9. DYNAMIC FREQUENCY SELECTION(DFS)	98
9.1 APPLICABILITY OF DFS REQUIREMENTS	98
9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	98
9.3 DFS RESPONSE REQUIREMENT VALUES	99
9.4 SHORT PULSE RADAR TEST WAVEFORMS	99
9.5 CALIBRATION SETUP AND DFS TEST RESULTS	100
9.6 CONDUCTED CALIBRATION SETUP	100
9.7 RADAR WAVEFORM CALIBRATION RESULT	101
9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	102
9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	103

Table of Contents

	Page
10. ANTENNA REQUIREMENT	104
10.1 STANDARD REQUIREMENT	104
10.2 EUT ANTENNA	104
END OF REPORT	104

Revision History

[illegible]

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407 (b)(8)(9)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier: CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4297.38
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	WOWtv	
Trade Mark	WOWtv	
Model Name	DV8919-F	
Family Model	N/A	
Model Difference	N/A	
FCC ID	2AW68-W8919B	
Product Description	Mode Supported	☒ 802.11a ☒ 802.11n(HT20) ☒ 802.11n(HT40) ☒ 802.11ac(HT20) ☒ 802.11ac(HT40) ☒ 802.11ac(HT80) ☒ 802.11ax(HT20) ☒ 802.11ax(HT40) ☒ 802.11ax(HT80)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9 802.11ax(VHT20): NSS1, MCS0-MCS8 802.11ax(VHT40/VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM
	Operating Frequency Range	☒ U-NII-1: 5150 MHz ~5250MHz ☒ U-NII-2A: 5250MHz~5350MHz ☒ U-NII-2C: 5470MHz~5725MHz ☒ U-NII-3: 5725 MHz ~5850 MHz
	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client
	DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection
	Support TPC	☐ YES ☒ NO
	Antenna Type	Antenna 1: FPCB antenna Antenna 2: FPCB antenna
	Antenna Gain	Antenna 1: 4.15dBi Antenna 2: 4.33dBi
	Smart system	☒ SISO for 802.11a/n/ac/ax ☒ MIMO for 802.11n/ac/ax
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	

Ratings	☒ DC supply: DC 5V from adapter
Adapter	☒ Adapter supply: Adapter 1: Model: DCT12W050200US-A0 Input: AC100-240V~50/60Hz 0.3A Output: DC5.0V $\overline{\text{---}}$ 2A Adapter 2: Model:SA12BV-050200U Input: AC100-240V~50/60Hz 0.4A Output: DC5.0V $\overline{\text{---}}$ 2A
Connecting I/O Port(s)	Please refer to the User's Manual
HW Version	V1
SW Version	Android 10

Note:


- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz
	56	5280 MHz	62	5310 MHz		
	60	5300 MHz				
	64	5320 MHz				
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz
	108	5540 MHz	118	5590 MHz		
	112	5560 MHz	126	5630 MHz		
	116	5580 MHz	134	5670 MHz		
	120	5600 MHz				
	124	5620 MHz				
	128	5640 MHz				
	132	5660 MHz				
	136	5680 MHz				
	140	5700 MHz				
U-NII-3	149	5745 MHz	151	5755 MHz	155	5775 MHz
	153	5765 MHz	159	5795 MHz		
	157	5785 MHz				
	161	5805 MHz				
	165	5825 MHz				

Table for Filed Antenna

Antenna	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPCB antenna	IPEX	4.15	Wifi Antenna
2	N/A	N/A	FPCB antenna	IPEX	4.33	Wifi Antenna

This EUT has supports Bluetooth, WIFI2.4G / 5G.

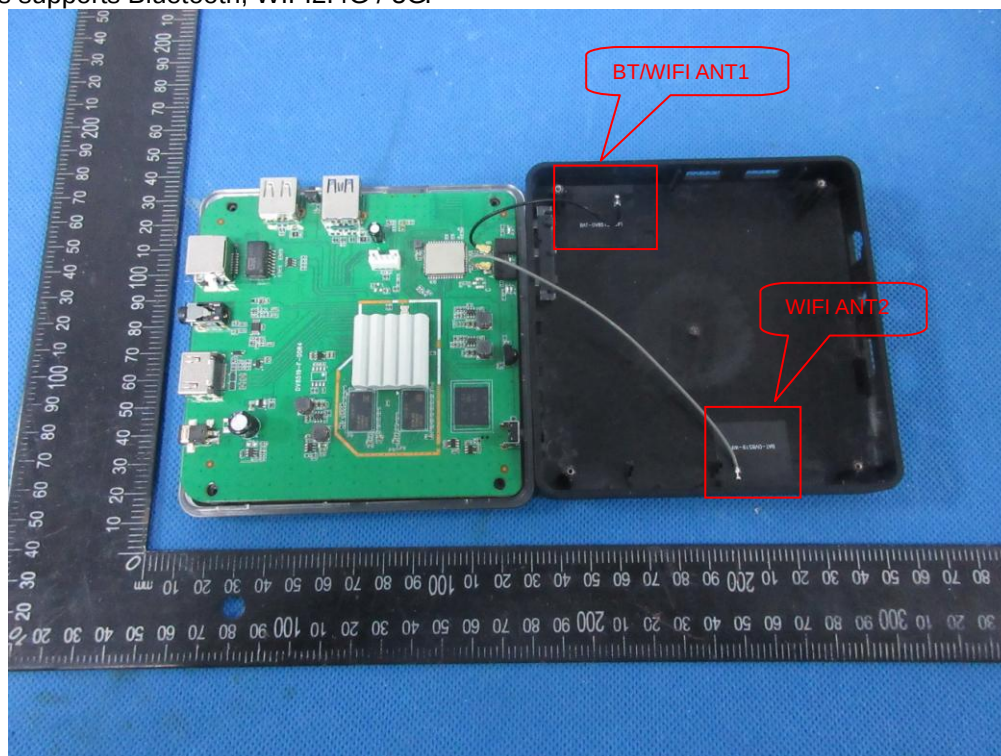

The module 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.111a/n/ac/ax	1TX, 1RX
802.11 n/ac/ax	2TX, 2RX

For 5GHz mode, Antenna 1,2 are transmitting, each with the same directional gain.
For MIMO mode, Directional gain= $[10\log(10^{G1/20} + 10^{G2/20})/N_{ANT}]$ dBi = 7.25dBi in 5GHz
the 802.11n(20/40) ac(20/40/80) ax(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.
G2 means antenna gain for ANT 2 in dBi.
 N_{ANT} means the number of Antennas.

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n / ac 20 / ax20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40/ax40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80/ax80 CH42/CH58/CH106/CH122/CH155

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n / ac 20 / ax20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40/ax40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80/ax80 CH42/CH58/CH106/CH122/CH155

For AC Coducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode


For For Conducted Test Cases	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n / ac 20 / ax20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40/ax40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80/ax80 CH42/CH58/CH106/CH122/CH155

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

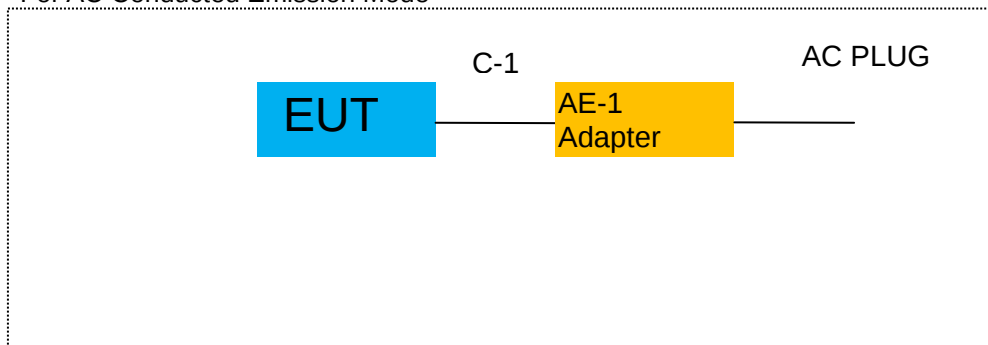

For Radiated Test Cases

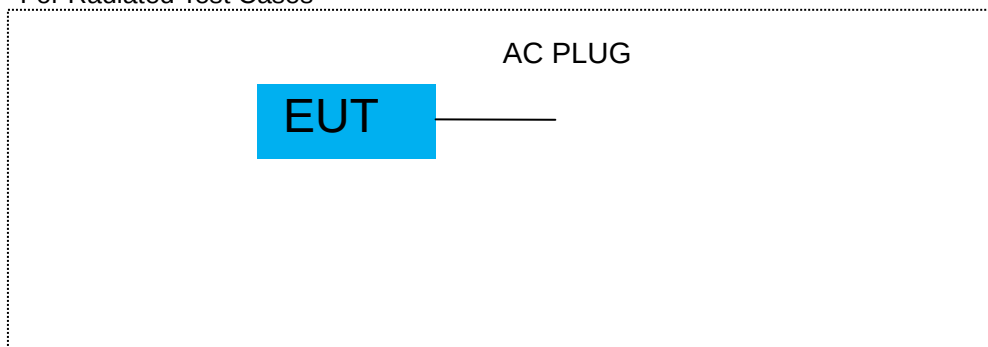

For Conducted Test Cases

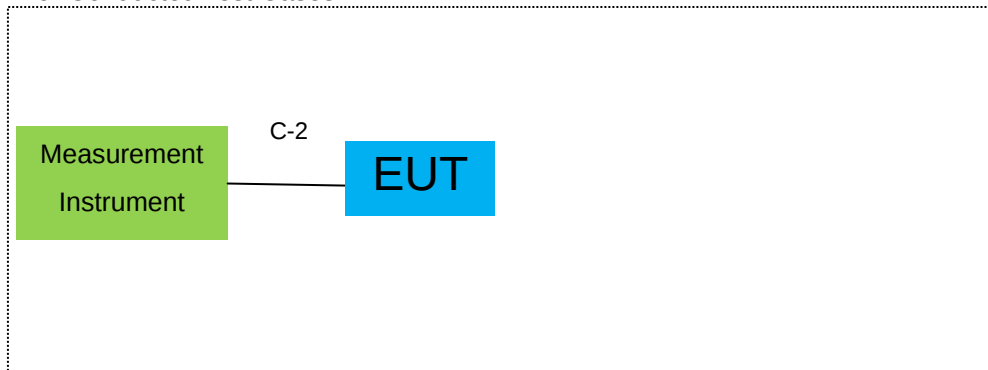

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter 1	N/A	DCT12W050200US-A0	N/A	Peripherals
	Adapter 2	N/A	SA12BV-050200U	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	DC Cable	YES	NO	1.2m	
C-2	RF Cable	YES	NO	0.1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.7.13	2021.7.12	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.08.07	2021.08.06	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
8	Amplifier	EMC	EMC051835SE	980246	2020.7.13	2021.7.12	1 year
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2020.05.11	2021.05.10	1 year
10	Power Meter	DARE	RPR3006W	15I00041SN084	2020.7.13	2021.7.12	1 year
11	USB RF Power Sensor	DARE	RPR3006W	15I00041SN084	2020.7.13	2021.7.12	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.6	2022.08.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2020.04.11	2021.04.10	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.7.13	2021.7.12	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
18	Low Noise Amplifier	B&Z	BZ-P540-550850-452727	16476-11729	2020.04.15	2021.04.14	1 year
19	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2020.05.11	2021.05.10	1 year
20	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.04.11	2021.04.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2021.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

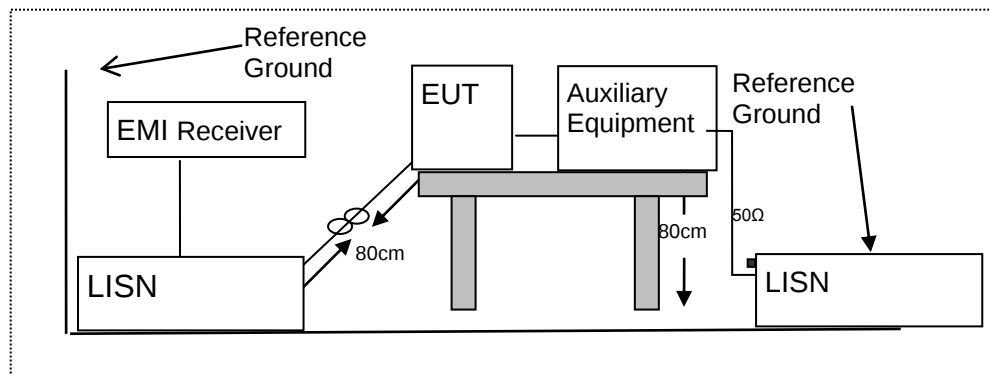

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1607	42.74	9.56	52.30	65.42	-13.12	QP
0.1607	27.12	9.56	36.68	55.42	-18.74	AVG
1.5540	25.85	9.58	35.43	56.00	-20.57	QP
1.5540	13.21	9.58	22.79	46.00	-23.21	AVG
1.9056	26.07	9.58	35.65	56.00	-20.35	QP
1.9056	13.80	9.58	23.38	46.00	-22.62	AVG
18.2419	36.17	9.88	46.05	60.00	-13.95	QP
18.2419	29.75	9.88	39.63	50.00	-10.37	AVG
19.7099	36.79	9.93	46.72	60.00	-13.28	QP
19.7099	29.76	9.93	39.69	50.00	-10.31	AVG
23.1259	41.21	9.94	51.15	60.00	-8.85	QP
23.1259	32.38	9.94	42.32	50.00	-7.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

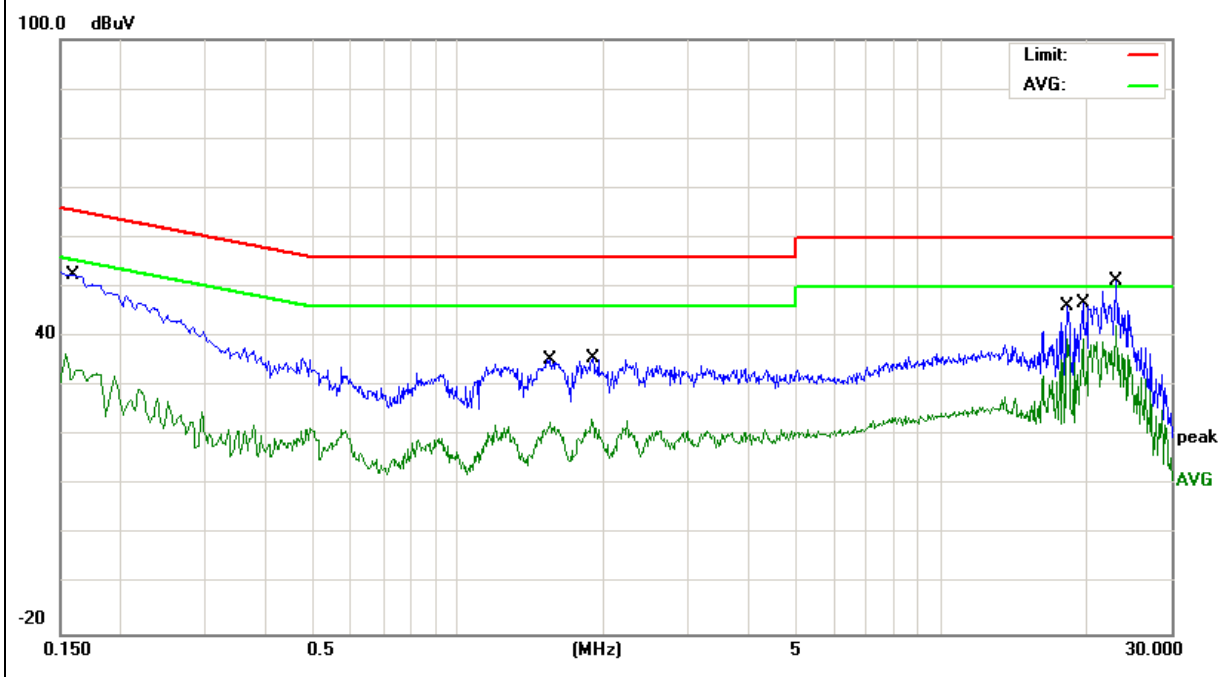


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1539	47.85	9.55	57.40	65.78	-8.38	QP
0.1539	29.24	9.55	38.79	55.78	-16.99	AVG
0.1980	42.34	9.54	51.88	63.69	-11.81	QP
0.1980	26.00	9.54	35.54	53.69	-18.15	AVG
1.3700	24.52	9.55	34.07	56.00	-21.93	QP
1.3700	9.39	9.55	18.94	46.00	-27.06	AVG
1.5380	24.49	9.57	34.06	56.00	-21.94	QP
1.5380	9.97	9.57	19.54	46.00	-26.46	AVG
2.3020	24.45	9.57	34.02	56.00	-21.98	QP
2.3020	10.50	9.57	20.07	46.00	-25.93	AVG
21.6618	37.83	9.91	47.74	60.00	-12.26	QP
21.6618	27.71	9.91	37.62	50.00	-12.38	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

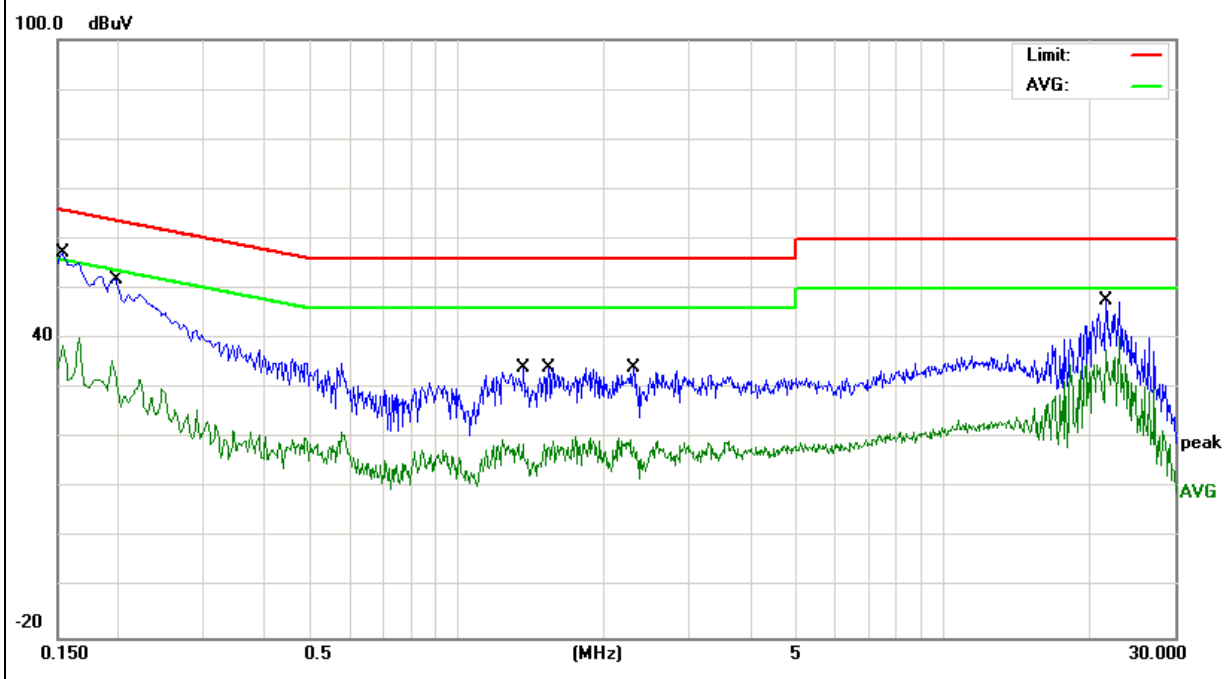


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	48.83	9.56	58.39	65.36	-6.97	QP
0.1620	31.83	9.56	41.39	55.36	-13.97	AVG
0.1859	47.90	9.55	57.45	64.21	-6.76	QP
0.1859	27.68	9.55	37.23	54.21	-16.98	AVG
0.2300	43.76	9.55	53.31	62.45	-9.14	QP
0.2300	25.28	9.55	34.83	52.45	-17.62	AVG
0.6300	30.49	9.55	40.04	56.00	-15.96	QP
0.6300	20.55	9.55	30.10	46.00	-15.90	AVG
1.6779	27.36	9.58	36.94	56.00	-19.06	QP
1.6779	14.68	9.58	24.26	46.00	-21.74	AVG
20.2580	39.70	9.94	49.64	60.00	-10.36	QP
20.2580	32.71	9.94	42.65	50.00	-7.35	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

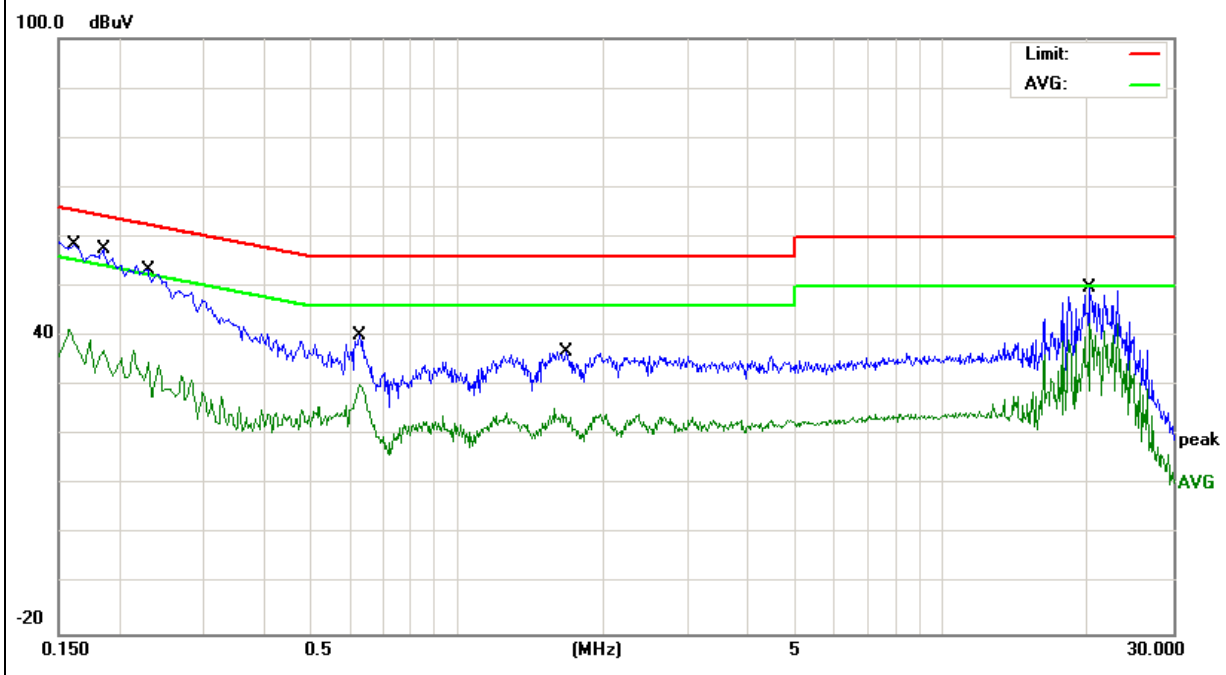


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1539	49.67	9.55	59.22	65.78	-6.56	QP
0.1539	31.79	9.55	41.34	55.78	-14.44	AVG
0.1739	46.44	9.55	55.99	64.77	-8.78	QP
0.1739	27.43	9.55	36.98	54.77	-17.79	AVG
0.7099	29.33	9.54	38.87	56.00	-17.13	QP
0.7099	15.68	9.54	25.22	46.00	-20.78	AVG
1.5339	26.55	9.57	36.12	56.00	-19.88	QP
1.5339	14.01	9.57	23.58	46.00	-22.42	AVG
1.9859	26.89	9.57	36.46	56.00	-19.54	QP
1.9859	13.85	9.57	23.42	46.00	-22.58	AVG
20.2579	40.18	9.92	50.10	60.00	-9.90	QP
20.2579	32.20	9.92	42.12	50.00	-7.88	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

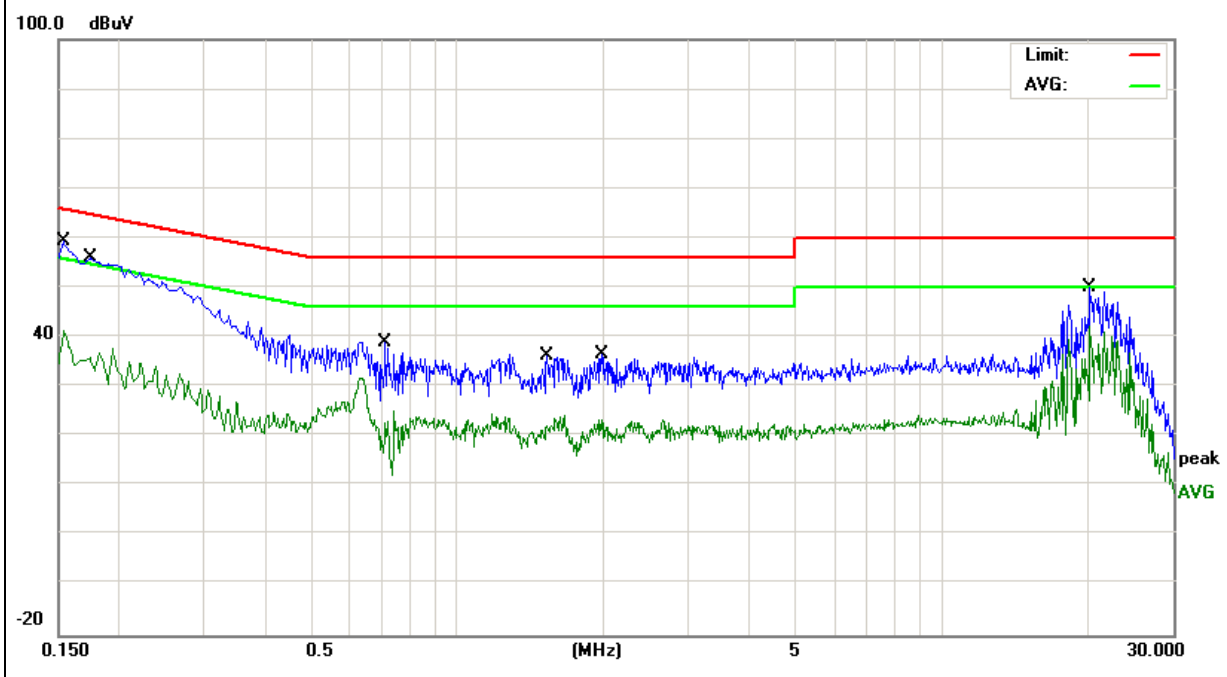


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1590	45.01	9.56	54.57	65.51	-10.94	QP
0.1590	30.25	9.56	39.81	55.51	-15.70	AVG
1.2940	23.94	9.56	33.50	56.00	-22.50	QP
1.2940	11.94	9.56	21.50	46.00	-24.50	AVG
2.0019	24.55	9.58	34.13	56.00	-21.87	QP
2.0019	12.23	9.58	21.81	46.00	-24.19	AVG
2.4660	24.53	9.58	34.11	56.00	-21.89	QP
2.4660	11.57	9.58	21.15	46.00	-24.85	AVG
20.2576	38.43	9.94	48.37	60.00	-11.63	QP
20.2576	31.87	9.94	41.81	50.00	-8.19	AVG
21.6615	40.24	9.94	50.18	60.00	-9.82	QP
21.6615	32.57	9.94	42.51	50.00	-7.49	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

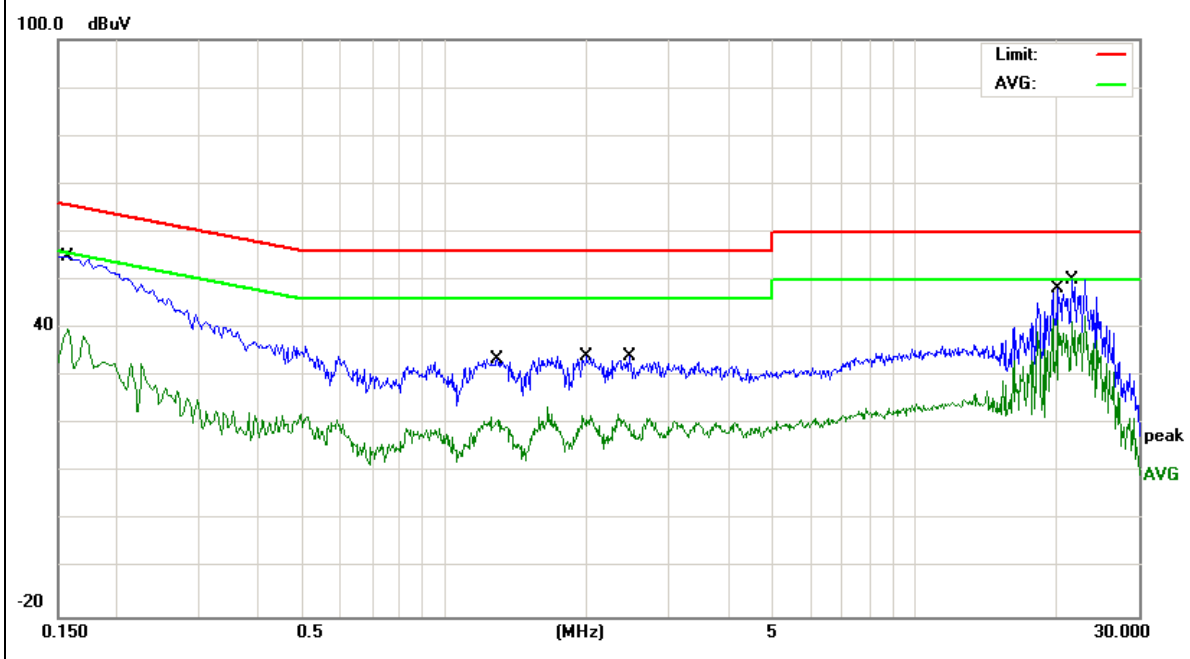


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1500	46.29	9.55	55.84	65.99	-10.15	QP
0.1500	28.50	9.55	38.05	55.99	-17.94	AVG
0.1737	44.40	9.55	53.95	64.78	-10.83	QP
0.1737	24.09	9.55	33.64	54.78	-21.14	AVG
0.9415	22.87	9.55	32.42	56.00	-23.58	QP
0.9415	9.67	9.55	19.22	46.00	-26.78	AVG
1.7016	23.79	9.57	33.36	56.00	-22.64	QP
1.7016	9.81	9.57	19.38	46.00	-26.62	AVG
19.7099	35.70	9.91	45.61	60.00	-14.39	QP
19.7099	26.72	9.91	36.63	50.00	-13.37	AVG
23.1295	38.64	9.91	48.55	60.00	-11.45	QP
23.1295	30.38	9.91	40.29	50.00	-9.71	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

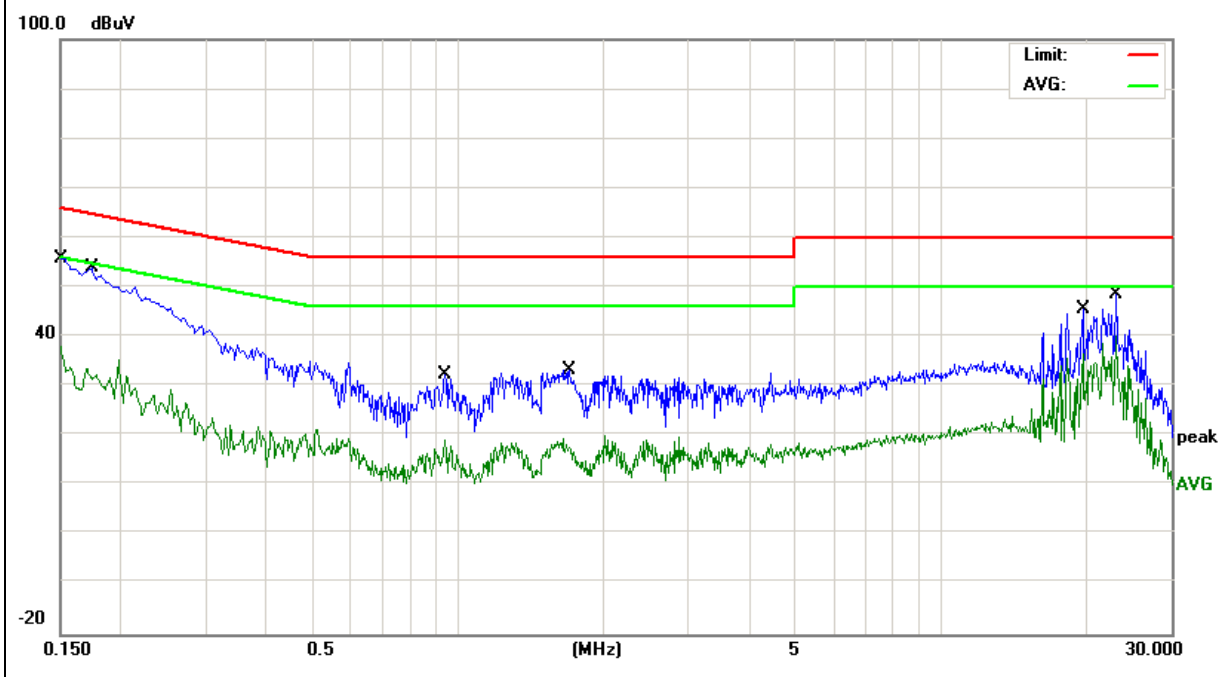


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1524	53.24	9.56	62.80	65.86	-3.06	QP
0.1524	33.41	9.56	42.97	55.86	-12.89	AVG
0.1640	53.24	9.56	62.80	65.25	-2.45	QP
0.1640	33.80	9.56	43.36	55.25	-11.89	AVG
0.3082	41.96	9.54	51.50	60.02	-8.52	QP
0.3082	25.25	9.54	34.79	50.02	-15.23	AVG
0.6419	31.05	9.55	40.60	56.00	-15.40	QP
0.6419	23.28	9.55	32.83	46.00	-13.17	AVG
1.4737	30.14	9.56	39.70	56.00	-16.30	QP
1.4737	20.12	9.56	29.68	46.00	-16.32	AVG
21.4894	37.76	9.94	47.70	60.00	-12.30	QP
21.4894	28.15	9.94	38.09	50.00	-11.91	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

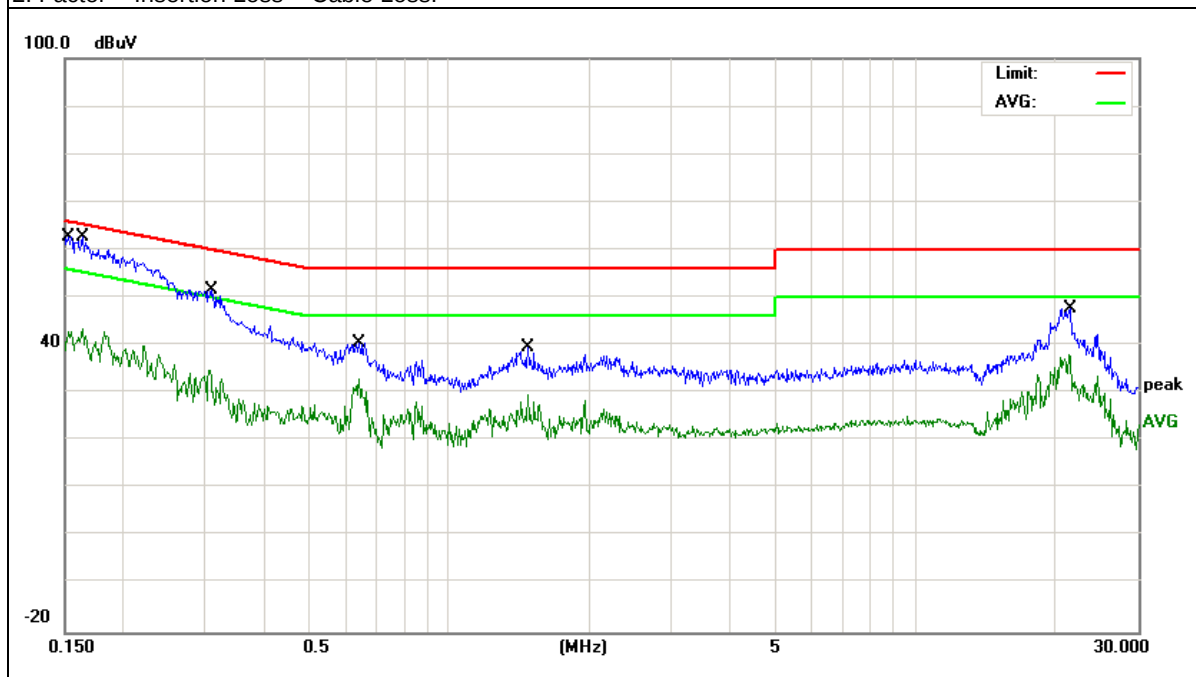


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1539	52.35	9.55	61.90	65.78	-3.88	QP
0.1539	32.80	9.55	42.35	55.78	-13.43	AVG
0.1728	51.05	9.55	60.60	64.82	-4.22	QP
0.1728	32.25	9.55	41.80	54.82	-13.02	AVG
0.4060	38.36	9.54	47.90	57.73	-9.83	QP
0.4060	21.39	9.54	30.93	47.73	-16.80	AVG
0.6107	34.36	9.54	43.90	56.00	-12.10	QP
0.6107	26.39	9.54	35.93	46.00	-10.07	AVG
0.6860	33.36	9.54	42.90	56.00	-13.10	QP
0.6860	22.12	9.54	31.66	46.00	-14.34	AVG
20.3779	35.98	9.92	45.90	60.00	-14.10	QP
20.3779	26.41	9.92	36.33	50.00	-13.67	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

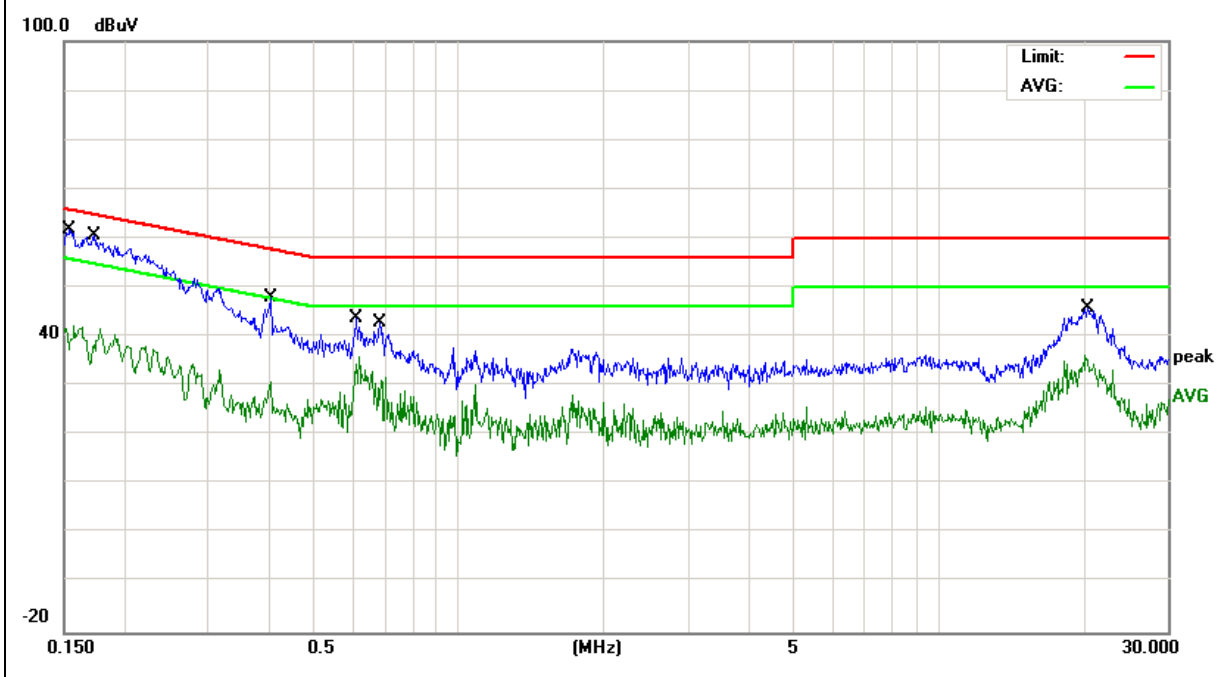


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	44.23	9.56	53.79	65.36	-11.57	QP
0.1620	28.17	9.56	37.73	55.36	-17.63	AVG
0.1940	41.55	9.55	51.10	63.86	-12.76	QP
0.1940	23.80	9.55	33.35	53.86	-20.51	AVG
1.2137	24.67	9.56	34.23	56.00	-21.77	QP
1.2137	11.94	9.56	21.50	46.00	-24.50	AVG
1.6060	24.94	9.58	34.52	56.00	-21.48	QP
1.6060	13.12	9.58	22.70	46.00	-23.30	AVG
21.6615	39.16	9.94	49.10	60.00	-10.90	QP
21.6615	32.44	9.94	42.38	50.00	-7.62	AVG
23.1295	41.24	9.94	51.18	60.00	-8.82	QP
23.1295	35.06	9.94	45.00	50.00	-5.00	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

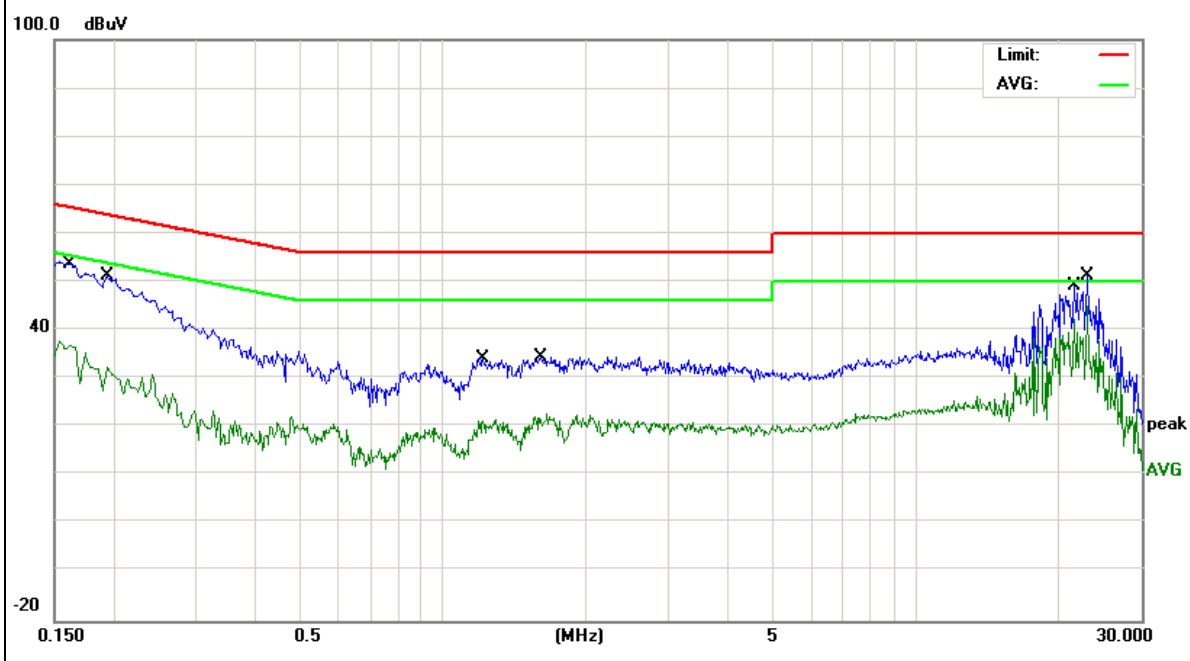


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1580	45.57	9.55	55.12	65.56	-10.44	QP
0.1580	27.63	9.55	37.18	55.56	-18.38	AVG
0.2083	40.13	9.54	49.67	63.27	-13.60	QP
0.2083	24.95	9.54	34.49	53.27	-18.78	AVG
0.5936	23.41	9.54	32.95	56.00	-23.05	QP
0.5936	8.23	9.54	17.77	46.00	-28.23	AVG
1.2338	22.70	9.55	32.25	56.00	-23.75	QP
1.2338	9.38	9.55	18.93	46.00	-27.07	AVG
19.7056	34.22	9.91	44.13	60.00	-15.87	QP
19.7056	27.19	9.91	37.10	50.00	-12.90	AVG
21.6615	36.63	9.91	46.54	60.00	-13.46	QP
21.6615	28.13	9.91	38.04	50.00	-11.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

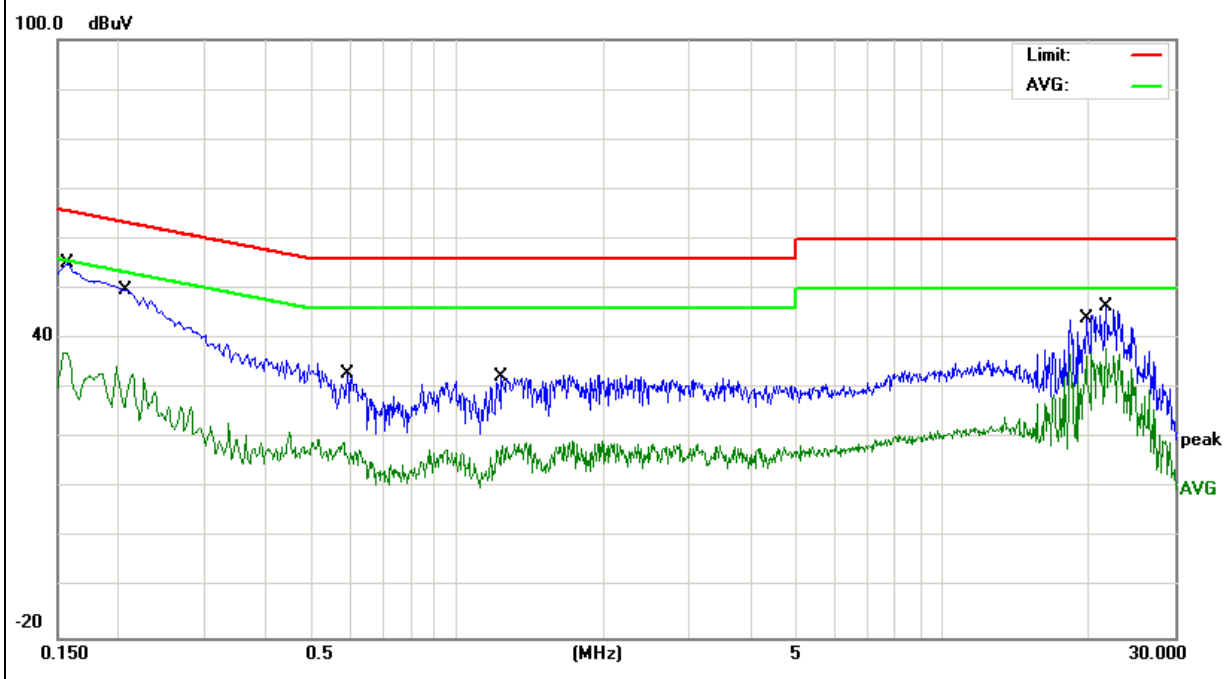


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1524	50.24	9.56	59.80	65.86	-6.06	QP
0.1524	29.61	9.56	39.17	55.86	-16.69	AVG
0.1859	47.85	9.55	57.40	64.21	-6.81	QP
0.1859	28.11	9.55	37.66	54.21	-16.55	AVG
0.6340	30.18	9.55	39.73	56.00	-16.27	QP
0.6340	19.37	9.55	28.92	46.00	-17.08	AVG
1.1937	27.28	9.56	36.84	56.00	-19.16	QP
1.1937	14.69	9.56	24.25	46.00	-21.75	AVG
1.5380	28.32	9.58	37.90	56.00	-18.10	QP
1.5380	15.33	9.58	24.91	46.00	-21.09	AVG
20.1097	36.06	9.94	46.00	60.00	-14.00	QP
20.1097	25.08	9.94	35.02	50.00	-14.98	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

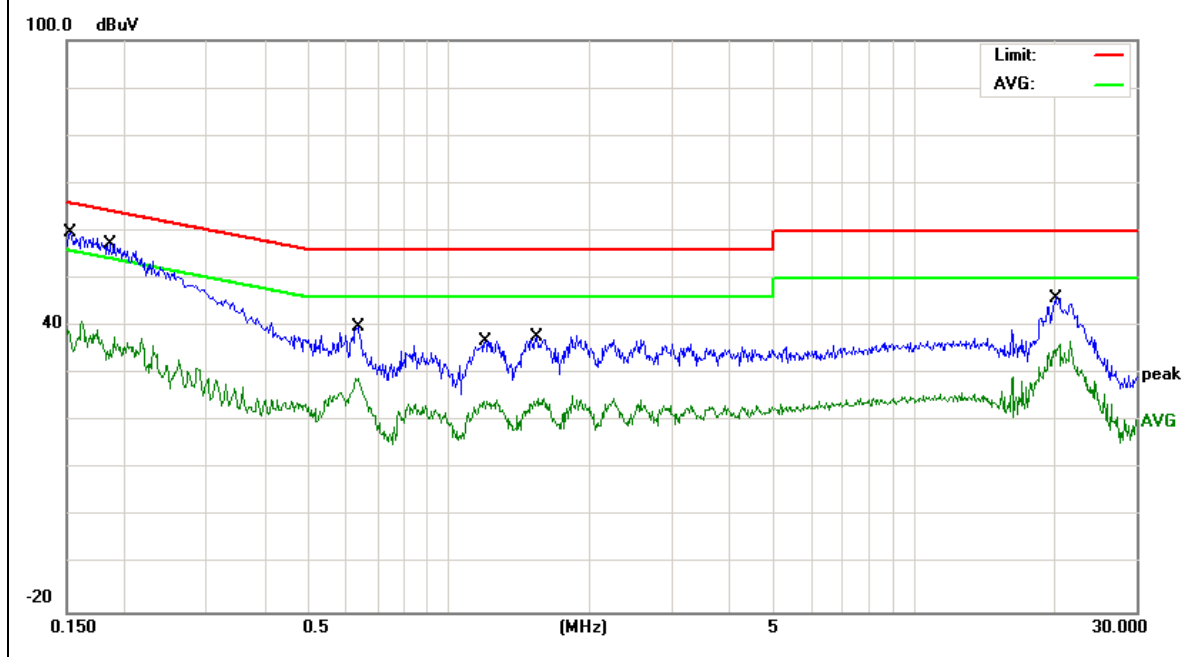


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1665	49.75	9.55	59.30	65.13	-5.83	QP
0.1665	32.52	9.55	42.07	55.13	-13.06	AVG
0.2923	40.27	9.53	49.80	60.46	-10.66	QP
0.2923	23.88	9.53	33.41	50.46	-17.05	AVG
0.6340	30.90	9.54	40.44	56.00	-15.56	QP
0.6340	22.88	9.54	32.42	46.00	-13.58	AVG
1.9296	27.88	9.57	37.45	56.00	-18.55	QP
1.9296	14.60	9.57	24.17	46.00	-21.83	AVG
3.4940	29.81	9.59	39.40	56.00	-16.60	QP
3.4940	19.01	9.59	28.60	46.00	-17.40	AVG
20.6858	37.78	9.92	47.70	60.00	-12.30	QP
20.6858	26.70	9.92	36.62	50.00	-13.38	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

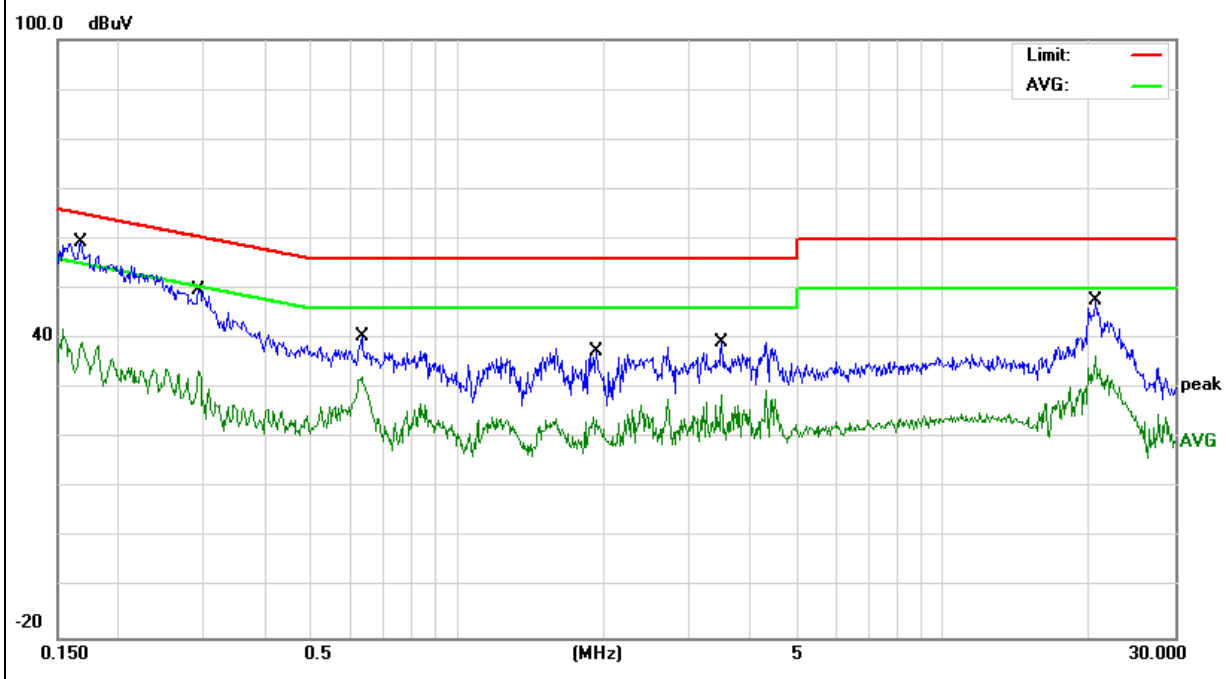


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	43.74	9.56	53.30	65.36	-12.06	QP
0.1620	27.82	9.56	37.38	55.36	-17.98	AVG
0.1980	40.66	9.55	50.21	63.69	-13.48	QP
0.1980	22.97	9.55	32.52	53.69	-21.17	AVG
1.6336	24.84	9.58	34.42	56.00	-21.58	QP
1.6336	13.55	9.58	23.13	46.00	-22.87	AVG
2.0219	24.64	9.58	34.22	56.00	-21.78	QP
2.0219	13.11	9.58	22.69	46.00	-23.31	AVG
20.8060	37.69	9.94	47.63	60.00	-12.37	QP
20.8060	33.52	9.94	43.46	50.00	-6.54	AVG
23.1296	40.62	9.94	50.56	60.00	-9.44	QP
23.1296	34.87	9.94	44.81	50.00	-5.19	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

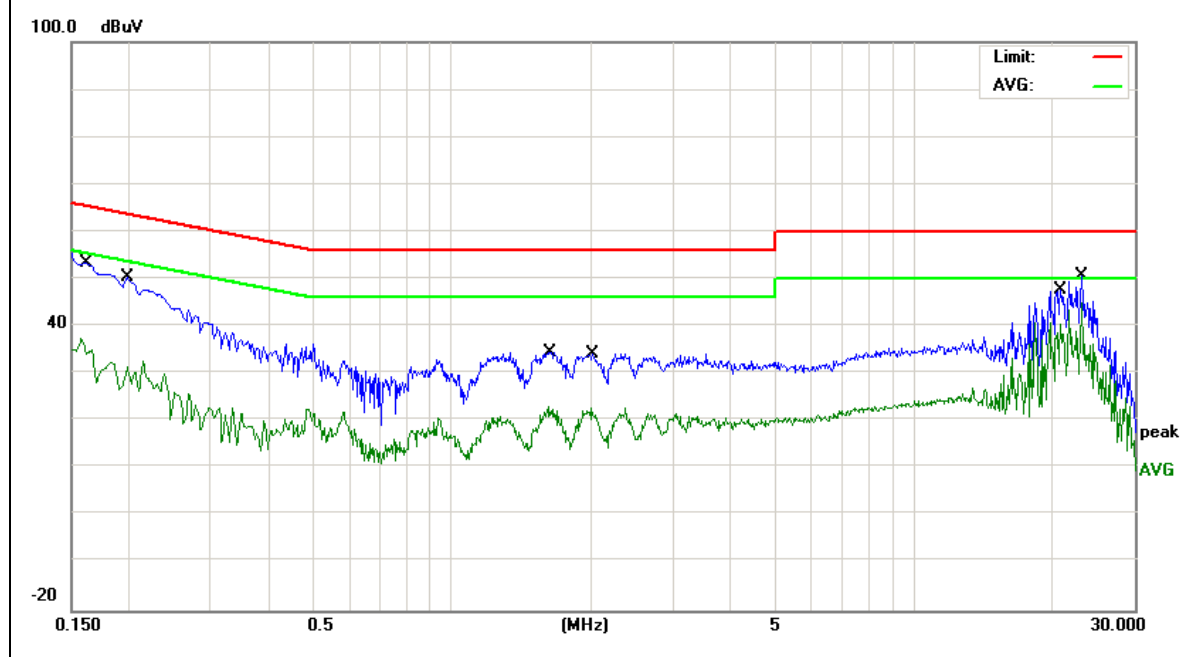


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1590	43.37	9.55	52.92	65.51	-12.59	QP
0.1590	27.21	9.55	36.76	55.51	-18.75	AVG
0.9536	20.98	9.55	30.53	56.00	-25.47	QP
0.9536	8.71	9.55	18.26	46.00	-27.74	AVG
1.4015	23.64	9.55	33.19	56.00	-22.81	QP
1.4015	9.43	9.55	18.98	46.00	-27.02	AVG
1.7620	23.85	9.57	33.42	56.00	-22.58	QP
1.7620	11.51	9.57	21.08	46.00	-24.92	AVG
19.7099	36.99	9.91	46.90	60.00	-13.10	QP
19.7099	28.86	9.91	38.77	50.00	-11.23	AVG
21.6616	36.81	9.91	46.72	60.00	-13.28	QP
21.6616	28.46	9.91	38.37	50.00	-11.63	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

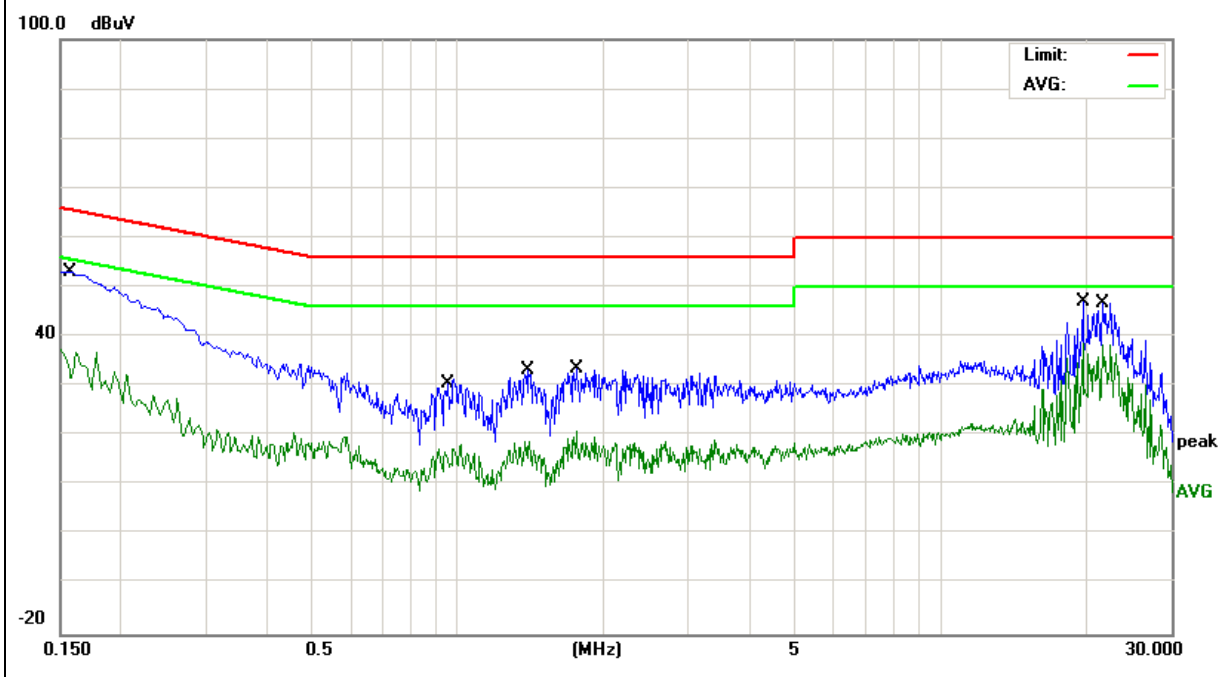


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1564	51.94	9.56	61.50	65.65	-4.15	QP
0.1564	33.01	9.56	42.57	55.65	-13.08	AVG
0.2340	44.87	9.55	54.42	62.30	-7.88	QP
0.2340	25.80	9.55	35.35	52.30	-16.95	AVG
0.6380	33.75	9.55	43.30	56.00	-12.70	QP
0.6380	25.90	9.55	35.45	46.00	-10.55	AVG
1.4979	27.51	9.56	37.07	56.00	-18.93	QP
1.4979	15.30	9.56	24.86	46.00	-21.14	AVG
2.4340	25.77	9.58	35.35	56.00	-20.65	QP
2.4340	14.24	9.58	23.82	46.00	-22.18	AVG
20.0137	35.86	9.94	45.80	60.00	-14.20	QP
20.0137	26.73	9.94	36.67	50.00	-13.33	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

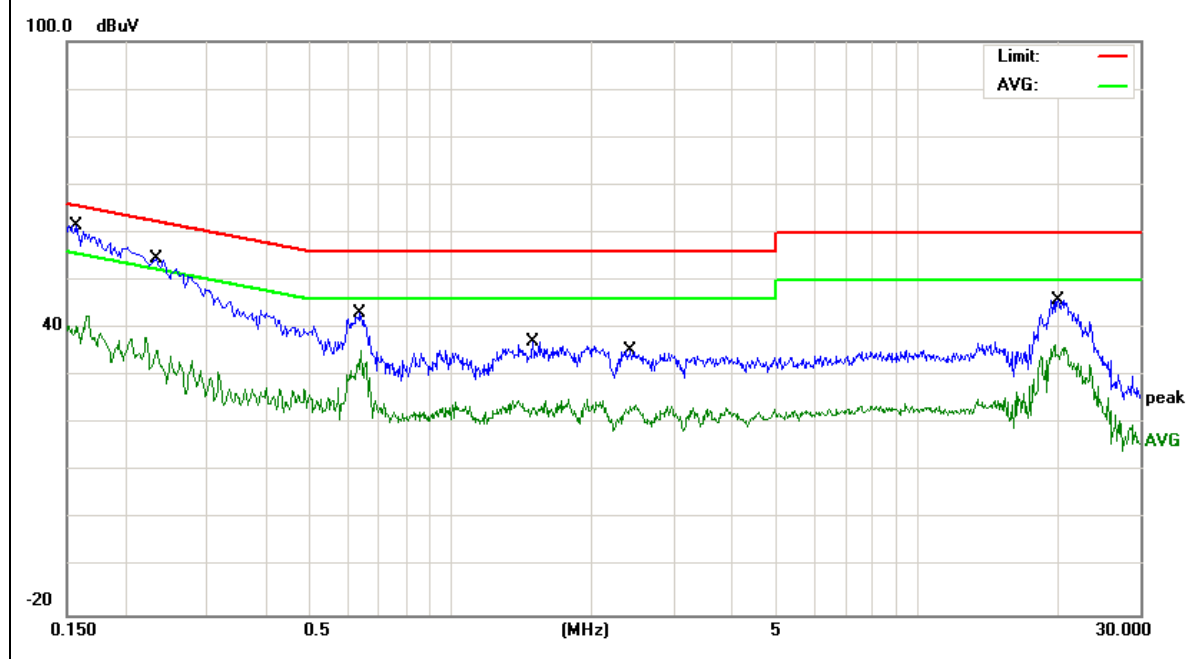


EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	21.6 °C	Relative Humidity :	49%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1665	50.15	9.55	59.70	65.13	-5.43	QP
0.1665	31.86	9.55	41.41	55.13	-13.72	AVG
0.2260	45.53	9.54	55.07	62.59	-7.52	QP
0.2260	29.65	9.54	39.19	52.59	-13.40	AVG
0.6340	31.47	9.54	41.01	56.00	-14.99	QP
0.6340	23.03	9.54	32.57	46.00	-13.43	AVG
1.5940	27.23	9.57	36.80	56.00	-19.20	QP
1.5940	13.92	9.57	23.49	46.00	-22.51	AVG
2.6139	26.19	9.58	35.77	56.00	-20.23	QP
2.6139	14.11	9.58	23.69	46.00	-22.31	AVG
20.5017	38.38	9.92	48.30	60.00	-11.70	QP
20.5017	26.56	9.92	36.48	50.00	-13.52	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

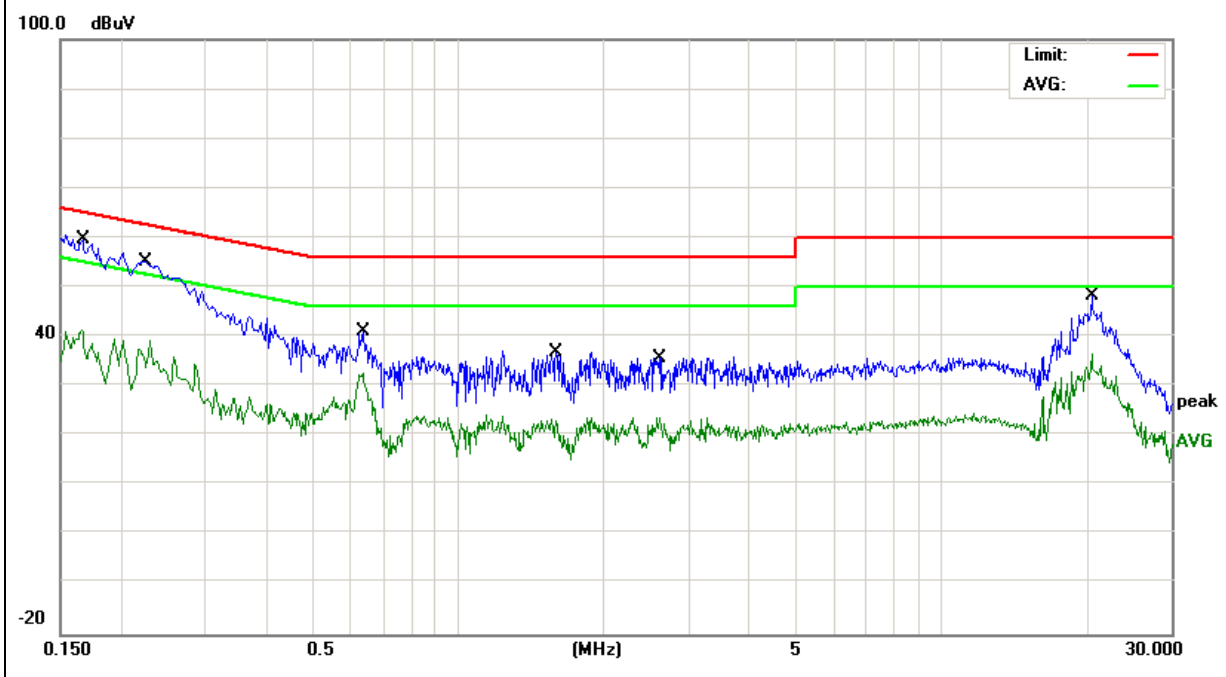

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

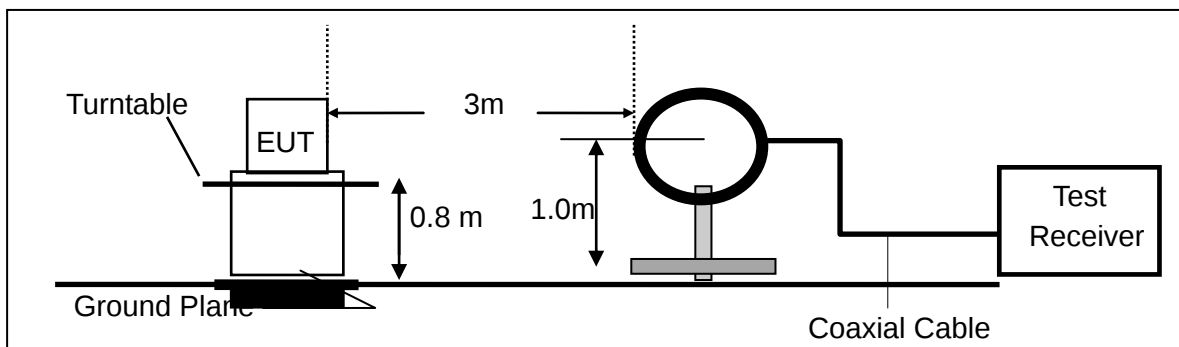

(b) For radiated emissions from 30MHz to 1000MHz

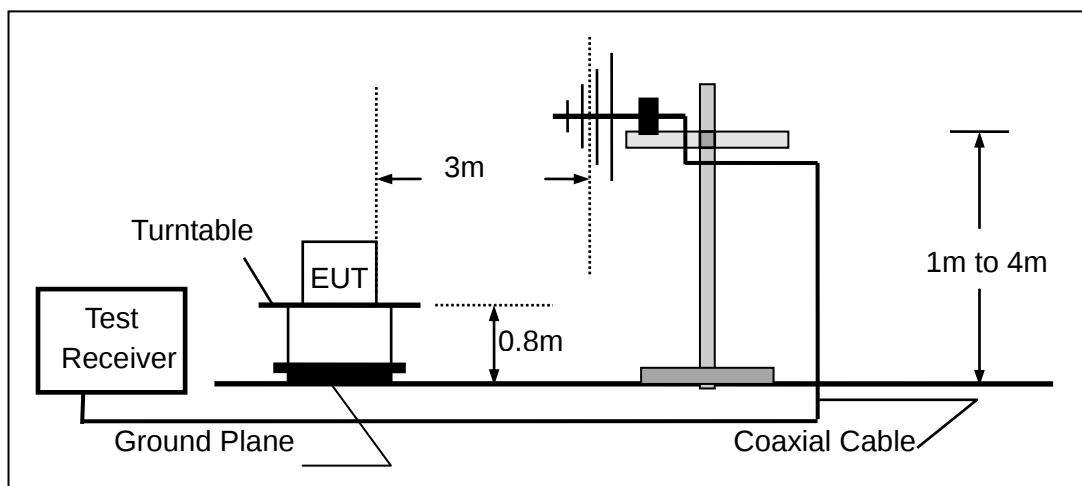

(c) For radiated emissions above 1000MHz

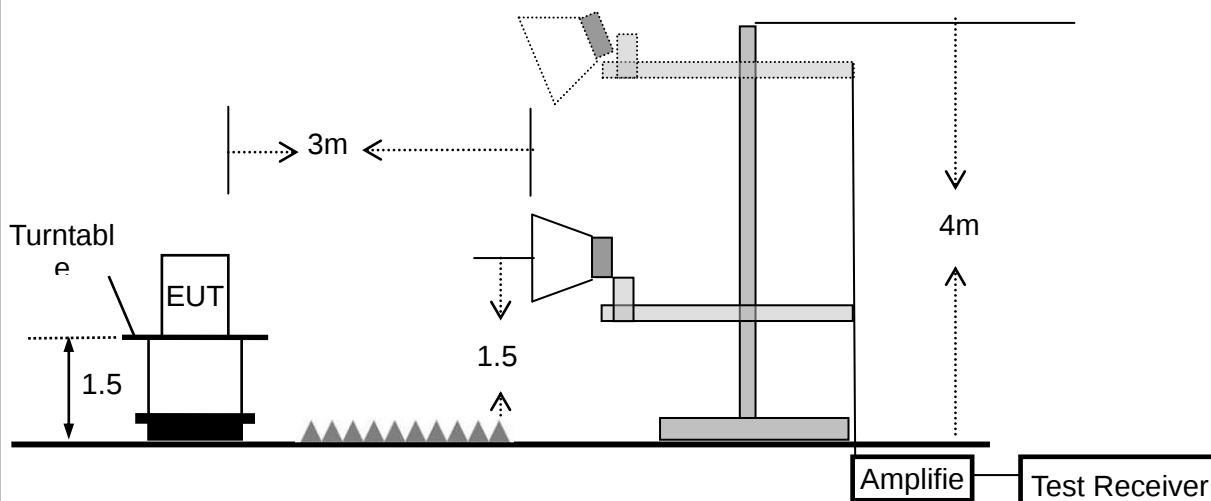

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 1
Test Mode :	TX(5.2G)- 802.11ac40 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.5306	15.26	18.56	33.82	40.00	-6.18	QP
V	53.8818	23.77	7.19	30.96	40.00	-9.04	QP
V	148.4410	21.50	11.99	33.49	43.50	-10.01	QP
V	382.5878	17.14	17.06	34.20	46.00	-11.80	QP
V	444.8514	16.89	18.57	35.46	46.00	-10.54	QP
V	742.2587	14.08	25.06	39.14	46.00	-6.86	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

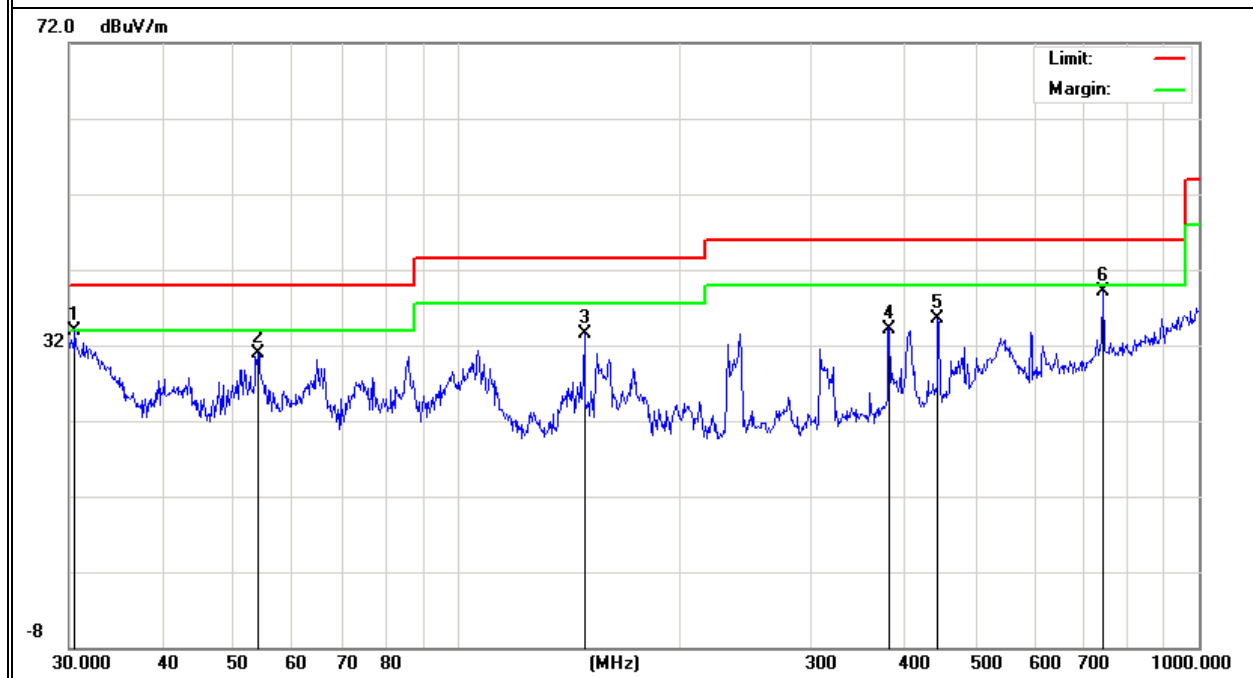

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	106.7587	24.39	11.13	35.52	43.50	-7.98	QP
H	148.4410	25.10	11.99	37.09	43.50	-6.41	QP
H	308.9126	23.16	15.37	38.53	46.00	-7.47	QP
H	444.8514	17.08	18.57	35.65	46.00	-10.35	QP
H	742.2587	14.77	25.06	39.83	46.00	-6.17	QP
H	890.7278	10.73	26.38	37.11	46.00	-8.89	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

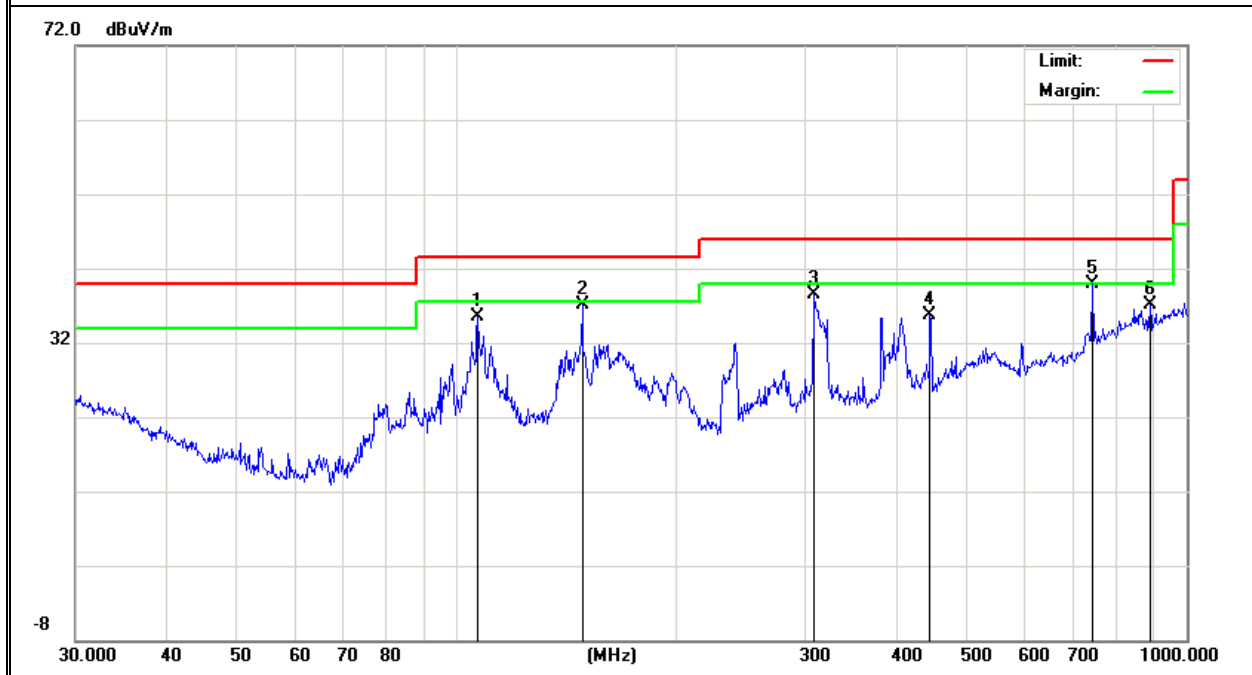


EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 2
Test Mode :	TX(5.2G)- 802.11ac40 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.5198	17.99	17.66	35.65	40.00	-4.35	QP
V	54.0711	22.15	7.14	29.29	40.00	-10.71	QP
V	106.7587	21.68	11.13	32.81	43.50	-10.69	QP
V	160.3456	21.95	10.78	32.73	43.50	-10.77	QP
V	240.8304	24.46	11.91	36.37	46.00	-9.63	QP
V	308.9126	20.53	15.37	35.90	46.00	-10.10	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

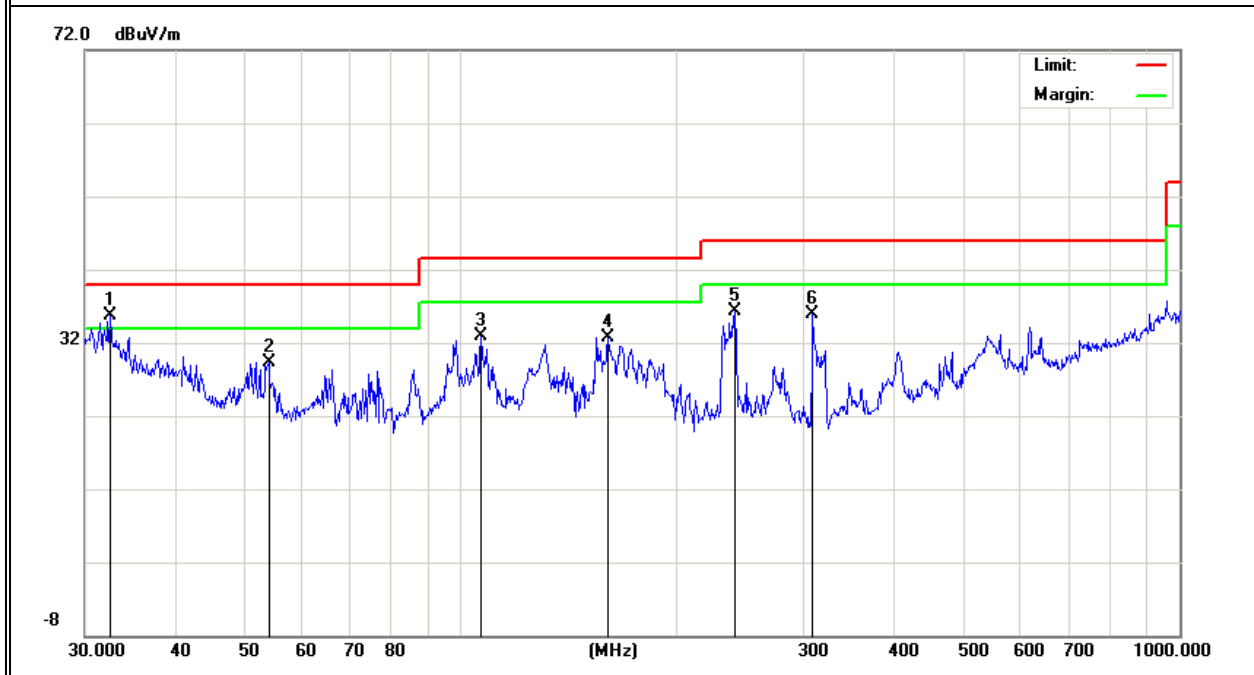

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	80.0806	19.70	8.08	27.78	40.00	-12.22	QP
H	160.3456	24.90	10.78	35.68	43.50	-7.82	QP
H	239.9874	25.18	11.73	36.91	46.00	-9.09	QP
H	308.9126	25.23	15.37	40.60	46.00	-5.40	QP
H	401.8385	14.91	17.92	32.83	46.00	-13.17	QP
H	929.0081	9.23	27.70	36.93	46.00	-9.07	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

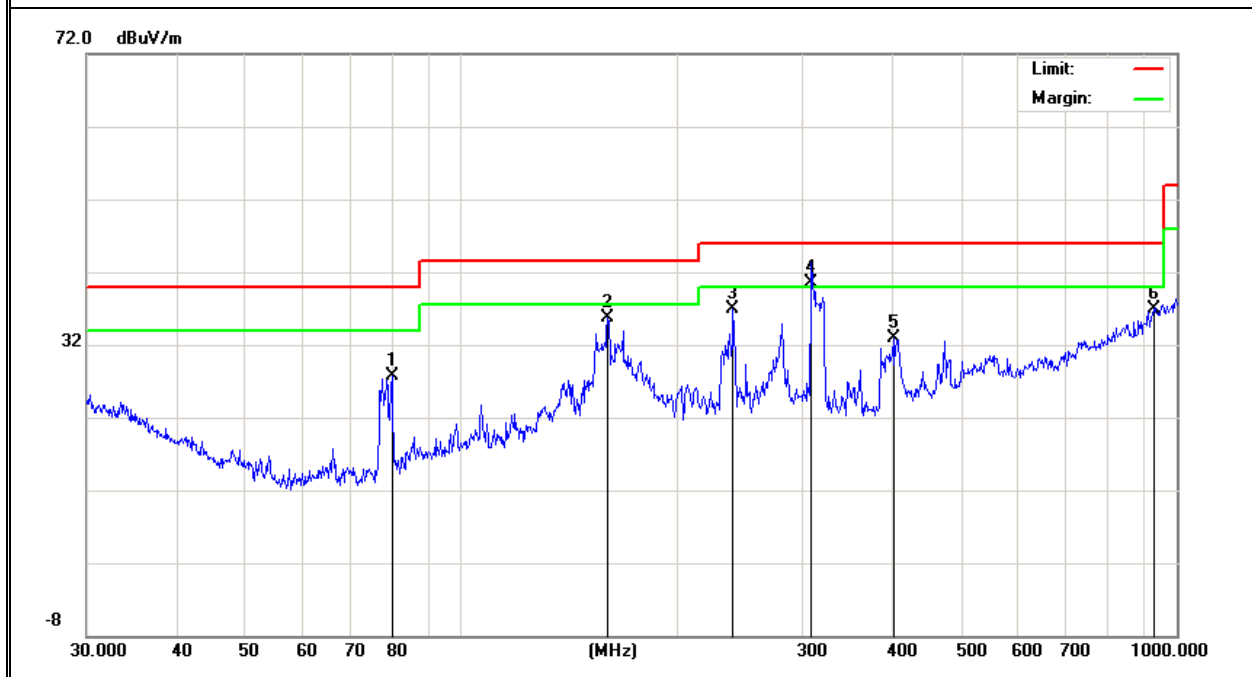


EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 1
Test Mode :	TX(5.3G)- 802.11n20 (Middle CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.6202	18.74	17.98	36.72	40.00	-3.28	QP
V	38.7518	19.63	14.57	34.20	40.00	-5.80	QP
V	106.7587	22.16	11.13	33.29	43.50	-10.21	QP
V	240.8300	24.76	11.91	36.67	46.00	-9.33	QP
V	308.9125	18.76	15.37	34.13	46.00	-11.87	QP
V	607.7866	13.82	21.88	35.70	46.00	-10.30	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

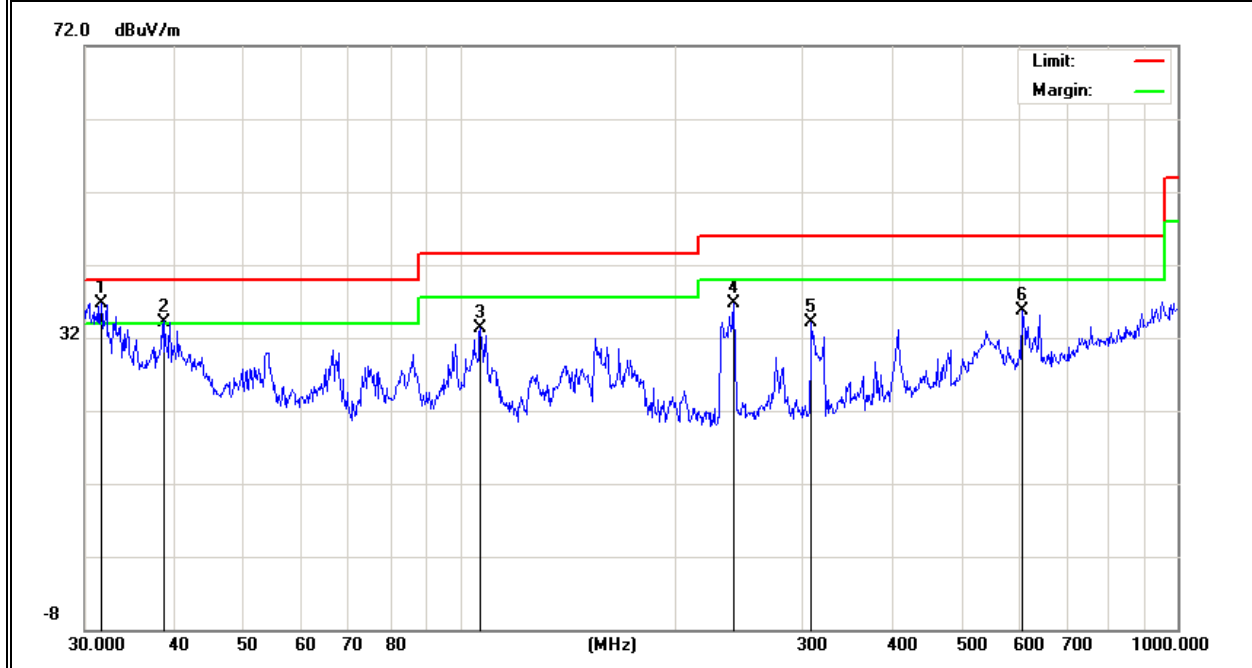

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	31.7313	8.58	17.92	26.50	40.00	-13.50	QP
H	80.0806	18.88	8.08	26.96	40.00	-13.04	QP
H	160.3454	24.18	10.78	34.96	43.50	-8.54	QP
H	240.8300	24.87	11.91	36.78	46.00	-9.22	QP
H	308.9125	25.15	15.37	40.52	46.00	-5.48	QP
H	407.5144	17.05	17.94	34.99	46.00	-11.01	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

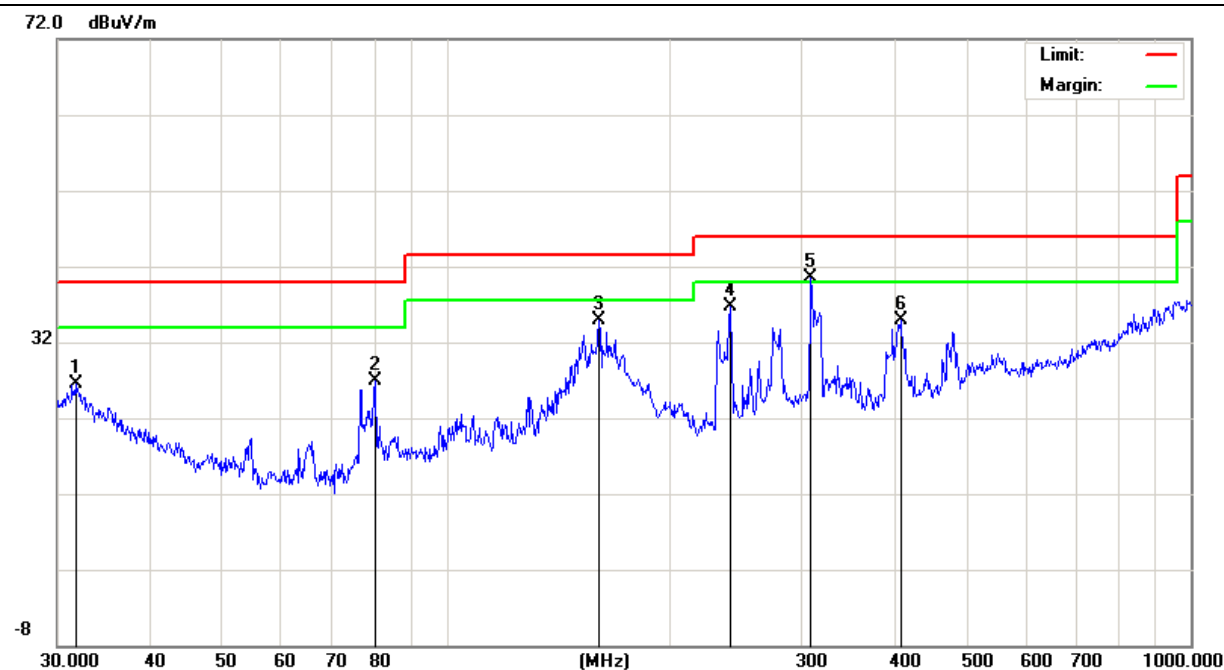


EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 2
Test Mode :	TX(5.3G)- 802.11n20 (Middle CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.8427	14.61	17.87	32.48	40.00	-7.52	QP
V	109.4116	21.00	11.20	32.20	43.50	-11.30	QP
V	152.1297	23.46	11.84	35.30	43.50	-8.20	QP
V	406.0880	16.87	17.93	34.80	46.00	-11.20	QP
V	552.8831	12.86	22.54	35.40	46.00	-10.60	QP
V	704.2259	17.98	23.11	41.09	46.00	-4.91	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

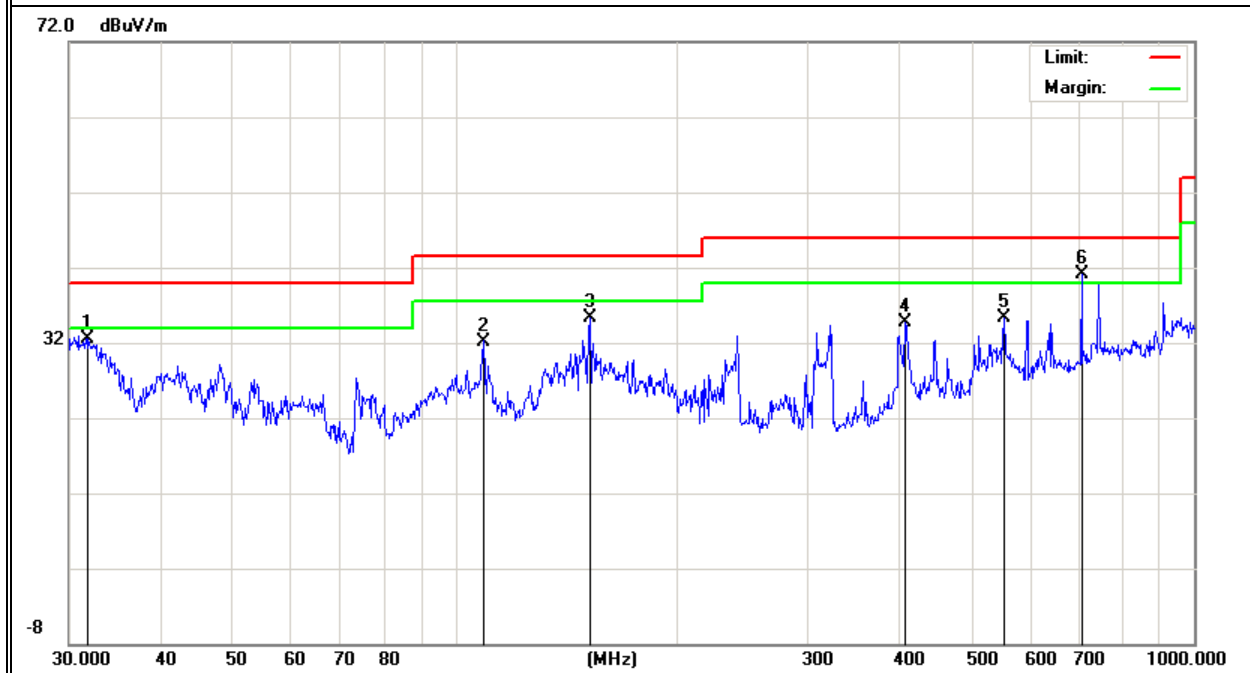

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	109.4116	22.50	11.20	33.70	43.50	-9.80	QP
H	153.2004	21.91	11.79	33.70	43.50	-9.80	QP
H	239.9874	23.87	11.73	35.60	46.00	-10.40	QP
H	308.9125	23.47	15.37	38.84	46.00	-7.16	QP
H	444.8514	19.76	18.57	38.33	46.00	-7.67	QP
H	706.6997	17.44	23.26	40.70	46.00	-5.30	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

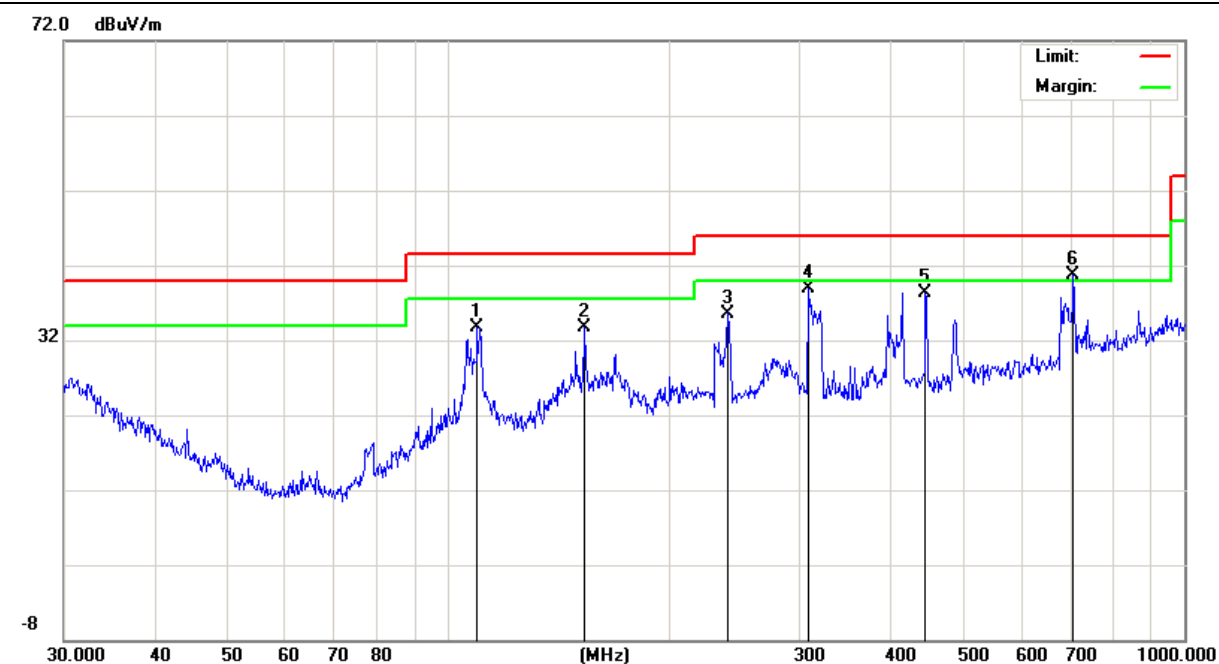


EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 1
Test Mode :	TX(5.6G)- 802.11ac20 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	84.7018	23.73	8.87	32.60	40.00	-7.40	QP
V	103.8054	20.41	11.09	31.50	43.50	-12.00	QP
V	148.4410	22.13	11.99	34.12	43.50	-9.38	QP
V	240.8300	23.41	11.91	35.32	46.00	-10.68	QP
V	446.4141	15.97	18.56	34.53	46.00	-11.47	QP
V	742.2586	14.24	25.06	39.30	46.00	-6.70	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

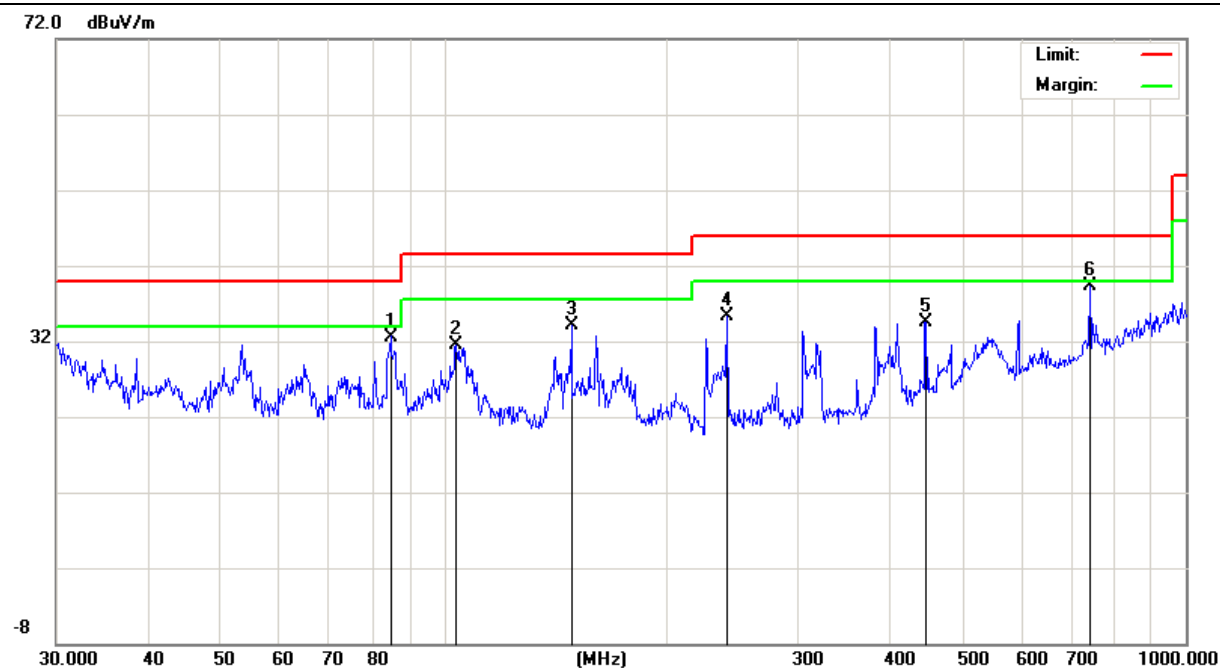

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	106.7587	23.62	11.13	34.75	43.50	-8.75	QP
H	148.4410	26.68	11.99	38.67	43.50	-4.83	QP
H	162.6106	25.30	10.70	36.00	43.50	-7.50	QP
H	308.9125	22.72	15.37	38.09	46.00	-7.91	QP
H	403.2500	21.07	17.93	39.00	46.00	-7.00	QP
H	742.2586	14.86	25.06	39.92	46.00	-6.08	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

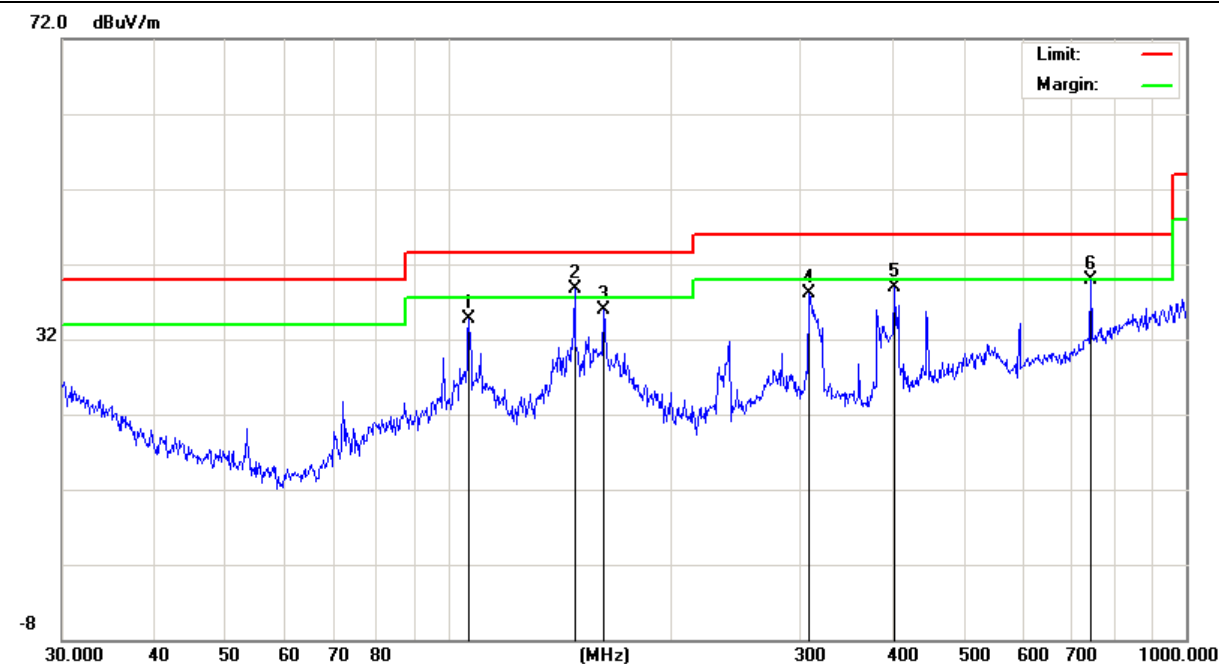


EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 2
Test Mode :	TX(5.6G)- 802.11ac20 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	135.5062	22.18	12.49	34.67	43.50	-8.83	QP
V	230.9068	24.73	10.87	35.60	46.00	-10.40	QP
V	308.9125	20.43	15.37	35.80	46.00	-10.20	QP
V	406.0880	20.16	17.93	38.09	46.00	-7.91	QP
V	593.0497	17.39	21.49	38.88	46.00	-7.12	QP
V	706.6997	17.42	23.26	40.68	46.00	-5.32	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

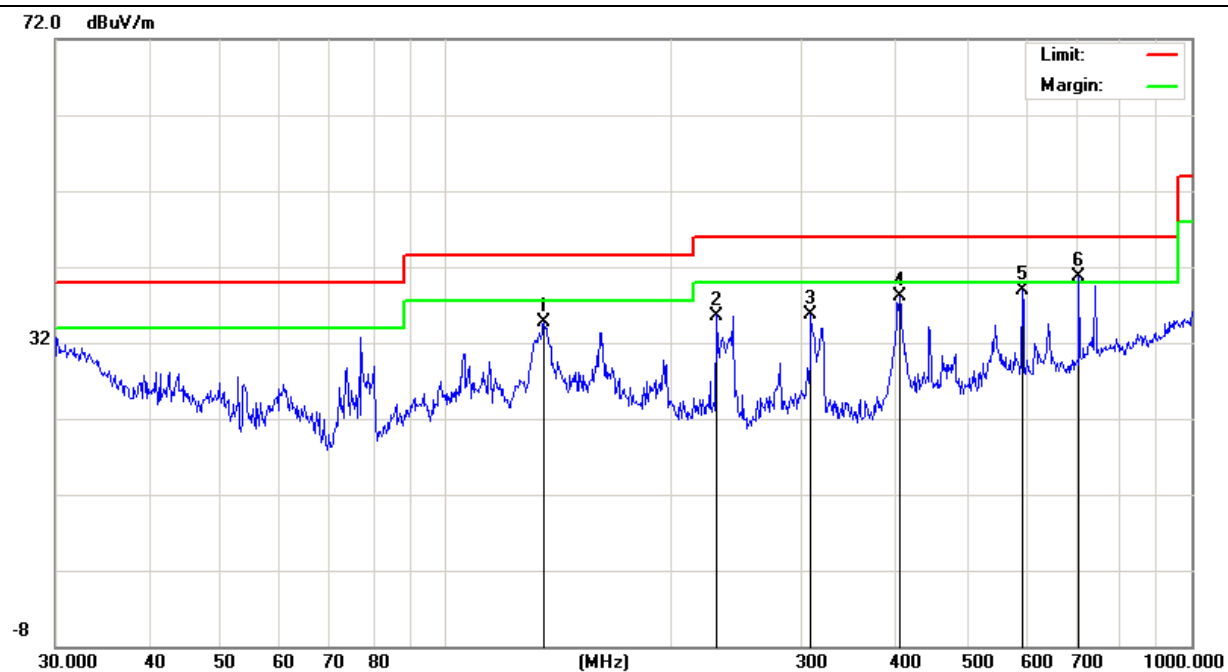

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	106.7587	23.89	11.13	35.02	43.50	-8.48	QP
H	112.9196	23.88	11.92	35.80	43.50	-7.70	QP
H	158.1123	26.47	11.13	37.60	43.50	-5.90	QP
H	308.9125	26.76	15.37	42.13	46.00	-3.87	QP
H	414.7223	23.21	18.09	41.30	46.00	-4.70	QP
H	747.4825	15.23	24.97	40.20	46.00	-5.80	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

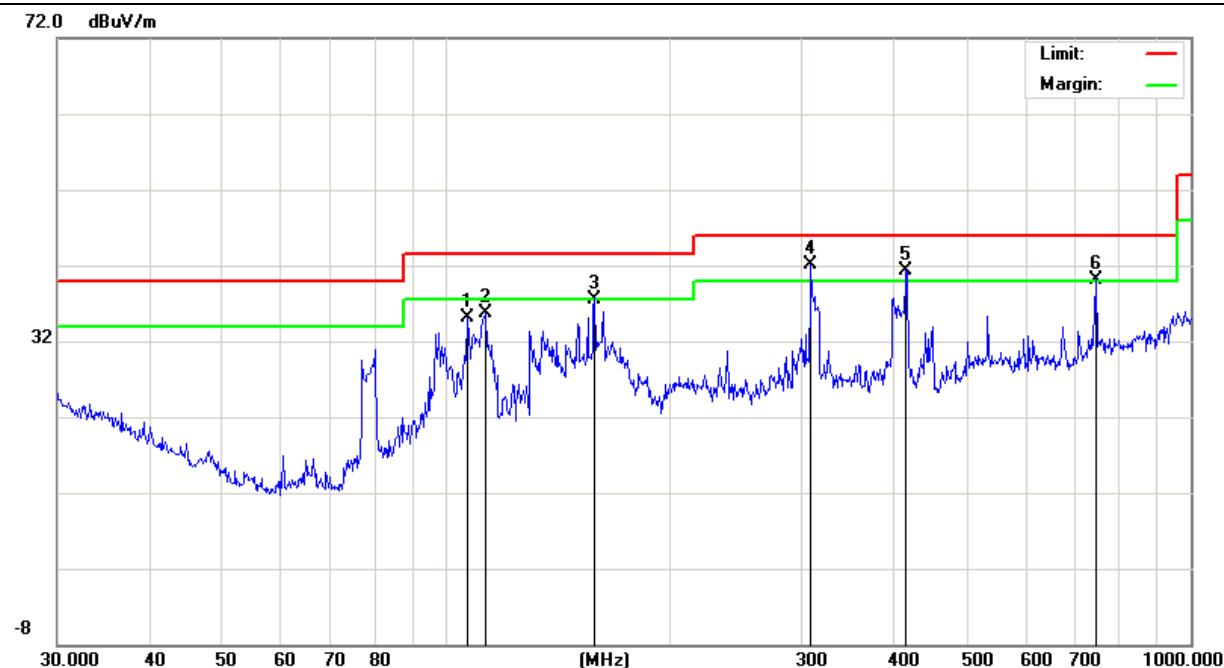


EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 1
Test Mode :	TX(5.8G) - 802.11n20 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	84.1098	22.45	8.65	31.10	40.00	-8.90	QP
V	148.4410	22.29	11.99	34.28	43.50	-9.22	QP
V	232.5318	23.40	11.00	34.40	46.00	-11.60	QP
V	404.6664	18.17	17.93	36.10	46.00	-9.90	QP
V	535.7073	16.20	21.30	37.50	46.00	-8.50	QP
V	739.6603	14.89	25.11	40.00	46.00	-6.00	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

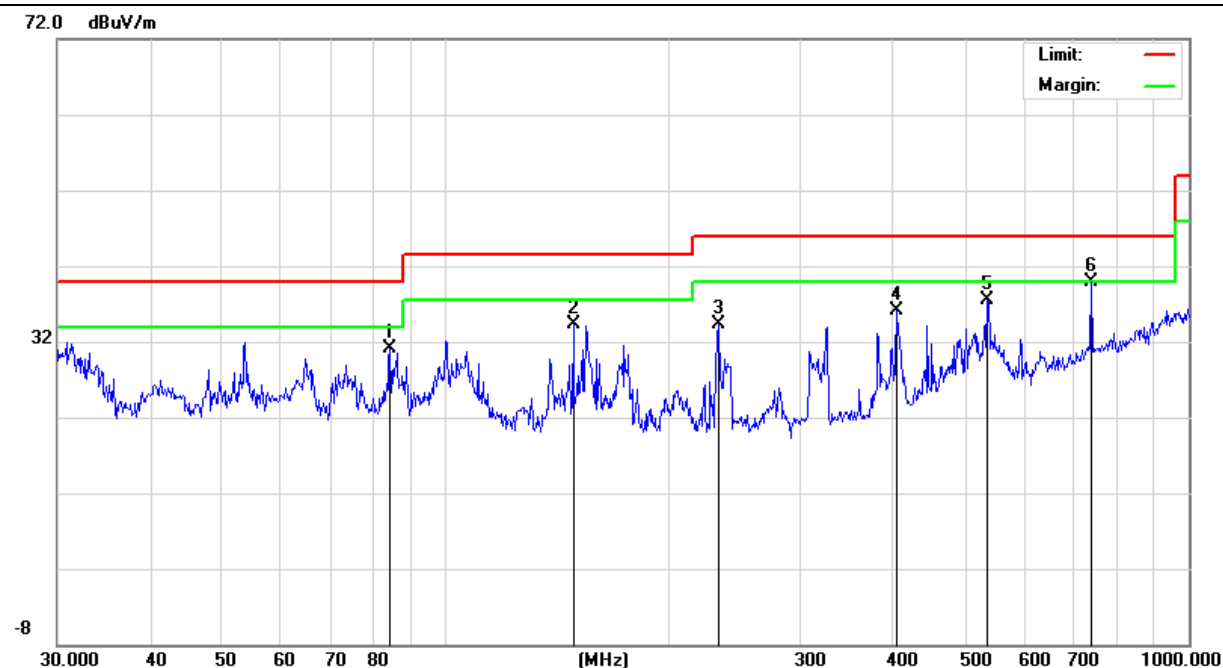

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	104.9033	25.51	11.09	36.60	43.50	-6.90	QP
H	146.8874	26.59	12.01	38.60	43.50	-4.90	QP
H	308.9125	24.31	15.37	39.68	46.00	-6.32	QP
H	397.6333	18.33	17.77	36.10	46.00	-9.90	QP
H	440.1963	16.99	18.61	35.60	46.00	-10.40	QP
H	742.2586	15.35	25.06	40.41	46.00	-5.59	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

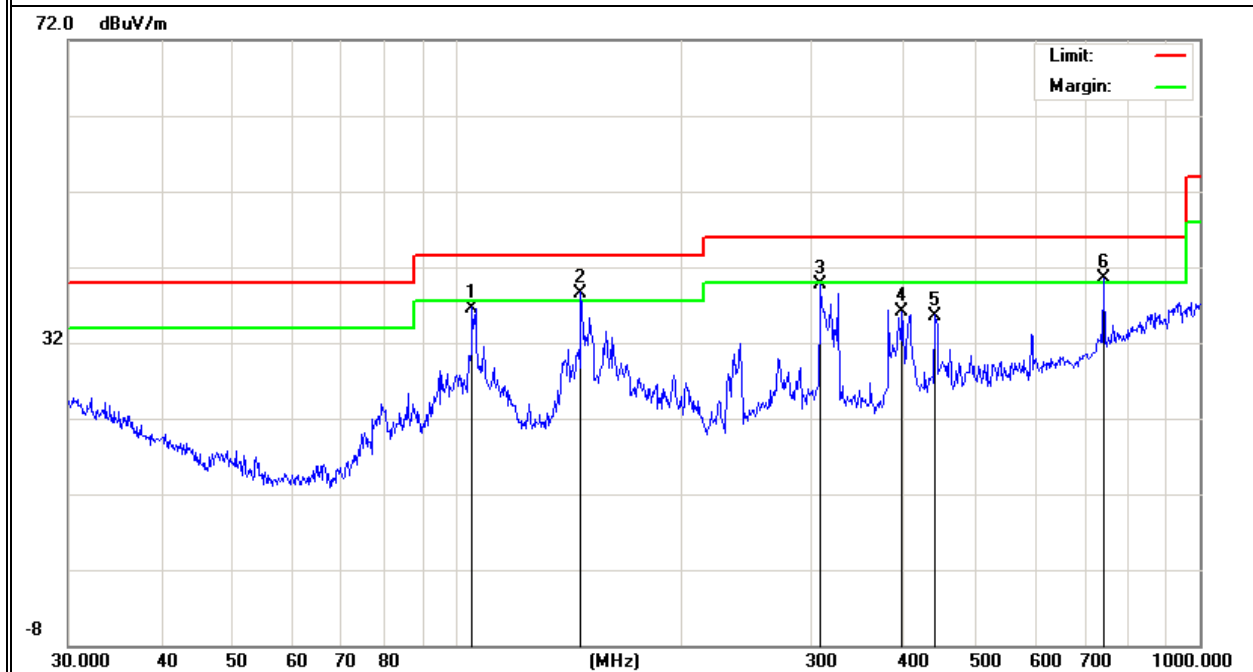


EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	25.2 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V from adapter 2
Test Mode :	TX(5.8G) - 802.11n20 (Low CH)		

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	49.1865	21.46	9.84	31.30	40.00	-8.70	QP
V	62.8708	26.64	6.06	32.70	40.00	-7.30	QP
V	105.6414	23.90	11.10	35.00	43.50	-8.50	QP
V	147.4036	22.69	12.01	34.70	43.50	-8.80	QP
V	312.1792	20.69	15.37	36.06	46.00	-9.94	QP
V	595.1326	19.45	21.55	41.00	46.00	-5.00	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

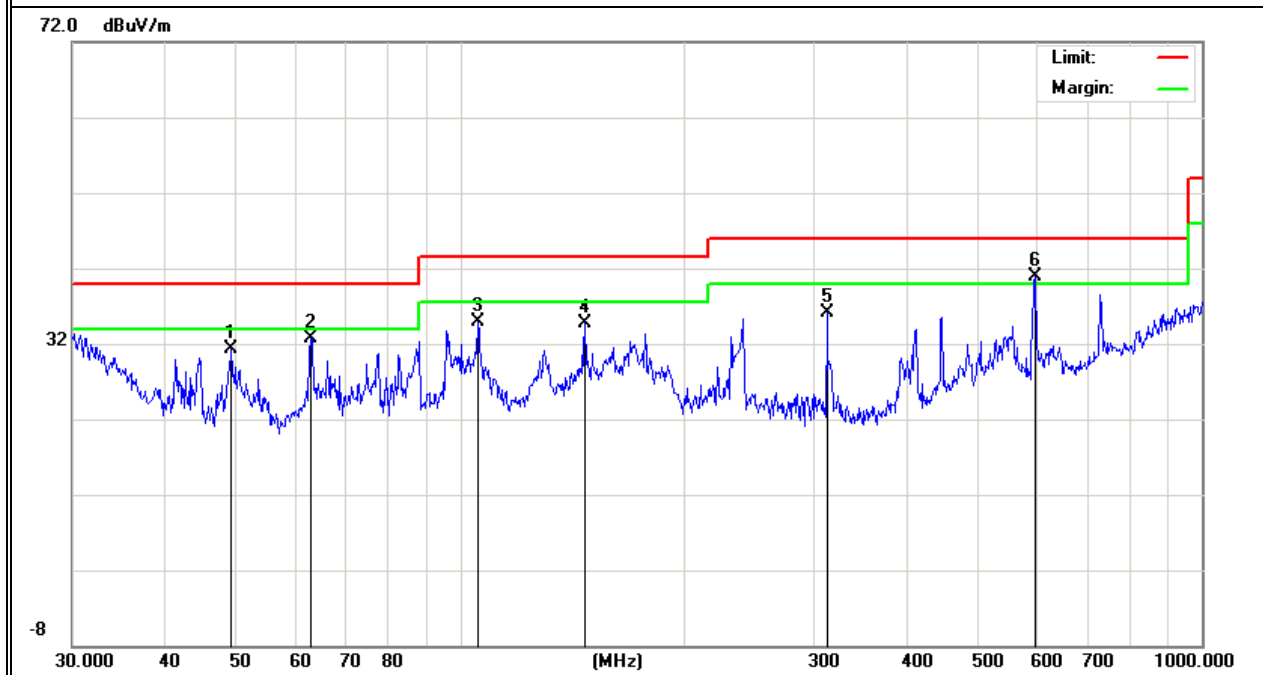

Polar (H/V)	Frequency	ReadingLevel	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	167.8240	26.98	10.72	37.70	43.50	-5.80	QP
H	308.9125	24.21	15.37	39.58	46.00	-6.42	QP
H	446.4141	20.53	18.56	39.09	46.00	-6.91	QP
H	593.0497	17.02	21.49	38.51	46.00	-7.49	QP
H	742.2586	16.78	25.06	41.84	46.00	-4.16	QP
H	884.5027	15.15	25.95	41.10	46.00	-4.90	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit

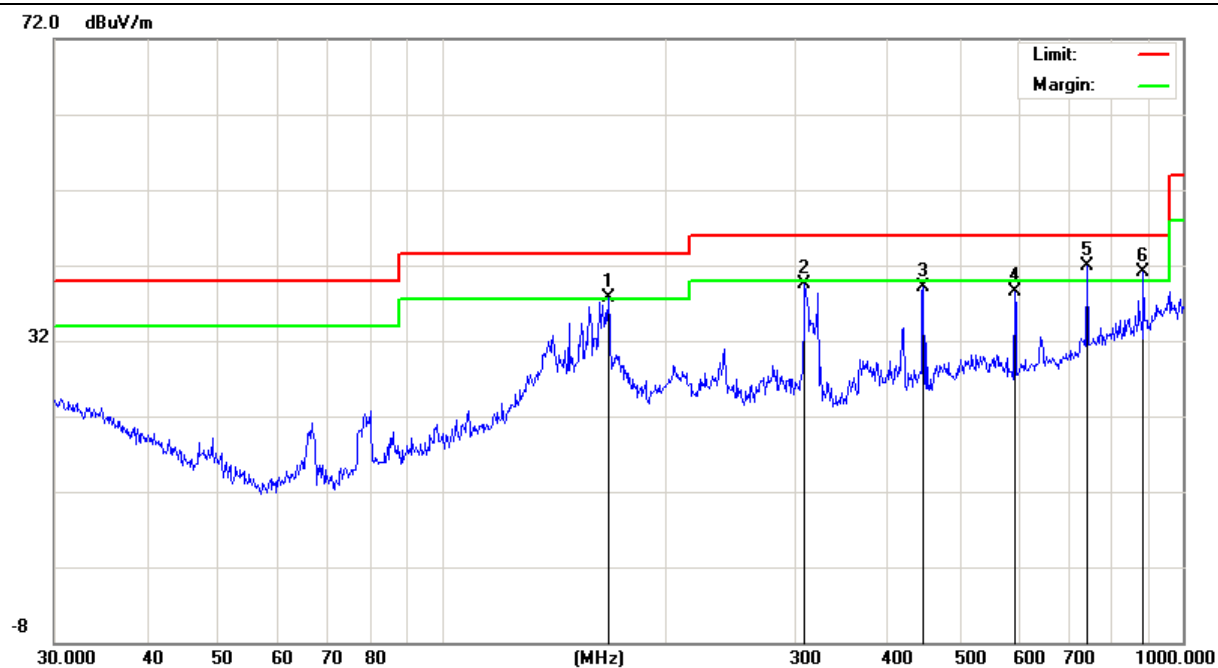

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.2G) - 802.11ac80 _ 5180~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5210 MHz)-Above 1G									
Vertical	3694.38	58.96	5.94	35.40	44.00	56.30	74.00	-17.70	Pk
Vertical	3694.38	40.18	5.94	35.40	44.00	37.52	54.00	-16.48	AV
Vertical	10360.43	56.57	8.46	39.75	44.50	60.28	68.20	-7.92	Pk
Vertical	15540.50	59.38	10.12	38.80	44.10	64.20	74.00	-9.80	Pk
Vertical	15540.50	37.19	10.12	38.80	42.70	43.41	54.00	-10.59	AV
Horizontal	3713.28	61.68	5.94	35.18	44.00	58.80	74.00	-15.20	Pk
Horizontal	3713.28	42.15	5.94	35.18	44.00	39.27	54.00	-14.73	AV
Horizontal	10360.75	56.94	8.46	38.71	44.50	59.61	68.20	-8.59	Pk
Horizontal	15540.66	55.09	10.12	38.38	44.10	59.49	74.00	-14.51	Pk
Horizontal	15540.66	39.17	10.12	38.38	44.10	43.57	54.00	-10.43	AV

Note:"802.11ac80(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.3G) - 802.11ac20 _ 5260~5320MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4633.53	62.09	5.44	35.40	44.00	58.93	74.00	-15.07	Pk
Vertical	4633.53	43.75	5.74	35.40	44.00	40.89	54.00	-13.11	AV
Vertical	10520.40	59.55	8.26	39.75	44.50	63.07	68.20	-5.13	Pk
Vertical	15780.62	61.21	10.12	38.80	44.10	66.03	74.00	-7.97	Pk
Vertical	15780.62	39.15	9.62	38.80	42.70	44.87	54.00	-9.13	AV
Horizontal	4366.43	64.66	5.57	35.18	44.00	61.40	74.00	-12.60	Pk
Horizontal	4366.43	43.59	5.74	35.18	44.00	40.51	54.00	-13.49	AV
Horizontal	10520.54	59.34	8.38	38.71	44.50	61.93	68.20	-6.27	Pk
Horizontal	15780.62	57.63	9.88	38.38	44.10	61.79	74.00	-12.21	Pk
Horizontal	15780.62	40.87	9.94	38.38	44.10	45.09	54.00	-8.91	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4122.62	59.05	6.08	36.35	44.05	57.43	74.00	-16.57	Pk
Vertical	4122.62	42.40	6.39	36.35	44.05	41.09	54.00	-12.91	AV
Vertical	10560.47	59.47	8.28	37.88	44.51	61.12	68.20	-7.08	Pk
Vertical	15840.64	61.41	9.79	38.8	44.10	65.90	74.00	-8.10	Pk
Vertical	15840.64	39.67	9.70	38.8	42.70	45.47	54.00	-8.53	AV
Horizontal	3869.76	58.10	6.11	36.37	44.05	56.53	74.00	-17.47	Pk
Horizontal	3869.76	45.43	6.27	36.37	44.05	44.02	54.00	-9.98	AV
Horizontal	10561.02	61.80	8.33	38.64	44.50	64.27	68.20	-3.93	Pk
Horizontal	15840.65	60.29	9.99	38.38	44.10	64.56	74.00	-9.44	Pk
Horizontal	15840.65	40.59	9.81	38.38	44.10	44.68	54.00	-9.32	AV
High Channel (5320 MHz)-Above 1G									
Vertical	5366.80	61.90	6.96	37.24	43.50	62.60	74.00	-11.40	Pk
Vertical	5366.80	43.46	7.07	37.24	43.50	44.27	54.00	-9.73	AV
Vertical	10640.86	61.05	8.14	37.68	44.50	62.37	74.00	-11.63	Pk
Vertical	10640.86	40.86	8.35	37.68	44.50	42.40	54.00	-11.60	AV
Vertical	15960.69	60.28	10.11	38.8	44.10	65.09	74.00	-8.91	Pk
Vertical	15960.69	38.35	9.64	38.8	42.70	44.09	54.00	-9.91	AV
Horizontal	5436.87	61.27	7.05	37.24	43.50	62.06	74.00	-11.94	Pk
Horizontal	5436.87	41.22	7.05	37.24	43.50	42.01	54.00	-11.99	AV
Horizontal	10640.52	59.69	8.20	38.57	44.50	61.96	74.00	-12.04	Pk
Horizontal	10640.52	43.16	8.03	38.57	44.50	45.26	54.00	-8.74	AV
Horizontal	15961.16	60.32	9.81	38.38	44.10	64.41	74.00	-9.59	Pk
Horizontal	15961.16	43.28	9.96	38.38	44.10	47.52	54.00	-6.48	AV

Note: ANT 1 802.11ac20(5G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.6G) - 802.11ac80 _ 5530~5600MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5530 MHz)-Above 1G									
Vertical	5433.30	62.22	5.61	35.40	44.00	59.23	74.00	-14.77	Pk
Vertical	5433.30	43.05	5.61	35.40	44.00	40.06	54.00	-13.94	AV
Vertical	11060.53	57.99	8.24	39.75	44.50	61.48	74.00	-12.52	Pk
Vertical	11060.53	39.85	8.35	39.75	44.50	43.45	54.00	-10.55	AV
Vertical	16590.69	48.98	10.05	38.80	44.10	53.73	68.20	-14.47	Pk
Horizontal	5126.75	58.51	5.78	35.18	44.00	55.47	74.00	-18.53	Pk
Horizontal	5126.75	40.46	5.66	35.18	44.00	37.31	54.00	-16.69	AV
Horizontal	11060.60	56.19	8.22	38.71	44.50	58.62	74.00	-15.38	Pk
Horizontal	11060.60	39.55	8.14	38.71	44.50	41.90	54.00	-12.10	AV
Horizontal	16590.75	59.82	10.04	38.38	44.10	64.14	68.20	-4.06	Pk
High Channel (5600 MHz)-Above 1G									
Vertical	5647.61	59.98	6.79	37.24	43.50	60.51	68.20	-7.69	Pk
Vertical	11200.57	59.23	8.10	37.68	44.50	60.51	74.00	-13.49	Pk
Vertical	11200.57	40.58	8.23	37.68	44.50	41.99	54.00	-12.01	AV
Vertical	16800.82	60.04	9.70	38.80	44.10	64.45	68.20	-3.75	Pk
Horizontal	5433.54	58.84	6.74	37.24	43.50	59.32	74.00	-14.68	Pk
Horizontal	5433.54	40.71	6.74	37.24	43.50	41.19	54.00	-12.81	AV
Horizontal	11200.71	58.33	8.25	38.57	44.50	60.65	74.00	-13.35	Pk
Horizontal	11200.71	40.24	8.25	38.57	44.50	42.56	54.00	-11.44	AV
Horizontal	16800.61	60.15	10.09	38.38	44.10	64.52	68.20	-3.68	Pk

Note:"802.11ac80(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.8G) -- 802.11ac20_5745~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2806.9	64.76	5.94	35.40	44.00	62.10	74.00	-11.90	Pk
Vertical	2806.9	46.37	5.94	35.40	44.00	43.71	54.00	-10.29	AV
Vertical	11490.56	63.61	8.46	39.75	44.50	67.32	74.00	-6.68	Pk
Vertical	11490.56	44.14	8.46	39.75	44.50	47.85	54.00	-6.15	AV
Vertical	17235.32	60.08	10.12	38.80	44.10	64.90	68.20	-3.30	Pk
Horizontal	2911.524	65.22	5.94	35.18	44.00	62.34	68.20	-5.86	Pk
Horizontal	11490.56	63.08	8.46	38.71	44.50	65.75	74.00	-8.25	Pk
Horizontal	11490.56	41.16	8.46	38.71	44.50	43.83	54.00	-10.17	AV
Horizontal	17235.56	59.09	10.12	38.38	44.10	63.49	68.20	-4.71	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	3763.083	64.50	6.48	36.35	44.05	63.28	74.00	-10.72	Pk
Vertical	3763.083	42.87	6.48	36.35	44.05	41.65	54.00	-12.35	AV
Vertical	11570.56	63.94	8.47	37.88	44.51	65.78	74.00	-8.22	Pk
Vertical	11570.56	45.53	8.47	37.88	44.51	47.37	54.00	-6.63	AV
Vertical	17355.56	63.84	10.12	38.8	44.10	68.66	68.20	0.46	Pk
Horizontal	3561.585	62.12	6.48	36.37	44.05	60.92	68.20	-7.28	Pk
Horizontal	11570.56	61.23	8.47	38.64	44.50	63.84	74.00	-10.16	Pk
Horizontal	11570.56	44.16	8.47	38.64	44.50	46.77	54.00	-7.23	AV
Horizontal	17355.56	63.94	10.12	38.38	44.10	68.34	74.00	-5.66	Pk
Horizontal	17355.35	43.67	10.12	38.38	44.10	48.07	54.00	-5.93	AV
High Channel (5825 MHz)-Above 1G									
Vertical	3907.168	61.20	7.10	37.24	43.50	62.04	74.00	-11.96	Pk
Vertical	3907.168	43.55	7.10	37.24	43.50	44.39	54.00	-9.61	AV
Vertical	11650.54	61.55	8.46	37.68	44.50	63.19	74.00	-10.81	Pk
Vertical	11650.54	43.95	8.46	37.68	44.50	45.59	54.00	-8.41	AV
Vertical	17475.54	60.49	10.12	38.8	44.10	65.31	68.20	-2.89	Pk
Horizontal	3912.779	62.59	7.10	37.24	43.50	63.43	74.00	-10.57	Pk
Horizontal	3912.779	43.58	7.10	37.24	43.50	44.42	54.00	-9.58	AV
Horizontal	11650.54	63.84	8.46	38.57	44.50	66.37	74.00	-7.63	Pk
Horizontal	11650.54	43.37	8.46	38.57	44.50	45.90	54.00	-8.10	AV
Horizontal	17475.54	60.70	10.12	38.38	44.10	65.10	68.20	-3.10	Pk

Note:"802.11ac20(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


2.2.10 TEST RESULTS (18GHz-40GHz)

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.2G)-802.11n20 5180MHz~5240MHz; TX (5.3G)-802.11n20 5260MHz~5320MHz; TX (5.6G)-802.11n20 5500MHz~5700MHz; TX (5.8G)-802.11n20 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 1G

Horizontal

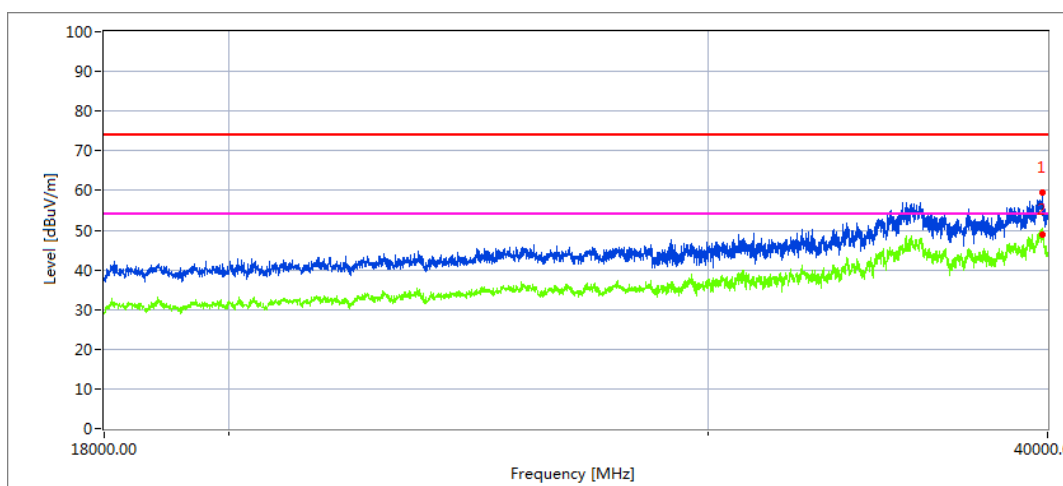

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.27	33.82	20.09	44.07	43.48	54.5	68.2	13.7	Peak


Vertical

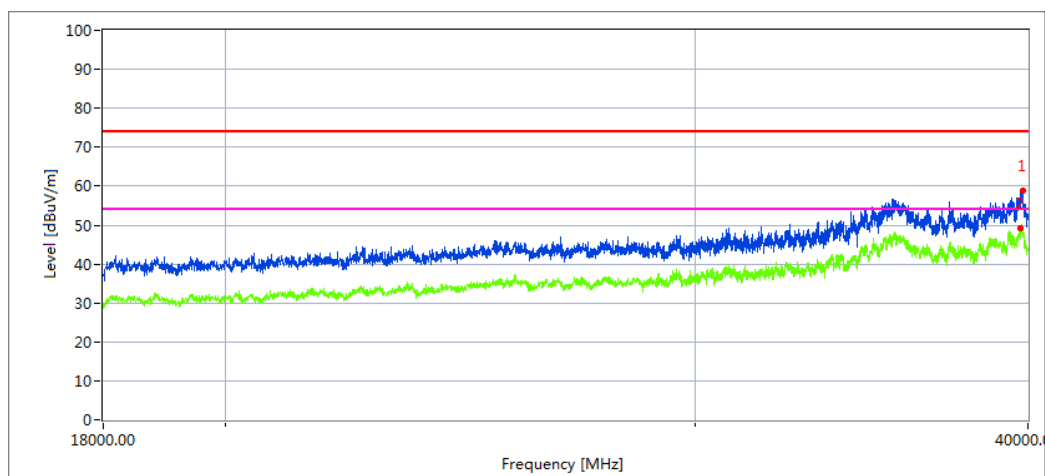

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.546	35.92	20.09	44.07	43.48	56.6	68.2	11.6	Peak


High Channel (5240 MHz)-Above 1G

Horizontal

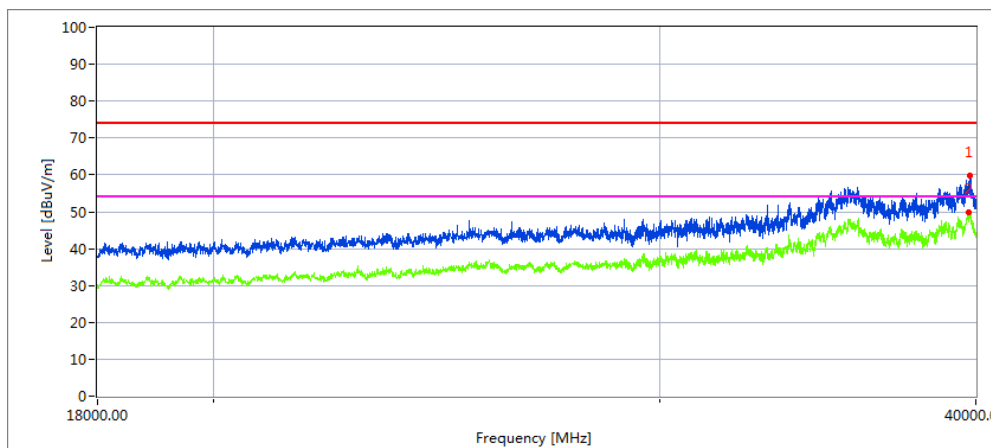

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39793.264	38.37	19.11	42.73	44.61	55.6	68.2	12.6	Peak

Vertical

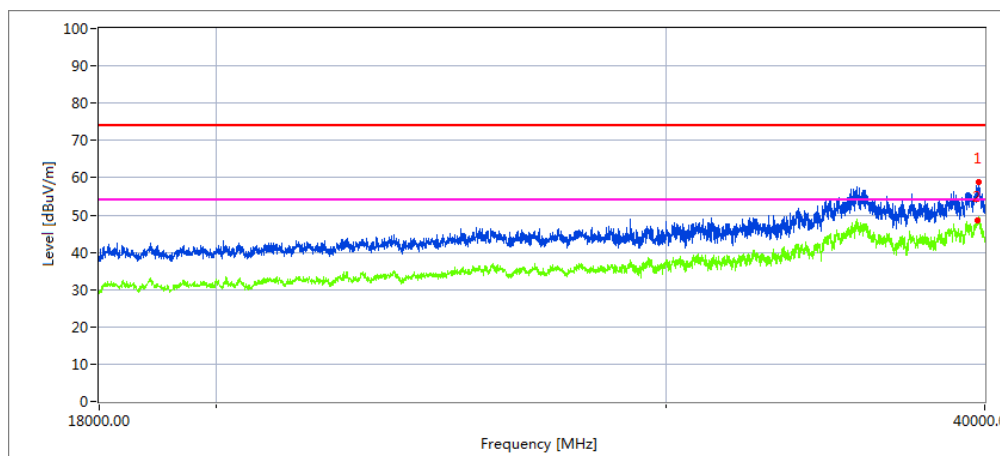


Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39795.968	35.42	20.09	44.07	43.48	56.1	68.2	12.1	Peak

Note:802.11n20 MIMO mode is the worst mode.


Low Channel (5260 MHz)-Above 1G

Horizontal

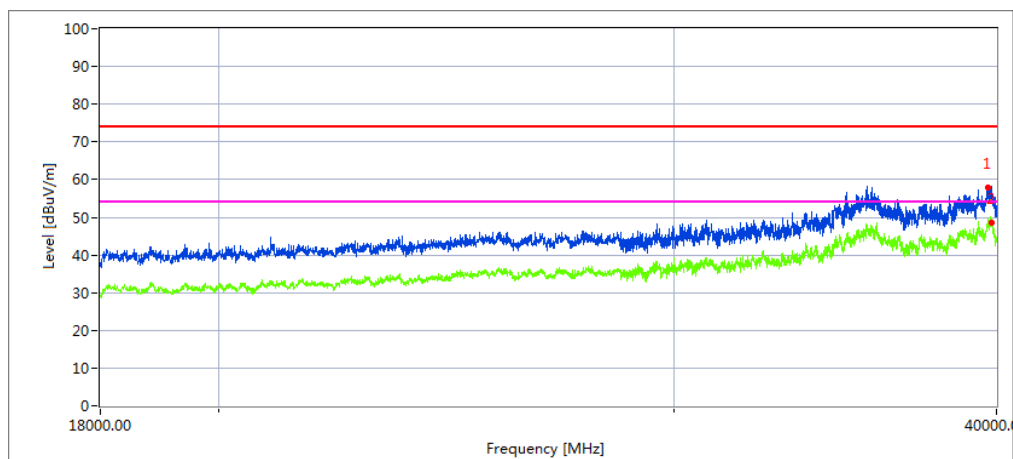

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39703.444	33.43	20.09	44.16	43.48	54.2	68.2	14	Peak


Vertical

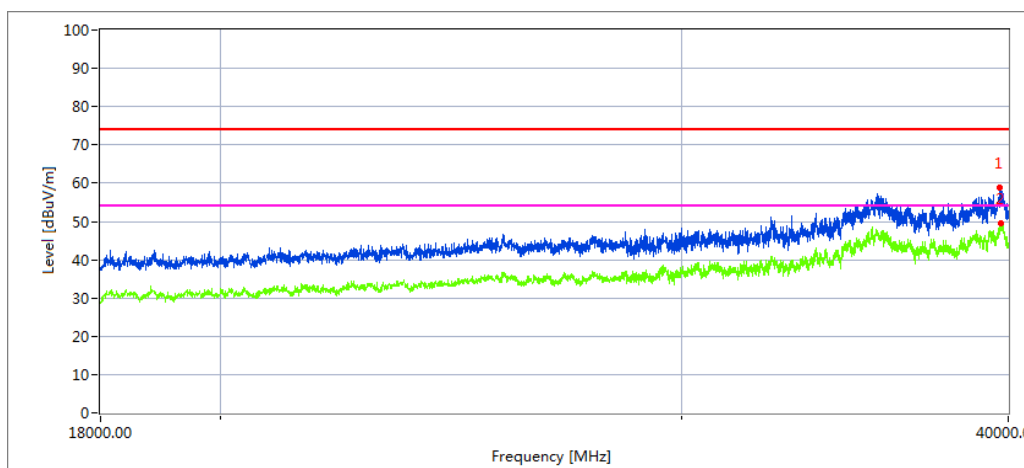

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39695.222	39769.476	35.42	20.09	44.07	43.48	56.1	68.2	Peak


High Channel (5320 MHz)-Above 1G

Horizontal

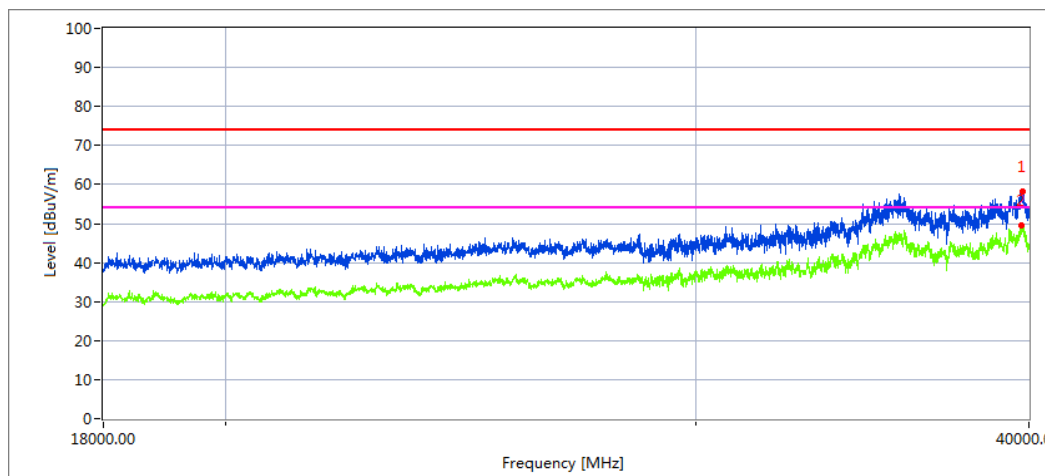

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39792.598	33.43	20.09	44.16	43.48	54.2	68.2	14	Peak

Vertical

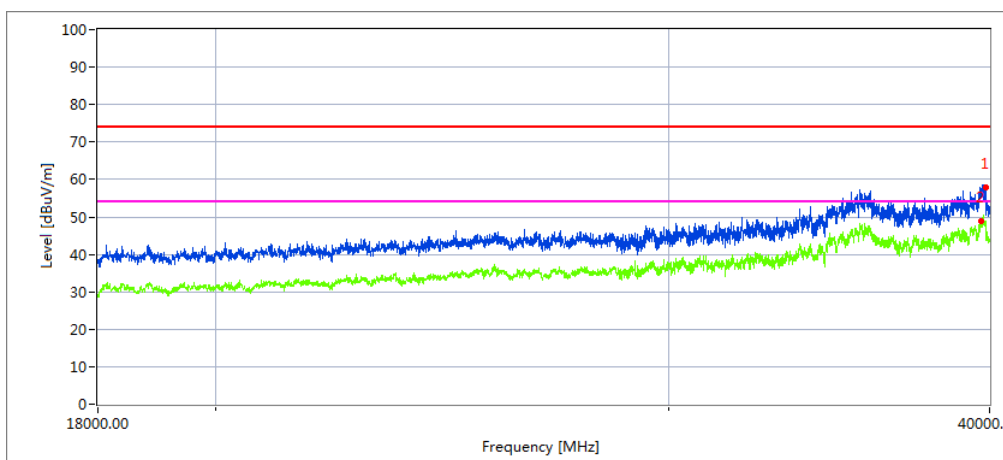


Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39849.346	36.58	20.06	44.07	43.21	57.5	68.2	10.7	Peak

Note:802.11n20 MIMO mode is the worst mode.


Low Channel (5500 MHz)-Above 1G

Horizontal

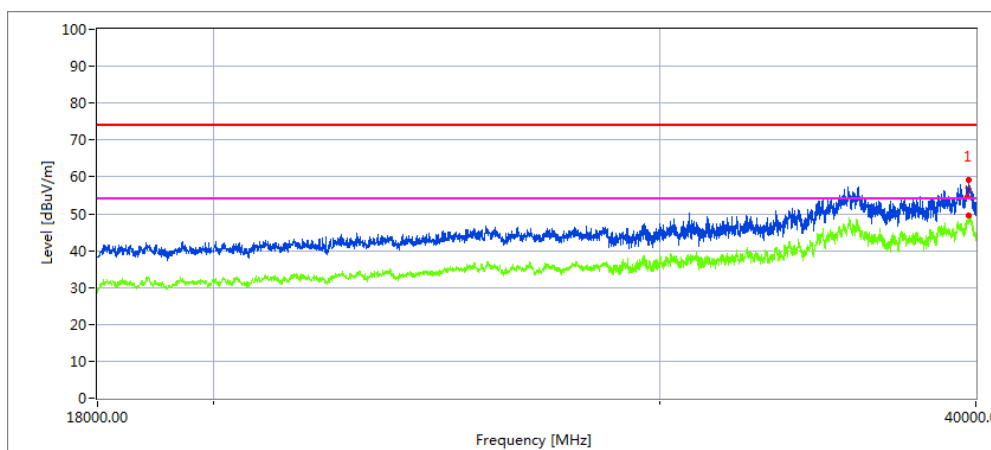

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39735.574	39670.224	33.43	20.09	44.16	43.48	54.2	68.2	Peak


Vertical

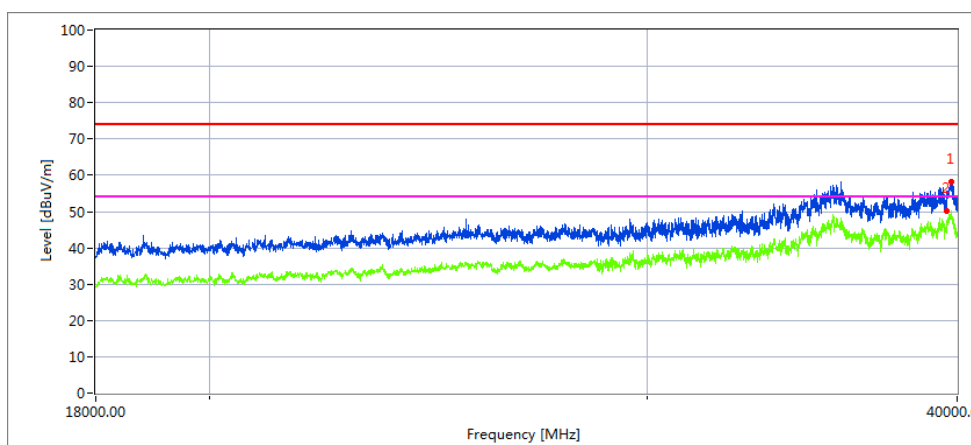

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39775.044	36.58	20.06	44.07	43.21	57.5	68.2	10.7	Peak


High Channel (5700 MHz)-Above 1G

Horizontal

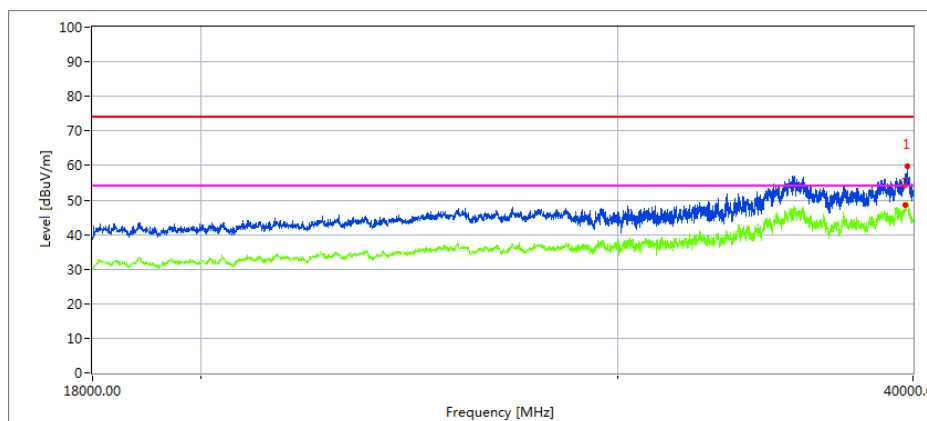

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39765.004	38.84	19.11	42.63	43.48	57.1	68.2	11.1	Peak

Vertical

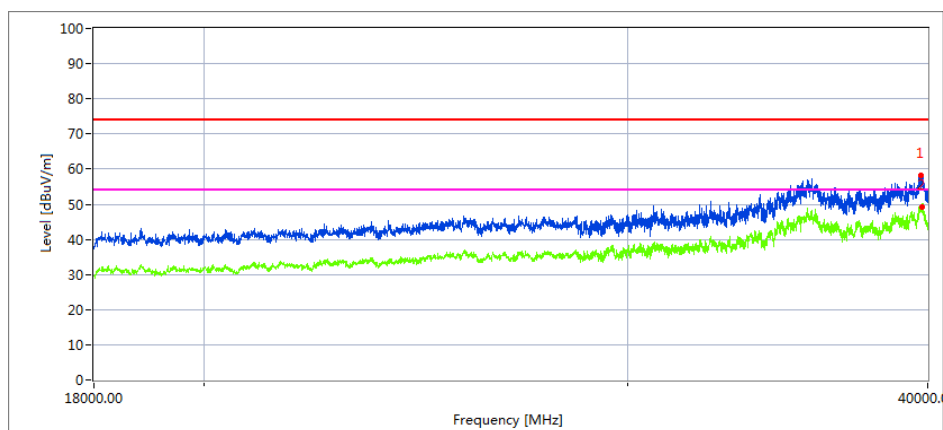


Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39765.004	34.92	20.1	44.1	43.22	55.9	68.2	12.3	Peak

Note:802.11n20 MIMO mode is the worst mode.


Low Channel (5745 MHz)-Above 1G

Horizontal

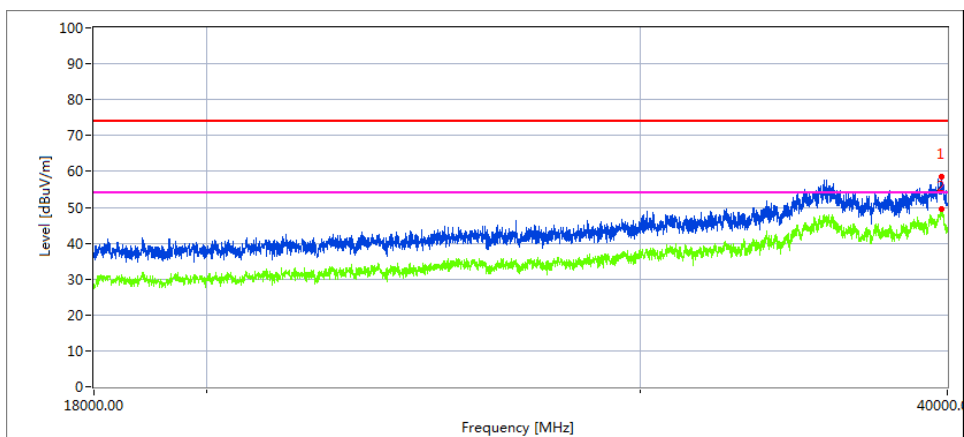

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.114	38.35	19.98	43.84	44.62	56.6	68.2	11.6	Peak


Vertical

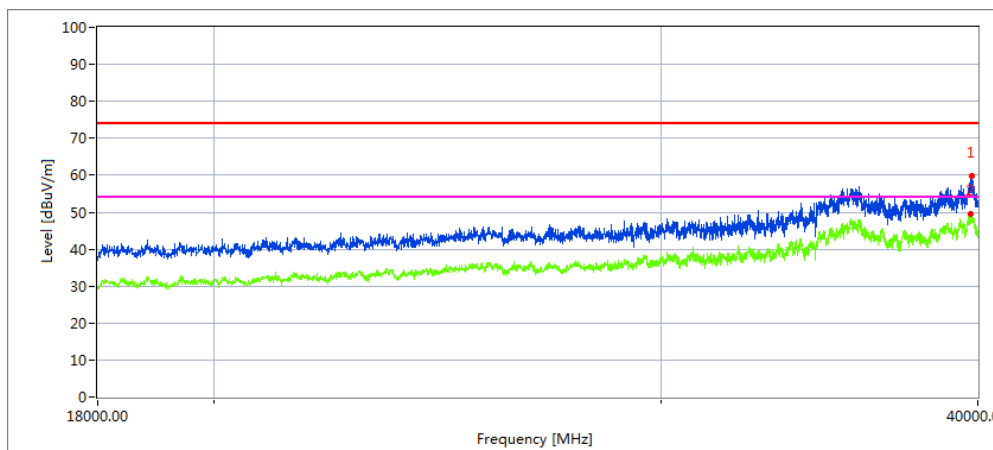

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39770.880	35.92	20.01	44.06	42.69	57.3	68.2	10.9	Peak


High Channel (5825 MHz)-Above 1G

Horizontal

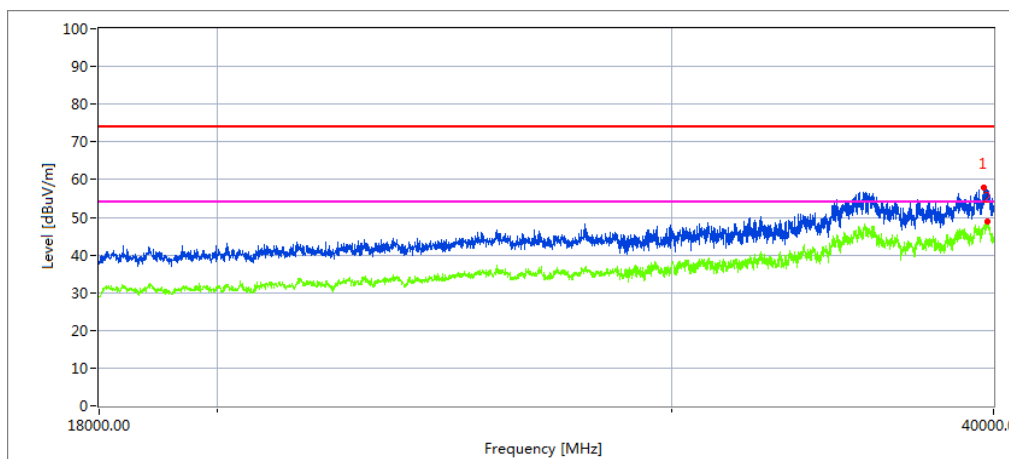

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39656.332	29.9	19.98	43.84	44.62	49.1	68.2	19.1	Peak

Vertical

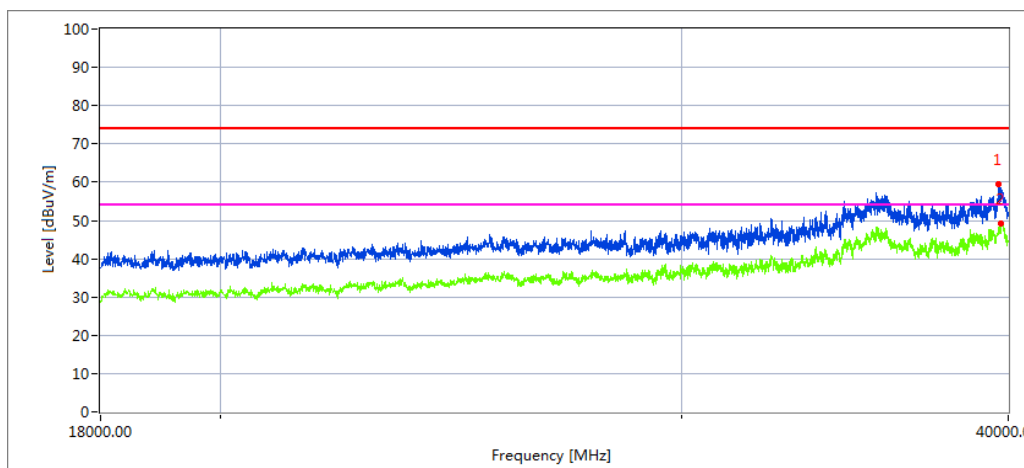

Frequency (MHz)	Meter Reading(dBuV)	Cable loss(dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39673.022	36.12	20.01	44.06	42.69	57.5	68.2	10.7	Peak

Note: 802.11n20 MIMO mode is the worst mode.

2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.2G)-802.11ac40 5150MHz~5250MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
5.2G WIFI-802.11a Mode									
4500	63.28	5.2	35.6	44.2	59.88	74	-14.12	Pk	Horizontal
4500	45.96	5.2	35.6	44.2	42.56	54	-11.44	AV	Horizontal
4500	54.22	5.2	35.6	44.2	50.82	74	-23.18	Pk	Horizontal
4500	39.94	5.2	35.6	44.2	36.54	54	-17.46	AV	Horizontal
5150	69.42	5.36	35.66	44.22	66.22	74	-7.78	Pk	Horizontal
5150	50.99	5.36	35.66	44.22	47.79	54	-6.21	AV	Horizontal
5150	69.51	5.36	35.66	44.22	66.31	74	-7.69	Pk	Vertical
5150	50.76	5.36	35.66	44.22	47.56	54	-6.44	AV	Vertical
5350	62.02	5.68	35.68	44.22	59.16	74	-14.84	Pk	Vertical
5350	41.45	5.68	35.68	44.22	38.59	54	-15.41	AV	Vertical
5350	54.47	5.68	35.68	44.22	51.61	74	-22.39	Pk	Horizontal
5350	38.57	5.68	35.68	44.22	35.71	54	-18.29	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac40" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.3G)-802.11n20 5250MHz~5350MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
High Channel (5320 MHz)-Above 1G									
5350.00	60.65	6.96	37.24	43.50	61.35	74.00	-12.65	Pk	Vertical
5350.00	40.87	7.07	37.24	43.50	41.68	54.00	-12.32	AV	Vertical
5350.00	53.31	7.05	37.24	43.50	54.10	74.00	-19.90	Pk	Horizontal
5350.00	38.14	7.05	37.24	43.50	38.93	54.00	-15.07	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.6G)-802.11ac20 5470MHz~5725MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (5500 MHz)-Above 1G									
5460.00	61.10	5.61	35.40	44.00	58.11	74.00	-15.89	Pk	Vertical
5460.00	42.20	5.76	35.40	44.00	39.36	54.00	-14.64	AV	Vertical
5460.00	54.42	5.78	35.18	44.00	51.38	74.00	-22.62	Pk	Horizontal
5460.00	38.80	5.66	35.18	44.00	35.65	54.00	-18.35	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP

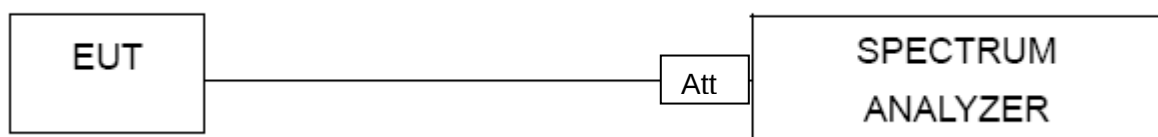

3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Note: Band1&Band2A&Band2C For 802.11n/ac 5GHz has MIMO mode. Directional gain=7.25dbi
 $7.25\text{dbi} > 6.0\text{dbi}$ so power spectral density limit is limit= $11-(7.25-6)=9.75$ in dBm
 Band3 For 802.11n/ac 5GHz has MIMO mode. Directional gain=7.25dbi
 $7.25\text{dbi} > 6.0\text{dbi}$ so power spectral density limit is limit= $30-(7.25-6)=28.75$ in dBm

Test data reference attachment.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

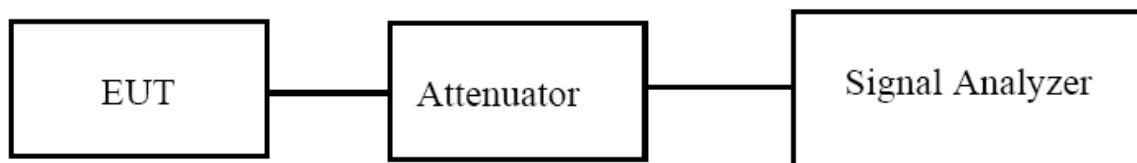

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

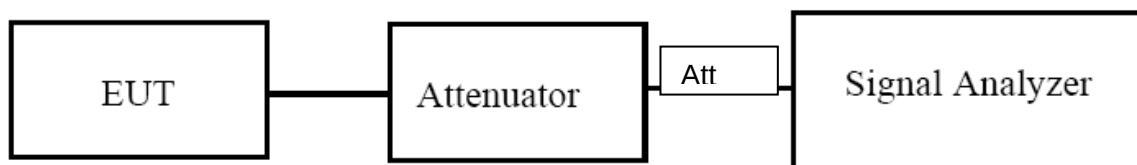

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B
5470~5725	250 mW or 11 dBm + 10 log B
5725~5850	1W

Note: where B is the 26 dB emission bandwidth in megahertz


6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
 - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
 - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - d) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

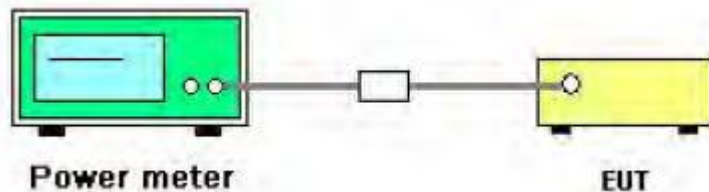

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Note: Band1&Band2A&Band2C For 802.11n/ac 5GHz has MIMO mode. Directional gain=7.25dbi

7.25 dBi > 6.0 dBi so power limit=24-(7.25-6)=22.75 in dBm

Band3 For 802.11n/ac 5GHz has MIMO mode. Directional gain=7.25dbi

7.25 dBi > 6.0 dBi so power limit= 30.00-(7.25-6)=28.75 in dBm

Test data reference attachment.

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407 (b)(8)(9)

Undesirable emission limits. Except as shown in paragraph (b)(8)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

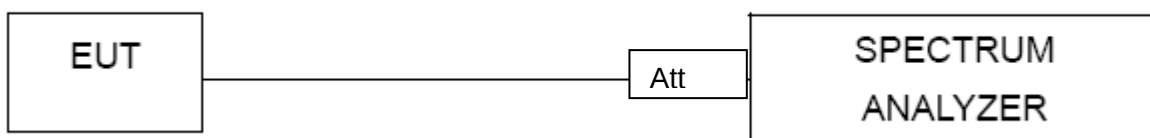

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	WOWtv	Model Name :	DV8919-F
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V

Test data reference attachment.

8. Frequency Stability Measurement

8.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

8.3 TEST SETUP LAYOUT

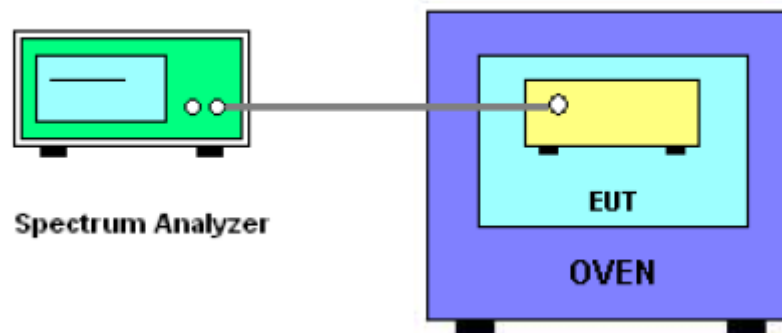

8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

8.5 TEST RESULTS

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5180.0242	5180	0.0242	4.6718
		V max (V)	5.75	5180.0161	5180	0.0161	3.1071
		V min (V)	4.25	5180.0163	5180	0.0163	3.1376
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5180.0272	5180	0.0272	5.2537
		T (°C)	10	5180.0156	5180	0.0156	3.0034
		T (°C)	20	5180.0139	5180	0.0139	2.6851
		T (°C)	30	5180.0154	5180	0.0154	2.9787
		T (°C)	40	5180.0137	5180	0.0137	2.6440
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5200.0113	5200	0.0113	2.1645
		V max (V)	5.75	5200.0131	5200	0.0131	2.5196
		V min (V)	4.25	5200.0130	5200	0.0130	2.5000
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5200.0309	5200	0.0309	5.9493
		T (°C)	10	5200.0205	5200	0.0205	3.9414
		T (°C)	20	5200.0132	5200	0.0132	2.5469
		T (°C)	30	5200.0121	5200	0.0121	2.3244
		T (°C)	40	5200.0178	5200	0.0178	3.4322
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5240.0114	5240	0.0114	2.1756
		V max (V)	5.75	5240.0171	5240	0.0171	3.2634
		V min (V)	4.25	5240.0154	5240	0.0154	2.9389
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5240.0151	5240	0.0151	2.8906
		T (°C)	10	5240.0228	5240	0.0228	4.3433
		T (°C)	20	5240.0122	5240	0.0122	2.3376
		T (°C)	30	5240.0144	5240	0.0144	2.7492
		T (°C)	40	5240.0174	5240	0.0174	3.3286
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5260.0188	5260	0.0188	3.5706
		V max (V)	5.75	5260.0185	5260	0.0185	3.5190
		V min (V)	4.25	5260.0185	5260	0.0185	3.5190
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5260.0056	5260	0.0056	1.0734
		T (°C)	10	5260.0137	5260	0.0137	2.6021
		T (°C)	20	5260.0050	5260	0.0050	0.9533
		T (°C)	30	5260.0073	5260	0.0073	1.3829
		T (°C)	40	5260.0135	5260	0.0135	2.5712
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5280.01094	5280	0.01094	2.0715
		V max (V)	5.75	5280.01230	5280	0.01230	2.3287
		V min (V)	4.25	5280.01211	5280	0.01211	2.2936
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5280.0080	5280	0.0080	1.5170
		T (°C)	10	5280.0089	5280	0.0089	1.6875
		T (°C)	20	5280.0090	5280	0.0090	1.7064
		T (°C)	30	5280.0070	5280	0.0070	1.3277
		T (°C)	40	5280.0155	5280	0.0155	2.9375
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5320.0226	5320	0.0226	4.2400
		V max (V)	5.75	5320.0178	5320	0.0178	3.3377
		V min (V)	4.25	5320.0155	5320	0.0155	2.9140
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5320.0118	5320	0.0118	2.2117
		T (°C)	10	5320.0051	5320	0.0051	0.9553
		T (°C)	20	5320.0047	5320	0.0047	0.8814
		T (°C)	30	5320.0106	5320	0.0106	1.9970
		T (°C)	40	5320.0225	5320	0.0225	4.2344
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5500.0039	5500	0.0039	0.7077
		V max (V)	5.75	5500.0017	5500	0.0017	0.3114
		V min (V)	4.25	5500.0016	5500	0.0016	0.2818
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5500.0063	5500	0.0063	1.1494
		T (°C)	10	5500.0064	5500	0.0064	1.1679
		T (°C)	20	5500.0087	5500	0.0087	1.5909
		T (°C)	30	5500.0058	5500	0.0058	1.0499
		T (°C)	40	5500.0051	5500	0.0051	0.9347
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5600.0070	5600	0.0070	1.2429
		V max (V)	5.75	5600.0088	5600	0.0088	1.5625
		V min (V)	4.25	5600.0081	5600	0.0081	1.4500
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5600.0034	5600	0.0034	0.6017
		T (°C)	10	5600.0081	5600	0.0081	1.4457
		T (°C)	20	5600.0106	5600	0.0106	1.8969
		T (°C)	30	5600.0044	5600	0.0044	0.7779
		T (°C)	40	5600.0074	5600	0.0074	1.3198
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5700.0065	5700	0.0065	1.1434
		V max (V)	5.75	5700.0083	5700	0.0083	1.4587
		V min (V)	4.25	5700.0083	5700	0.0083	1.4526
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5700.0035	5700	0.0035	0.6156
		T (°C)	10	5700.0024	5700	0.0024	0.4155
		T (°C)	20	5700.0083	5700	0.0083	1.4621
		T (°C)	30	5700.0100	5700	0.0100	1.7579
		T (°C)	40	5700.0062	5700	0.0062	1.0890
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	WOWtv	Model Name. :	DV8919-F
Temperature :	20 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency(5745-5850MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5745.0138	5745	0.0138	2.4074
		V max (V)	5.75	5745.0208	5745	0.0208	3.6144
		V min (V)	4.25	5745.0207	5745	0.0207	3.6078
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5745.0115	5745	0.0115	2.0038
		T (°C)	10	5745.0133	5745	0.0133	2.3108
		T (°C)	20	5745.0107	5745	0.0107	1.8611
		T (°C)	30	5745.0119	5745	0.0119	2.0790
		T (°C)	40	5745.0162	5745	0.0162	2.8225
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5785.0147	5785	0.01466	-2.5339
		V max (V)	5.75	5785.0126	5785	0.01260	-2.1787
		V min (V)	4.25	5785.0125	5785	0.01254	-2.1681
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5785.0159	5785	0.0159	2.7569
		T (°C)	10	5785.0091	5785	0.0091	1.5651
		T (°C)	20	5785.0138	5785	0.0138	2.3833
		T (°C)	30	5785.0105	5785	0.0105	1.8217
		T (°C)	40	5785.0080	5785	0.0080	1.3816
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5825.0116	5825	0.0116	1.9947
		V max (V)	5.75	5825.0173	5825	0.0173	2.9635
		V min (V)	4.25	5825.0172	5825	0.0172	2.9444
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	0	5825.0109	5825	0.0109	1.8710
		T (°C)	10	5825.0081	5825	0.0081	1.3933
		T (°C)	20	5825.0090	5825	0.0090	1.5467
		T (°C)	30	5825.0168	5825	0.0168	2.8840
		T (°C)	40	5825.0150	5825	0.0150	2.5680
Limits				Within 5745-5850MHz			
Result				Complies			

Note: antenna 1 is the worst case.

9. DYNAMIC FREQUENCY SELECTION(DFS)

9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

9.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

9.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{min}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

9.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 3\text{dBi} + 1\text{dB} = -59\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 3\text{dBi} + 1\text{dB} = -59\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

9.6 CONDUCTED CALIBRATION SETUP

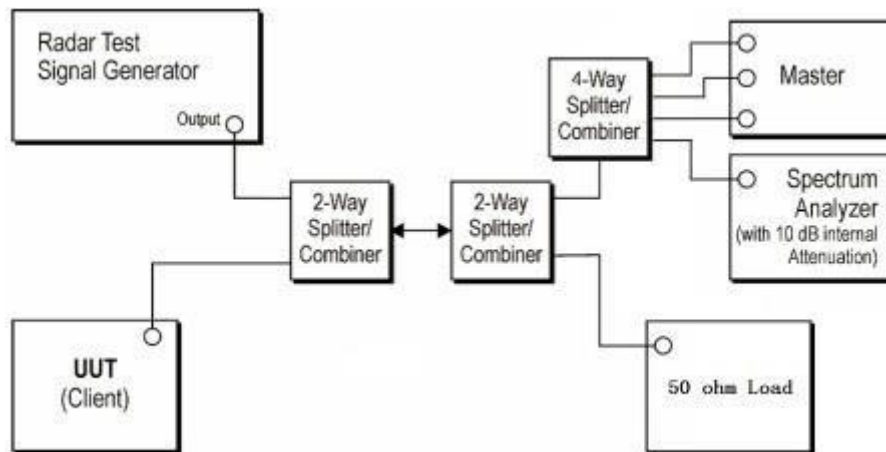

Wireless AP	Manufacturer	LINKSYS LLC
	Model NO.	WRT32X
	FCC ID	Q87-WRT3200ACM


9.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

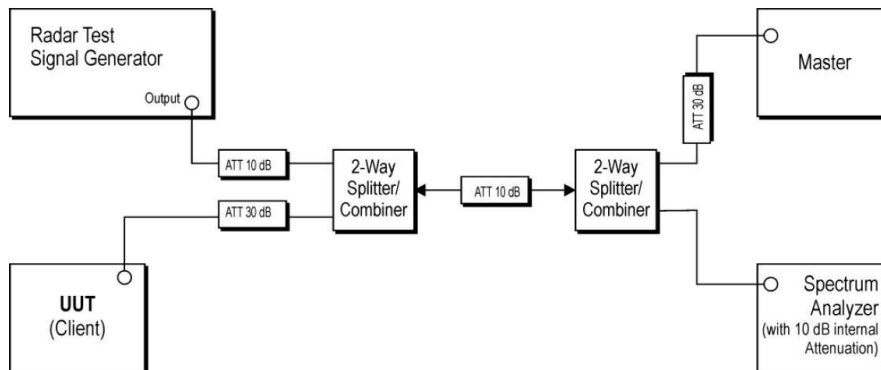

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell(0.3ms) = S(12000ms) / B(4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C(ms) = N \times Dwell(0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Please refer to the clause 2.2

**9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND
NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST**

Test data reference attachment.

10. ANTENNA REQUIREMENT**10.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is permanent attached Antenna 1: FPCB antenna(Gain: 4.15dBi); Antenna 2: FPCB antenna(Gain:4.33dBi). It comply with the standard requirement.

END OF REPORT