

FCC RADIO TEST REPORT

FCC ID: 2AW69-CWYSTR

Product : Celerway Stratus

Trade Mark : Celerway Stratus

Model Name : Stratus CWY-M5.2E5L2W3

Family Model : Stratus CWY-M5.2E5L1W2, Stratus
CWY-M5.2E5W3

Report No. : S20101300907002

Prepared for

Celerway Communication AS

Martin Lingesvei 25, 1364 Fornebu, Norway

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

Tel.: 400-800-6106, 0755-3699 5508

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Celerway Communication AS
Address : Martin Lingesvei 25, 1364 Fornebu, Norway
Manufacturer's Name : Celerway Communication AS
Address : Martin Lingesvei 25, 1364 Fornebu, Norway

Product description

Product name : Celerway Stratus
Model and/or type reference : Stratus CWY-M5.2E5L2W3
Family Model..... : Stratus CWY-M5.2E5L1W2, Stratus CWY-M5.2E5W3

Standards : FCC Part15.407

Test procedure..... ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v02r01 and KDB 662911 D01 Multiple Transmitter Output v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 10 Nov. 2020 ~ 23 Dec. 2020

Date of Issue..... 24 Dec. 2020

Test Result..... **Pass**

Testing Engineer : Cheng Jiawen
 (Cheng Jiawen)

Technical Manager : Jason chen
 (Jason Chen)

Authorized Signatory : Alex
 (Alex Li)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . TEST REQUIREMENTS	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.1.1 APPLICABLE STANDARD	16
3.1.2 CONFORMANCE LIMIT	16
3.1.3 TEST CONFIGURATION	16
3.1.4 TEST PROCEDURE	16
3.1.5 TEST RESULTS	17
3.2 RADIATED EMISSION MEASUREMENT	21
3.2.1 APPLICABLE STANDARD	21
3.2.2 CONFORMANCE LIMIT	21
3.2.3 MEASURING INSTRUMENTS	21
3.2.4 TEST CONFIGURATION	22
3.2.5 TEST PROCEDURE	23
3.2.6 TEST RESULTS (9KHZ – 30 MHZ)	24
3.2.7 TEST RESULTS (30MHZ – 1GHZ)	25
3.2.8 TEST RESULTS (1GHZ-18GHZ)	29
3.2.9 TEST RESULTS (18GHZ-40GHZ)	33
3.2.10 SPURIOUS EMISSION IN RESTRICTED BAND 4.5GHZ~5.150 GHZ& 5.350GHZ~5460GHZ	37
3.3 POWER SPECTRAL DENSITY TEST	38
3.3.1 APPLIED PROCEDURES / LIMIT	38
3.3.2 TEST PROCEDURE	39
3.3.3 DEVIATION FROM STANDARD	39
3.3.4 TEST SETUP	39
3.3.5 EUT OPERATION CONDITIONS	39
3.3.6 TEST RESULTS	40
3.4 26DB & 99% EMISSION BANDWIDTH	41
3.4.1 APPLIED PROCEDURES / LIMIT	41
3.4.2 TEST PROCEDURE	41

Table of Contents

	Page
3.4.3 EUT OPERATION CONDITIONS	42
3.4.4 TEST RESULTS	42
3.5 MINIMUM 6 DB BANDWIDTH	43
3.5.1 APPLIED PROCEDURES / LIMIT	43
3.5.2 TEST PROCEDURE	43
3.5.3 DEVIATION FROM STANDARD	43
3.5.4 TEST SETUP	43
3.5.5 EUT OPERATION CONDITIONS	43
3.5.6 TEST RESULTS	44
3.6 MAXIMUM CONDUCTED OUTPUT POWER	45
3.6.1 PPLIED PROCEDURES / LIMIT	45
3.6.2 TEST PROCEDURE	45
3.6.3 DEVIATION FROM STANDARD	47
3.6.5 EUT OPERATION CONDITIONS	47
3.6.6 TEST RESULTS	48
3.7 OUT OF BAND EMISSIONS	49
3.7.1 APPLICABLE STANDARD	49
3.7.2 TEST PROCEDURE	49
3.7.3 DEVIATION FROM STANDARD	49
3.7.4 TEST SETUP	49
3.7.5 EUT OPERATION CONDITIONS	49
3.7.6 TEST RESULTS	50
3.8 SPURIOUS RF CONDUCTED EMISSIONS	51
3.8.1 CONFORMANCE LIMIT	51
3.8.2 MEASURING INSTRUMENTS	51
3.8.3 TEST SETUP	51
3.8.4 TEST PROCEDURE	51
3.8.5 TEST RESULTS	51
3.9 FREQUENCY STABILITY MEASUREMENT	52
3.9.1 LIMIT	52
3.9.2 TEST PROCEDURES	52
3.9.3 TEST SETUP LAYOUT	52
3.9.4 EUT OPERATION DURING TEST	52
3.9.5 TEST RESULTS	53
4. ANTENNA REQUIREMENT	65
4.1 STANDARD REQUIREMENT	65
4.2 EUT ANTENNA	65

Revision History

Report No.	Version	Description	Issued Date
S20101300907002	Rev.01	Initial issue of report	24 Dec. 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.
- IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074
- FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184
- A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
- Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.
- Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

2. GENERAL INFORMATION
2.1 GENERAL DESCRIPTION OF EUT

Equipment	Celerway Stratus	
Trade Mark	Celerway Stratus	
Model Name	Stratus CWY-M5.2E5L2W3	
Family Model	Stratus CWY-M5.2E5L1W2, Stratus CWY-M5.2E5W3	
Model Difference	All the model are the same circuit and RF module, except the Model names.	
FCC ID	2AW69-CWYSTR	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/n/ac (20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n/ac (40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac (80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20):MCS0-MCS8; 802.11ac(VHT40/VHT80):MCS0-MCS9;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> U-NII-1: 5180-5240MHz for 802.11a/n(HT20) / ac(VHT20); 5190-5230MHz for 802.11n(HT40)/ac(VHT40); 5210MHz for 802.11ac(VHT80) <input checked="" type="checkbox"/> U-NII-3: 5745-5825 MHz for 802.11a/n(HT20)/ ac(VHT20); 5755-5795 MHz for 802.11a/n(HT40)/ ac(VHT40); 5775MHz for 802.11ac(VHT80)
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; <input checked="" type="checkbox"/> 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Function:	<input type="checkbox"/> Outdoor AP <input checked="" type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P <input type="checkbox"/> Client
	Support TPC	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
	Smart system	<input checked="" type="checkbox"/> SISO for 802.11a/n/ac <input checked="" type="checkbox"/> MIMO for 802.11n/ac
	Antenna Type	External Antenna
	Antenna Gain	5dBi
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.		

Ratings	DC 24V from Adapter.
Adapter	Model: XDJ721D-240300 Input: 100-240V~50/60Hz 1.8A Output: 24.0V $\overline{\text{---}}$ 3.0A 72.0W
Connecting I/O Port(s)	Please refer to the User's Manual
HW Version	1.0
SW Version	1.3

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n/ac(20MHz) band I (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band I (5190-5230MHz):

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11ac(80MHz) band I (5210MHz):

802.11ac(80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac(40MHz) band IV (5755-5795MHz):

802.11n/ac(40MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Frequency and Channel list for 802.11ac(80MHz) band IV (5775MHz):

802.11ac(80MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	-	-	-	-

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 / ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n 20 / ac 20 CH36/ CH40/ CH 48 802.11a / n 20 / ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40 CH38/ CH 46 802.11n 40 / ac 40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42 802.11ac 80 CH 155

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

The Wi-Fi 5.2G/5.8G module has two antennas, and different modes support different transmit mode what describe as following form:

Mode	Tx / Rx
802.11a / n(20MHz,40MHz) / ac(20MHz,40MHz,80MHz)	1TX, 1RX
802.11n(20MHz,40MHz) / ac(20MHz,40MHz,80MHz)	2TX, 2RX

For 5.2GHz/5.8GHz band, 802.11n(20/40)/ac(20/40/80) has MIMO mode, Antenna 1,2 are simultaneous transmissions, each with the same directional gain.

For power measurements: Directional gain= $G_{ANT} + \text{Array Gain} = 5\text{dBi} + 0 = 5\text{dBi}$

For power spectral density (PSD) measurements: Directional gain= $G_{ANT} + \text{Array Gain} = 5\text{dBi} + 3.01 = 8.01\text{dBi}$

Note: G_{ANT} means antenna gain for the same gain in dBi.

For power spectral density (PSD) measurements: Array Gain = $10\log(N_{ANT}/N_{SS})\text{dB}$.

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements:

N_{ANT} = number of transmit antennas and


N_{SS} = number of spatial streams. (Assume $N_{SS} = 1$ unless you have specific information to the contrary.)

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode



For Radiated Test Cases



For Conducted Test Cases

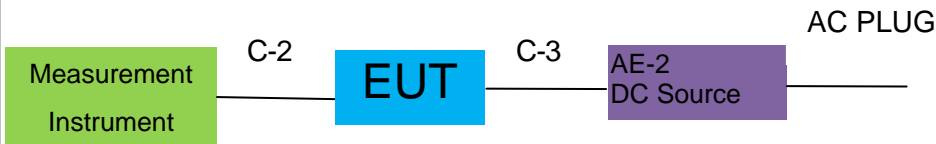

Note:1.The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	XDJ721D-240300	N/A	Peripherals
AE-2	DC Source	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	2.8m
C-2	RF Cable	YES	NO	0.1m
C-3	DC Cable	NO	NO	0.5m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.07.13	2021.07.12	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.07.13	2021.07.12	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
8	Amplifier	EMC	EMC051835SE	980246	2020.07.13	2021.07.12	1 year
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2020.11.19	2021.11.18	1 year
10	Power Meter	DARE	RPR3006W	15100041SN O84	2020.07.13	2021.07.12	1 year
	USB RF Power Sensor	DARE	RPR3006W	15100041SN O84	2020.07.13	2021.07.12	1 year
11	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.6	2022.08.05	3 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2020.07.13	2021.07.12	1 year
13	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2020.04.11	2021.04.10	1 year
15	Filter	TRILTHIC	2400MHz	29	2020.07.13	2021.07.12	1 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
17	Low Noise Amplifier	B&Z	BZ-P540-550 850-452727	16476-11729	2020.04.15	2021.04.14	1 year
18	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2020.11.19	2021.11.18	1 year
19	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.04.11	2021.04.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2021.05.10	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

3. TEST REQUIREMENTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

3.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.3 TEST CONFIGURATION

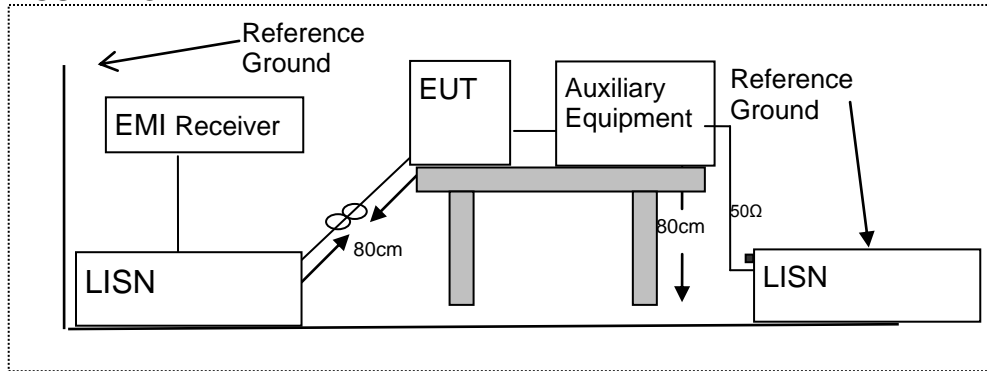

3.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


3.1.5 TEST RESULTS

EUT :	Celerway Stratus	Model Name :	Stratus CWY-M5.2E5L2W3
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2140	35.02	9.55	44.57	63.04	-18.47	QP
0.2140	18.27	9.55	27.82	53.04	-25.22	AVG
0.3500	35.00	9.54	44.54	58.96	-14.42	QP
0.3500	22.84	9.54	32.38	48.96	-16.58	AVG
0.4820	36.74	9.55	46.29	56.30	-10.01	QP
0.4820	24.69	9.55	34.24	46.30	-12.06	AVG
0.8940	38.81	9.55	48.36	56.00	-7.64	QP
0.8940	24.24	9.55	33.79	46.00	-12.21	AVG
2.5980	37.14	9.59	46.73	56.00	-9.27	QP
2.5980	23.03	9.59	32.62	46.00	-13.38	AVG
7.7260	37.26	9.67	46.93	60.00	-13.07	QP
7.7260	23.38	9.67	33.05	50.00	-16.95	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

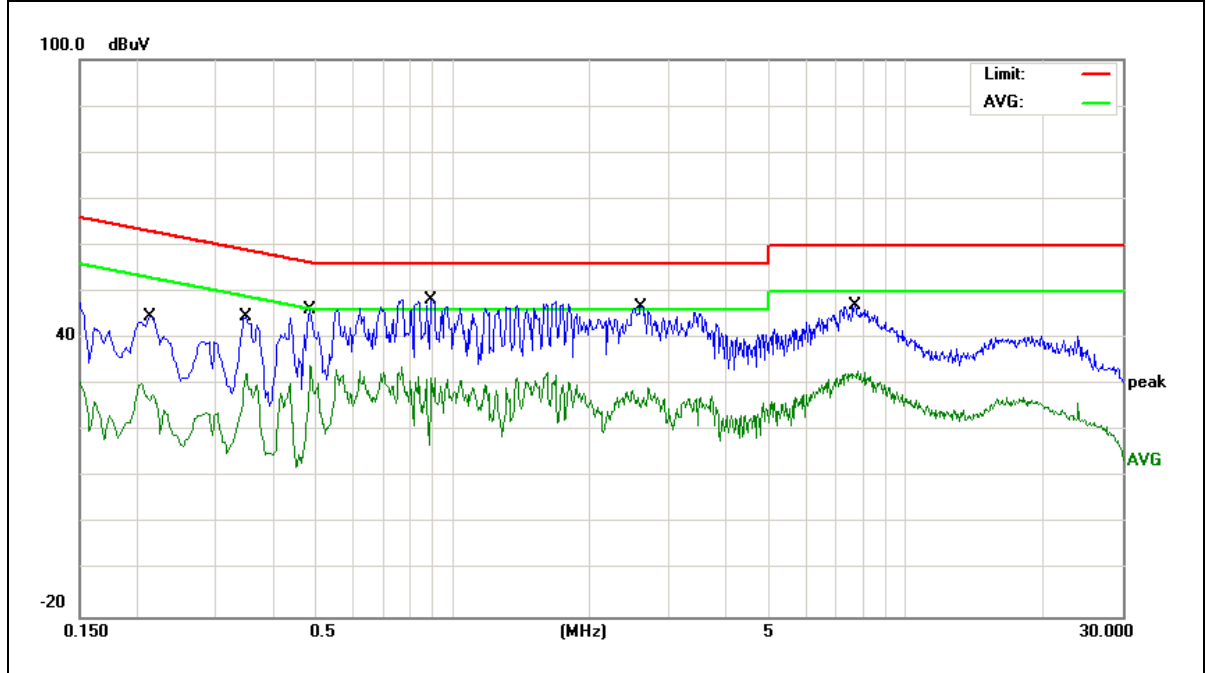


EUT :	Celerway Stratus	Model Name :	Stratus CWY-M5.2E5L2W3
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	32.43	9.55	41.98	65.36	-23.38	QP
0.1620	13.74	9.55	23.29	55.36	-32.07	AVG
0.2060	34.73	9.54	44.27	63.36	-19.09	QP
0.2060	19.01	9.54	28.55	53.36	-24.81	AVG
0.3540	35.00	9.54	44.54	58.87	-14.33	QP
0.3540	20.60	9.54	30.14	48.87	-18.73	AVG
0.4340	35.51	9.54	45.05	57.18	-12.13	QP
0.4340	21.45	9.54	30.99	47.18	-16.19	AVG
0.8740	34.47	9.54	44.01	56.00	-11.99	QP
0.8740	20.36	9.54	29.90	46.00	-16.10	AVG
8.0939	30.45	9.66	40.11	60.00	-19.89	QP
8.0939	18.32	9.66	27.98	50.00	-22.02	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

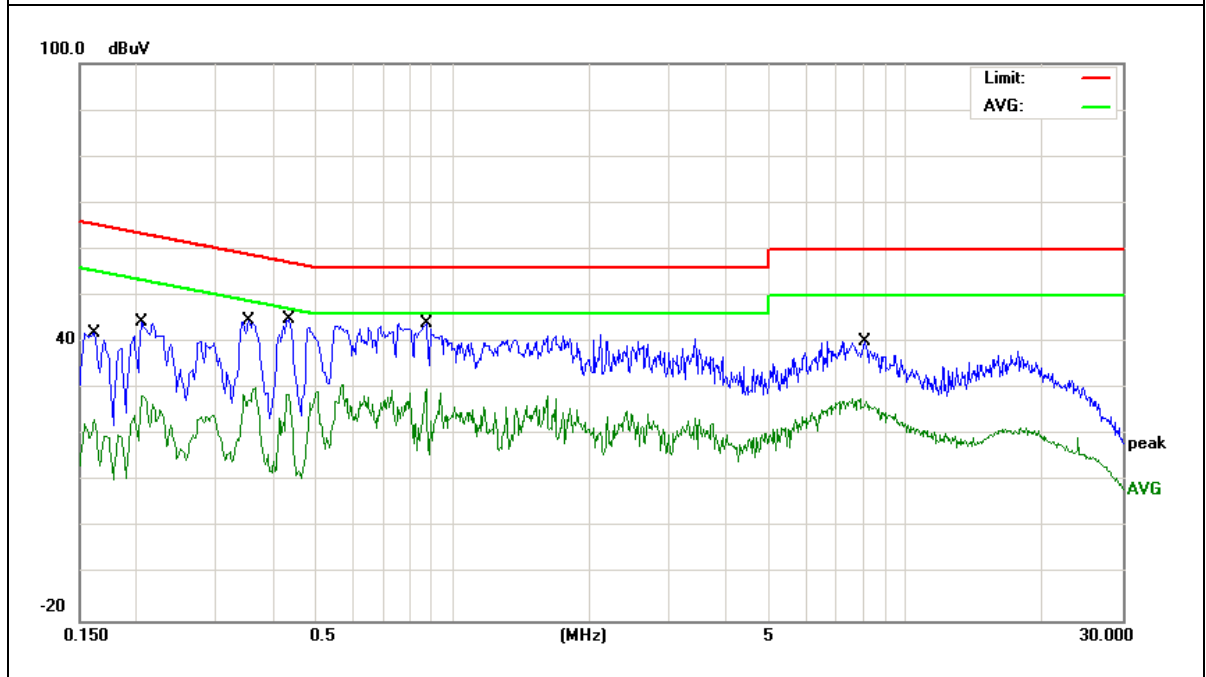


EUT :	Celerway Stratus	Model Name :	Stratus CWY-M5.2E5L2 W3
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3500	35.87	9.54	45.41	58.96	-13.55	QP
0.3500	22.00	9.54	31.54	48.96	-17.42	AVG
0.4820	37.25	9.55	46.80	56.30	-9.50	QP
0.4820	24.69	9.55	34.24	46.30	-12.06	AVG
0.5540	37.51	9.55	47.06	56.00	-8.94	QP
0.5540	25.06	9.55	34.61	46.00	-11.39	AVG
0.7580	39.38	9.55	48.93	56.00	-7.07	QP
0.7580	24.63	9.55	34.18	46.00	-11.82	AVG
1.1820	38.53	9.56	48.09	56.00	-7.91	QP
1.1820	22.96	9.56	32.52	46.00	-13.48	AVG
7.4820	38.22	9.66	47.88	60.00	-12.12	QP
7.4820	23.67	9.66	33.33	50.00	-16.67	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

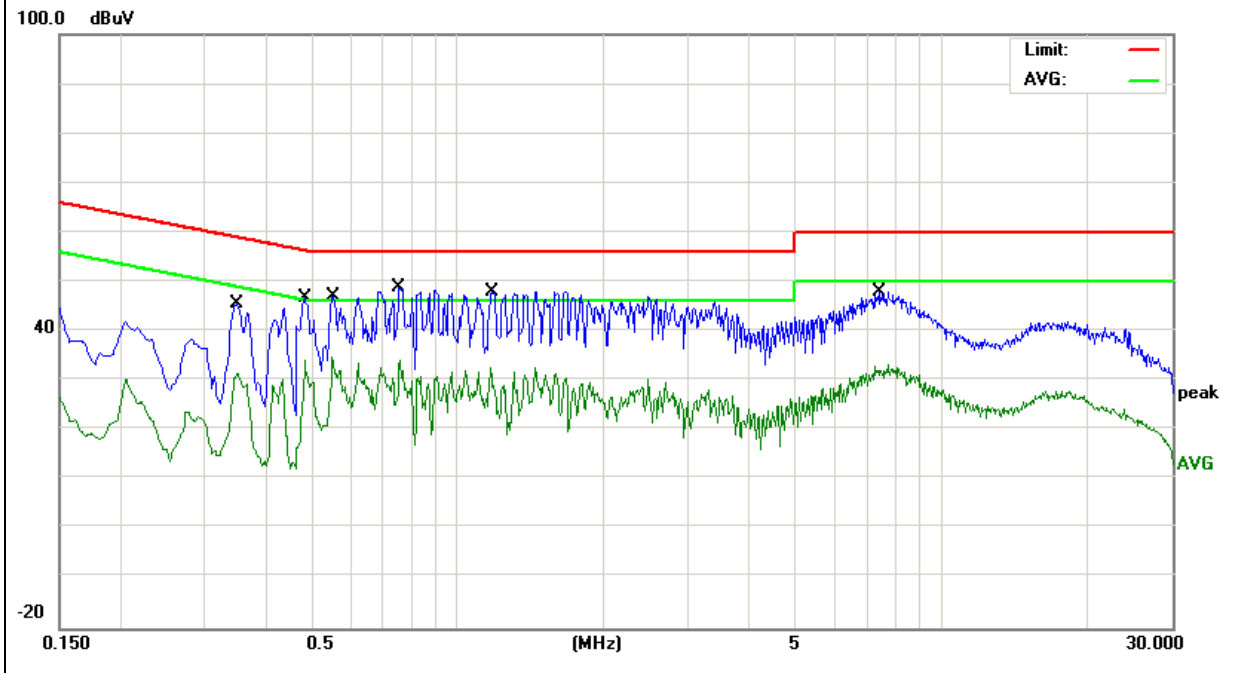


EUT :	Celerway Stratus	Model Name :	Stratus CWY-M5.2E5L2 W3
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 24V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2100	34.64	9.54	44.18	63.20	-19.02	QP
0.2100	18.08	9.54	27.62	53.20	-25.58	AVG
0.3500	35.04	9.53	44.57	58.96	-14.39	QP
0.3500	20.83	9.53	30.36	48.96	-18.60	AVG
0.4380	35.84	9.54	45.38	57.10	-11.72	QP
0.4380	21.66	9.54	31.20	47.10	-15.90	AVG
0.8740	34.41	9.54	43.95	56.00	-12.05	QP
0.8740	21.53	9.54	31.07	46.00	-14.93	AVG
2.1180	31.34	9.57	40.91	56.00	-15.09	QP
2.1180	17.75	9.57	27.32	46.00	-18.68	AVG
7.5980	31.09	9.66	40.75	60.00	-19.25	QP
7.5980	18.15	9.66	27.81	50.00	-22.19	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

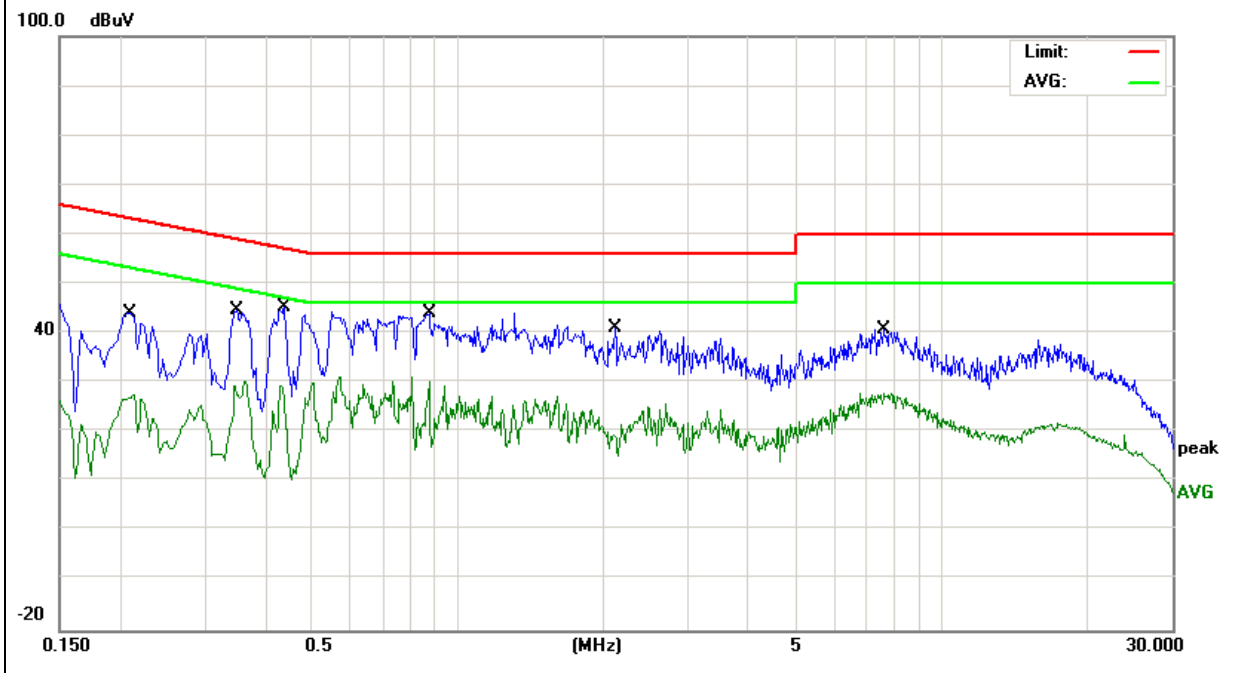

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(b) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


- Remark : 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. For Frequency 9kHz~30MHz:
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.
 For Frequency above 30MHz:
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

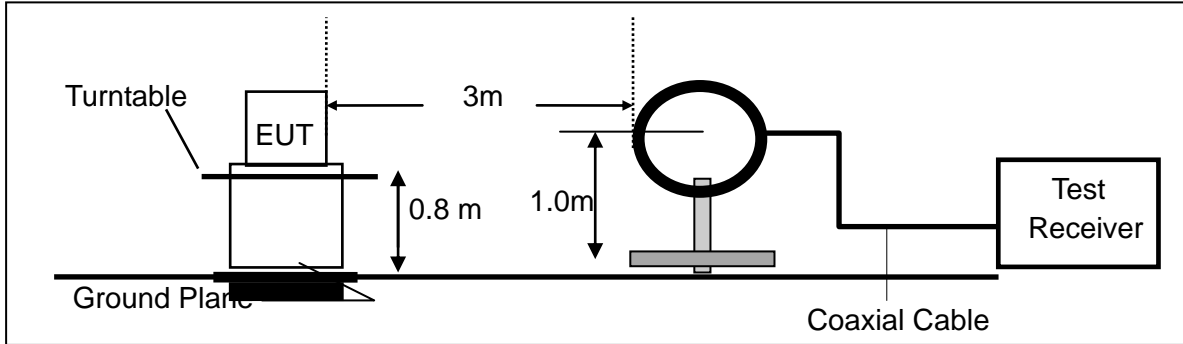

(b) For radiated emissions from 30MHz to 1000MHz

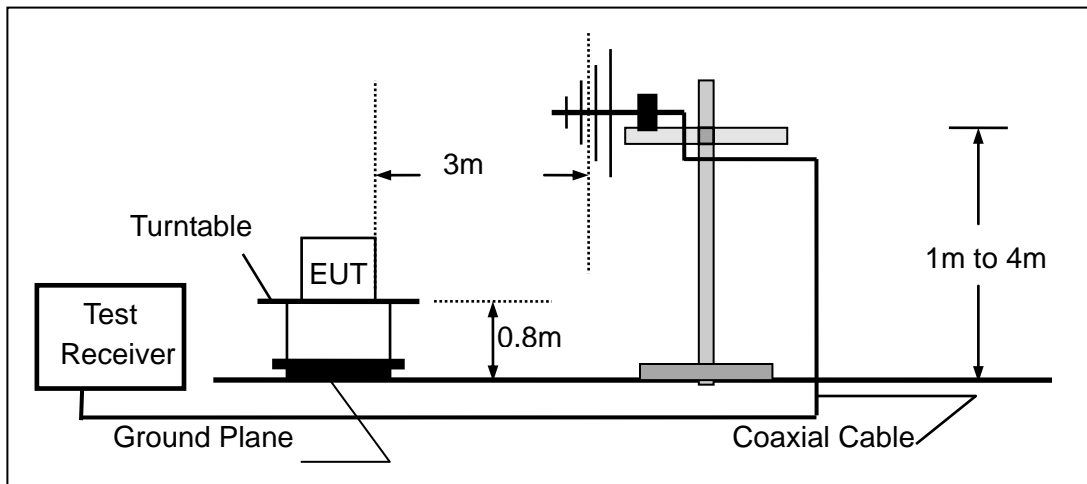

(c) For radiated emissions above 1000MHz

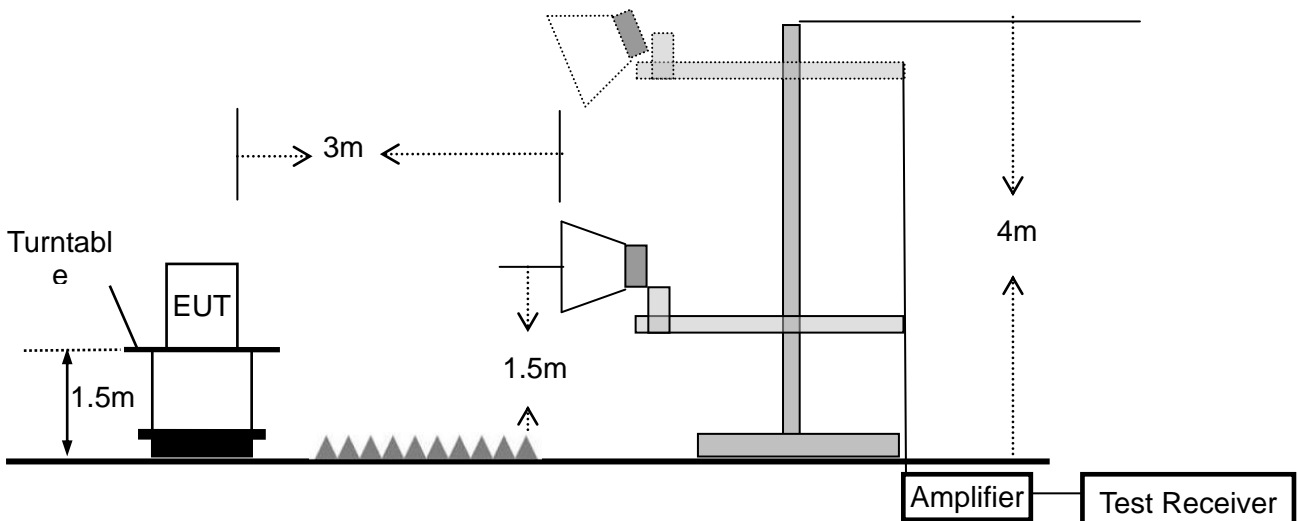

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 * \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT:	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 24V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.2.7 TEST RESULTS (30MHZ – 1GHZ)


EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.2G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.9174	11.48	17.34	28.82	40.00	-11.18	QP
V	45.3755	13.89	11.08	24.97	40.00	-15.03	QP
V	84.9995	18.76	8.97	27.73	40.00	-12.27	QP
V	168.4138	17.92	10.76	28.68	43.50	-14.82	QP
V	327.8873	8.29	15.24	23.53	46.00	-22.47	QP
V	729.3583	7.07	25.10	32.17	46.00	-13.83	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

All modes have been tested, just the 802.11n20 CH40 MIMO worst mode has been recorded in the report.

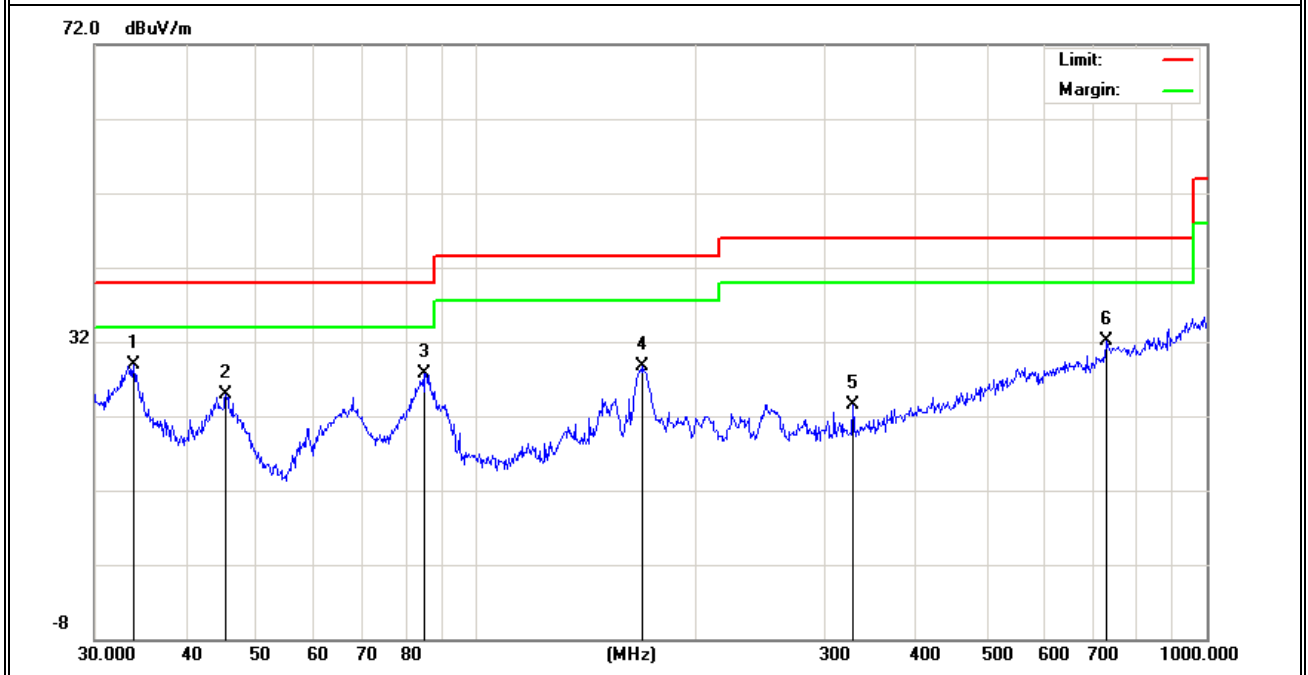


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	33.3278	7.67	17.48	25.15	40.00	-14.85	QP
H	74.3955	8.86	7.25	16.11	40.00	-23.89	QP
H	166.0680	16.01	10.65	26.66	43.50	-16.84	QP
H	251.1804	10.91	13.55	24.46	46.00	-21.54	QP
H	574.6258	7.20	21.92	29.12	46.00	-16.88	QP
H	958.7943	8.00	28.41	36.41	46.00	-9.59	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

All modes have been tested, just the 802.11n20 CH40 MIMO worst mode has been recorded in the report.

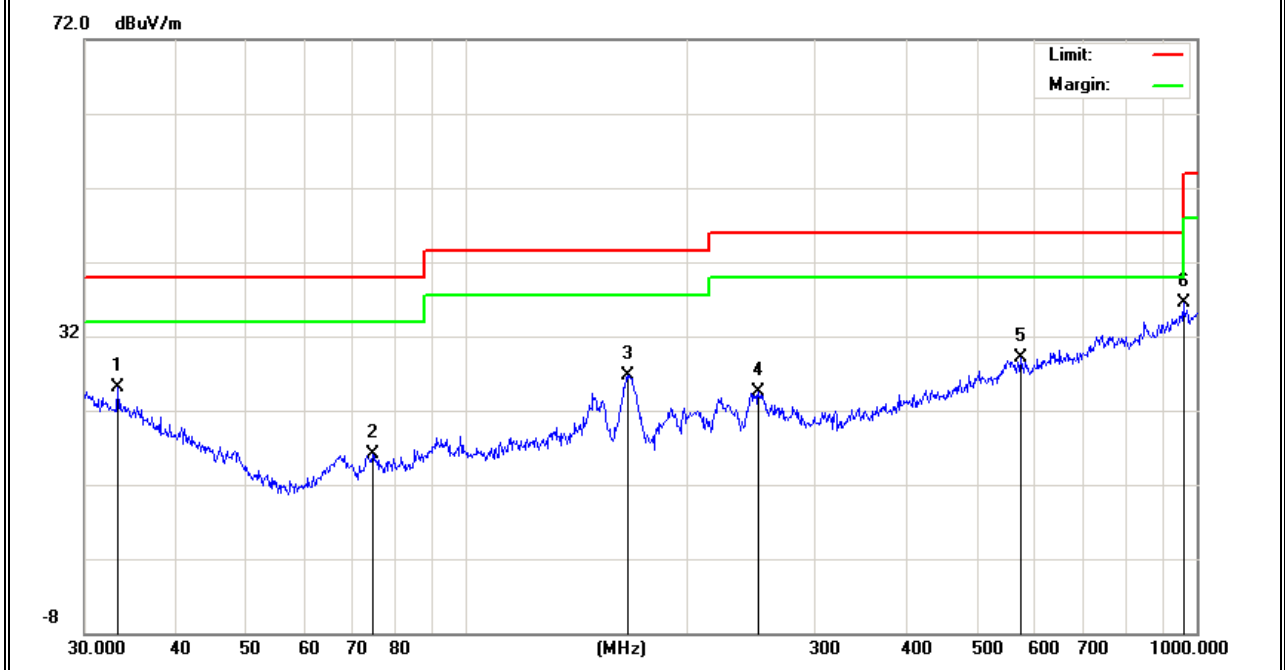


EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.8G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	34.1561	11.53	17.22	28.75	40.00	-11.25	QP
V	44.5868	12.12	11.58	23.70	40.00	-16.30	QP
V	84.7019	17.11	8.87	25.98	40.00	-14.02	QP
V	166.0680	18.69	10.65	29.34	43.50	-14.16	QP
V	249.4250	10.16	13.39	23.55	46.00	-22.45	QP
V	562.6624	7.02	22.22	29.24	46.00	-16.76	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

All modes have been tested, just the 802.11n20 CH157 MIMO worst mode has been recorded in the report.

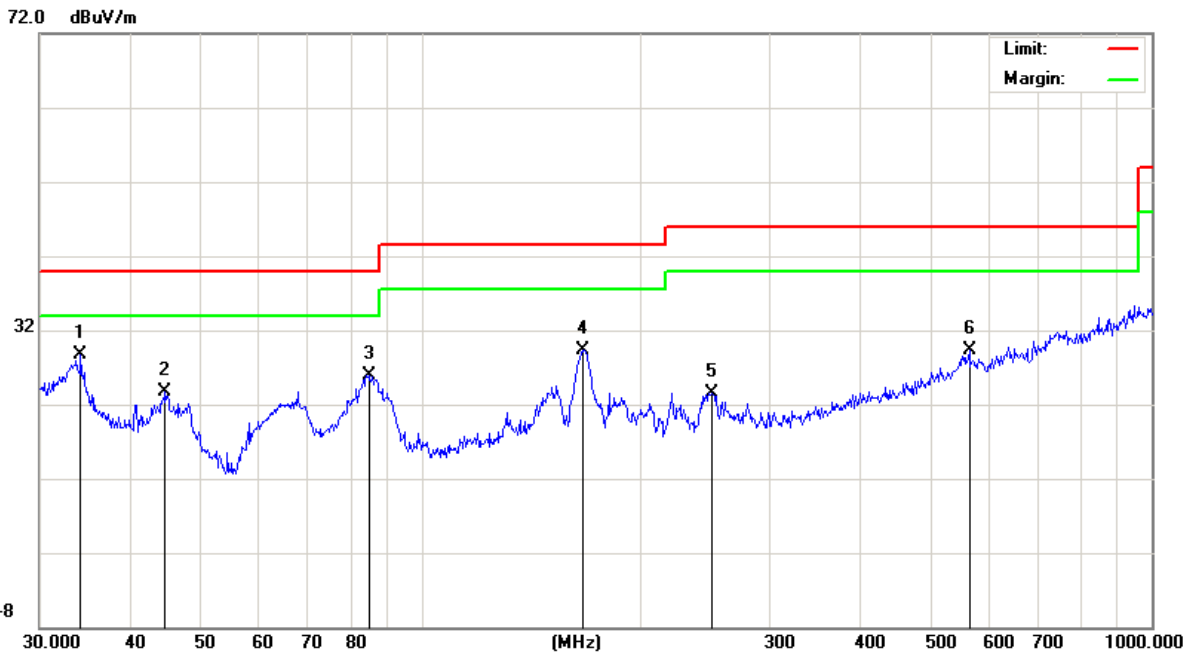


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	34.2760	6.71	17.15	23.86	40.00	-16.14	QP
H	92.4624	8.27	10.20	18.47	43.50	-25.03	QP
H	165.4866	15.96	10.63	26.59	43.50	-16.91	QP
H	247.6819	11.14	13.17	24.31	46.00	-21.69	QP
H	737.0714	7.78	25.13	32.91	46.00	-13.09	QP
H	955.4380	7.98	28.41	36.39	46.00	-9.61	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

All modes have been tested, just the 802.11n20 CH157 MIMO worst mode has been recorded in the report.

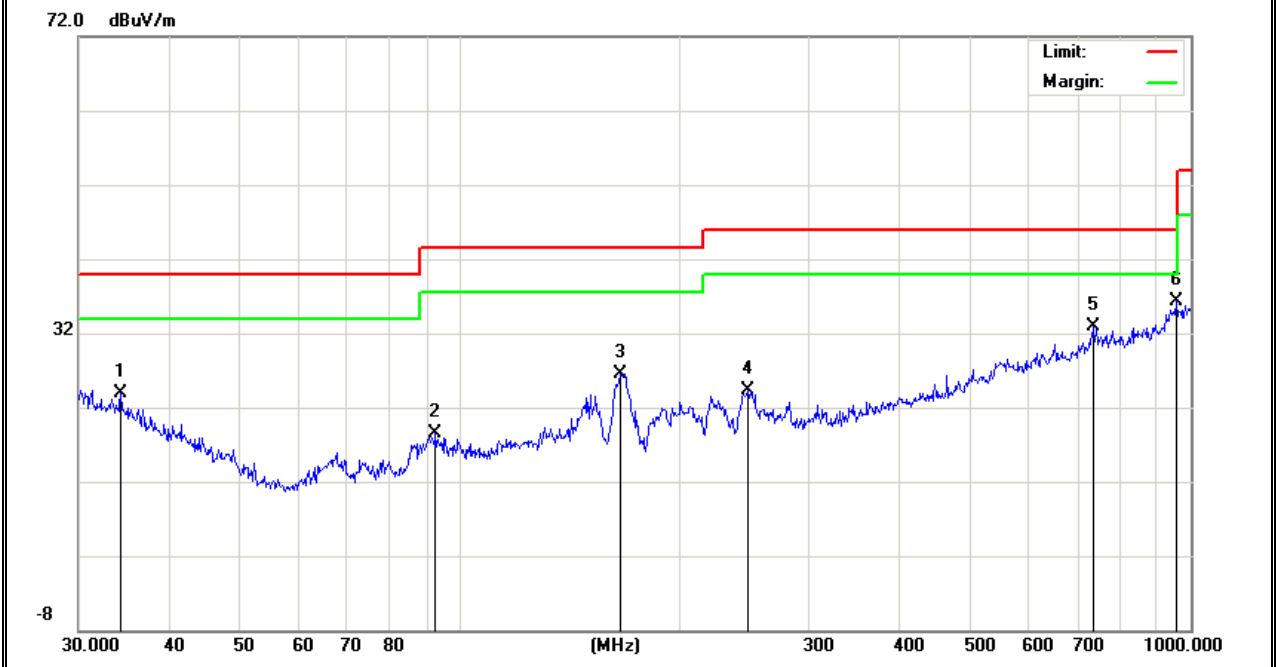

3.2.8 TEST RESULTS (1GHZ-18GHZ)

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.2G)		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3015	52.39	5.94	35.4	44	49.73	68.2	-18.47	Pk
Vertical	10360	52.36	8.46	39.75	44.5	56.07	68.2	-12.13	Pk
Vertical	15540	60.21	10.12	38.8	44.1	65.03	74	-8.97	Pk
Vertical	15540	39.15	10.12	38.8	42.7	45.37	54	-8.63	AV
Horizontal	2981	54.07	5.94	35.18	44	51.19	68.2	-17.01	Pk
Horizontal	10360	50.43	8.46	38.71	44.5	53.10	68.2	-15.10	Pk
Horizontal	15540	55.69	10.12	38.38	44.1	60.09	74	-13.91	Pk
Horizontal	15540	36.55	10.12	38.38	44.1	40.95	54	-13.05	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	3561	57.07	6.48	36.35	44.05	55.85	68.2	-12.35	Pk
Vertical	10400	54.90	8.47	37.88	44.51	56.74	68.2	-11.46	Pk
Vertical	15600	54.54	10.12	38.8	44.1	59.36	74	-14.64	Pk
Vertical	15600	37.51	10.12	38.8	42.7	43.73	54	-10.27	AV
Horizontal	3363	53.19	6.48	36.37	44.05	51.99	68.2	-16.21	Pk
Horizontal	10400	50.56	8.47	38.64	44.5	53.17	68.2	-15.03	Pk
Horizontal	15600	56.84	10.12	38.38	44.1	61.24	74	-12.76	Pk
Horizontal	15600	42.96	10.12	38.38	44.1	47.36	54	-6.64	AV

High Channel (5240 MHz)-Above 1G									
Vertical	3926	56.86	7.1	37.24	43.5	57.70	74	-16.30	Pk
Vertical	3926	43.43	7.1	37.24	43.5	44.27	54	-9.73	AV
Vertical	10480	54.10	8.46	37.68	44.5	55.74	68.2	-12.46	Pk
Vertical	15720	56.70	10.12	38.8	44.1	61.52	74	-12.48	Pk
Vertical	15720	34.46	10.12	38.8	42.7	40.68	54	-13.32	AV
Horizontal	3885	63.16	7.1	37.24	43.5	64.00	74	-10.00	Pk
Horizontal	3885	39.62	7.1	37.24	43.5	40.46	54	-13.54	AV
Horizontal	10480	48.66	8.46	38.57	44.5	51.19	68.2	-17.01	Pk
Horizontal	15720	58.50	10.12	38.38	44.1	62.90	74	-11.10	Pk
Horizontal	15720	36.40	10.12	38.38	44.1	40.80	54	-13.20	AV

Note: "802.11n20 MIMO" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

All modes have been tested, just the 802.11n20 MIMO worst mode has been recorded in the report.

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.8G)		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2806	63.61	5.94	35.40	44.00	60.95	74.00	-13.05	Pk
Vertical	2806	41.69	5.94	35.40	44.00	39.03	54.00	-14.97	AV
Vertical	11490	58.15	8.46	39.75	44.50	61.86	74.00	-12.14	Pk
Vertical	11490	43.63	8.46	39.75	44.50	47.34	54.00	-6.66	AV
Vertical	17235	51.15	10.12	38.80	44.10	55.97	68.20	-12.23	Pk
Horizontal	2911	58.86	5.94	35.18	44.00	55.98	68.20	-12.22	Pk
Horizontal	11490	62.49	8.46	38.71	44.50	65.16	74.00	-8.84	Pk
Horizontal	11490	36.88	8.46	38.71	44.50	39.55	54.00	-14.45	AV
Horizontal	17235	50.63	10.12	38.38	44.10	55.03	68.20	-13.17	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	3763	61.91	6.48	36.35	44.05	60.69	74.00	-13.31	Pk
Vertical	3763	41.92	6.48	36.35	44.05	40.70	54.00	-13.30	AV
Vertical	11570	62.04	8.47	37.88	44.51	63.88	74.00	-10.12	Pk
Vertical	11570	42.36	8.47	37.88	44.51	44.20	54.00	-9.80	AV
Vertical	17355	54.62	10.12	38.8	44.10	59.44	68.20	-8.76	Pk
Horizontal	3561	51.85	6.48	36.37	44.05	50.65	68.20	-17.55	Pk
Horizontal	11570	60.04	8.47	38.64	44.50	62.65	74.00	-11.35	Pk
Horizontal	11570	38.79	8.47	38.64	44.50	41.40	54.00	-12.60	AV
Horizontal	17355	52.35	10.12	38.38	44.10	56.75	68.20	-11.45	Pk

High Channel (5825 MHz)-Above 1G									
Vertical	3907	56.26	7.10	37.24	43.50	57.10	74.00	-16.90	Pk
Vertical	3907	41.18	7.10	37.24	43.50	42.02	54.00	-11.98	AV
Vertical	11650	59.67	8.46	37.68	44.50	61.31	74.00	-12.69	Pk
Vertical	11650	43.15	8.46	37.68	44.50	44.79	54.00	-9.21	AV
Vertical	17475	52.63	10.12	38.8	44.10	57.45	68.20	-10.75	Pk
Horizontal	3912	56.85	7.10	37.24	43.50	57.69	74.00	-16.31	Pk
Horizontal	3912	38.08	7.10	37.24	43.50	38.92	54.00	-15.08	AV
Horizontal	11650	58.06	8.46	38.57	44.50	60.59	74.00	-13.41	Pk
Horizontal	11650	41.02	8.46	38.57	44.50	43.55	54.00	-10.45	AV
Horizontal	17475	49.75	10.12	38.38	44.10	54.15	68.20	-14.05	Pk

Note: "802.11n20 MIMO" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


All modes have been tested, just the 802.11n20 MIMO worst mode has been recorded in the report.

3.2.9 TEST RESULTS (18GHZ-40GHZ)

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.2G and 5.8G)		

All modes have been tested, just the 802.11n20 MIMO worst mode has been recorded in the report.


Low Channel (5180 MHz)-Above 1G
Horizontal

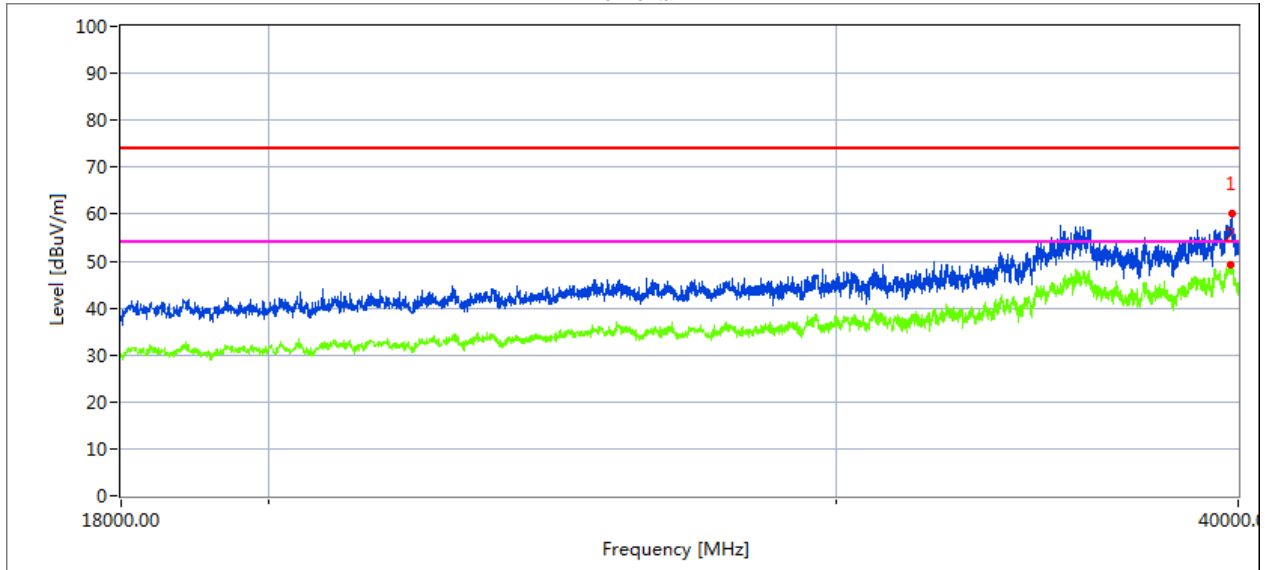

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39782.654	33.19	20.09	44.07	43.48	53.87	68.20	14.33	Peak

Vertical

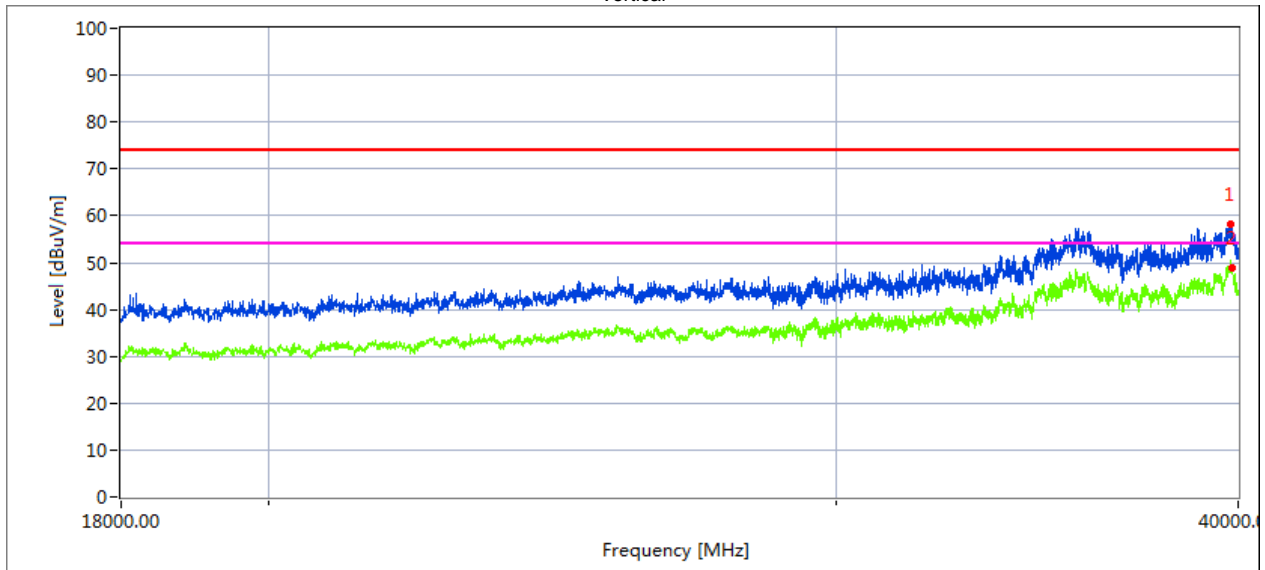


Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39773.700	36.31	19.11	42.73	44.61	53.54	68.20	14.66	Peak

High Channel (5240 MHz)-Above 1G


Horizontal

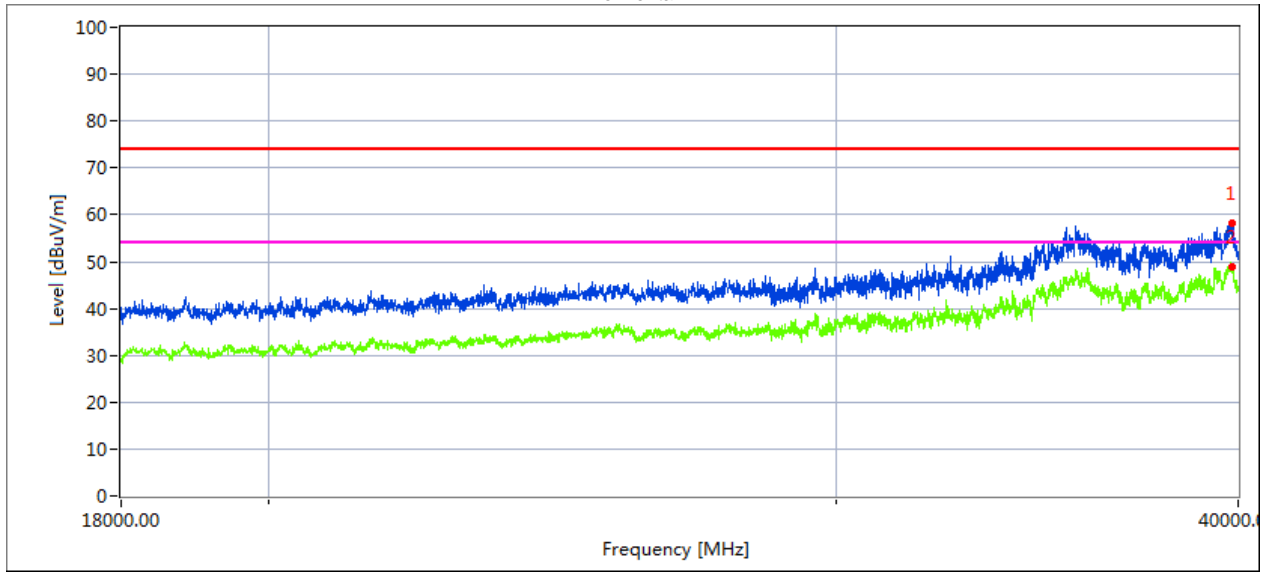

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39831.928	32.74	20.09	44.07	43.48	53.42	68.20	14.78	Peak

Vertical

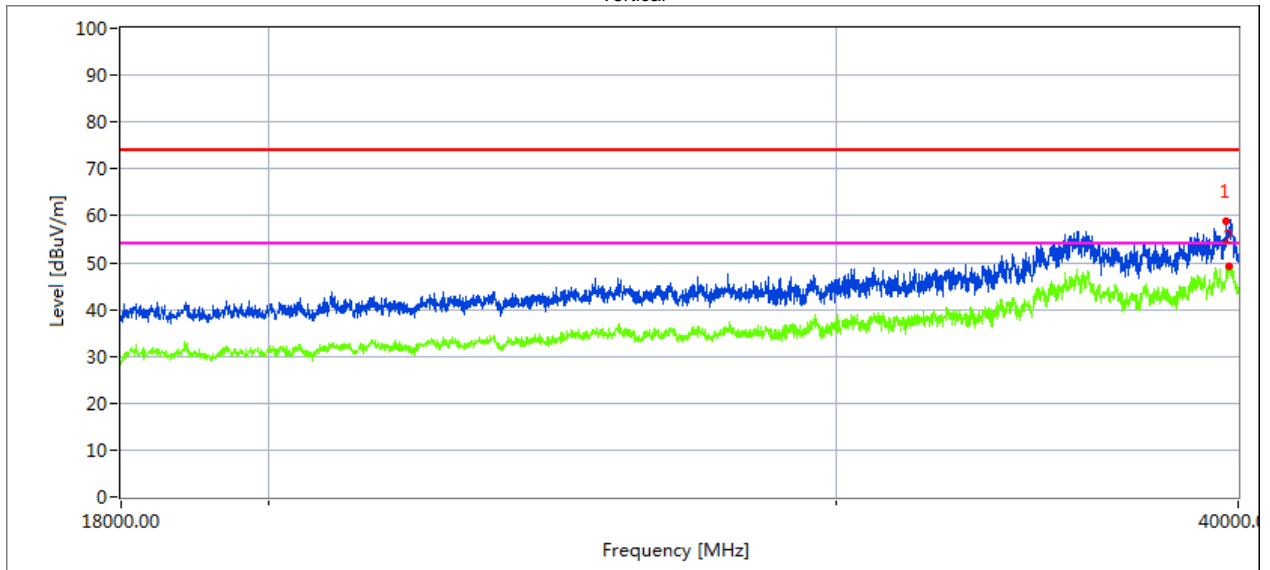


Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39666.004	31.49	20.09	44.07	43.48	52.17	68.20	16.03	Peak

Low Channel (5745 MHz)-Above 1G


Horizontal

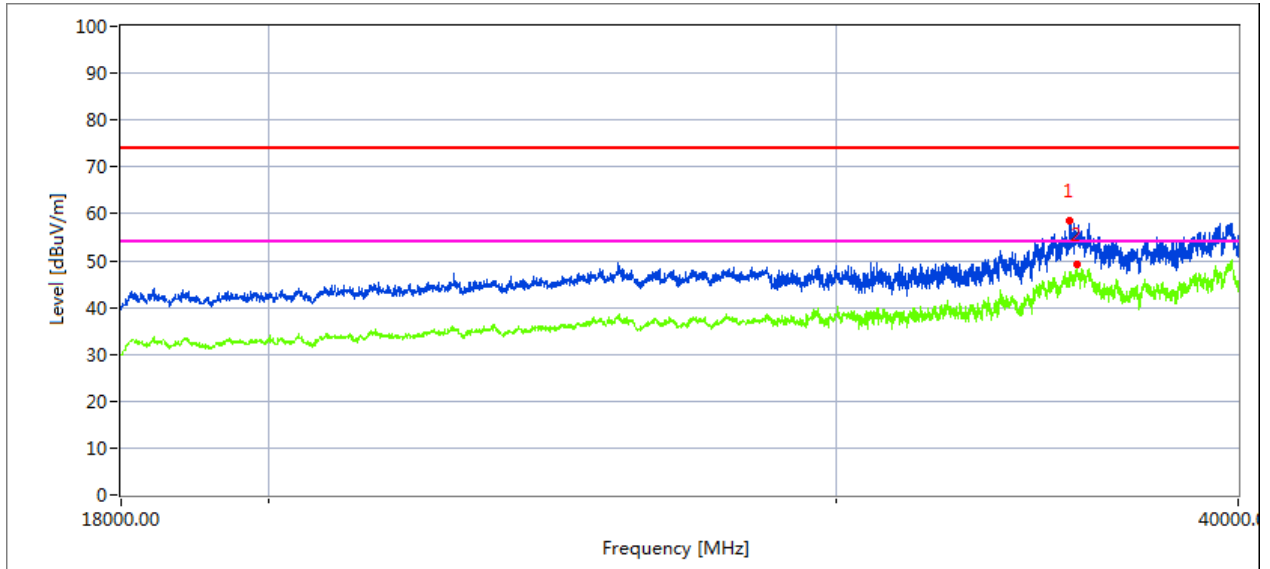

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
35459.312	30.79	20.09	44.16	43.48	51.56	68.20	16.64	Peak

Vertical

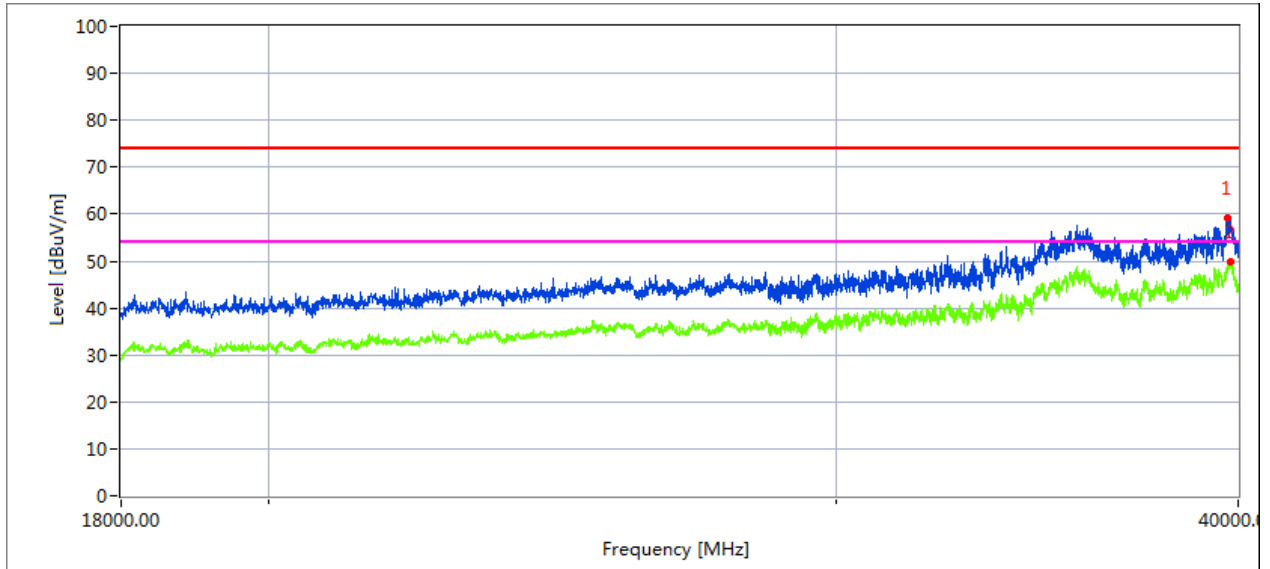


Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39716.063	32.58	20.06	44.07	43.21	53.50	68.20	14.70	Peak

High Channel (5825 MHz)-Above 1G


Horizontal

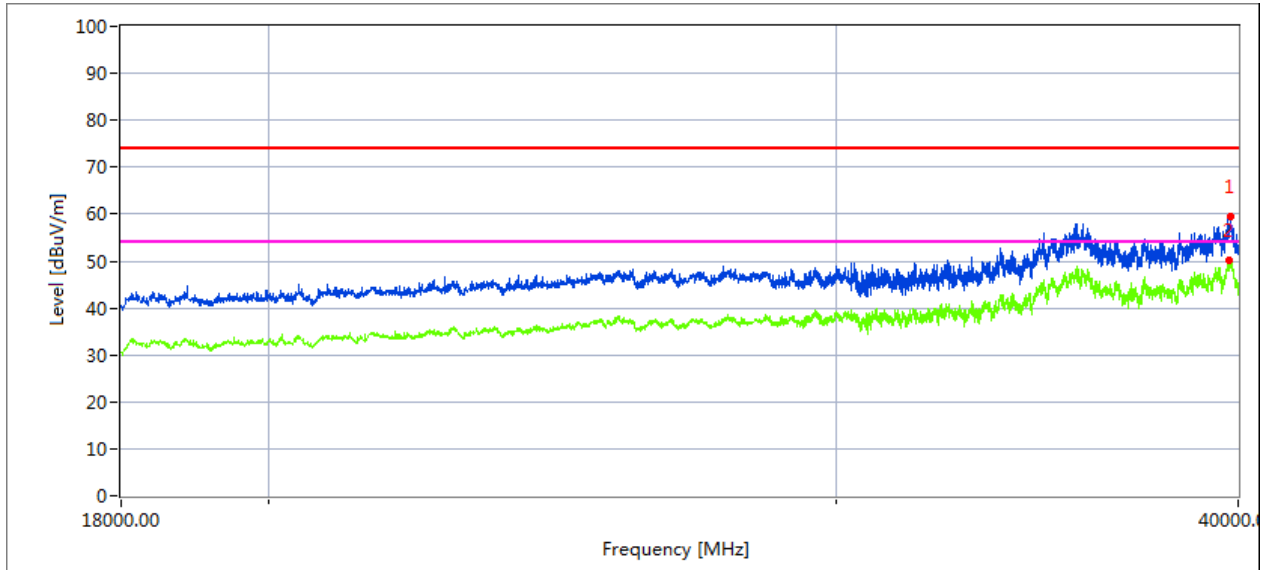

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39765.193	36.40	19.11	42.63	43.48	54.66	68.20	13.54	Peak

Vertical

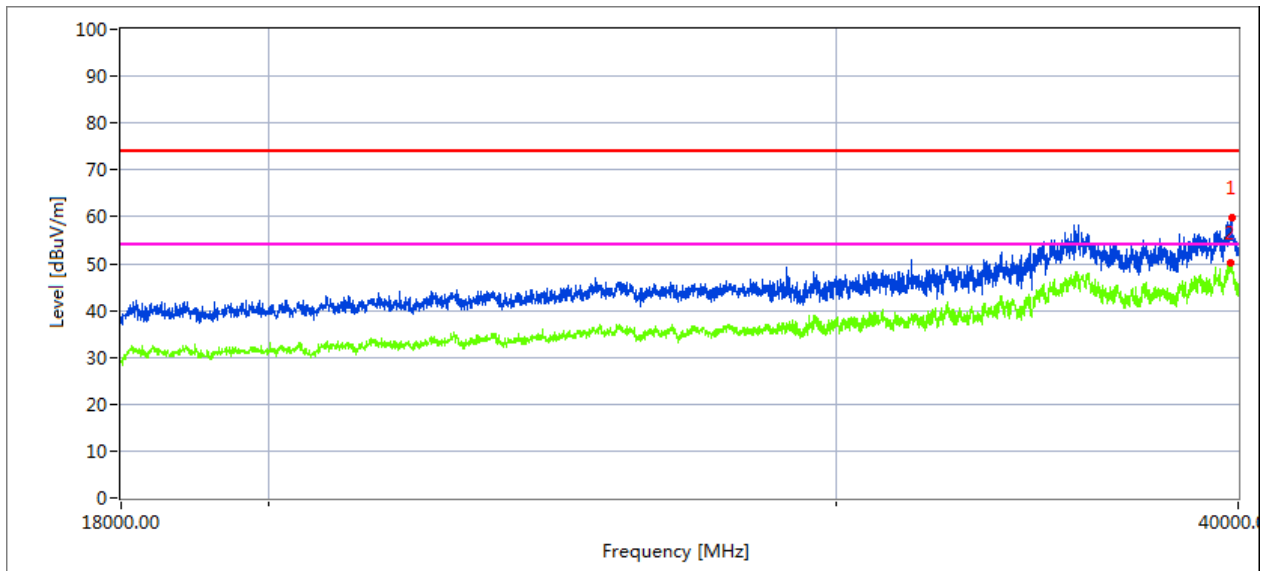

Measurement Result:

Frequency MHz	Meter Reading dBuV	Cable loss dB	Antenna Factor dB/m	Preamp Factor dB	Emission Level dBuV/m	Limits dBuV/m	Margin dB	Detector Type
39815.275	32.99	20.10	44.10	43.22	53.97	68.20	14.23	Peak

3.2.10 SPURIOUS EMISSION IN RESTRICTED BAND 4.5GHZ~5.150 GHZ& 5.350GHZ~5460GHZ

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.2G)		

All modes have been tested, just the 802.11n20 MIMO mode is the worst mode has been recorded in the report.

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
5.2G WIFI-802.11n20 MIMO Mode									
4500	61.89	5.20	35.60	44.20	58.49	74	-15.51	Pk	Horizontal
4500	46.45	5.20	35.60	44.20	43.05	54	-10.95	AV	Horizontal
4500	62.77	5.20	35.60	44.20	59.37	74	-14.63	Pk	Horizontal
4500	43.45	5.20	35.60	44.20	40.05	54	-13.95	AV	Horizontal
5150	58.01	5.36	35.66	44.22	54.81	74	-19.19	Pk	Horizontal
5150	39.68	5.36	35.66	44.22	36.48	54	-17.52	AV	Horizontal
5150	58.36	5.36	35.66	44.22	55.16	74	-18.84	Pk	Vertical
5150	40.54	5.36	35.66	44.22	37.34	54	-16.66	AV	Vertical
5350	58.62	5.68	35.68	44.22	55.76	74	-18.24	Pk	Vertical
5350	37.94	5.68	35.68	44.22	35.08	54	-18.92	AV	Vertical
5350	56.21	5.68	35.68	44.22	53.35	74	-20.65	Pk	Horizontal
5350	37.40	5.68	35.68	44.22	34.54	54	-19.46	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20 MIMO " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3.3 POWER SPECTRAL DENSITY TEST

3.3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3.3 DEVIATION FROM STANDARD

No deviation.

3.3.4 TEST SETUP



3.3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULTS

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4		

Refer to section 2.2 of this report:

For 5.2G band, 802.11n/ac has MIMO mode. Directional gain=8.01 dBi
 8.01 dBi > 6.0 dBi, so MIMO power spectral density limit=17-(8.01-6)=14.99dBm / 1MHz;
 For 5.8G band, 802.11n/ac has MIMO mode. Directional gain=8.01 dBi
 8.01 dBi > 6.0 dBi, so MIMO power spectral density limit=30-(8.01-6)=27.99dBm / 500kHz;

Test data reference attachment.

3.4 26DB & 99% EMISSION BANDWIDTH

3.4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

3.4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW ≥ 3 · RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

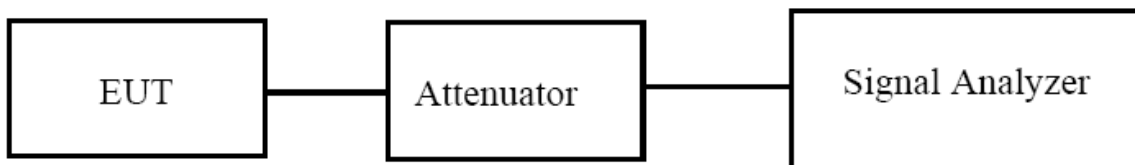

3.4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.4 TEST RESULTS

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4		

Test data reference attachment.

3.5 MINIMUM 6 DB BANDWIDTH

3.5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.5.3 DEVIATION FROM STANDARD

No deviation.

3.5.4 TEST SETUP

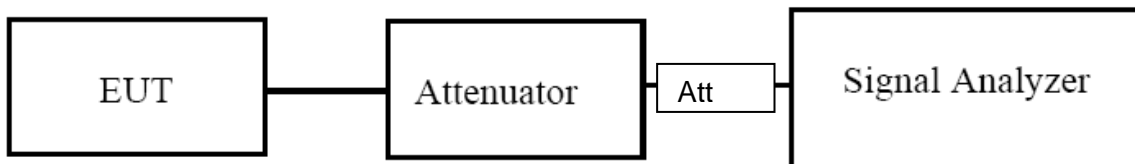

3.5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.5.6 TEST RESULTS

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.8G)		

Test data reference attachment.

3.6 MAXIMUM CONDUCTED OUTPUT POWER

3.6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

3.6.2 TEST PROCEDURE

· Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

3.6.3 DEVIATION FROM STANDARD

No deviation.

3.6.4 TEST SETUP

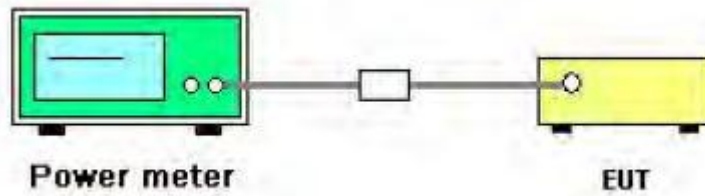

3.6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6.6 TEST RESULTS

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4		

Refer to section 2.2 of this report:

For 5.2G band. Directional gain=5dBi; 6.0dBi > 5dBi, so conducted power limit= 30.00dBm.

For 5.8G band. Directional gain=5dBi; 6.0dBi > 5dBi, so conducted power limit= 30.00dBm.

Test data reference attachment.

3.7 OUT OF BAND EMISSIONS

3.7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

3.7.3 DEVIATION FROM STANDARD

No deviation.

3.7.4 TEST SETUP

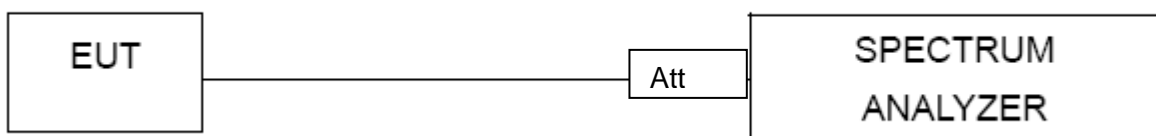

3.7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.7.6 TEST RESULTS

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V

Test data reference attachment.

3.8 SPURIOUS RF CONDUCTED EMISSIONS

3.8.1 CONFORMANCE LIMIT

According to FCC §15.407(b)(1) (2) (3) (4)

3.8.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

3.8.3 TEST SETUP

Please refer to Section 6.1 of this test report.

3.8.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1000kHz and VBW= 3000KHz to measure the peak field strength , and measure frequency range from 30MHz to 40GHz.

3.8.5 TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

3.9 FREQUENCY STABILITY MEASUREMENT


3.9.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6 \text{ ppm}$.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

3.9.3 TEST SETUP LAYOUT

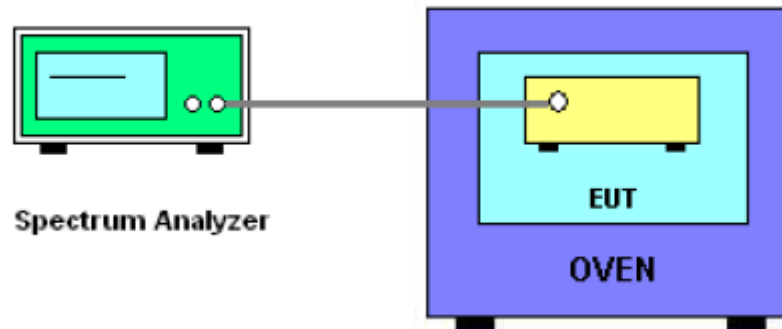

3.9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

3.9.5 TEST RESULTS

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.2G)		

ANT 1: All modes have been tested, just the 802.11a mode is the worst mode has been recorded in the report.

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5180.0612	5180	0.0612	-11.8131
		V max (V)	27.6	5180.0107	5180	0.0107	-2.0599
		V min (V)	20.4	5180.0438	5180	0.0438	-8.4602
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5180.0608	5180	0.0608	-11.7280
		T (°C)	-10	5180.0335	5180	0.0335	-6.4725
		T (°C)	0	5180.0657	5180	0.0657	-12.6825
		T (°C)	10	5180.0658	5180	0.0658	-12.7084
		T (°C)	20	5180.0228	5180	0.0228	-4.4039
		T (°C)	30	5180.0545	5180	0.0545	-10.5135
		T (°C)	40	5180.0287	5180	0.0287	-5.5448
		T (°C)	50	5180.0589	5180	0.0589	-11.3763
		T (°C)	60	5180.0046	5180	0.0046	-0.8926
		T (°C)	70	5180.0318	5180	0.0318	-6.1334
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5200.0610	5200	0.0610	-11.7312
		V max (V)	27.6	5200.0582	5200	0.0582	-11.1957
		V min (V)	20.4	5200.0649	5200	0.0649	-12.4745
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5200.0588	5200	0.0588	-11.3089
		T (°C)	-10	5200.0072	5200	0.0072	-1.3826
		T (°C)	0	5200.0008	5200	0.0008	-0.1444
		T (°C)	10	5200.0149	5200	0.0149	-2.8683
		T (°C)	20	5200.0231	5200	0.0231	-4.4359
		T (°C)	30	5200.0569	5200	0.0569	-10.9350
		T (°C)	40	5200.0420	5200	0.0420	-8.0825
		T (°C)	50	5200.0721	5200	0.0721	-13.8685
		T (°C)	60	5200.0444	5200	0.0444	-8.5377
		T (°C)	70	5200.0783	5200	0.0783	-15.0558
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5240.0633	5240	0.0633	-12.0880
		V max (V)	27.6	5240.0735	5240	0.0735	-14.0345
		V min (V)	20.4	5240.0385	5240	0.0385	-7.3510
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5240.0039	5240	0.0039	-0.7356
		T (°C)	-10	5240.0538	5240	0.0538	-10.2588
		T (°C)	0	5240.0737	5240	0.0737	-14.0706
		T (°C)	10	5240.0361	5240	0.0361	-6.8851
		T (°C)	20	5240.0783	5240	0.0783	-14.9478
		T (°C)	30	5240.0099	5240	0.0099	-1.8914
		T (°C)	40	5240.0466	5240	0.0466	-8.8839
		T (°C)	50	5240.0630	5240	0.0630	-12.0276
		T (°C)	60	5240.0641	5240	0.0641	-12.2275
		T (°C)	70	5240.0625	5240	0.0625	-11.9227
Limits				Within 5150-5250MHz			
Result				Complies			

ANT 2: All modes have been tested, just the 802.11a mode is the worst mode has been recorded in the report.

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5180.0196	5180	0.0196	-3.7822
		V max (V)	27.6	5180.0497	5180	0.0497	-9.6015
		V min (V)	20.4	5180.0477	5180	0.0477	-9.2048
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5180.0007	5180	0.0007	-0.1300
		T (°C)	-10	5180.0087	5180	0.0087	-1.6800
		T (°C)	0	5180.0646	5180	0.0646	-12.4715
		T (°C)	10	5180.0063	5180	0.0063	-1.2080
		T (°C)	20	5180.0340	5180	0.0340	-6.5681
		T (°C)	30	5180.0085	5180	0.0085	-1.6472
		T (°C)	40	5180.0288	5180	0.0288	-5.5542
		T (°C)	50	5180.0194	5180	0.0194	-3.7429
		T (°C)	60	5180.0051	5180	0.0051	-0.9793
		T (°C)	70	5180.0020	5180	0.0020	-0.3896
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5200.0703	5200	0.0703	-13.5284
		V max (V)	27.6	5200.0710	5200	0.0710	-13.6597
		V min (V)	20.4	5200.0237	5200	0.0237	-4.5483
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5200.0157	5200	0.0157	-3.0241
		T (°C)	-10	5200.0440	5200	0.0440	-8.4573
		T (°C)	0	5200.0545	5200	0.0545	-10.4778
		T (°C)	10	5200.0471	5200	0.0471	-9.0580
		T (°C)	20	5200.0225	5200	0.0225	-4.3329
		T (°C)	30	5200.0551	5200	0.0551	-10.5959
		T (°C)	40	5200.0552	5200	0.0552	-10.6068
		T (°C)	50	5200.0524	5200	0.0524	-10.0758
		T (°C)	60	5200.0058	5200	0.0058	-1.1221
		T (°C)	70	5200.0426	5200	0.0426	-8.1833
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5240.0256	5240	0.0256	-4.8923
		V max (V)	27.6	5240.0508	5240	0.0508	-9.6940
		V min (V)	20.4	5240.0171	5240	0.0171	-3.2726
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5240.0665	5240	0.0665	-12.6884
		T (°C)	-10	5240.0651	5240	0.0651	-12.4300
		T (°C)	0	5240.0742	5240	0.0742	-14.1649
		T (°C)	10	5240.0722	5240	0.0722	-13.7783
		T (°C)	20	5240.0379	5240	0.0379	-7.2278
		T (°C)	30	5240.0224	5240	0.0224	-4.2807
		T (°C)	40	5240.0165	5240	0.0165	-3.1536
		T (°C)	50	5240.0258	5240	0.0258	-4.9195
		T (°C)	60	5240.0106	5240	0.0106	-2.0288
		T (°C)	70	5240.0351	5240	0.0351	-6.6994
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Celerway Stratus	Model Name. :	Stratus CWY-M5.2E5L2W3
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 24V
Test Mode :	Mode 2/3/4 (5.8G)		

ANT 1: All modes have been tested, just the 802.11a mode is the worst mode has been recorded in the report.

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5745.0413	5745	0.04134	-7.1956
		V max (V)	27.6	5745.0458	5745	0.04581	-7.9744
		V min (V)	20.4	5745.0655	5745	0.06551	-11.4025
Limits				Within 5745-5825MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5745.0224	5745	0.02237	-3.8940
		T (°C)	-10	5745.0336	5745	0.03365	-5.8573
		T (°C)	0	5745.0699	5745	0.06994	-12.1737
		T (°C)	10	5745.0481	5745	0.04807	-8.3669
		T (°C)	20	5745.0139	5745	0.01387	-2.4151
		T (°C)	30	5745.0462	5745	0.04615	-8.0332
		T (°C)	40	5745.0242	5745	0.02424	-4.2197
		T (°C)	50	5745.0556	5745	0.05555	-9.6699
		T (°C)	60	5745.0282	5745	0.02815	-4.9002
		T (°C)	70	5745.0260	5745	0.02595	-4.5174
Limits				Within 5745-5825MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5785.0245	5785	0.02448	-4.2308
		V max (V)	27.6	5785.0735	5785	0.07347	-12.7003
		V min (V)	20.4	5785.0497	5785	0.04974	-8.5988
Limits				Within 5745-5825MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5785.0190	5785	0.01903	-3.2898
		T (°C)	-10	5785.0218	5785	0.02184	-3.7748
		T (°C)	0	5785.0528	5785	0.05282	-9.1307
		T (°C)	10	5785.0733	5785	0.07333	-12.6752
		T (°C)	20	5785.0500	5785	0.05003	-8.6475
		T (°C)	30	5785.0754	5785	0.07541	-13.0361
		T (°C)	40	5785.0741	5785	0.07411	-12.8103
		T (°C)	50	5785.0162	5785	0.01621	-2.8014
		T (°C)	60	5785.0039	5785	0.00393	-0.6787
		T (°C)	70	5785.0561	5785	0.05611	-9.6991
Limits				Within 5745-5825MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5825.0700	5825	0.06996	-12.0095
		V max (V)	27.6	5825.0477	5825	0.04774	-8.1949
		V min (V)	20.4	5825.0471	5825	0.04706	-8.0793
Limits				Within 5745-5825MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5825.0566	5825	0.05665	-9.7248
		T (°C)	-10	5825.0218	5825	0.02179	-3.7400
		T (°C)	0	5825.0703	5825	0.07033	-12.0739
		T (°C)	10	5825.0063	5825	0.00626	-1.0739
		T (°C)	20	5825.0363	5825	0.03629	-6.2295
		T (°C)	30	5825.0768	5825	0.07676	-13.1771
		T (°C)	40	5825.0336	5825	0.03364	-5.7758
		T (°C)	50	5825.0544	5825	0.05441	-9.3402
		T (°C)	60	5825.0562	5825	0.05617	-9.6435
		T (°C)	70	5825.0633	5825	0.06328	-10.8641
Limits				Within 5745-5825MHz			
Result				Complies			

ANT 2: All modes have been tested, just the 802.11a mode is the worst mode has been recorded in the report.

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5745.0783	5745	0.07832	-13.6325
		V max (V)	27.6	5745.0348	5745	0.03482	-6.0603
		V min (V)	20.4	5745.0413	5745	0.04133	-7.1947
Limits				Within 5745-5825MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5745.0214	5745	0.02140	-3.7251
		T (°C)	-10	5745.0144	5745	0.01436	-2.5001
		T (°C)	0	5745.0306	5745	0.03064	-5.3339
		T (°C)	10	5745.0461	5745	0.04614	-8.0317
		T (°C)	20	5745.0418	5745	0.04184	-7.2837
		T (°C)	30	5745.0162	5745	0.01625	-2.8282
		T (°C)	40	5745.0744	5745	0.07436	-12.9434
		T (°C)	50	5745.0501	5745	0.05012	-8.7242
		T (°C)	60	5745.0206	5745	0.02061	-3.5879
		T (°C)	70	5745.0229	5745	0.02295	-3.9944
Limits				Within 5745-5825MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5785.0072	5785	0.00721	-1.2462
		V max (V)	27.6	5785.0268	5785	0.02682	-4.6367
		V min (V)	20.4	5785.0070	5785	0.00699	-1.2080
Limits				Within 5745-5825MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5785.0296	5785	0.02965	-5.1247
		T (°C)	-10	5785.0413	5785	0.04132	-7.1433
		T (°C)	0	5785.0060	5785	0.00596	-1.0306
		T (°C)	10	5785.0549	5785	0.05486	-9.4829
		T (°C)	20	5785.0787	5785	0.07866	-13.5981
		T (°C)	30	5785.0508	5785	0.05077	-8.7758
		T (°C)	40	5785.0743	5785	0.07434	-12.8503
		T (°C)	50	5785.0661	5785	0.06609	-11.4247
		T (°C)	60	5785.0425	5785	0.04245	-7.3387
		T (°C)	70	5785.0405	5785	0.04050	-7.0002
Limits				Within 5745-5825MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	24.0	5825.0052	5825	0.00516	-0.8864
		V max (V)	27.6	5825.0439	5825	0.04391	-7.5373
		V min (V)	20.4	5825.0304	5825	0.03039	-5.2174
Limits				Within 5745-5825MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	24	T (°C)	-20	5825.0028	5825	0.00284	-0.4874
		T (°C)	-10	5825.0440	5825	0.04404	-7.5599
		T (°C)	0	5825.0133	5825	0.01330	-2.2833
		T (°C)	10	5825.0739	5825	0.07388	-12.6826
		T (°C)	20	5825.0316	5825	0.03156	-5.4179
		T (°C)	30	5825.0216	5825	0.02161	-3.7091
		T (°C)	40	5825.0029	5825	0.00290	-0.4987
		T (°C)	50	5825.0056	5825	0.00560	-0.9620
		T (°C)	60	5825.0566	5825	0.05662	-9.7200
		T (°C)	70	5825.0515	5825	0.05147	-8.8363
Limits				Within 5745-5825MHz			
Result				Complies			

4. ANTENNA REQUIREMENT

4.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.2 EUT ANTENNA

The EUT antenna is permanent attached reversed-SMA antenna connector. It comply with the standard requirement.

END OF REPORT