

FCC RADIO TEST REPORT

FCC ID: 2AW69-CWYXM

Product: Celerway Xm2

Trade Mark: Celerway Xm2

Model No.: CWY-M5.4E1C2W1B

Family Model: CWY-M5.4E1C1W1B

Report No.: S24031901405001

Issue Date: Dec. 13, 2024

Prepared for

Celerway Communication AS

Lilleakerveien 2B, 0283 Oslo, Norway

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	9
6	SETUP OF EQUIPMENT UNDER TEST	11
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	11
6.2	SUPPORT EQUIPMENT.....	12
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	13
7	TEST REQUIREMENTS.....	15
7.1	CONDUCTED EMISSIONS TEST	15
7.2	RADIATED SPURIOUS EMISSION	20
7.3	6DB BANDWIDTH.....	40
7.4	DUTY CYCLE.....	42
7.5	MAXIMUM OUTPUT POWER.....	43
7.6	POWER SPECTRAL DENSITY	45
7.7	CONDUCTED BAND EDGE MEASUREMENT.....	47
7.8	SPURIOUS RF CONDUCTED EMISSIONS.....	49
7.9	ANTENNA APPLICATION	50
8	TEST RESULTS.....	51
8.1	2.4G WIFI SISO	51
8.2	2.4G WIFI MIMO	190

1 TEST RESULT CERTIFICATION

Applicant's name	Celerway Communication AS
Address	Lilleakerveien 2B, 0283 Oslo, Norway
Manufacturer's Name	Celerway Communication AS
Address	Lilleakerveien 2B, 0283 Oslo, Norway
Product description	
Product name	Celerway Xm2
Trade Mark	Celerway Xm2
Model and/or type reference	CWY-M5.4E1C2W1B
Family Model	CWY-M5.4E1C1W1B
Test sample number	S240319014001
Date (s) of performance of tests ...	Jul. 01, 2024 ~ Dec. 13, 2024

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J	
FCC 47 CFR Part 15, Subpart C	
ANSI C63.10-2020	Complied
KDB 558074 D01 15.247 Meas Guidance v05r02	

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Prepared : Mary Hu
By : Mary Hu
(Project Engineer)

Reviewed : Aaron Cheng
By : Aaron Cheng
(Supervisor)

Approved : Alex Li
By : Alex Li
(Manager)

2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C

Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Maximum Output Power	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab.	: The Certificate Registration Number is L5516.
IC-Registration	: The Certificate Registration Number is 9270A. CAB identifier:CN0074
FCC- Accredited	: Test Firm Registration Number: 463705. Designation Number: CN1184
A2LA-Lab.	: The Certificate Registration Number is 4298.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
Name of Firm	: Shenzhen NTEK Testing Technology Co., Ltd.
Site Location	: No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	3.6dB
2	RF power, conducted	0.16dB
3	Spurious emissions, conducted	0.21dB
4	All emissions, radiated(30MHz~1GHz)	5.2dB
5	All emissions, radiated(1GHz~6GHz)	5.1dB
6	All emissions, radiated(>6GHz)	5.1dB
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	All emissions, radiated(9KHz~30MHz)	5.2dB

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Celerway Xm2
Trade Mark	Celerway Xm2
FCC ID	2AW69-CWYXM
Model No.	CWY-M5.4E1C2W1B
Family Model	CWY-M5.4E1C1W1B
Model Difference	All models have the same circuitry, where the CWY-M5.4E1C2W1B having two NR/LTE/WCDMA modules installed and the CWY-M5.4E1C1W1B having only one.
Operating Frequency	2412-2462MHz for 802.11b/g/n(HT20)/ax(HE20); 2422-2452MHz for 802.11n(HT40)/ax(HE40);
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n; OFDMA with BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM for 802.11ax;
Number of Channels	11 channels for 802.11b/g/n20/ax20; 7 channels for 802.11n40/ax40;
Antenna Type	Antenna 1: LDS Antenna; Antenna 2: LDS Antenna
Antenna Gain	Antenna 1: 0.46dBi; Antenna 2: 0.22dBi
Smart system	<input checked="" type="checkbox"/> SISO for 802.11b/g/n20/n40/ax20/ax40 <input checked="" type="checkbox"/> MIMO for 802.11n20/n40/ax20/ax40
Adapter	MODEL: XYY-PD45W INPUT: 100-240V ~ 50/60Hz 1A OUTPUT: TYPE-C 5V---3A / 9V---3A 12V---3A / 15V---3A / 20V---2.25A/QC3.0
Battery(battery base)	DC 11.4V, 4150mAh, 47.31Wh
Rating(s)	DC 5V/9V/12V/15V/20V from Adapter
Hardware Version	1.0
Firmware version	1.0
Software Version	1.0

Note: 1. Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

2. In ax mode, RU allocation is not supported and it is a full carrier. Only the HE SU PPDU format operational mode.

For 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as following form:

Mode	Tx/Rx
802.11b/g/n/ax	1TX, 1RX
802.11n/ax(20MHz,40MHz)	1TX, 1RX/2TX, 2RX

For 2.4GHz mode, Antenna 1,2 are simultaneously transmitting, and antenna gains are not equal. All transmit signals are completely uncorrelated, then Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10})/N_{ANT}]$ dBi = 0.34 dBi

Note: G1 means antenna gain for ANT 1 in dBi.

G2 means antenna gain for ANT 2 in dBi.

N_{ANT} means the number of Antennas.

Revision History

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20) /ax20: MCS0; 802.11n (HT40)/ ax40: MCS0) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n/ax (HT20/HT40):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note: $fc = 2412\text{MHz} + (k-1) \times 5\text{MHz}$ k=1 to 11

Test Mode:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	11ax20	MCS0	6	1+2
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1,2
	11g/BPSK	6 Mbps	1/6/11	1,2
	11n HT20/ax20	MCS0	1/6/11	1,2,1+2
	11n HT40/ax40	MCS0	3/6/9	1,2,1+2
Power Spectral Density				
	11b/CCK	1 Mbps	1/6/11	1,2
	11g/BPSK	6 Mbps	1/6/11	1,2
	11n HT20/ax20	MCS0	1/6/11	1,2,1+2
	11n HT40/ax40	MCS0	3/6/9	1,2,1+2
6dB Spectrum Bandwidth				
	11b/CCK	1 Mbps	1/6/11	1,2
	11g/BPSK	6 Mbps	1/6/11	1,2
	11n HT20/ax20	MCS0	1/6/11	1,2
Radiated Emissions Below 1GHz	11ax20	MCS0	6	1+2
Radiated Emissions Above 1GHz				
	11b/CCK	1 Mbps	1/6/11	1,2
	11g/BPSK	6 Mbps	1/6/11	1,2
	11n HT20/ax20	MCS0	1/6/11	1,2,1+2
Band Edge Emissions				
	11b/CCK	1 Mbps	1/6/11	1,2
	11g/BPSK	6 Mbps	1/6/11	1,2
	11n HT20/ax20	MCS0	1/6/11	1,2,1+2
	11n HT40/ax40	MCS0	3/6/9	1,2,1+2

6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode



For Radiated Test Cases



For Conducted Test Cases



Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Celerway Xm2	CWY-M5.4E1C2W1B	N/A	EUT
AE-2	Adapter	XYY-PD45W	N/A	Peripherals
AE-3	Notebook	N/A	N/A	

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	NO	1.0m
C-2	Type-C	YES	YES	1.0m
C-3	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.04.26	2025.04.25	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024.04.25	2025.04.24	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2024.04.25	2025.04.24	1 year
4	Test Receiver	R&S	ESPI7	101318	2024.04.26	2025.04.25	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12	2025.05.11	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835 SE	980246	2024.04.25	2025.04.24	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519 B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	DARE	RPR3006W	15I00041SN 084	2024.04.25	2025.04.24	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2023.05.06	2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2023.05.06	2026.05.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
17	Power Meter	MWRFtest	MW100-PSB	N/A	2024.04.25	2025.04.24	1 year
18	Power Meter	MWRFtest	MW100-PSB	N/A	2024.04.25	2025.04.24	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2024.04.26	2025.04.25	1 year
2	LISN	R&S	ENV216	101313	2024.04.25	2025.04.24	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2024.04.25	2025.04.24	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	Radiated Test
3	raditeq	RadiMation	2023.1.3	Radiated Test
4	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency


2. The lower limit shall apply at the transition frequencies

3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

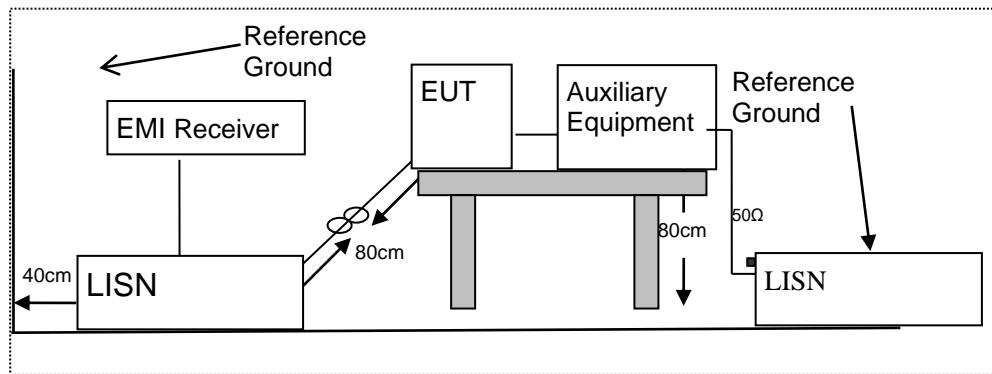

7.1.5 Test Procedure

According to the requirements in Section 6.2 of ANSI C63.10-2020 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


7.1.6 Test Results

EUT:	Celerway Xm2	Model Name :	CWY-M5.4E1C2W1B
Temperature:	22 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	802.11ax(HE20) M CH MIMO
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Remark
0.1620	51.89	9.95	61.84	65.36	-3.52	QP
0.1620	35.98	9.95	45.93	55.36	-9.43	AVG
0.2819	42.43	10.20	52.63	60.76	-8.13	QP
0.2819	35.42	10.20	45.62	50.76	-5.14	AVG
0.3339	39.88	10.30	50.18	59.35	-9.17	QP
0.3339	33.70	10.30	44.00	49.35	-5.35	AVG
0.3740	41.20	10.38	51.58	58.41	-6.83	QP
0.3740	33.61	10.38	43.99	48.41	-4.42	AVG
0.7060	34.66	11.07	45.73	56.00	-10.27	QP
0.7060	27.83	11.07	38.90	46.00	-7.10	AVG
1.1220	31.16	11.90	43.06	56.00	-12.94	QP
1.1220	24.91	11.90	36.81	46.00	-9.19	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

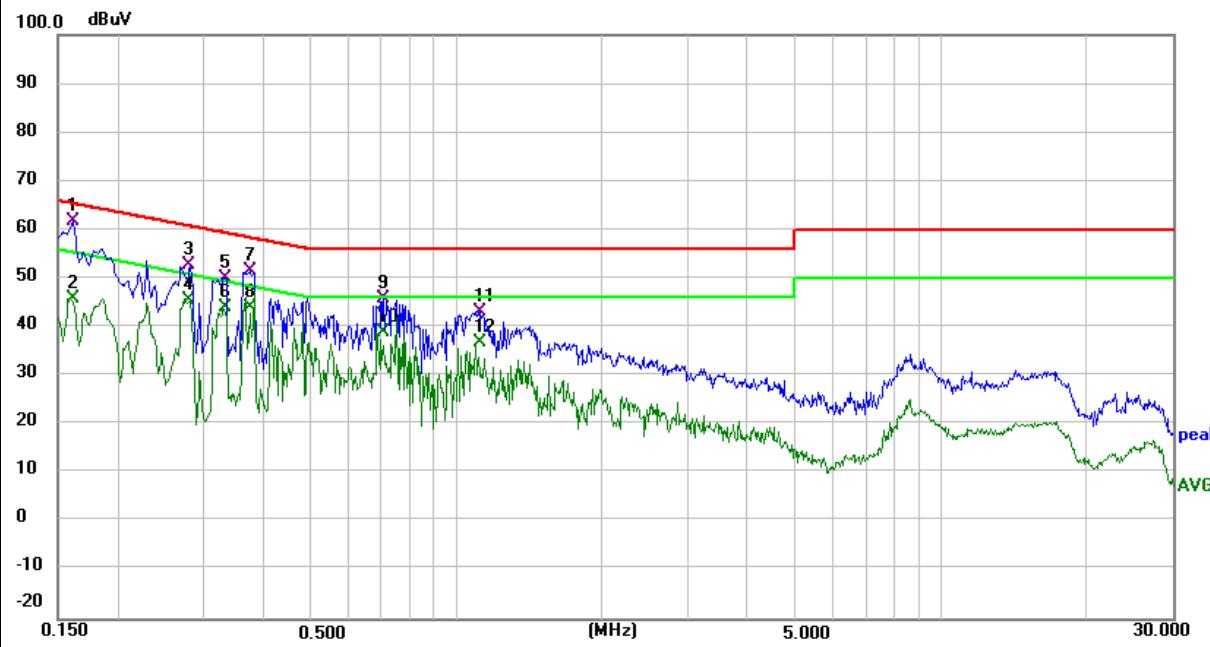


EUT:	Celerway Xm2	Model Name :	CWY-M5.4E1C2W1B
Temperature:	22°C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	802.11ax(HE20) M CH MIMO
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Remark
0.1940	48.81	10.01	58.82	63.86	-5.04	QP
0.1940	38.24	10.01	48.25	53.86	-5.61	AVG
0.2420	44.45	10.12	54.57	62.03	-7.46	QP
0.2420	36.98	10.12	47.10	52.03	-4.93	AVG
0.3379	40.51	10.32	50.83	59.25	-8.42	QP
0.3379	35.40	10.32	45.72	49.25	-3.53	AVG
0.4780	36.26	10.61	46.87	56.37	-9.50	QP
0.4780	29.19	10.61	39.80	46.37	-6.57	AVG
0.7340	34.83	11.11	45.94	56.00	-10.06	QP
0.7340	26.91	11.11	38.02	46.00	-7.98	AVG
1.0859	30.14	11.84	41.98	56.00	-14.02	QP
1.0859	22.15	11.84	33.99	46.00	-12.01	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

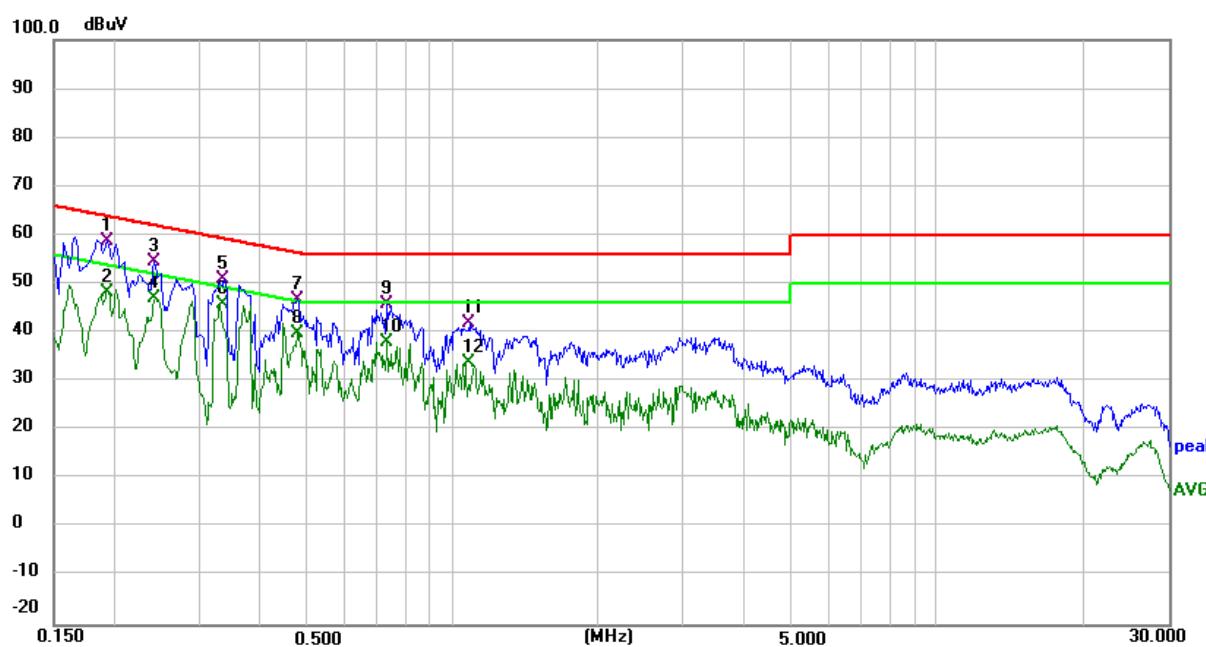


EUT:	Celerway Xm2	Model Name :	CWY-M5.4E1C1W1B
Temperature:	22 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	802.11ax(HE20) M CH MIMO
Tested By:	Liumei Huang		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.1597	33.64	9.95	43.59	55.48	-11.89	AVG
0.1620	49.89	9.95	59.84	65.36	-5.52	QP
0.2300	45.48	10.10	55.58	62.45	-6.87	QP
0.2300	36.93	10.10	47.03	52.45	-5.42	AVG
0.2819	42.93	10.20	53.13	60.76	-7.63	QP
0.2819	35.92	10.20	46.12	50.76	-4.64	AVG
0.3740	39.70	10.38	50.08	58.41	-8.33	QP
0.3740	31.02	10.38	41.40	48.41	-7.01	AVG
0.4940	37.67	10.63	48.30	56.10	-7.80	QP
0.4940	28.29	10.63	38.92	46.10	-7.18	AVG
0.5500	30.73	10.75	41.48	46.00	-4.52	AVG
0.5580	36.80	10.77	47.57	56.00	-8.43	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.4E1C2W1B

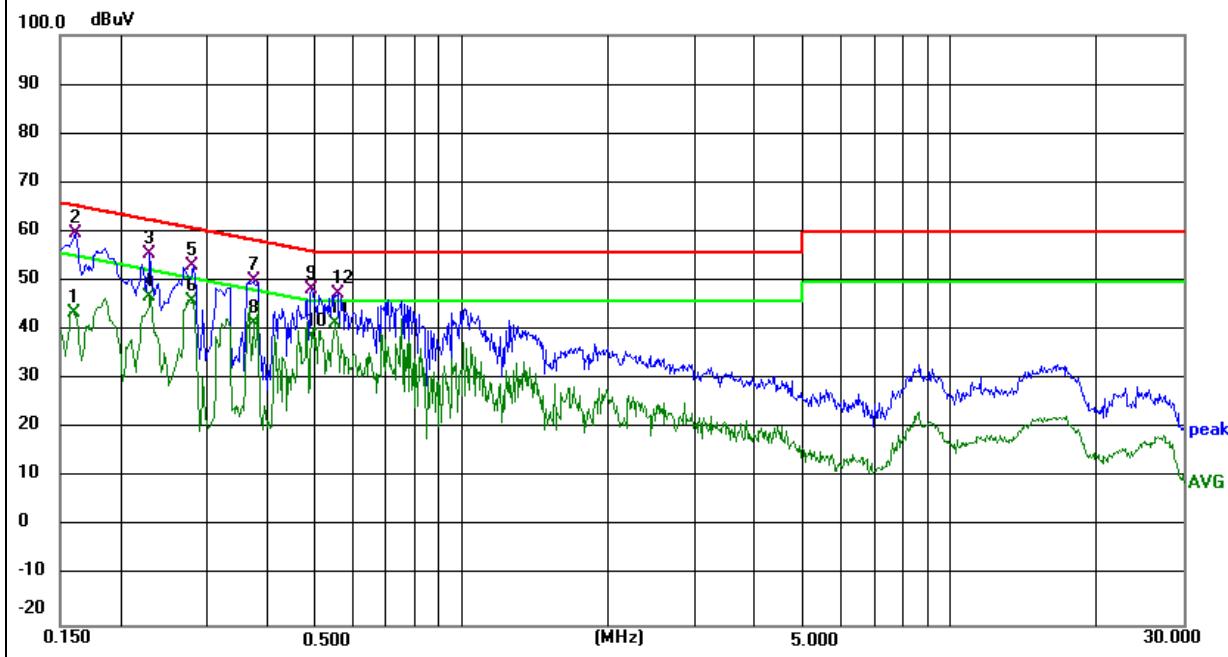


EUT:	Celerway Xm2	Model Name :	CWY-M5.4E1C1W1B
Temperature:	22°C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	802.11ax(HE20) M CH MIMO
Tested By:	Liumei Huang		

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Remark
0.1580	51.52	9.95	61.47	65.57	-4.10	QP
0.1590	38.88	9.95	48.83	55.52	-6.69	AVG
0.2700	42.80	10.18	52.98	61.12	-8.14	QP
0.2700	22.48	10.18	32.66	51.12	-18.46	AVG
0.3356	31.70	10.32	42.02	49.31	-7.29	AVG
0.3379	41.51	10.32	51.83	59.25	-7.42	QP
0.3620	41.03	10.36	51.39	58.68	-7.29	QP
0.3660	32.66	10.38	43.04	48.59	-5.55	AVG
0.4460	37.78	10.55	48.33	56.95	-8.62	QP
0.4460	33.82	10.55	44.37	46.95	-2.58	AVG
0.6860	37.43	11.03	48.46	56.00	-7.54	QP
0.6940	30.38	11.03	41.41	46.00	-4.59	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Verified the worst-case of CWY-M5.4E1C2W1B

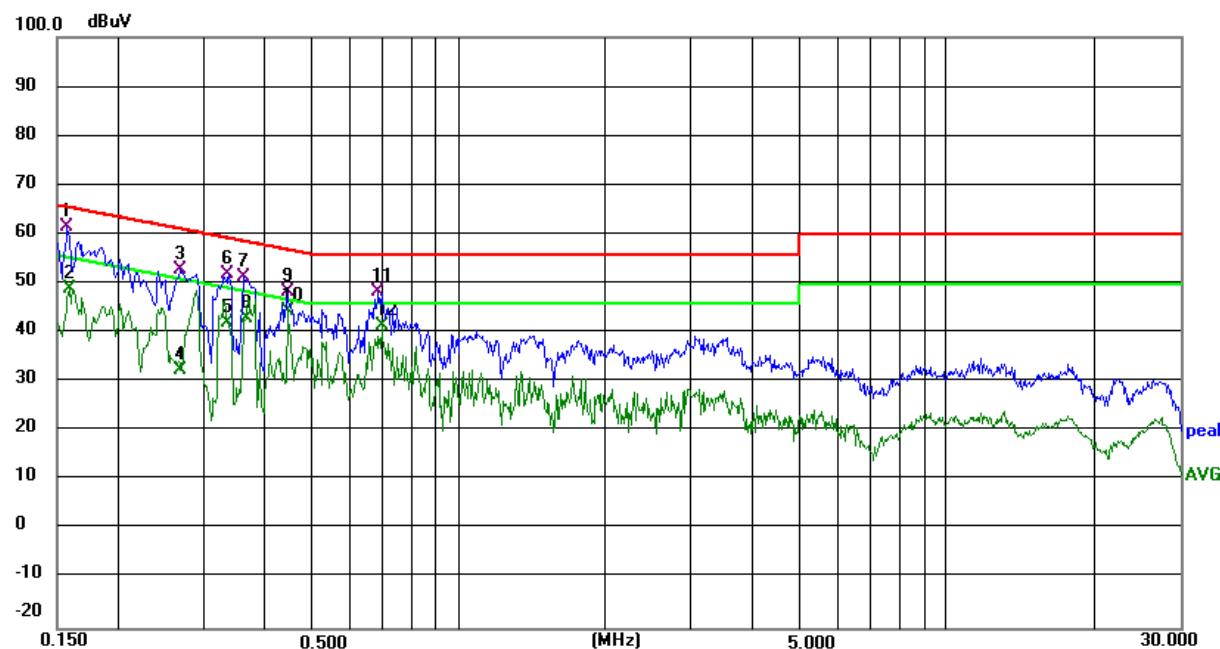

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2020

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (μ V/m)	300
0.490~1.705	24000/F(KHz)	20 log (μ V/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dB μ V/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dB μ V/m=20 log (μ V/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dB μ V) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dB μ V) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

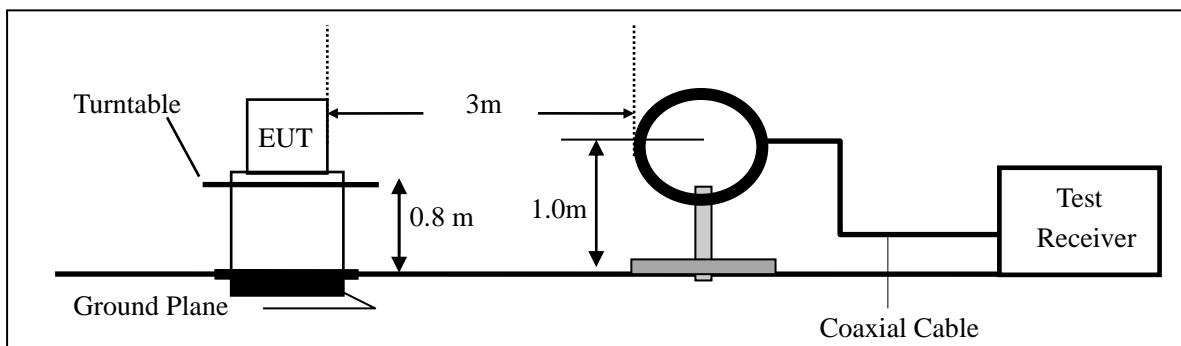

(b) For radiated emissions from 30MHz to 1000MHz

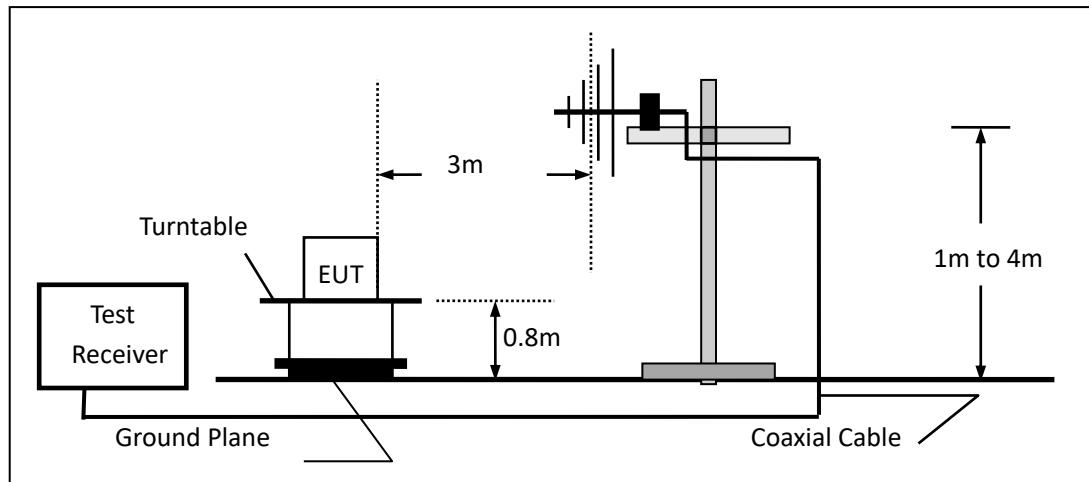

(c) For radiated emissions above 1000MHz

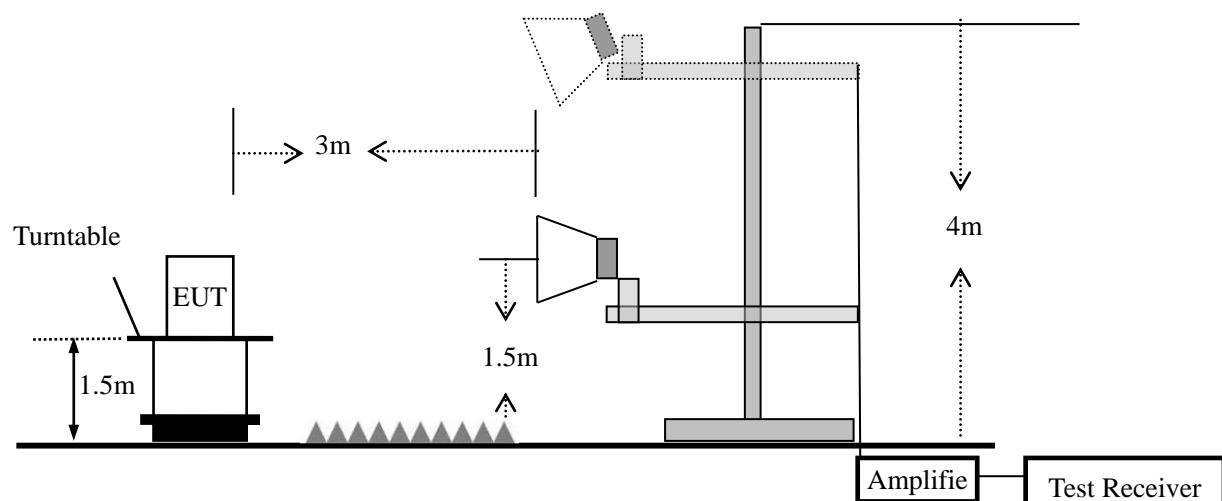

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4-2014. The test distance is 3m. The setup is according to the requirements in Section 11.11 & 11.12 of ANSI C63.10-2020 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 3MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

For peak measurement:

Set RBW=120 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;

Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz

For average measurement:

$VBW = 10$ Hz, when duty cycle is no less than 98 percent.

$VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] = $10 \times \lg(100 \text{ [kHz]}/\text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11ax(HE20) M CH MIMO	Test By:	Re Zeng

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission below 1GHz (30MHz to 1GHz)

All the modulation modes have been tested, and the worst result was report as below:

EUT:	Celerway Xm2	Model Name :	CWY-M5.4E1C2W1B
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	802.11ax(HE20) M CH MIMO
Test Voltage :	DC 5V	Test By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	35.4992	44.58	-18.18	26.40	40.00	-13.60	QP
V	56.0007	10.35	19.26	29.61	40.00	-10.39	QP
V	65.1144	13.85	17.57	31.42	40.00	-8.58	QP
V	189.0740	19.68	16.98	36.66	43.50	-6.84	QP
V	535.7073	9.14	25.12	34.26	46.00	-11.74	QP
V	719.1992	7.18	28.45	35.63	46.00	-10.37	QP

Remark:


Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit



Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	66.2660	12.52	17.22	29.74	40.00	-10.26	QP
H	139.3610	14.98	14.25	29.23	43.50	-14.27	QP
H	195.8220	21.77	17.58	39.35	43.50	-4.15	QP
H	413.2706	15.62	22.90	38.52	46.00	-7.48	QP
H	449.5557	11.89	23.47	35.36	46.00	-10.64	QP
H	896.9963	7.15	30.53	37.68	46.00	-8.32	QP

Remark:

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit

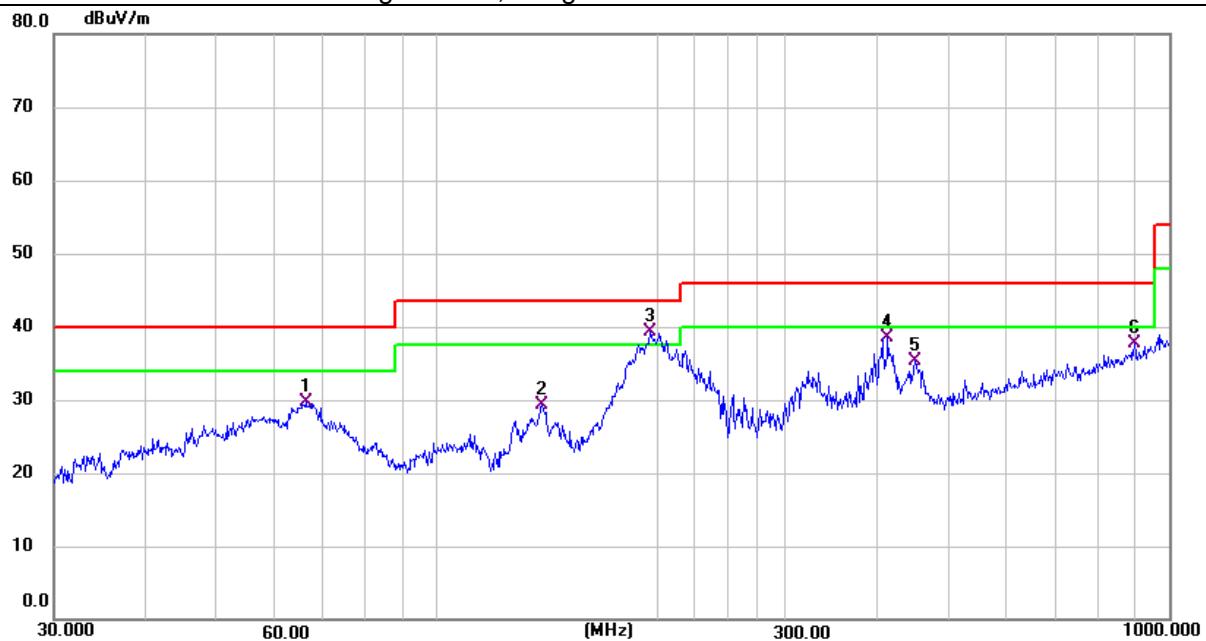


EUT:	Celerway Xm2	Model Name :	CWY-M5.4E1C1W1B
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	802.11ax(HE20) M CH MIMO
Test Voltage :	DC 5V	Test By:	Re Zeng

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	40.2754	56.44	-21.76	34.68	40.00	-5.32	QP
V	55.6092	14.41	19.30	33.71	40.00	-6.29	QP
V	106.0126	10.80	17.97	28.77	43.50	-14.73	QP
V	181.9200	24.84	16.16	41.00	43.50	-2.50	QP
V	545.1825	8.05	25.14	33.19	46.00	-12.81	QP
V	719.1992	5.68	28.45	34.13	46.00	-11.87	QP

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit


2. Verified the worst-case of CWY-M5.4E1C2W1B

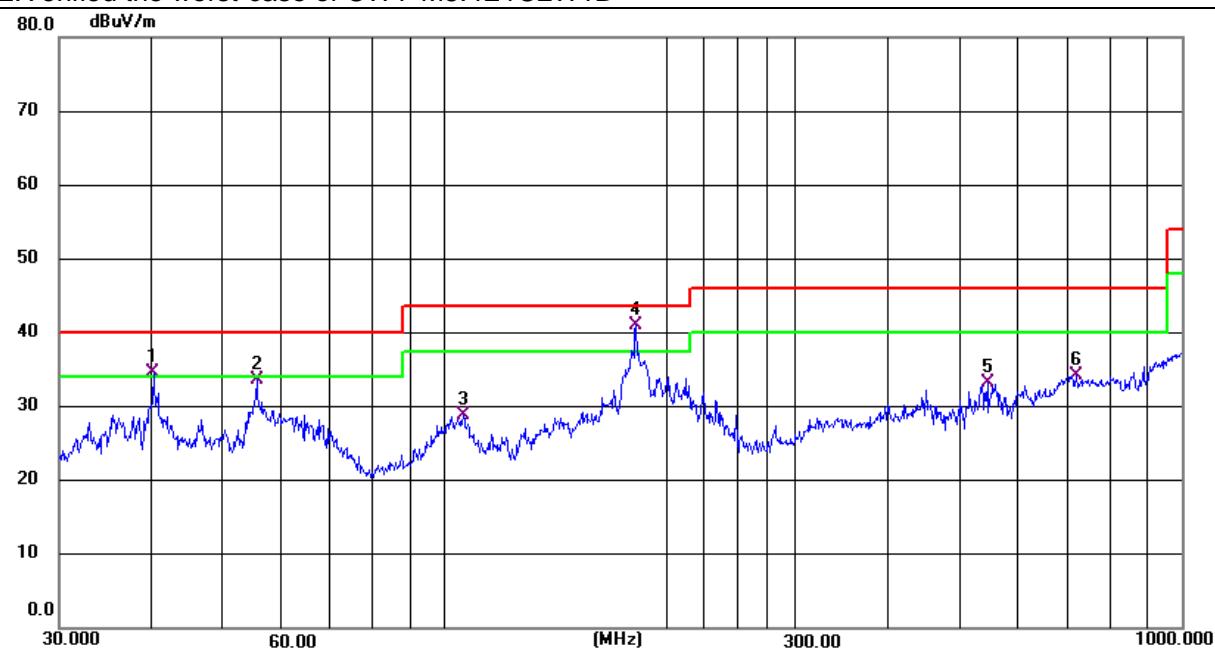

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	69.3568	13.70	16.21	29.91	40.00	-10.09	QP
H	103.4419	12.32	17.87	30.19	43.50	-13.31	QP
H	139.3610	17.48	14.25	31.73	43.50	-11.77	QP
H	188.4122	24.14	16.92	41.06	43.50	-2.44	QP
H	449.5557	11.89	23.47	35.36	46.00	-10.64	QP
H	896.9963	7.15	30.53	37.68	46.00	-8.32	QP

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit
2. Verified the worst-case of CWY-M5.4E1C2W1B

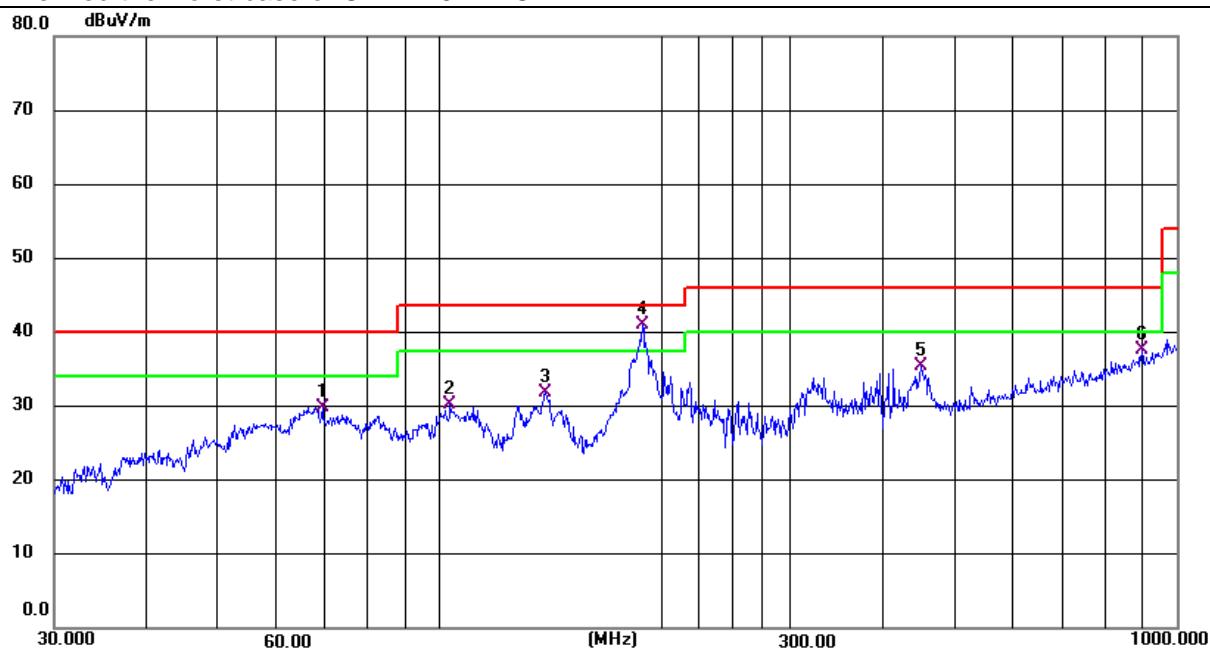


■ Spurious Emission Above 1GHz (1GHz to 18GHz)

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1340.000	65.82	-22.82	43.00	74.00	-31.00	peak
V	5267.000	53.24	-12.88	40.36	74.00	-33.64	peak
V	9143.000	45.03	-5.63	39.40	74.00	-34.60	peak
V	12237.000	43.23	-2.08	41.15	74.00	-32.85	peak
V	14192.000	43.34	-0.93	42.41	74.00	-31.59	peak
V	15824.000	44.48	-1.27	43.21	74.00	-30.79	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) L CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

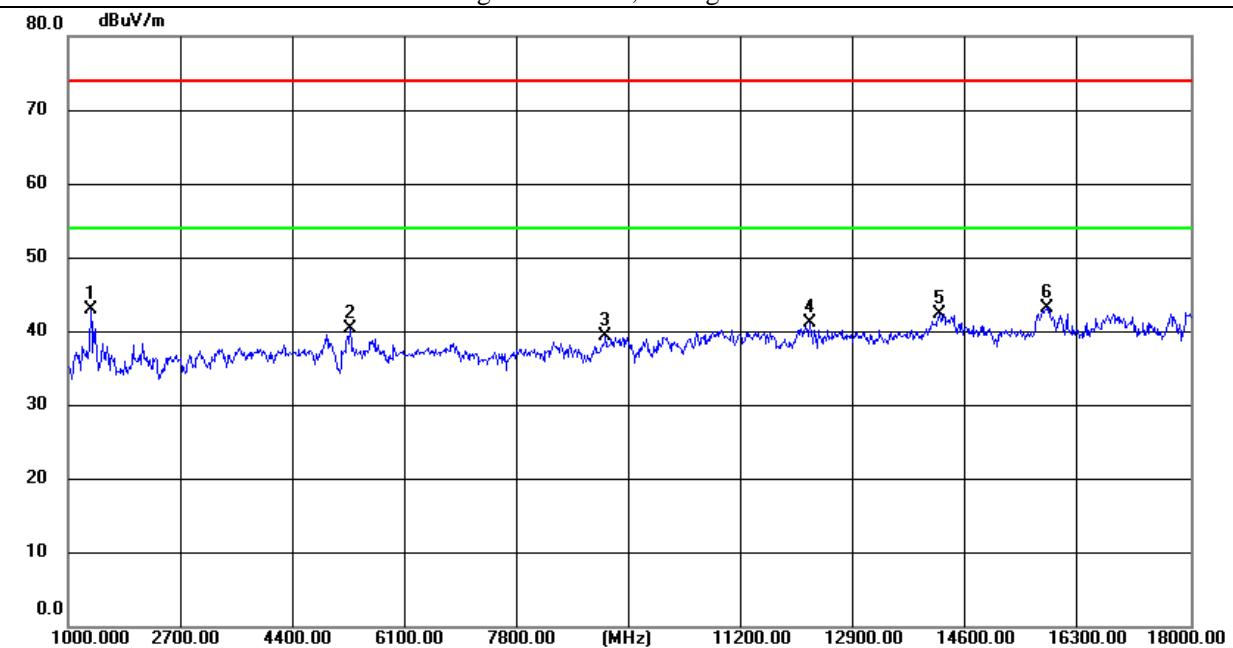


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1340.000	66.23	-22.82	43.41	74.00	-30.59	peak
H	2122.000	63.30	-19.51	43.79	74.00	-30.21	peak
H	9347.000	47.75	-5.34	42.41	74.00	-31.59	peak
H	10503.000	45.08	-3.92	41.16	74.00	-32.84	peak
H	14090.000	41.79	-1.02	40.77	74.00	-33.23	peak
H	16844.000	42.63	-0.73	41.90	74.00	-32.10	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) L CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

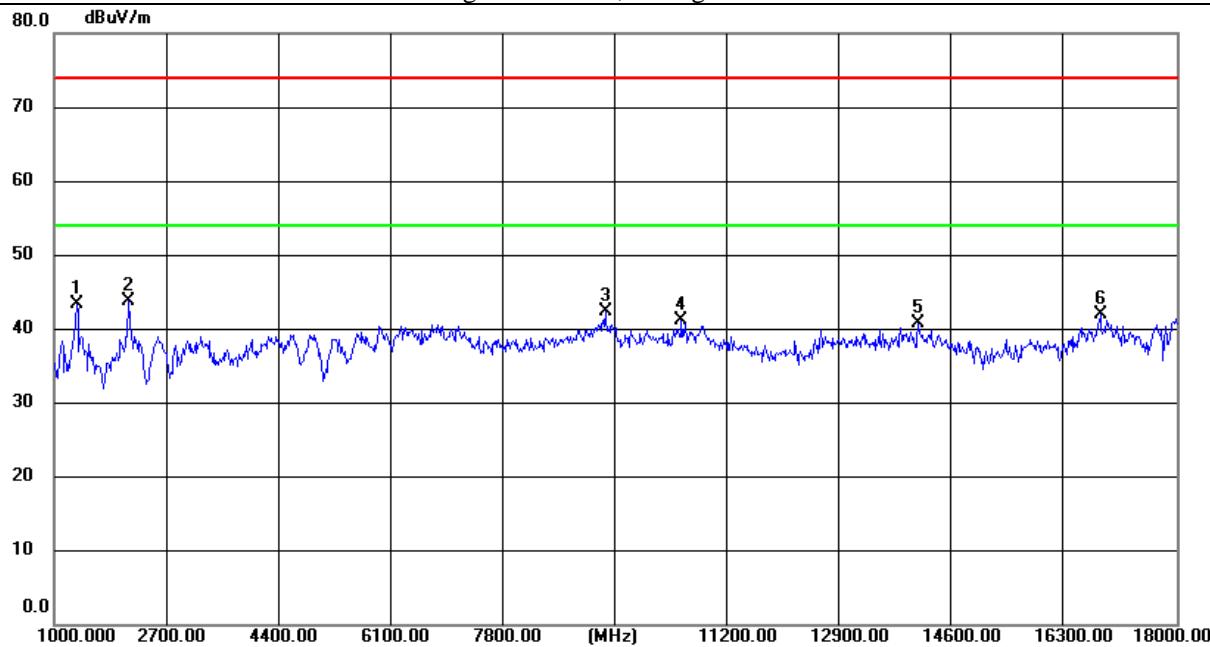


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1986.000	57.16	-20.45	36.71	74.00	-37.29	peak
V	4264.000	51.05	-14.30	36.75	74.00	-37.25	peak
V	9415.000	45.84	-5.40	40.44	74.00	-33.56	peak
V	11047.000	44.48	-3.31	41.17	74.00	-32.83	peak
V	12713.000	44.25	-1.54	42.71	74.00	-31.29	peak
V	17694.000	41.34	2.07	43.41	74.00	-30.59	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) M CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

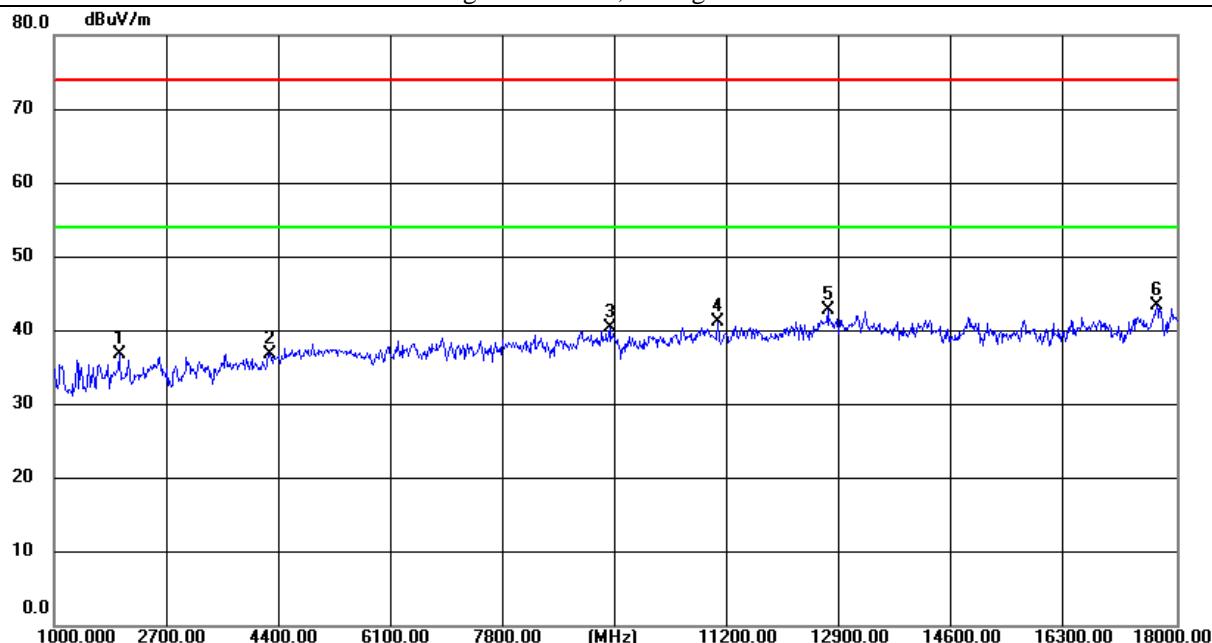


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1340.000	62.23	-22.82	39.41	74.00	-34.59	peak
H	2122.000	56.80	-19.51	37.29	74.00	-36.71	peak
H	6712.000	48.50	-9.49	39.01	74.00	-34.99	peak
H	9347.000	46.25	-5.34	40.91	74.00	-33.09	peak
H	12611.000	44.50	-1.66	42.84	74.00	-31.16	peak
H	17915.000	41.58	3.92	45.50	74.00	-28.50	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) M CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

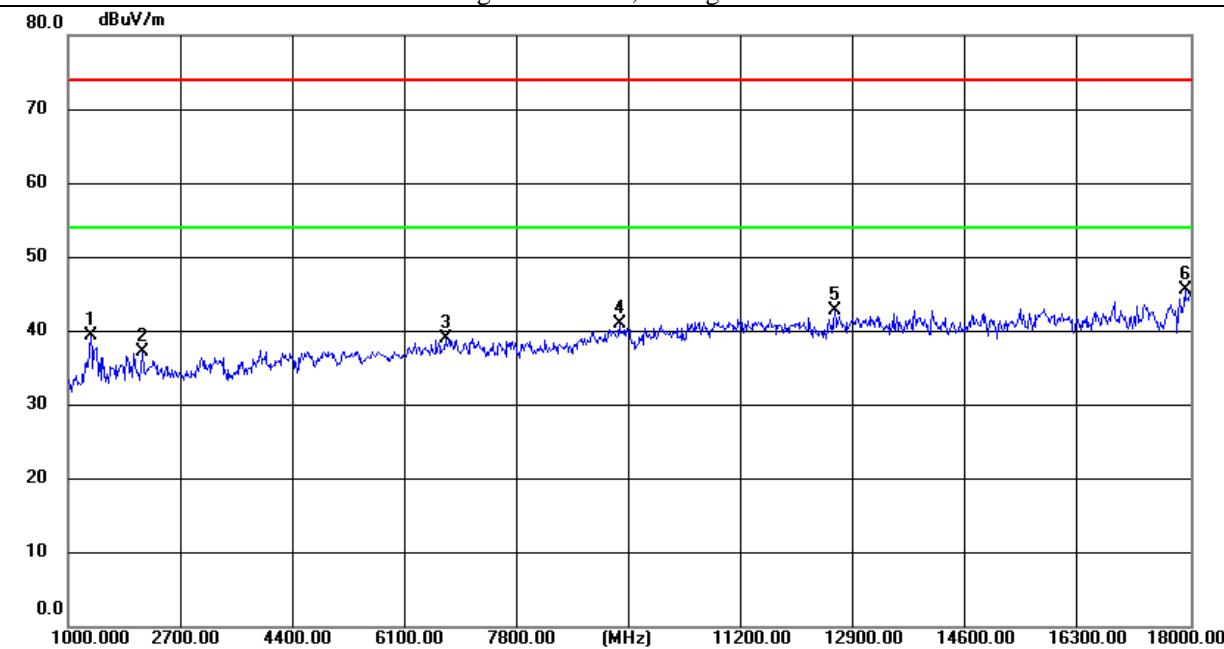


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1595.000	60.93	-22.36	38.57	74.00	-35.43	peak
V	2122.000	59.95	-19.51	40.44	74.00	-33.56	peak
V	4264.000	52.55	-14.30	38.25	74.00	-35.75	peak
V	9415.000	45.34	-5.40	39.94	74.00	-34.06	peak
V	13291.000	41.22	-1.09	40.13	74.00	-33.87	peak
V	17932.000	37.55	4.01	41.56	74.00	-32.44	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) H CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

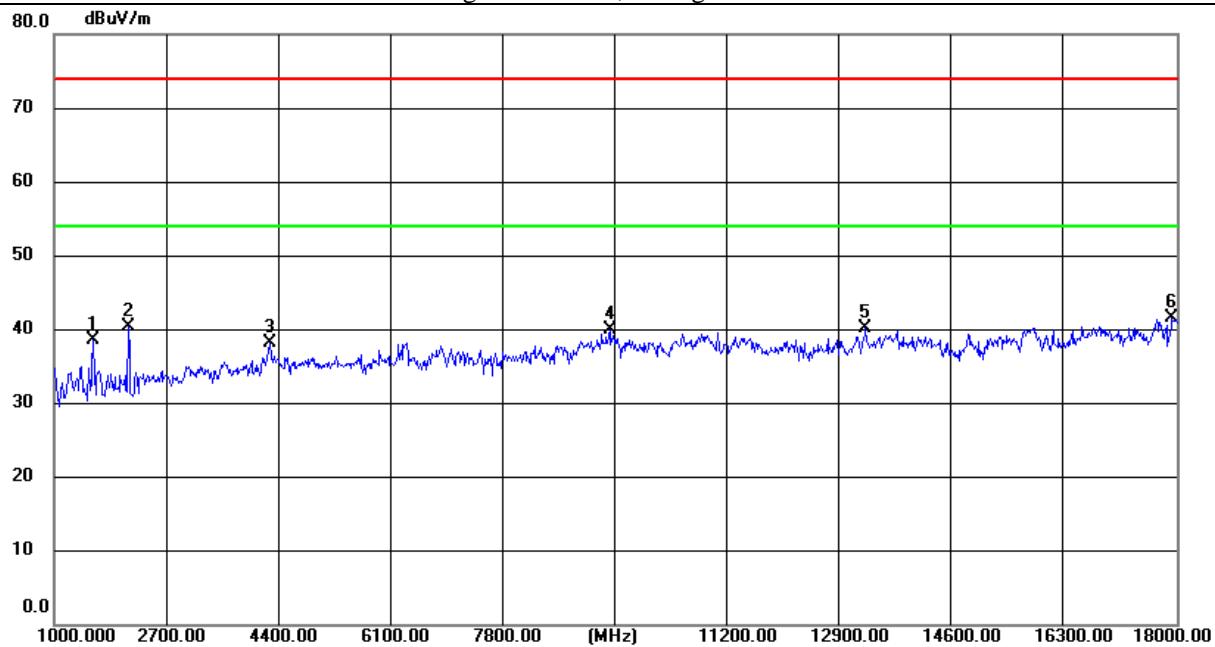


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	1340.000	61.73	-22.82	38.91	74.00	-35.09	peak
H	2003.000	59.94	-20.36	39.58	74.00	-34.42	peak
H	6406.000	49.35	-10.59	38.76	74.00	-35.24	peak
H	9347.000	46.25	-5.34	40.91	74.00	-33.09	peak
H	16844.000	43.13	-0.73	42.40	74.00	-31.60	peak
H	17830.000	38.69	3.23	41.92	74.00	-32.08	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) H CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

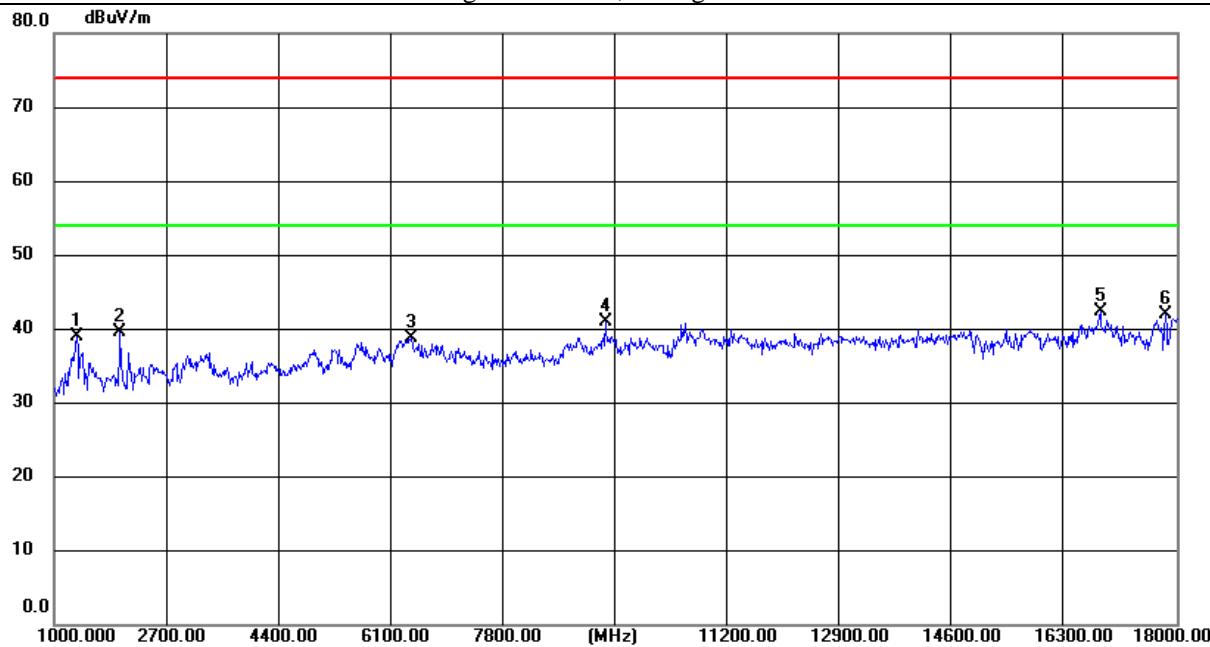


■ Spurious Emission Above 1GHz (18GHz to 25GHz)

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11ax(HE20) M CH MIMO	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	18520.625	82.73	-32.93	49.80	74.00	-24.20	peak
V	18879.900	83.52	-32.89	50.63	74.00	-23.37	peak
V	20511.775	83.87	-32.02	51.85	74.00	-22.15	peak
V	22299.575	82.08	-29.43	52.65	74.00	-21.35	peak
V	24099.450	79.66	-26.95	52.71	74.00	-21.29	peak
V	24900.075	78.65	-26.27	52.38	74.00	-21.62	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. No emissions was found at 18G ~25GHz, so it was not recorded in the report.
3. When PK value is lower than the Average value limit, average don't record.

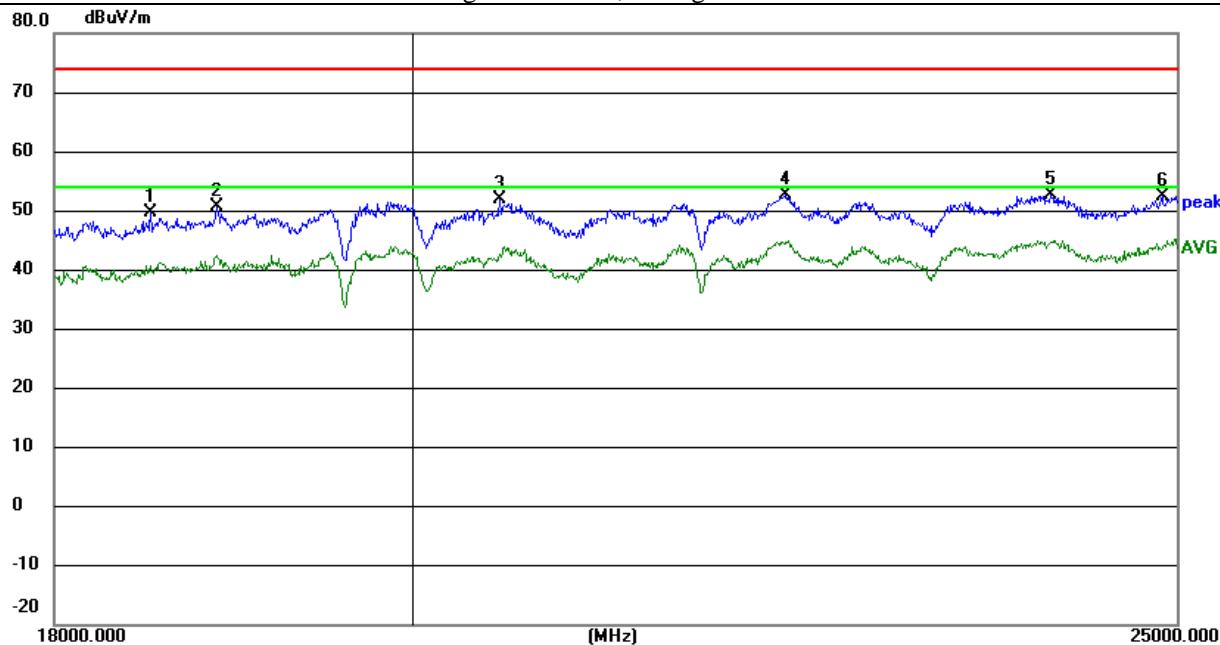


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11ax(HE20) M CH MIMO	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	18512.400	45.57	4.28	49.85	74.00	-24.15	peak
H	19933.575	46.22	6.15	52.37	74.00	-21.63	peak
H	21171.525	44.60	7.97	52.57	74.00	-21.43	peak
H	21848.950	44.71	8.57	53.28	74.00	-20.72	peak
H	23410.300	42.34	10.91	53.25	74.00	-20.75	peak
H	24400.275	41.42	11.96	53.38	74.00	-20.62	peak

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. No emissions was found at 18G ~25GHz, so it was not recorded in the report.
3. When PK value is lower than the Average value limit, average don't record.

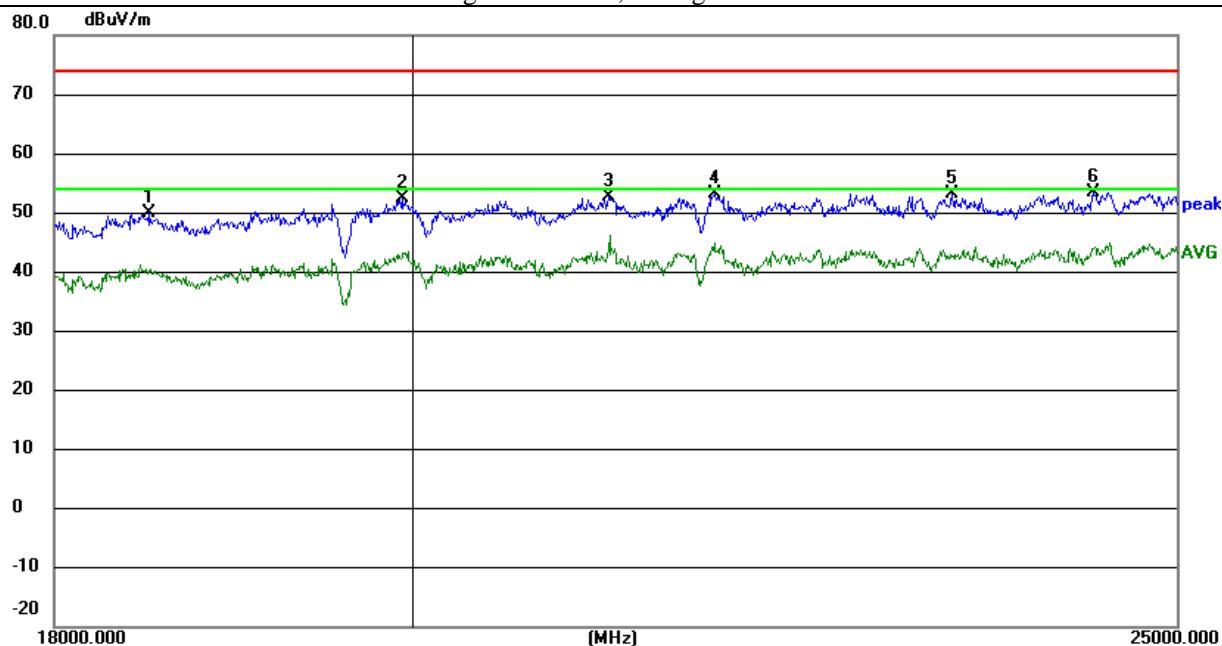


■ Spurious Emission in Restricted Band and Band Edge

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2390.000	65.03	-12.17	52.86	74.00	-21.14	peak
V	2390.000	52.02	-12.17	39.85	54.00	-14.15	AVG

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) L CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

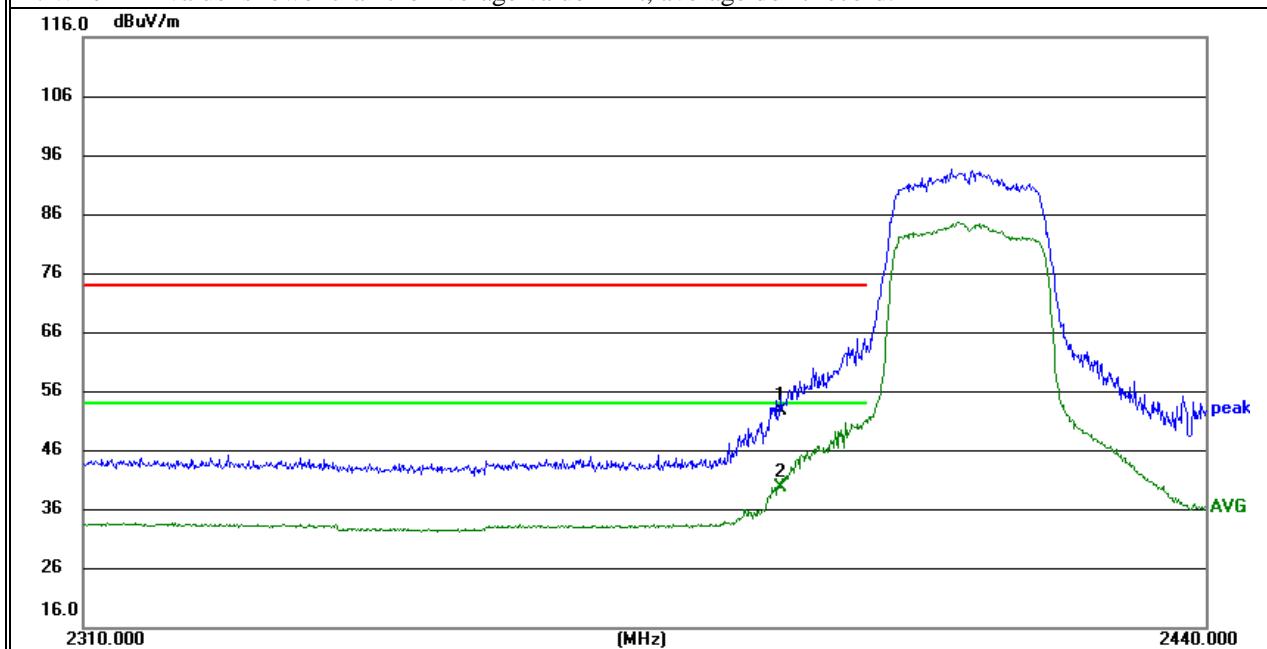


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2390.000	68.57	-12.17	56.40	74.00	-17.60	peak
H	2390.000	55.48	-12.17	43.31	54.00	-10.69	AVG

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) L CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

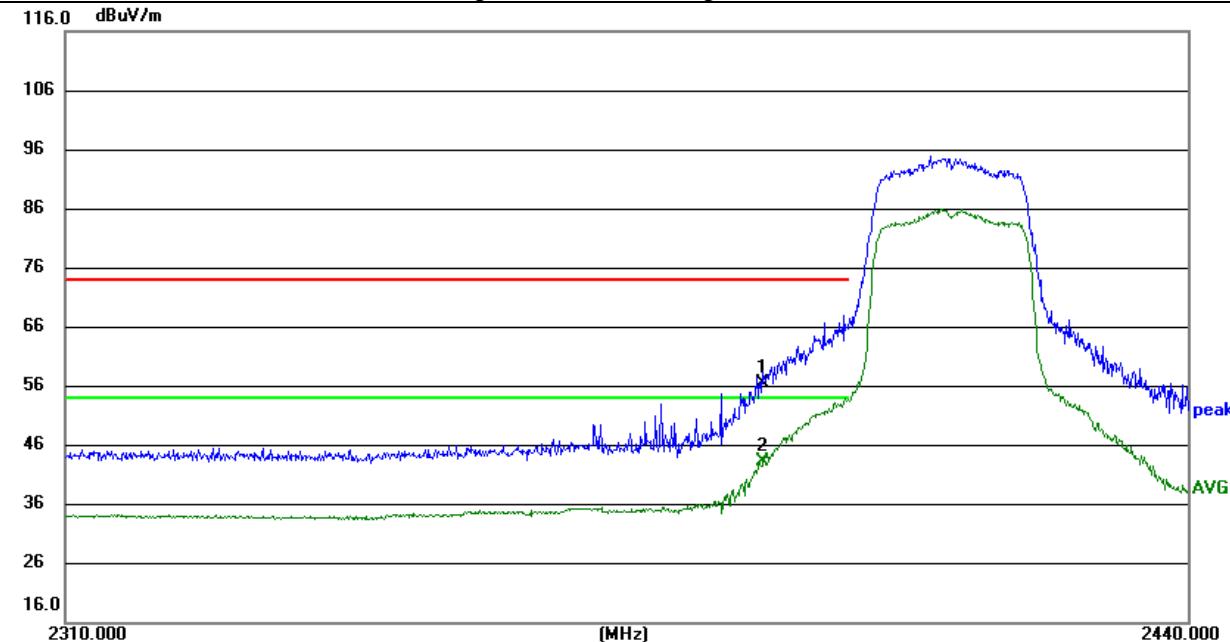


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2483.500	65.08	-11.33	53.75	74.00	-20.25	peak
V	2483.500	50.99	-11.33	39.66	54.00	-14.34	AVG

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) H CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

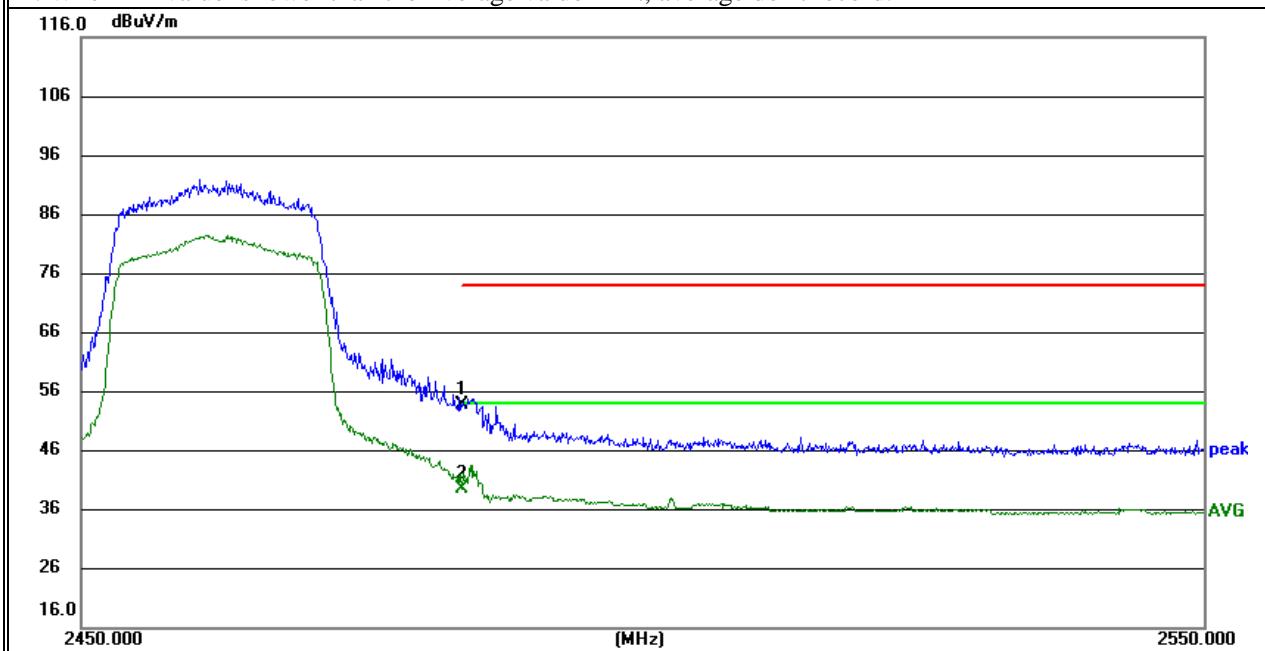


EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	21 °C	Relative Humidity:	51%
Test Mode:	802.11b/g/n(HT20,HT40)/ ax(20,40)	Tested By:	Harry Huang

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2483.500	64.66	-11.33	53.33	74.00	-20.67	peak
H	2483.500	50.92	-11.33	39.59	54.00	-14.41	AVG

Remark:

1. Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor
2. All the modulation modes and Antenna have been tested, and the worst-case result was 802.11ax(HE20) H CH MIMO. Only the worst-case mode and antenna are reported.
3. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
4. When PK value is lower than the Average value limit, average don't record.

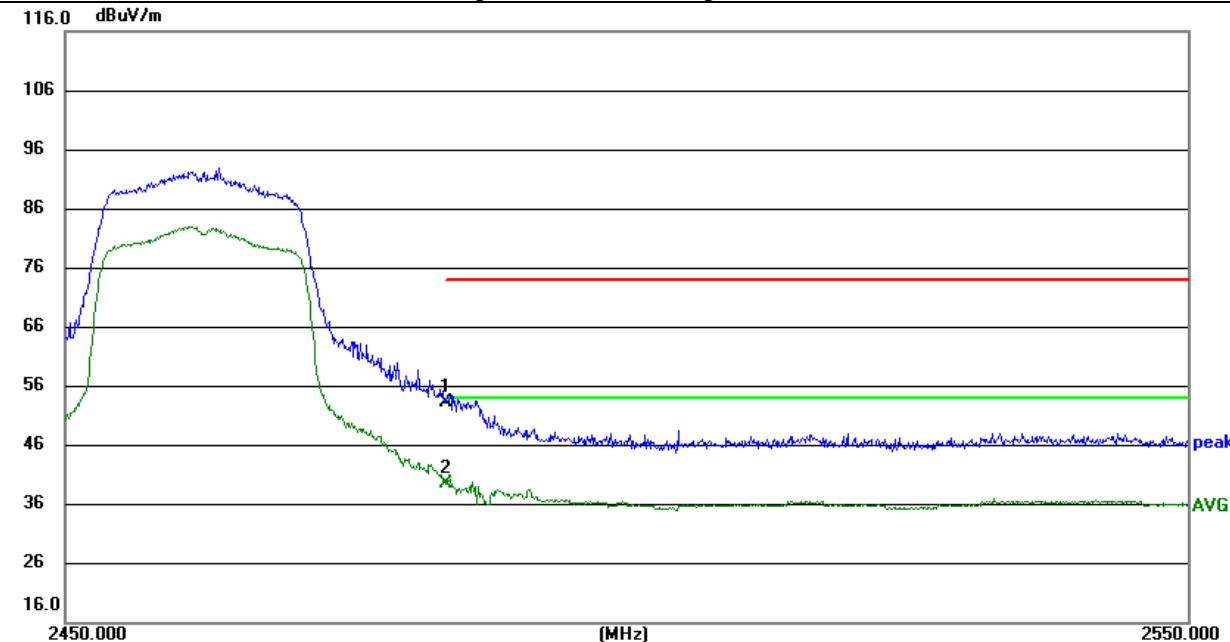

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW \geq 3*RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40/ax20/ax40	Tested By:	Leo Wang

Test data reference attachment.

7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance v05r02 Section 6.

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total}

7.4.6 Test Results

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40/ax20/ax40	Tested By:	Leo Wang

Test data reference attachment.

7.5 MAXIMUM OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.2.3.

7.5.2 Conformance Limit


For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. If transmitting antenna of directional gain greater than 6dBi is used, the maximum conducted output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The following table is the setting of the power meter.

Power meter parameter	Setting
Detector	AV

7.5.4 Test Setup

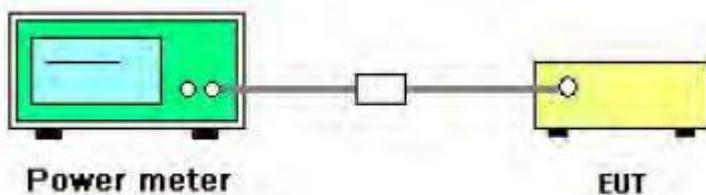

7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.9.2.3.1 of ANSI C63.10

7.5.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

7.5.7 Test Results

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40/ax20/ax40	Tested By:	Leo Wang

Note: For 802.11n/ax has MIMO mode. Directional gain=0.34 dBi
0.34 dBi<6.0 dBi, so power limit don't need to change
Test data reference attachment.

7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.3 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Measure the duty cycle (D) of the transmitter output signal as described in 11.6.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to > 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq [3 \times \text{RBW}]$.
- f) Detector = power averaging (rms) or sample detector (when rms not available).
- g) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering; allow sweep to "free run."
- j) Employ trace averaging (rms) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

7.6.6 Test Results

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40/ax20/ax40	Tested By:	Leo Wang

Note: For 802.11n/ax has MIMO mode. Directional gain=0.34 dBi
0.34 dBi<6.0 dBi, so power spectral density limit don't need to change
Test data reference attachment.

7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

7.7.6 Test Results

EUT:	Celerway Xm2	Model No.:	CWY-M5.4E1C2W1B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40/ax20/ax40	Tested By:	Leo Wang

Test data reference attachment.

7.8 SPURIOUS RF CONDUCTED EMISSIONS

7.8.1 Conformance Limit

1. Below -30dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2020 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

7.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Test data reference attachment.

7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.9.2 Result


The EUT antenna is permanent attached LDS Antenna. It comply with the standard requirement.


8 TEST RESULTS


8.1 2.4G WIFI SISO


8.1.1 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	100	0	0
NVNT	b	2437	Ant1	100	0	0
NVNT	b	2462	Ant1	100	0	0
NVNT	b	2412	Ant2	99.61	0.02	0.5
NVNT	b	2437	Ant2	99.66	0.01	0.5
NVNT	b	2462	Ant2	99.63	0.02	0.5
NVNT	g	2412	Ant1	99.73	0.01	0.48
NVNT	g	2437	Ant1	99.74	0.01	0.48
NVNT	g	2462	Ant1	99.75	0.01	0.48
NVNT	g	2412	Ant2	99.72	0.01	0.12
NVNT	g	2437	Ant2	99.74	0.01	0.48
NVNT	g	2462	Ant2	99.73	0.01	0.16
NVNT	n20	2412	Ant1	99.89	0	0.06
NVNT	n20	2437	Ant1	99.93	0	0.05
NVNT	n20	2462	Ant1	99.88	0.01	0.19
NVNT	n20	2412	Ant2	99.88	0.01	0.19
NVNT	n20	2437	Ant2	99.9	0	0.06
NVNT	n20	2462	Ant2	99.88	0.01	0.19
NVNT	n40	2422	Ant1	99.9	0	0.19
NVNT	n40	2437	Ant1	99.93	0	0.04
NVNT	n40	2452	Ant1	99.92	0	0.19
NVNT	n40	2422	Ant2	99.88	0.01	0.19
NVNT	n40	2437	Ant2	99.92	0	0.04
NVNT	n40	2452	Ant2	99.89	0	0.19
NVNT	ax20	2412	Ant1	99.91	0	0.06
NVNT	ax20	2437	Ant1	99.9	0	0.18
NVNT	ax20	2462	Ant1	99.89	0	0.09
NVNT	ax20	2412	Ant2	99.92	0	0.06
NVNT	ax20	2437	Ant2	99.92	0	0.18
NVNT	ax20	2462	Ant2	99.9	0	0.18
NVNT	ax40	2422	Ant1	99.89	0	0.24
NVNT	ax40	2437	Ant1	99.87	0.01	0.24
NVNT	ax40	2452	Ant1	99.88	0.01	0.24
NVNT	ax40	2422	Ant2	99.86	0.01	0.24
NVNT	ax40	2437	Ant2	99.92	0	0.03
NVNT	ax40	2452	Ant2	99.99	0	0

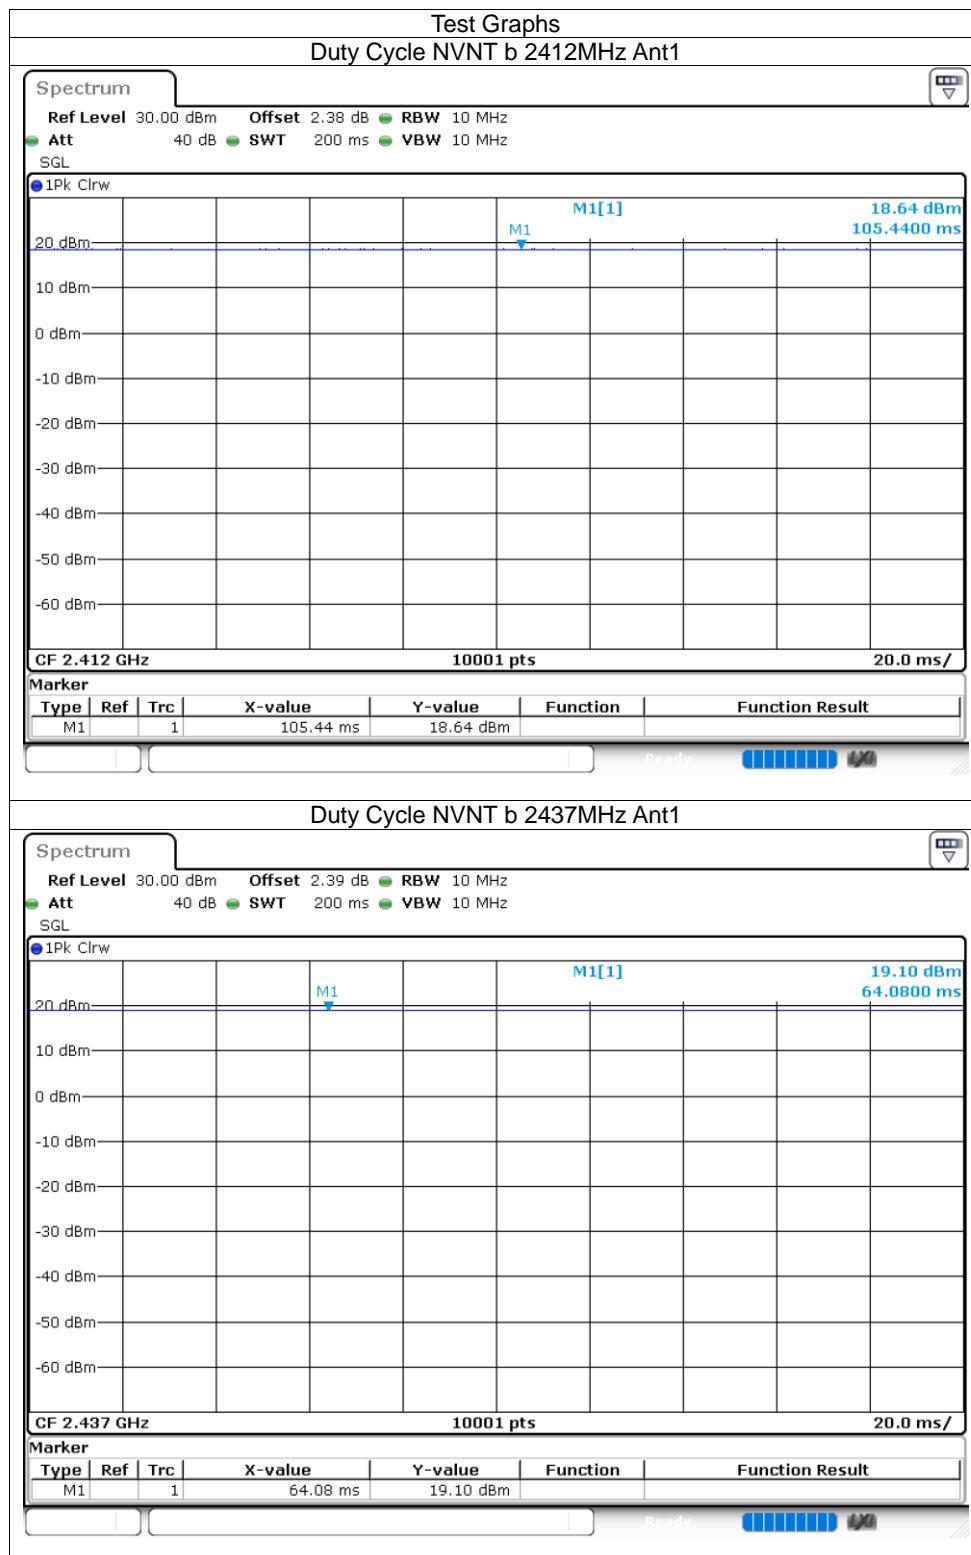


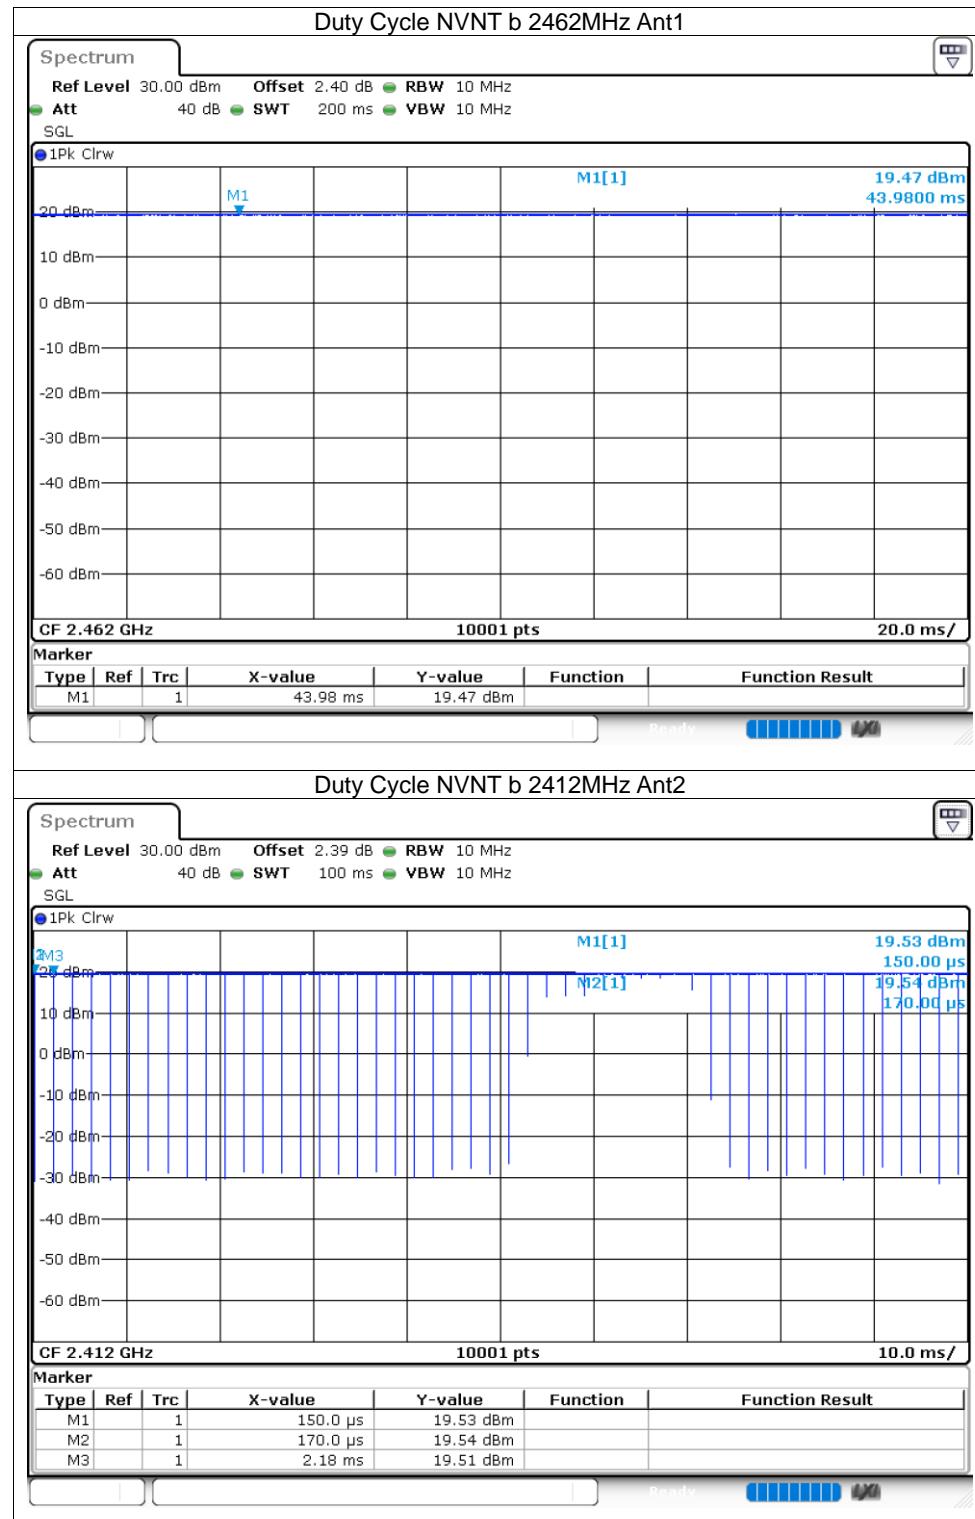


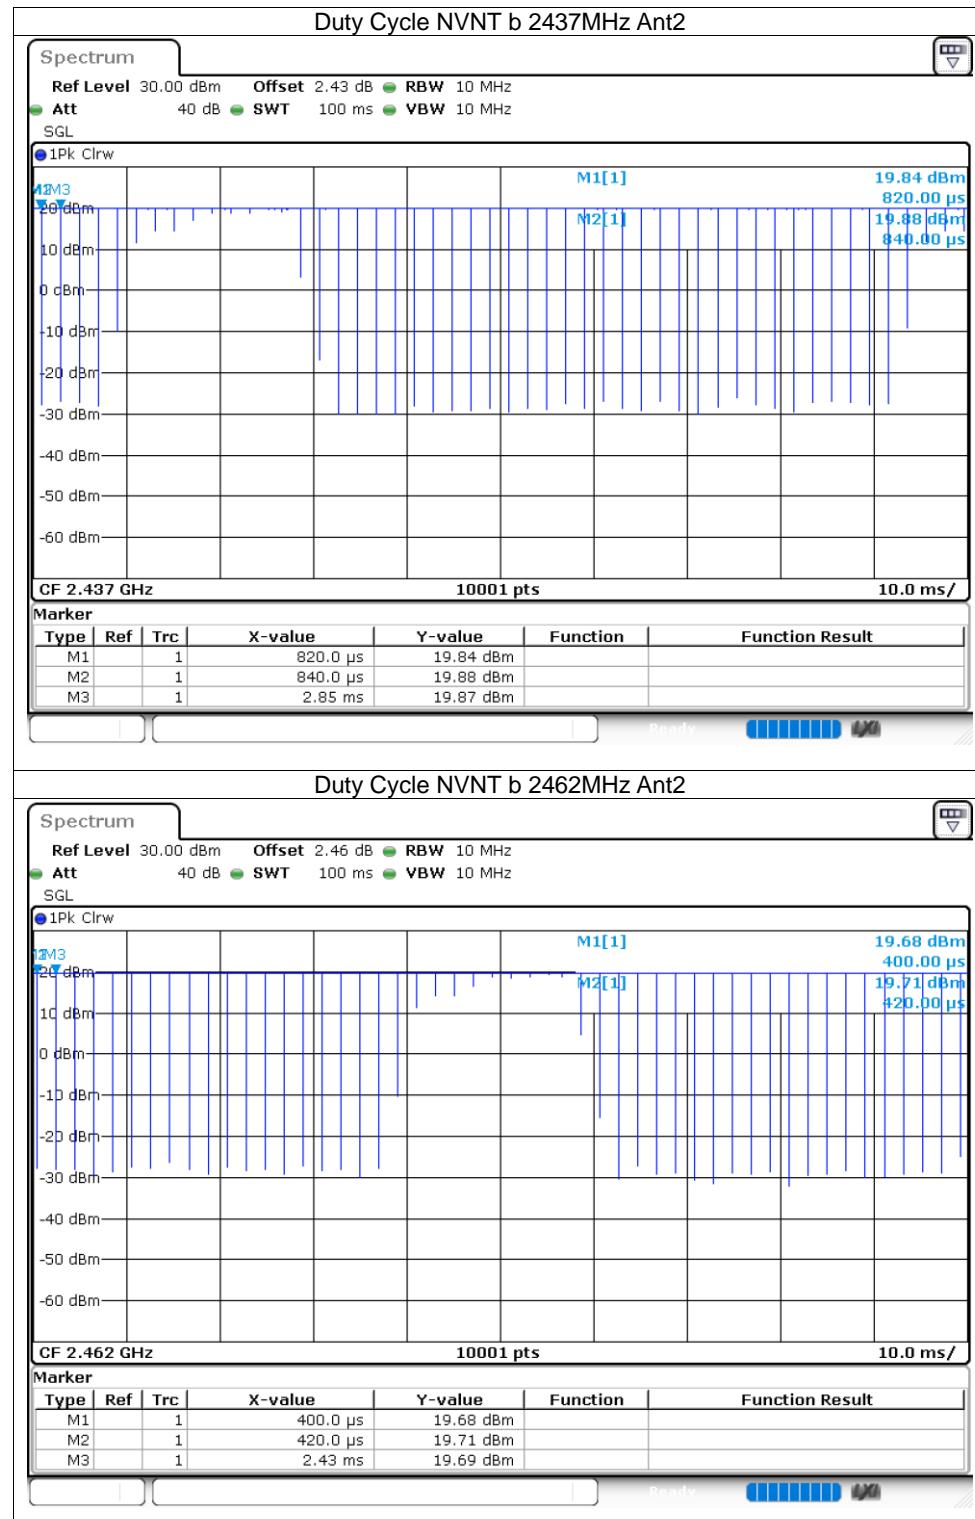


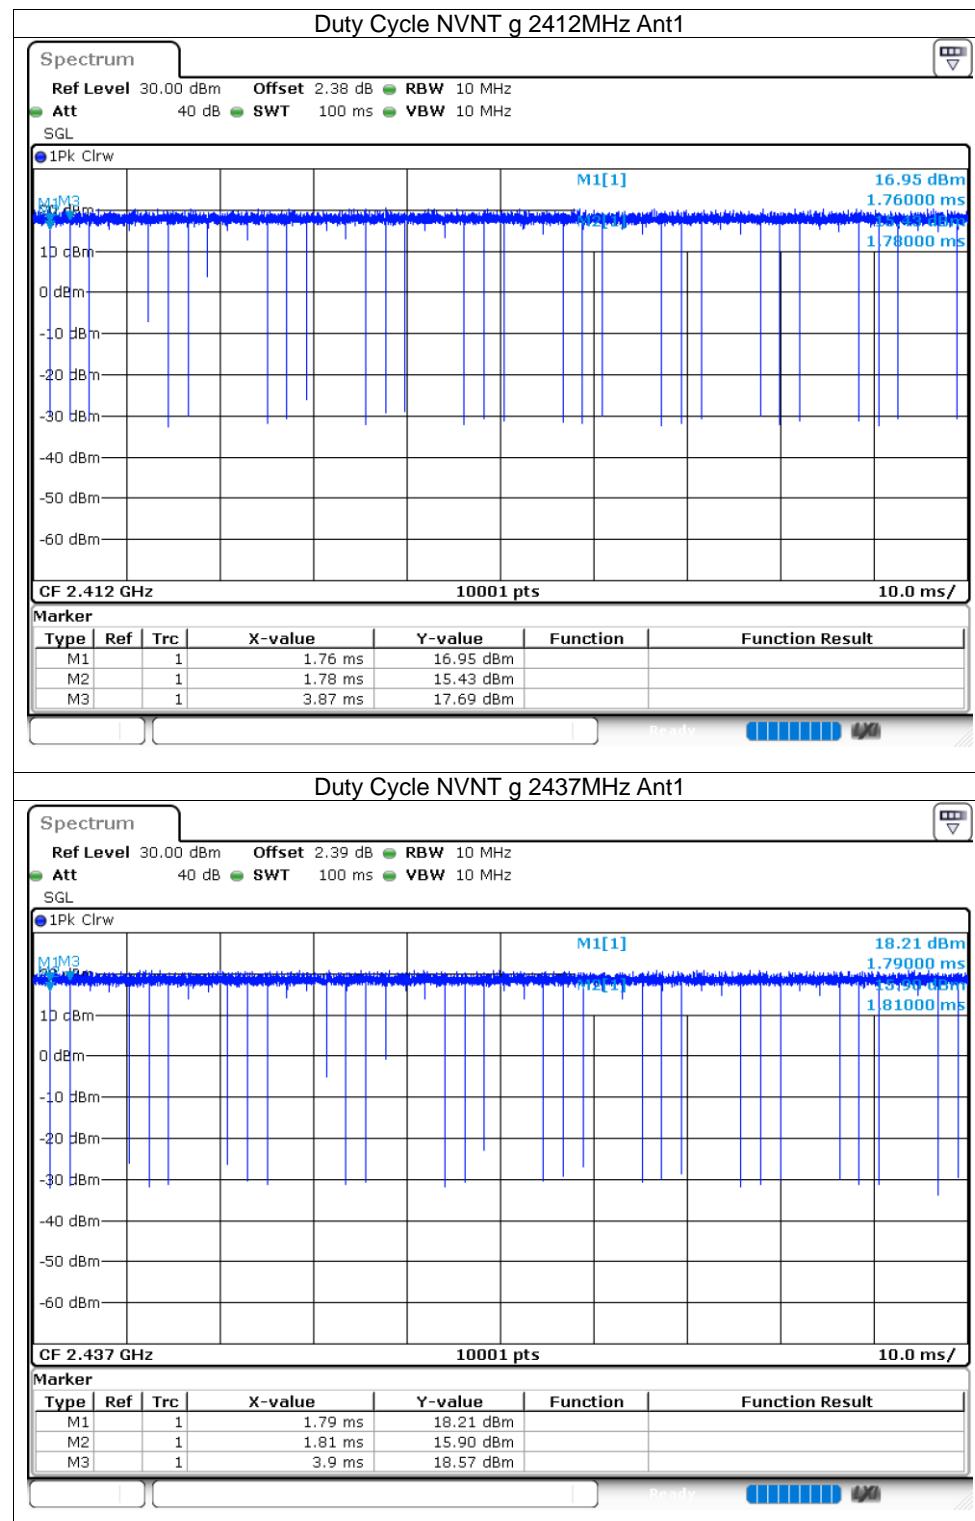


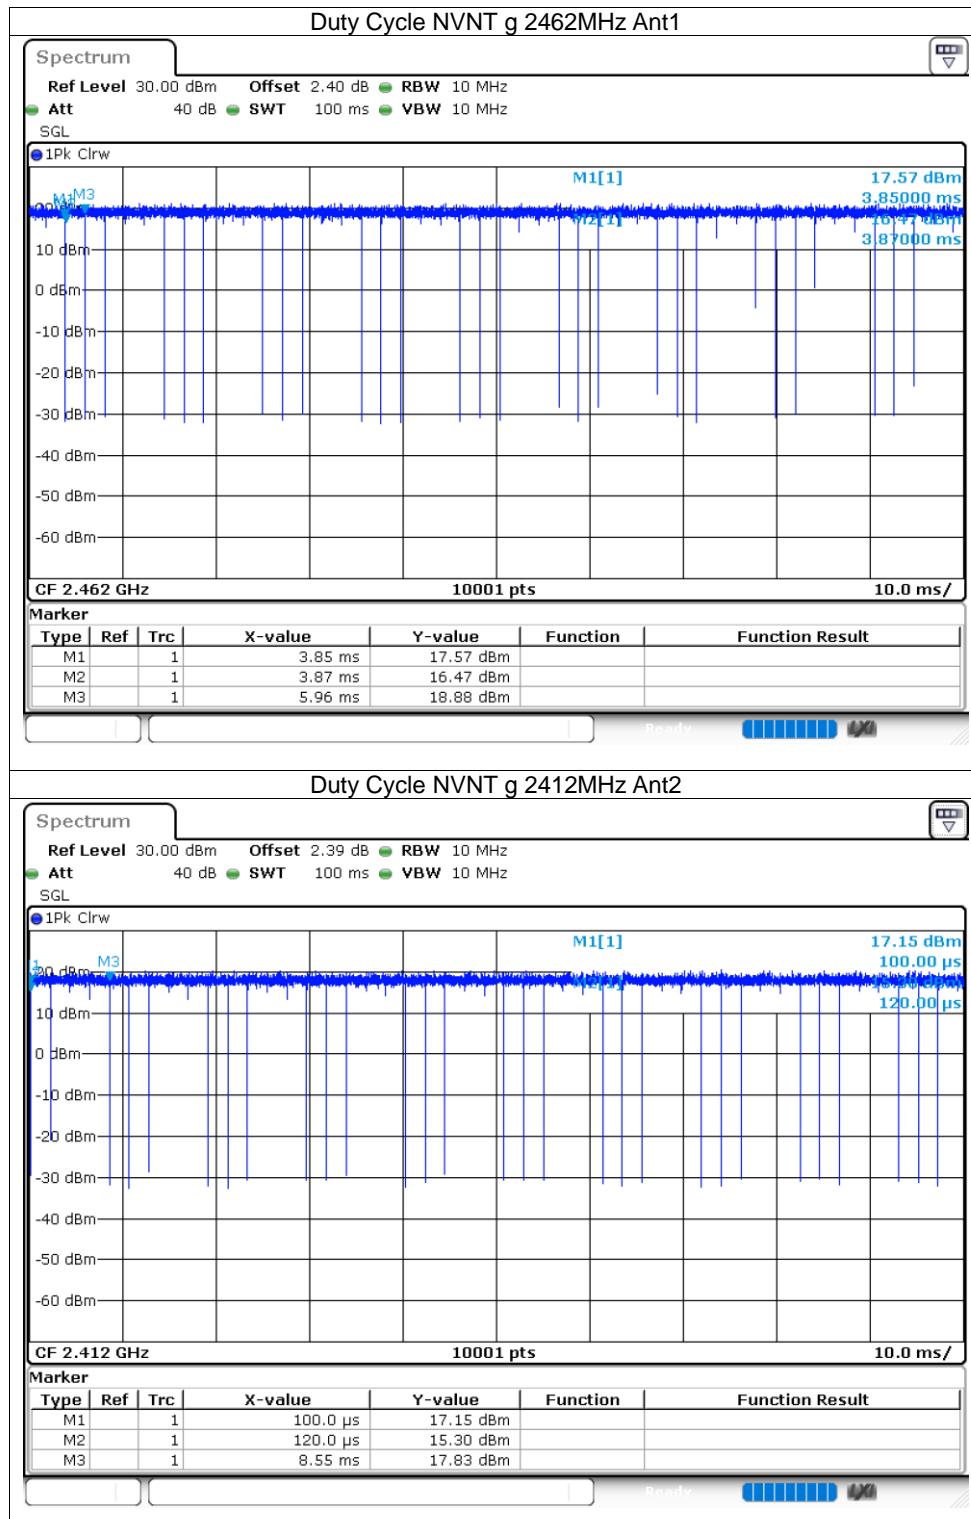


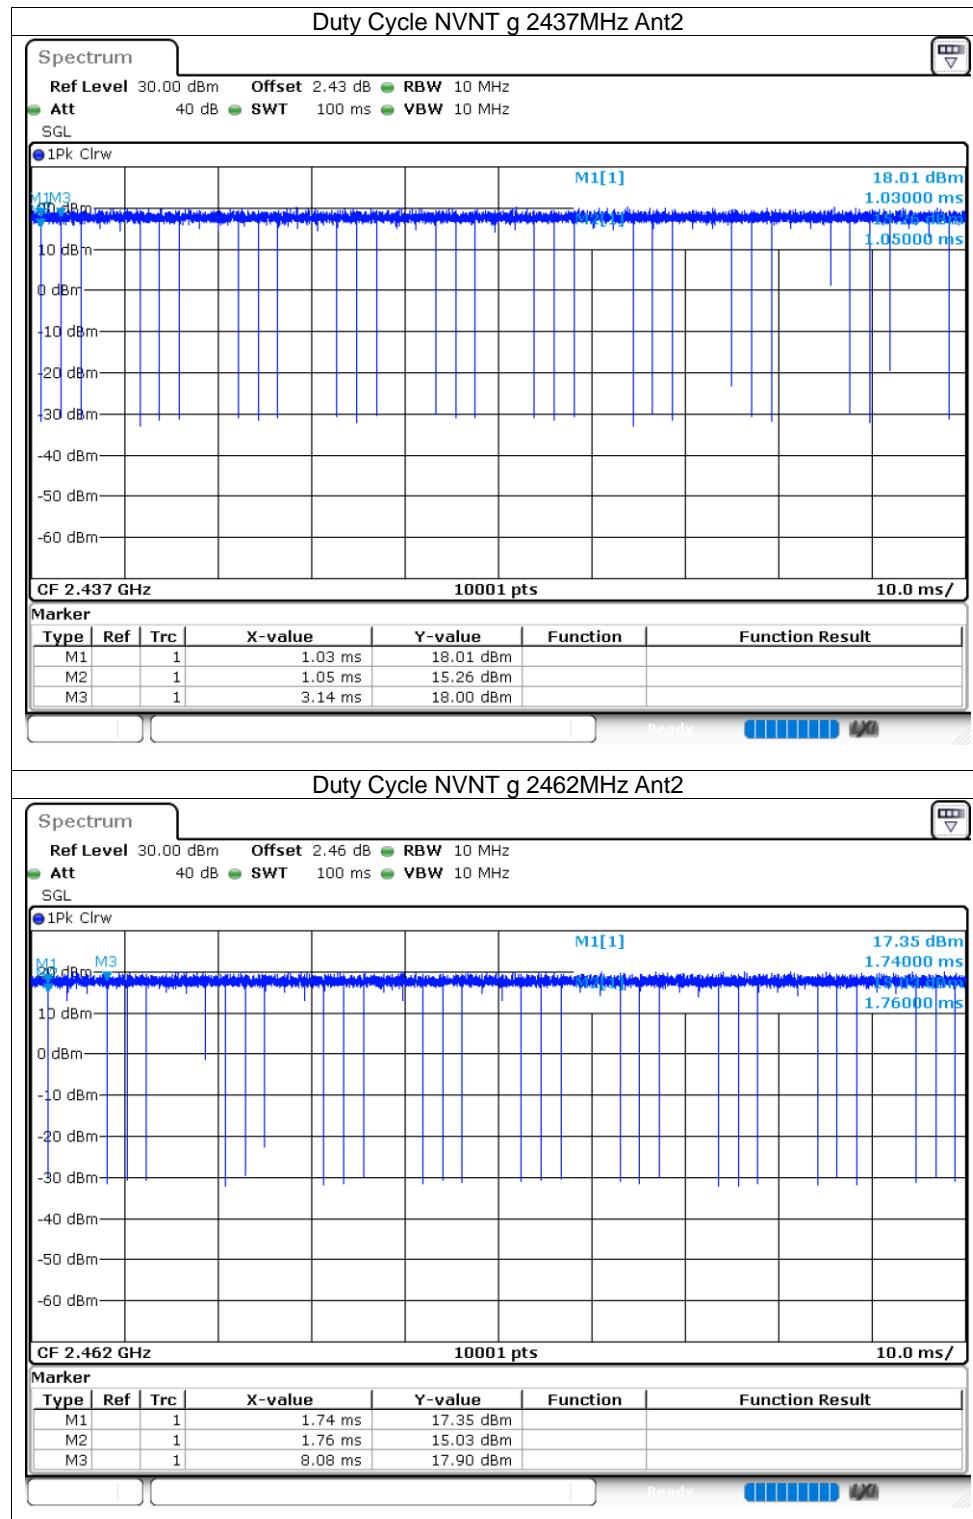


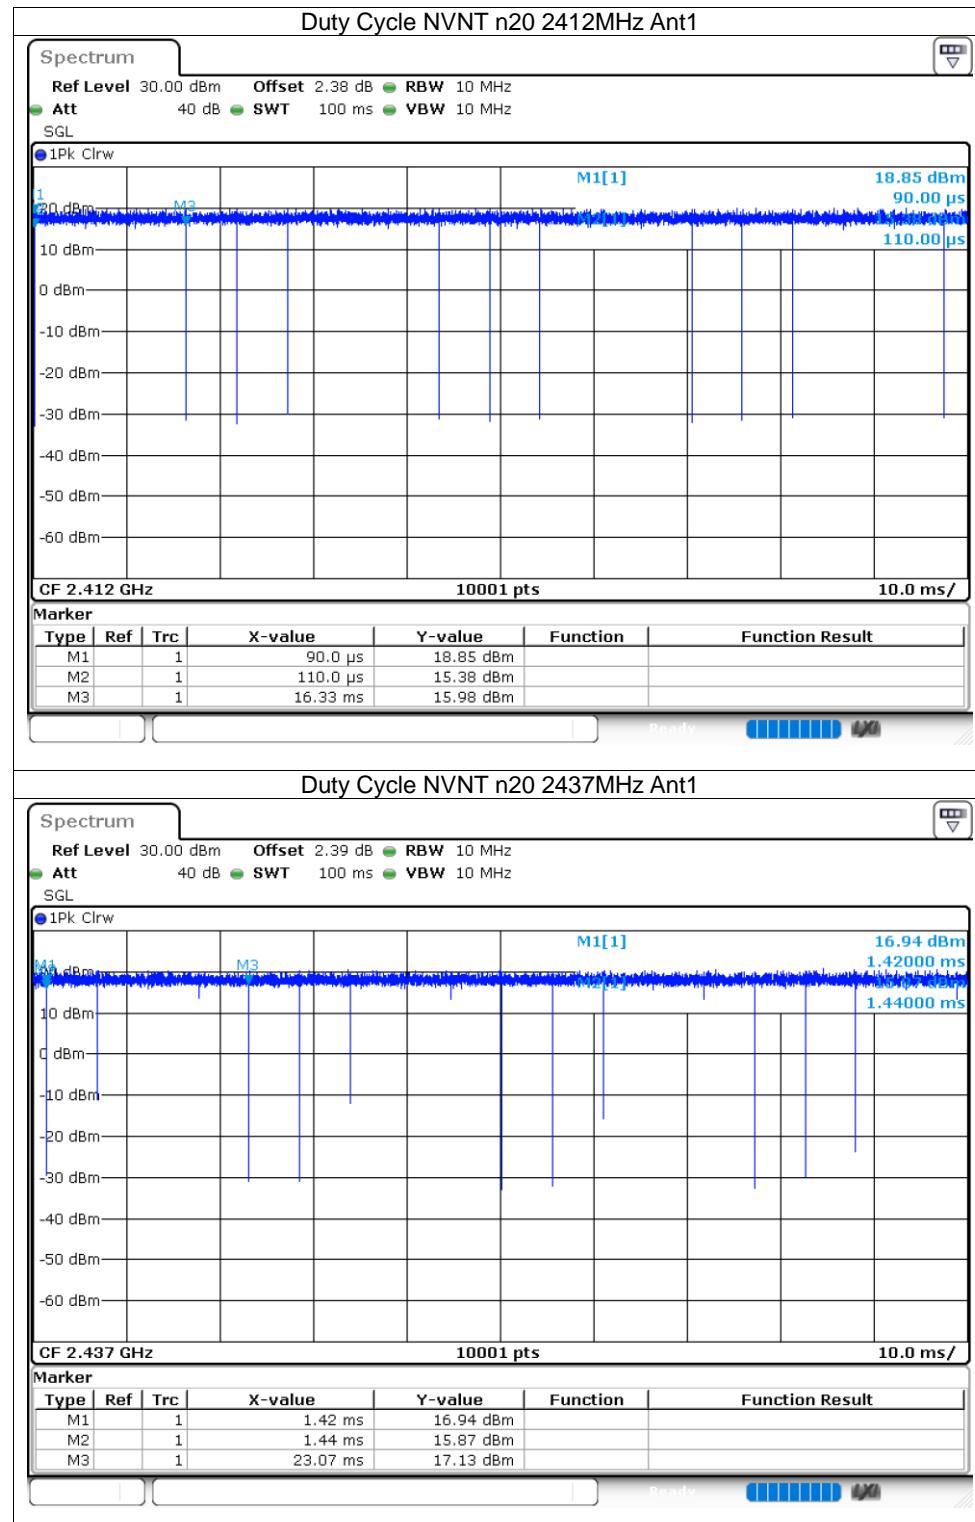


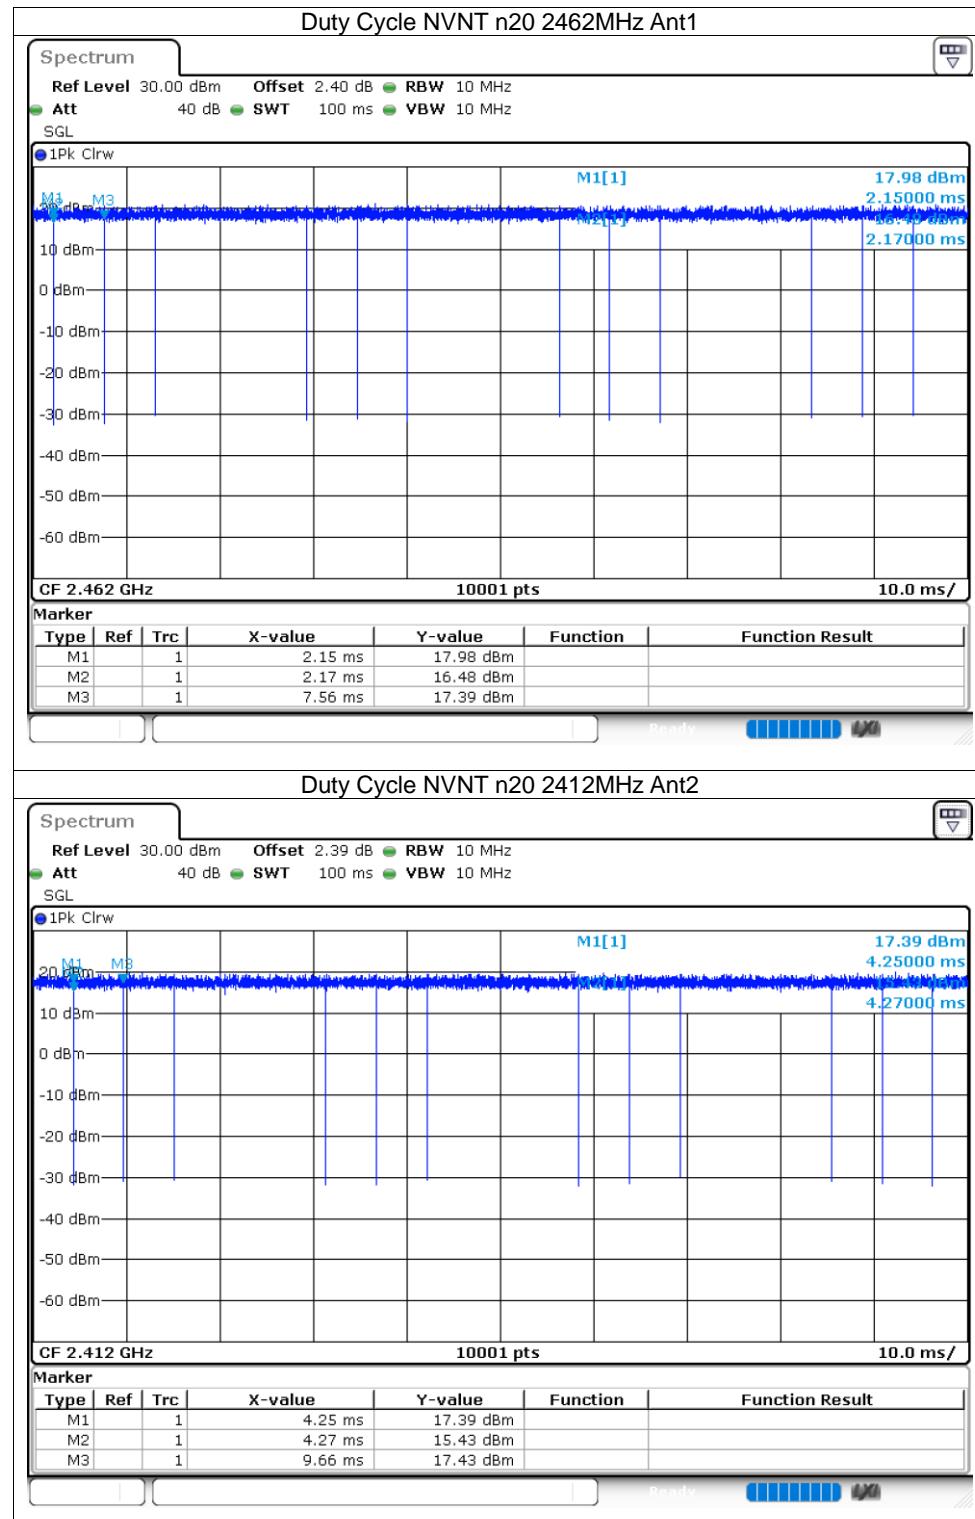


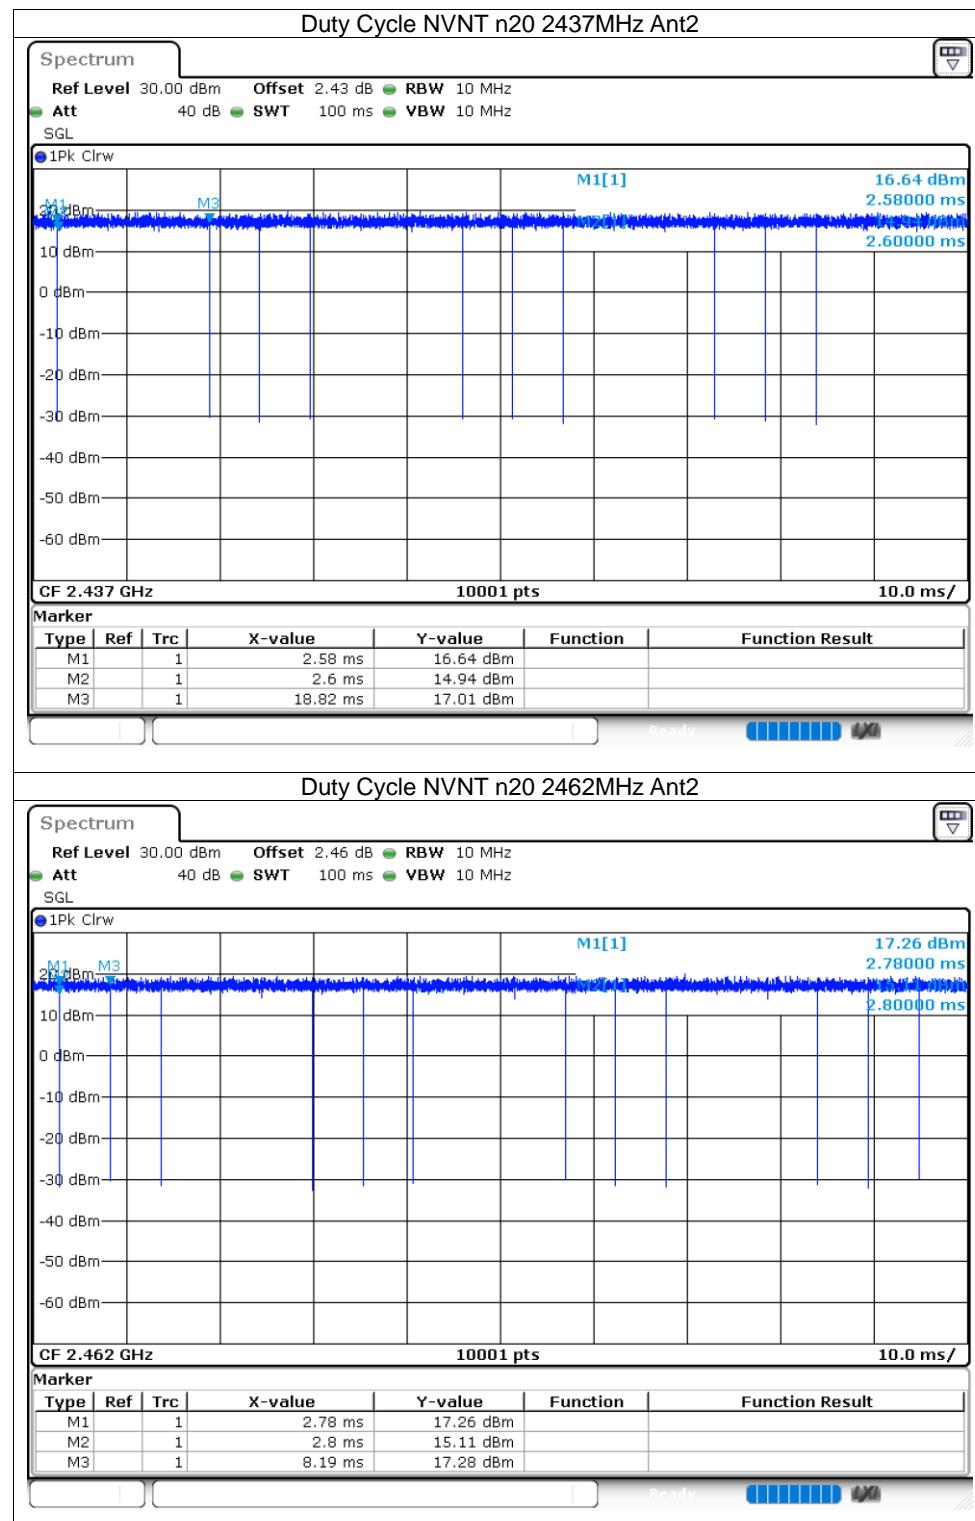


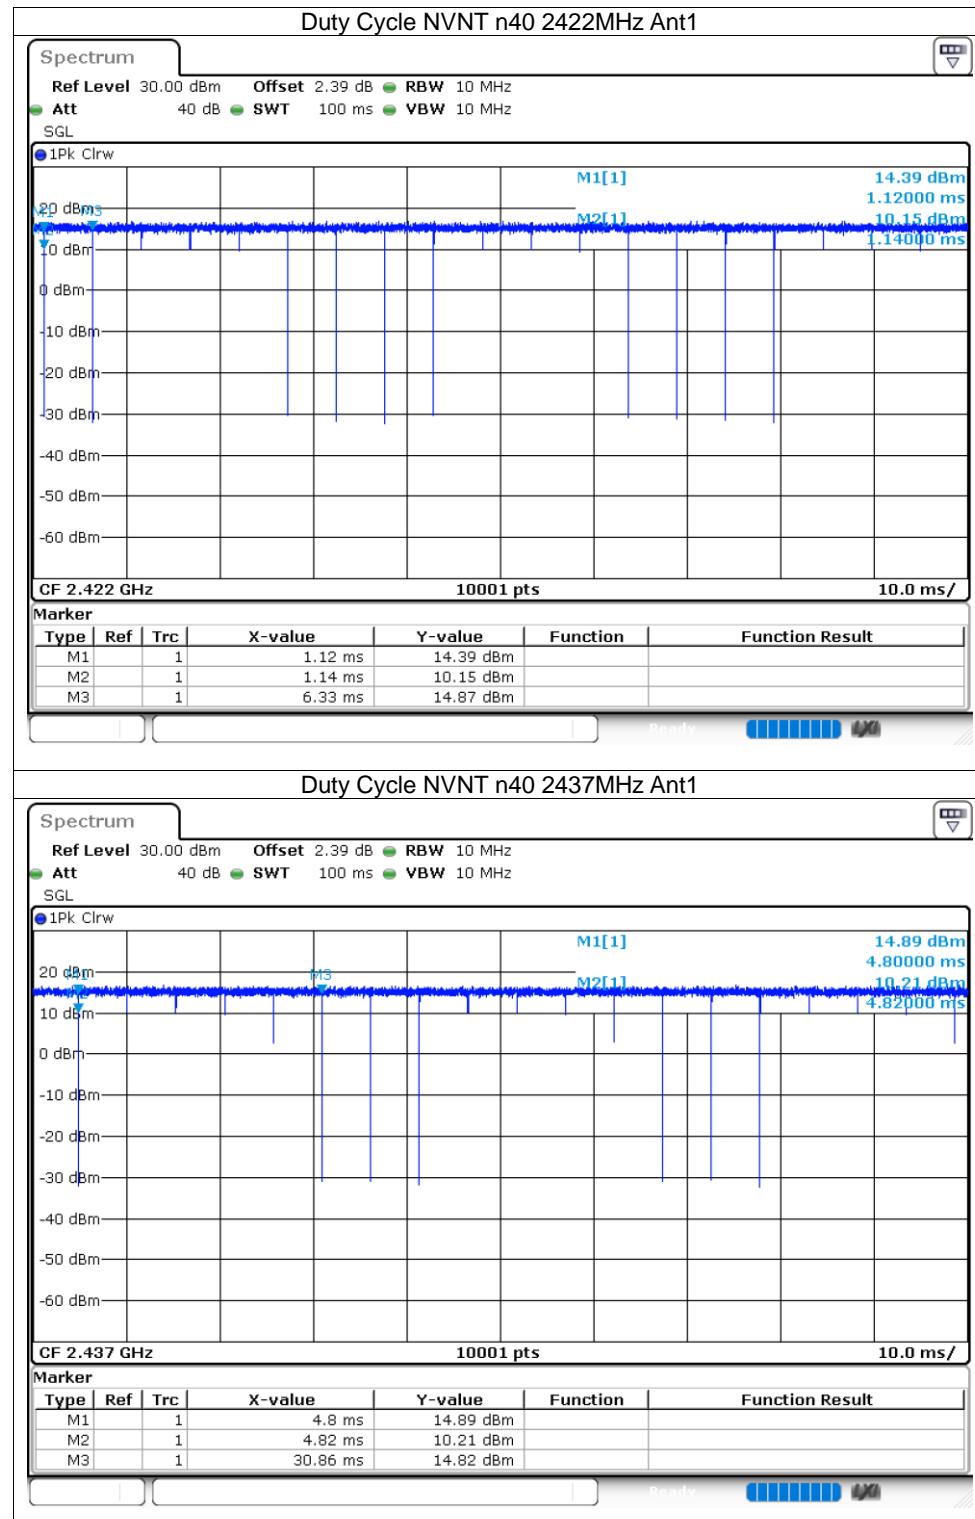


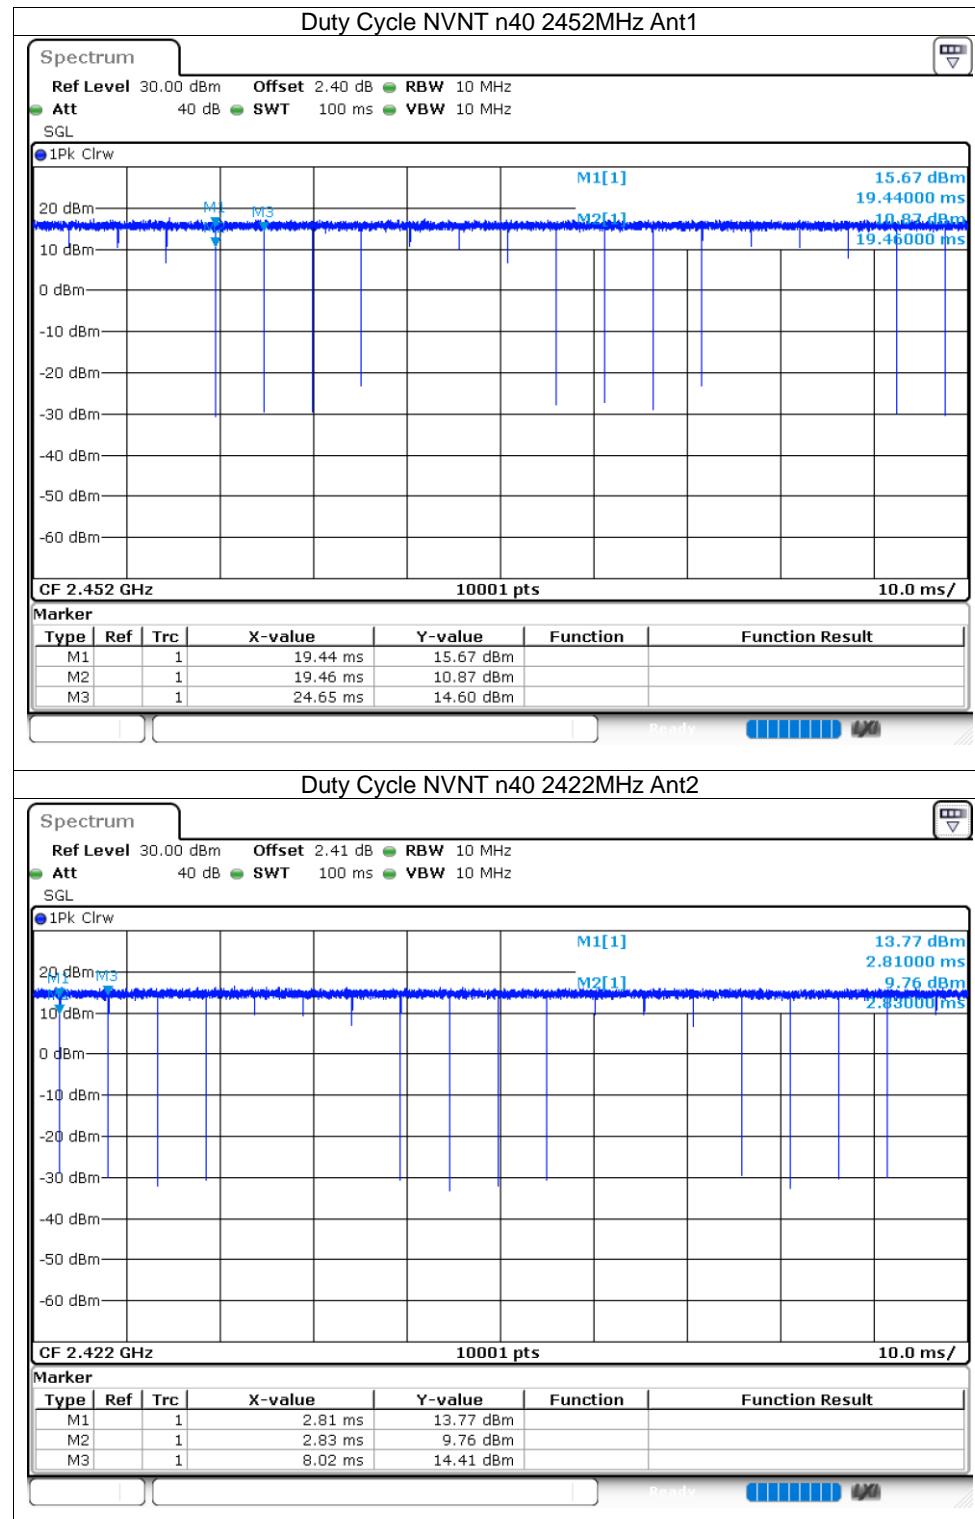


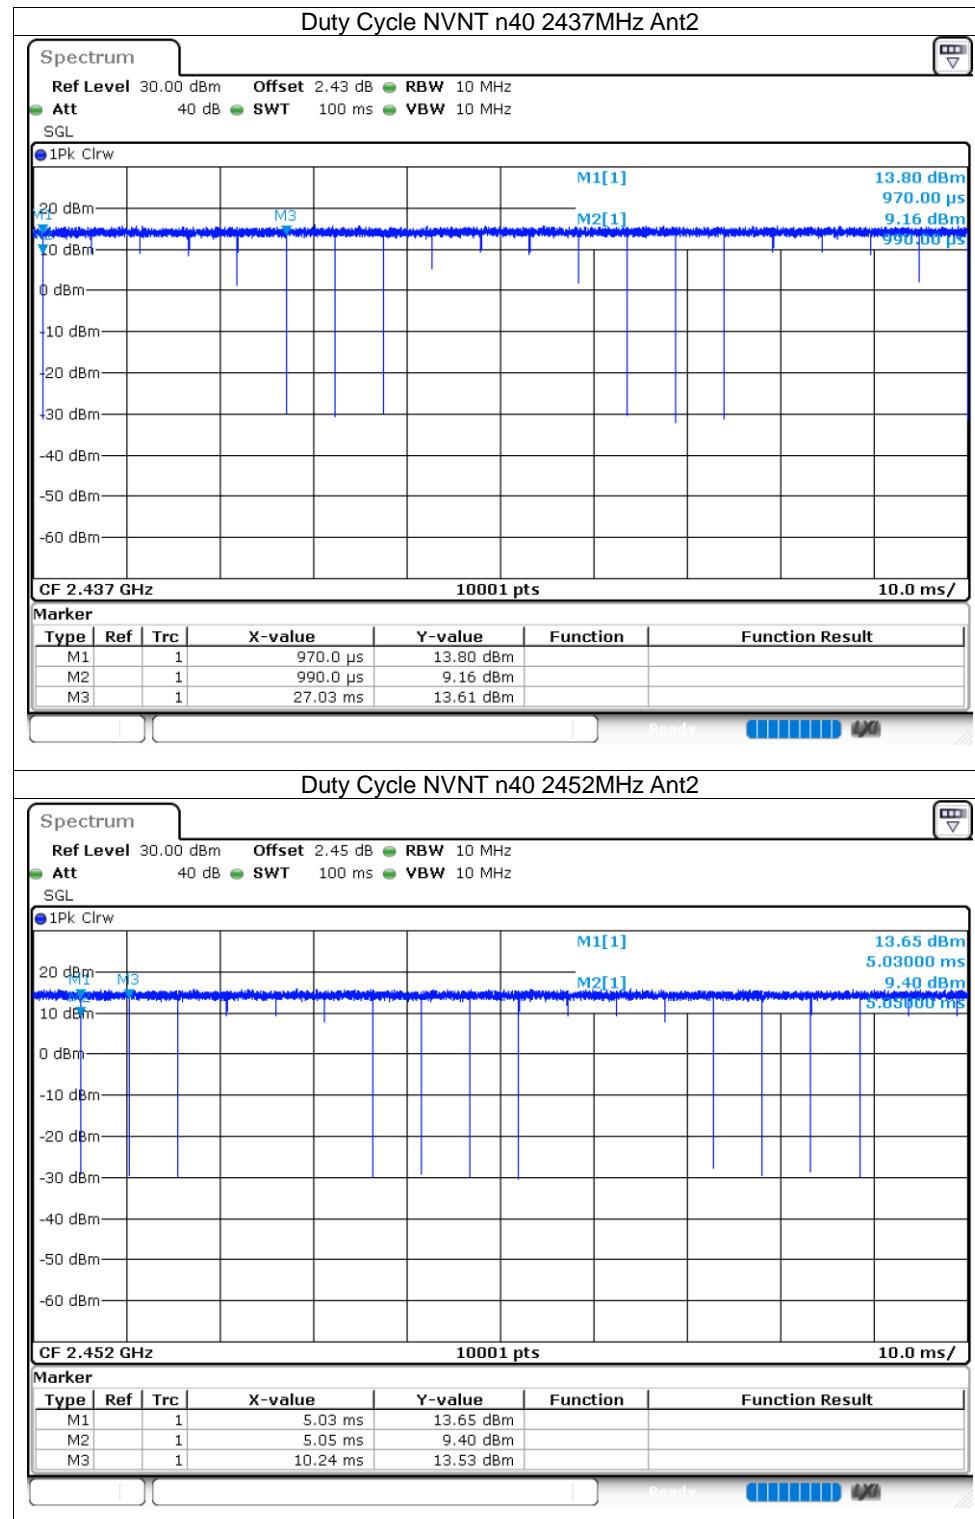


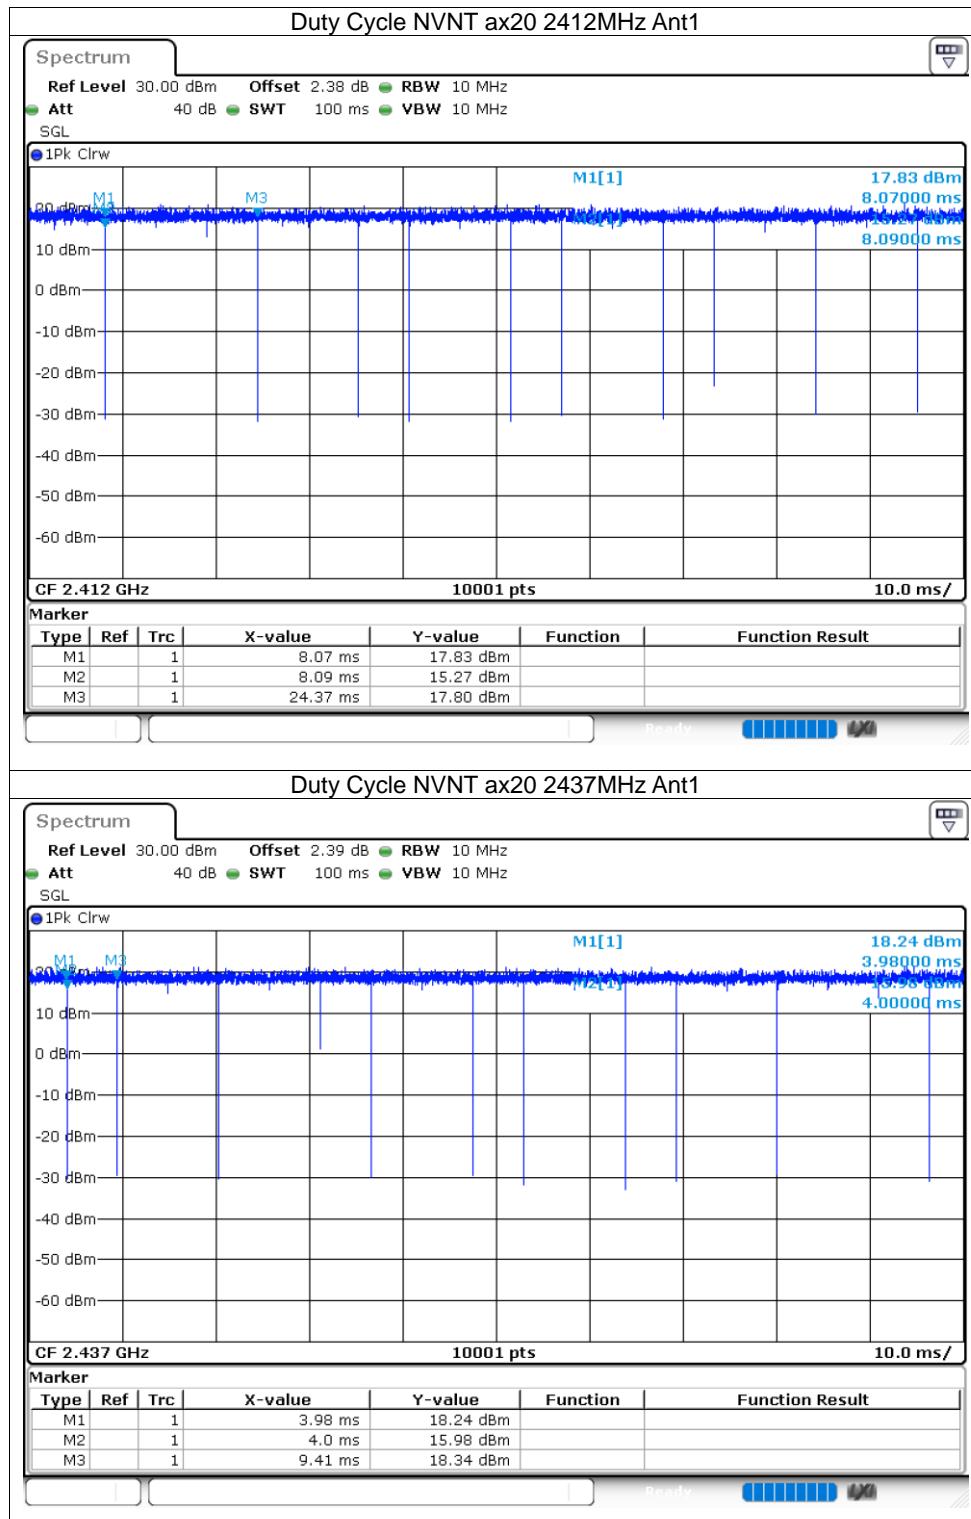


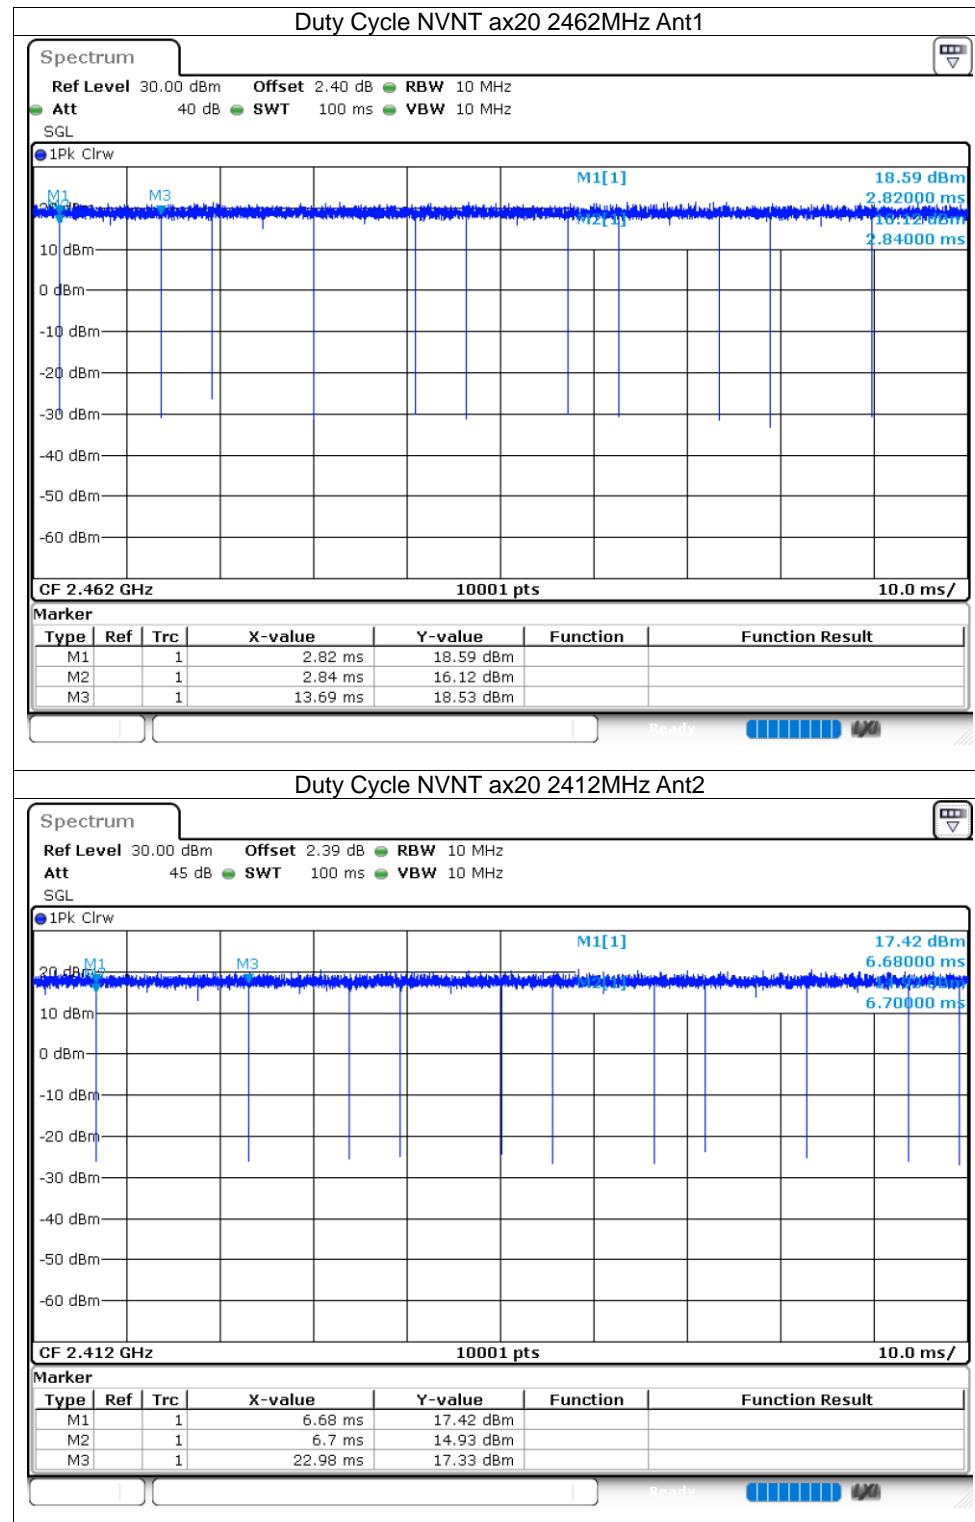

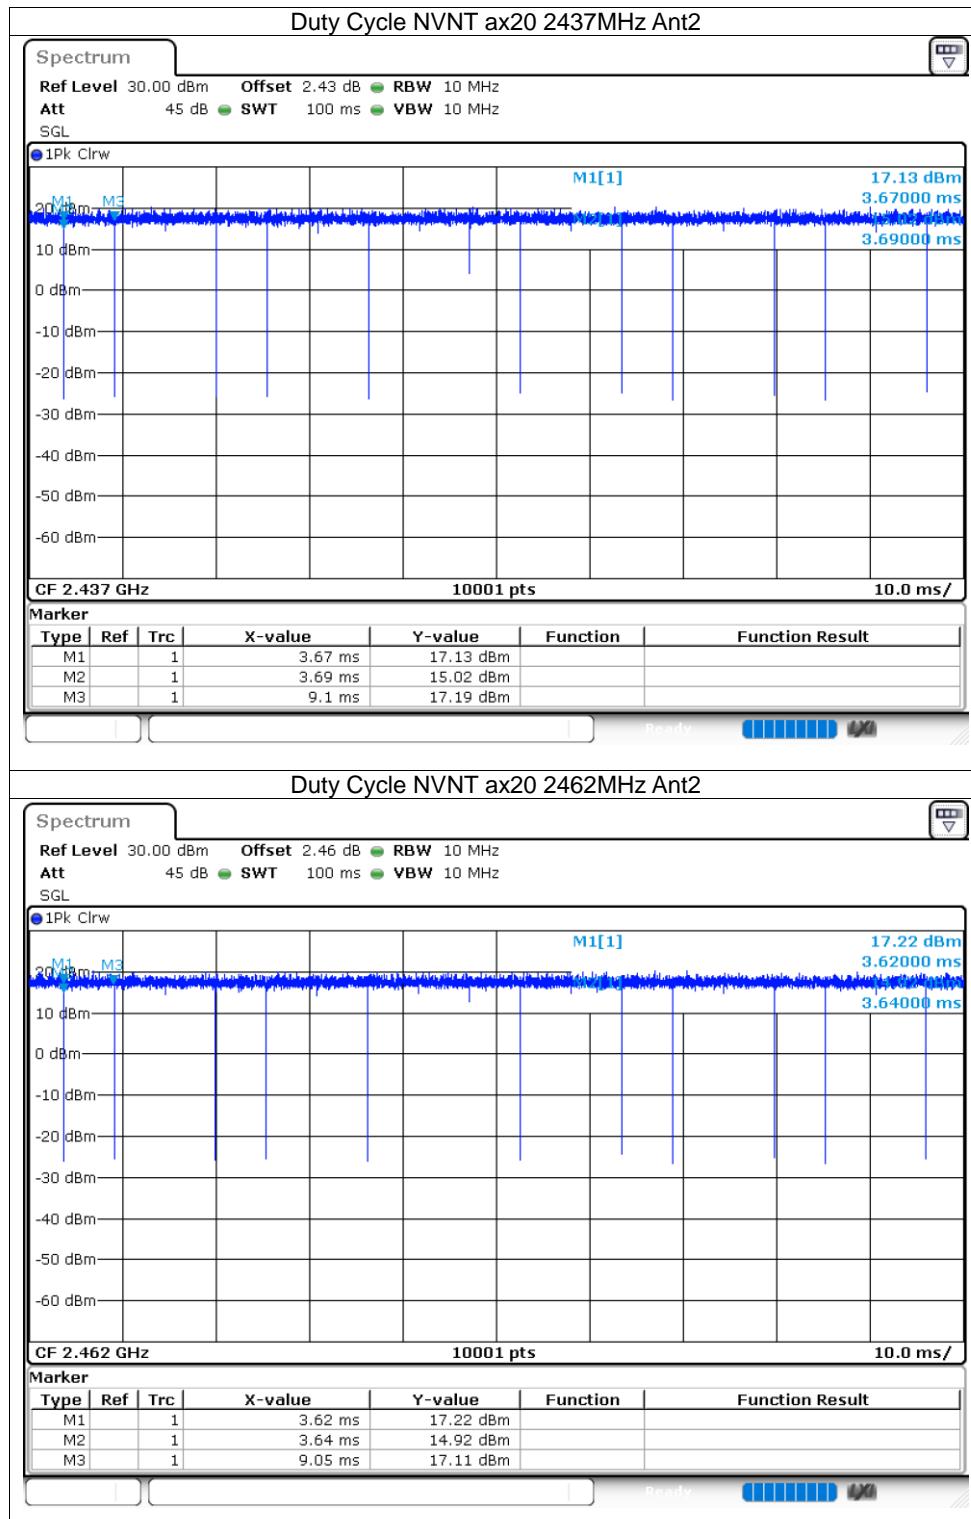

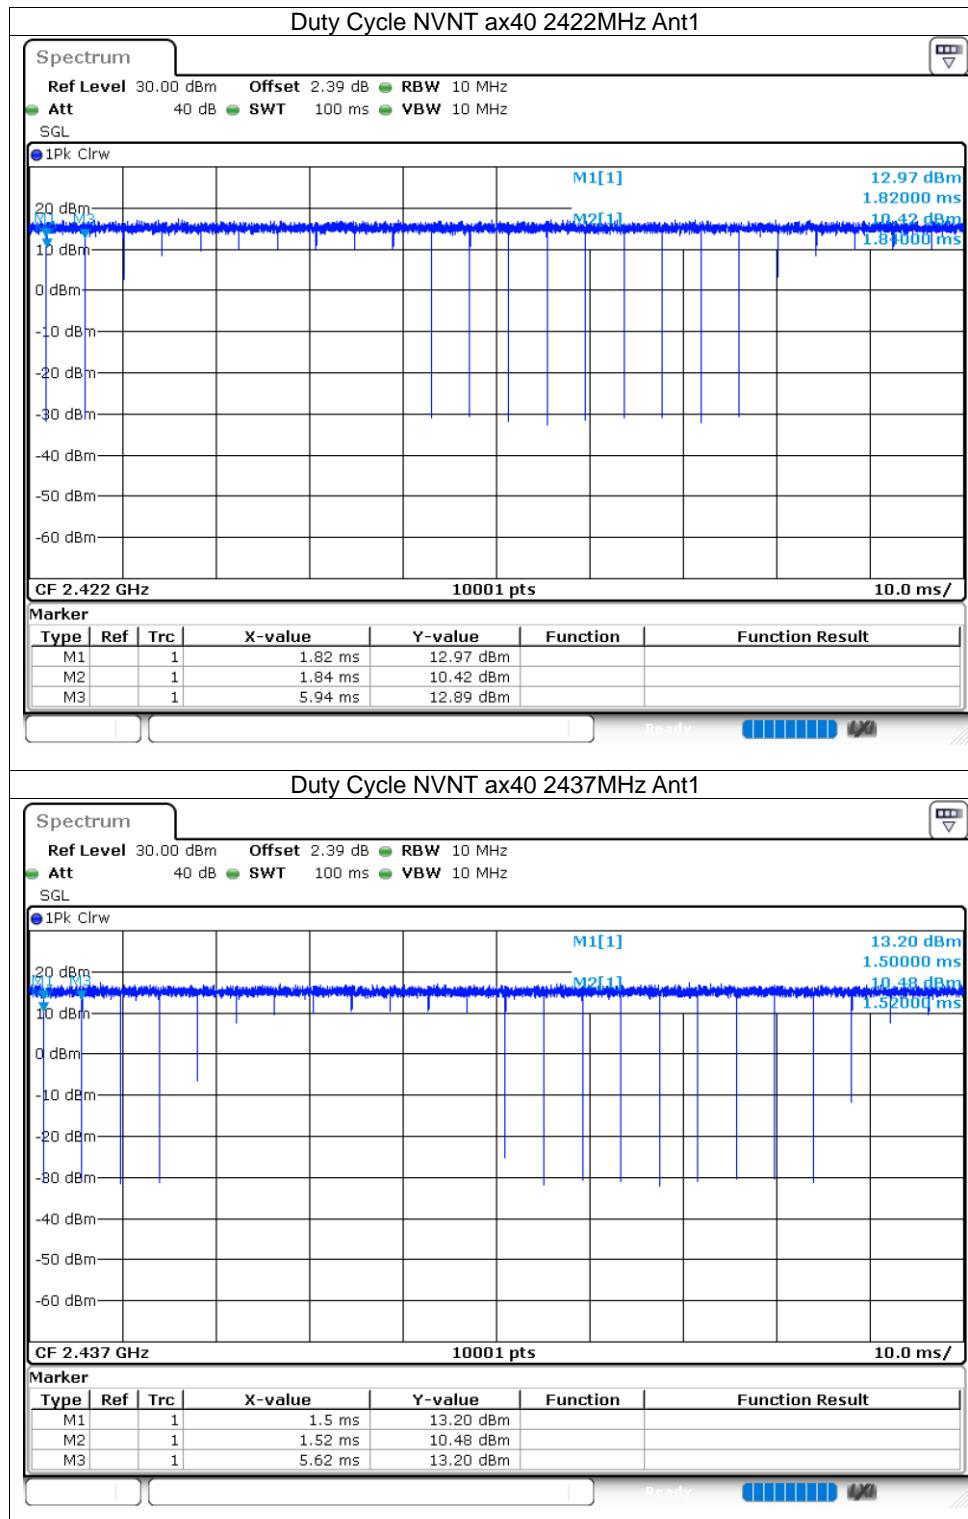

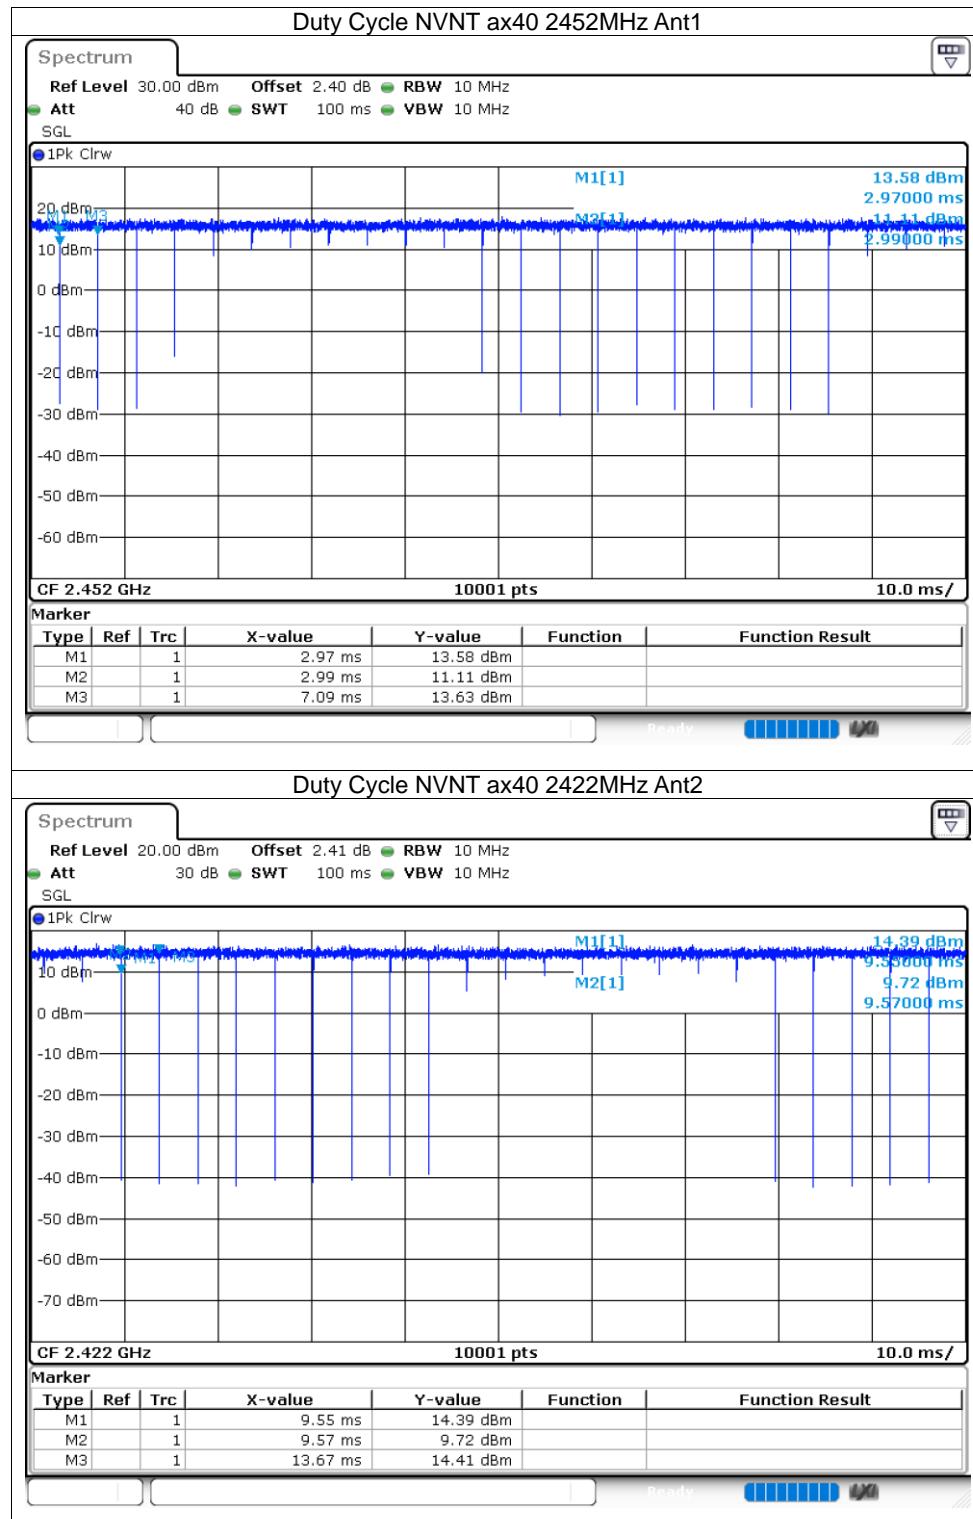

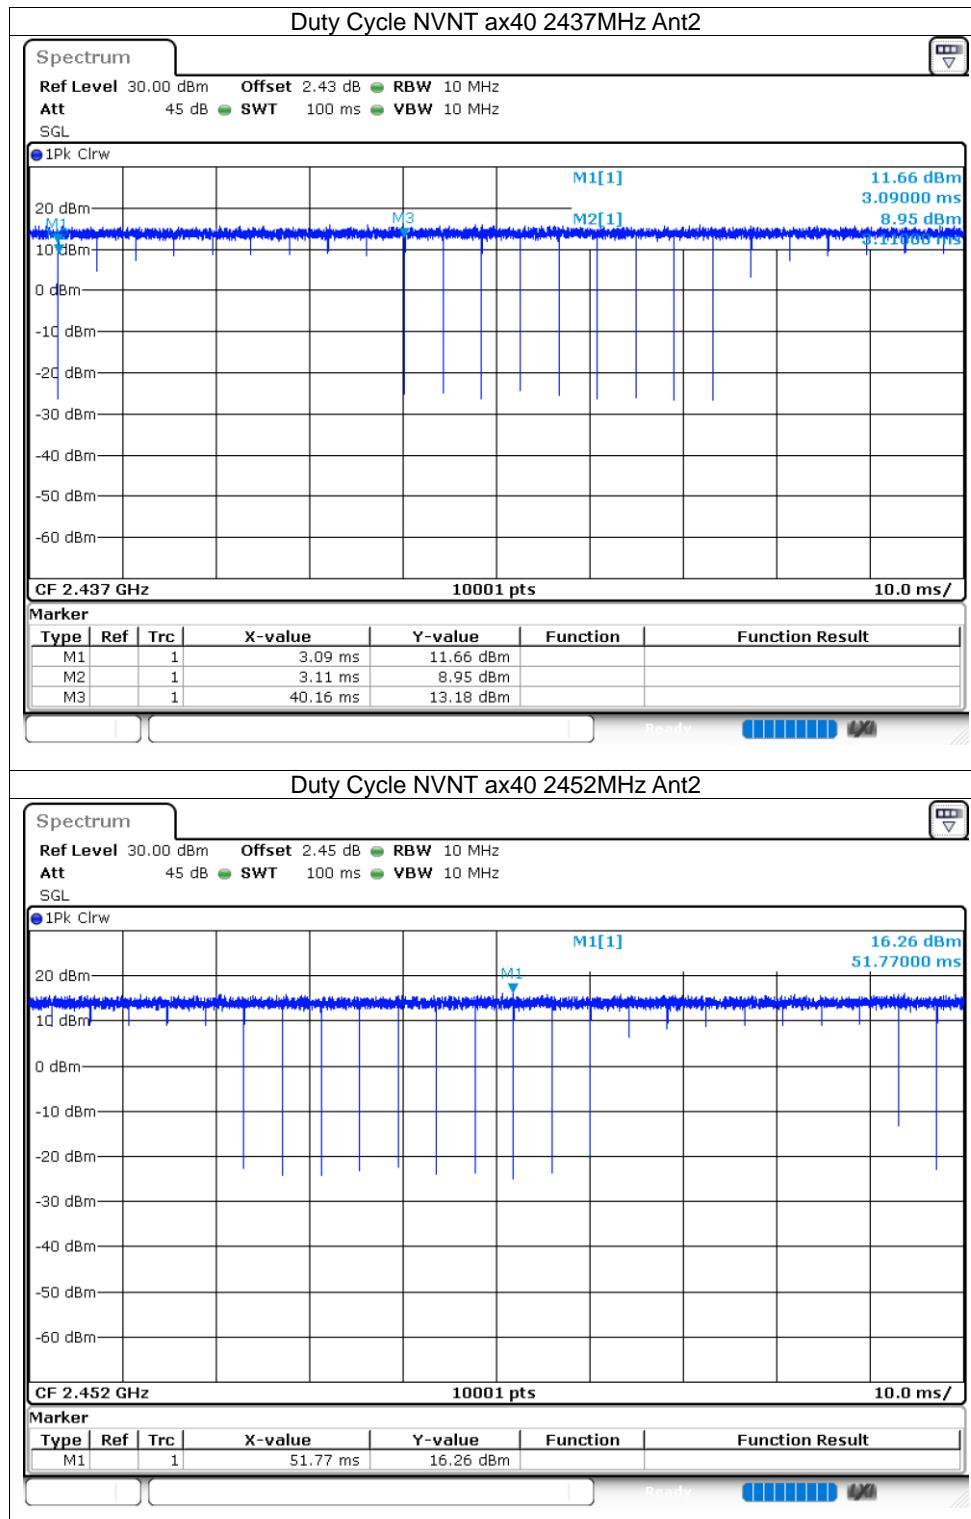

8.1.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	17.14	0	17.14	30	Pass
NVNT	b	2437	Ant1	17.63	0	17.63	30	Pass
NVNT	b	2462	Ant1	17.9	0	17.9	30	Pass
NVNT	b	2412	Ant2	17.93	0.02	17.95	30	Pass
NVNT	b	2437	Ant2	18.22	0.01	18.23	30	Pass
NVNT	b	2462	Ant2	18	0.02	18.02	30	Pass
NVNT	g	2412	Ant1	14.97	0.01	14.98	30	Pass
NVNT	g	2437	Ant1	15.64	0.01	15.65	30	Pass
NVNT	g	2462	Ant1	15.85	0.01	15.86	30	Pass
NVNT	g	2412	Ant2	14.86	0.01	14.87	30	Pass
NVNT	g	2437	Ant2	14.93	0.01	14.94	30	Pass
NVNT	g	2462	Ant2	14.84	0.01	14.85	30	Pass
NVNT	n20	2412	Ant1	14.76	0	14.76	30	Pass
NVNT	n20	2437	Ant1	15.27	0	15.27	30	Pass
NVNT	n20	2462	Ant1	15.52	0.01	15.53	30	Pass
NVNT	n20	2412	Ant2	14.55	0.01	14.56	30	Pass
NVNT	n20	2437	Ant2	14.58	0	14.58	30	Pass
NVNT	n20	2462	Ant2	14.57	0.01	14.58	30	Pass
NVNT	n40	2422	Ant1	15.15	0	15.15	30	Pass
NVNT	n40	2437	Ant1	15.42	0	15.42	30	Pass
NVNT	n40	2452	Ant1	15.58	0	15.58	30	Pass
NVNT	n40	2422	Ant2	14.66	0.01	14.67	30	Pass
NVNT	n40	2437	Ant2	14.47	0	14.47	30	Pass
NVNT	n40	2452	Ant2	14.63	0	14.63	30	Pass
NVNT	ax20	2412	Ant1	14.95	0	14.95	30	Pass
NVNT	ax20	2437	Ant1	15.46	0	15.46	30	Pass
NVNT	ax20	2462	Ant1	15.67	0	15.67	30	Pass
NVNT	ax20	2412	Ant2	14.81	0	14.81	30	Pass
NVNT	ax20	2437	Ant2	14.69	0	14.69	30	Pass
NVNT	ax20	2462	Ant2	14.72	0	14.72	30	Pass
NVNT	ax40	2422	Ant1	14.85	0	14.85	30	Pass
NVNT	ax40	2437	Ant1	14.98	0.01	14.99	30	Pass
NVNT	ax40	2452	Ant1	15.34	0.01	15.35	30	Pass
NVNT	ax40	2422	Ant2	14.27	0.01	14.28	30	Pass
NVNT	ax40	2437	Ant2	14.05	0	14.05	30	Pass
NVNT	ax40	2452	Ant2	14.25	0	14.25	30	Pass

8.1.3 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	7.65	0.5	Pass
NVNT	b	2437	Ant1	7.62	0.5	Pass
NVNT	b	2462	Ant1	7.584	0.5	Pass
NVNT	b	2412	Ant2	8.082	0.5	Pass
NVNT	b	2437	Ant2	7.605	0.5	Pass
NVNT	b	2462	Ant2	8.064	0.5	Pass
NVNT	g	2412	Ant1	16.29	0.5	Pass
NVNT	g	2437	Ant1	16.35	0.5	Pass
NVNT	g	2462	Ant1	16.305	0.5	Pass
NVNT	g	2412	Ant2	16.311	0.5	Pass
NVNT	g	2437	Ant2	16.38	0.5	Pass
NVNT	g	2462	Ant2	16.356	0.5	Pass
NVNT	n20	2412	Ant1	17.619	0.5	Pass
NVNT	n20	2437	Ant1	16.899	0.5	Pass
NVNT	n20	2462	Ant1	17.61	0.5	Pass
NVNT	n20	2412	Ant2	17.544	0.5	Pass
NVNT	n20	2437	Ant2	17.589	0.5	Pass
NVNT	n20	2462	Ant2	17.592	0.5	Pass
NVNT	n40	2422	Ant1	36.306	0.5	Pass
NVNT	n40	2437	Ant1	36.33	0.5	Pass
NVNT	n40	2452	Ant1	36.336	0.5	Pass
NVNT	n40	2422	Ant2	36.312	0.5	Pass
NVNT	n40	2437	Ant2	36.36	0.5	Pass
NVNT	n40	2452	Ant2	36.348	0.5	Pass
NVNT	ax20	2412	Ant1	19.002	0.5	Pass
NVNT	ax20	2437	Ant1	17.973	0.5	Pass
NVNT	ax20	2462	Ant1	19.014	0.5	Pass
NVNT	ax20	2412	Ant2	17.85	0.5	Pass
NVNT	ax20	2437	Ant2	19.029	0.5	Pass
NVNT	ax20	2462	Ant2	18.978	0.5	Pass
NVNT	ax40	2422	Ant1	38.064	0.5	Pass
NVNT	ax40	2437	Ant1	37.986	0.5	Pass
NVNT	ax40	2452	Ant1	37.734	0.5	Pass
NVNT	ax40	2422	Ant2	37.92	0.5	Pass
NVNT	ax40	2437	Ant2	38.052	0.5	Pass
NVNT	ax40	2452	Ant2	37.968	0.5	Pass

