

Prüfbericht-Nr.: Test report no.:	60404472 001	Auftrags-Nr.: Order no.:	238489137	Seite 1 von 28 Page 1 of 28
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	08-Jul-2020	
Auftraggeber: Client:	Sandbox Smart Technology Co., Ltd. 15F.-4, No. 2, Jian 8th Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)			
Prüfgegenstand: Test item:	Sandbox Smart R1 Roaster			
Bezeichnung / Typ-Nr.: Identification / Type no.:	Sandbox Smart R1			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (BLE)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	16-Jul-2020			
Prüfmuster-Nr.: Test sample no.:	A002868477-015 A002868477-021			
Prüfzeitraum: Testing period:	22-Jul-2020 – 29-Jul-2020			
Ort der Prüfung: Place of testing:	EMC/RF Laboratory Taipei			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: reviewed by:		genehmigt von authorized by:		
Datum: 30-Jul-2020 Date:	Ryan W.T. Chen	Datum: 30-Jul-2020 Date:	Brenda S.H. Chen	
Stellung / Position:	Project Engineer	Stellung / Position:	Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
<p>* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet</p> <p>* Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested</p>				
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass
6.1	FCC KDB 447498 D01 v06	RF Exposure Compliance	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS	10
4. TEST SET-UP AND OPERATION MODES	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL	11
4.3 TEST OPERATION AND TEST SOFTWARE	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	14
4.6 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1 <i>Antenna Requirement</i>	15
5.1.2 <i>Peak Output Power</i>	16
5.1.3 <i>6dB Bandwidth and 99% Occupied Bandwidth</i>	18
5.1.4 <i>Power Spectral Density</i>	19
5.1.5 <i>Conducted Spurious Emissions and Frequency Band Edges measured in 100kHz Bandwidth</i>	20
5.1.6 <i>Radiated Spurious Emissions and Band Edges</i>	21
5.2 MAINS EMISSION	26
5.2.1 <i>Mains Conducted Emission</i>	26
6. SAFETY HUMAN EXPOSURE	28

Prüfbericht - Nr.: 60404472 001
Test Report No.

Seite 4 von 28
Page 4 of 28

6.1 RF EXPOSURE COMPLIANCE	28
6.1.1 SAR Test Exclusion Thresholds.....	28

APPENDIX A - TEST RESULT OF CONDUCTED

**APPENDIX B - TEST RESULT OF RADIATED SPURIOUS EMISSIONS & MAINS CONDUCTED
EMISSION**

APPENDIX C - PHOTO DOCUMENTATION_TEST SETUP PHOTO

APPENDIX D - PHOTO DOCUMENTATION_EUT PHOTO

Prüfbericht - Nr.: **60404472 001**
Test Report No.

Seite 5 von 28
Page 5 of 28

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
60404472 001	Original Release	30-Jul-2020

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Spurious Emissions & Mains Conducted Emission

Appendix C - Photo Documentation_Test Setup Photo

(File Name: 60404472 001 Appendix C)

Appendix D - Photo Documentation_EUT Photo

(File Name: 60404472 001 Appendix D)

Applied Standard and Test Levels

Radio

FCC CFR47 Part 15: Subpart C Section 15.247

ANSI C63.10:2013

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 447498 D01 General RF Exposure Guidance v06

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

Prüfbericht - Nr.: **60404472 001**
Test Report No.

Seite 7 von 28
Page 7 of 28

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
(Conducted Test & Radiated Spurious Emissions)
FCC Registration No.: 226631
ISED Registration No.: 25563



2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Sandbox Smart R1 Roaster. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Sandbox Smart R1 Roaster
Type Identification	Sandbox Smart R1
FCC ID	2AW85-384R1A

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel number	40
Data Rate	1Mbps
Operation Voltage	120Vac
Modulation	GFSK
Maximum Output Power (mW)	1.93
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Prüfbericht - Nr.: 60404472 001
Test Report No.

Seite 10 von 28
Page 10 of 28

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	Default
2440	Default
2480	Default

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	RTL8762C_RFTestTool_v1.0.0.8
---------------	------------------------------

The samples were used as follows:

A002868477-015 for conducted

A002868477-021 for radiated

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

1. "-" means no effect.

Antenna Port Conducted Measurement

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Above 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

Radiated Spurious Emissions (Below 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Mains Conducted Emission

Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Prüfbericht - Nr.: 60404472 001
Test Report No.Seite 13 von 28
Page 13 of 28**Test Condition**

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22-26 °C	50-65 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	22-26 °C	50-65 %	Eagle Tsai
Radiated Spurious Emissions below 1 GHz	22-26 °C	50-65 %	Eagle Tsai
Mains Conducted Emission	22-26 °C	50-65 %	Aslen Chiu

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT

N/A

Support Unit


Item No.	Description	Manufacturer	Model No.	Serial No.	Length (cm)
1	Notebook	Lenovo	15s-du0007TX	CND93662RL	-
A	Signal Cable	-	-	-	150
B	Power Cable	-	-	-	130

4.5 Countermeasures to Achieve EMC Compliance


The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.6 Test Setup Diagram

<Radiated Spurious Emissions>

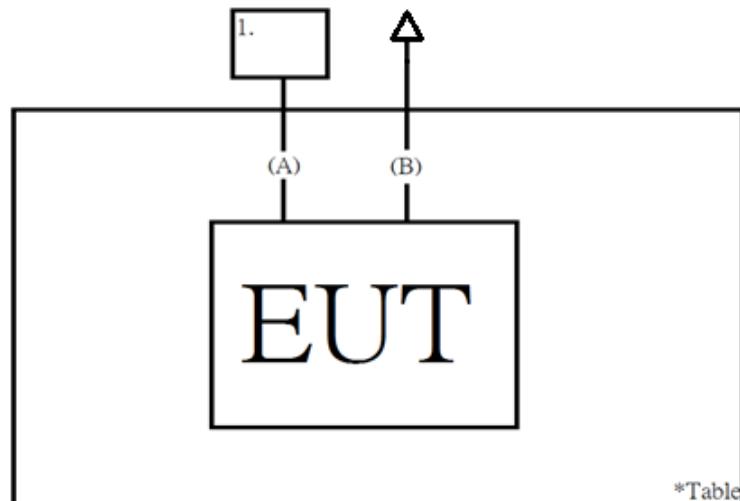

<Mains Conducted Emission mode >

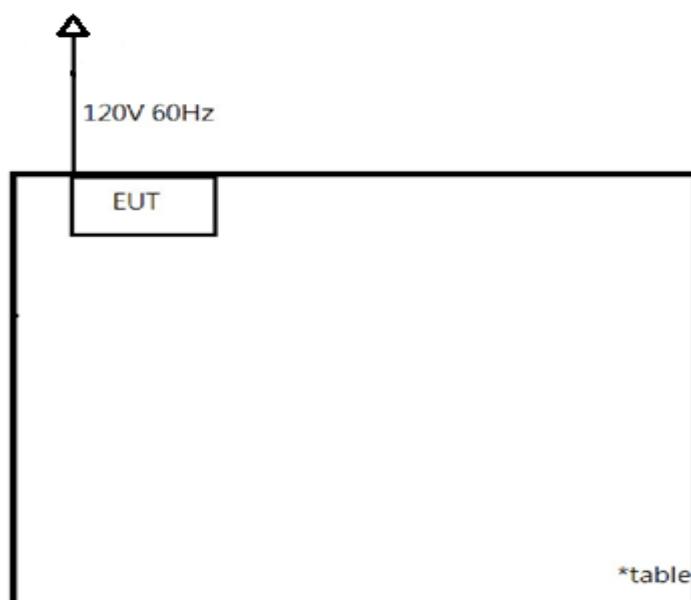

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 1.63 dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

Prüfbericht - Nr.: 60404472 001
Test Report No.Seite 16 von 28
Page 16 of 28**5.1.2 Peak Output Power****Limit** 1 watt (30 dBm)**Kind of Test Site** Shielded room**Test Setup****Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Power Meter	Anritsu	ML2495A	1901008	2020/4/6	2021/4/5
Power Sensor	Anritsu	MA2411B	1725269	2020/4/7	2021/4/6

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Prüfbericht - Nr.: 60404472 001
Test Report No.

Seite 17 von 28
Page 17 of 28

Test Result

Peak Output Power

<1Mbps>

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (dBm)
		(dBm)	(mW)	
Low Channel	2402	2.83	1.92	30
Middle Channel	2440	2.80	1.91	30
High Channel	2480	2.85	1.93	30

Average Power

<1Mbps>

Channel	Channel Frequency (MHz)	Average Power	
		(dBm)	(mW)
Low Channel	2402	2.71	1.87
Middle Channel	2440	2.67	1.85
High Channel	2480	2.73	1.87

Prüfbericht - Nr.: 60404472 001
Test Report No.


Seite 18 von 28
Page 18 of 28

5.1.3 6dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup

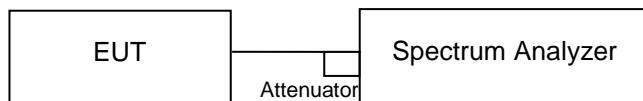

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.

Prüfbericht - Nr.: 60404472 001
Test Report No.

Seite 19 von 28
Page 19 of 28


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup

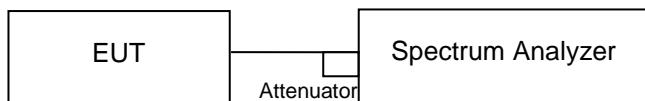

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

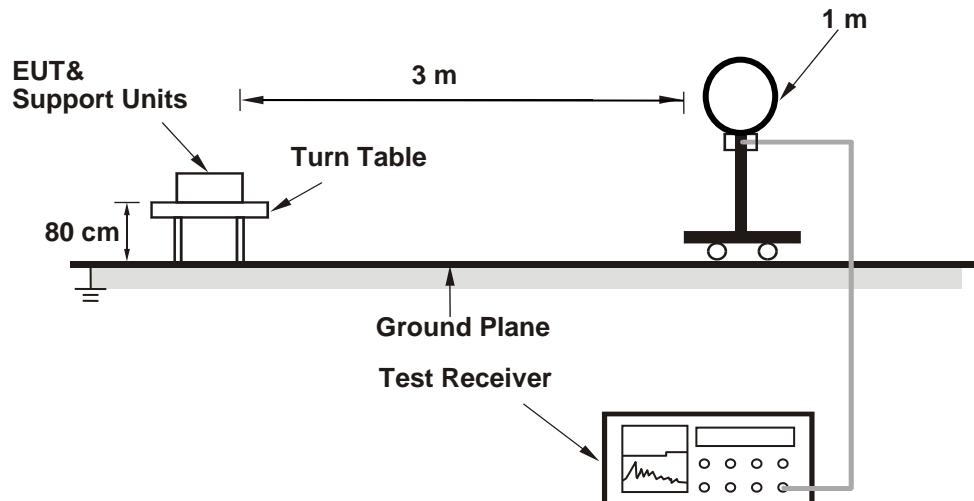

<Radiated Emissions 30 MHz to 1 GHz>

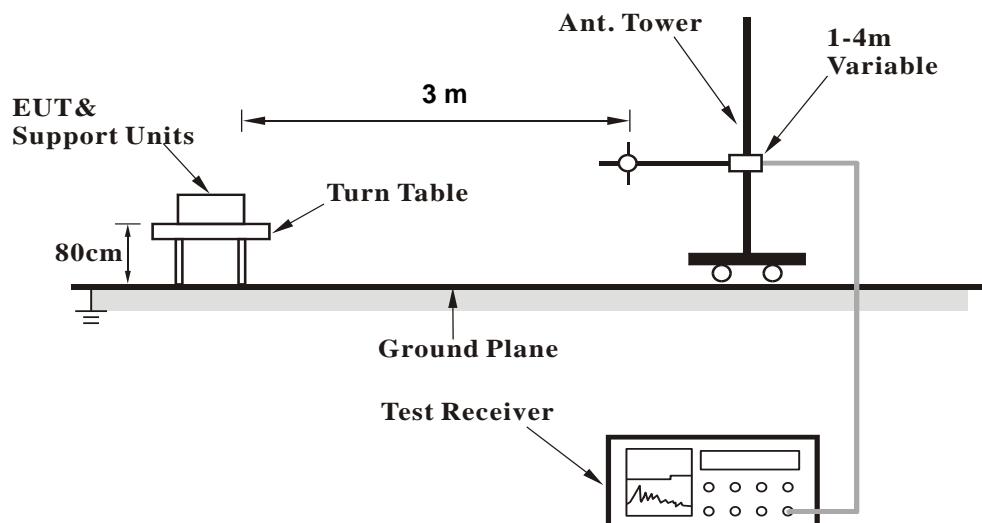

<Radiated Emissions above 1 GHz>

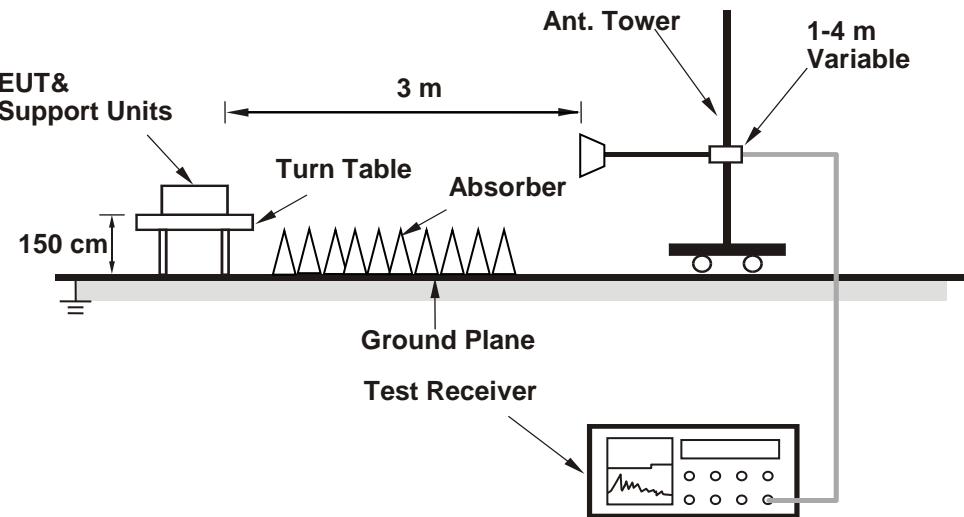

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: 60404472 001
Test Report No.

Seite 23 von 28
Page 23 of 28

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101509	2020/5/5	2021/5/4
Receiver	R&S	ESR7	102109	2020/3/30	2021/3/29
Bilog Antenna	SCHWARZBECK	VULB-9168	00950	2020/1/20	2021/1/18
Horn Antenna	ETS-Lindgren	3117	00218929	2019/11/27	2020/11/25
LF-AMP	Agilent	8447D	2727A05146	2020/2/17	2021/2/15
HF-AMP + AC source	EMCI	EMC051845SE	980635	2020/2/11	2021/2/9
HF-AMP + AC source	EMCI	EMC184045SE	980656	2020/2/11	2021/2/9
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2020/4/13	2021/4/12
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800057/4EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	802244/4	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37203/4	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800897/2EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800902/2EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801026/2EA	2020/3/25	2021/3/24
Loop Antenna	Chance Most	EMCILPA600 +calibration	287	2020/1/9	2021/1/7

Prüfbericht - Nr.: 60404472 001
Test Report No.

Seite 24 von 28
Page 24 of 28

Test Procedures

For Radiated Emissions below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle $\geq 98 \%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: **60404472 001**
Test Report No.

Seite 25 von 28
Page 25 of 28

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

Prüfbericht - Nr.: 60404472 001
Test Report No.

Seite 26 von 28
Page 26 of 28

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site **Shielded room**

Test Setup

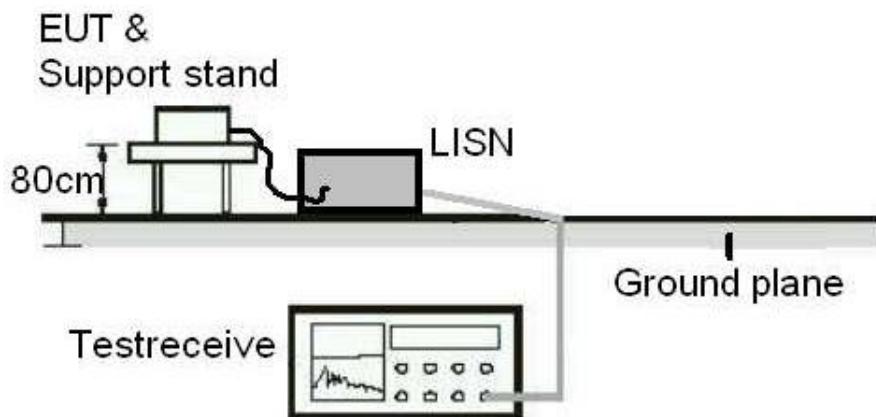

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	SCHHWARZBECK	NSLK 8127	8127-00976	2019/10/2	2020/9/30
EMI Test Receiver	R&S	ESR7	102108	2020/4/22	2021/4/21
10dB attenuation	SCHHWARZBECK	VTSD 9561 F-N	660	2020/2/24	2021/2/23
Measurement Software	EZ	EZ_EMU (Version NB-03A)	N/A	N/A	N/A

Prüfbericht - Nr.: **60404472 001**
Test Report No.

Seite 27 von 28
Page 27 of 28

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.

6. Safety Human Exposure

6.1 RF Exposure Compliance

6.1.1 SAR Test Exclusion Thresholds

Results


Since the maximum output power of the transmitter is $1.93 \text{ mW} < 10 \text{ mW}$ (Distance: 5 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.

Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth

BLE_1M


Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	674.33	> 500	Pass
Middle Channel	2440	695.30	> 500	Pass
High Channel	2480	737.26	> 500	Pass

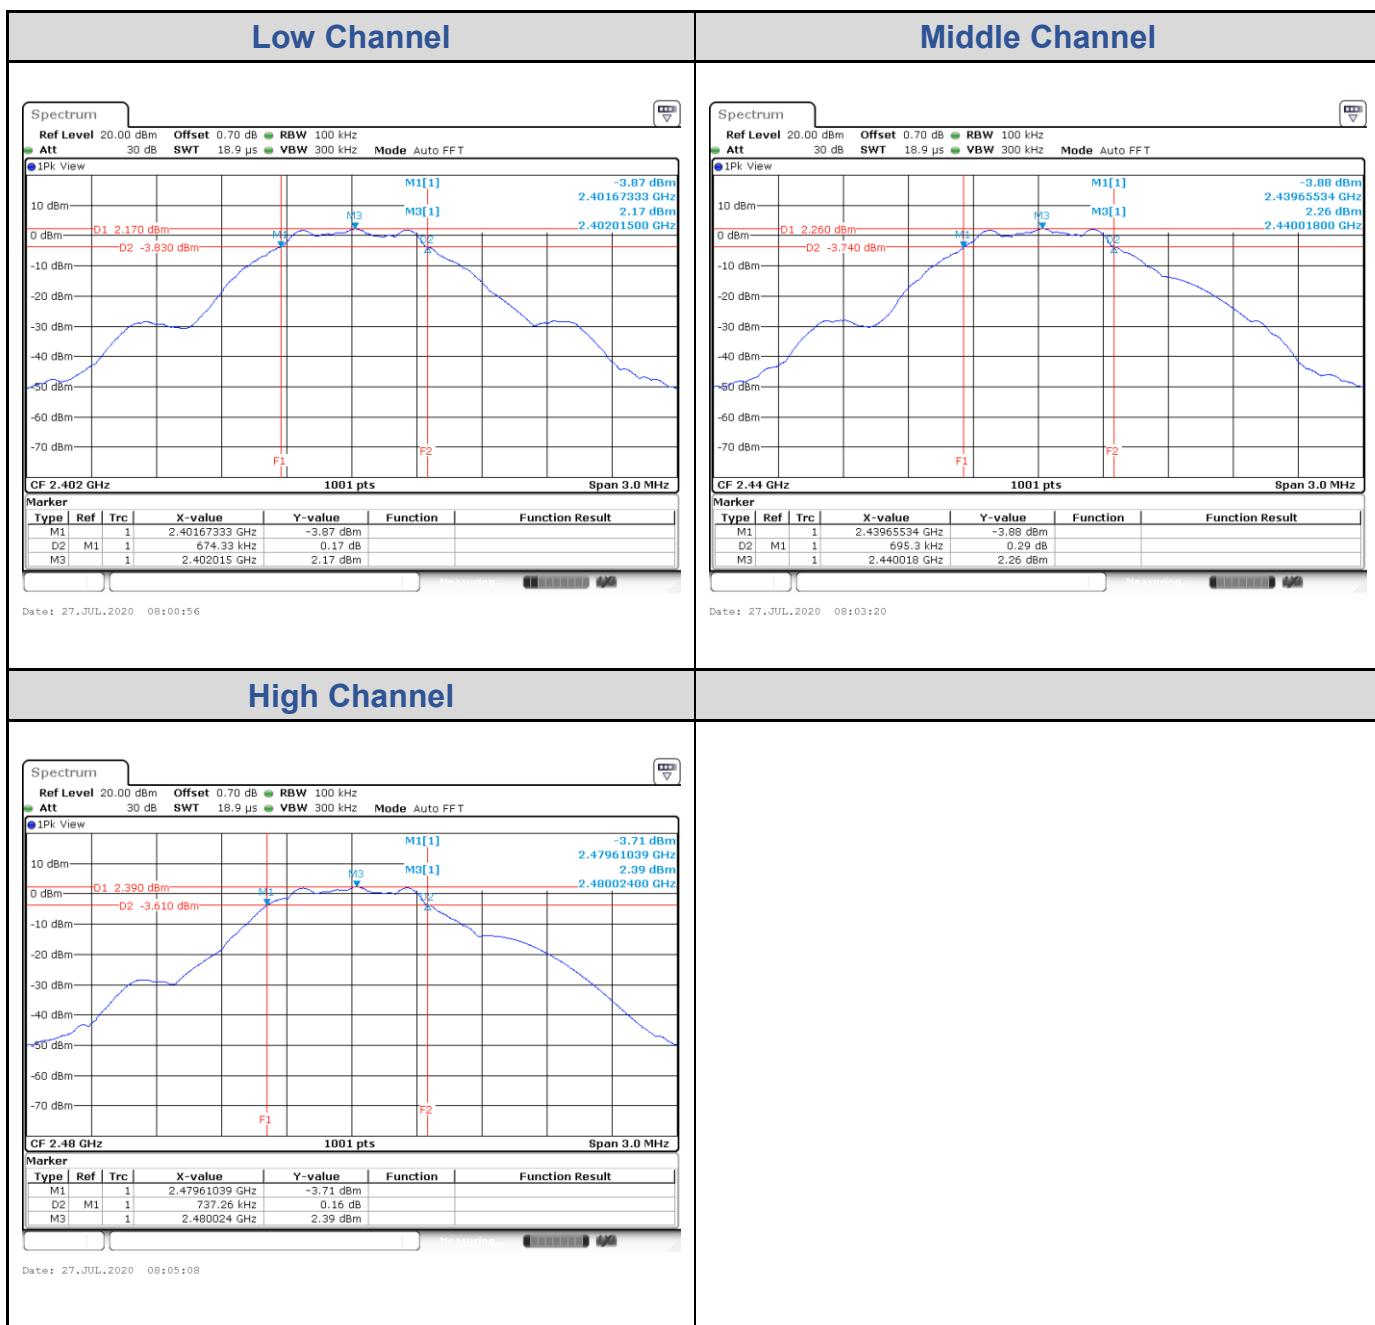

Test Result of 99% Occupied Bandwidth

BLE_1M


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.03
Middle Channel	2440	1.06
High Channel	2480	1.07

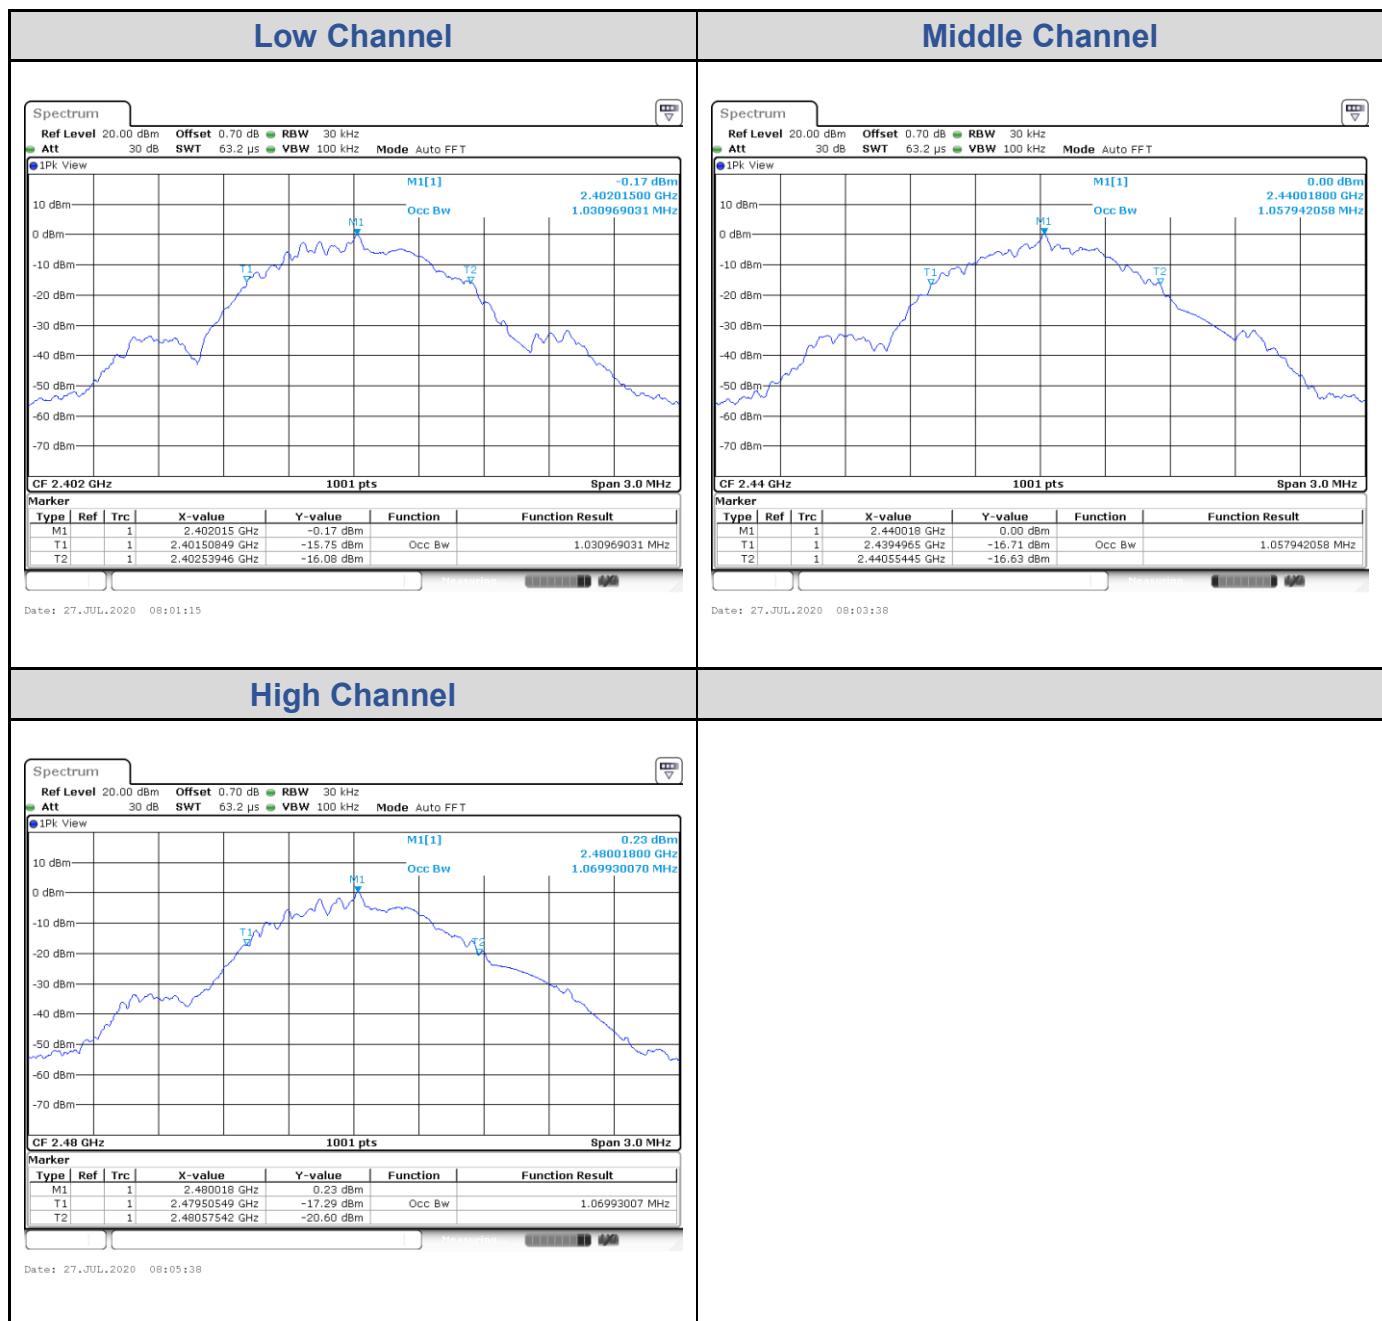



Test Result of Power Spectral Density

BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-12.22	8	Pass
Middle Channel	2440	-13.73	8	Pass
High Channel	2480	-13.49	8	Pass

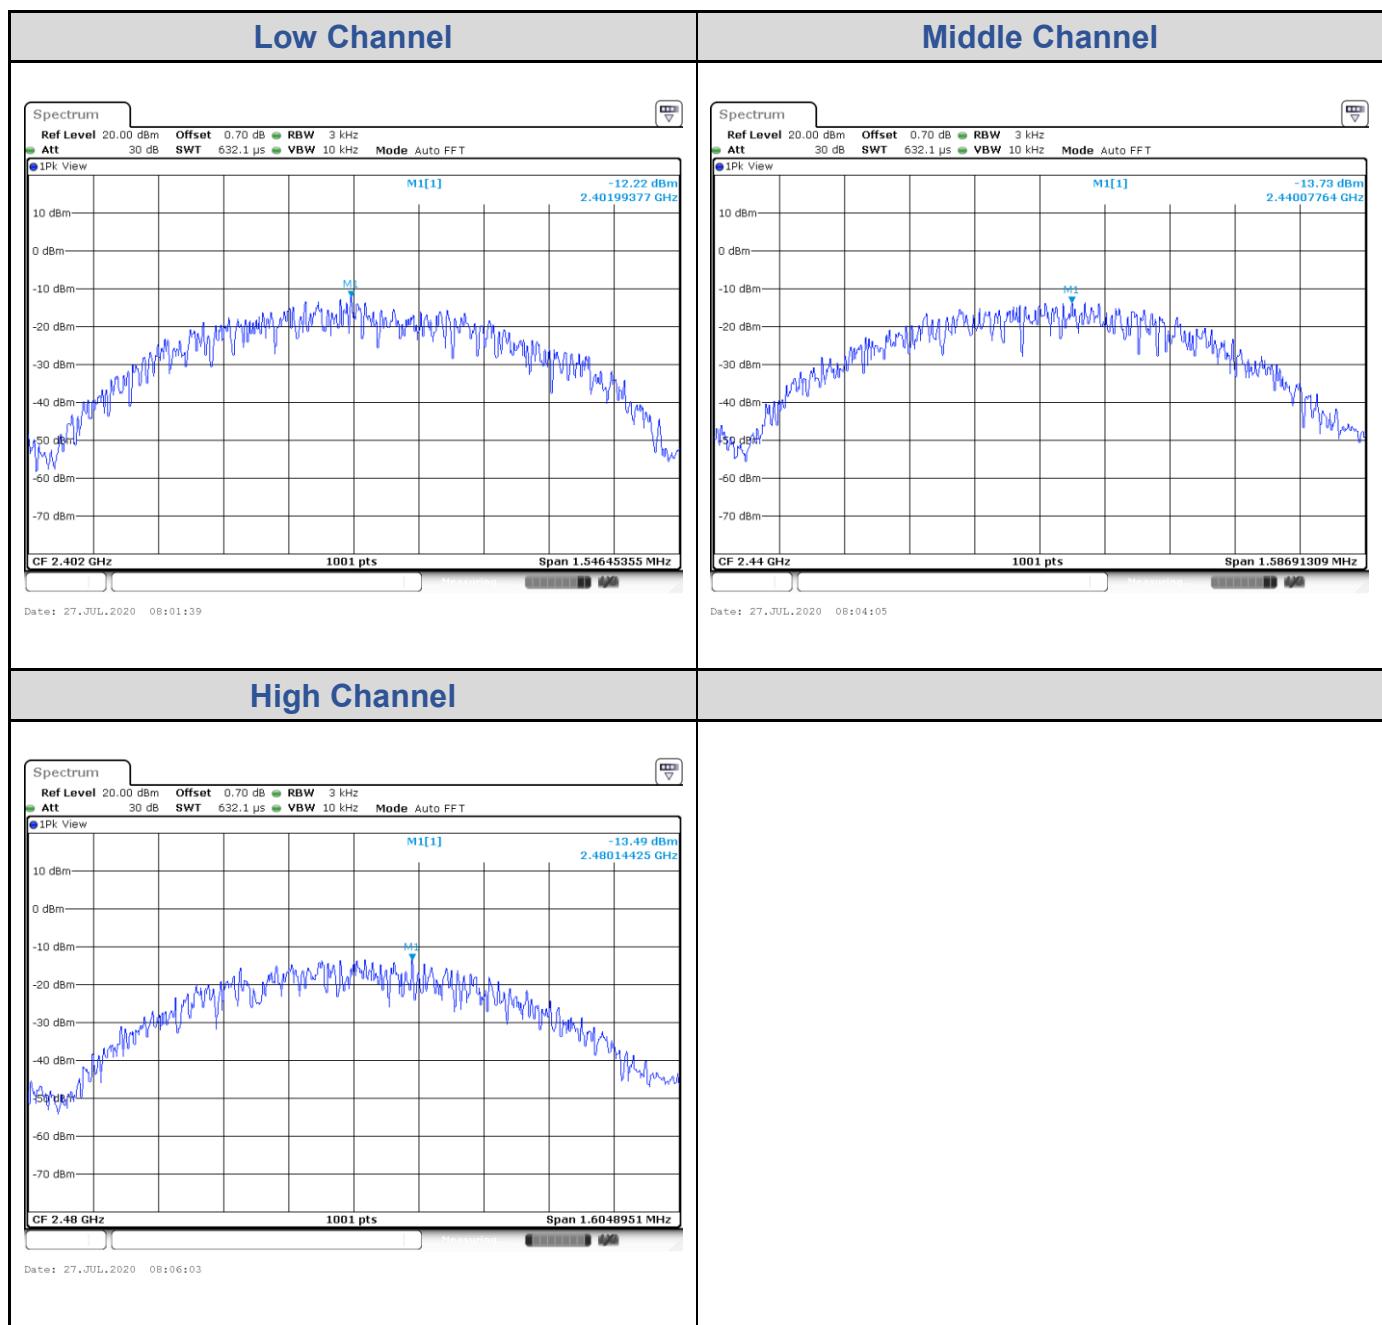


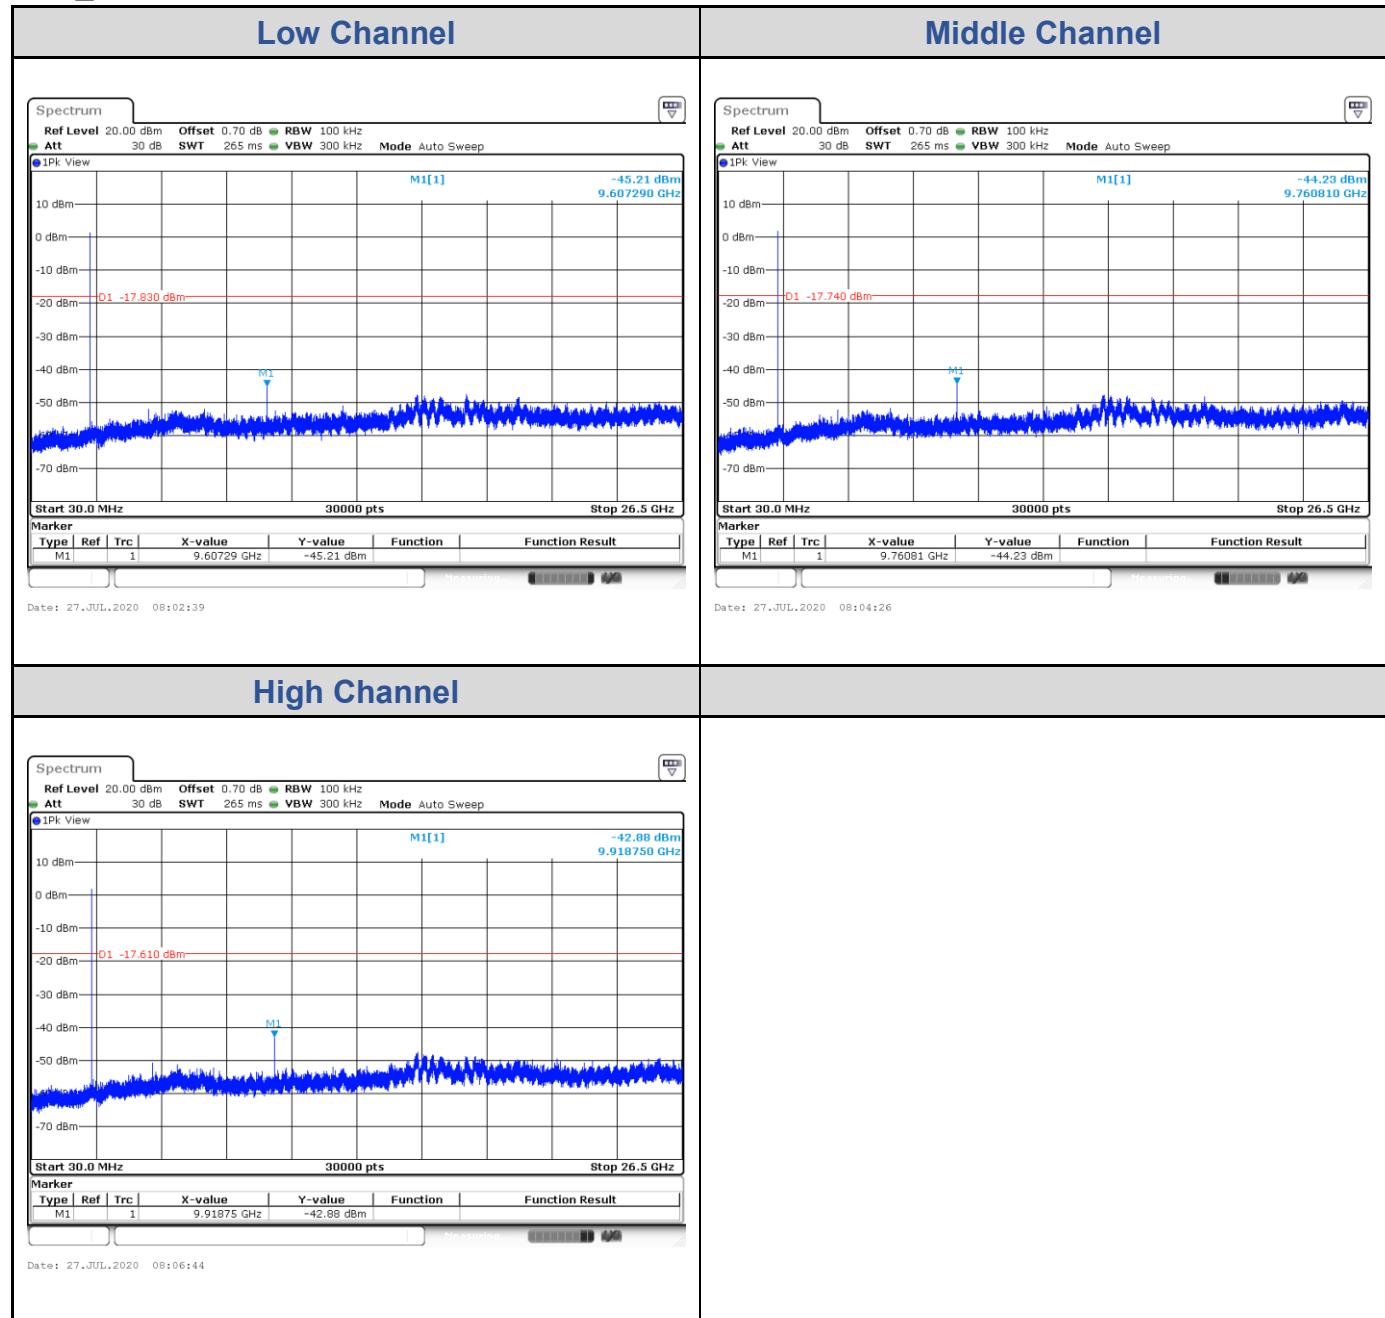Test Result of Conducted Spurious Emissions, Tx Mode
BLE_1M

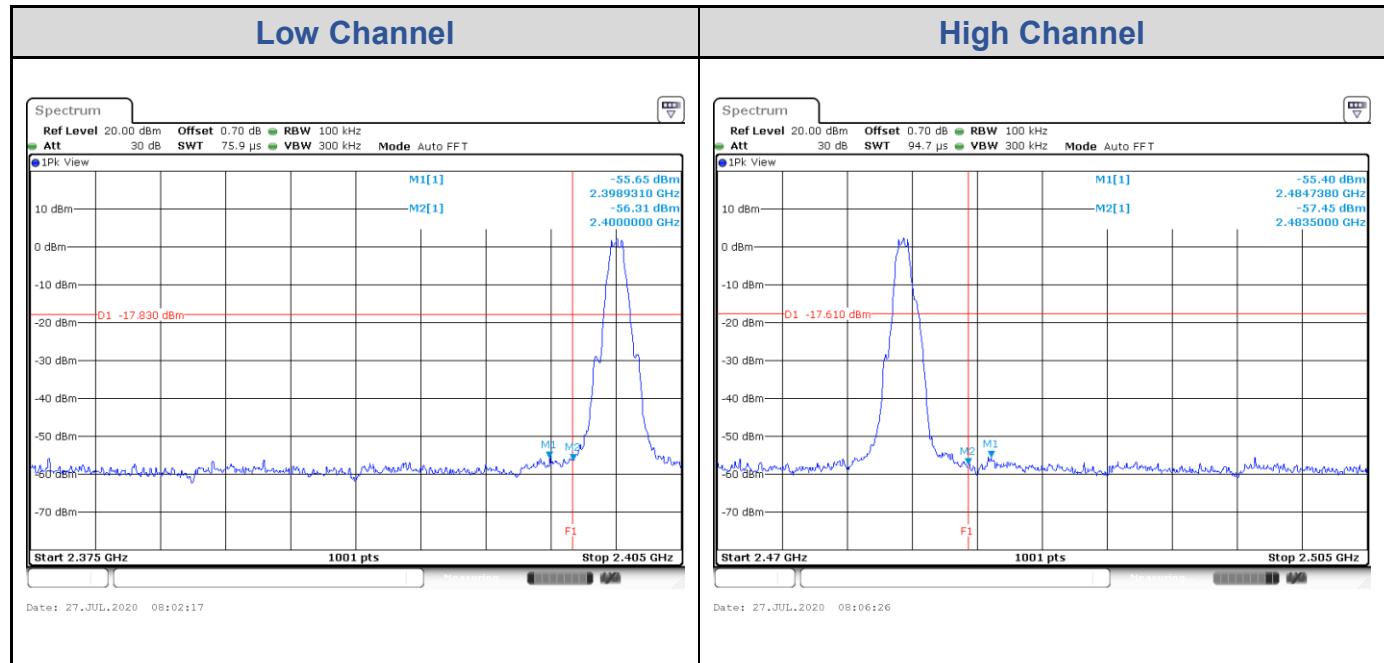
Test Result of Conducted Band Edge, Tx Mode
BLE_1M


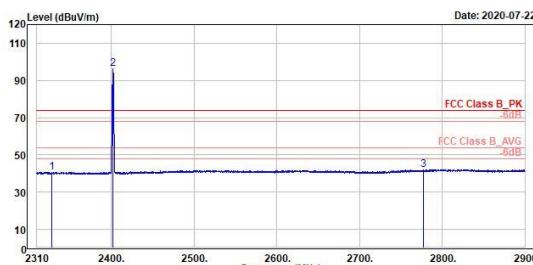
Appendix B: Test Results of Radiated Spurious Emissions & Mains Conducted Emission Test

Band Edges, 2.31GHz ~ 2.9GHz

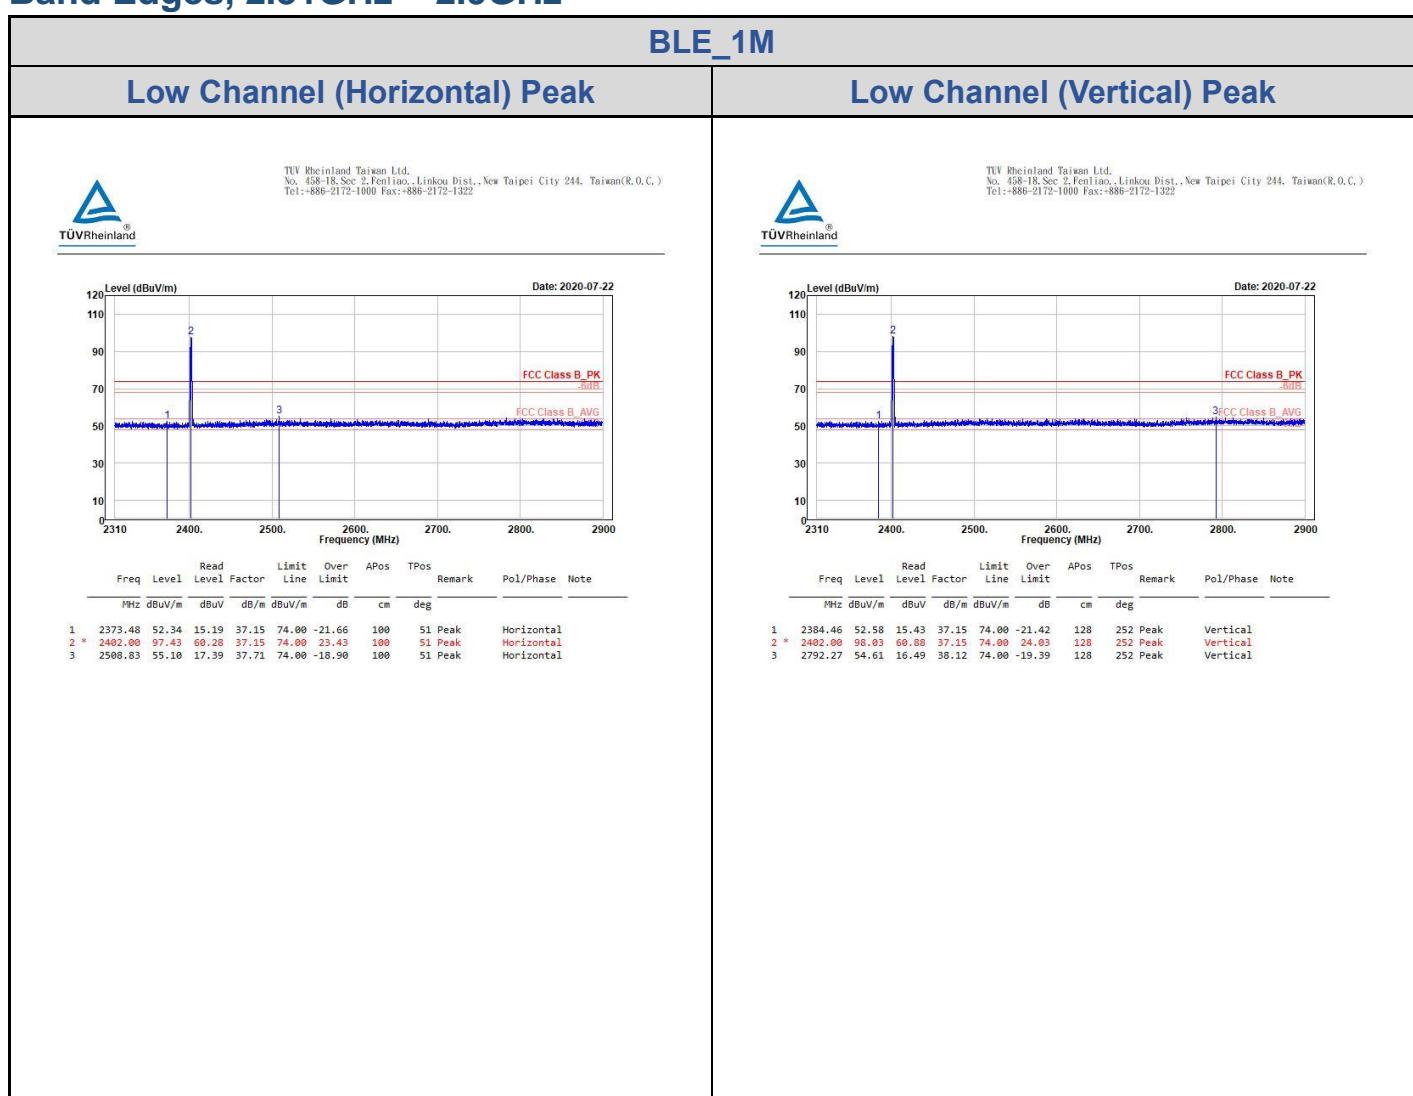

BLE_1M
Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:-886-2172-1000 Fax:-886-2172-1322



Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2327.70	40.68	3.53	37.15	54.00	-13.32	100	51	Average	Horizontal	
2 *	2402.00	96.49	59.34	37.15	54.00	42.49	100	51	Average	Horizontal	
3	2777.75	42.19	4.09	38.10	54.00	-11.81	100	51	Average	Horizontal	

Low Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:-886-2172-1000 Fax:-886-2172-1322

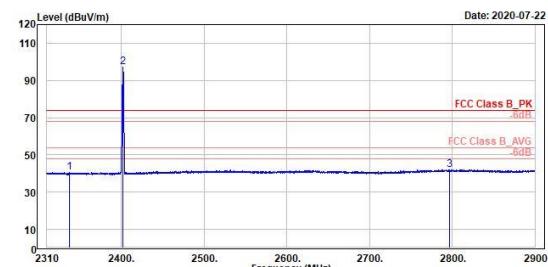

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2327.26	46.61	3.45	37.16	54.00	-13.39	128	252	Average	Vertical	
2 *	2402.00	97.07	59.92	37.15	54.00	43.07	128	252	Average	Vertical	
3	2796.63	42.17	4.05	38.12	54.00	-11.83	128	252	Average	Vertical	

BLE_1M
High Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

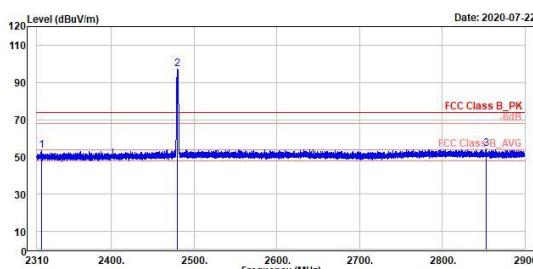

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2316.03	53.37	16.24	37.12	74.00	-20.63	100	65	Peak	Horizontal	
2 *	2480.00	97.02	59.46	37.56	74.00	23.02	100	65	Peak	Horizontal	
3	2853.10	54.36	16.28	38.08	74.00	-19.64	100	65	Peak	Horizontal	

High Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

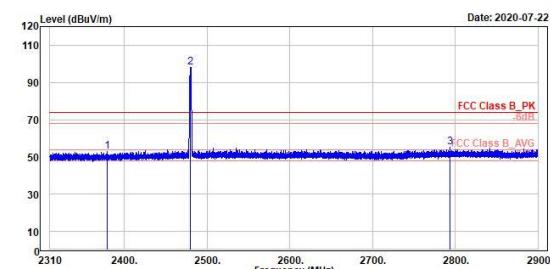


Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	2379.40	52.94	15.79	37.15	74.00	-21.06	102	114	Peak	Vertical	
2 *	2480.00	98.02	60.46	37.56	74.00	24.02	102	114	Peak	Vertical	
3	2793.67	55.42	17.30	38.12	74.00	-18.58	102	114	Peak	Vertical	

BLE_1M
High Channel (Horizontal) Average


TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:-886-2172-1000 Fax:-886-2172-1322

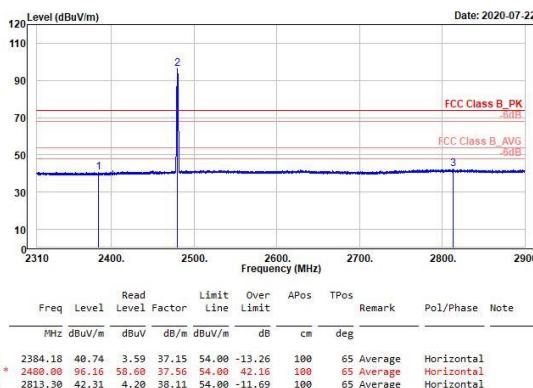

High Channel (Vertical) Average


TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:-886-2172-1000 Fax:-886-2172-1322

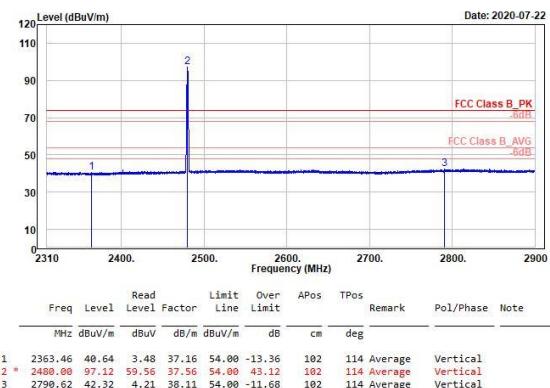

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz
BLE_1M
Low Channel 9kHz~150kHz



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

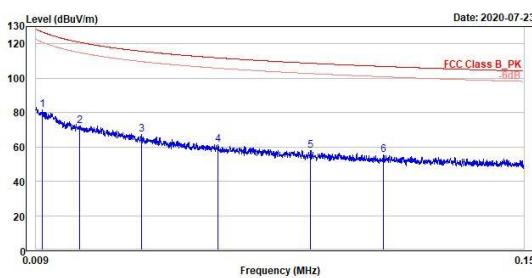

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	01.43	3.17	70.26	126.02	-45.39	100	45 QP	vertical		
2	0.02	72.16	-0.07	72.23	129.85	-48.69	100	345 QP	vertical		
3	0.04	67.19	-0.51	67.70	115.65	-48.46	100	308 QP	vertical		
4	0.06	61.41	-2.03	63.44	111.80	-50.39	100	283 QP	vertical		
5	0.09	57.91	-2.66	60.57	108.66	-50.75	100	174 QP	vertical		
6	0.11	55.55	-3.15	58.70	106.81	-51.26	100	21 QP	vertical		

Low Channel 150kHz~30MHz



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

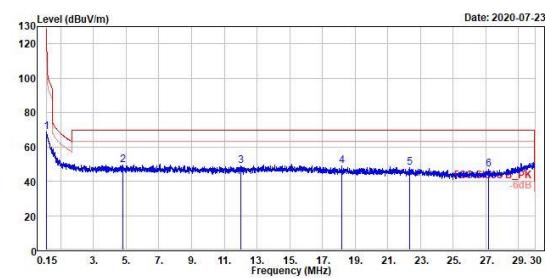

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.15	60.61	12.26	56.35	104.00	-35.47	100	325 QP	vertical		
2	4.81	49.37	11.02	38.35	69.59	-20.13	100	101 QP	vertical		
3	12.00	48.76	11.46	37.30	69.59	-20.74	100	142 QP	vertical		
4	18.19	49.13	12.36	36.77	69.59	-20.37	100	201 QP	vertical		
5	22.35	47.88	12.12	35.76	69.50	-21.62	100	10 QP	vertical		
6	27.16	46.93	12.49	34.44	69.50	-22.57	100	18 QP	vertical		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz
BLE_1M
Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

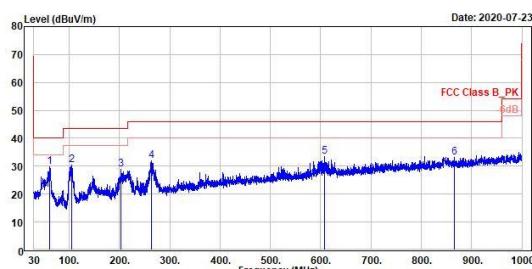

Freq MHz	Level dBuV/m	Read Level dBuV	Level Factor	Limit Line	Over Limit	APOS	TPos	Remark	Pol/Phase	Note
1	50.05	29.94	36.01	-6.07	40.00	-10.06	200	172 QP		horizontal
2	185.27	30.52	40.65	-10.13	43.50	-12.98	200	338 QP		horizontal
3	282.66	28.95	37.31	-8.36	43.50	-14.55	100	188 QP		horizontal
4	283.38	31.82	38.06	-6.24	46.00	-14.18	100	267 QP		horizontal
5	608.51	33.45	33.15	0.30	46.00	-12.55	100	135 QP		horizontal
6	866.14	33.04	29.42	3.62	46.00	-12.96	100	358 QP		horizontal

Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

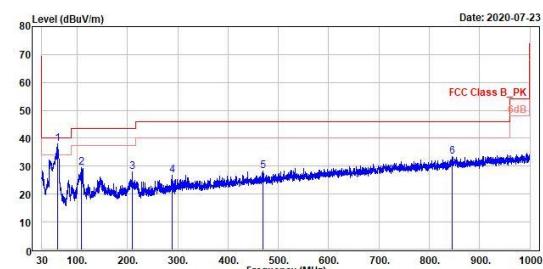

Freq MHz	Level dBuV/m	Read Level dBuV	Level Factor	Limit Line	Over Limit	APOS	TPos	Remark	Pol/Phase	Note
1	60.65	37.90	44.75	-6.05	40.00	-2.46	100	172 QP		vertical
2	187.99	29.37	39.15	-9.78	43.50	-14.13	100	271 QP		vertical
3	289.64	28.01	36.32	-8.31	43.50	-15.49	100	159 QP		vertical
4	288.41	26.71	31.78	-5.07	46.00	-19.29	100	169 QP		vertical
5	476.19	28.15	30.32	-2.17	46.00	-17.85	100	348 QP		vertical
6	845.19	33.52	30.09	3.43	46.00	-12.48	156	360 QP		vertical

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz
BLE_1M
Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

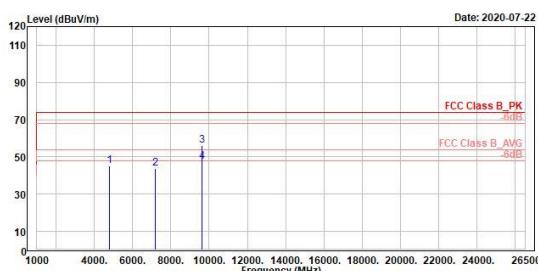

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4004.00	45.26	54.70	-9.44	74.00	-23.74	100	337	Peak	horizontal	
2	7206.00	43.77	50.59	-6.82	74.00	-30.23	100	167	Peak	horizontal	
3	9608.00	56.23	60.47	-4.24	74.00	-17.77	393	360	Peak	horizontal	
4	9608.00	47.40	51.64	-4.24	54.00	-6.60	393	360	Average	horizontal	

Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

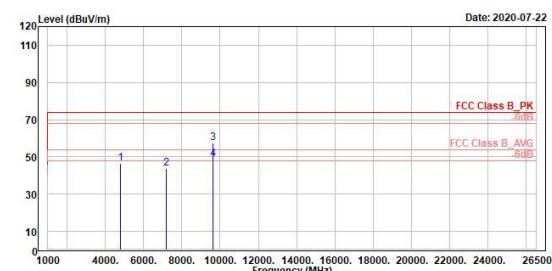

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4004.00	46.23	55.77	-9.44	74.00	-27.67	100	335	Peak	vertical	
2	7206.00	43.84	50.66	-6.82	74.00	-30.16	100	83	Peak	vertical	
3	9608.00	57.71	61.95	-4.24	74.00	-16.29	100	97	Peak	vertical	
4	9608.00	48.83	53.07	-4.24	54.00	-5.17	100	97	Average	vertical	

BLE_1M
Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

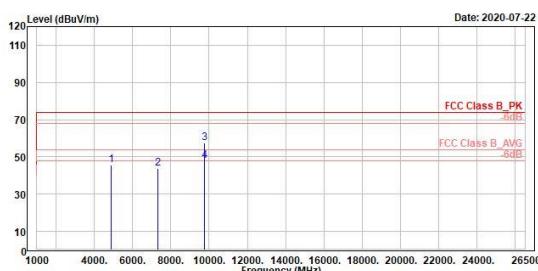

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4080.00	45.70	55.01	-9.31	74.00	-29.30	100	360	Peak	horizontal	
2	7320.00	43.66	50.36	-4.70	74.00	-30.34	116	360	Peak	horizontal	
3	9760.00	57.71	61.58	-3.87	74.00	-16.29	366	2	Peak	horizontal	
4	9760.00	48.04	51.91	-3.87	54.00	-5.96	366	2	Average	horizontal	

Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

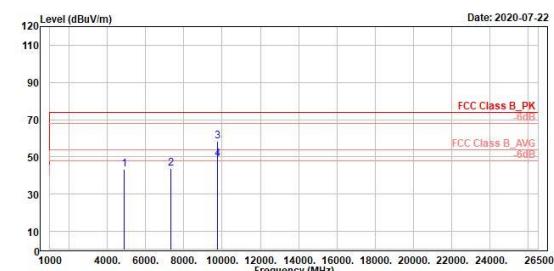

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4080.00	43.13	52.44	-9.31	74.00	-30.07	300	360	Peak	vertical	
2	7320.00	43.78	50.48	-6.70	74.00	-30.22	100	100	Peak	vertical	
3	9760.00	58.45	62.32	-3.87	74.00	-15.55	182	98	Peak	vertical	
4	9760.00	48.74	52.61	-3.87	54.00	-5.26	182	98	Average	vertical	

BLE_1M
High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

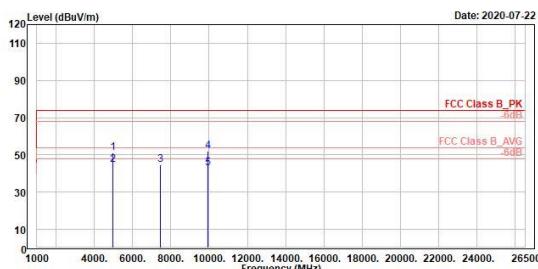

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPOS	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4969.00	54.23	60.36	-9.12	74.00	-22.77	100	350	Peak	horizontal	
2	4969.00	44.72	53.85	-9.13	54.00	-9.28	100	350	Average	horizontal	
3	7449.00	44.75	51.45	-6.70	74.00	-29.25	100	358	Peak	horizontal	
4	9920.00	52.21	55.85	-3.64	74.00	-21.79	365	0	Peak	horizontal	
5	9920.00	43.10	46.74	-3.64	54.00	-10.90	365	0	Average	horizontal	

High Channel (Vertical)


TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenqiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

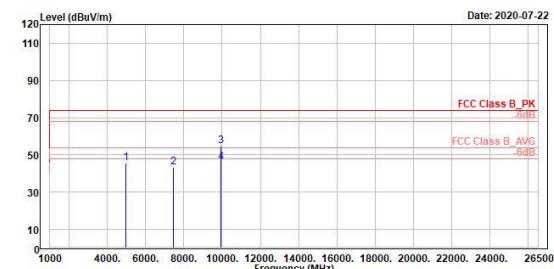

Freq	Level	Read	Level	Factor	Limit	Over	APOS	TPOS	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm					
1	4969.00	45.51	54.64	-9.13	74.00	-20.49	352	350	Peak	vertical	
2	7449.00	43.34	50.04	-6.70	74.00	-30.66	100	100	Peak	vertical	
3	9920.00	54.95	58.59	-3.64	74.00	-19.05	187	84	Peak	vertical	
4	9920.00	46.01	49.65	-3.64	54.00	-7.99	107	84	Average	vertical	

Mains Conducted Emission, 150kHz ~ 30MHz

(Line)

TÜV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322




(Neutral)

TÜV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322



Level (dBuV)


Date: 2020-07-28 Time: 13:10:20

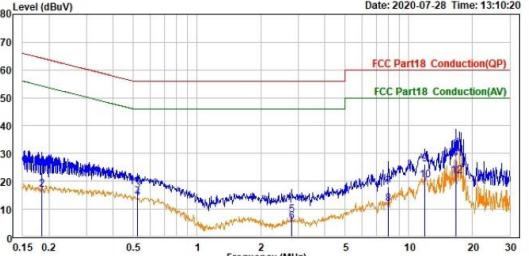

Read Freq	Level	Limit	Over Line	Limit	Over Pol/Phase	Remark	Note
MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.184	13.02	10.11	23.13	64.30	-41.17	line1 QP
2	7.00	10.11	17.11	54.30	-37.19	line1 Average	
3	0.522	6.66	10.12	16.78	56.00	-39.22	line1 QP
4	0.522	3.77	10.12	13.89	46.00	-32.11	line1 Average
5	2.797	-2.42	10.19	7.77	56.00	-48.23	line1 QP
6	2.797	-4.58	10.19	5.61	46.00	-48.39	line1 Average
7	8.007	7.65	10.31	17.96	60.00	-42.04	line1 QP
8	8.007	1.42	10.31	11.73	50.00	-38.27	line1 Average
9	11.931	15.63	10.42	26.05	60.00	-33.95	line1 QP
10	11.931	9.96	10.42	20.38	50.00	-29.62	line1 Average
11	16.744	17.52	10.52	28.03	60.00	-31.97	line1 QP
12	16.744	11.28	10.51	21.79	50.00	-28.21	line1 Average

Level (dBuV)

Date: 2020-07-28 Time: 13:12:43

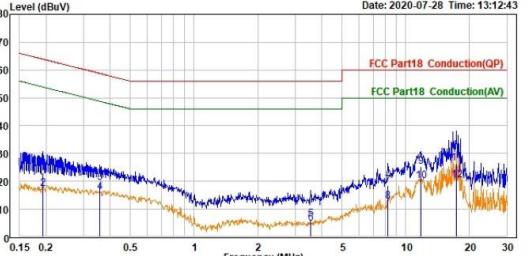

Read Freq	Level	Limit	Over Line	Limit	Over Pol/Phase	Remark	Note
MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.192	13.06	10.11	23.17	63.93	-40.76	neutral QP
2	0.192	7.19	10.11	17.30	53.93	-36.63	neutral Average
3	0.359	9.25	10.11	19.36	58.76	-39.48	neutral QP
4	0.359	5.88	10.11	15.99	48.76	-32.77	neutral Average
5	3.553	-3.85	10.19	6.34	56.00	-49.66	neutral QP
6	3.553	-5.45	10.19	4.74	46.00	-41.26	neutral Average
7	8.250	8.39	10.31	18.70	60.00	-41.30	neutral QP
8	8.250	2.61	10.31	12.92	50.00	-37.08	neutral Average
9	11.753	14.81	10.41	25.22	60.00	-34.78	neutral QP
10	11.753	9.62	10.41	28.03	50.00	-29.97	neutral Average
11	17.338	15.79	10.53	26.32	60.00	-33.68	neutral QP
12	17.338	9.92	10.53	20.45	50.00	-29.55	neutral Average