

FCC Test Report

Client Name : Aurora Multimedia Corp, USA

Address : 205 Commercial Ct., Morganville, NJ 07751, USA

Product Name : Multi-format 4K Switcher cum Scaler with built-in
Wireless Presentation System

Date : Aug. 17, 2020



Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of channels.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. Maximum Peak Output Power Test.....	44
5.1. Test Standard and Limit.....	44
5.2. Test Setup.....	44
5.3. Test Procedure.....	44
5.4. Test Data.....	44
6. Occupy Bandwidth Test.....	48
6.1. Test Standard.....	48
6.2. Test Setup.....	48
6.3. Test Procedure.....	48
6.4. Test Data.....	48
7. Power Spectral Density Test.....	79
7.1. Test Standard and Limit.....	79
7.2. Test Setup.....	79
7.3. Test Procedure.....	79
7.4. Test Data.....	79
8. Antenna Requirement.....	96
8.1. Test Standard and Requirement.....	96
8.2. Antenna Connected Construction.....	97
9. Frequency Stability.....	98
APPENDIX I -- PHOTOGRAPH.....	99

TEST REPORT

Applicant : Aurora Multimedia Corp, USA

Manufacturer : Aurora Multimedia Corp, USA

Product Name : Multi-format 4K Switcher cum Scaler with built-in Wireless Presentation System

Model No. : TS-100

Trade Mark : TeamStream

Rating(s) : Input: DC 12V, 1.5A (via adapter input: AC 100~240V, 50/60Hz, 0.8A; output: DC 12V, 1.5A)

Test Standard(s) : **FCC Part15 Subpart E 2019, Paragraph 15.407**
ANSI C63.10: 2013,

Test Method(s) : **KDB 789033 D02 General UNII Test Procedures New Rules v02r01**
KDB662911 D01 Multiple Transmitter Output v02r01


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt Jul. 24, 2020


Date of Test Jul. 24~Aug. 12, 2020

Prepared By



(Engineer / Dolly Mo)

Reviewer



(Supervisor / Bibo Zhang)

Approved & Authorized Signer



(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Aurora Multimedia Corp, USA
Address	:	205 Commercial Ct., Morganville, NJ 07751, USA
Manufacturer	:	Aurora Multimedia Corp, USA
Address	:	205 Commercial Ct., Morganville, NJ 07751, USA
Factory	:	Gastron Technology CO., LTD
Address	:	4A Building#B Dingxin Science and Technology Park, Honglangbei #2 Road, Xin'an street, Baoan district, Shenzhen, Guangdong Province, P.R.China

1.2. Description of Device (EUT)

Product Name	:	Multi-format 4K Switcher cum Scaler with built-in Wireless Presentation System
Model No.	:	TS-100
Trade Mark	:	TeamStream
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	WiFi 2.4G: 802.11b/ g/ n(HT20) 2412-2462MHz 802.11n(HT40) 2422-2452MHz WiFi 5.1G: 5180MHz~5240MHz WiFi 5.8G: 5745MHz~5825MHz
	Number of Channel:	WiFi 2.4G: 11 Channels for 802.11b/ g/ n(HT20) 7 Channels for 802.11n(HT40) WiFi 5.1G: 4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80) WiFi 5.8G: 5 Channels for 802.11a 5 Channels for 802.11n(HT20) 5 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80)
	Modulation Type:	WiFi 2.4G: 802.11b CCK; 802.11g/n OFDM

		WiFi 5.1G: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM WiFi 5.8G: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
	Antenna Type:	Cylindrical Antenna
	Antenna Gain(Peak):	WiFi 2.4G: ANT A & ANT B: 3 dBi WiFi 5.1G&WiFi 5.8G: ANT A & ANT B: 3 dBi
	Directional Gain:	WiFi 2.4G: 6.01 dBi WiFi 5.1G&WiFi 5.8G: 6.01 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for Wifi 5.8G module. 3) All modes support MIMO.		

1.3. Auxiliary Equipment Used During Test

Adapter	Model: GME18A-120150FXR Input: AC 100-240V, 50-60Hz, 0.8A Output: DC 12.0V, 1.5A, 18.0W
---------	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20/ac20)	CH 149	5745MHz
	CH 157	5785MHz
	CH 165	5825MHz
OFDM(802.11n40/ac40)	CH 151	5755MHz
	CH 159	5795MHz
OFDM(802.11ac80)	CH 155	5775MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the

measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB

4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

1.5. List of channels

802.11a/n20/ac20

Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		

802.11n40/ac40



Channel	Freq. (MHz)	Channel	Freq. (MHz)
151	5755	159	5795

802.11ac80

Channel	Freq. (MHz)
155	5775



1.6. Description Of Test Setup

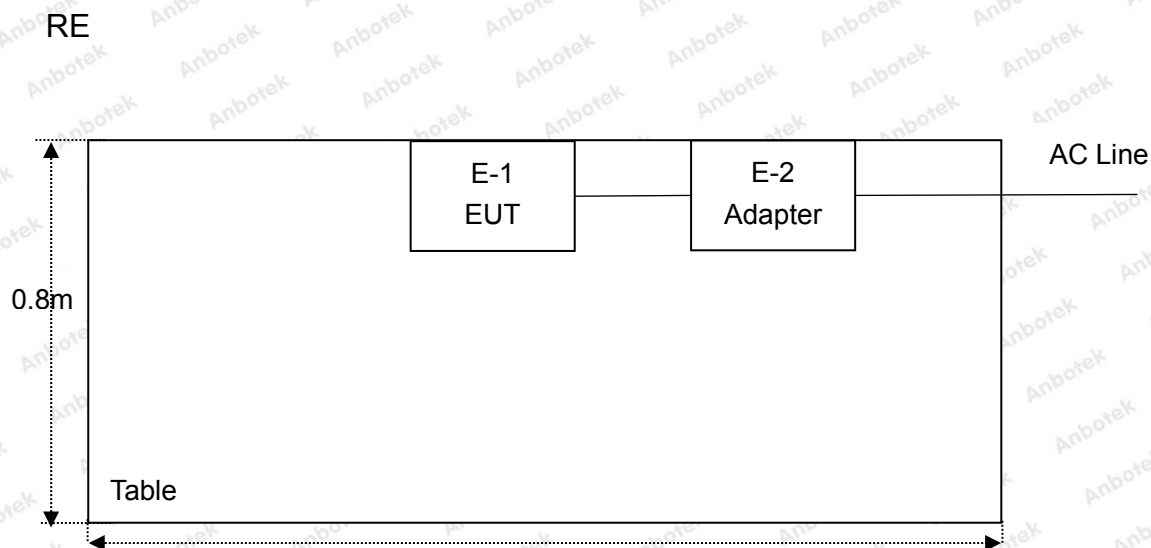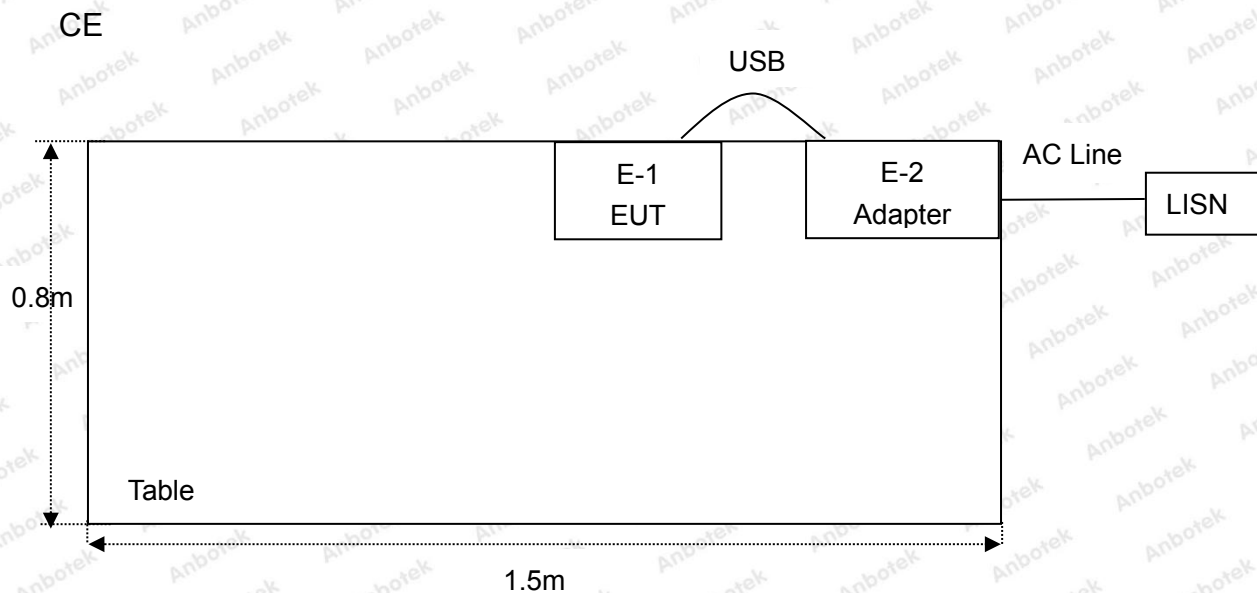

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 27, 2019.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results


Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)&15.407(e)	Occupy Bandwidth	PASS
15.407(a)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS
15.407(g)	Frequency Stability	PASS

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

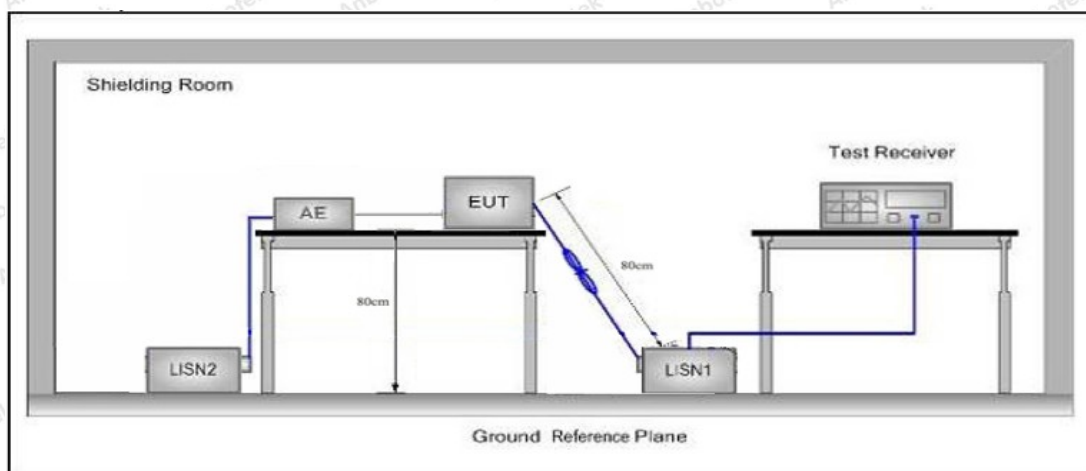

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, and found the 802.11ac80 CH 155 for ANT A which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: 802.11ac80 CH 155
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.5°C Hum.: 55%

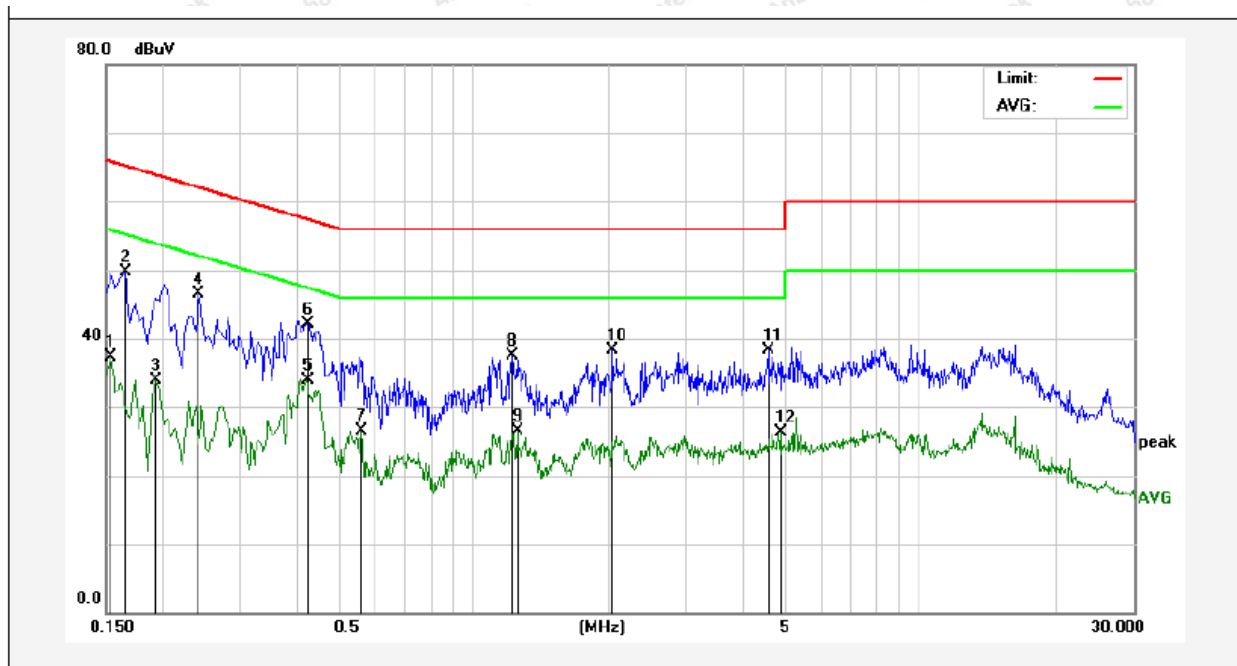

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	17.31	19.90	37.21	55.78	-18.57	AVG	
2	0.1660	29.90	19.90	49.80	65.15	-15.35	QP	
3	0.1940	14.09	19.90	33.99	53.86	-19.87	AVG	
4	0.2420	26.60	19.89	46.49	62.02	-15.53	QP	
5	0.4220	14.00	19.94	33.94	47.41	-13.47	AVG	
6	0.4260	22.24	19.95	42.19	57.33	-15.14	QP	
7	0.5620	6.59	20.00	26.59	46.00	-19.41	AVG	
8	1.2180	17.30	20.12	37.42	56.00	-18.58	QP	
9	1.2500	6.30	20.12	26.42	46.00	-19.58	AVG	
10	2.0500	18.24	20.14	38.38	56.00	-17.62	QP	
11	4.5620	18.05	20.19	38.24	56.00	-17.76	QP	
12	4.8580	6.20	20.20	26.40	46.00	-19.60	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: 802.11ac80 CH 155
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.5°C Hum.: 55%

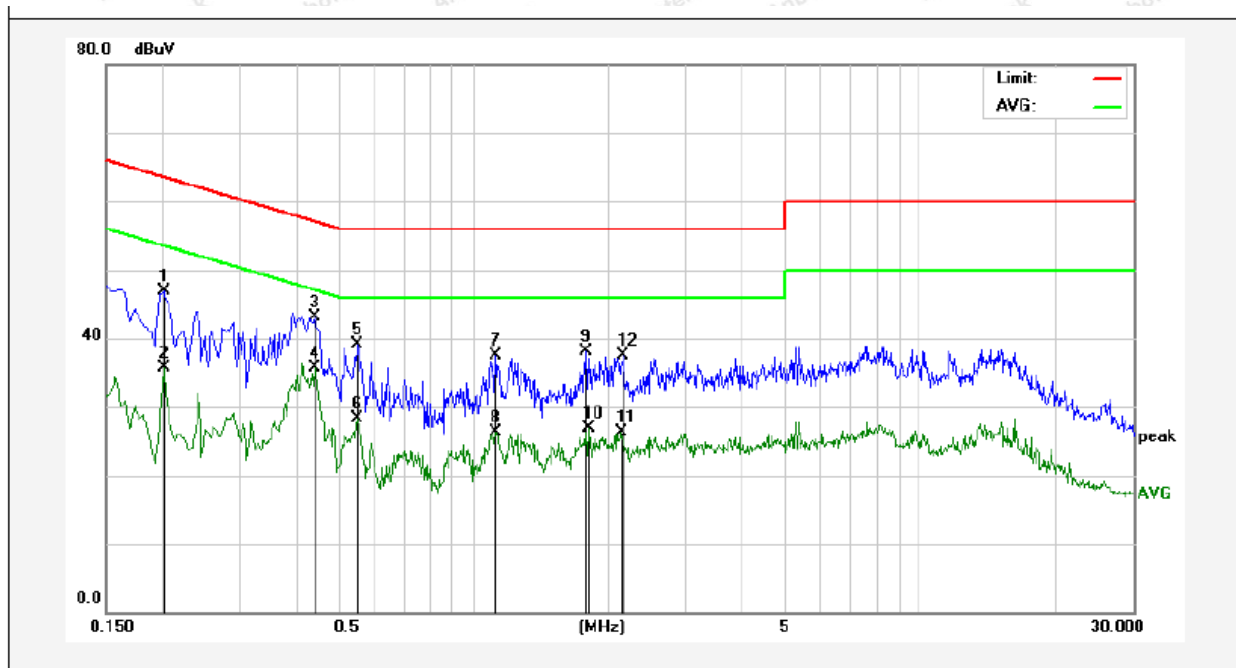

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2020	26.92	19.90	46.82	63.52	-16.70	QP	
2	0.2020	15.82	19.90	35.72	53.52	-17.80	AVG	
3	0.4420	23.16	19.95	43.11	57.02	-13.91	QP	
4	0.4420	15.75	19.95	35.70	47.02	-11.32	AVG	
5	0.5500	19.11	19.99	39.10	56.00	-16.90	QP	
6	0.5500	8.31	19.99	28.30	46.00	-17.70	AVG	
7	1.1220	17.41	20.12	37.53	56.00	-18.47	QP	
8	1.1220	6.17	20.12	26.29	46.00	-19.71	AVG	
9	1.7900	17.98	20.14	38.12	56.00	-17.88	QP	
10	1.8180	6.75	20.14	26.89	46.00	-19.11	AVG	
11	2.1420	6.11	20.14	26.25	46.00	-19.75	AVG	
12	2.1619	17.30	20.14	37.44	56.00	-18.56	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: 802.11ac80 CH 155
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 23.5°C Hum.: 55%

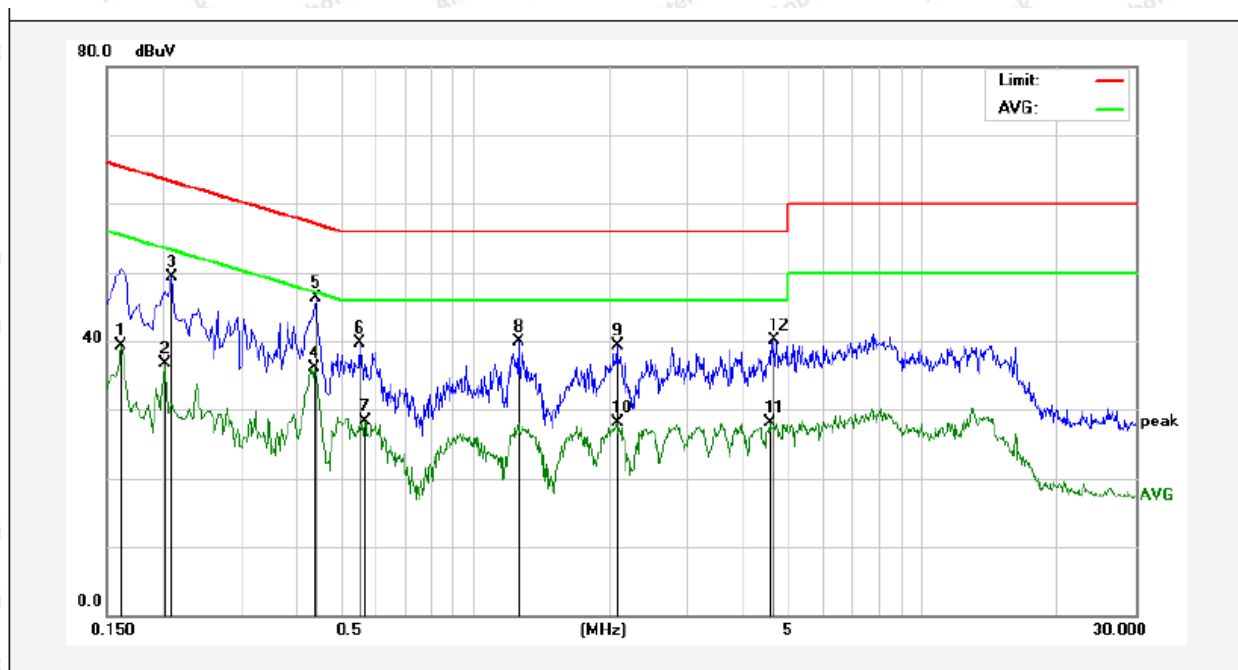

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	19.40	19.90	39.30	55.36	-16.06	AVG	
2	0.2020	16.83	19.90	36.73	53.52	-16.79	AVG	
3	0.2100	29.47	19.90	49.37	63.20	-13.83	QP	
4	0.4380	16.19	19.95	36.14	47.10	-10.96	AVG	
5	0.4420	26.38	19.95	46.33	57.02	-10.69	QP	
6	0.5540	19.66	20.00	39.66	56.00	-16.34	QP	
7	0.5700	8.33	20.00	28.33	46.00	-17.67	AVG	
8	1.2540	19.76	20.13	39.89	56.00	-16.11	QP	
9	2.0860	19.16	20.14	39.30	56.00	-16.70	QP	
10	2.0860	7.98	20.14	28.12	46.00	-17.88	AVG	
11	4.5620	7.96	20.19	28.15	46.00	-17.85	AVG	
12	4.6740	19.82	20.20	40.02	56.00	-15.98	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11ac80 CH 155
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.5°C Hum.: 55%

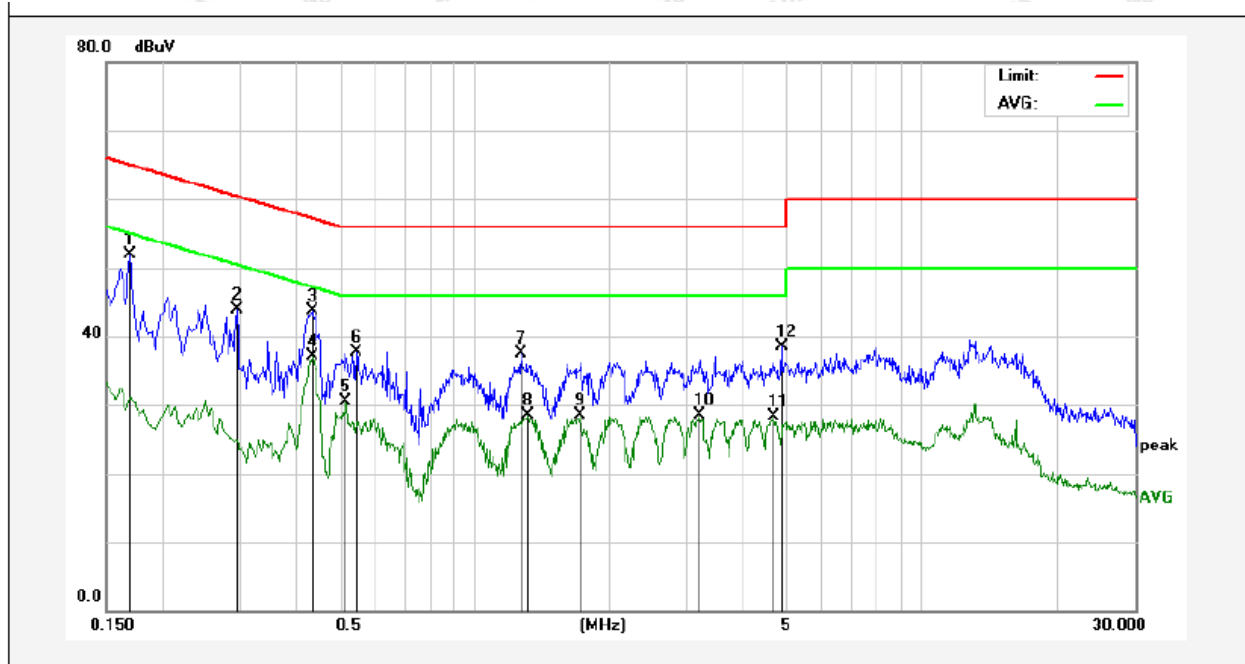

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1700	31.91	19.90	51.81	64.96	-13.15	QP	
2	0.2940	24.06	19.89	43.95	60.41	-16.46	QP	
3	0.4340	23.76	19.95	43.71	57.18	-13.47	QP	
4	0.4340	17.15	19.95	37.10	47.18	-10.08	AVG	
5	0.5180	10.48	19.99	30.47	46.00	-15.53	AVG	
6	0.5460	17.70	19.99	37.69	56.00	-18.31	QP	
7	1.2740	17.30	20.13	37.43	56.00	-18.57	QP	
8	1.3180	8.38	20.13	28.51	46.00	-17.49	AVG	
9	1.7220	8.29	20.13	28.42	46.00	-17.58	AVG	
10	3.1820	8.37	20.16	28.53	46.00	-17.47	AVG	
11	4.6779	8.10	20.20	28.30	46.00	-17.70	AVG	
12	4.8500	18.34	20.20	38.54	56.00	-17.46	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 dBuV/m$, for $EIPR[dBm] = -27dBm$.

4.2. Test Setup

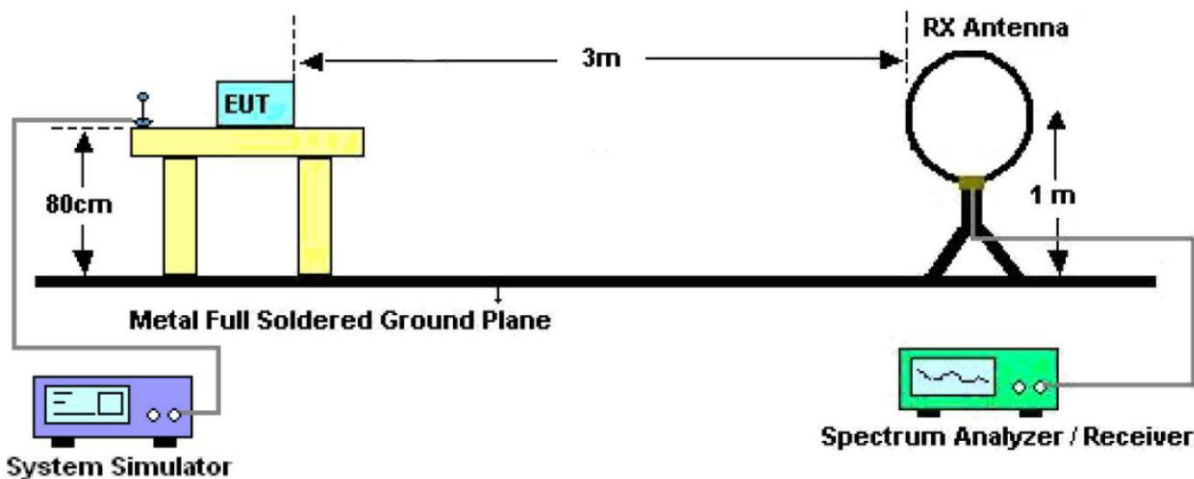


Figure 1. Below 30MHz

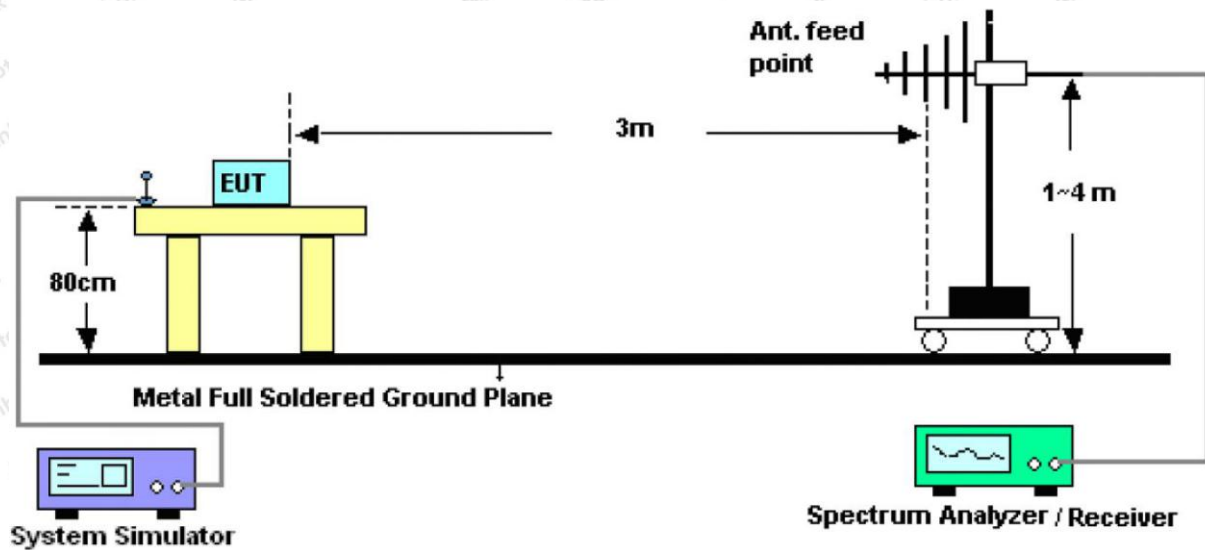


Figure 2. 30MHz to 1GHz

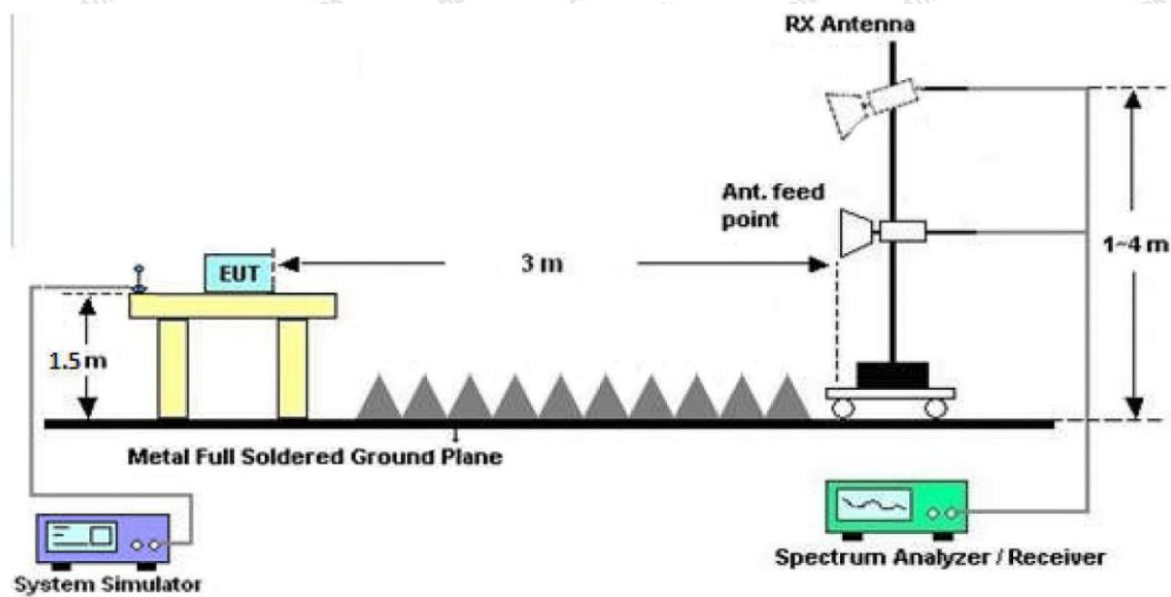


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-RF-05-a

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found the 802.11ac80 CH 155 for ANT A which is the worst case, only the worst case is recorded in the report.

Report No.: 18220WC00106603

FCC ID: 2AW9A-TS-100

Page 19 of 99

Test Results (30~1000MHz)

Job No.: 18220WC00106603


Temp.(°C)/Hum.(%RH): 23.2°C/50%RH

Standard: FCC PART 15C

Power Source: AC 120V, 60Hz for adapter

Test Mode: 802.11ac80 CH 155

Polarization: Horizontal

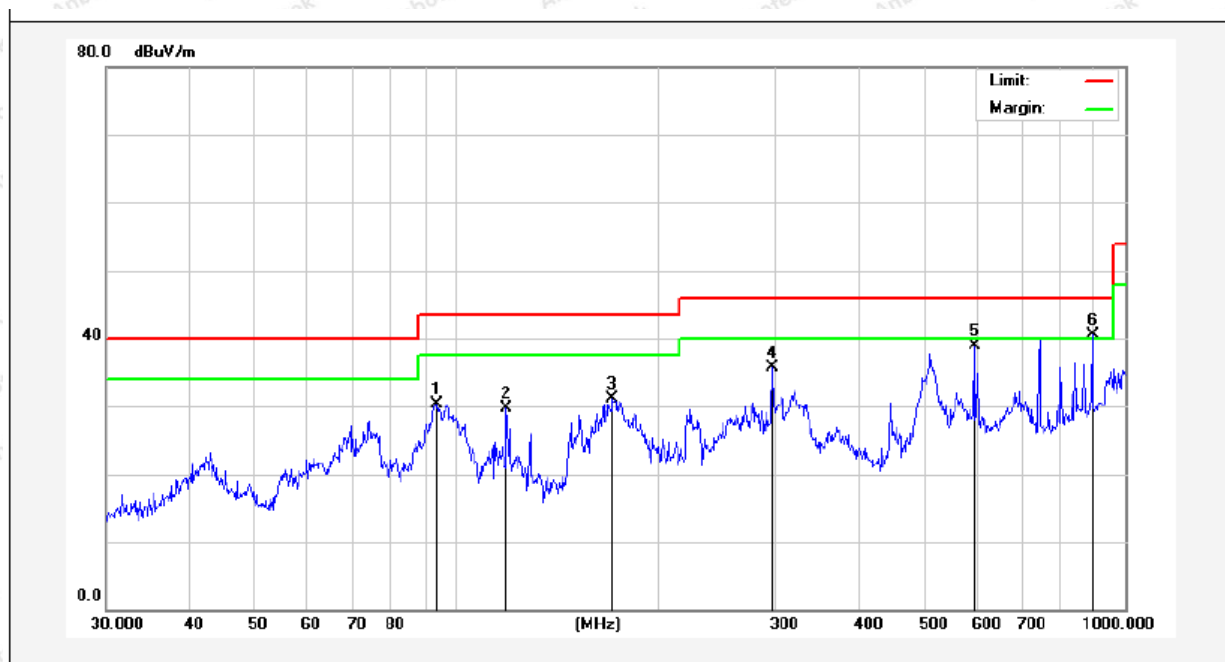

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	93.7685	50.45	-20.06	30.39	43.50	-13.11	QP	100	0	
2	119.0180	51.50	-21.87	29.63	43.50	-13.87	QP	100	360	
3	171.3926	52.33	-21.24	31.09	43.50	-12.41	QP	100	360	
4	297.2241	50.28	-14.55	35.73	46.00	-10.27	QP	100	0	
5	595.1329	45.84	-6.87	38.97	46.00	-7.03	QP	100	0	
6	893.8567	42.42	-1.88	40.54	46.00	-5.46	QP	100	360	

Report No.: 18220WC00106603

FCC ID: 2AW9A-TS-100

Page 20 of 99

Test Results (30~1000MHz)

Job No.: 18220WC00106603


Temp.(°C)/Hum.(%RH): 23.2°C/50%RH

Standard: FCC PART 15C

Power Source: AC 120V, 60Hz for adapter

Test Mode: 802.11ac80 CH 155

Polarization: Vertical

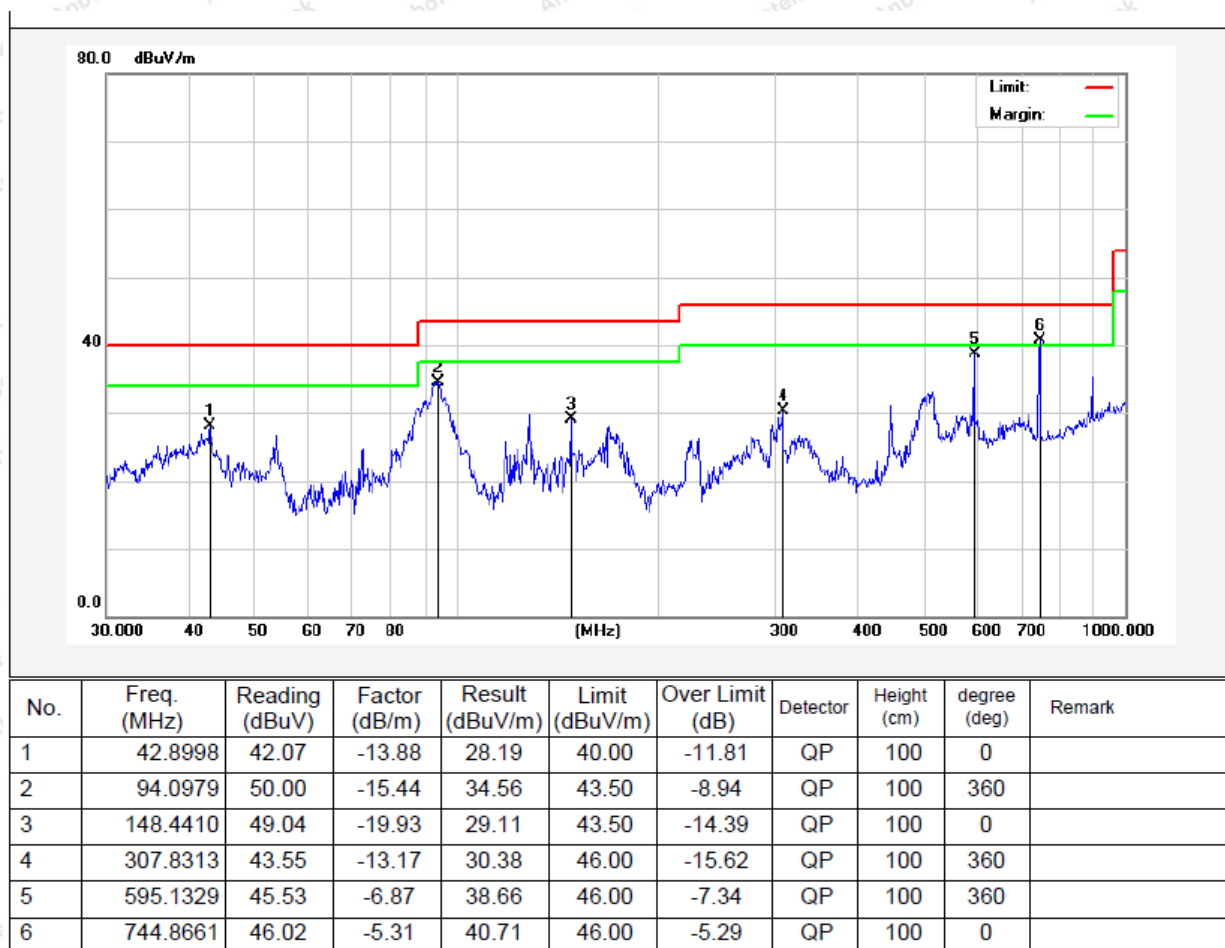

Test Results (Above 1000MHz)

ANT A:

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	39.37	31.98	17.08	33.91	54.52	68.20	-13.68	V
17235.00	41.77	32.65	20.03	34.85	59.60	68.20	-8.60	V
11490.00	41.75	31.98	17.08	33.91	56.90	68.20	-11.30	H
17235.00	40.78	32.65	20.03	34.85	58.61	68.20	-9.59	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.64	31.98	17.08	33.91	44.79	54.00	-9.21	V
17235.00	29.14	32.65	20.03	34.85	46.97	54.00	-7.03	V
11490.00	28.41	31.98	17.08	33.91	43.56	54.00	-10.44	H
17235.00	28.89	32.65	20.03	34.85	46.72	54.00	-7.28	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	39.72	32.44	17.18	33.91	55.43	68.20	-12.77	V
17355.00	40.20	32.78	20.12	34.86	58.24	68.20	-9.96	V
11570.00	39.49	32.44	17.18	33.91	55.20	68.20	-13.00	H
17355.00	41.29	32.78	20.12	34.86	59.33	68.20	-8.87	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.00	32.44	17.18	33.91	44.71	54.00	-9.29	V
17355.00	28.08	32.78	20.12	34.86	46.12	54.00	-7.88	V
11570.00	29.80	32.44	17.18	33.91	45.51	54.00	-8.49	H
17355.00	28.51	32.78	20.12	34.86	46.55	54.00	-7.45	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	39.55	32.59	18.02	33.92	56.24	68.20	-11.96	V
17475.00	41.04	32.87	20.15	34.88	59.18	68.20	-9.02	V
11650.00	39.82	32.59	18.02	33.92	56.51	68.20	-11.69	H
17475.00	41.63	32.87	20.15	34.88	59.77	68.20	-8.43	H


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	27.73	32.59	18.02	33.92	44.42	54.00	-9.58	V
17475.00	27.75	32.87	20.15	34.88	45.89	54.00	-8.11	V
11650.00	27.67	32.59	18.02	33.92	44.36	54.00	-9.64	H
17475.00	28.27	32.87	20.15	34.88	46.41	54.00	-7.59	H


Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11n(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Band Edge test:

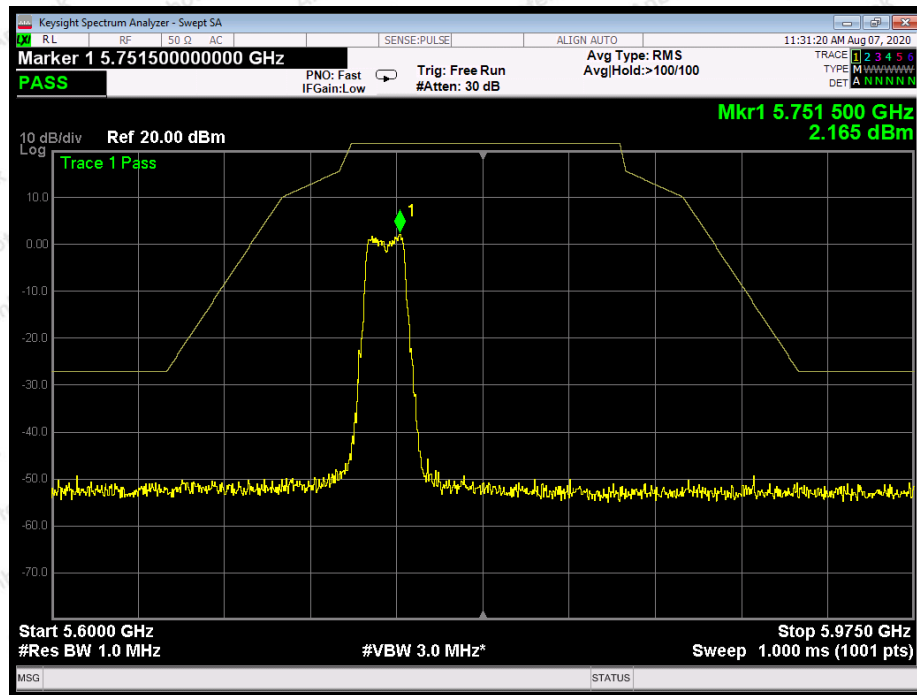


802.11a: Band Edge, Left Side

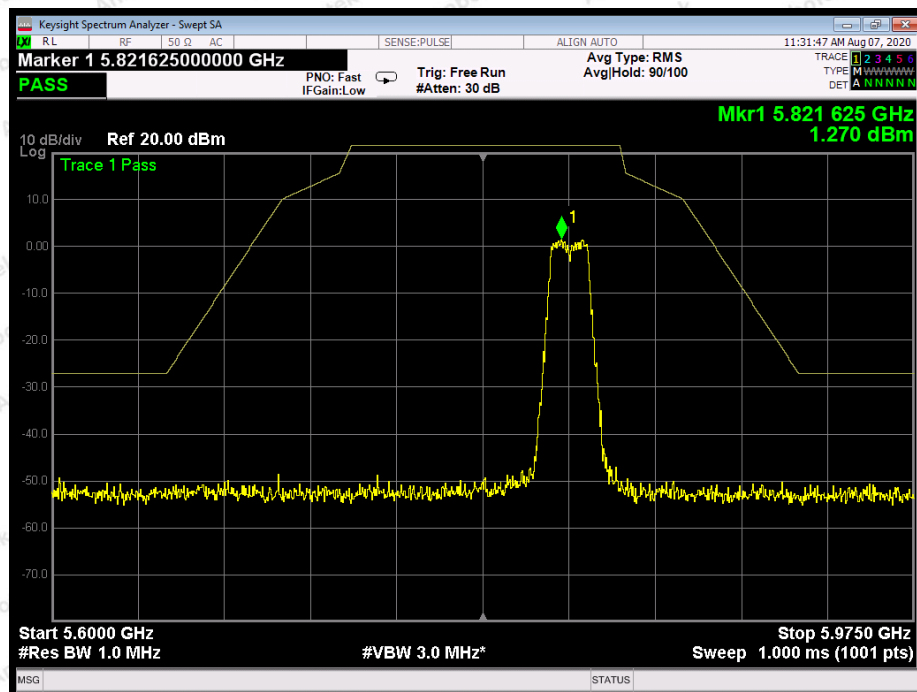


802.11a: Band Edge, Right Side

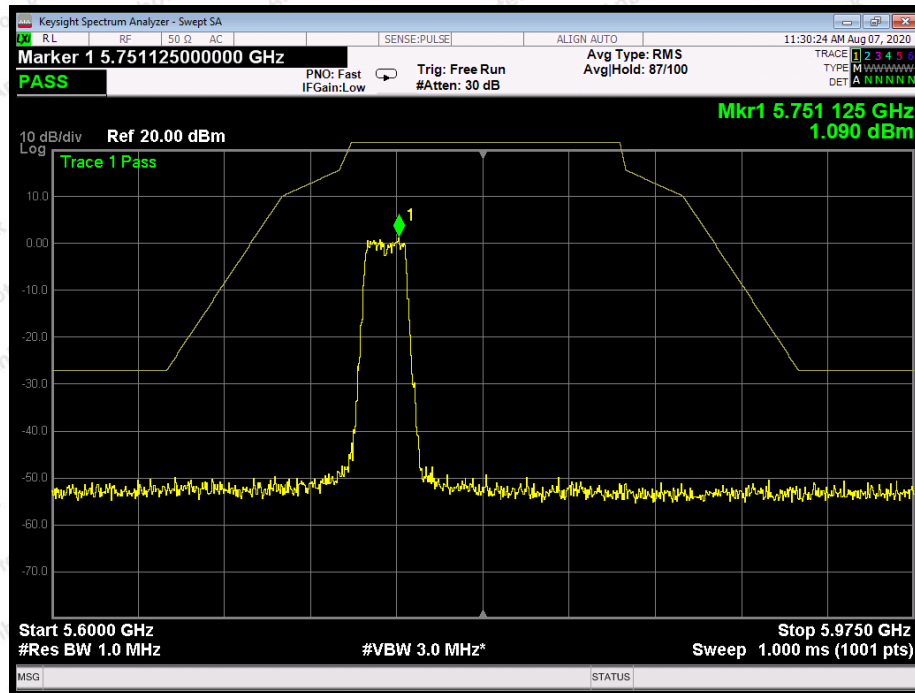


802.11n(20): Band Edge, Left Side

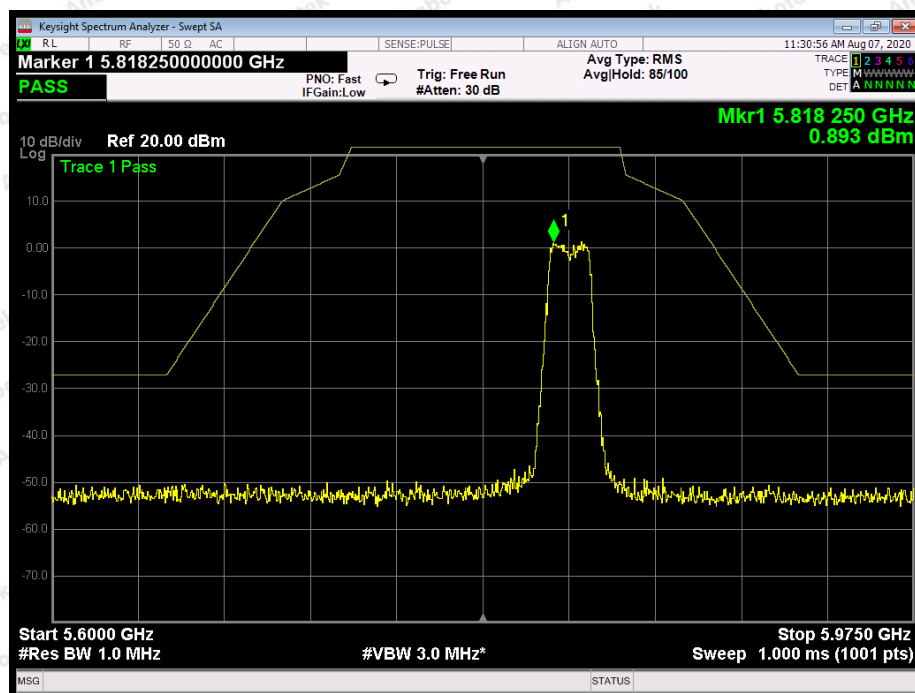


802.11n(20): Band Edge, Right Side

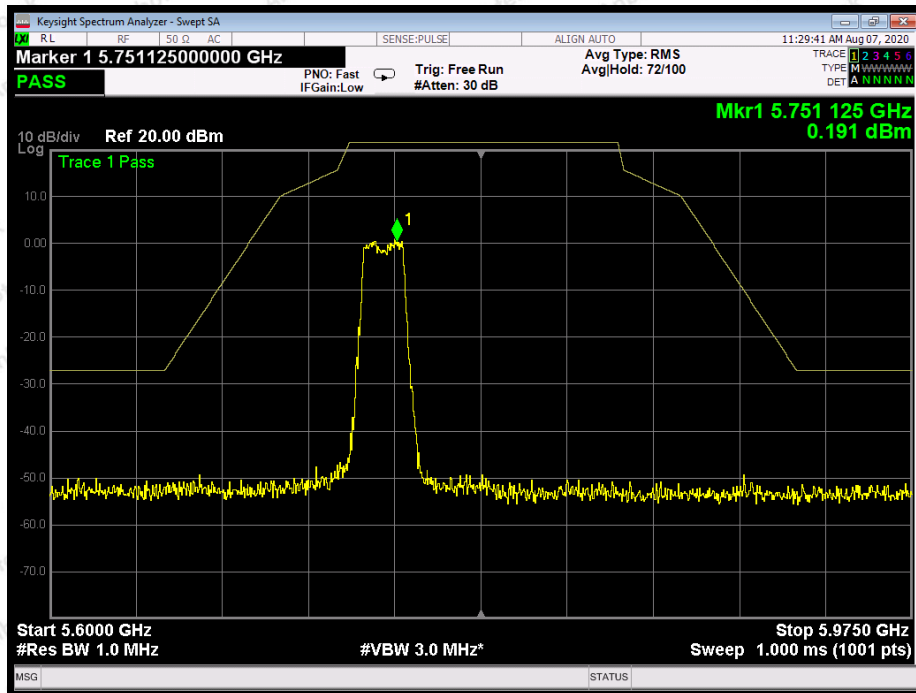


802.11ac(20): Band Edge, Left Side

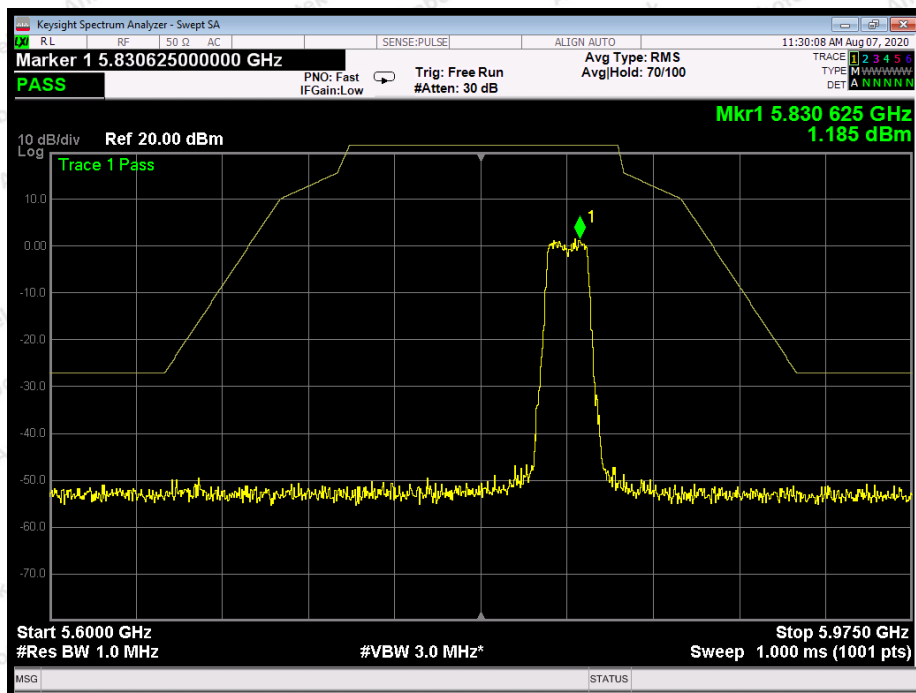


802.11ac(20): Band Edge, Right Side

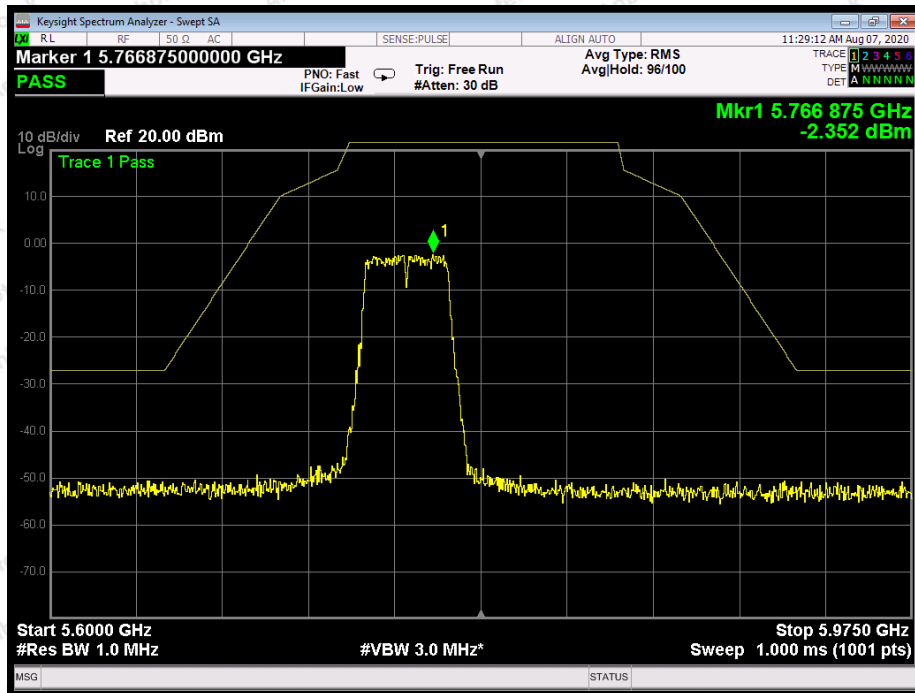


802.11n(40): Band Edge, Left Side

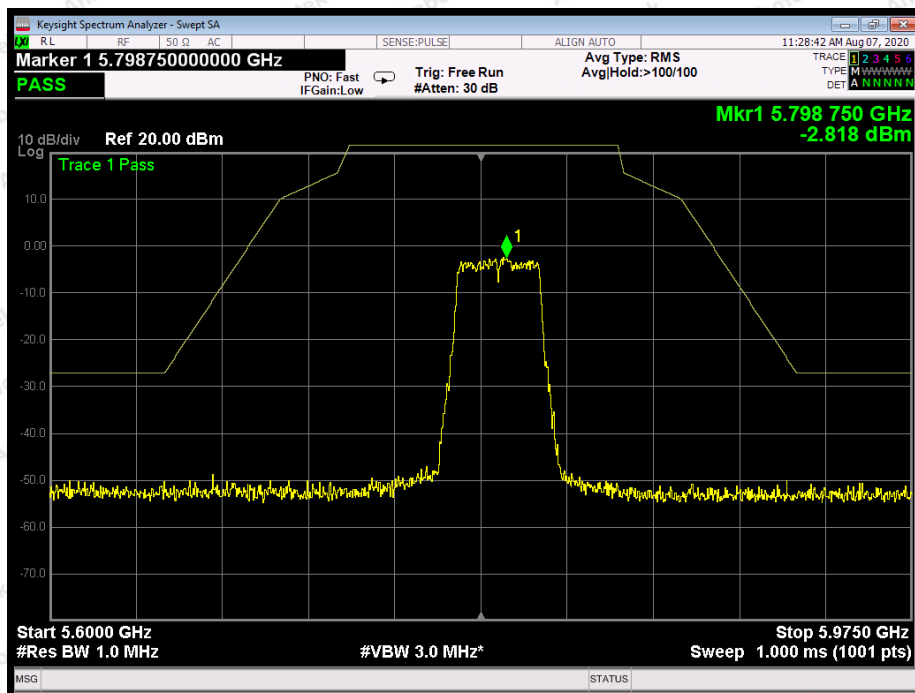


802.11n(40): Band Edge, Right Side

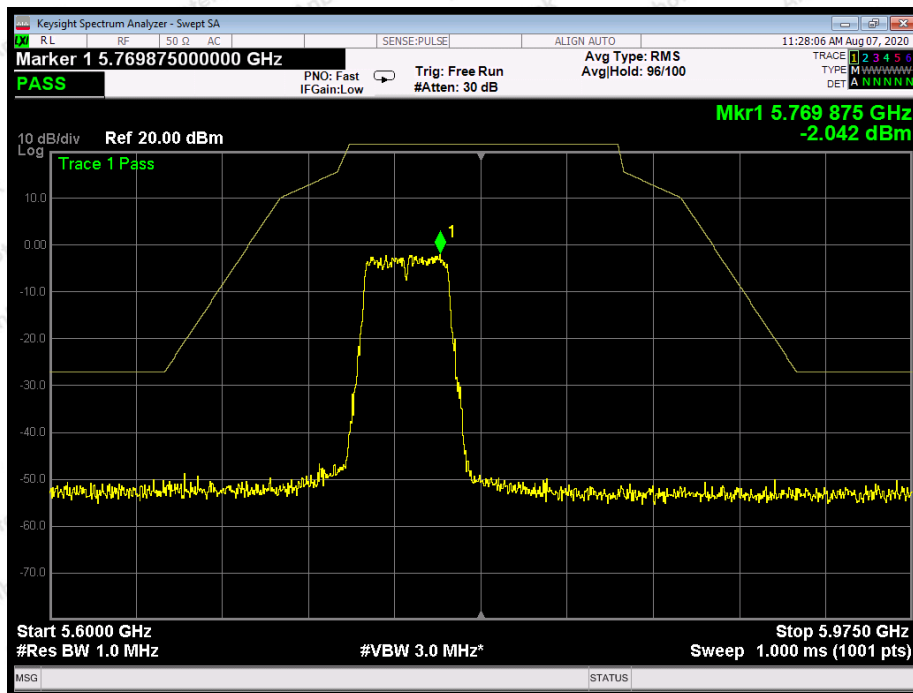

802.11ac(40): Band Edge, Left Side

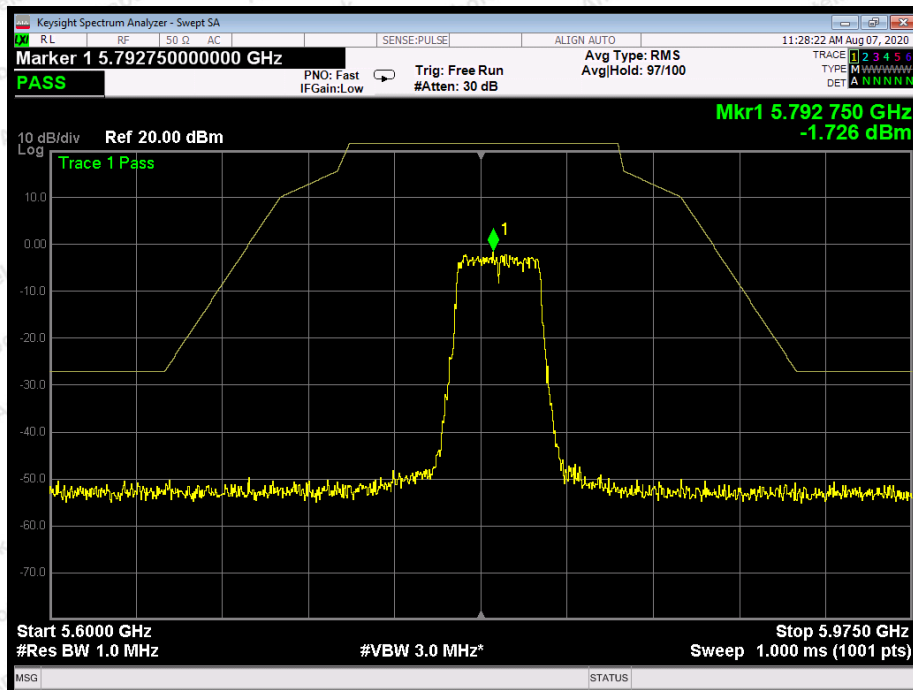

802.11ac(40): Band Edge, Right Side

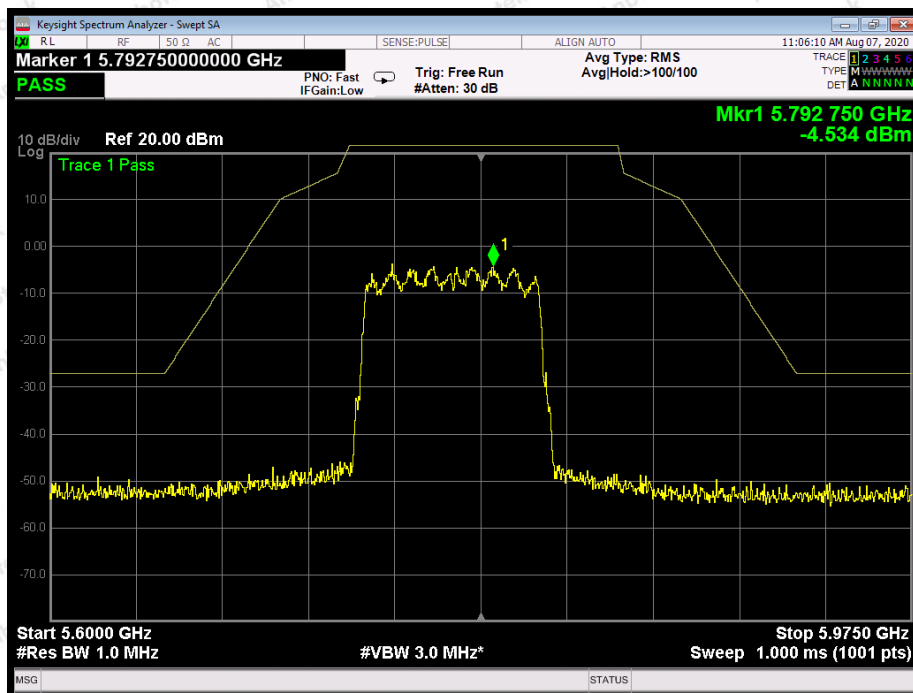

802.11ac(80): Band Edge

Test Results (Above 1000MHz)

ANT B:

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	40.64	31.98	17.08	33.91	55.79	68.20	-12.41	V
17235.00	41.17	32.65	20.03	34.85	59.00	68.20	-9.20	V
11490.00	40.42	31.98	17.08	33.91	55.57	68.20	-12.63	H
17235.00	41.61	32.65	20.03	34.85	59.44	68.20	-8.76	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.29	31.98	17.08	33.91	44.44	54.00	-9.56	V
17235.00	27.68	32.65	20.03	34.85	45.51	54.00	-8.49	V
11490.00	29.08	31.98	17.08	33.91	44.23	54.00	-9.77	H
17235.00	27.10	32.65	20.03	34.85	44.93	54.00	-9.07	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	40.08	32.44	17.18	33.91	55.79	68.20	-12.41	V
17355.00	41.96	32.78	20.12	34.86	60.00	68.20	-8.20	V
11570.00	41.90	32.44	17.18	33.91	57.61	68.20	-10.59	H
17355.00	41.90	32.78	20.12	34.86	59.94	68.20	-8.26	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.40	32.44	17.18	33.91	45.11	54.00	-8.89	V
17355.00	28.94	32.78	20.12	34.86	46.98	54.00	-7.02	V
11570.00	27.76	32.44	17.18	33.91	43.47	54.00	-10.53	H
17355.00	28.65	32.78	20.12	34.86	46.69	54.00	-7.31	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	41.91	32.59	18.02	33.92	58.60	68.20	-9.60	V
17475.00	40.69	32.87	20.15	34.88	58.83	68.20	-9.37	V
11650.00	40.22	32.59	18.02	33.92	56.91	68.20	-11.29	H
17475.00	40.05	32.87	20.15	34.88	58.19	68.20	-10.01	H


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	27.12	32.59	18.02	33.92	43.81	54.00	-10.19	V
17475.00	29.03	32.87	20.15	34.88	47.17	54.00	-6.83	V
11650.00	29.83	32.59	18.02	33.92	46.52	54.00	-7.48	H
17475.00	28.43	32.87	20.15	34.88	46.57	54.00	-7.43	H


Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11n(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Band Edge test:

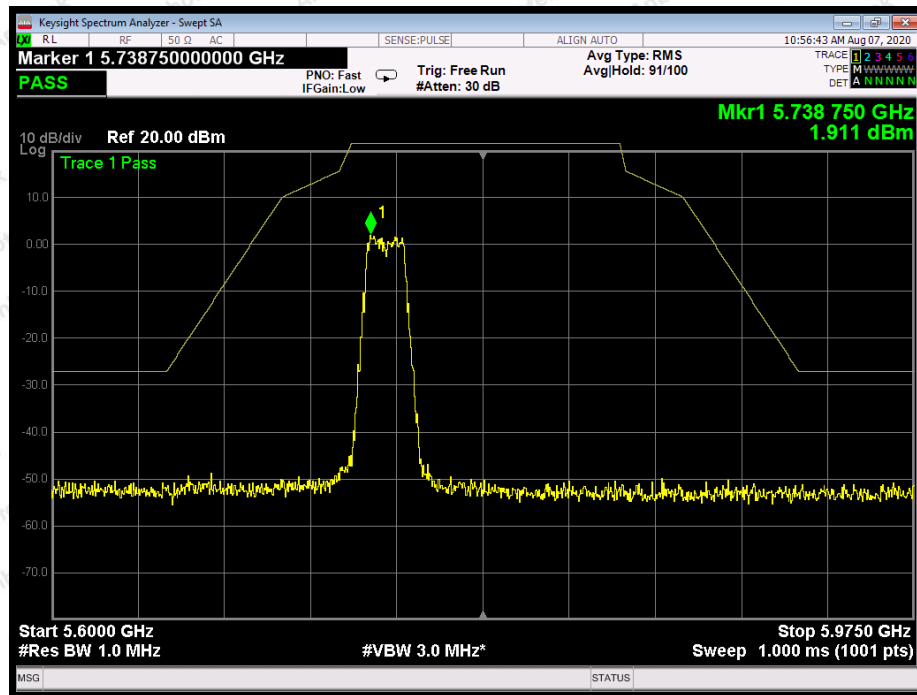


802.11a: Band Edge, Left Side

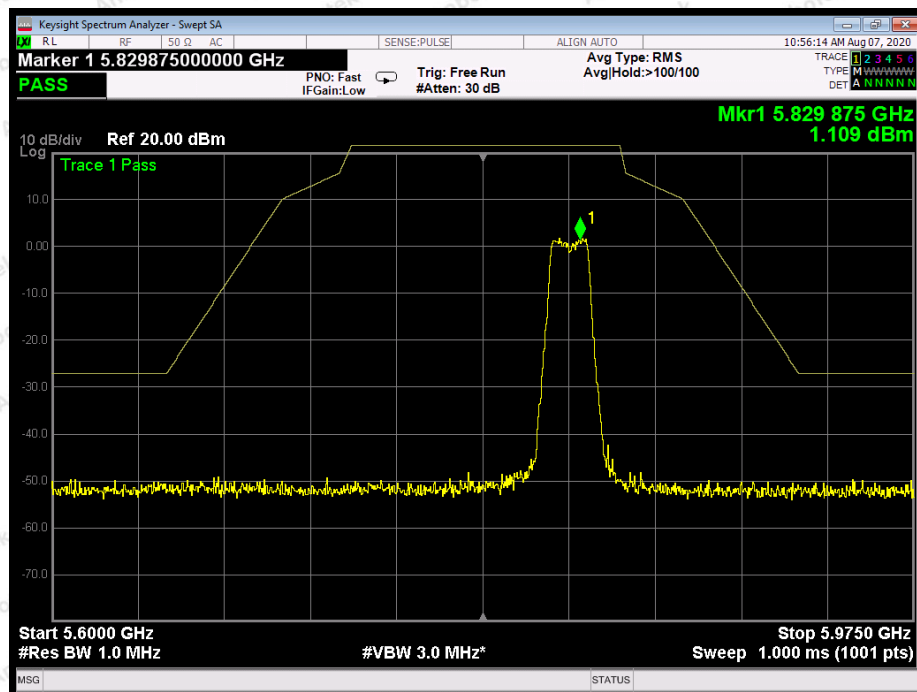


802.11a: Band Edge, Right Side

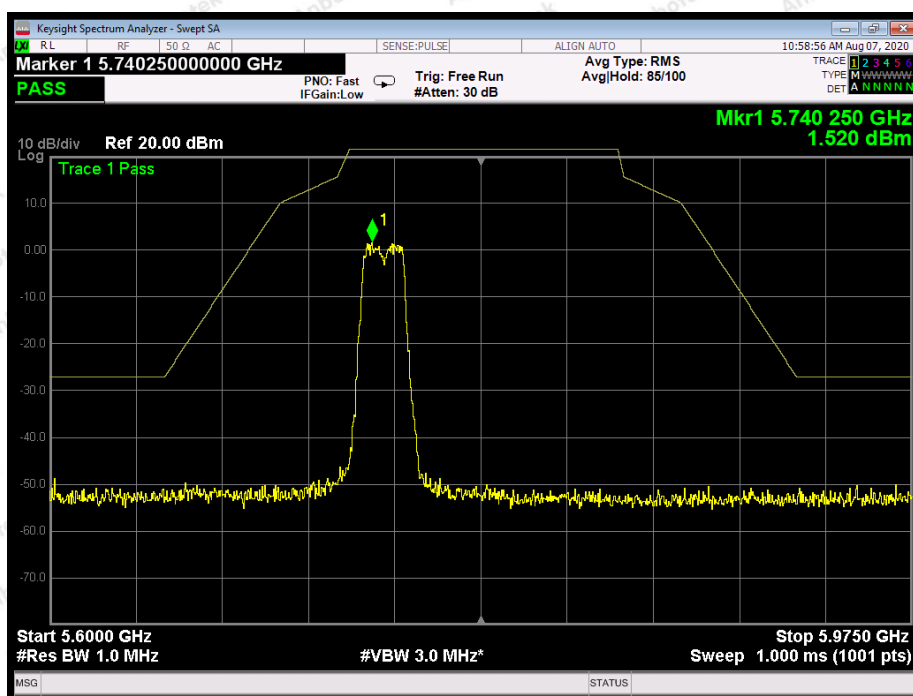


802.11n(20): Band Edge, Left Side

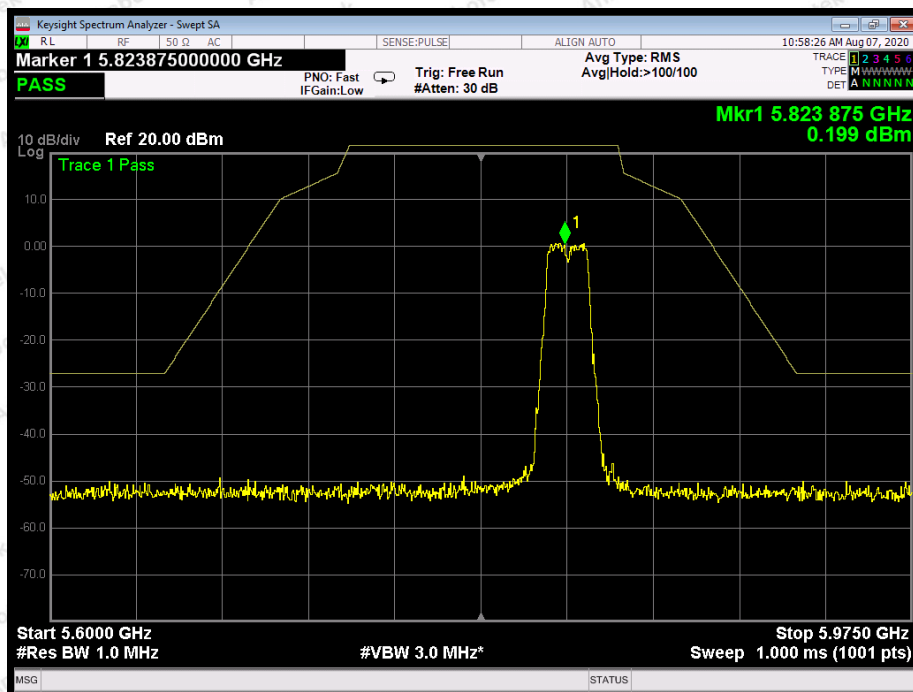


802.11n(20): Band Edge, Right Side

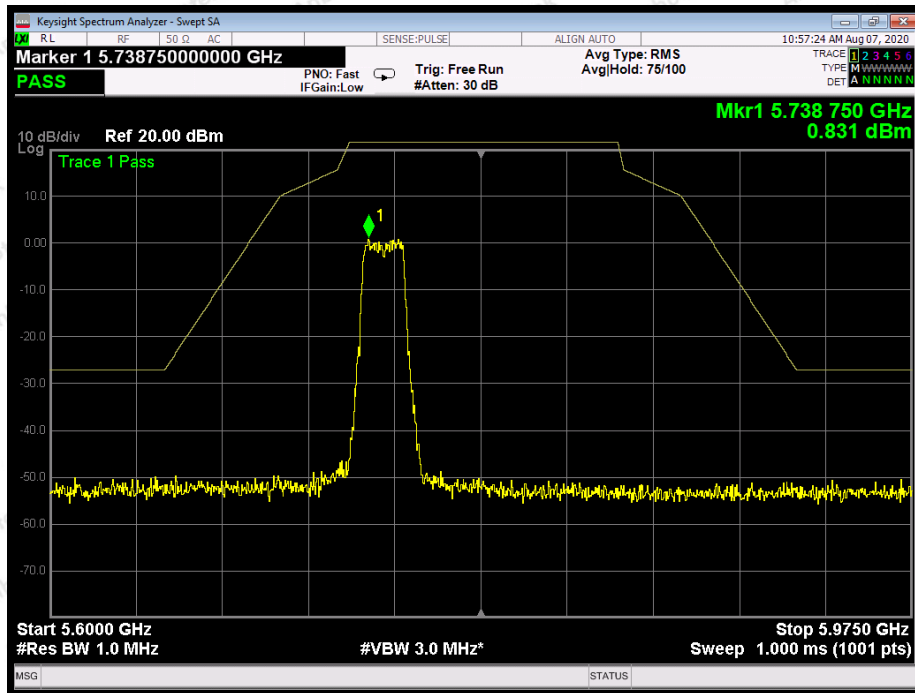


802.11ac(20): Band Edge, Left Side

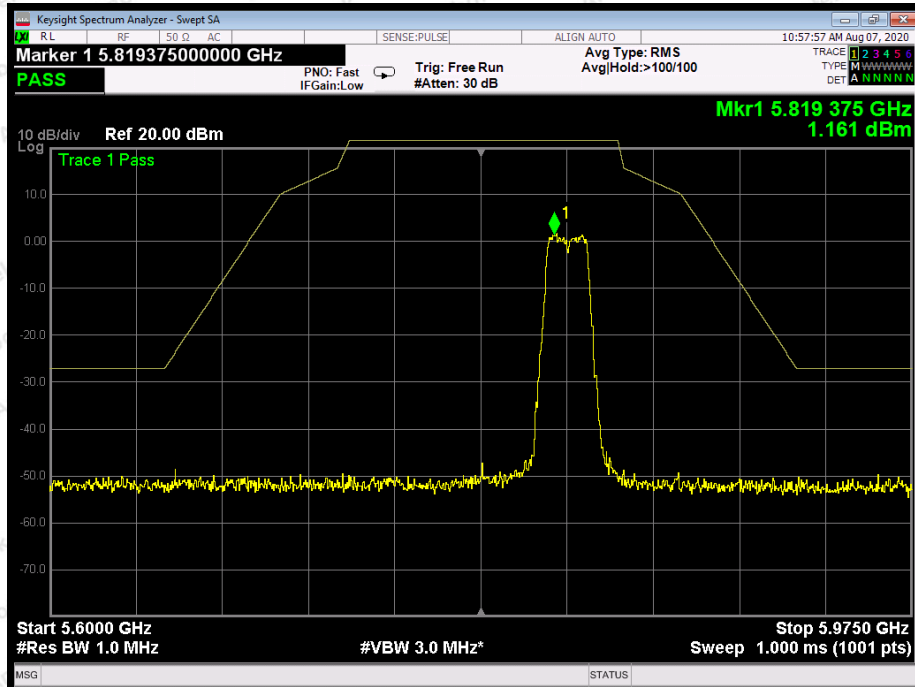


802.11ac(20): Band Edge, Right Side

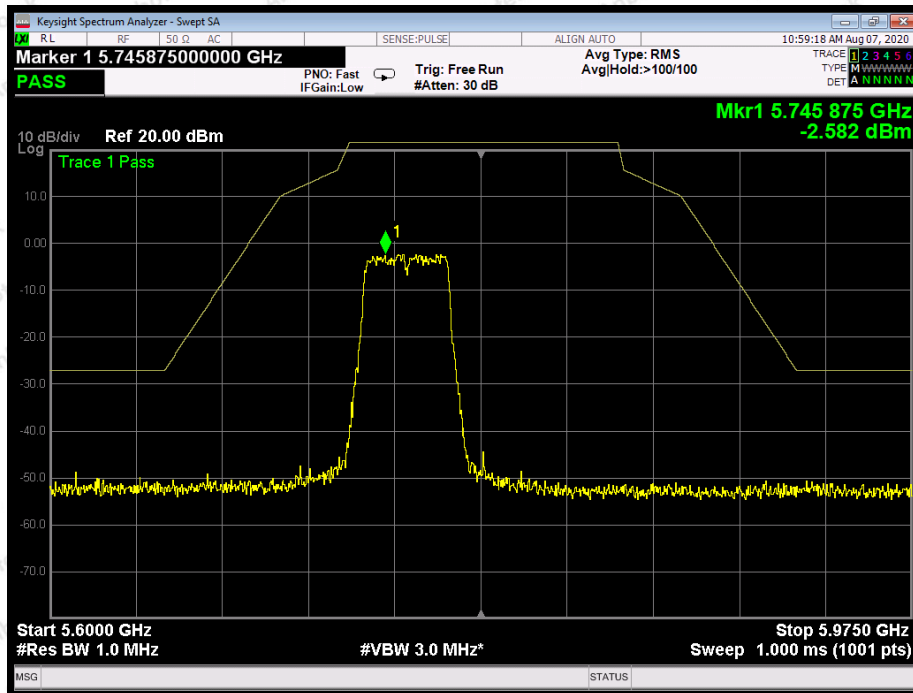


802.11n(40): Band Edge, Left Side

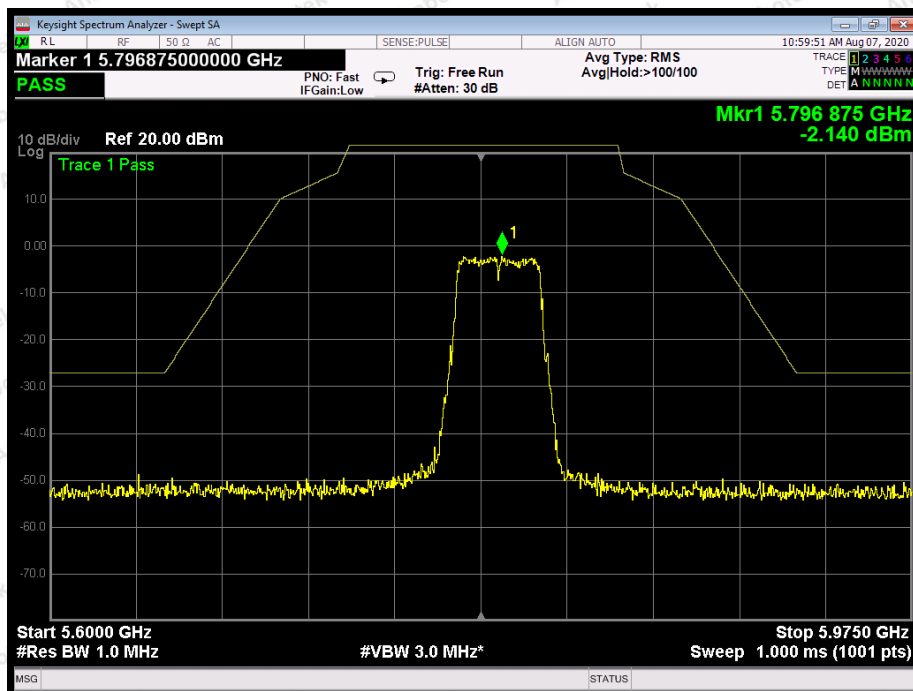


802.11n(40): Band Edge, Right Side

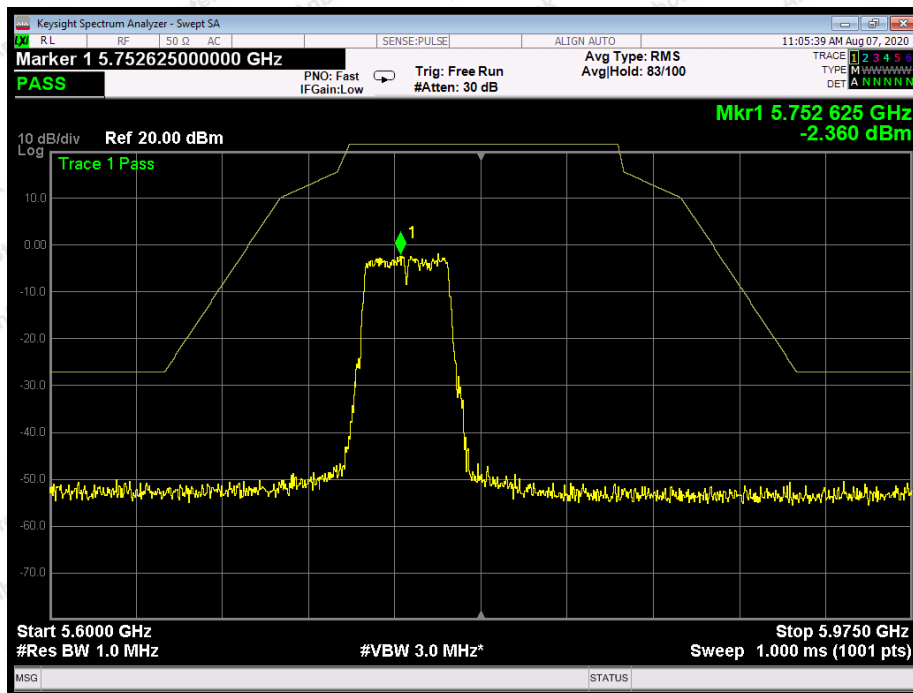

802.11ac(40): Band Edge, Left Side

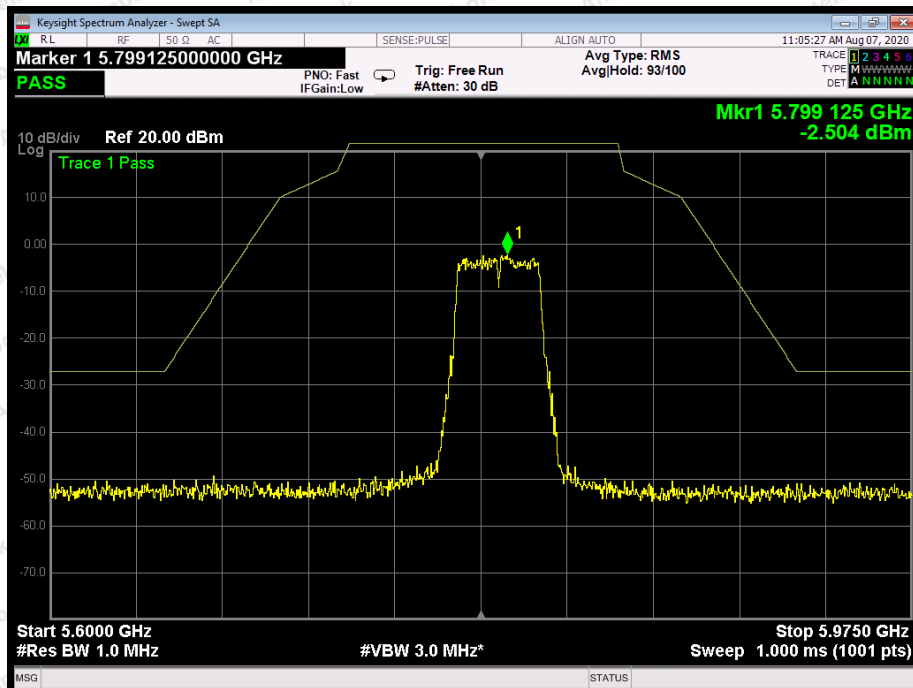

802.11ac(40): Band Edge, Right Side

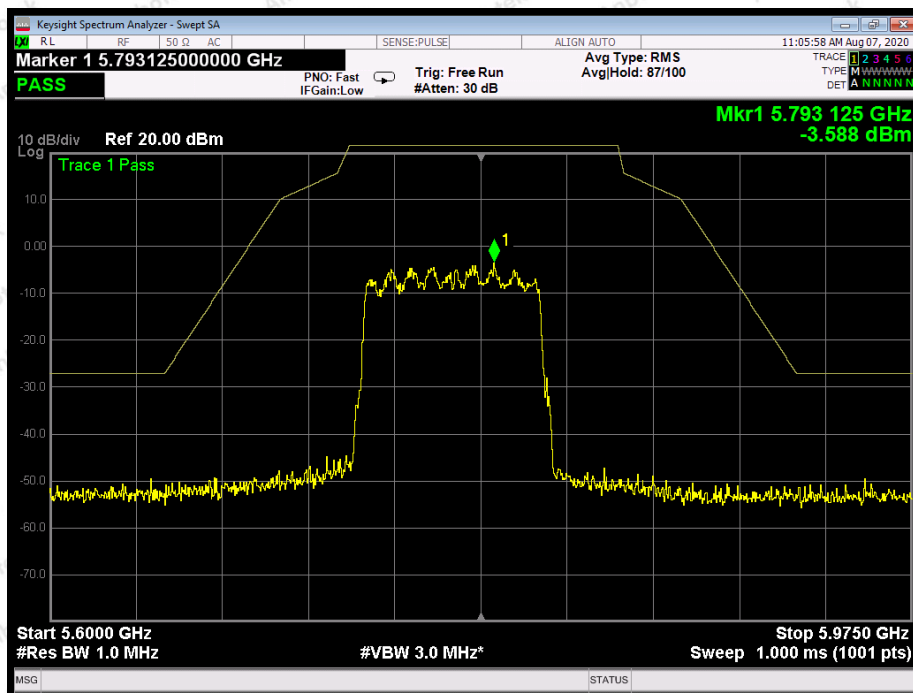

802.11ac(80): Band Edge

Test Results (Above 1000MHz)

ANT A+B:

Test mode:	IEEE 802.11a	Test channel:	Low CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.85	31.98	17.08	33.91	57.00	68.20	-11.20	V
17235.00	39.56	32.65	20.03	34.85	57.39	68.20	-10.81	V
11490.00	41.12	31.98	17.08	33.91	56.27	68.20	-11.93	H
17235.00	39.60	32.65	20.03	34.85	57.43	68.20	-10.77	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	27.01	31.98	17.08	33.91	42.16	54.00	-11.84	V
17235.00	29.99	32.65	20.03	34.85	47.82	54.00	-6.18	V
11490.00	27.09	31.98	17.08	33.91	42.24	54.00	-11.76	H
17235.00	29.39	32.65	20.03	34.85	47.22	54.00	-6.78	H

Test mode:	IEEE 802.11a	Test channel:	Mid CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	39.94	32.44	17.18	33.91	55.65	68.20	-12.55	V
17355.00	41.23	32.78	20.12	34.86	59.27	68.20	-8.93	V
11570.00	39.24	32.44	17.18	33.91	54.95	68.20	-13.25	H
17355.00	39.36	32.78	20.12	34.86	57.40	68.20	-10.80	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.84	32.44	17.18	33.91	45.55	54.00	-8.45	V
17355.00	29.86	32.78	20.12	34.86	47.90	54.00	-6.10	V
11570.00	28.91	32.44	17.18	33.91	44.62	54.00	-9.38	H
17355.00	29.29	32.78	20.12	34.86	47.33	54.00	-6.67	H

Test mode:	IEEE 802.11a	Test channel:	High CH
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	41.72	32.59	18.02	33.92	58.41	68.20	-9.79	V
17475.00	39.64	32.87	20.15	34.88	57.78	68.20	-10.42	V
11650.00	41.27	32.59	18.02	33.92	57.96	68.20	-10.24	H
17475.00	41.19	32.87	20.15	34.88	59.33	68.20	-8.87	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	27.38	32.59	18.02	33.92	44.07	54.00	-9.93	V
17475.00	29.93	32.87	20.15	34.88	48.07	54.00	-5.93	V
11650.00	27.72	32.59	18.02	33.92	44.41	54.00	-9.59	H
17475.00	27.94	32.87	20.15	34.88	46.08	54.00	-7.92	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.40	31.98	17.08	33.91	56.55	68.20	-11.65	V
17235.00	39.09	32.65	20.03	34.85	56.92	68.20	-11.28	V
11490.00	41.46	31.98	17.08	33.91	56.61	68.20	-11.59	H
17235.00	40.27	32.65	20.03	34.85	58.10	68.20	-10.10	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	28.64	31.98	17.08	33.91	43.79	54.00	-10.21	V
17235.00	27.95	32.65	20.03	34.85	45.78	54.00	-8.22	V
11490.00	28.15	31.98	17.08	33.91	43.30	54.00	-10.70	H
17235.00	29.50	32.65	20.03	34.85	47.33	54.00	-6.67	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	40.05	32.44	17.18	33.91	55.76	68.20	-12.44	V
17355.00	39.76	32.78	20.12	34.86	57.80	68.20	-10.40	V
11570.00	41.59	32.44	17.18	33.91	57.30	68.20	-10.90	H
17355.00	40.78	32.78	20.12	34.86	58.82	68.20	-9.38	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	27.72	32.44	17.18	33.91	43.43	54.00	-10.57	V
17355.00	28.14	32.78	20.12	34.86	46.18	54.00	-7.82	V
11570.00	28.37	32.44	17.18	33.91	44.08	54.00	-9.92	H
17355.00	27.08	32.78	20.12	34.86	45.12	54.00	-8.88	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	40.29	32.59	18.02	33.92	56.98	68.20	-11.22	V
17475.00	40.20	32.87	20.15	34.88	58.34	68.20	-9.86	V
11650.00	40.34	32.59	18.02	33.92	57.03	68.20	-11.17	H
17475.00	40.58	32.87	20.15	34.88	58.72	68.20	-9.48	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	29.95	32.59	18.02	33.92	46.64	54.00	-7.36	V
17475.00	28.16	32.87	20.15	34.88	46.30	54.00	-7.70	V
11650.00	28.97	32.59	18.02	33.92	45.66	54.00	-8.34	H
17475.00	29.05	32.87	20.15	34.88	47.19	54.00	-6.81	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.76	31.98	17.08	33.91	56.91	68.20	-11.29	V
17235.00	40.99	32.65	20.03	34.85	58.82	68.20	-9.38	V
11490.00	41.13	31.98	17.08	33.91	56.28	68.20	-11.92	H
17235.00	40.79	32.65	20.03	34.85	58.62	68.20	-9.58	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	27.98	31.98	17.08	33.91	43.13	54.00	-10.87	V
17235.00	28.22	32.65	20.03	34.85	46.05	54.00	-7.95	V
11490.00	28.12	31.98	17.08	33.91	43.27	54.00	-10.73	H
17235.00	27.87	32.65	20.03	34.85	45.70	54.00	-8.30	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	39.13	32.44	17.18	33.91	54.84	68.20	-13.36	V
17355.00	40.21	32.78	20.12	34.86	58.25	68.20	-9.95	V
11570.00	39.40	32.44	17.18	33.91	55.11	68.20	-13.09	H
17355.00	39.30	32.78	20.12	34.86	57.34	68.20	-10.86	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	28.51	32.44	17.18	33.91	44.22	54.00	-9.78	V
17355.00	27.76	32.78	20.12	34.86	45.80	54.00	-8.20	V
11570.00	28.50	32.44	17.18	33.91	44.21	54.00	-9.79	H
17355.00	29.40	32.78	20.12	34.86	47.44	54.00	-6.56	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	39.28	32.59	18.02	33.92	55.97	68.20	-12.23	V
17475.00	39.51	32.87	20.15	34.88	57.65	68.20	-10.55	V
11650.00	41.41	32.59	18.02	33.92	58.10	68.20	-10.10	H
17475.00	40.98	32.87	20.15	34.88	59.12	68.20	-9.08	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	29.11	32.59	18.02	33.92	45.80	54.00	-8.20	V
17475.00	28.44	32.87	20.15	34.88	46.58	54.00	-7.42	V
11650.00	27.40	32.59	18.02	33.92	44.09	54.00	-9.91	H
17475.00	28.67	32.87	20.15	34.88	46.81	54.00	-7.19	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	40.31	31.98	17.08	33.91	55.46	68.20	-12.74	V
17265.00	39.07	32.65	20.03	34.85	56.90	68.20	-11.30	V
11510.00	40.42	31.98	17.08	33.91	55.57	68.20	-12.63	H
17265.00	41.82	32.65	20.03	34.85	59.65	68.20	-8.55	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	29.98	31.98	17.08	33.91	45.13	54.00	-8.87	V
17265.00	28.34	32.65	20.03	34.85	46.17	54.00	-7.83	V
11510.00	29.86	31.98	17.08	33.91	45.01	54.00	-8.99	H
17265.00	28.65	32.65	20.03	34.85	46.48	54.00	-7.52	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	39.88	32.59	18.02	33.92	56.57	68.20	-11.63	V
17385.00	39.55	32.87	20.15	34.88	57.69	68.20	-10.51	V
11590.00	39.84	32.59	18.02	33.92	56.53	68.20	-11.67	H
17385.00	40.88	32.87	20.15	34.88	59.02	68.20	-9.18	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	29.75	32.59	18.02	33.92	46.44	54.00	-7.56	V
17385.00	29.45	32.87	20.15	34.88	47.59	54.00	-6.41	V
11590.00	29.28	32.59	18.02	33.92	45.97	54.00	-8.03	H
17385.00	27.68	32.78	20.12	34.86	45.72	54.00	-8.28	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	40.18	31.98	17.08	33.91	55.33	68.20	-12.87	V
17265.00	41.78	32.65	20.03	34.85	59.61	68.20	-8.59	V
11510.00	41.63	31.98	17.08	33.91	56.78	68.20	-11.42	H
17265.00	39.39	32.65	20.03	34.85	57.22	68.20	-10.98	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	28.70	31.98	17.08	33.91	43.85	54.00	-10.15	V
17265.00	28.63	32.65	20.03	34.85	46.46	54.00	-7.54	V
11510.00	29.94	31.98	17.08	33.91	45.09	54.00	-8.91	H
17265.00	29.60	32.65	20.03	34.85	47.43	54.00	-6.57	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	39.76	32.59	18.02	33.92	56.45	68.20	-11.75	V
17385.00	40.87	32.87	20.15	34.88	59.01	68.20	-9.19	V
11590.00	39.65	32.59	18.02	33.92	56.34	68.20	-11.86	H
17385.00	40.06	32.87	20.15	34.88	58.20	68.20	-10.00	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	29.57	32.59	18.02	33.92	46.26	54.00	-7.74	V
17385.00	28.87	32.87	20.15	34.88	47.01	54.00	-6.99	V
11590.00	27.01	32.59	18.02	33.92	43.70	54.00	-10.30	H
17385.00	28.78	32.78	20.12	34.86	46.82	54.00	-7.18	H

Test mode:	IEEE 802.11ac(HT80)	Test channel:	
------------	---------------------	---------------	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11550.00	40.19	32.44	17.18	33.91	55.90	68.20	-12.30	V
17325.00	41.62	32.78	20.12	34.86	59.66	68.20	-8.54	V
11550.00	41.98	32.44	17.18	33.91	57.69	68.20	-10.51	H
17325.00	39.51	32.78	20.12	34.86	57.55	68.20	-10.65	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11550.00	29.25	32.44	17.18	33.91	44.96	54.00	-9.04	V
17325.00	29.16	32.78	20.12	34.86	47.20	54.00	-6.80	V
11550.00	27.21	32.44	17.18	33.91	42.92	54.00	-11.08	H
17325.00	28.57	32.78	20.12	34.86	46.61	54.00	-7.39	H

Note:


1. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Test Item	:	Max. peak output power
Test Voltage	:	AC 120V, 60Hz for adapter
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	24℃
Humidity	:	55%RH

ANT A:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	13.81	30	PASS
	5785	13.57	30	PASS
	5825	13.70	30	PASS
802.11n20	5745	13.92	30	PASS
	5785	13.81	30	PASS
	5825	13.41	30	PASS
802.11ac20	5745	13.73	30	PASS
	5785	13.73	30	PASS
	5825	12.73	30	PASS
802.11n40	5755	12.86	30	PASS
	5795	13.34	30	PASS
802.11ac40	5755	13.35	30	PASS
	5795	12.53	30	PASS
802.11ac80	5775	13.53	30	PASS

ANT B:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	15.61	30	PASS
	5785	15.26	30	PASS
	5825	14.70	30	PASS
802.11n20	5745	14.54	30	PASS
	5785	15.69	30	PASS
	5825	14.64	30	PASS
802.11ac20	5745	14.94	30	PASS
	5785	15.04	30	PASS
	5825	14.76	30	PASS
802.11n40	5755	14.05	30	PASS
	5795	13.87	30	PASS
802.11ac40	5755	13.28	30	PASS
	5795	14.61	30	PASS
802.11ac80	5775	13.59	30	PASS

ANT A+B:


Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	17.81	30	PASS
	5785	17.51	30	PASS
	5825	17.24	30	PASS
802.11n20	5745	17.25	30	PASS
	5785	17.86	30	PASS
	5825	17.08	30	PASS
802.11ac20	5745	17.39	30	PASS
	5785	17.44	30	PASS
	5825	16.87	30	PASS
802.11n40	5755	16.51	30	PASS
	5795	16.62	30	PASS
802.11ac40	5755	16.33	30	PASS
	5795	16.70	30	PASS
802.11ac80	5775	16.57	30	PASS

6. Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)&15.407(e)
---------------	--

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;

Set the VBW > RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

6 dB bandwidth

RBW = 100kHz;

Set the video bandwidth (VBW) ≥ 3 RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.

5. Repeat until all the rest channels are investigated.

6.4. Test Data

Test Item : 6dB &26dB BW
 Test Voltage : AC 120V, 60Hz for adapter
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 24℃
 Humidity : 55%RH


ANT A:

Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5745	16.40	>0.5MHz	PASS
	5785	16.39		PASS
	5825	16.38		PASS
802.11n20	5745	17.59		PASS
	5785	17.58		PASS
	5825	17.59		PASS
802.11ac20	5745	17.59		PASS
	5785	17.56		PASS
	5825	17.60		PASS
802.11n40	5755	36.34		PASS
	5795	36.02		PASS
802.11ac40	5755	35.78		PASS
	5795	35.99		PASS
802.11ac80	5775	75.31		PASS


Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5745	20.89	16.678
	5785	20.79	16.658
	5825	20.99	16.706
802.11n20	5745	21.49	17.774
	5785	21.83	17.863
	5825	21.83	17.855
802.11ac20	5745	21.39	17.768
	5785	21.55	17.712
	5825	21.35	17.835
802.11n40	5755	42.39	36.388
	5795	42.66	36.474
802.11ac40	5755	43.58	36.679
	5795	43.69	36.565
802.11ac80	5775	81.79	75.152




6dB Bandwidth

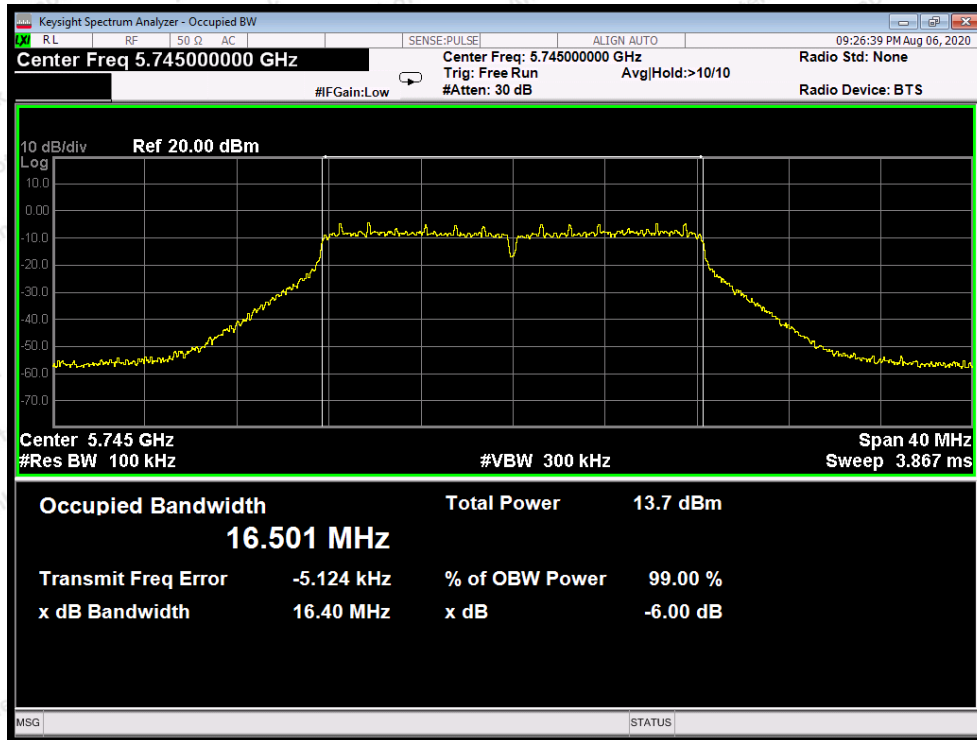


Test Mode: 802.11a--Low

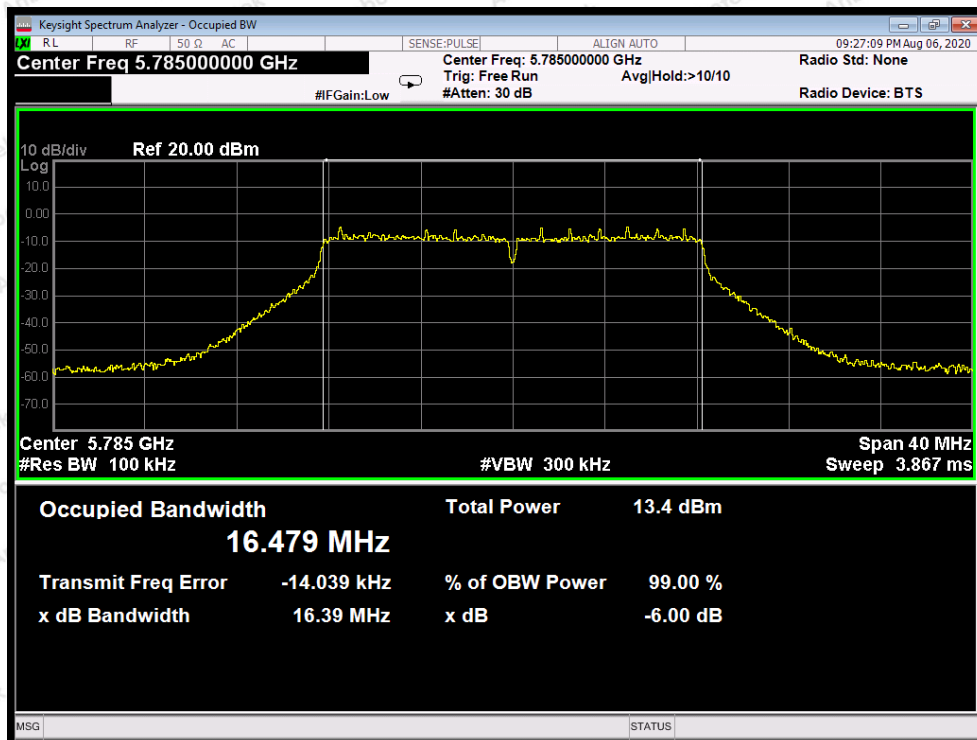


Test Mode: 802.11a---Middle

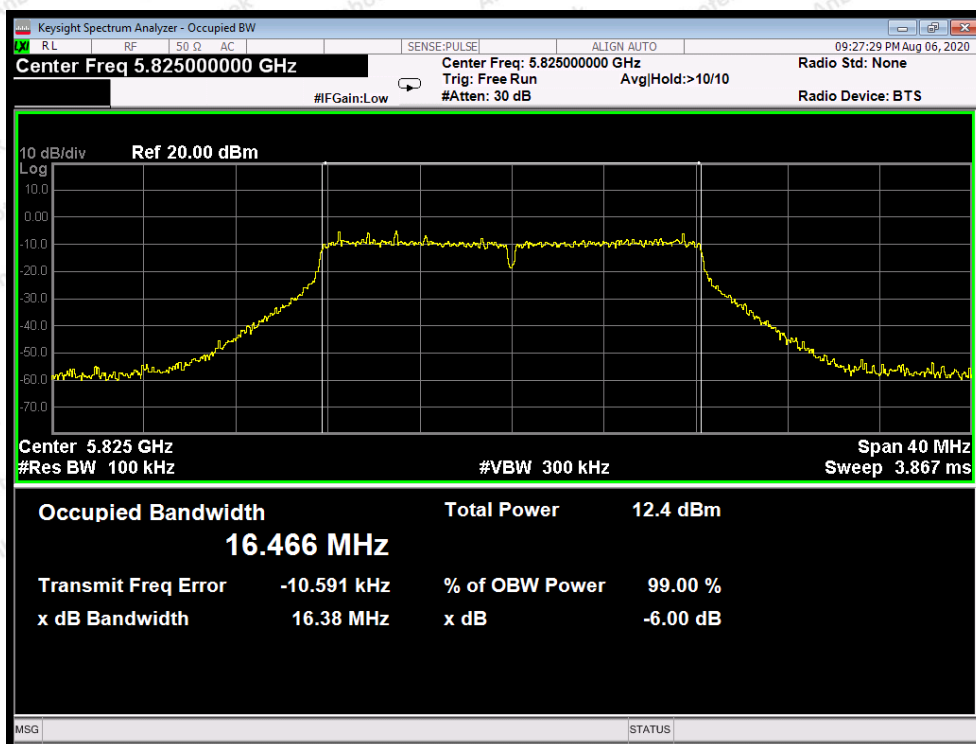


Test Mode: 802.11a---High

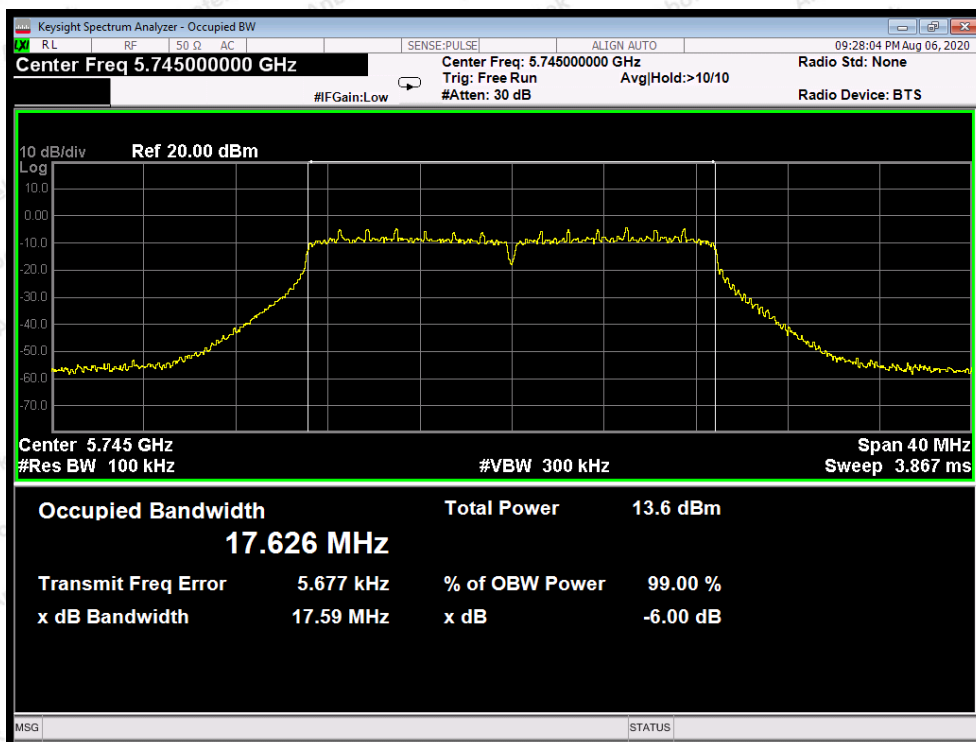


Test Mode: 802.11n20---Low

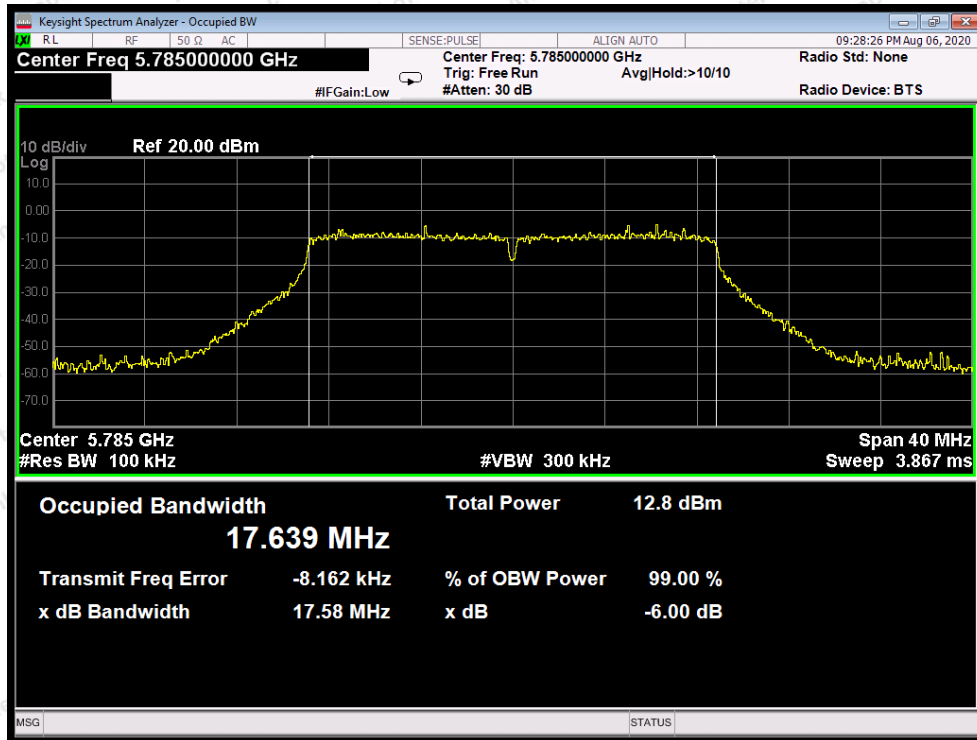


Test Mode: 802.11n20---Middle

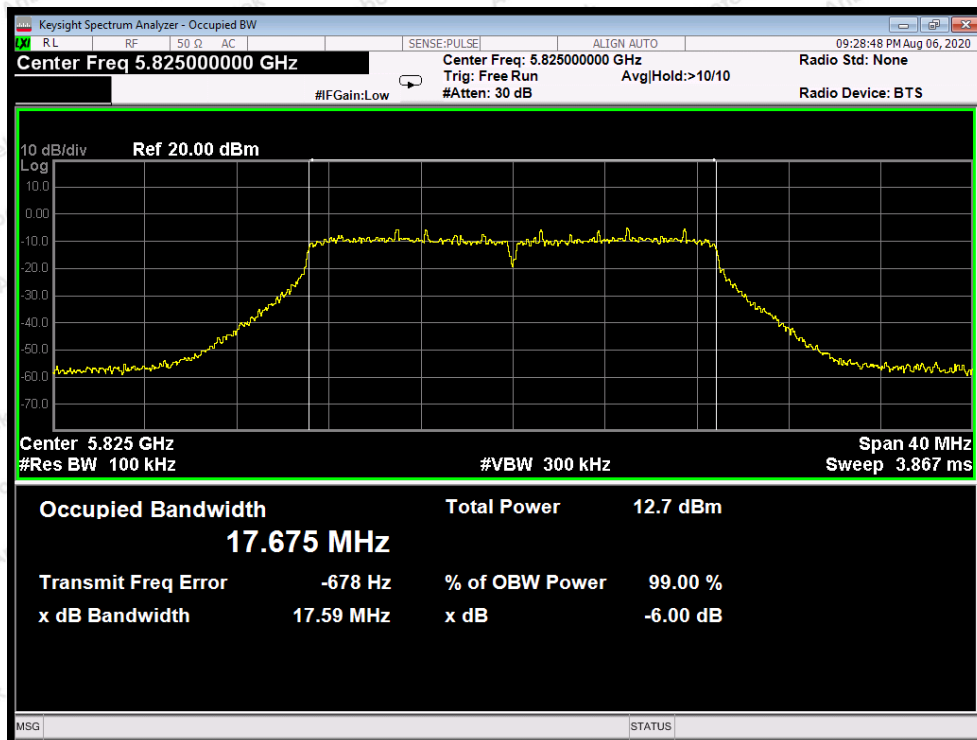


Test Mode: 802.11n20---High

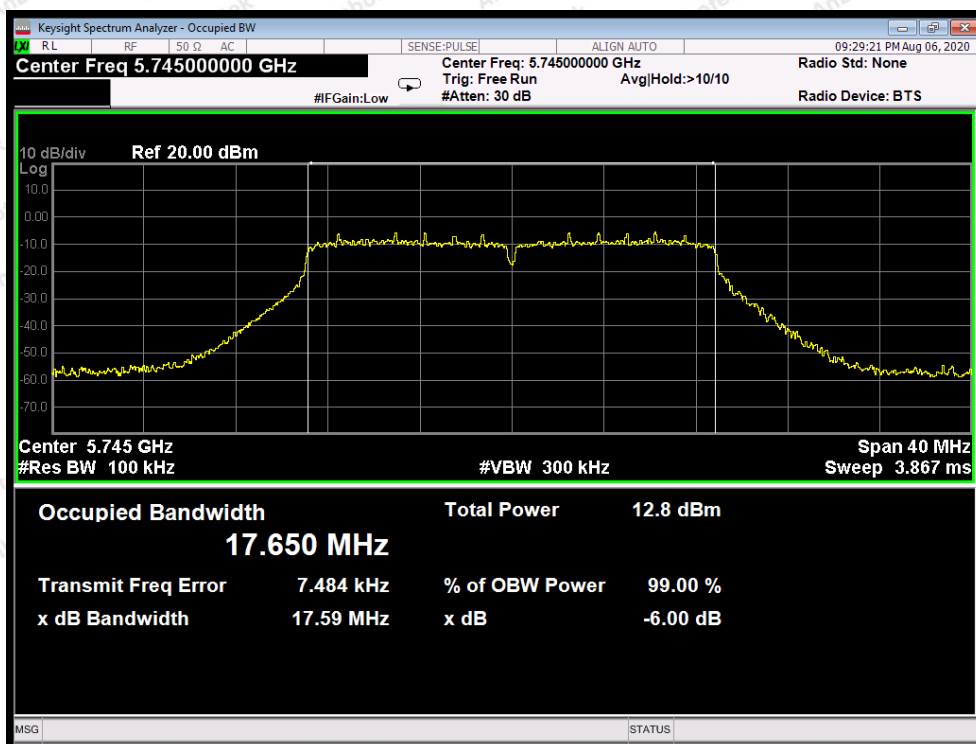


Test Mode: 802.11ac20--Low

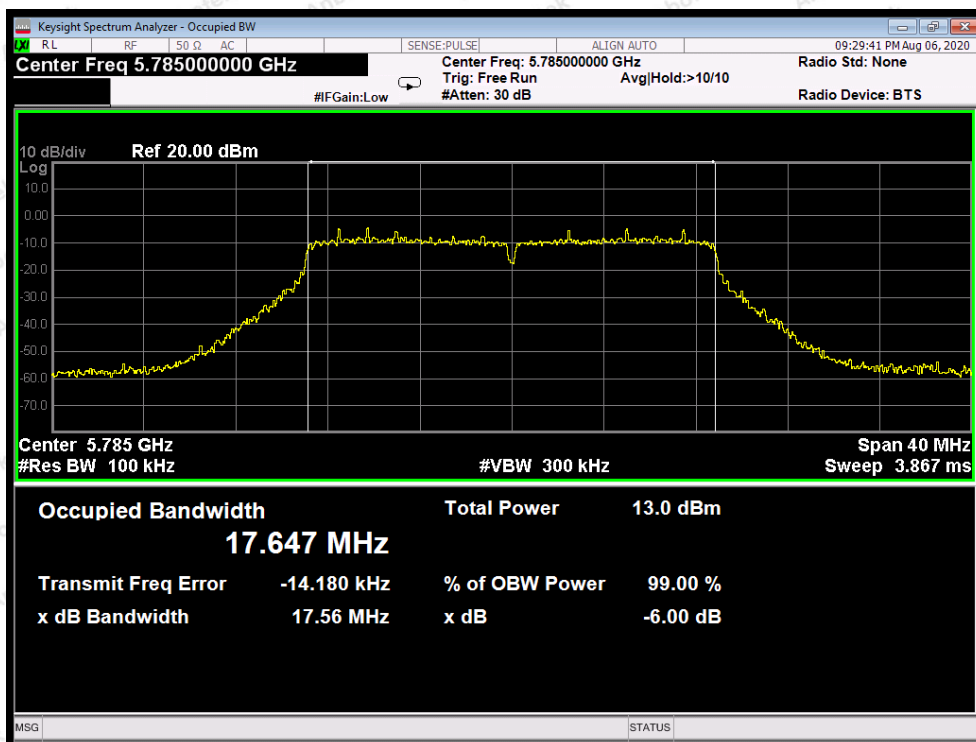


Test Mode: 802.11ac20---Middle

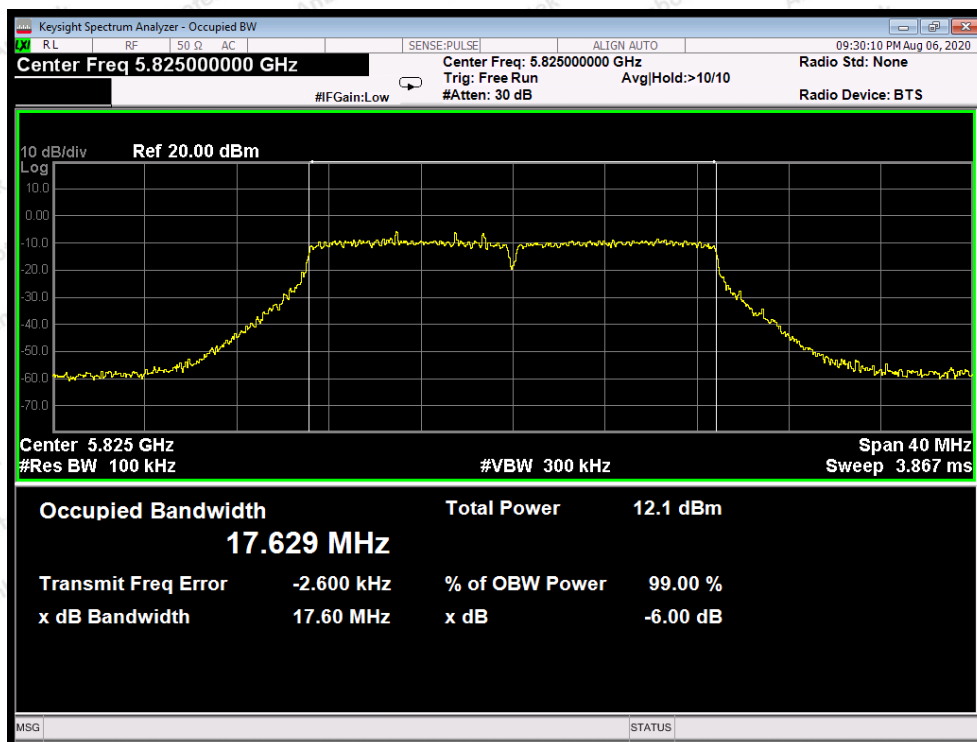


Test Mode: 802.11ac20---High

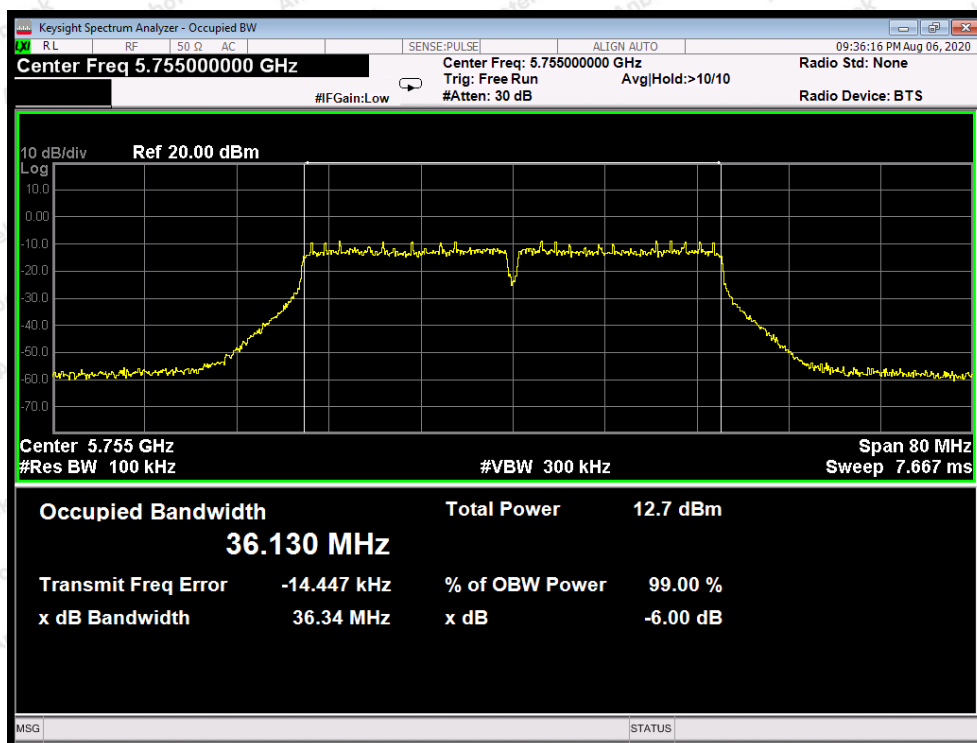


Test Mode: 802.11n40---Low

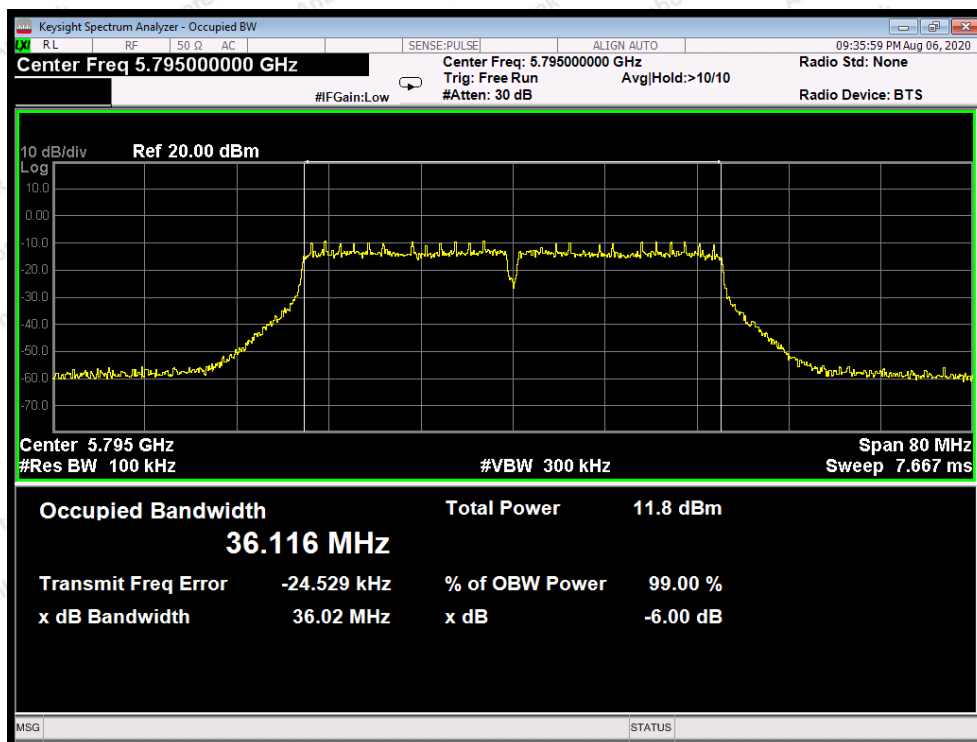


Test Mode: 802.11n40---High

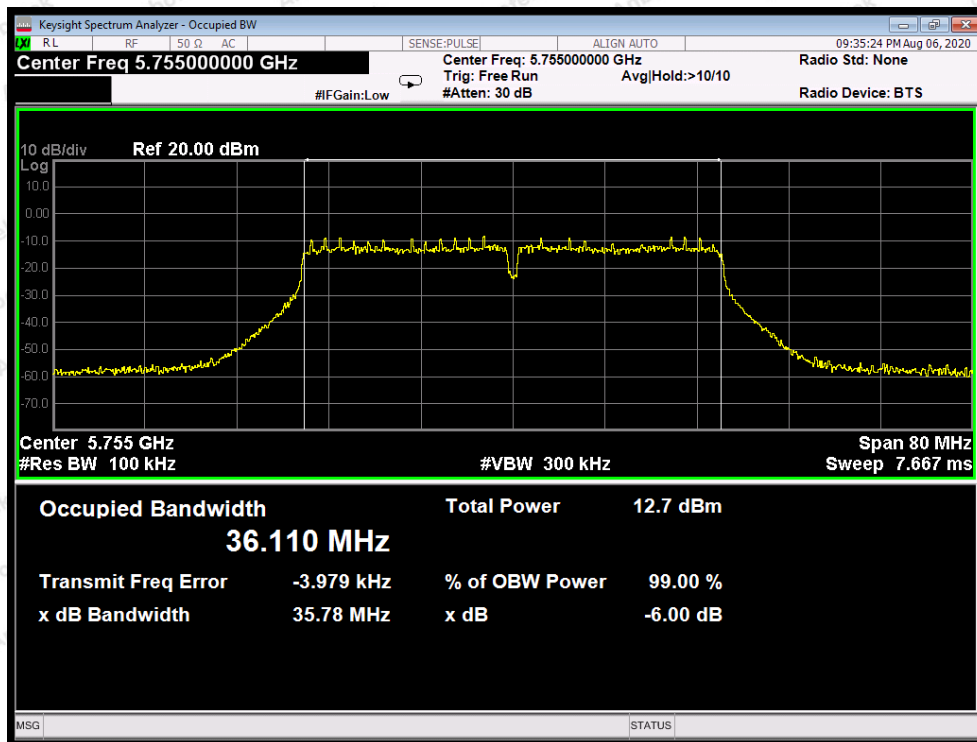

Test Mode: 802.11ac40---Low

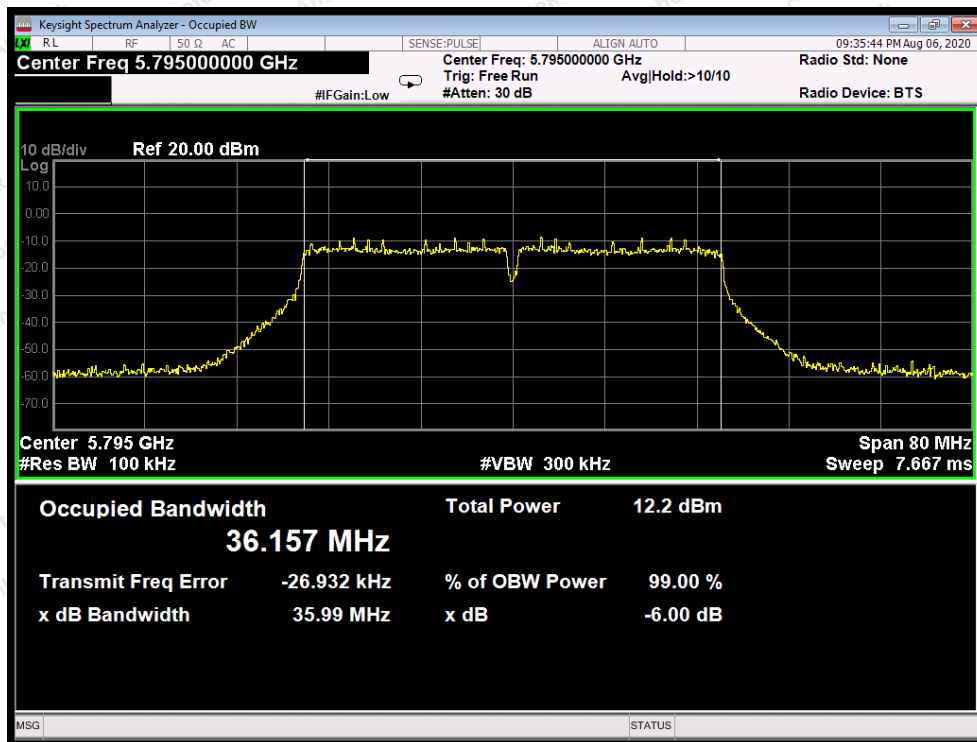


Test Mode: 802.11ac40---High

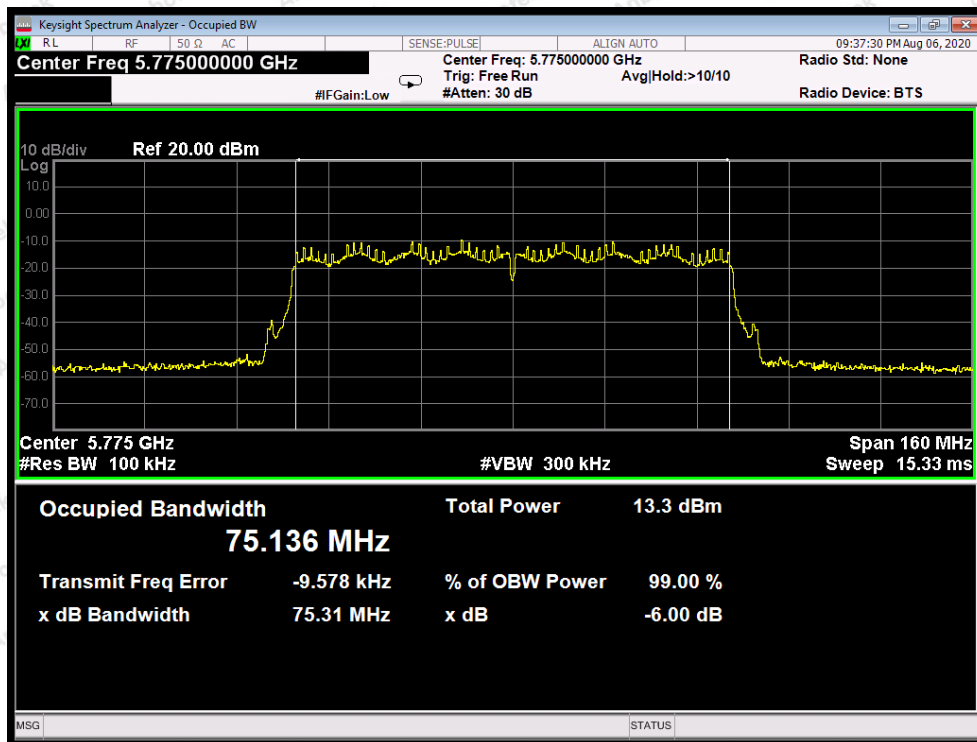


Test Mode: 802.11ac80


26dB & 99% Bandwidth

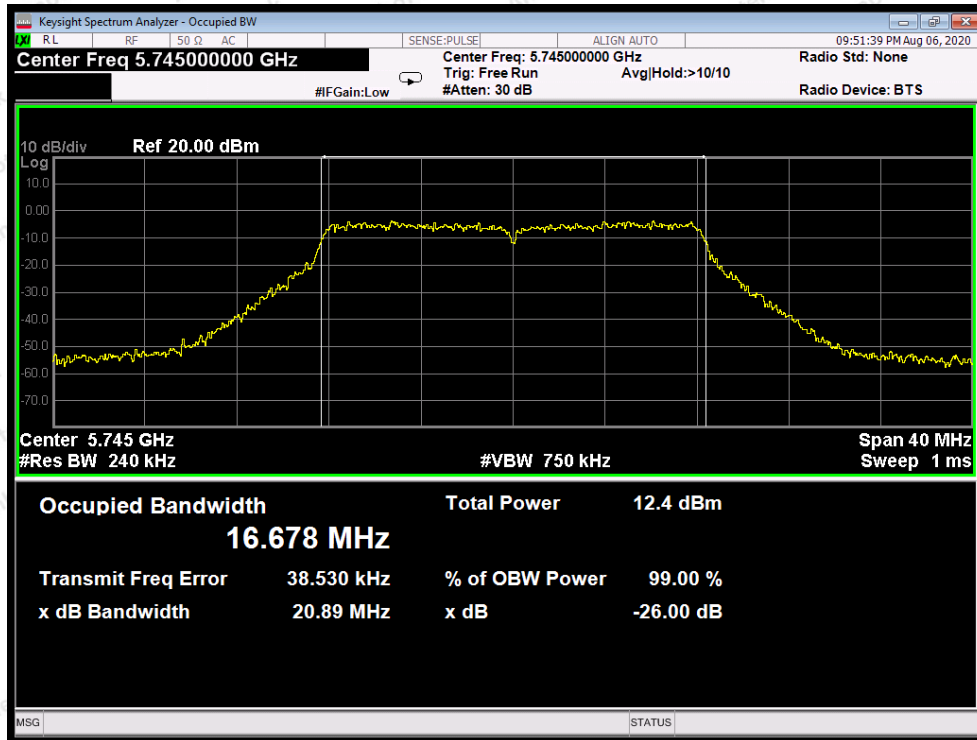


Test Mode: 802.11a--Low

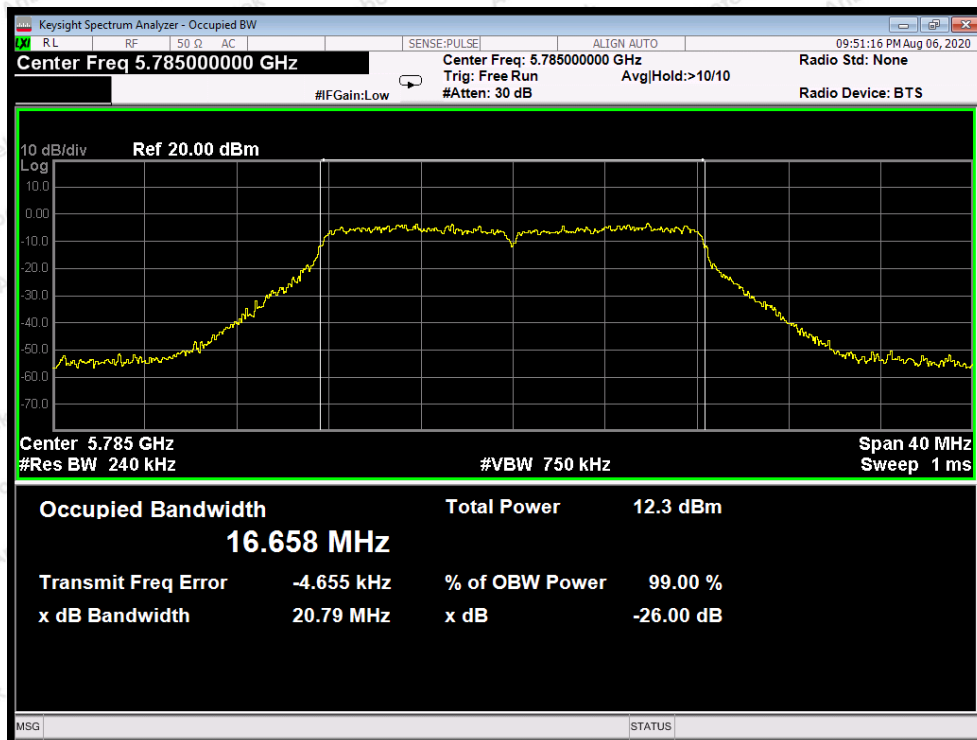


Test Mode: 802.11a---Middle

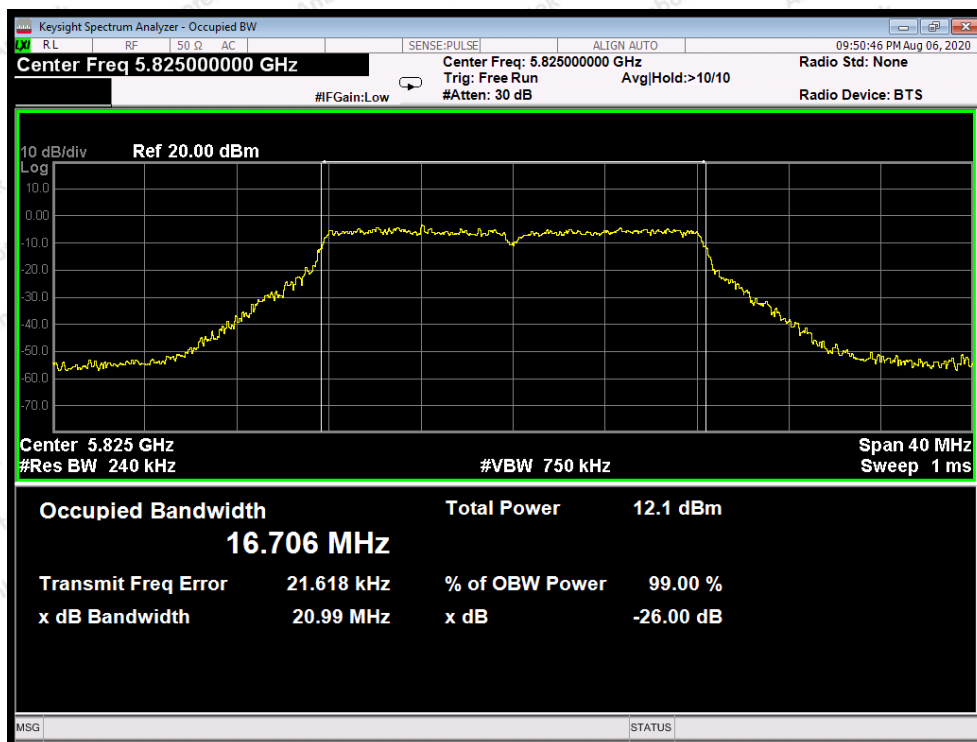


Test Mode: 802.11a---High

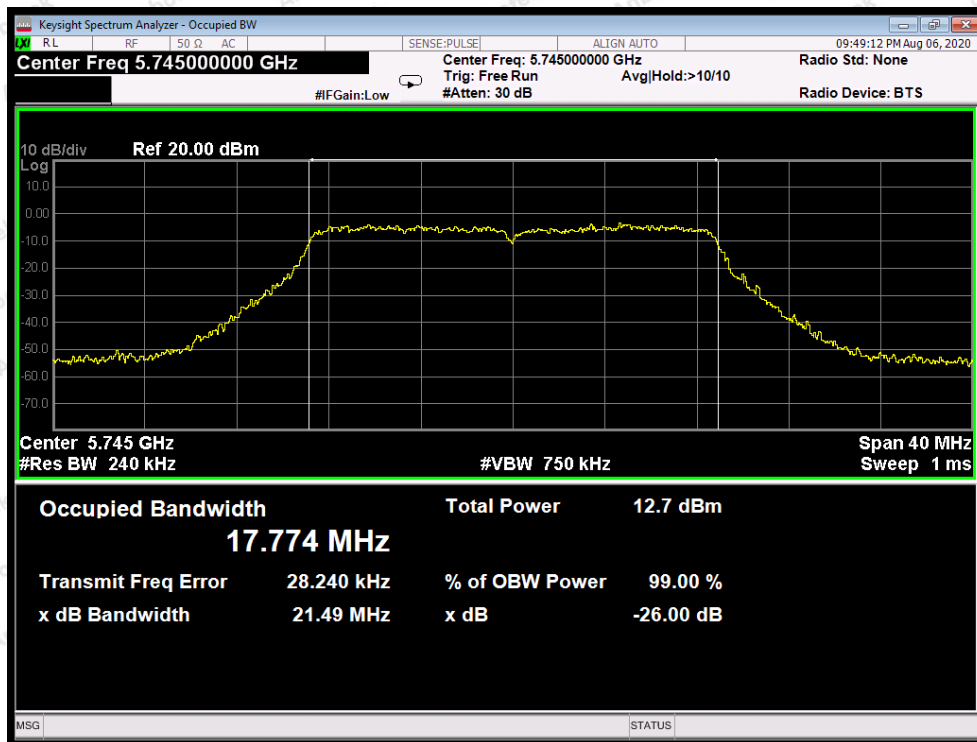


Test Mode: 802.11n20---Low

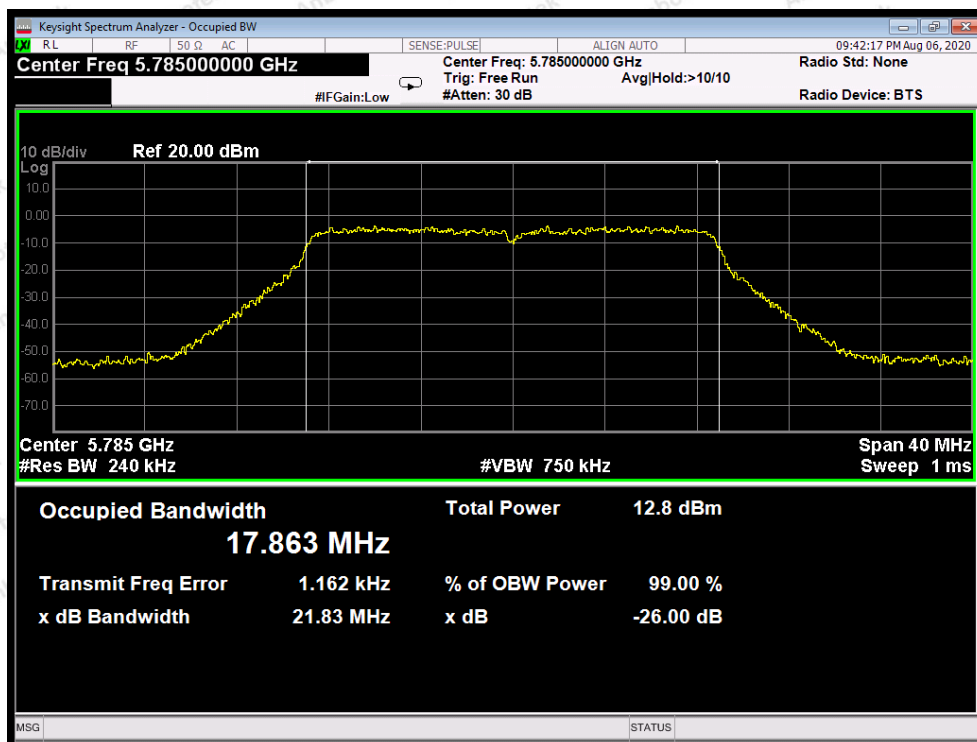


Test Mode: 802.11n20---Middle

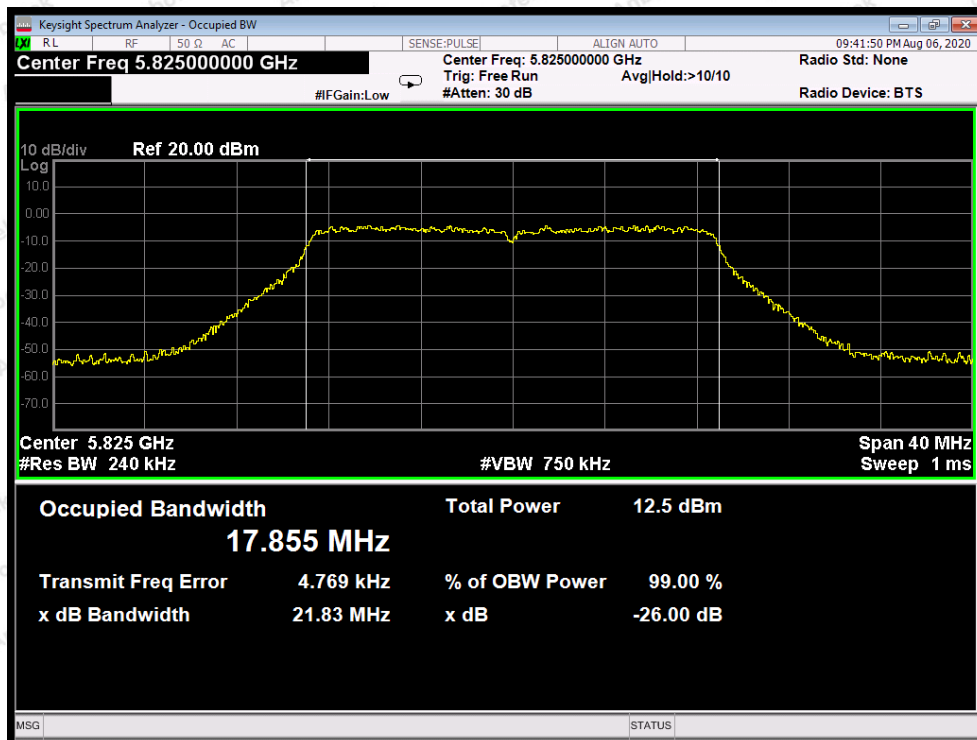


Test Mode: 802.11n20---High

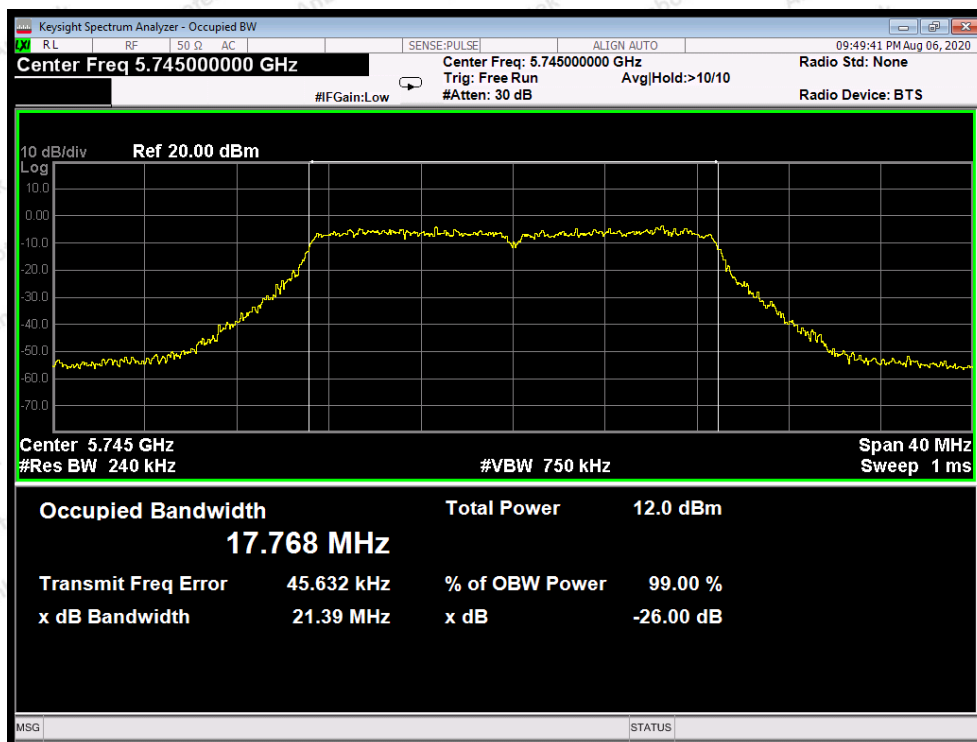


Test Mode: 802.11ac20--Low

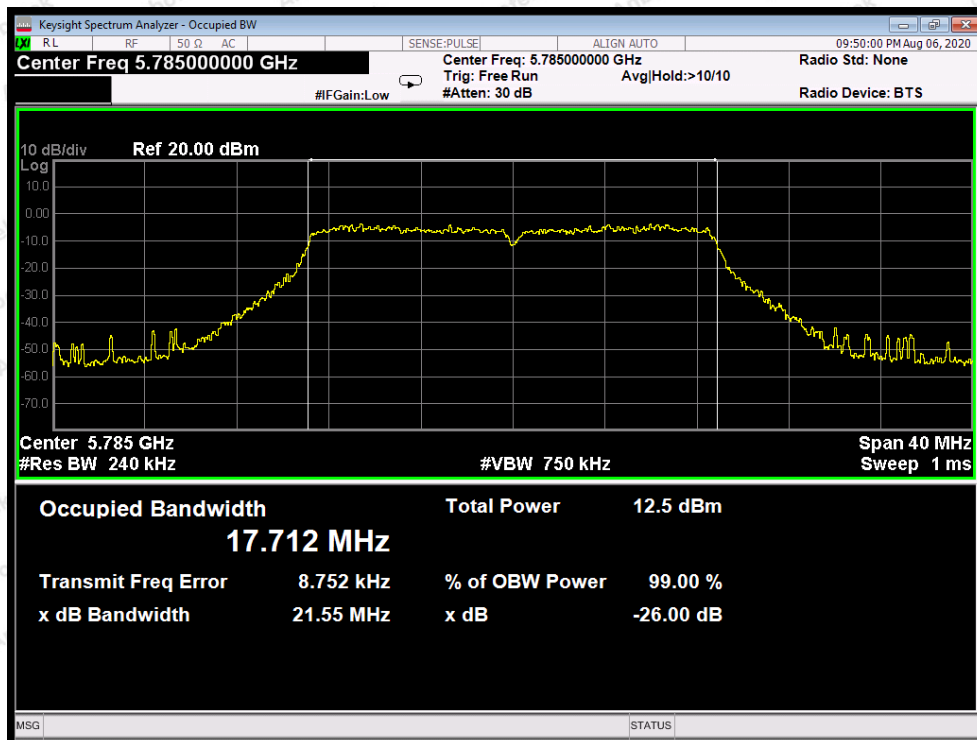


Test Mode: 802.11ac20---Middle

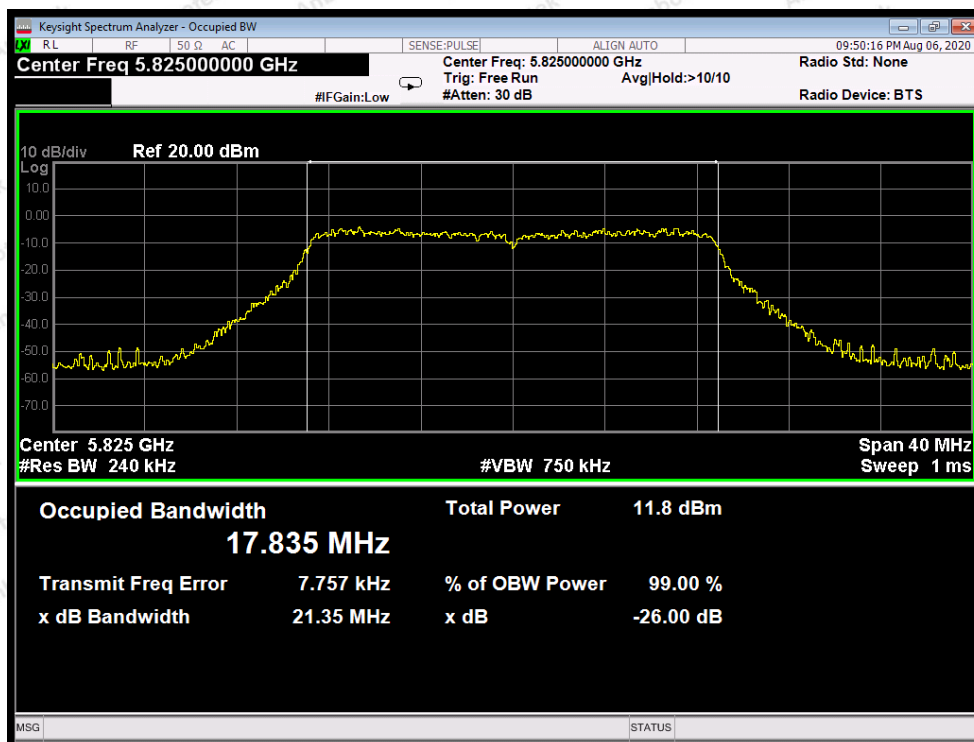


Test Mode: 802.11ac20---High

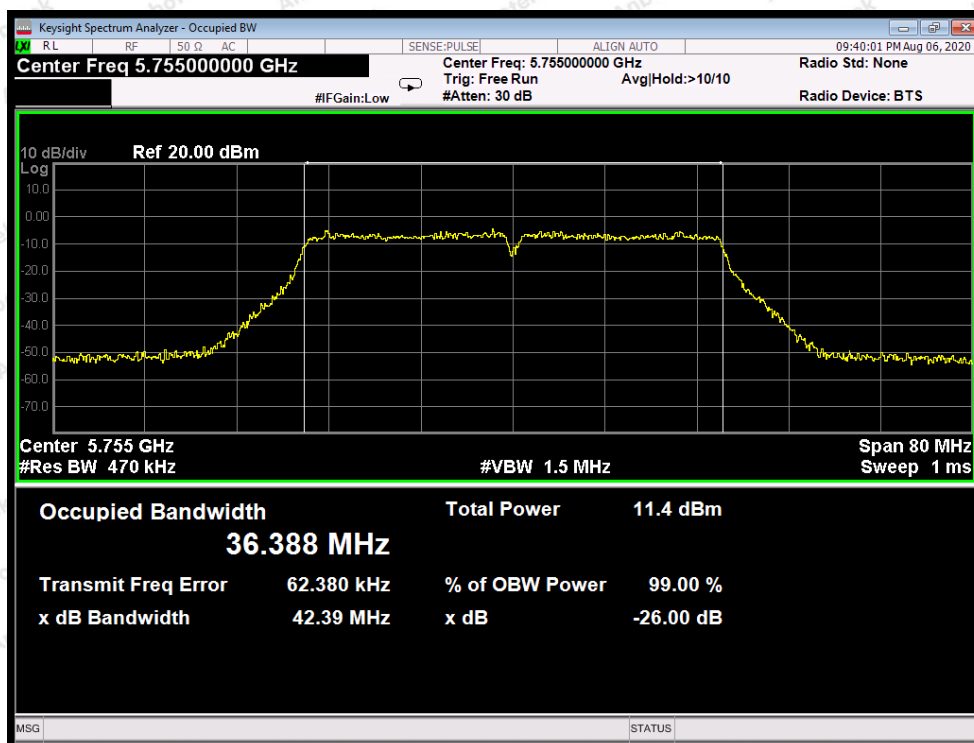

Test Mode: 802.11n40---Low

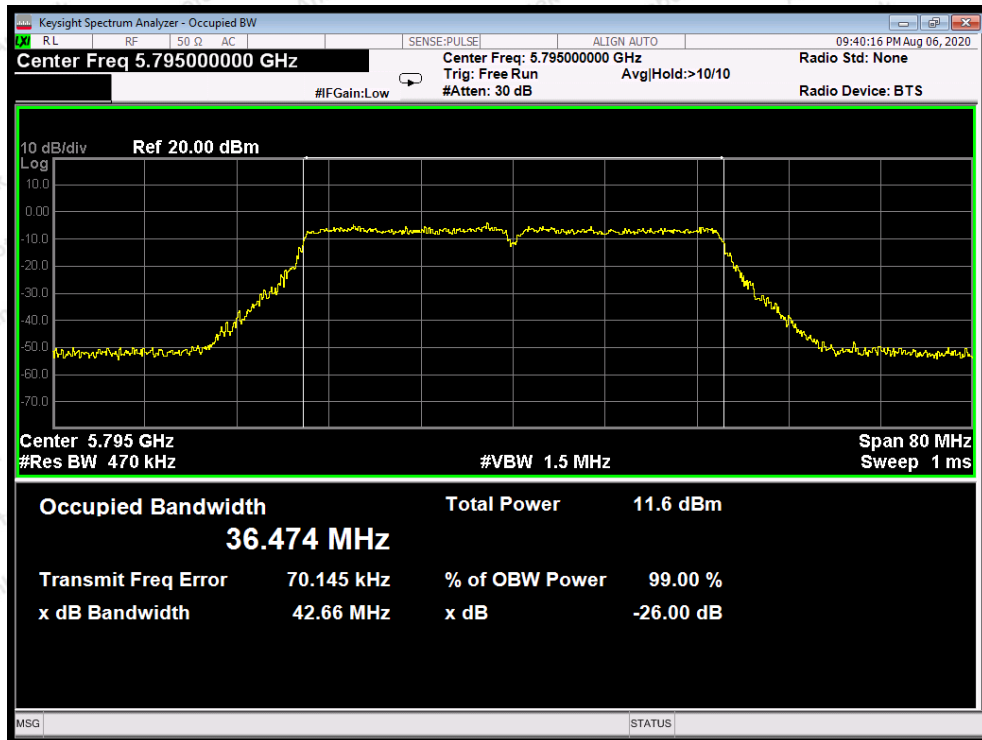


Test Mode: 802.11n40---High

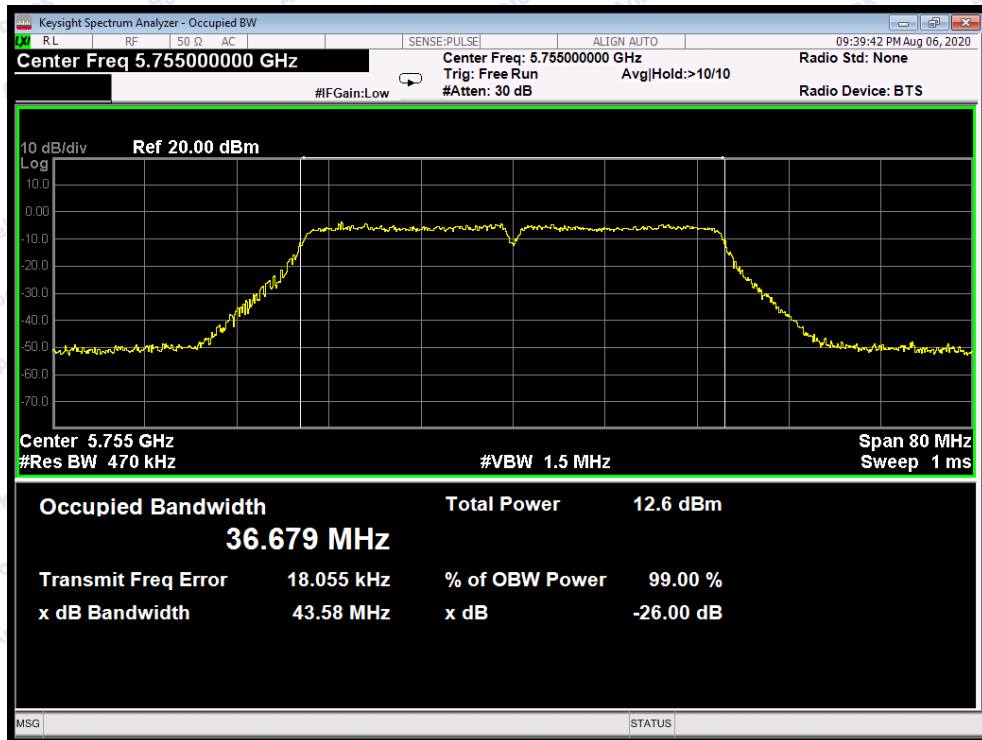


Test Mode: 802.11ac40---Low



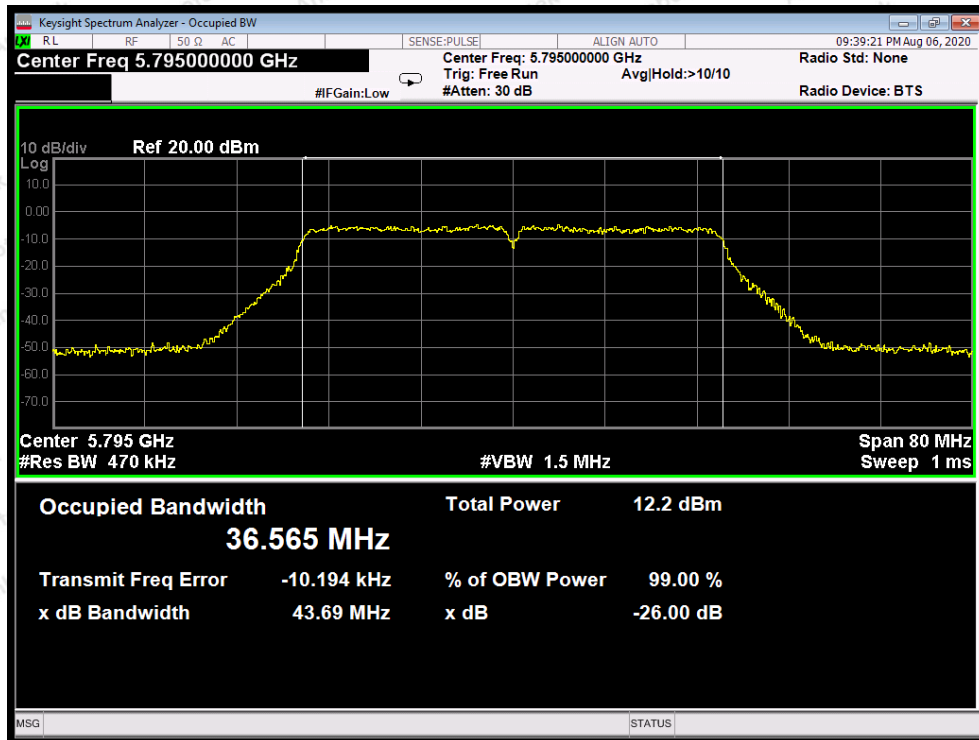

Test Mode: 802.11ac40---High

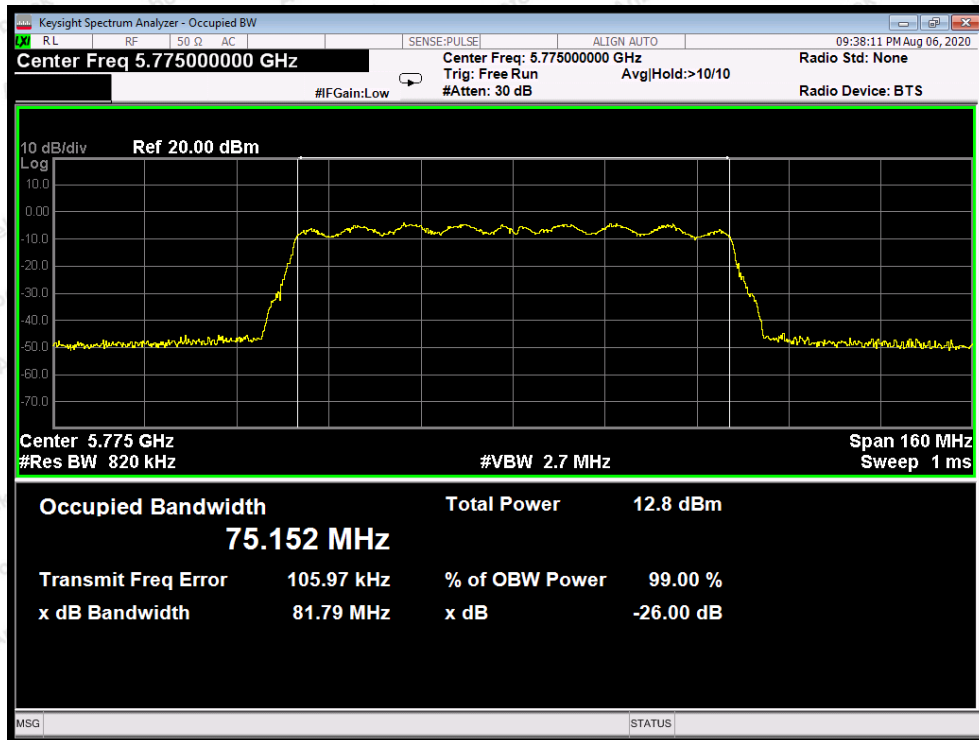


Test Mode: 802.11ac80

ANT B:


Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5745	16.38	>0.5MHz	PASS
	5785	16.37		PASS
	5825	16.39		PASS
802.11n20	5745	17.10		PASS
	5785	17.57		PASS
	5825	17.58		PASS
802.11ac20	5745	17.35		PASS
	5785	17.65		PASS
	5825	17.57		PASS
802.11n40	5755	36.34		PASS
	5795	35.77		PASS
802.11ac40	5755	36.34		PASS
	5795	36.37		PASS
802.11ac80	5775	75.29		PASS

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5745	21.33	16.639
	5785	20.94	16.654
	5825	21.25	16.702
802.11n20	5745	21.44	17.750
	5785	21.33	17.723
	5825	21.36	17.762
802.11ac20	5745	21.50	17.779
	5785	21.78	17.797
	5825	21.54	17.761
802.11n40	5755	43.59	36.461
	5795	42.84	36.425
802.11ac40	5755	43.10	36.441
	5795	43.85	36.448
802.11ac80	5775	82.45	75.304


6dB Bandwidth

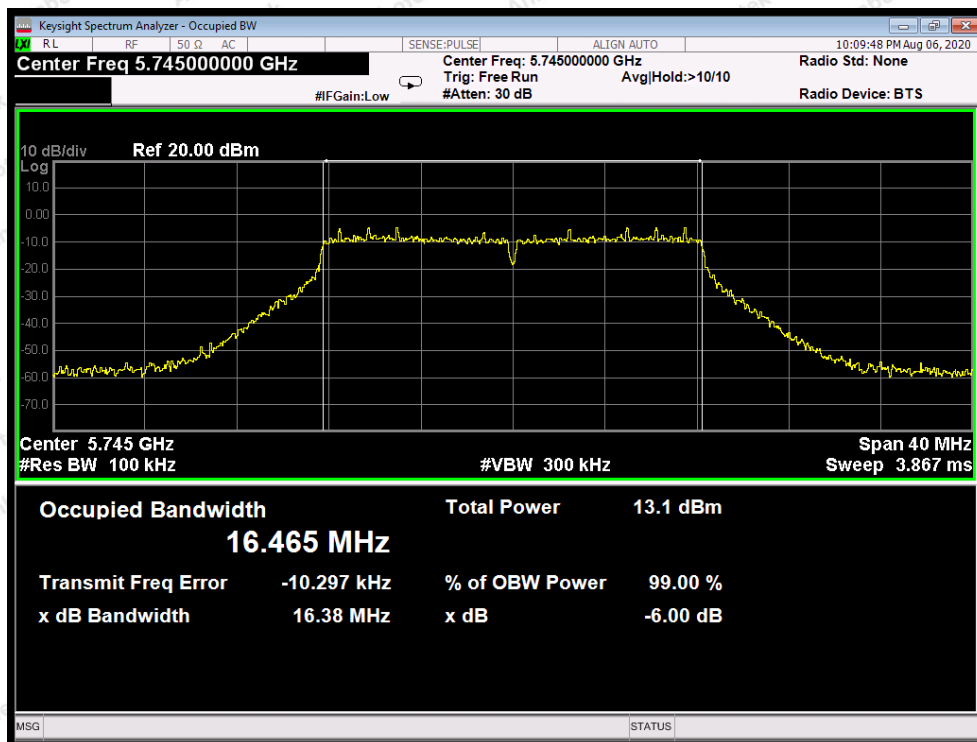


Test Mode: 802.11a--Low

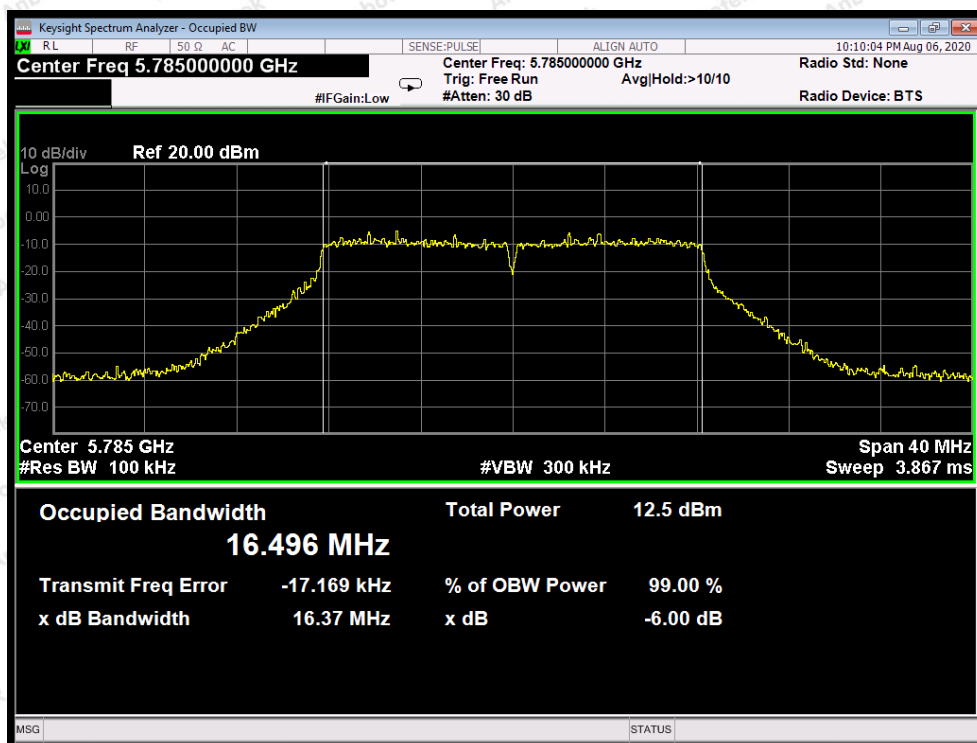


Test Mode: 802.11a---Middle

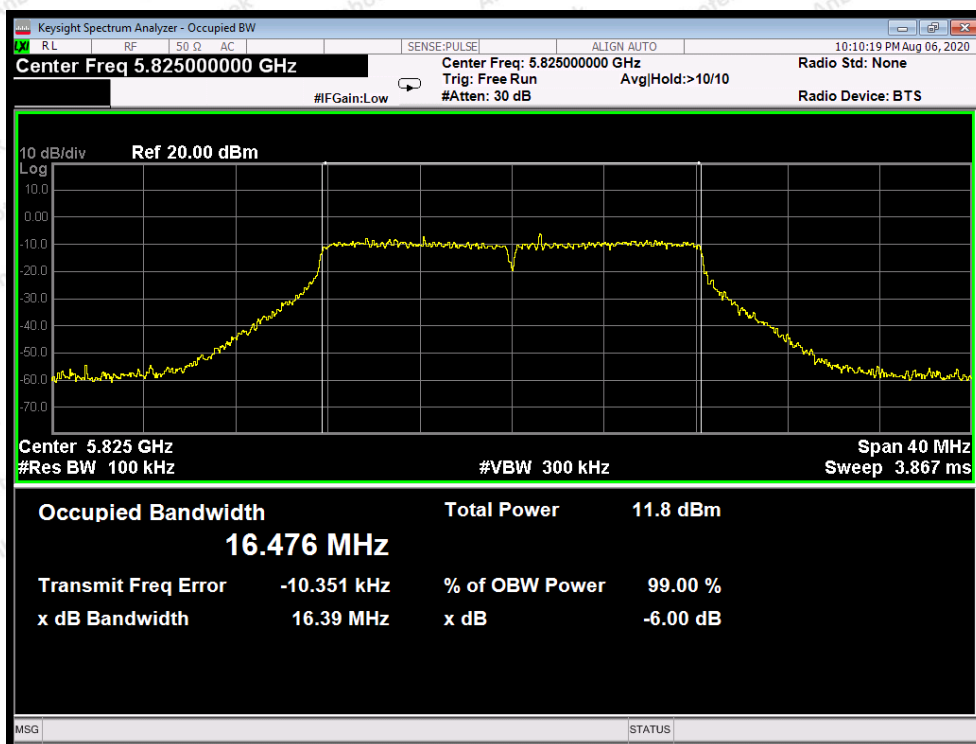


Test Mode: 802.11a---High

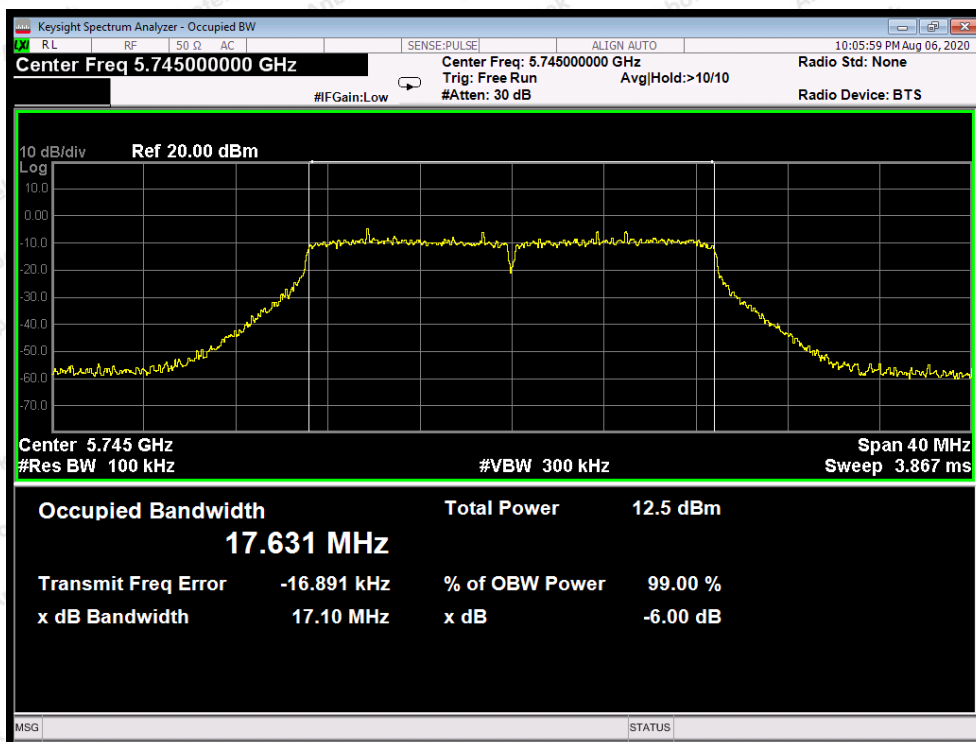


Test Mode: 802.11n20---Low

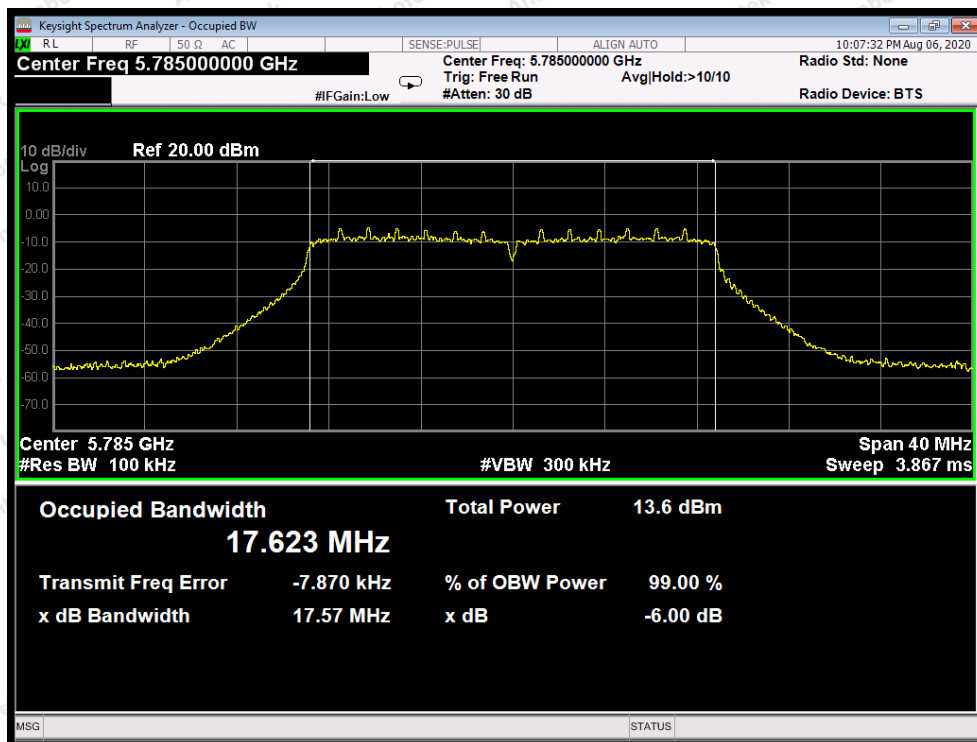


Test Mode: 802.11n20---Middle

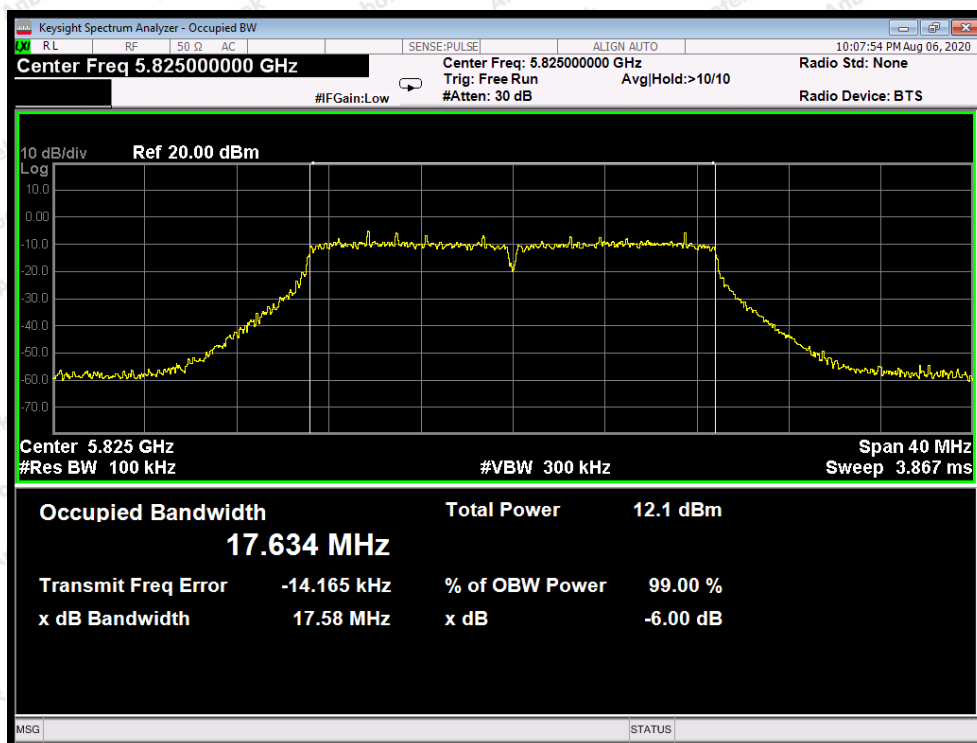


Test Mode: 802.11n20---High

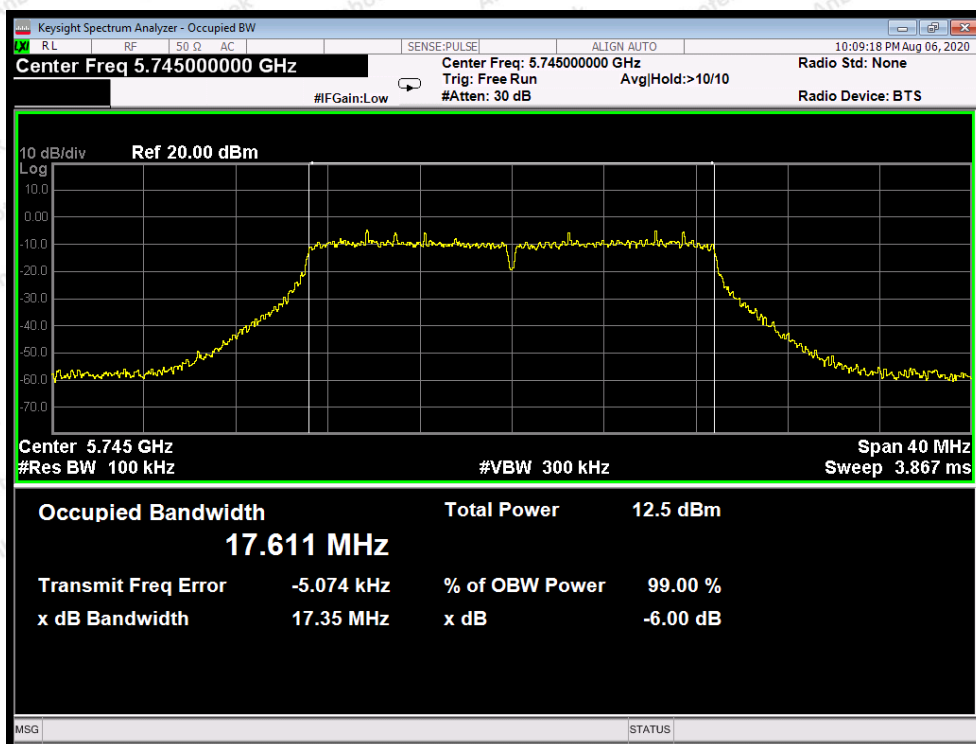


Test Mode: 802.11ac20--Low

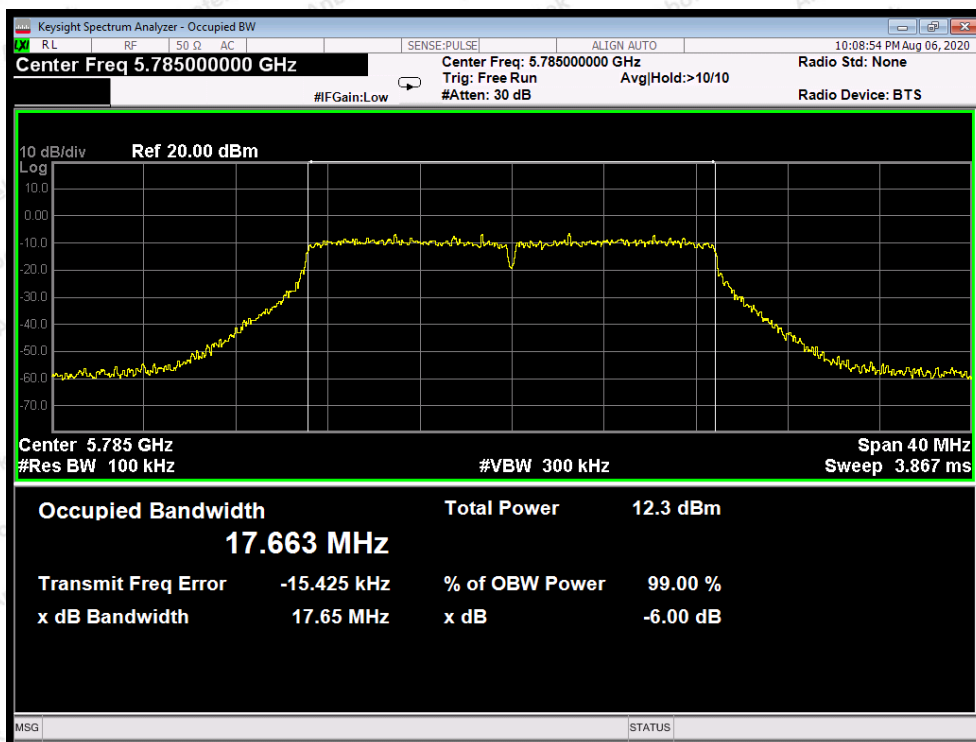


Test Mode: 802.11ac20---Middle

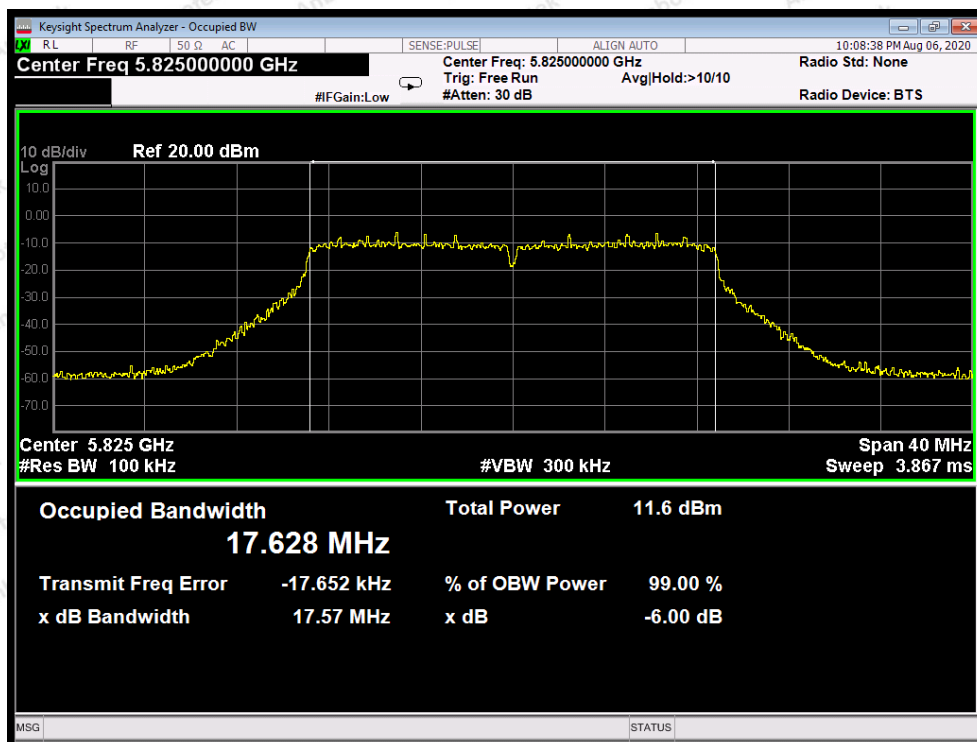


Test Mode: 802.11ac20---High

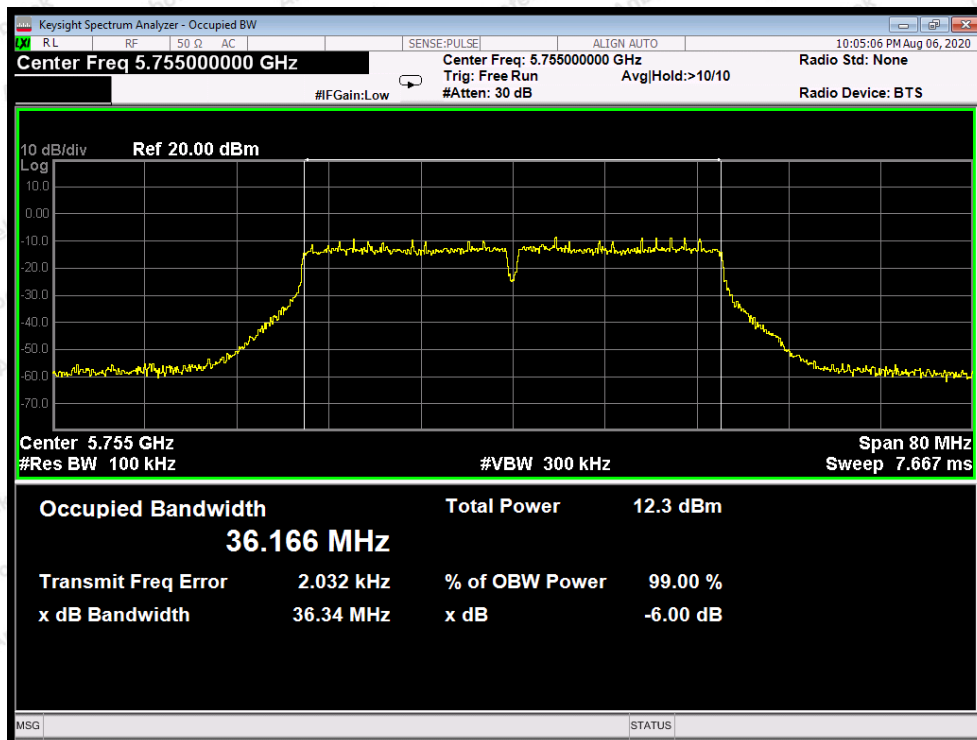


Test Mode: 802.11n40---Low

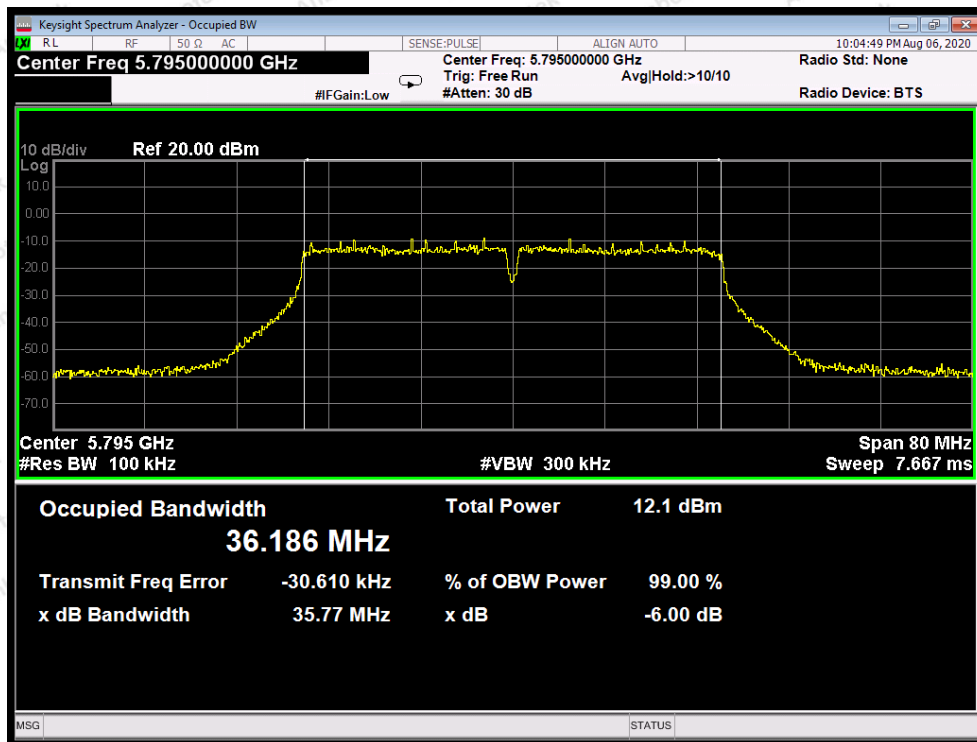


Test Mode: 802.11n40---High

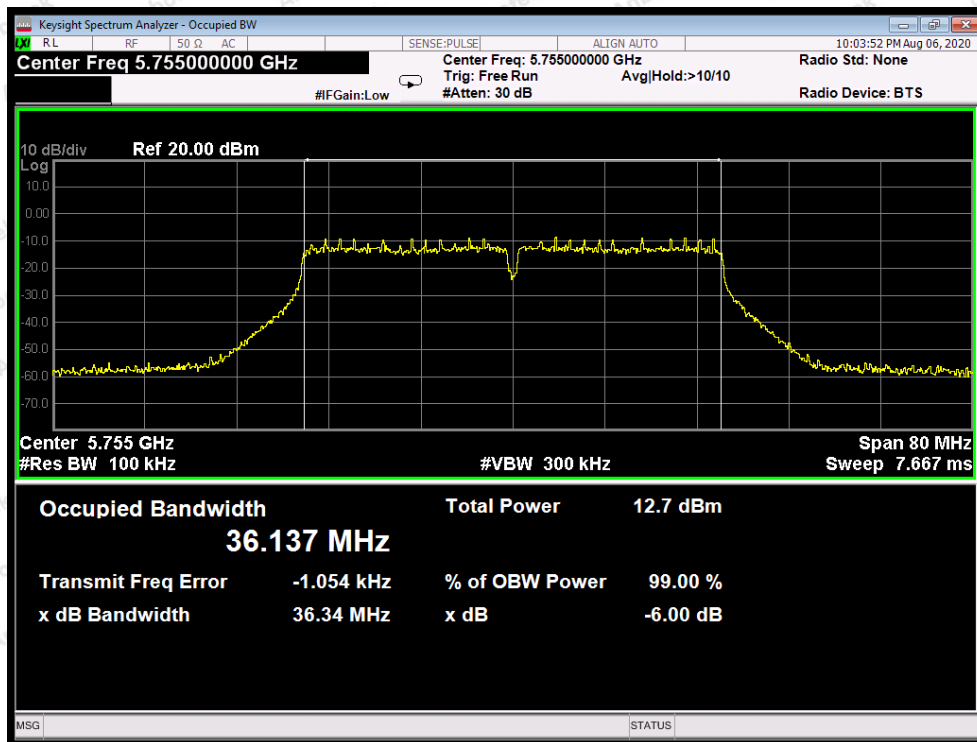

Test Mode: 802.11ac40---Low

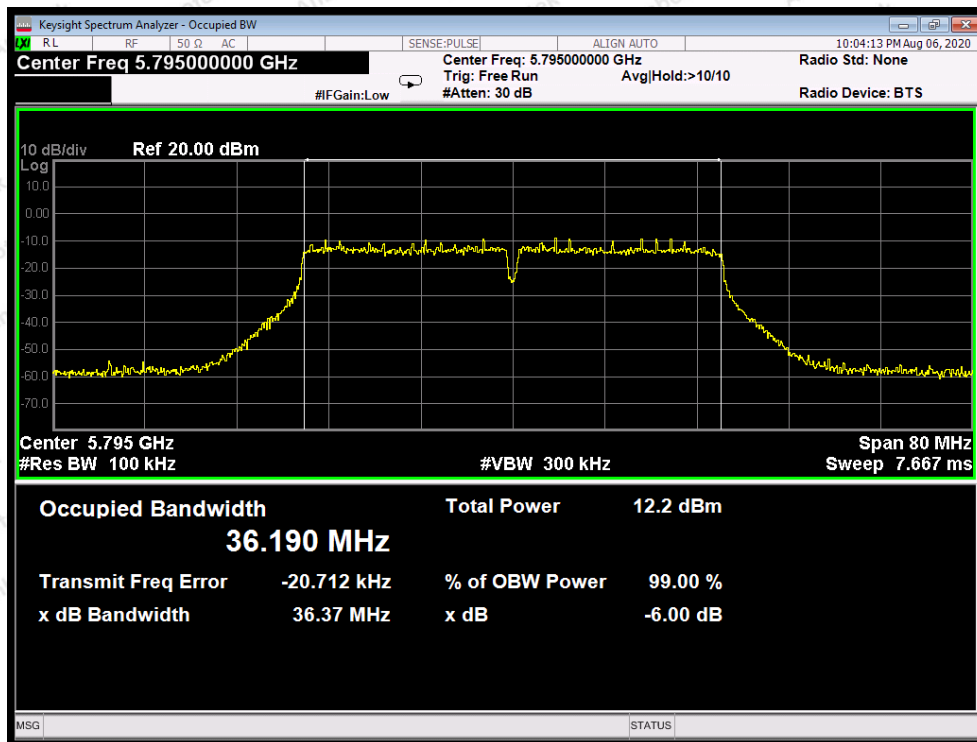


Test Mode: 802.11ac40---High

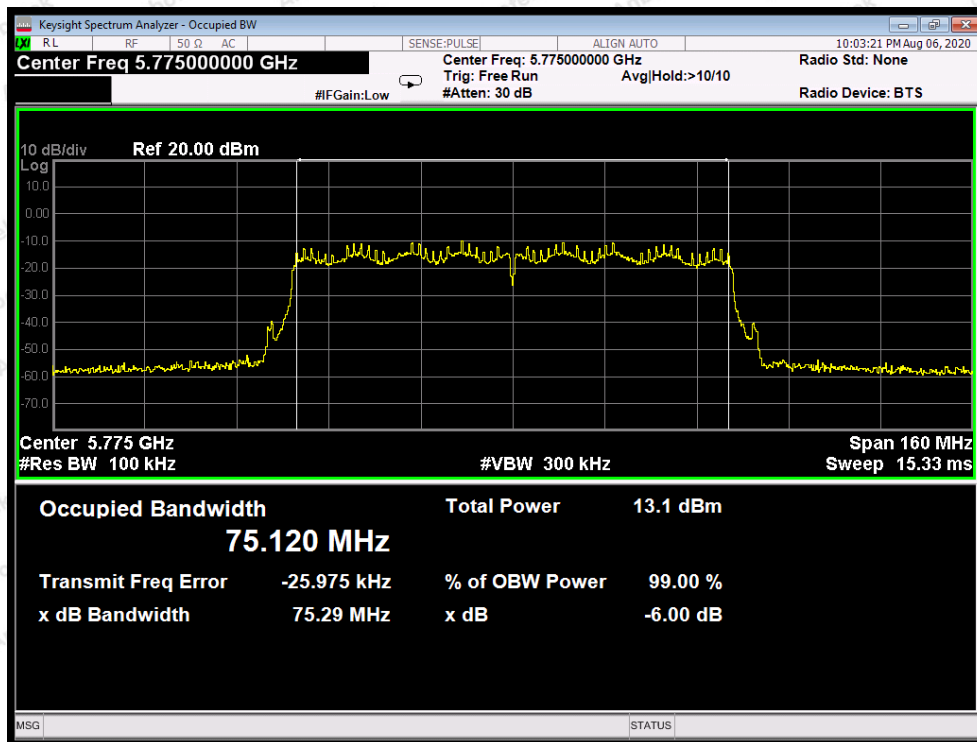


Test Mode: 802.11ac80


26dB & 99% Bandwidth

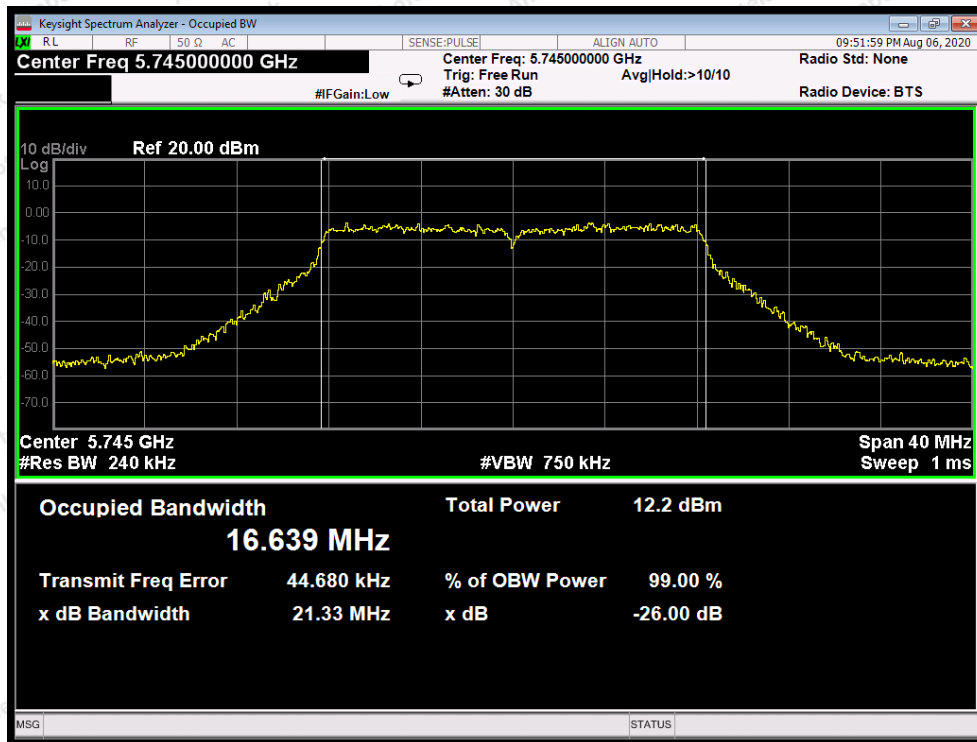


Test Mode: 802.11a--Low

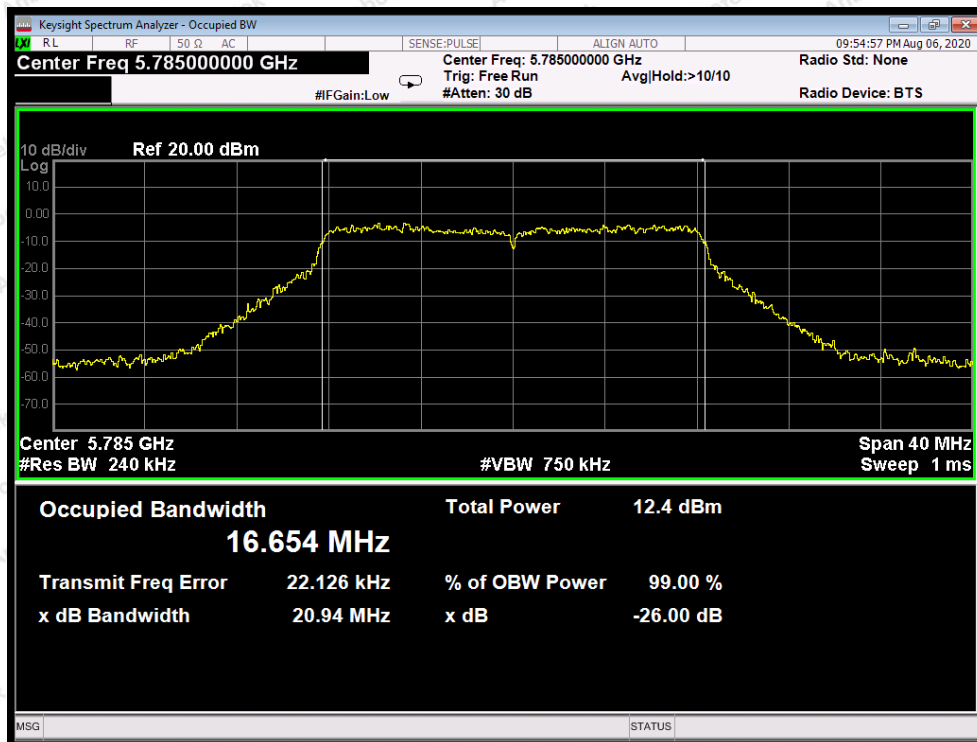

Test Mode: 802.11a---Middle

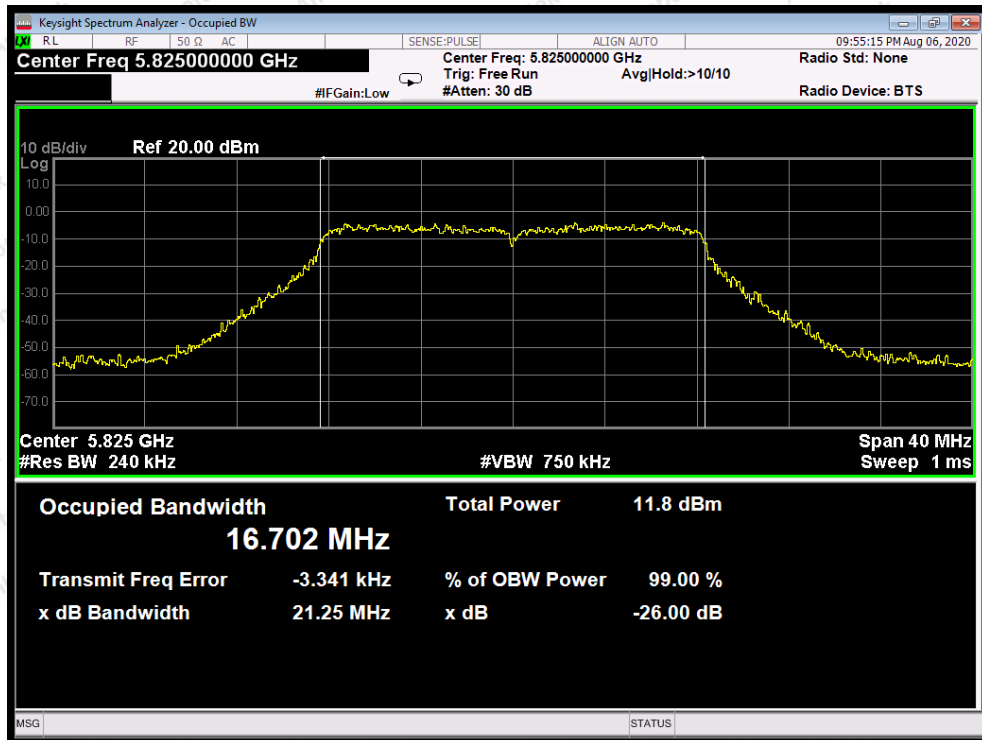


Test Mode: 802.11a---High

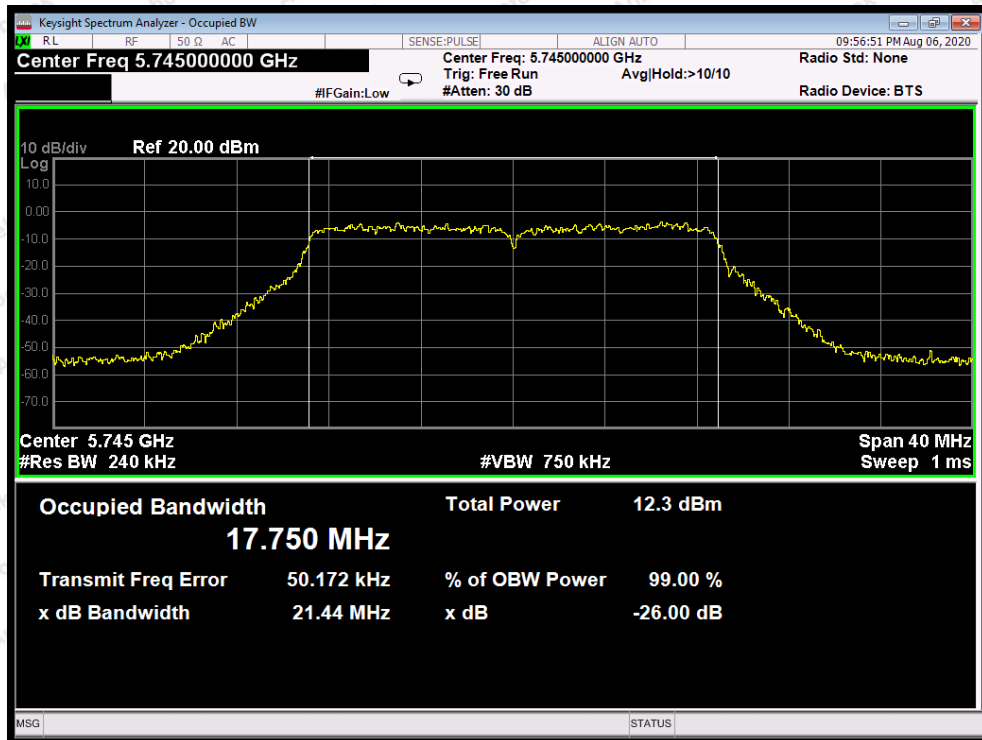


Test Mode: 802.11n20---Low




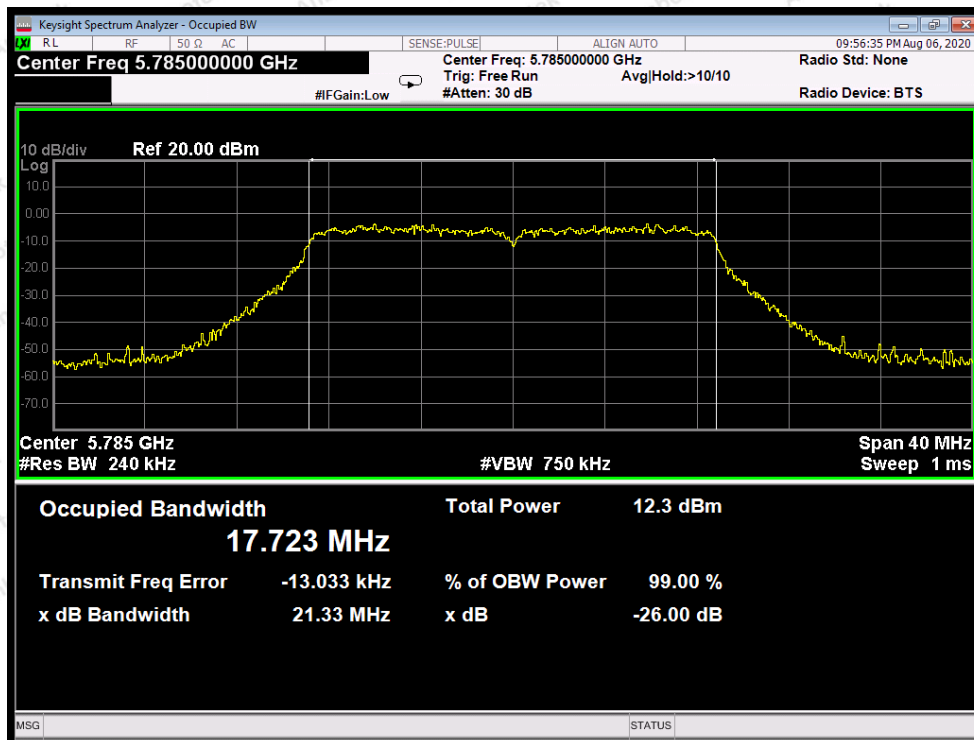


Test Mode: 802.11n20---Middle

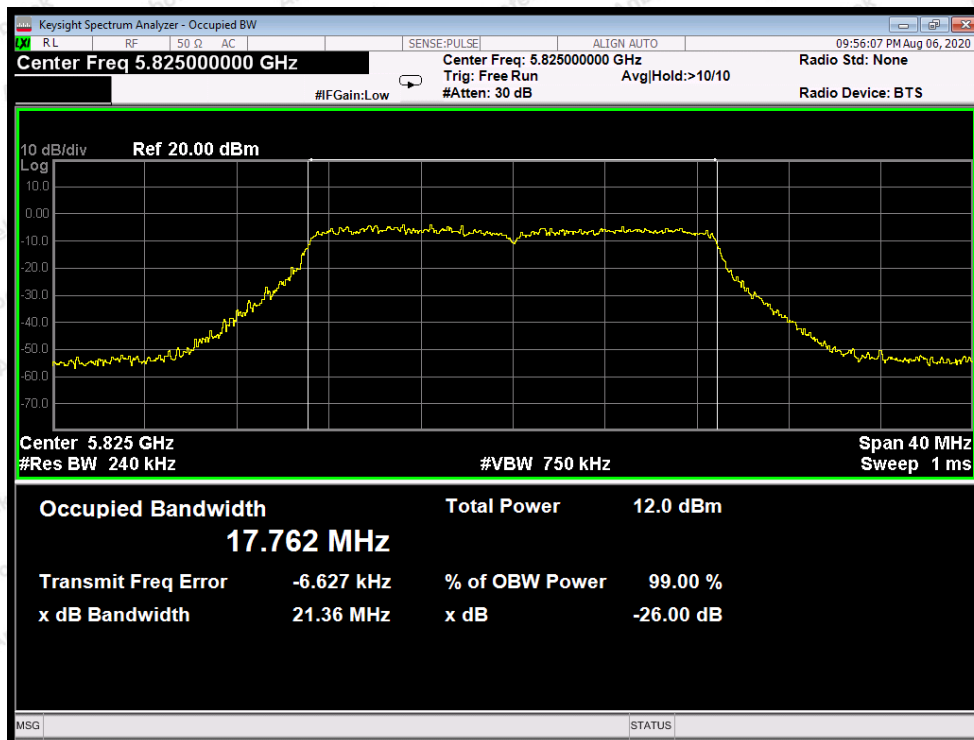


Test Mode: 802.11n20---High

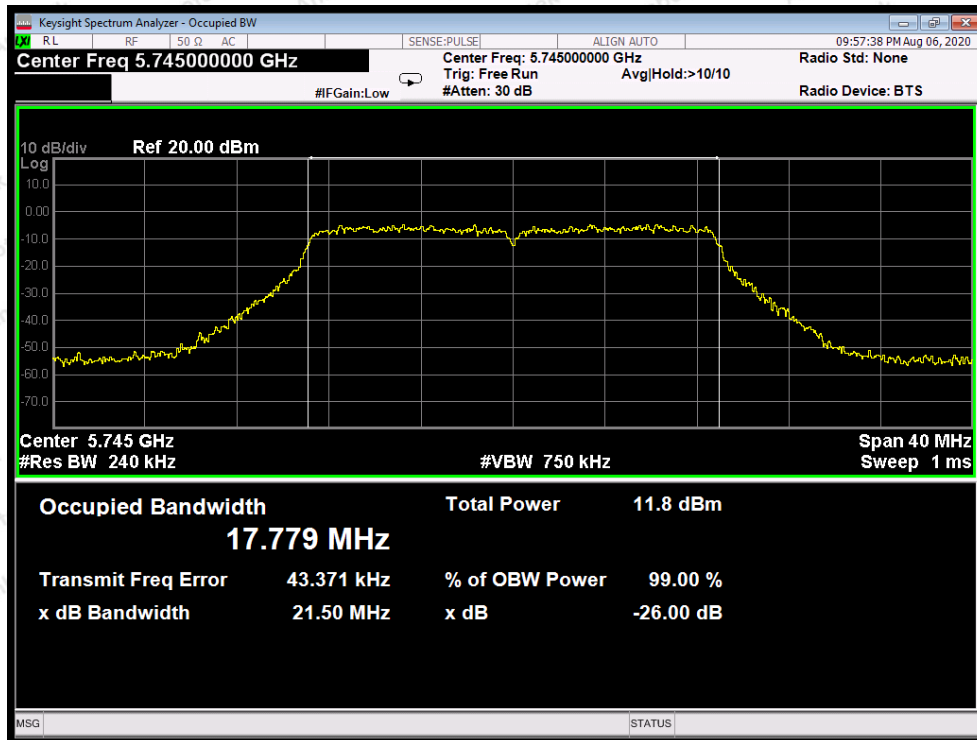


Test Mode: 802.11ac20--Low

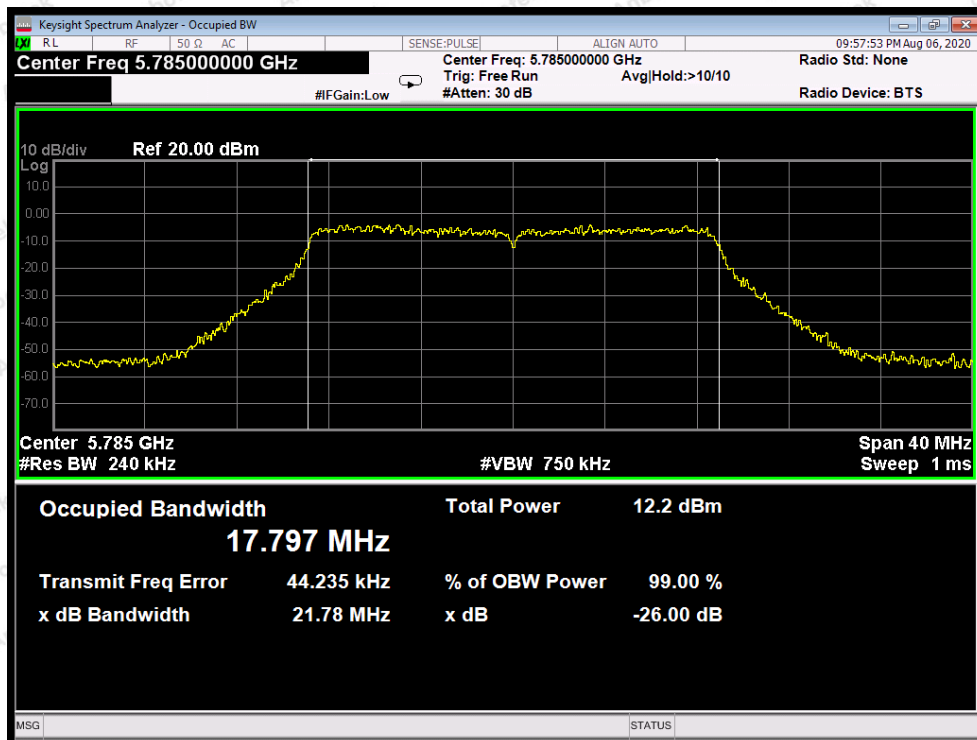

Test Mode: 802.11ac20---Middle

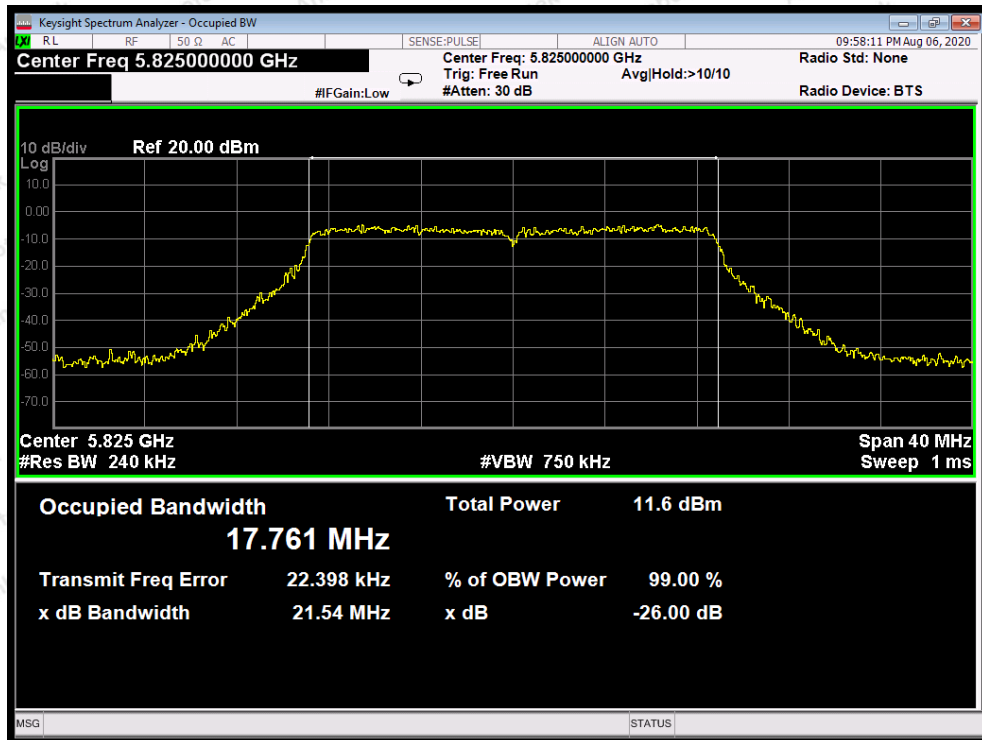


Test Mode: 802.11ac20---High

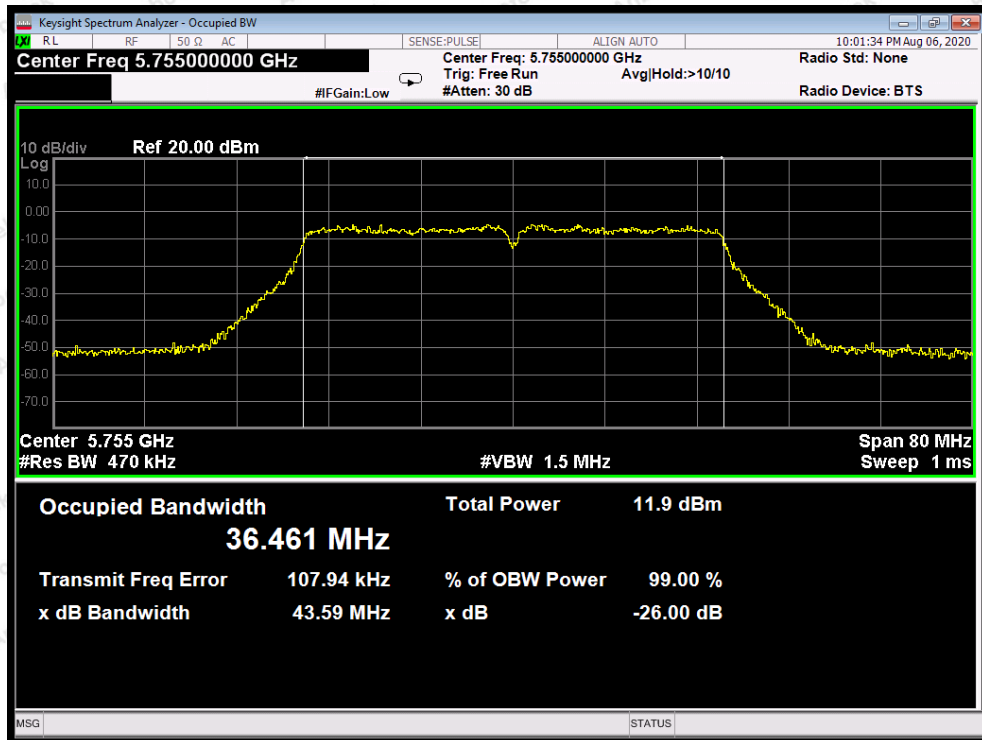


Test Mode: 802.11n40---Low




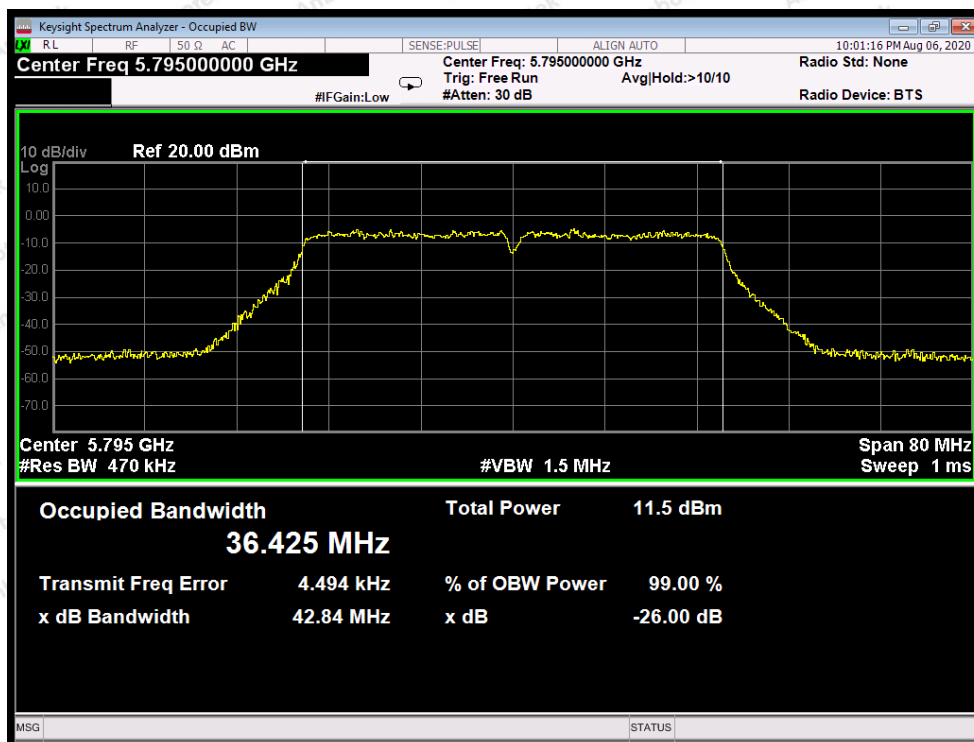


Test Mode: 802.11n40---High

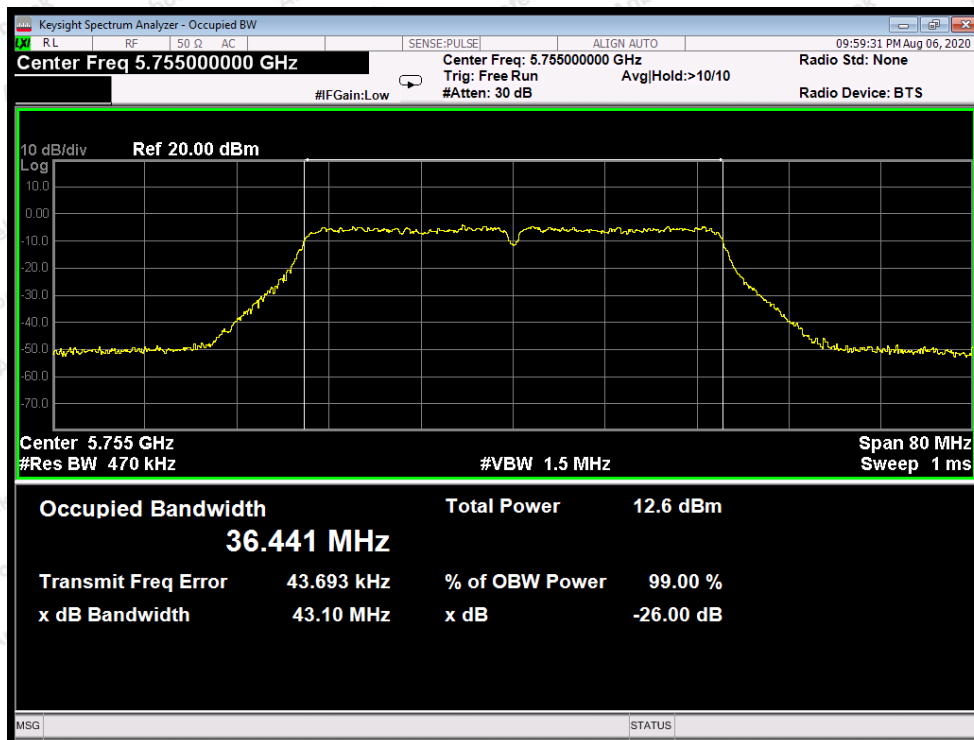

Test Mode: 802.11ac40---Low

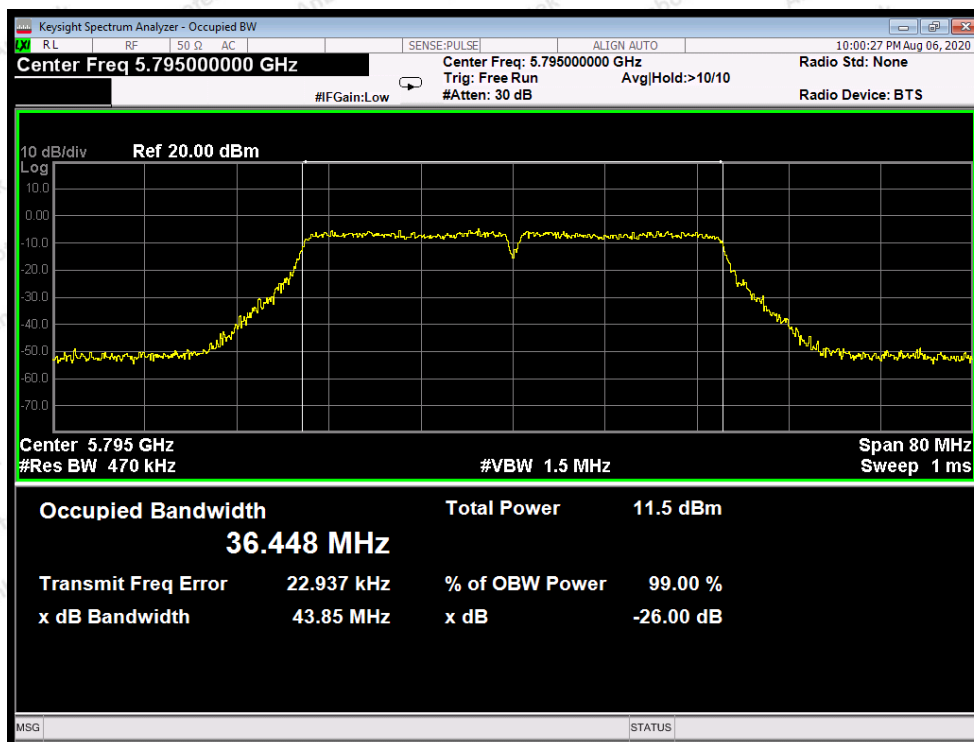

Test Mode: 802.11ac40---High

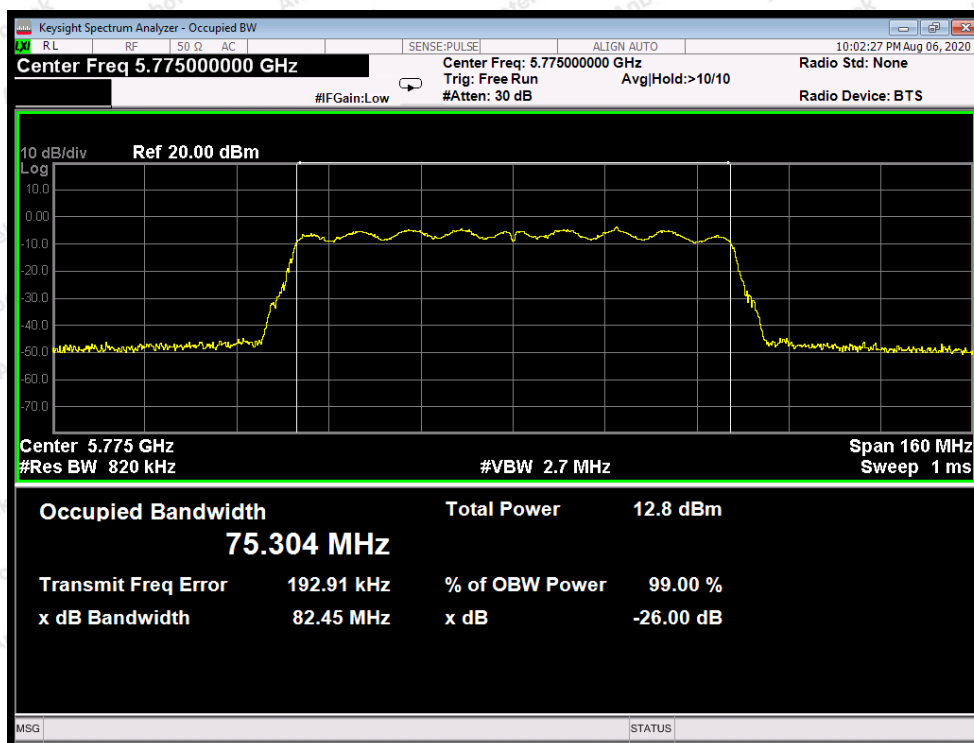


Test Mode: 802.11ac80

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30 dBm/500KHz

7.2. Test Setup

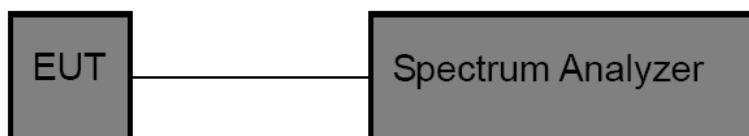

7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =510KHz;
3. Set VBW $\geq$ 3 RBW=2MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

7.4. Test Data

Test Item : Power Spectral Density
 Test Voltage : AC 240V, 60Hz for adapter
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 24℃
 Humidity : 55%RH

ANT A:

Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	-0.713	-0.799	30	PASS
	5785	-1.584	-1.670	30	PASS
	5825	-2.554	-2.640	30	PASS
802.11n20	5745	-1.811	-1.897	30	PASS
	5785	-0.639	-0.725	30	PASS
	5825	-2.902	-2.988	30	PASS
802.11ac20	5745	-2.851	-2.937	30	PASS
	5785	-2.053	-2.139	30	PASS
	5825	-2.249	-2.335	30	PASS
802.11n40	5755	-5.750	-5.836	30	PASS
	5795	-4.831	-4.917	30	PASS
802.11ac40	5755	-6.148	-6.234	30	PASS
	5795	-5.528	-5.614	30	PASS
802.11ac80	5775	-7.871	-7.957	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)

ANT B:

Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	-1.167	-1.253	30	PASS
	5785	-1.762	-1.848	30	PASS
	5825	-2.356	-2.442	30	PASS
802.11n20	5745	-2.470	-2.556	30	PASS
	5785	-2.589	-2.675	30	PASS

	5825	-2.299	-2.385	30	PASS
802.11ac20	5745	-1.237	-1.323	30	PASS
	5785	-1.781	-1.867	30	PASS
	5825	-2.496	-2.582	30	PASS
802.11n40	5755	-5.349	-5.435	30	PASS
	5795	-5.929	-6.015	30	PASS
802.11ac40	5755	-5.558	-5.644	30	PASS
	5795	-6.945	-7.031	30	PASS
802.11ac80	5775	-7.478	-7.564	30	PASS


Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)

ANT A+B:


Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	2.076	1.990	29.99	PASS
	5785	1.338	1.252	29.99	PASS
	5825	0.556	0.470	29.99	PASS
802.11n20	5745	0.882	0.796	29.99	PASS
	5785	1.505	1.419	29.99	PASS
	5825	0.420	0.334	29.99	PASS
802.11ac20	5745	1.041	0.955	29.99	PASS
	5785	1.095	1.009	29.99	PASS
	5825	0.640	0.554	29.99	PASS
802.11n40	5755	-2.535	-2.621	29.99	PASS
	5795	-2.335	-2.421	29.99	PASS
802.11ac40	5755	-2.833	-2.919	29.99	PASS
	5795	-3.169	-3.255	29.99	PASS
802.11ac80	5775	-4.660	-4.746	29.99	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)


ANT A

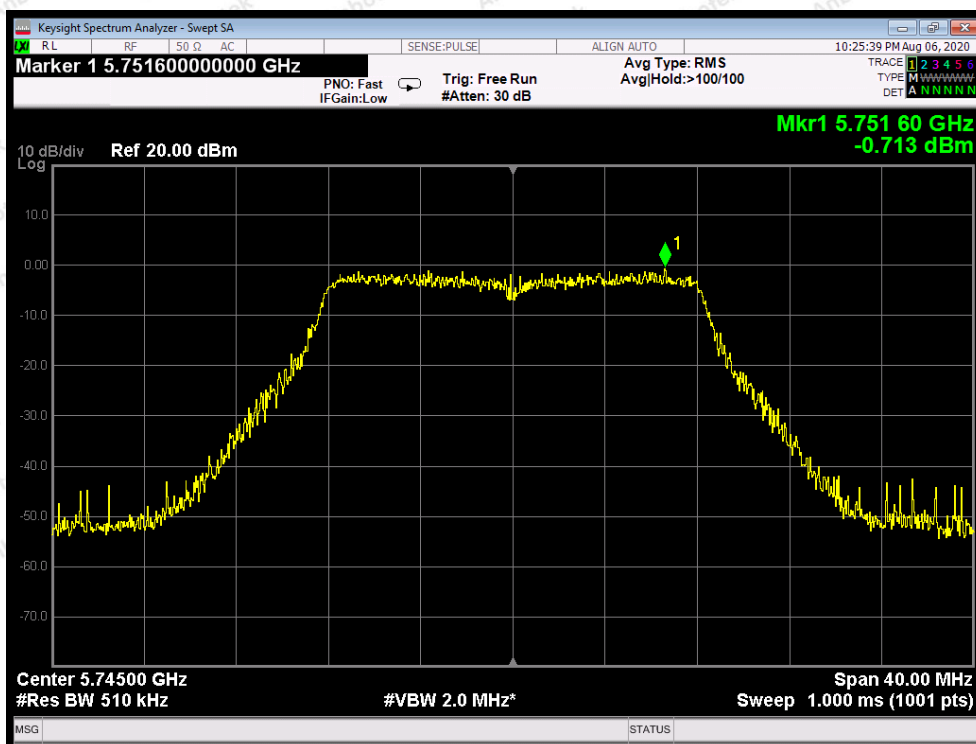


Test Mode: 802.11a--Low

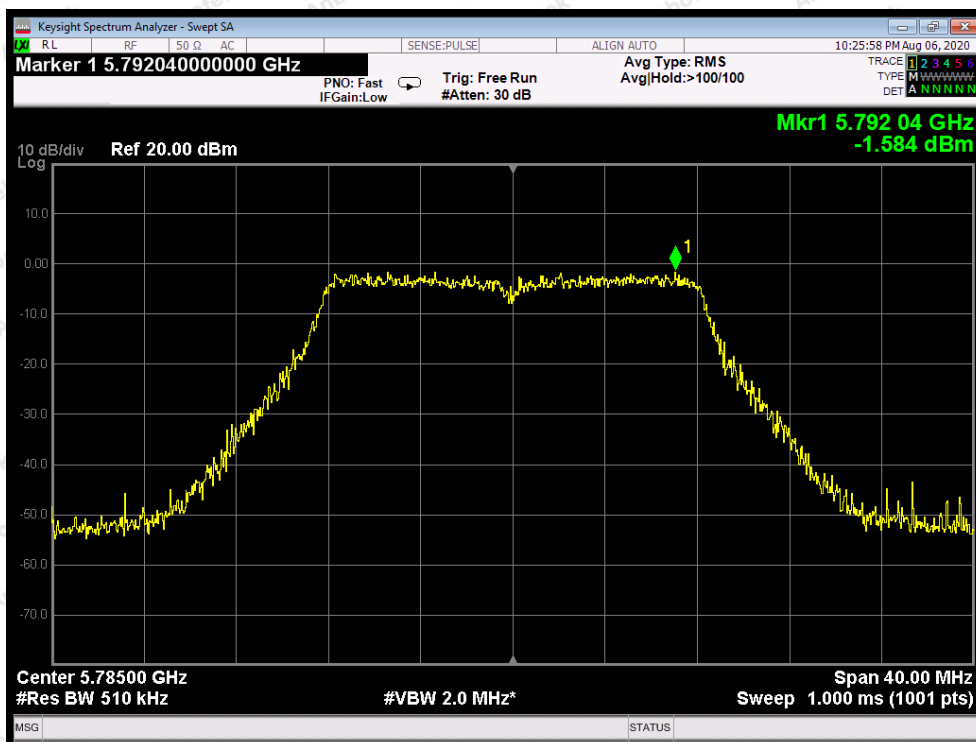


Test Mode: 802.11a---Middle

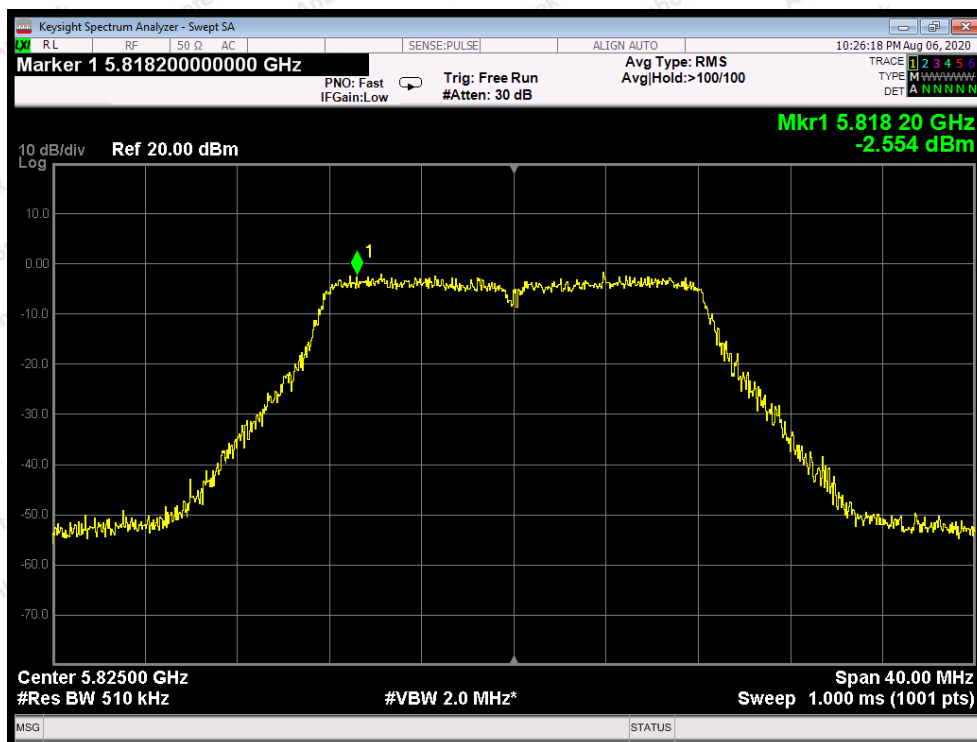


Test Mode: 802.11a---High

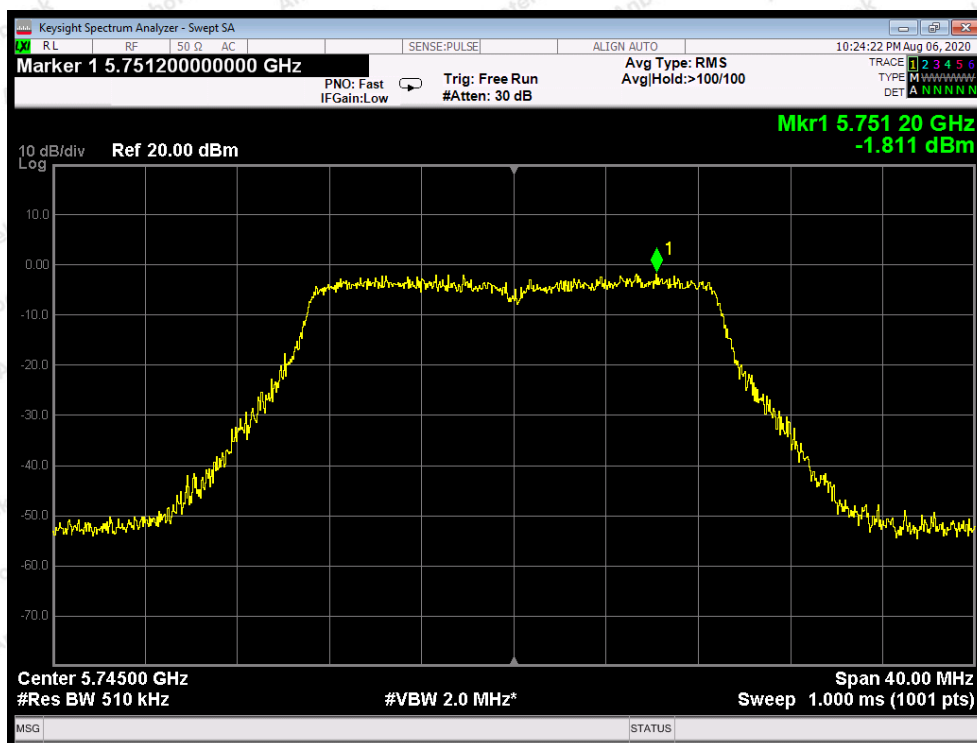


Test Mode: 802.11n20---Low

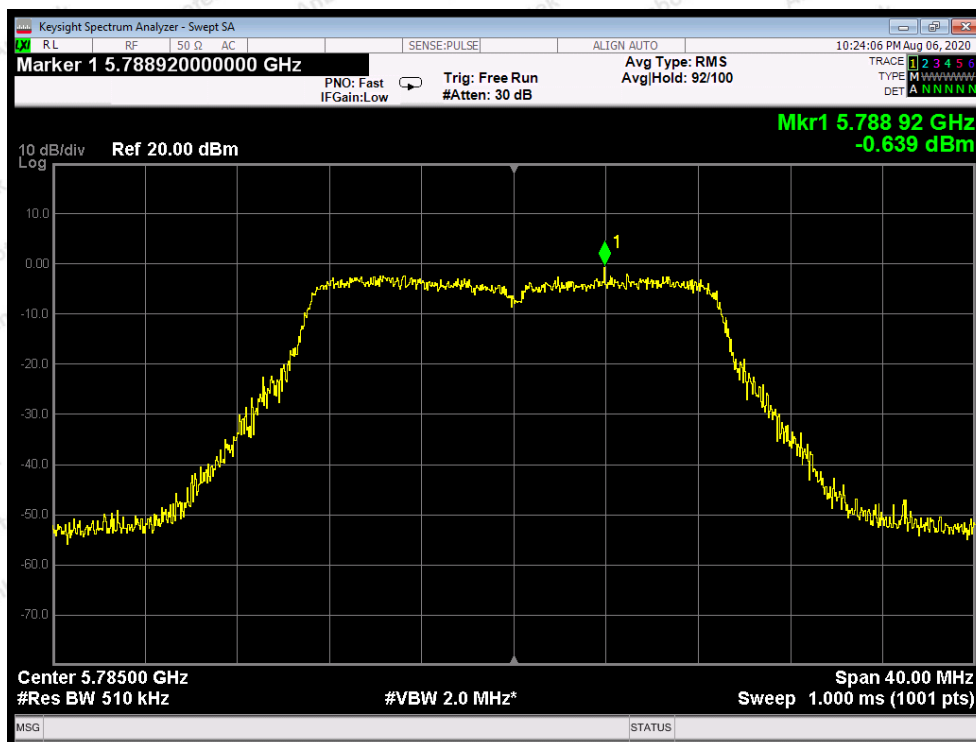


Test Mode: 802.11n20---Middle

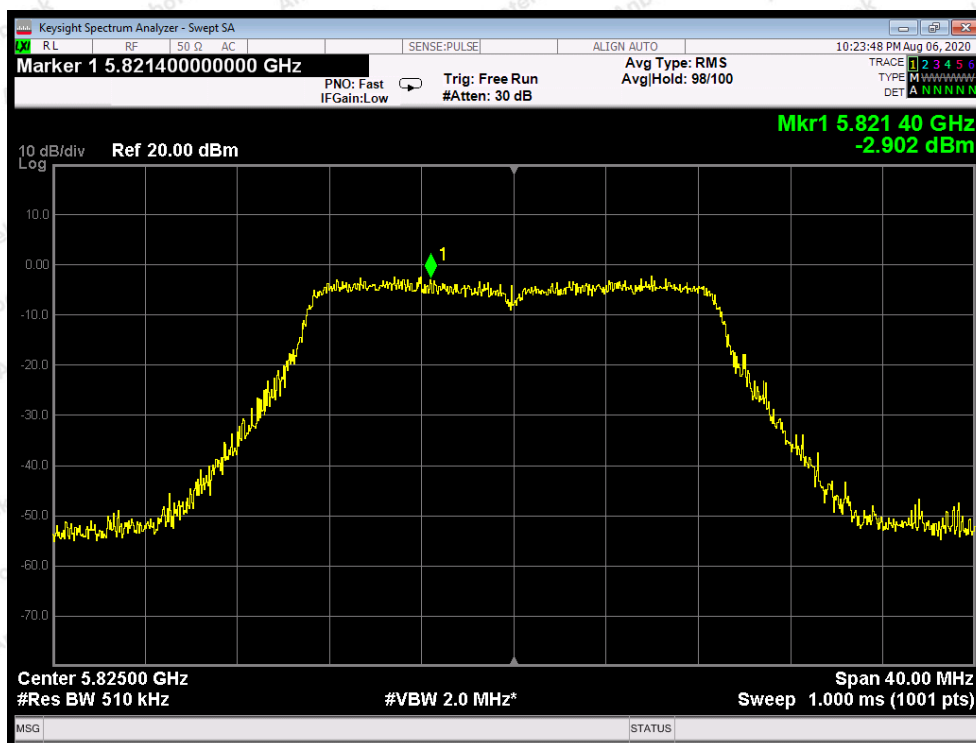


Test Mode: 802.11n20---High

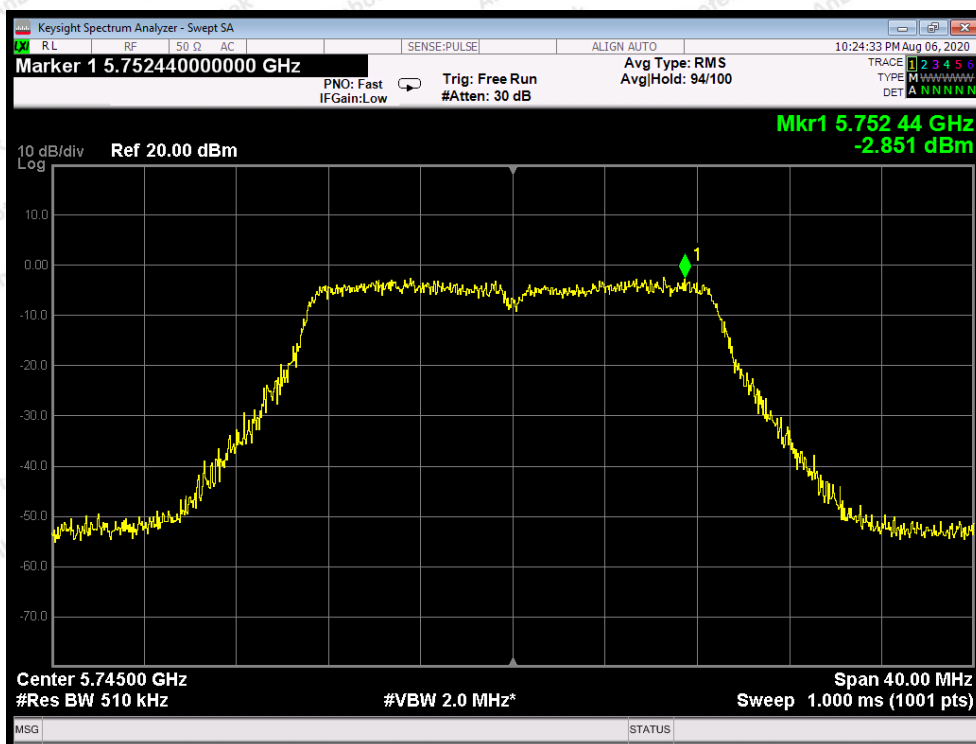


Test Mode: 802.11ac20--Low

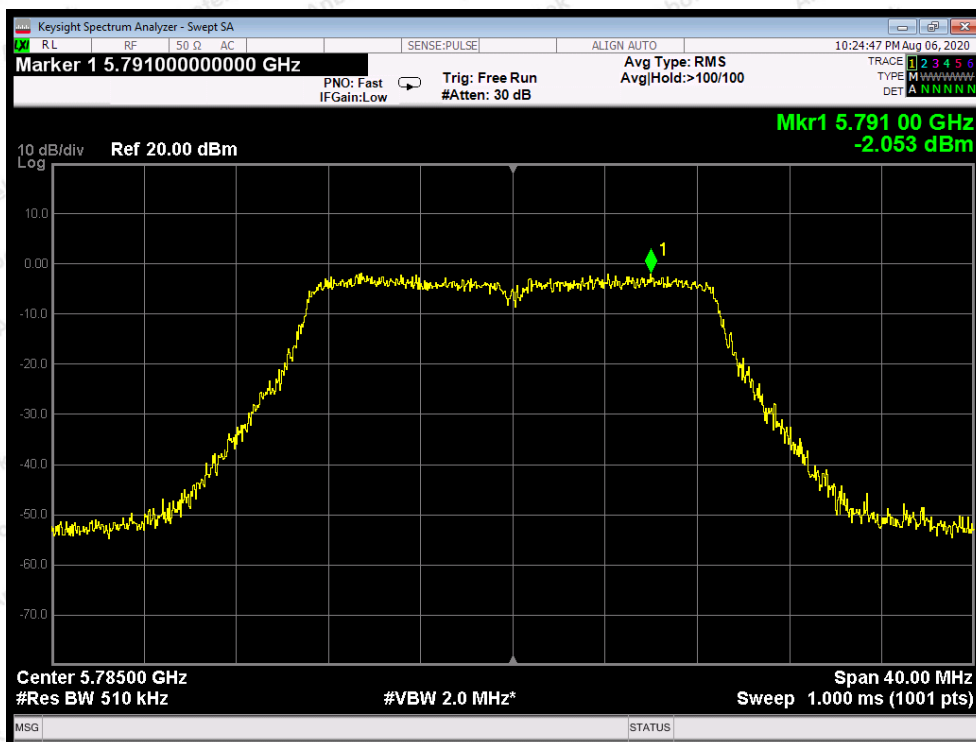


Test Mode: 802.11ac20---Middle

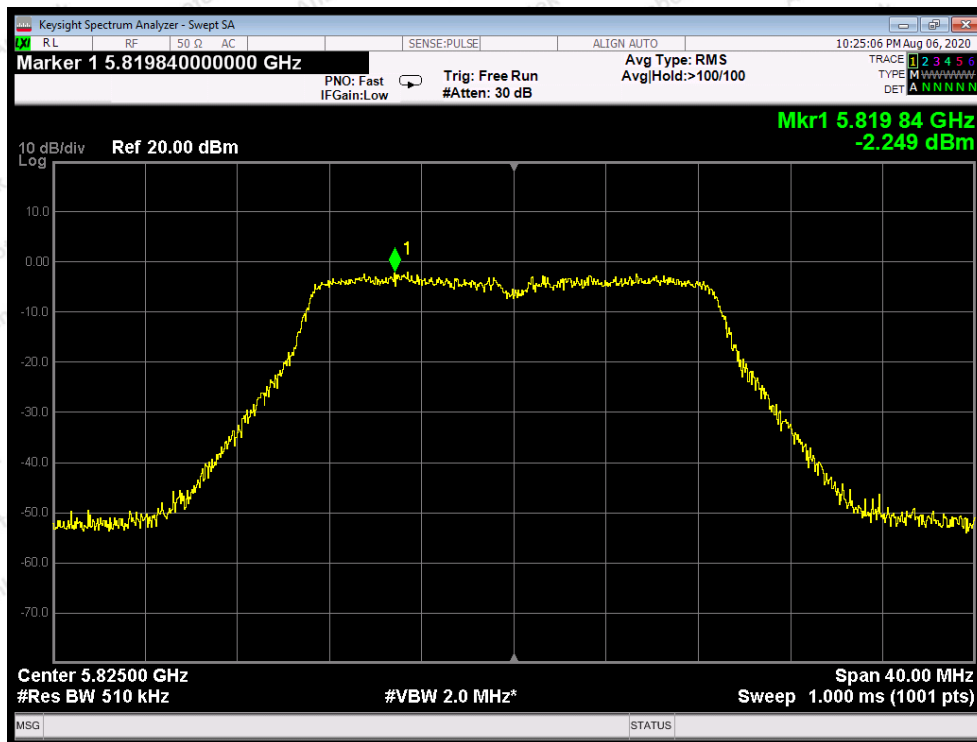


Test Mode: 802.11ac20---High

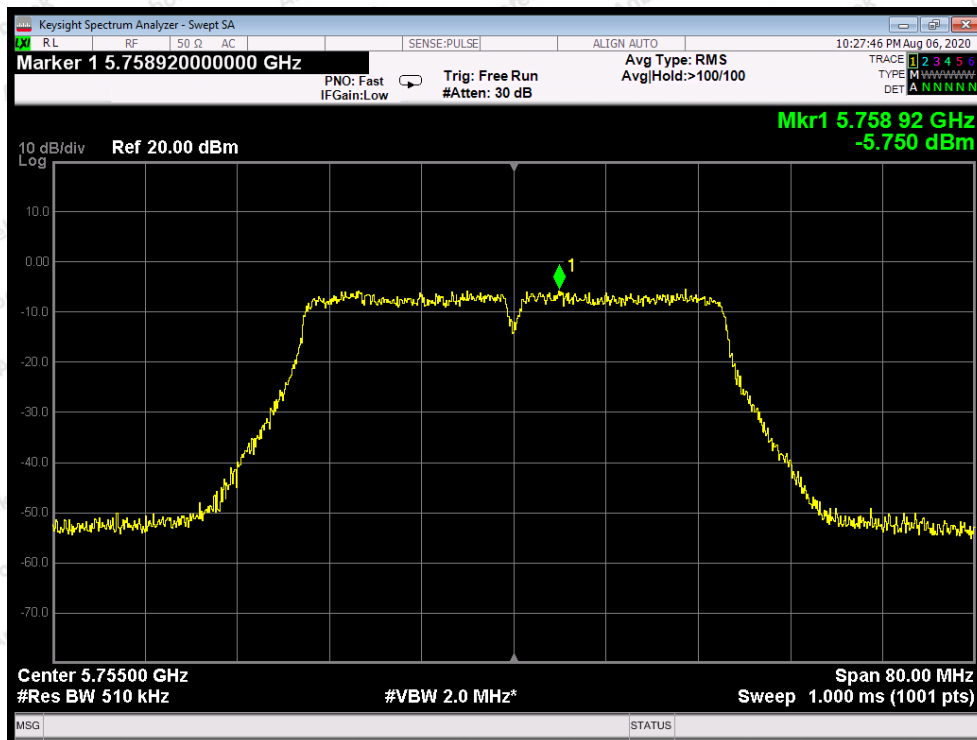


Test Mode: 802.11n40---Low

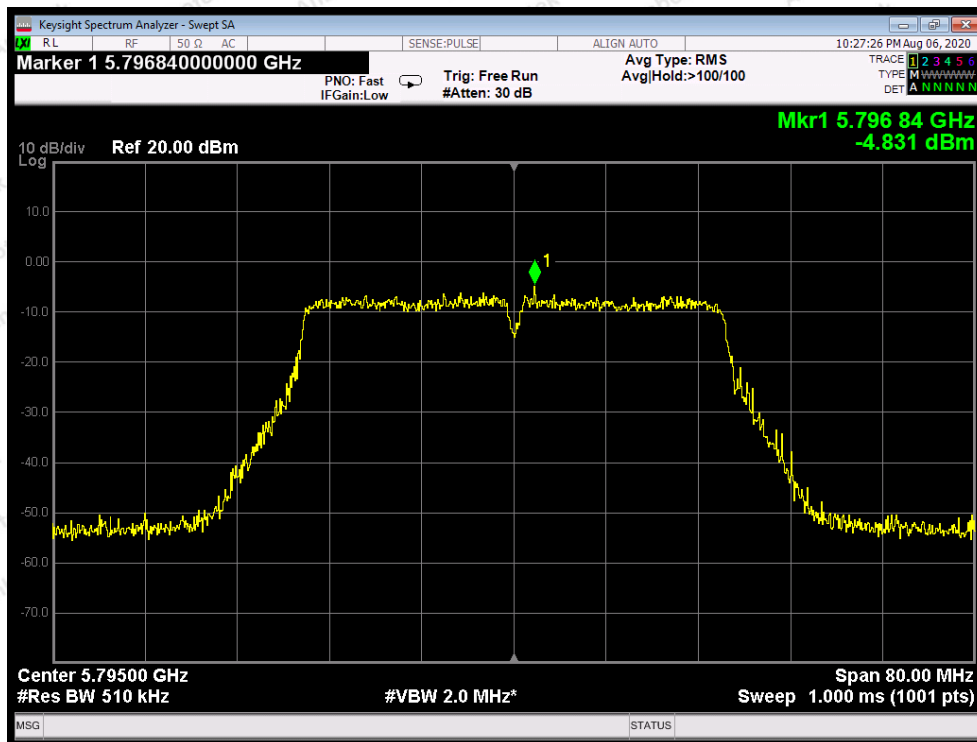


Test Mode: 802.11n40---High

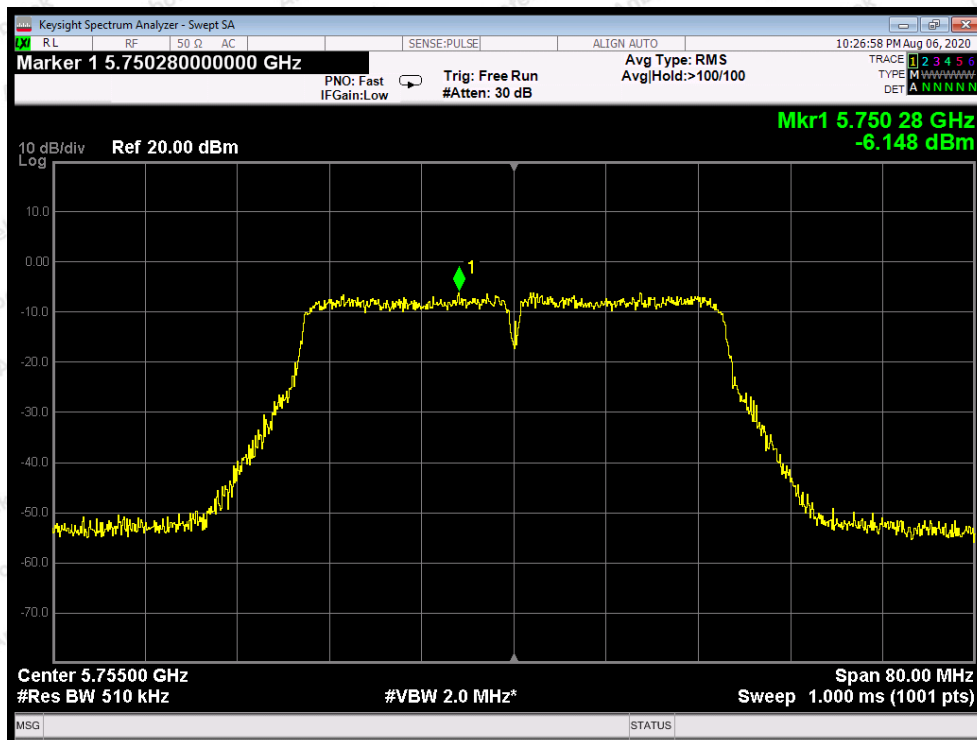

Test Mode: 802.11ac40---Low

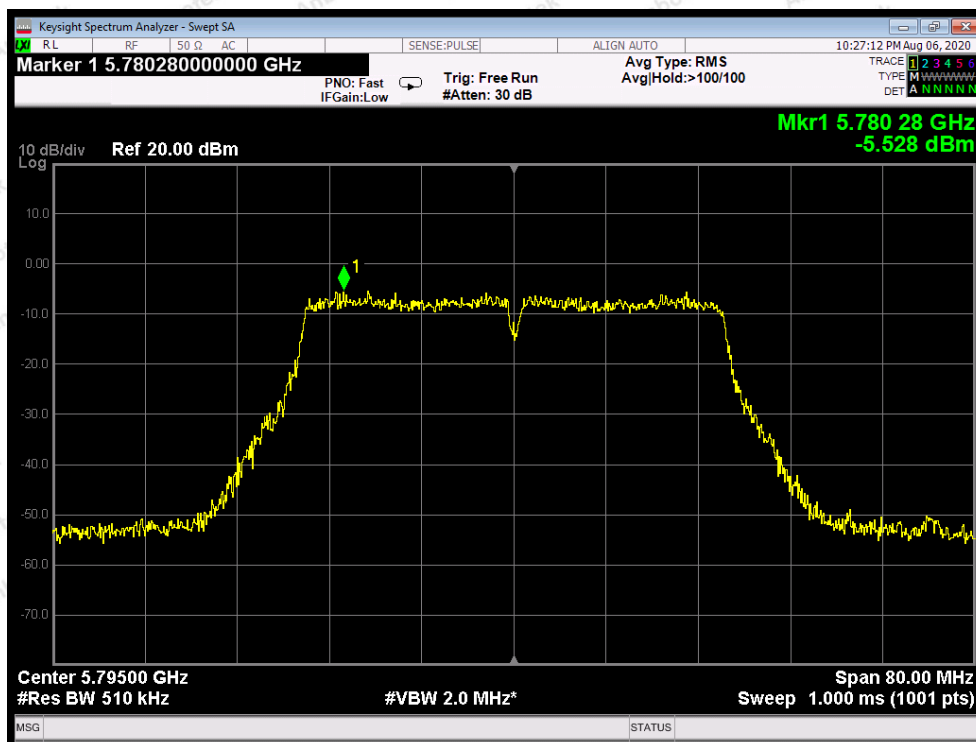


Test Mode: 802.11ac40---High

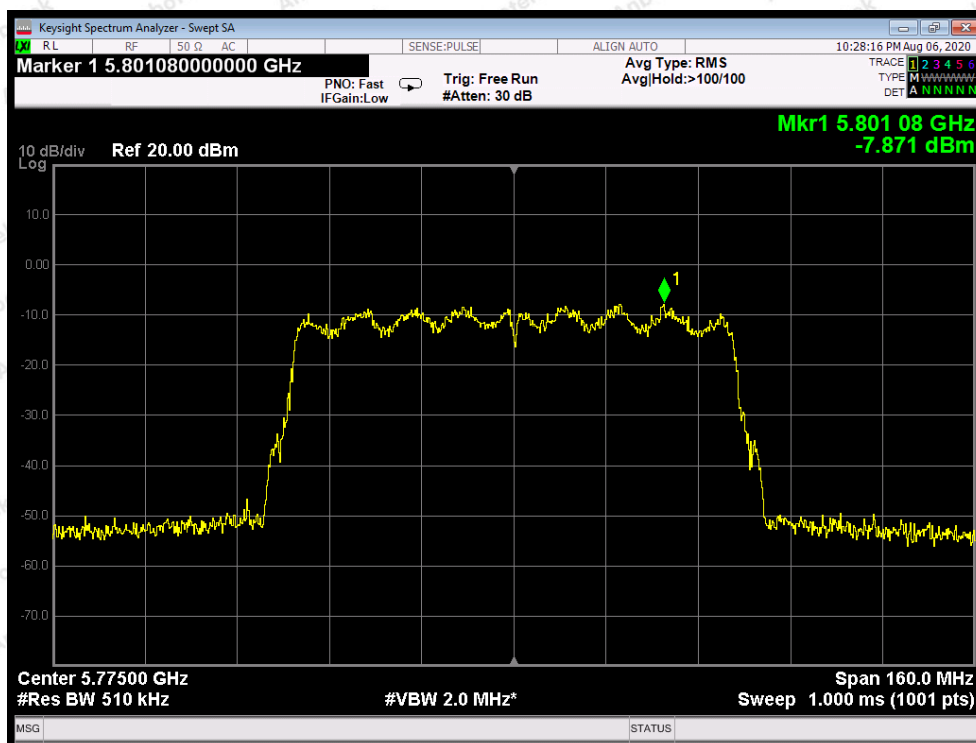


Test Mode: 802.11ac80


ANT B

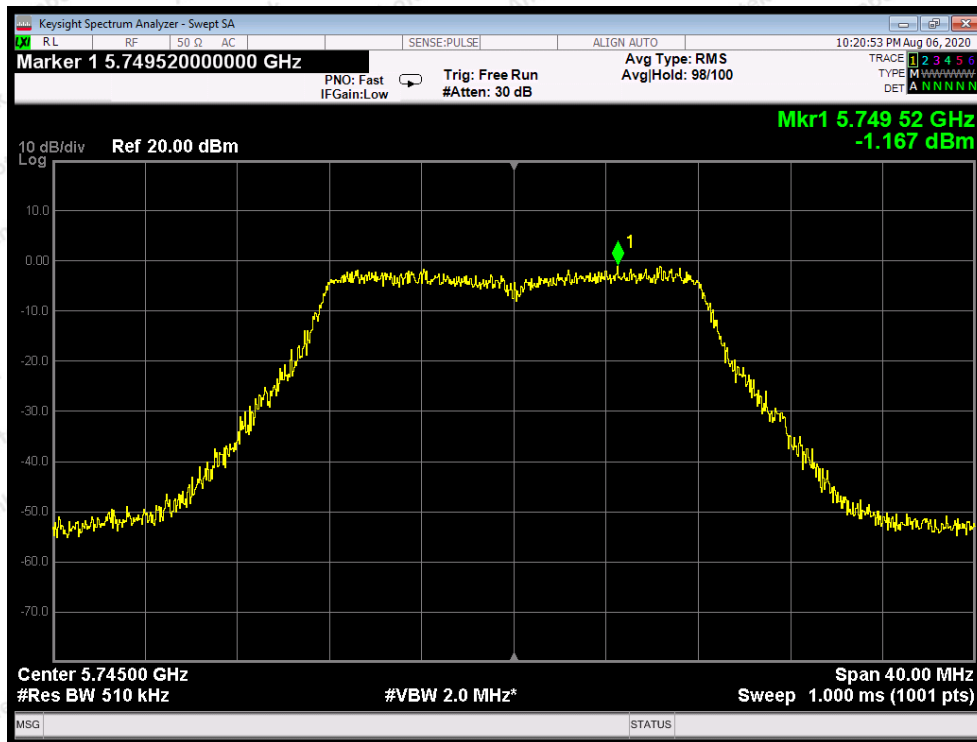


Test Mode: 802.11a--Low

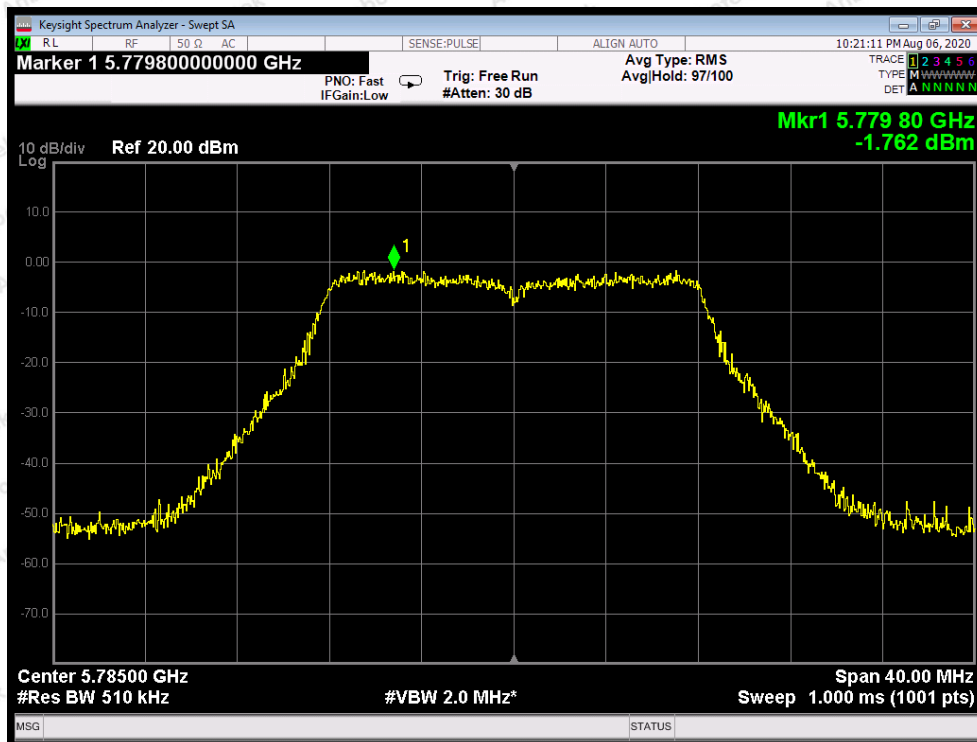


Test Mode: 802.11a---Middle

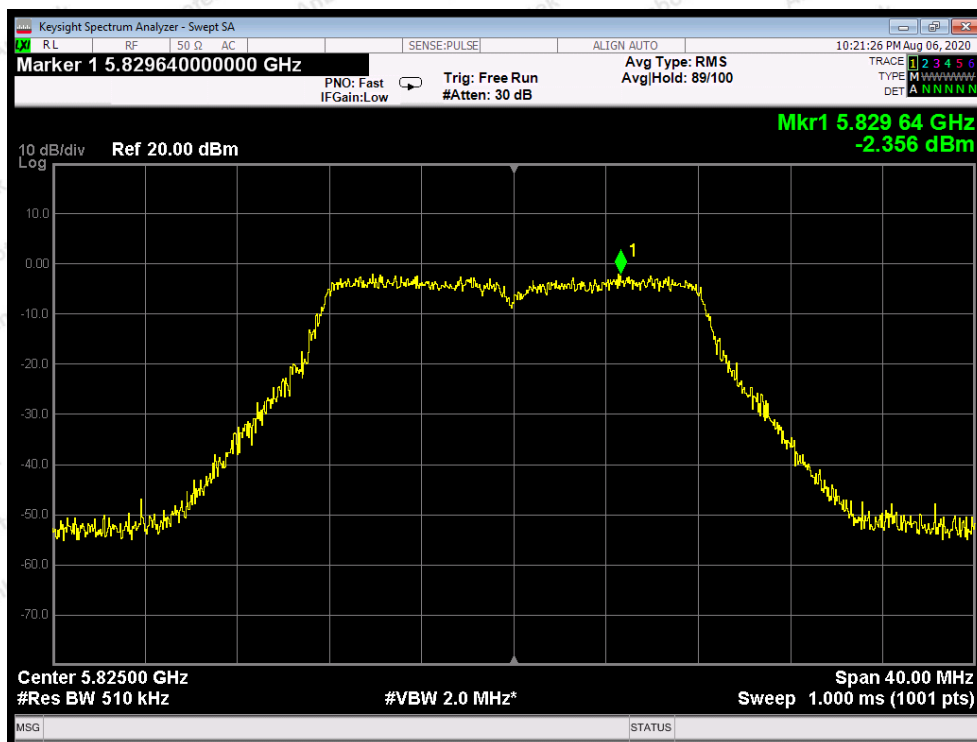


Test Mode: 802.11a---High

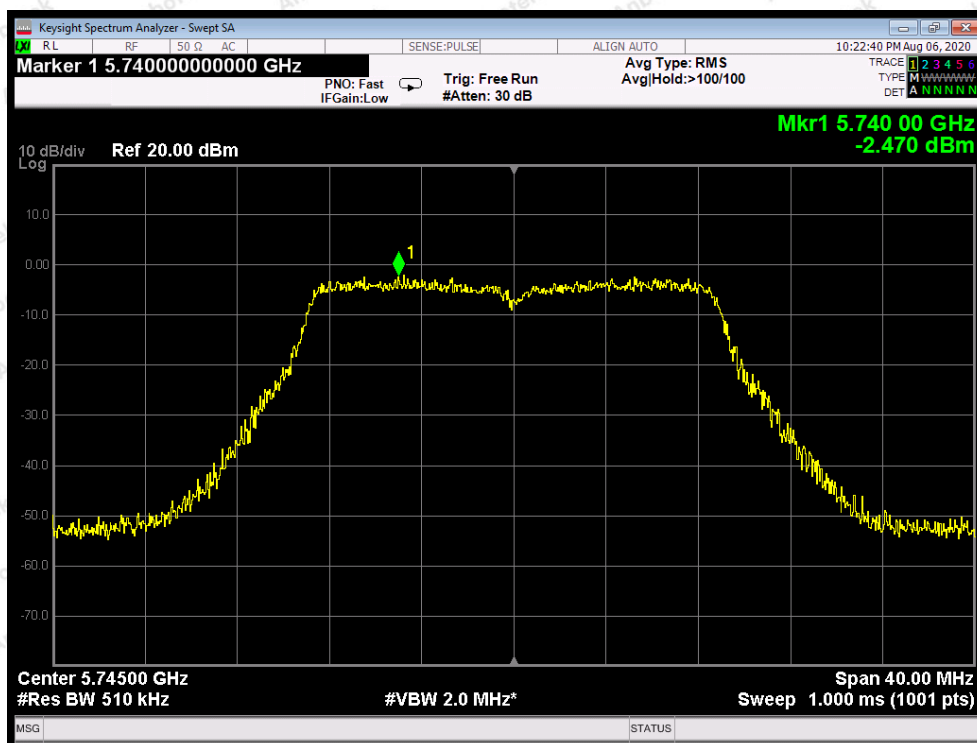


Test Mode: 802.11n20---Low

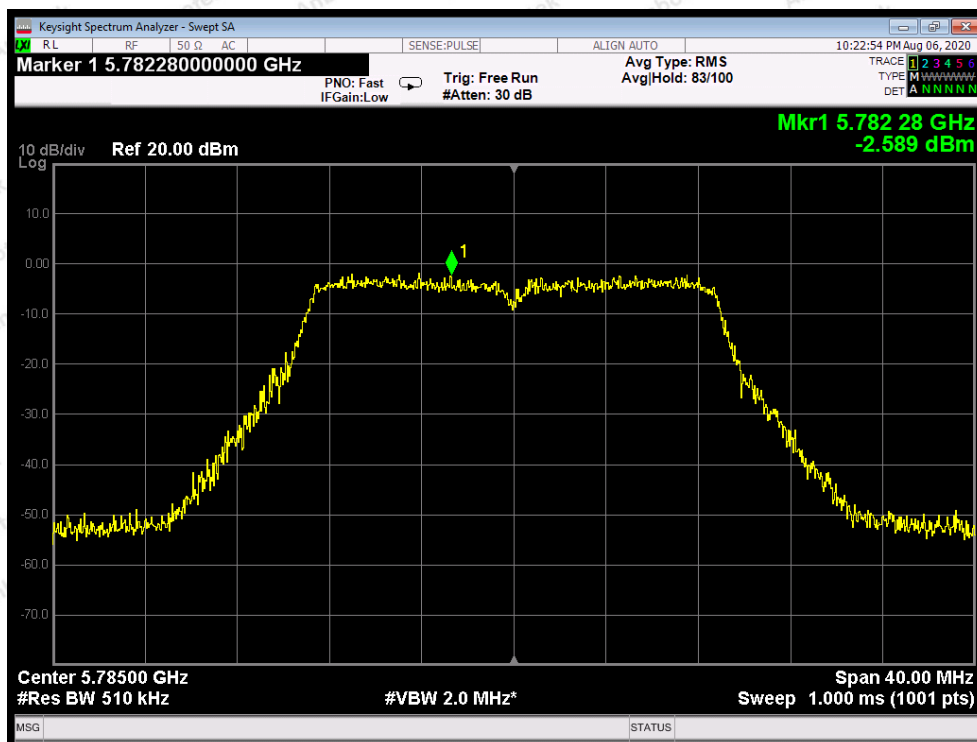


Test Mode: 802.11n20---Middle

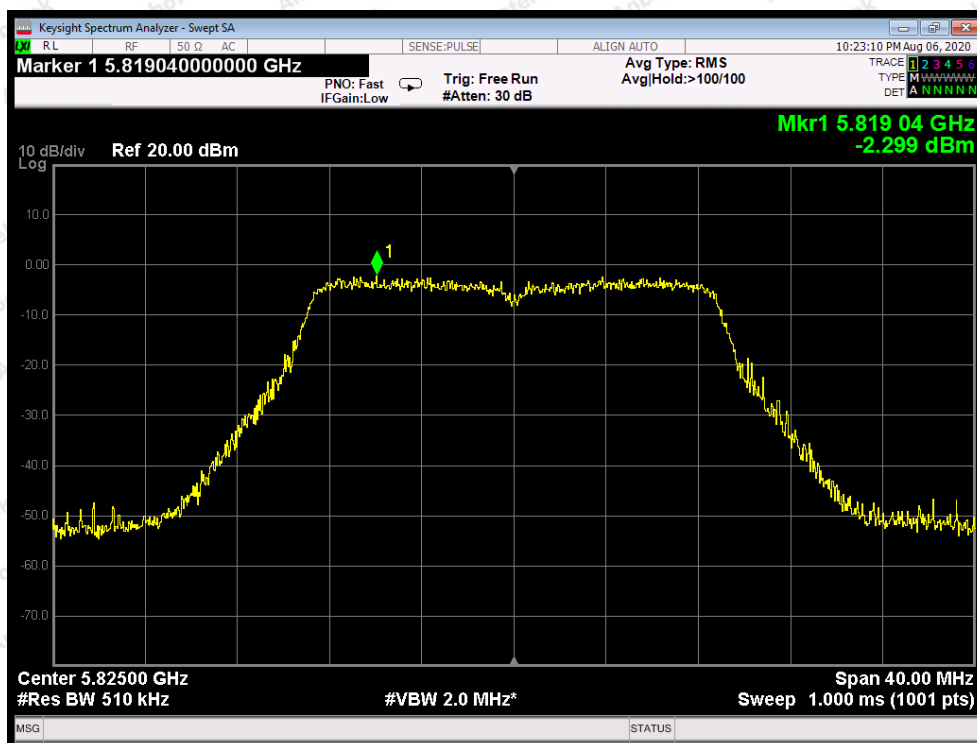


Test Mode: 802.11n20---High

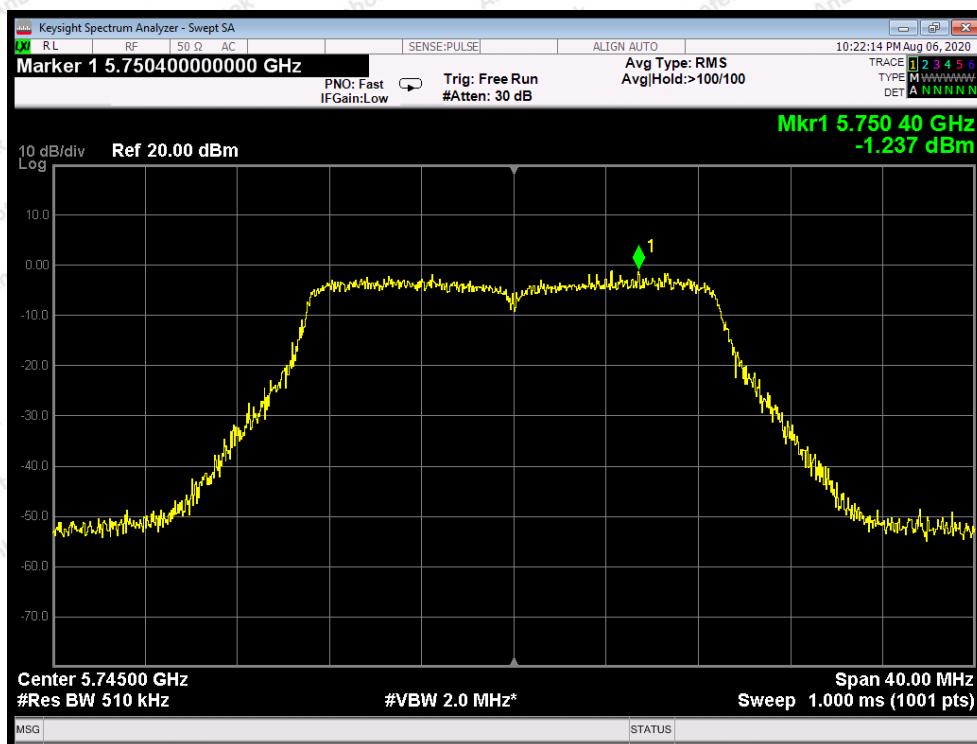


Test Mode: 802.11ac20--Low

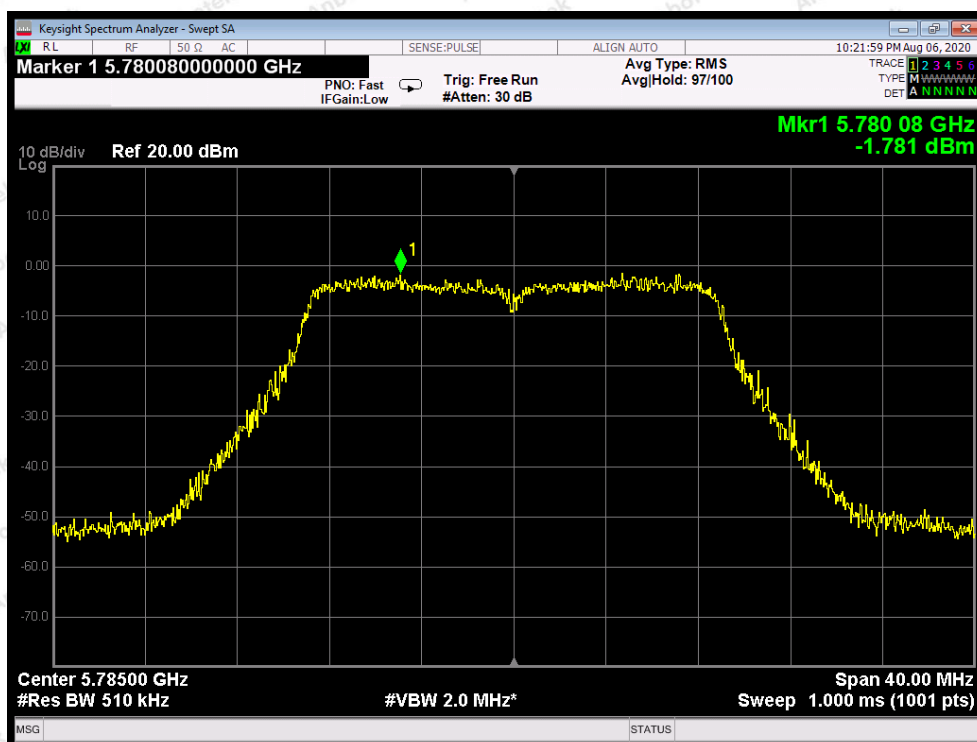


Test Mode: 802.11ac20---Middle

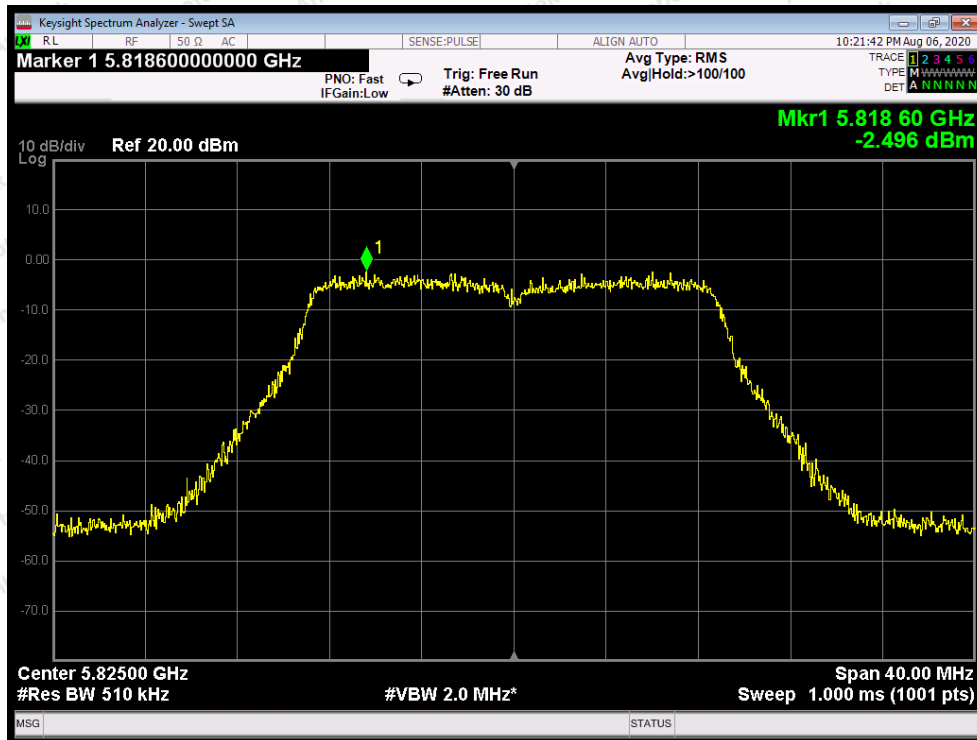


Test Mode: 802.11ac20---High

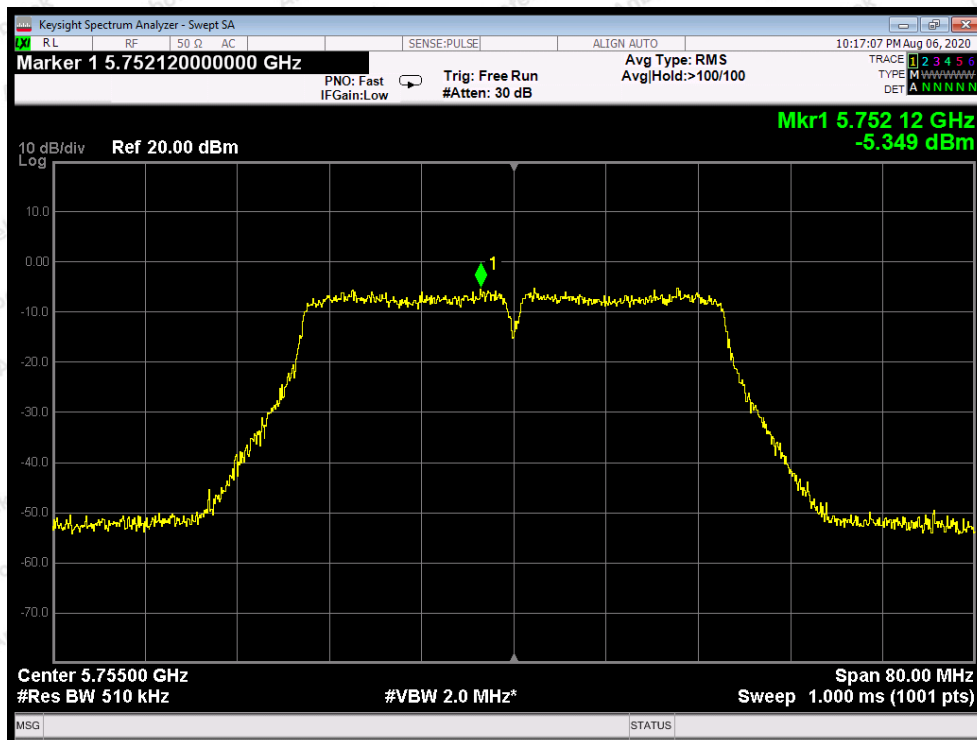


Test Mode: 802.11n40---Low

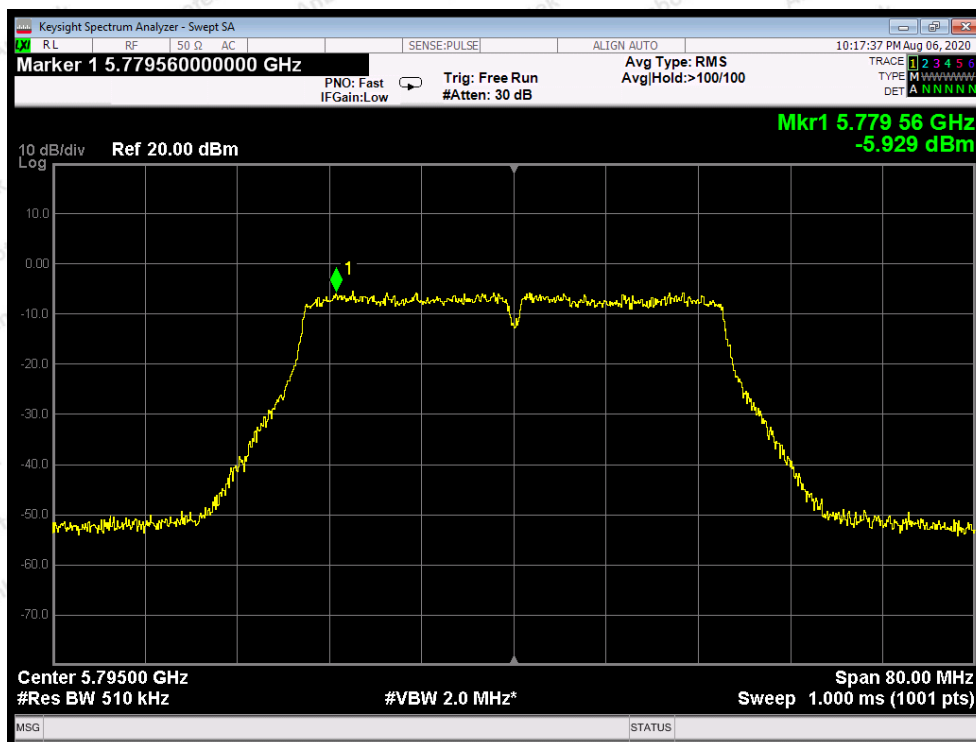


Test Mode: 802.11n40---High

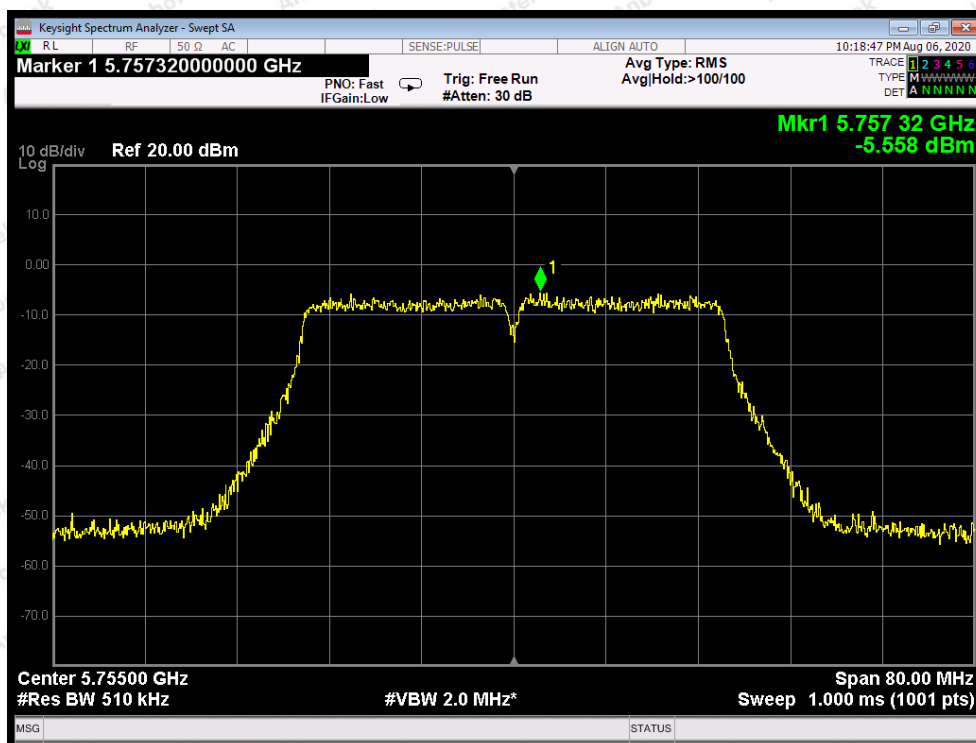

Test Mode: 802.11ac40---Low

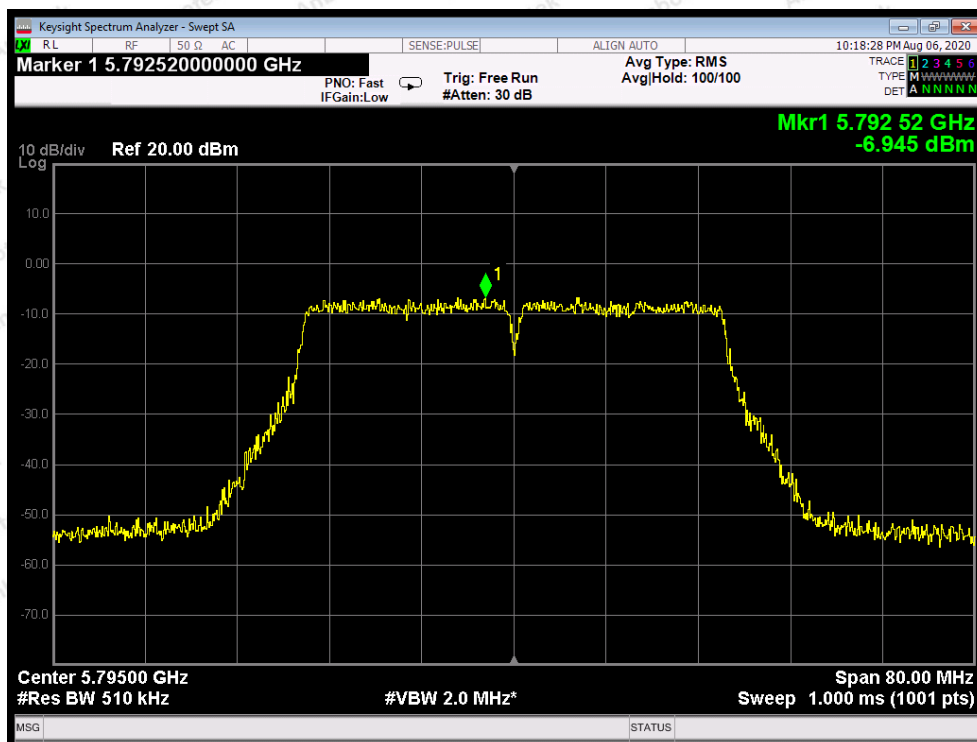

Test Mode: 802.11ac40---High

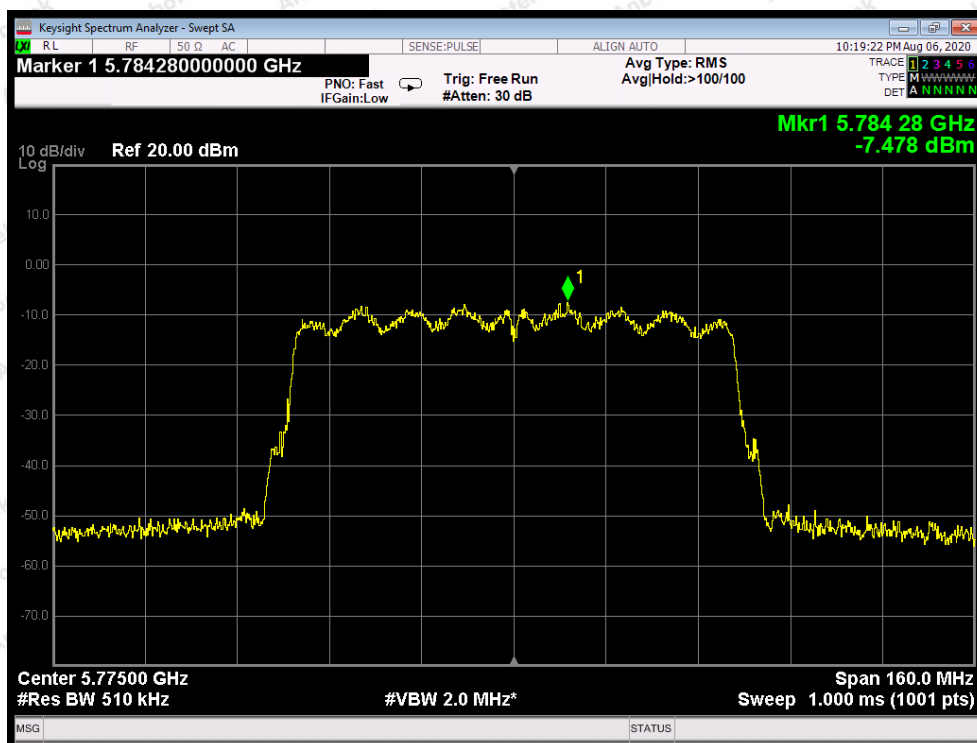

Test Mode: 802.11ac80


8. Antenna Requirement

8.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2. Antenna Connected Construction

The antenna is a Cylindrical Antenna which permanently attached, and the best case gain of the antenna is 3 dBi. It complies with the standard requirement.

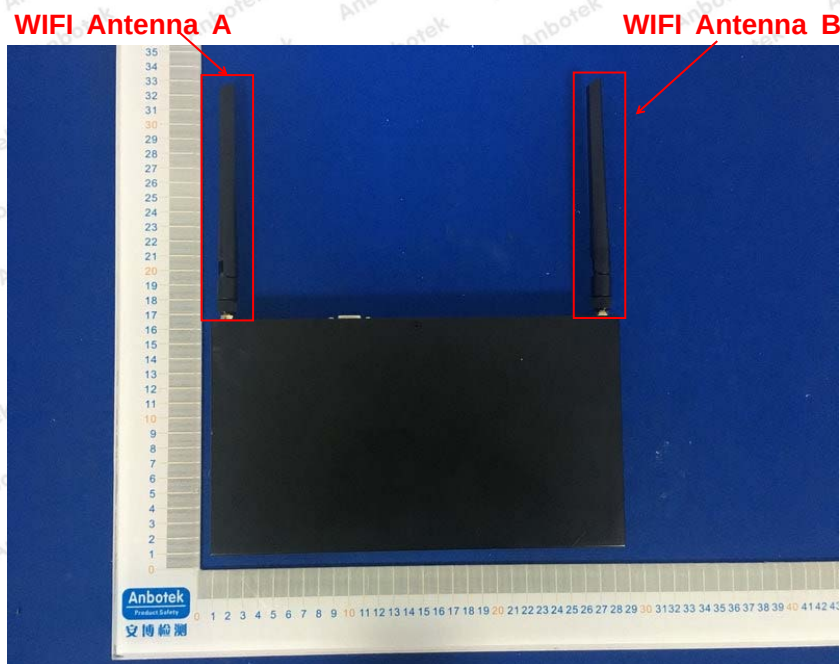

9. Frequency Stability

According to the manufacturer, under any normal operating conditions, the working frequency of the product is in the range of 5725-5850MHz.



APPENDIX I -- PHOTOGRAPH

Reference to the test report 18220WC00106601.

----- End of Report -----

