



TEST REPORT

Application No.: GZCR2111021371HS
Applicant: Echelon Fitness Multimedia, LLC
Address of Applicant: 605 Chestnut Street Suite 700 Chattanooga, TN 37450 USA
Manufacturer: XIAMEN ZHOULONG SPORTING GOODS CO., LTD.
Address of Manufacturer: 32-36 Rongxi Road, Tong'an District, Xiamen, Fujian, China, 361100
Factory: XIAMEN ZHOULONG SPORTING GOODS CO., LTD.
Address of Factory: 32-36 Rongxi Road, Tong'an District, Xiamen, Fujian, China, 361100
Equipment Under Test (EUT):
EUT Name: Echelon Connect EX-8s
Model No.: ECHEX-8s-24c
Trade Mark: Echelon
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2021-11-12
Date of Test: 2022-01-04 to 2022-01-05
Date of Issue: 2022-01-06


Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian
EMC Laboratory Manager



Revision Record			
Version	Report No.	Date	Remark
01	GZCR211102137102	2022-01-06	Original

Authorized for issue by			
		 _____ Jim Li/Project Engineer	
		 _____ Ricky Liu/Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

Note:

E.U.T./EUT means Equipment Under Test.

N/A: Not applicable

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location.....	7
4.5 Test Facility	7
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List.....	9
6 Radio Spectrum Technical Requirement	12
6.1 Antenna Requirement	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
7 Radio Spectrum Matter Test Results	13
7.1 Conducted Peak Output Power.....	13
7.1.1 E.U.T. Operation	13
7.1.2 Test Mode Description	13
7.1.3 Test Setup Diagram.....	13
7.1.4 Measurement Procedure and Data.....	13
7.2 Minimum 6dB Bandwidth	14
7.2.1 E.U.T. Operation	14
7.2.2 Test Mode Description	14
7.2.3 Test Setup Diagram.....	14
7.2.4 Measurement Procedure and Data.....	14
7.3 Power Spectrum Density.....	15
7.3.1 E.U.T. Operation	15
7.3.2 Test Mode Description	15
7.3.3 Test Setup Diagram.....	15
7.3.4 Measurement Procedure and Data.....	15
7.4 Conducted Band Edges Measurement	16
7.4.1 E.U.T. Operation	16
7.4.2 Test Mode Description	16
7.4.3 Test Setup Diagram.....	16
7.4.4 Measurement Procedure and Data.....	16
7.5 Conducted Spurious Emissions	17
7.5.1 E.U.T. Operation	17
7.5.2 Test Mode Description	17
7.5.3 Test Setup Diagram.....	17
7.5.4 Measurement Procedure and Data.....	17



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.6	Radiated Emissions which fall in the restricted bands	18
7.6.1	E.U.T. Operation	18
7.6.2	Test Mode Description	18
7.6.3	Test Setup Diagram	18
7.6.4	Measurement Procedure and Data.....	19
7.7	Radiated Spurious Emissions Below 1GHz	28
7.7.1	E.U.T. Operation	28
7.7.2	Test Mode Description	28
7.7.3	Test Setup Diagram	28
7.7.4	Measurement Procedure and Data.....	29
7.8	Radiated Spurious Emissions Above 1GHz.....	34
7.8.1	E.U.T. Operation	34
7.8.2	Test Mode Description	34
7.8.3	Test Setup Diagram	34
7.8.4	Measurement Procedure and Data.....	35
8	Emission Test Results	48
8.1	Conducted Emissions at AC Power Line (150kHz-30MHz).....	48
8.1.1	E.U.T. Operation	48
8.1.2	Test Mode Description	48
8.1.3	Test Setup Diagram	48
8.1.4	Measurement Procedure and Data.....	49
9	Test Setup Photo	54
10	EUT Constructional Details (EUT Photos)	55
11	Appendix.....	56
11.1	For PAD.....	56
11.2	For Body.....	67



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: Switching Adapter
Model: SOY-1200800-410-B
Input: AC 100-240V, 50/60Hz, 1.8A Max.
Output: DC 12.0V, 8.0A, 96.0W

Test voltage: AC 120V, 60Hz

Cable(s): Adapter AC input cable, 3 wires, 1.8m, unshielded.
Adapter DC output cable, 2 wires, 1.2m, unshielded.
DC IN port for power supply.
Type-C port for upgrade firmware.
Audio Jack port for audio output.
HDMI port(reserve).
USB 2.0 port x1 for data transmission.
USB 3.0 port x1 for data transmission.
SD CARD slot x1
RJ45 Port x1 for network connection.
3.5mm Audio Jack Port for audio output.

For PAD

Operation Frequency: 2402MHz to 2480MHz
Bluetooth Version: V4.2 LE
Modulation Type: GFSK
Number of Channels: 40
Channel Spacing: 2MHz
Antenna Type: Integral Antenna
Antenna Gain: 3 dBi declared by applicant.

For Body

Operation Frequency: 2402MHz to 2480MHz
Modulation Type: GFSK
Number of Channels: 40
Channel Spacing: 2MHz
Antenna Type: PCB Antenna
Antenna Gain: 0 dBi declared by applicant.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Note Book Computer	LENOVO	Lenovo Xiaoxinchao 5000	PF0TLJX7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	±2.76dB
Conducted Peak Output Power	± 0.75dB
Minimum 6dB Bandwidth	± 3%
Power Spectrum Density	± 2.84dB
Conducted Band Edges Measurement	± 0.75dB
Conducted Spurious Emissions	± 0.75dB
Radiated Emissions which fall in the restricted bands	±5.00dB (30MHz-1GHz; 3m);±4.38dB (30MHz-1GHz; 10m);± 4.52dB (1GHz-6GHz);± 4.54dB (above 6GHz)
Radiated Spurious Emissions Below 1GHz	±5.00dB (3m); ±4.38dB (10m)
Radiated Spurious Emissions Above 1GHz	±4.52dB (1GHz-6GHz);±4.54dB(above 6GHz)

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

● NVLAP (Lab Code: 200611-0)

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● CNAS (Lab Code: L0167)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	2019-10-20	2022-10-19
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2021-09-24	2022-09-23
EMI Test Receiver (9kHz-3.6GHz)	Rohde & Schwarz	ESR3	EMC2221	2021-06-01	2022-05-31
Test Software E3r	Audix	Ver.6.11812	GZE100-77	N/A	N/A

Conducted Peak Output Power

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2021-11-02	2023-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2021-06-22	2022-06-21
4X4 Power sensor Unit	TST	TSPS2023R	EMC2226	2021-08-30	2022-08-29
Test Software	TST	V2.0	GZE100-78	N/A	N/A

Minimum 6dB Bandwidth

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2021-11-02	2023-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2021-06-22	2022-06-21
4X4 Power sensor Unit	TST	TSPS2023R	EMC2226	2021-08-30	2022-08-29
Test Software	TST	V2.0	GZE100-78	N/A	N/A

Power Spectrum Density

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2021-11-02	2023-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2021-06-22	2022-06-21
4X4 Power sensor Unit	TST	TSPS2023R	EMC2226	2021-08-30	2022-08-29
Test Software	TST	V2.0	GZE100-78	N/A	N/A

Conducted Band Edges Measurement

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2021-11-02	2023-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2021-06-22	2022-06-21
4X4 Power sensor Unit	TST	TSPS2023R	EMC2226	2021-08-30	2022-08-29
Test Software	TST	V2.0	GZE100-78	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2021-11-02	2023-11-01
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2021-06-22	2022-06-21
4X4 Power sensor Unit	TST	TSPS2023R	EMC2226	2021-08-30	2022-08-29
Test Software	TST	V2.0	GZE100-78	N/A	N/A

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-12-17	2022-12-16
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-12-17	2022-12-16
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna (1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2021-09-20	2022-09-19
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2021-11-01	2022-10-31
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
Chamber cable	HangTianXing	N/A	EMC0542	2020-09-09	2022-09-08
Amplifier (9kHz-1.3GHz)	HP	8447F	EMC2065	2021-05-19	2022-05-18
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2020-04-16	2022-04-15
EMI Test Receiver (1Hz-8GHz)	Rohde & Schwarz	ESW8	EMC2220	2021-05-26	2022-05-25
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Trilog Broadband Antenna (25MHz-1GHz)-Lab	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-12-17	2022-12-16
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-12-17	2022-12-16
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020-09-09	2022-09-08
Horn Antenna (1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-12-17	2022-12-16
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2021-09-20	2022-09-19
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2021-11-01	2022-10-31
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2021-07-05	2022-07-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3 dBi for PAD part and the best case gain of the antenna is 0 dBi for Body part.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C


Humidity: 53.3 % RH

Atmospheric Pressure: 1022 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.1.3 Test Setup Diagram

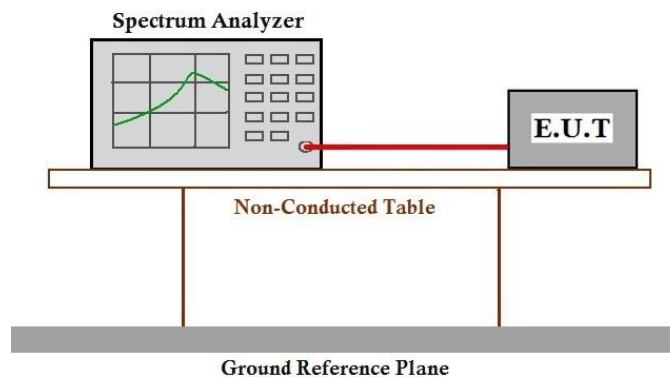

7.1.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥ 500 kHz

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22.8 °C Humidity: 53.3 % RH Atmospheric Pressure: 1022 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.2.3 Test Setup Diagram

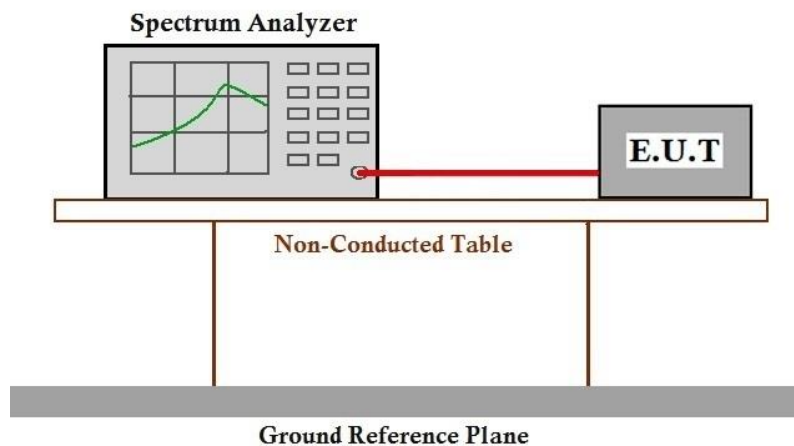

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 Power Spectrum Density

Test Requirement	47 CFR Part 15, Subpart C 15.247(e)
Test Method:	ANSI C63.10 (2013) Section 11.10.2
Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 22.8 °C Humidity: 53.3 % RH Atmospheric Pressure: 1022 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.3.3 Test Setup Diagram

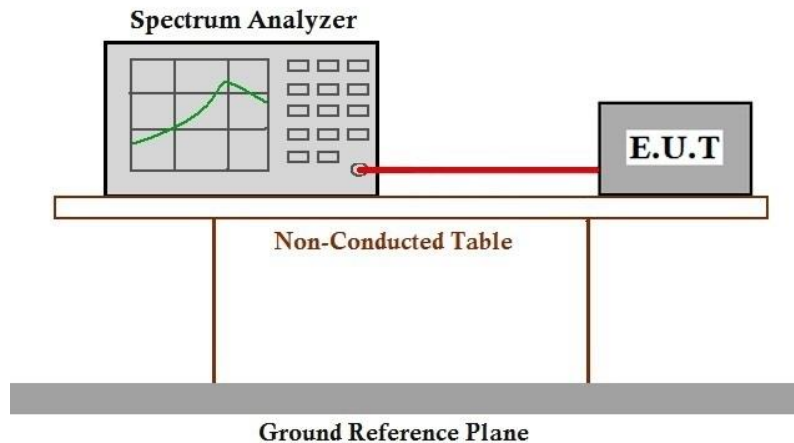

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22.8 °C Humidity: 53.3 % RH Atmospheric Pressure: 1022 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.4.3 Test Setup Diagram

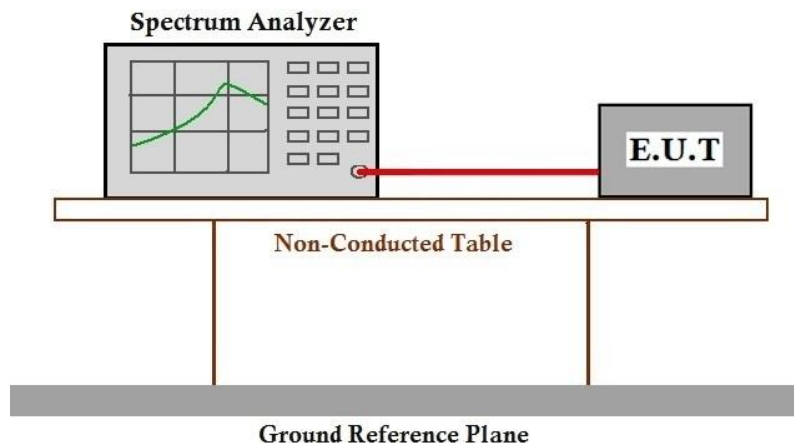

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.ssgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.5 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 22.8 °C Humidity: 53.3 % RH Atmospheric Pressure: 1022 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.5.3 Test Setup Diagram

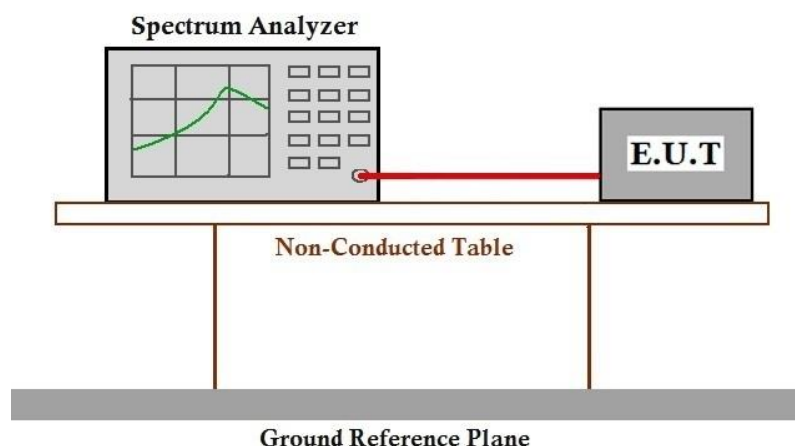

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.6 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 21.9 °C


Humidity: 60.6 % RH

Atmospheric Pressure: 1018 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.6.3 Test Setup Diagram

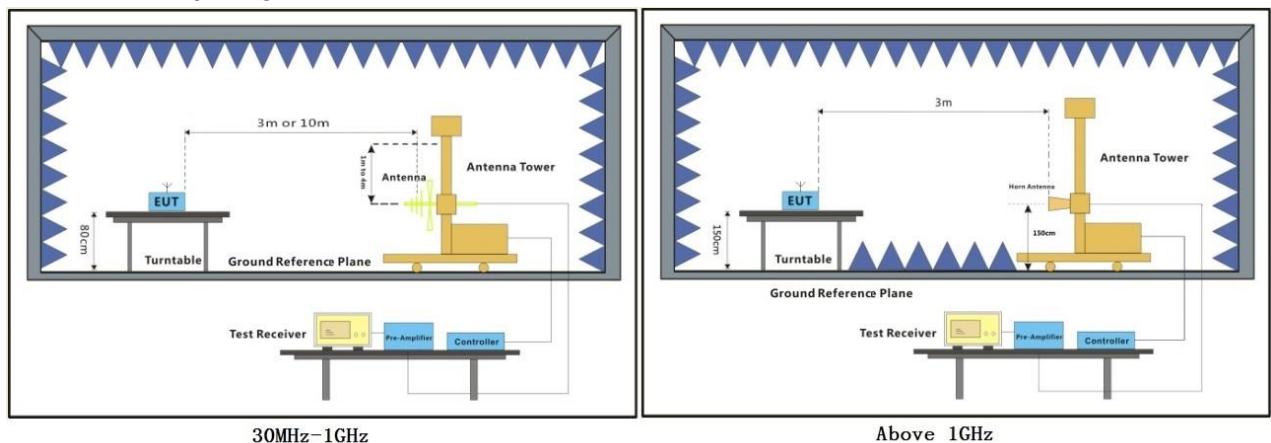

7.6.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Test Mode: 02; Polarity: Vertical; Modulation: GFSK; Channel: Low

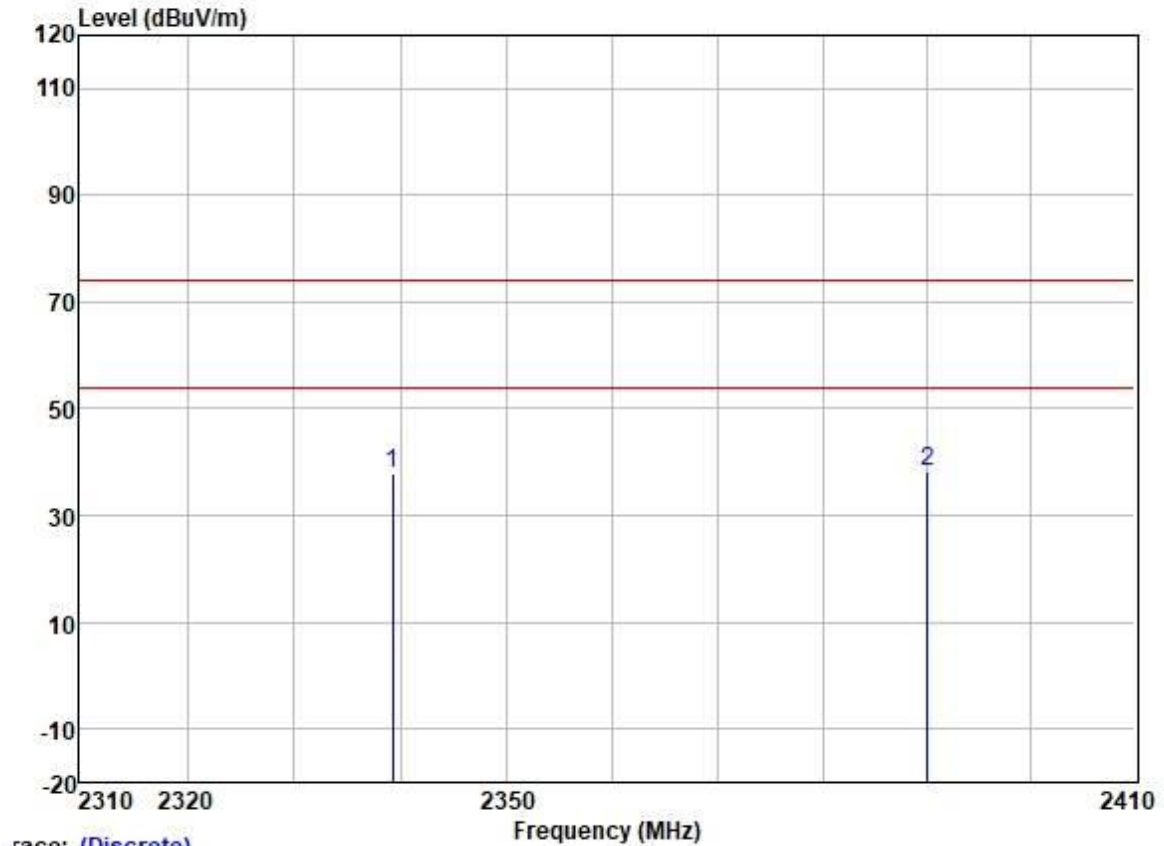

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2339.259	44.95	27.22	3.47	37.61	38.03	74.00	-35.97	VERTICAL	Peak
2	2390.000	44.90	27.33	3.50	37.59	38.14	74.00	-35.86	VERTICAL	Peak


Test Mode: 02; Polarity: Horizontal; Modulation: GFSK; Channel: Low

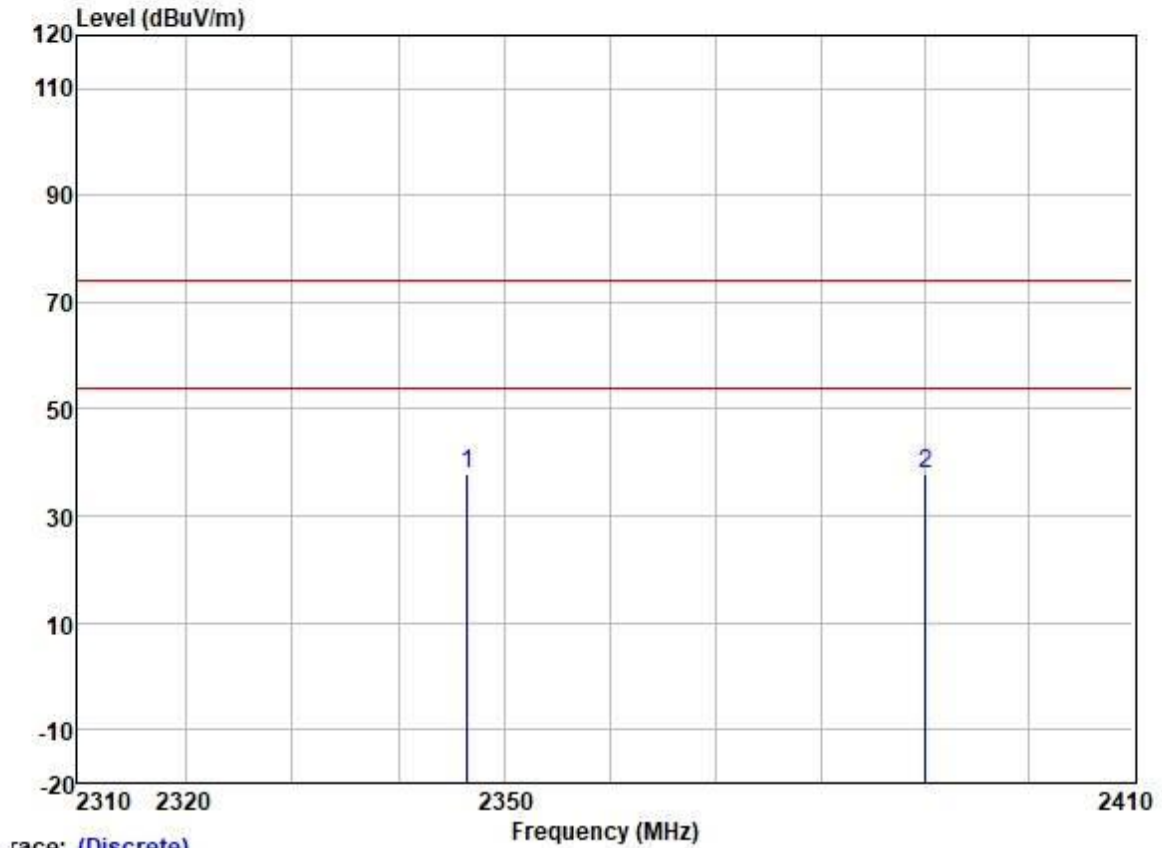

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2346.407	44.65	27.24	3.48	37.61	37.76	74.00	-36.24	HORIZONTAL	Peak
2	2390.000	44.51	27.33	3.50	37.59	37.75	74.00	-36.25	HORIZONTAL	Peak

Test Mode: 02; Polarity: Vertical; Modulation: GFSK; Channel: High

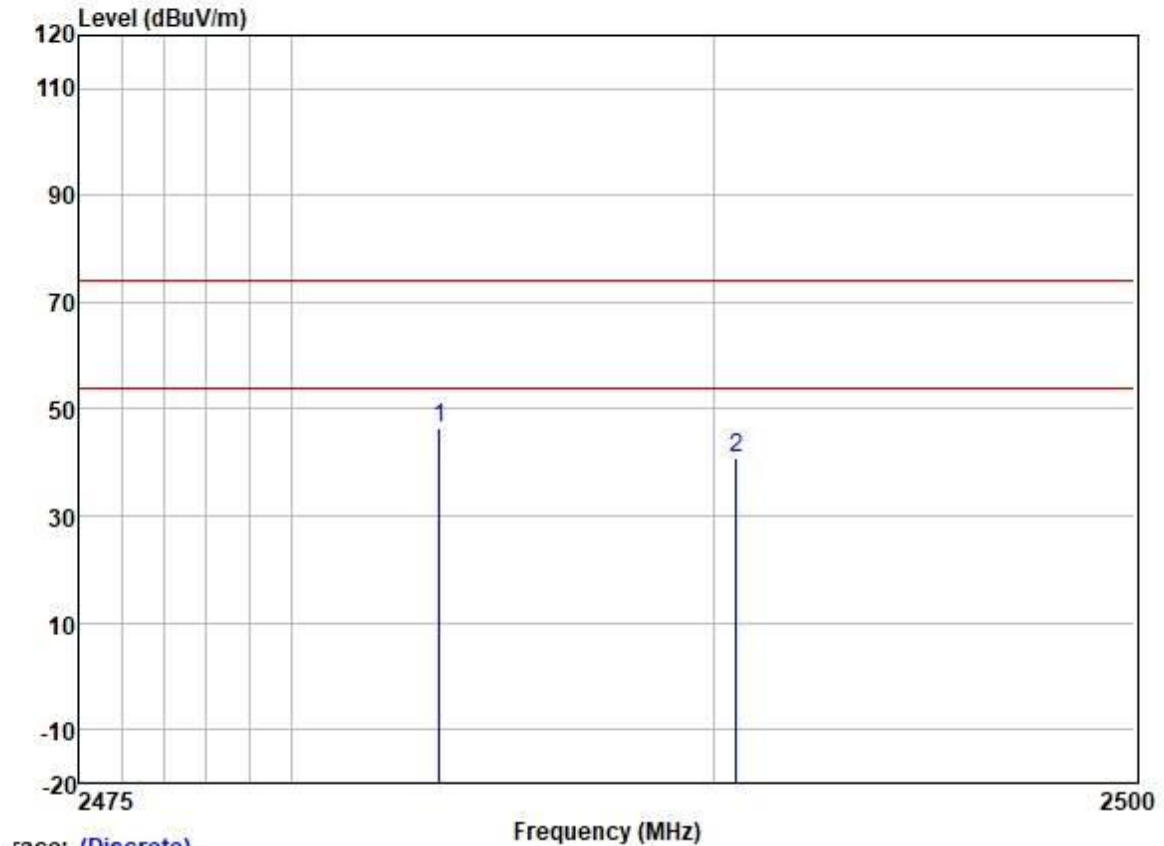


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2483.500	52.85	27.48	3.54	37.57	46.30	74.00	-27.70	VERTICAL	Peak
2	2490.521	47.51	27.49	3.54	37.56	40.98	74.00	-33.02	VERTICAL	Peak

Test Mode: 02; Polarity: Horizontal; Modulation: GFSK; Channel: High

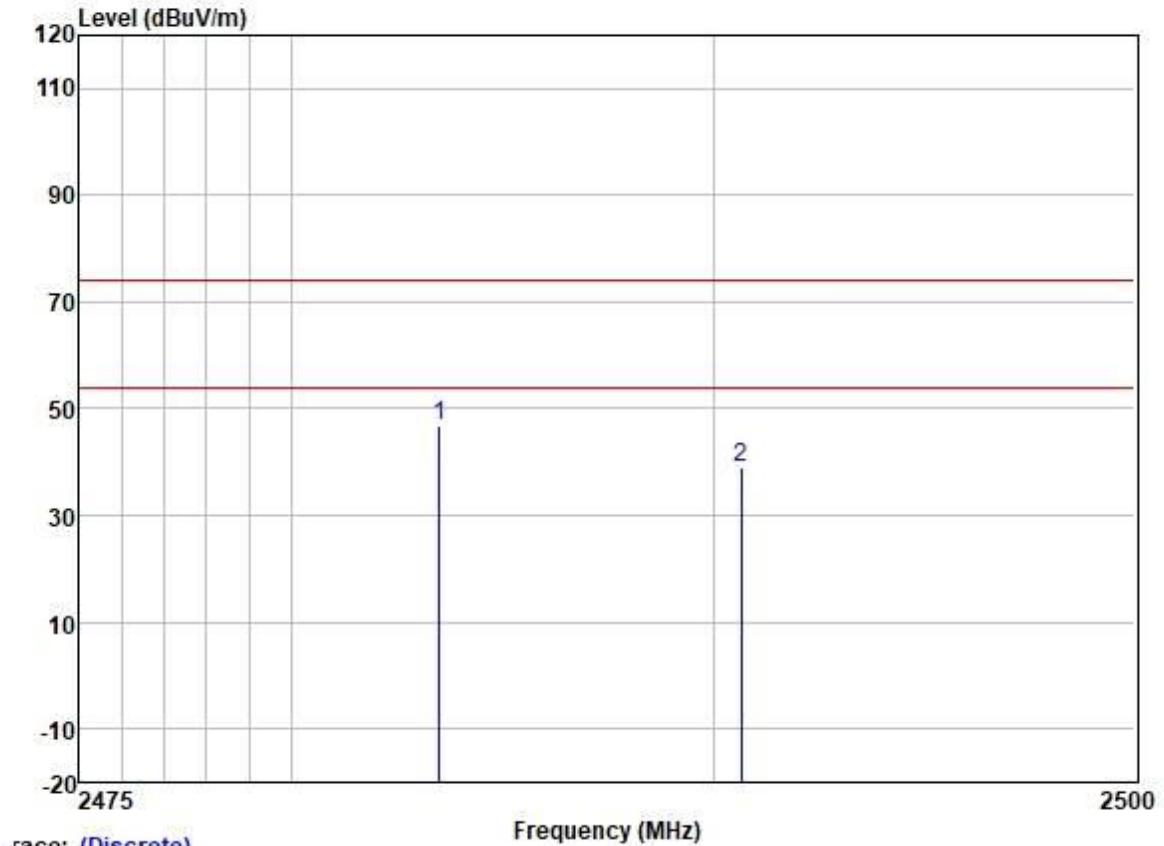


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	2483.500	53.42	27.48	3.54	37.57	46.87	74.00	-27.13	HORIZONTAL Peak
2	2490.646	45.40	27.49	3.54	37.56	38.87	74.00	-35.13	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation: GFSK; Channel: Low

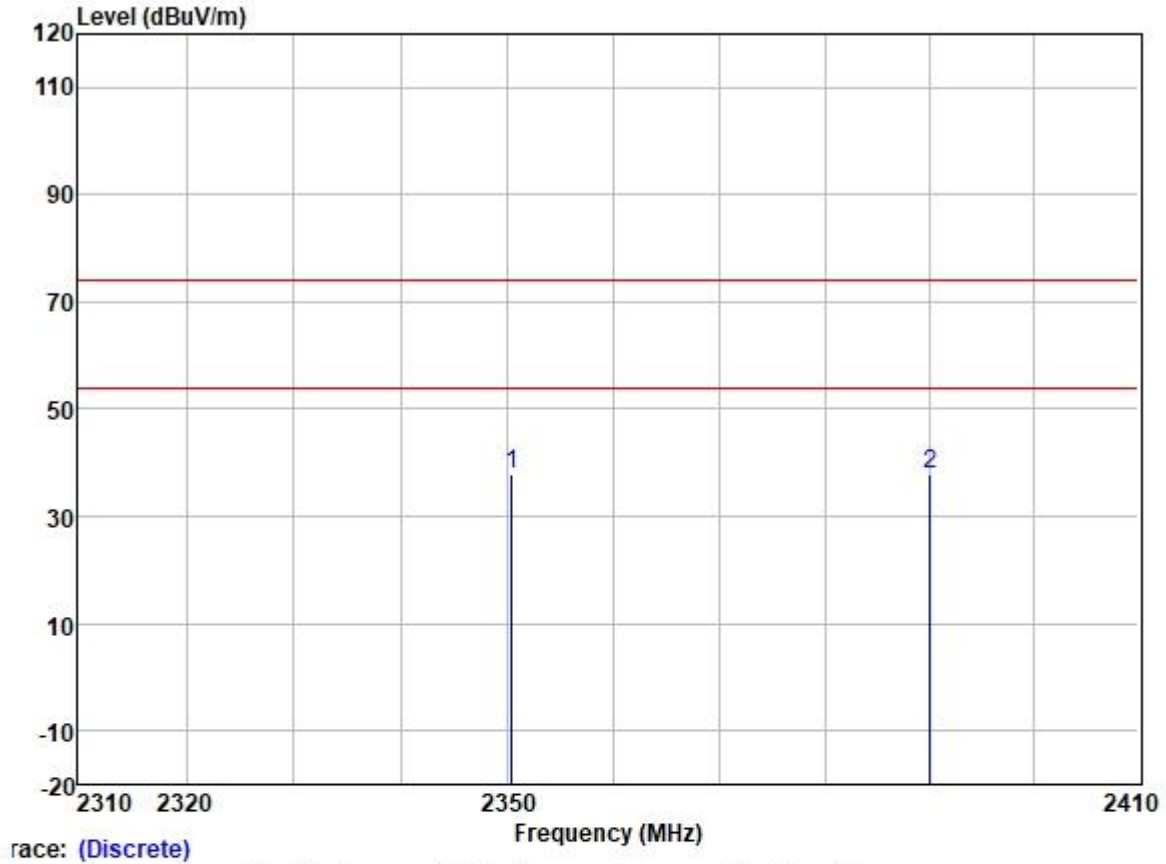


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2350.388	44.87	27.25	3.48	37.61	37.99	74.00	-36.01	VERTICAL	Peak
2	2390.000	44.81	27.33	3.50	37.59	38.05	74.00	-35.95	VERTICAL	Peak

Test Mode: 03; Polarity: Horizontal; Modulation: GFSK; Channel: Low

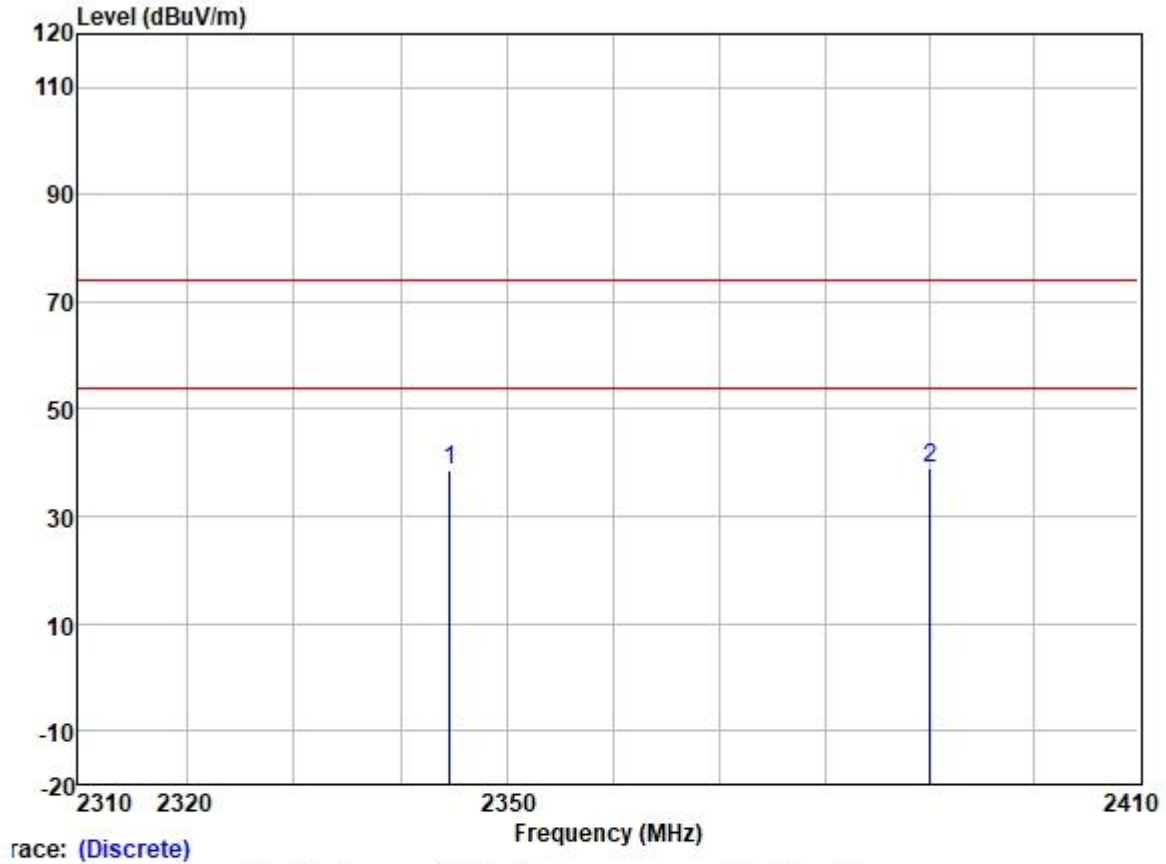


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2344.519	45.41	27.24	3.48	37.61	38.52	74.00	-35.48	HORIZONTAL	Peak
2	2390.000	45.56	27.33	3.50	37.59	38.80	74.00	-35.20	HORIZONTAL	Peak

Test Mode: 03; Polarity: Vertical; Modulation: GFSK; Channel: High

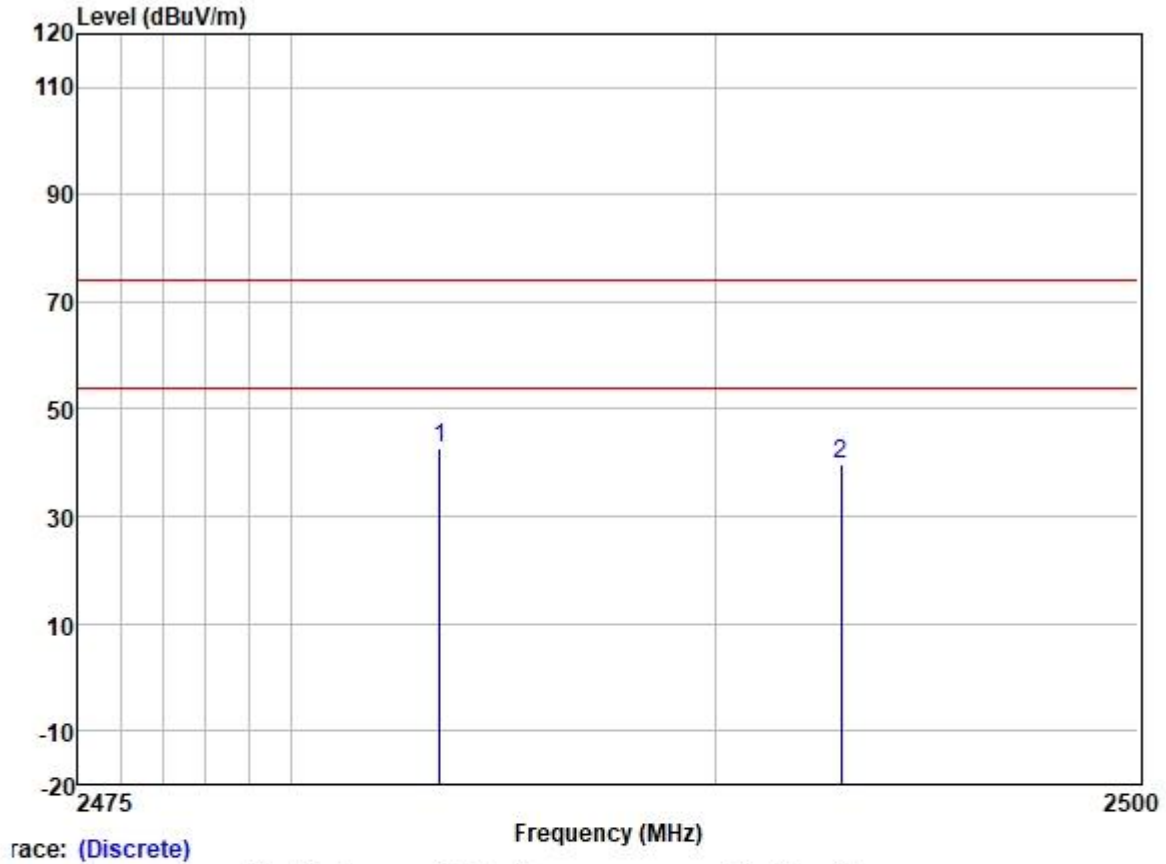

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2483.500	49.22	27.48	3.54	37.57	42.67	74.00	-31.33	VERTICAL	Peak
2	2492.950	46.16	27.49	3.54	37.56	39.63	74.00	-34.37	VERTICAL	Peak

Test Mode: 03; Polarity: Horizontal; Modulation: GFSK; Channel: High

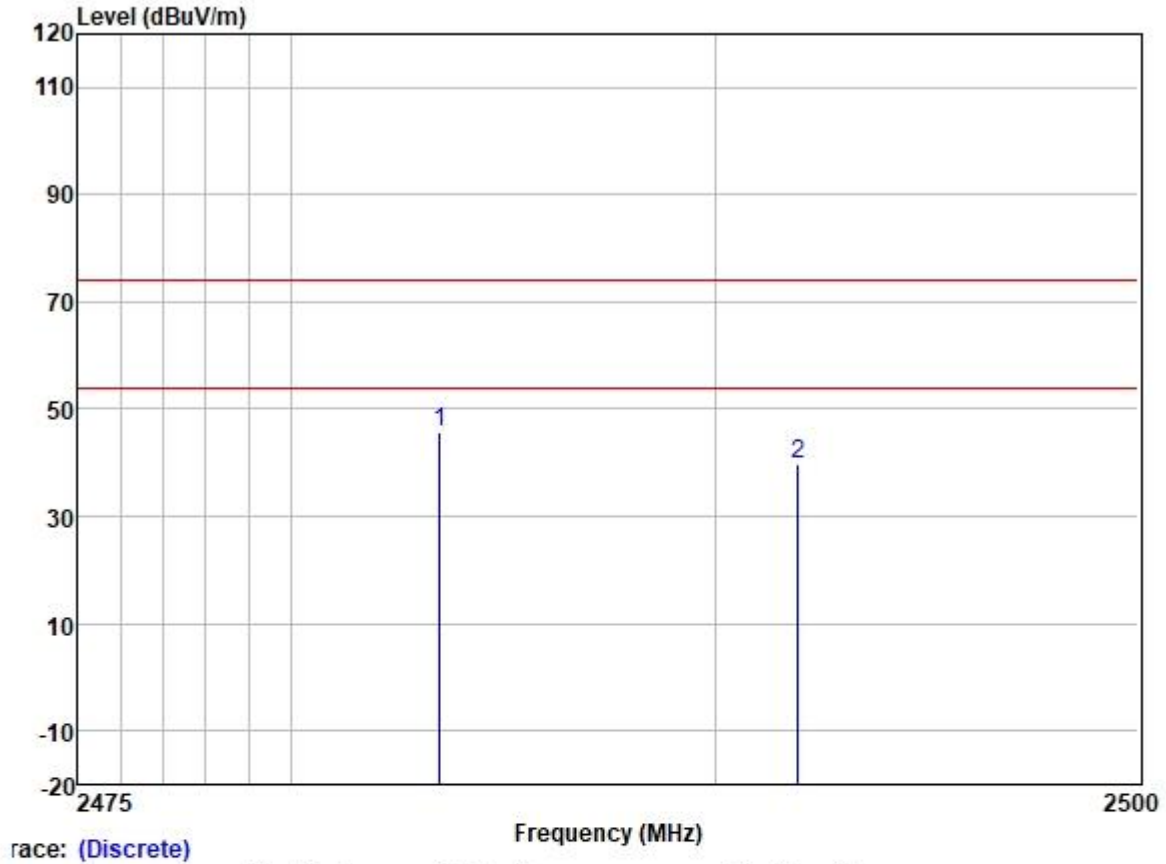

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	52.16	27.48	3.54	37.57	45.61	74.00	-28.39	HORIZONTAL Peak
2	2491.948	46.40	27.49	3.54	37.56	39.87	74.00	-34.13	HORIZONTAL Peak

7.7 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 21.7 °C Humidity: 61.1 % RH Atmospheric Pressure: 1018 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.7.3 Test Setup Diagram

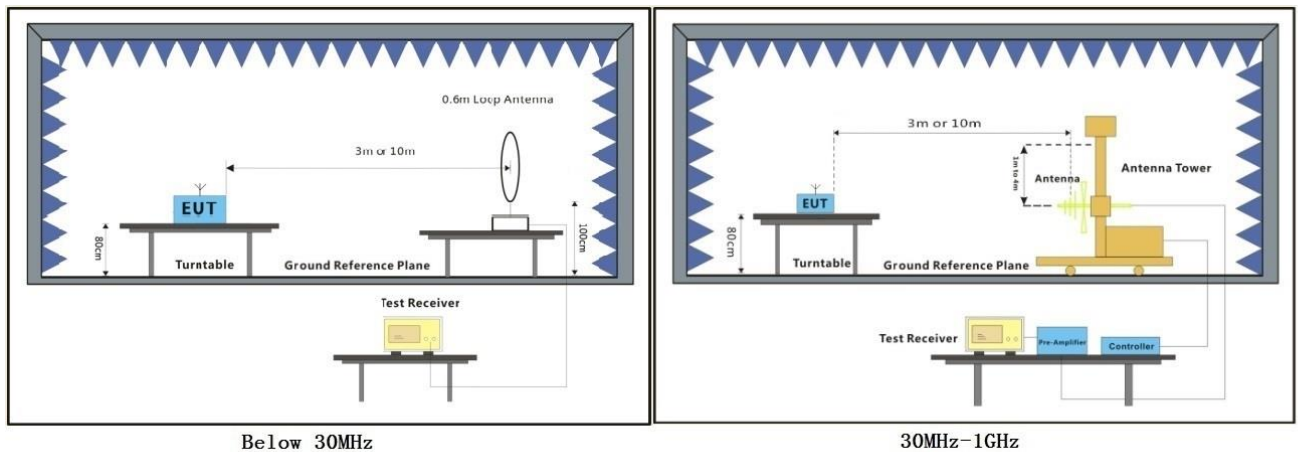

7.7.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Test Mode: 02; Polarity: Horizontal

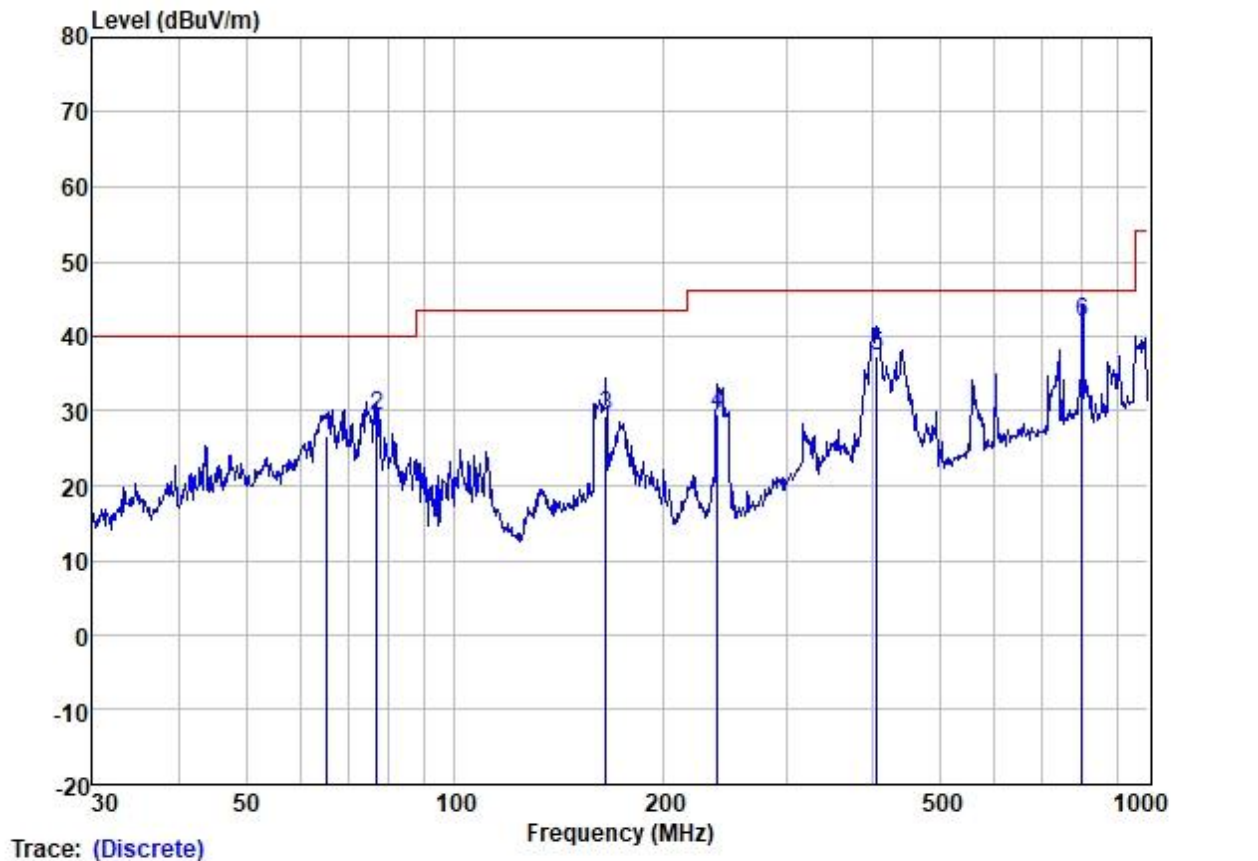

Site : SGS
Job :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	65.34	39.85	12.68	1.35	27.15	26.73	40.00	-13.27	HORIZONTAL	QP
2	77.05	45.09	9.85	1.46	27.10	29.30	40.00	-10.70	HORIZONTAL	QP
3	164.91	40.28	13.45	2.37	26.78	29.32	43.50	-14.18	HORIZONTAL	QP
4	239.15	41.68	11.82	2.81	26.66	29.65	46.00	-16.35	HORIZONTAL	QP
5	406.09	44.97	15.82	3.95	27.36	37.38	46.00	-8.62	HORIZONTAL	QP
6	801.79	41.20	22.62	6.17	28.03	41.96	46.00	-4.04	HORIZONTAL	QP


Test Mode: 02; Polarity: Vertical

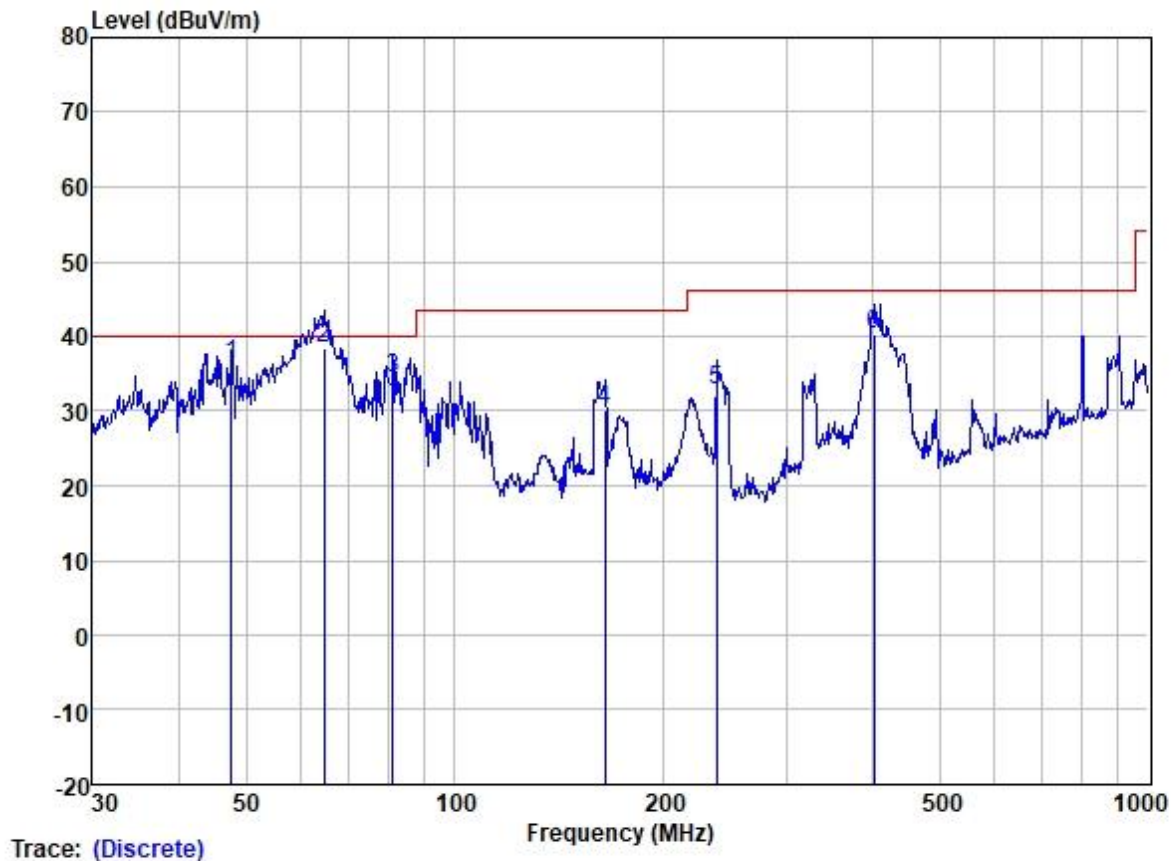


Site : SGS
Job :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	47.66	48.26	13.99	1.13	27.17	36.21	40.00	-3.79	VERTICAL	QP
2	64.66	51.39	12.79	1.34	27.15	38.37	40.00	-1.63	VERTICAL	QP
3	81.21	51.24	8.65	1.49	27.10	34.28	40.00	-5.72	VERTICAL	QP
4	164.33	41.14	13.48	2.37	26.79	30.20	43.50	-13.30	VERTICAL	QP
5	238.31	44.94	11.74	2.81	26.67	32.82	46.00	-13.18	VERTICAL	QP
6	401.84	47.90	15.73	3.95	27.34	40.24	46.00	-5.76	VERTICAL	QP

Test Mode: 03; Polarity: Horizontal

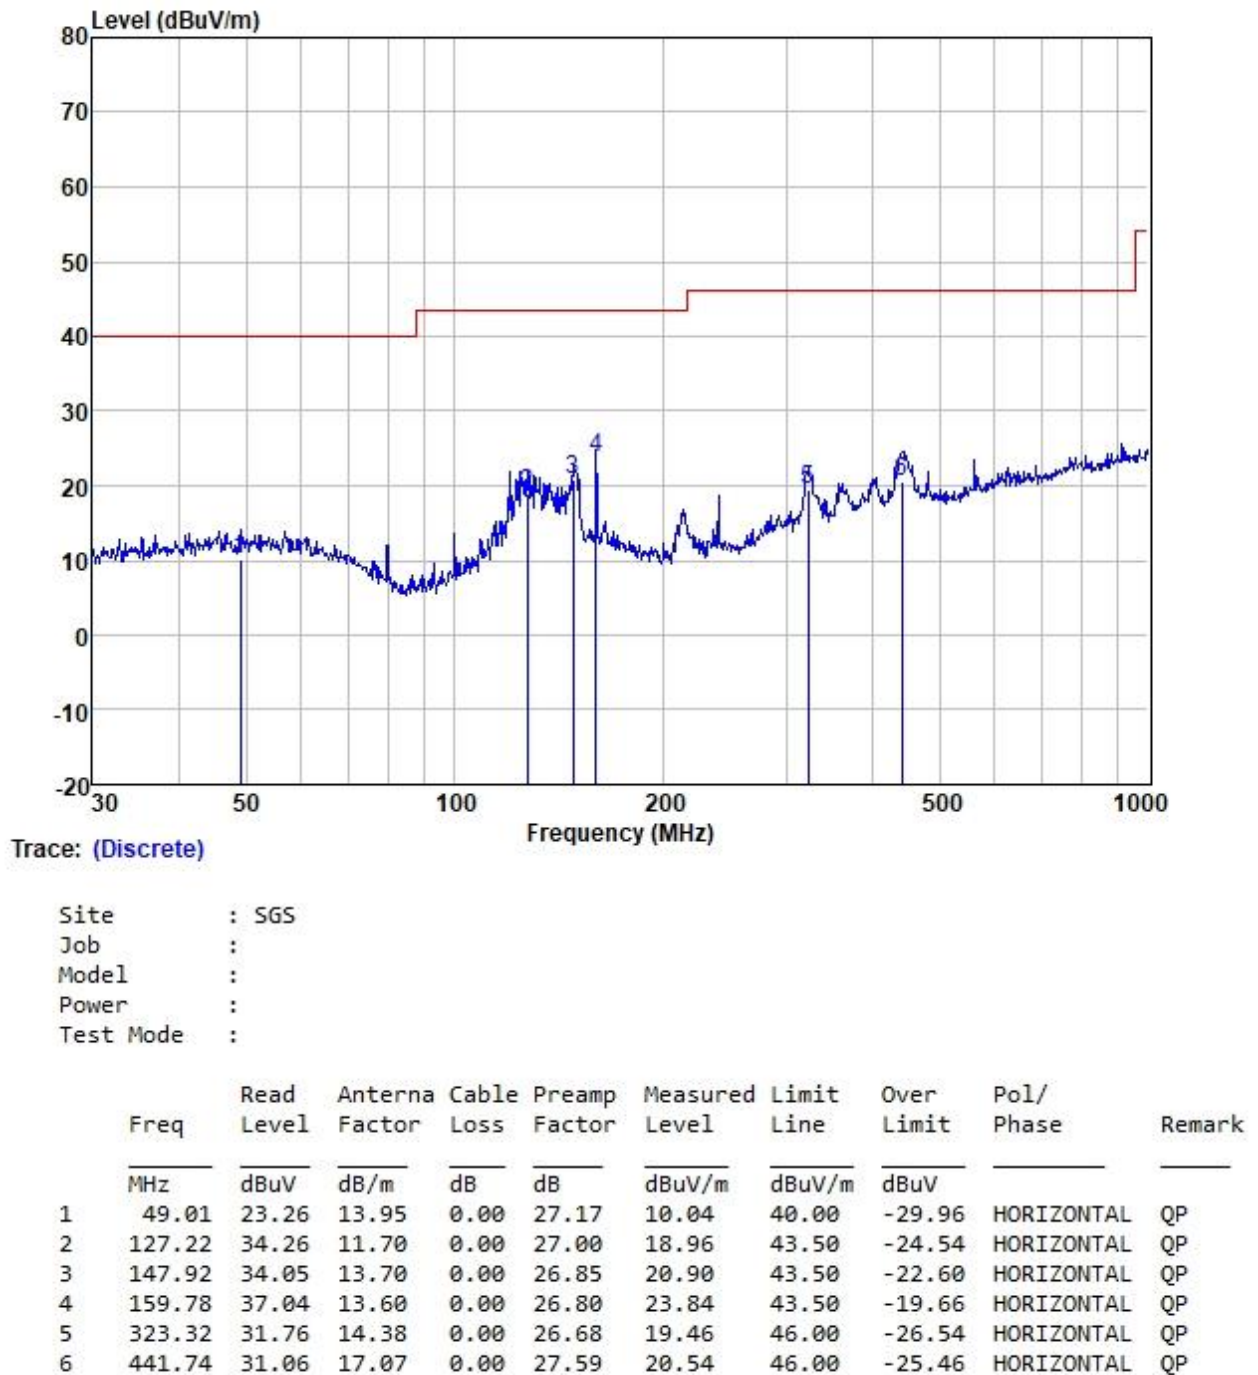

Test Mode: 03; Polarity: Vertical

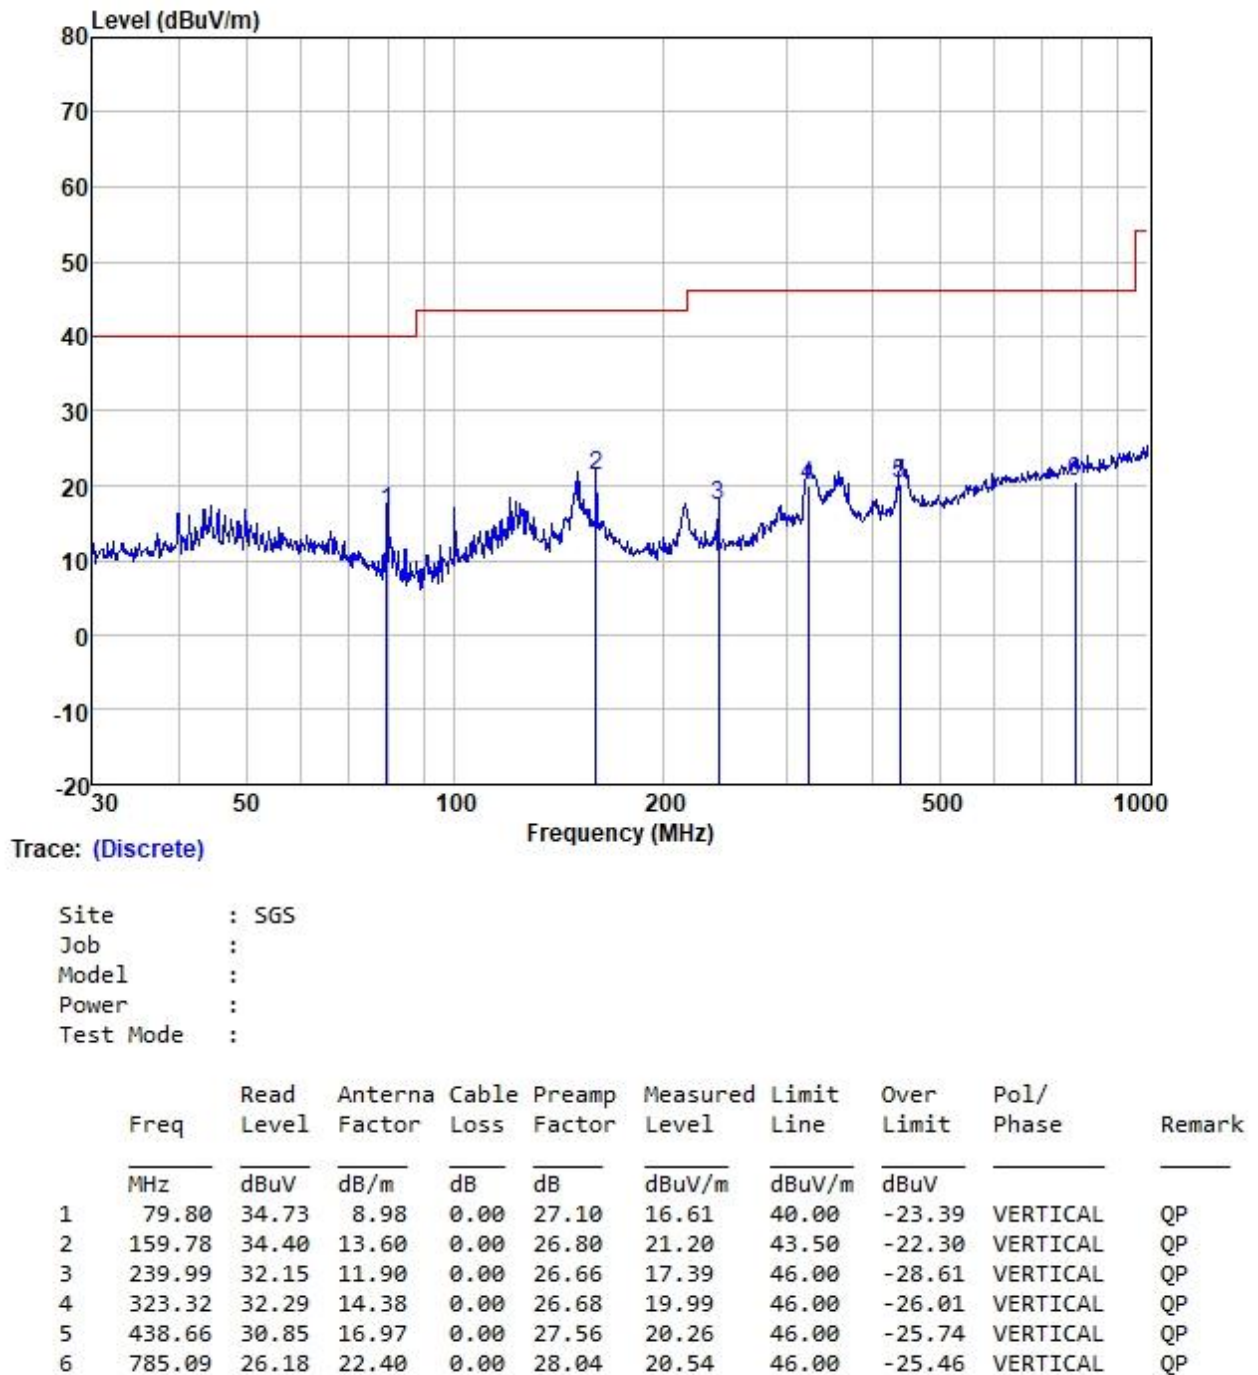

7.8 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 21.9 °C Humidity: 60.6 % RH Atmospheric Pressure: 1018 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

7.8.3 Test Setup Diagram

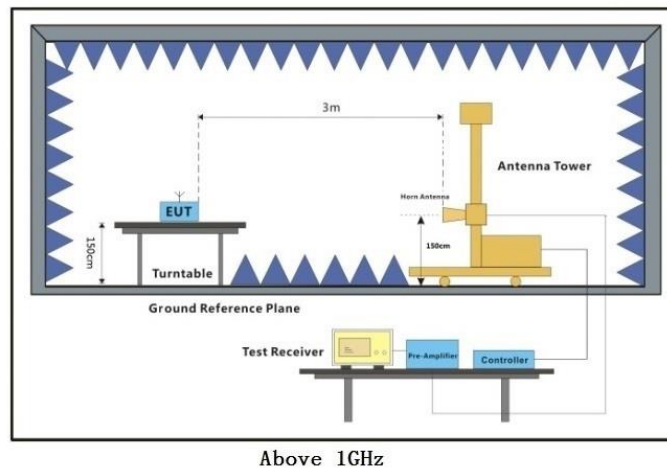

7.8.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Test Mode: 02; Polarity: Horizontal; Modulation: GFSK; Channel: High

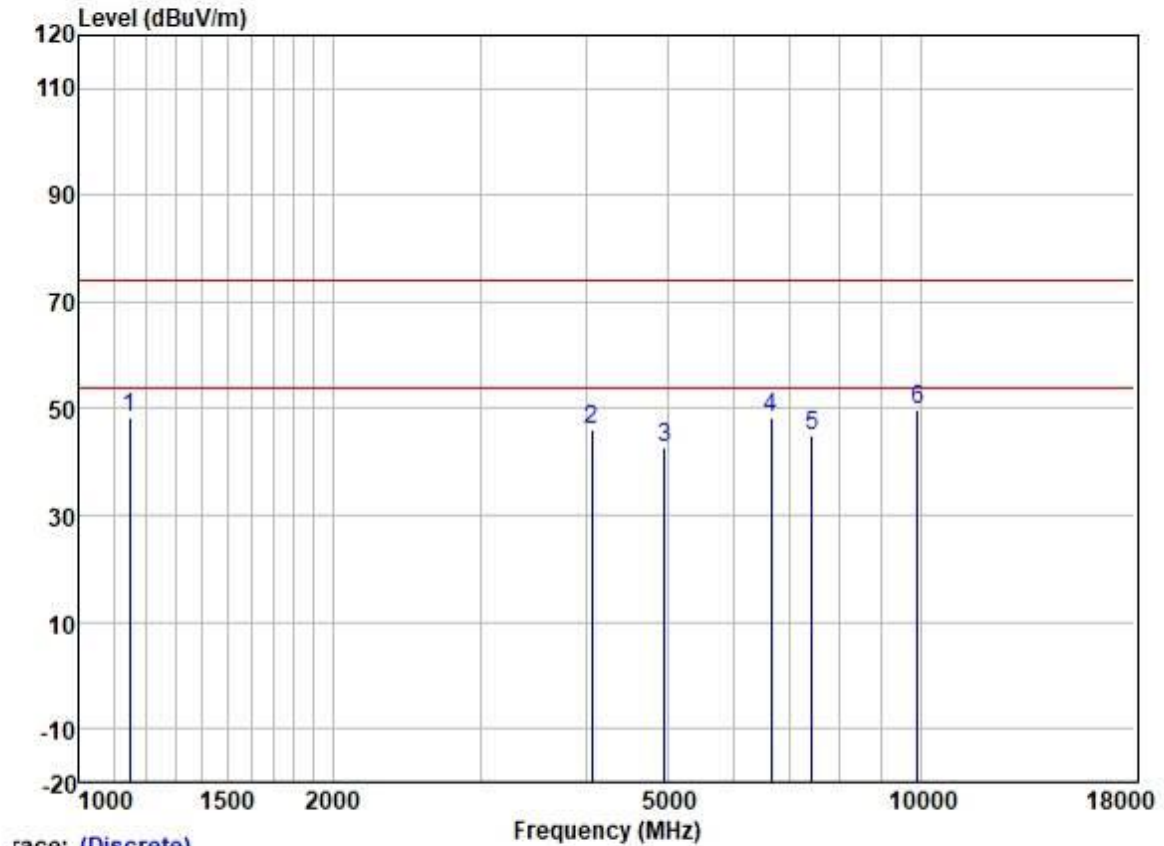

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	55.00	24.49	7.17	38.42	48.24	74.00	-25.76	HORIZONTAL	peak
2	4062.629	48.08	29.88	5.00	36.80	46.16	74.00	-27.84	HORIZONTAL	peak
3	4960.000	42.61	31.65	5.33	36.84	42.75	74.00	-31.25	HORIZONTAL	peak
4	6640.542	44.53	34.24	6.59	37.06	48.30	74.00	-25.70	HORIZONTAL	peak
5	7440.000	39.52	36.27	6.58	37.47	44.90	74.00	-29.10	HORIZONTAL	peak
6	9920.000	40.71	38.65	7.78	37.40	49.74	74.00	-24.26	HORIZONTAL	peak


Test Mode: 02; Polarity: Horizontal; Modulation: GFSK; Channel:Low

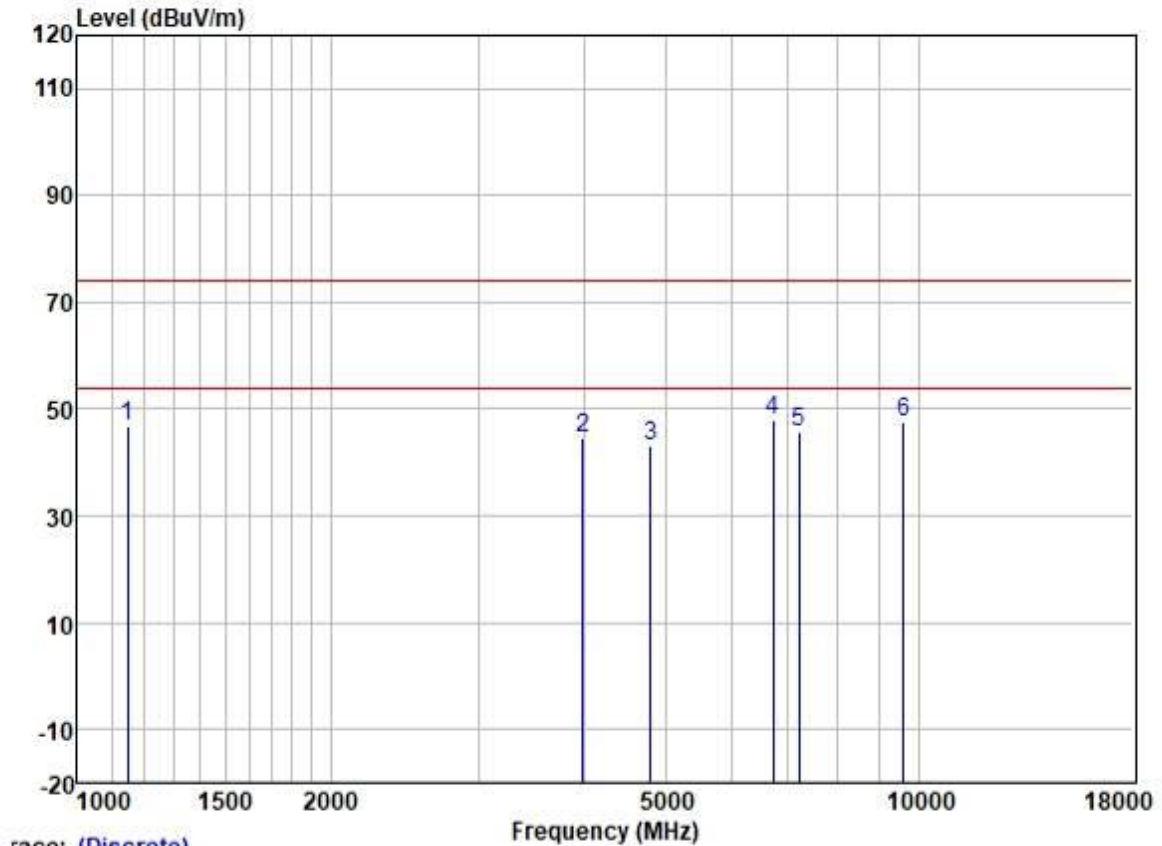

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	53.63	24.49	7.17	38.42	46.87	74.00	-27.13	HORIZONTAL	peak
2	3992.781	46.44	29.79	5.00	36.80	44.43	74.00	-29.57	HORIZONTAL	peak
3	4804.000	43.16	31.42	5.20	36.83	42.95	74.00	-31.05	HORIZONTAL	peak
4	6717.762	43.85	34.44	6.63	37.09	47.83	74.00	-26.17	HORIZONTAL	peak
5	7206.000	40.93	35.54	6.68	37.38	45.77	74.00	-28.23	HORIZONTAL	peak
6	9608.000	39.29	38.37	7.50	37.42	47.74	74.00	-26.26	HORIZONTAL	peak

Test Mode: 02; Polarity: Horizontal; Modulation: GFSK; Channel:middle

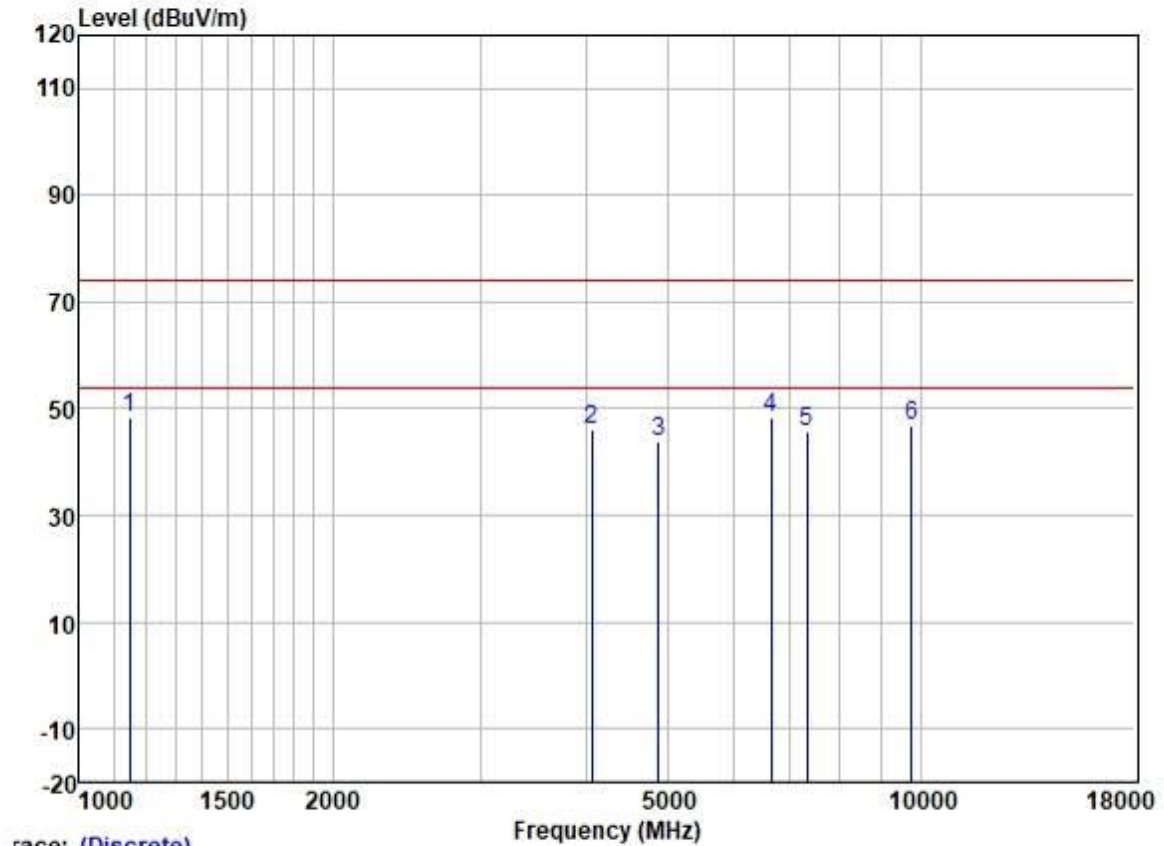

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	55.00	24.49	7.17	38.42	48.24	74.00	-25.76	HORIZONTAL	peak
2	4062.629	48.08	29.88	5.00	36.80	46.16	74.00	-27.84	HORIZONTAL	peak
3	4880.000	43.80	31.54	5.27	36.84	43.77	74.00	-30.23	HORIZONTAL	peak
4	6640.542	44.53	34.24	6.59	37.06	48.30	74.00	-25.70	HORIZONTAL	peak
5	7320.000	40.50	36.00	6.61	37.43	45.68	74.00	-28.32	HORIZONTAL	peak
6	9760.000	38.10	38.50	7.62	37.41	46.81	74.00	-27.19	HORIZONTAL	peak


Test Mode: 02; Polarity: Vertical; Modulation: GFSK; Channel: High

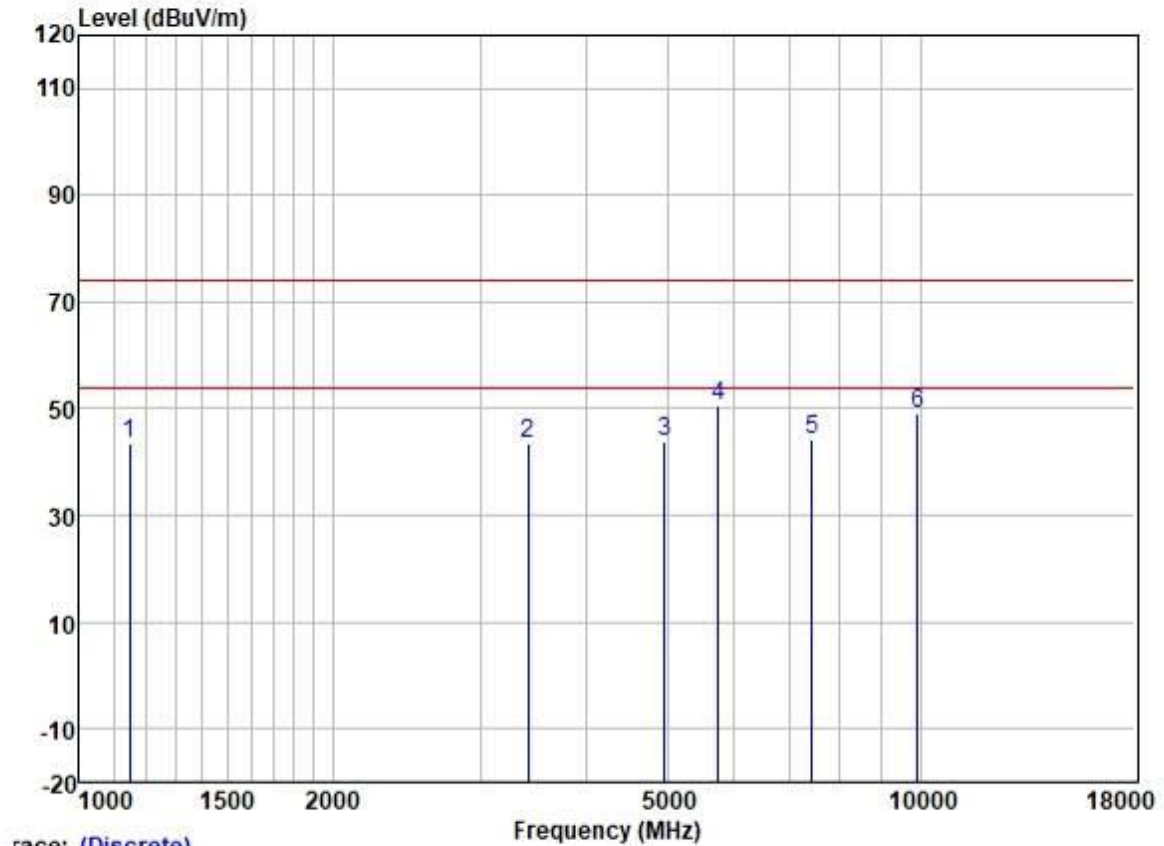

Trace: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	50.05	24.49	7.17	38.42	43.29	74.00	-30.71	VERTICAL	peak
2	3415.787	47.36	28.85	4.28	36.97	43.52	74.00	-30.48	VERTICAL	peak
3	4960.000	43.57	31.65	5.33	36.84	43.71	74.00	-30.29	VERTICAL	peak
4	5746.982	49.57	32.10	5.80	36.89	50.58	74.00	-23.42	VERTICAL	peak
5	7440.000	38.74	36.27	6.58	37.47	44.12	74.00	-29.88	VERTICAL	peak
6	9920.000	40.05	38.65	7.78	37.40	49.08	74.00	-24.92	VERTICAL	peak


Test Mode: 02; Polarity: Vertical; Modulation: GFSK; Channel:Low

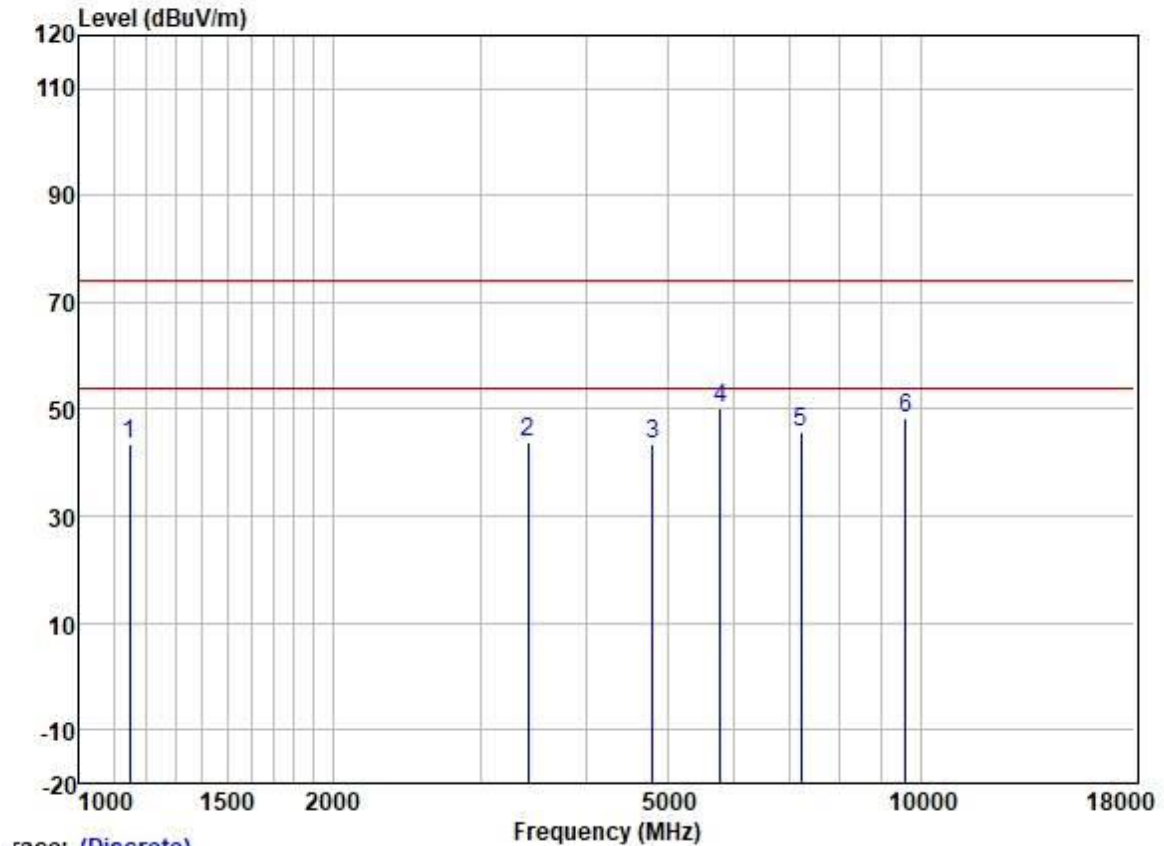

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	50.40	24.49	7.17	38.42	43.64	74.00	-30.36	VERTICAL	peak
2	3415.787	47.81	28.85	4.28	36.97	43.97	74.00	-30.03	VERTICAL	peak
3	4804.000	43.53	31.42	5.20	36.83	43.32	74.00	-30.68	VERTICAL	peak
4	5780.300	49.18	32.16	5.84	36.89	50.29	74.00	-23.71	VERTICAL	peak
5	7206.000	40.87	35.54	6.68	37.38	45.71	74.00	-28.29	VERTICAL	peak
6	9608.000	40.02	38.37	7.50	37.42	48.47	74.00	-25.53	VERTICAL	peak

Test Mode: 02; Polarity: Vertical; Modulation: GFSK; Channel:middle

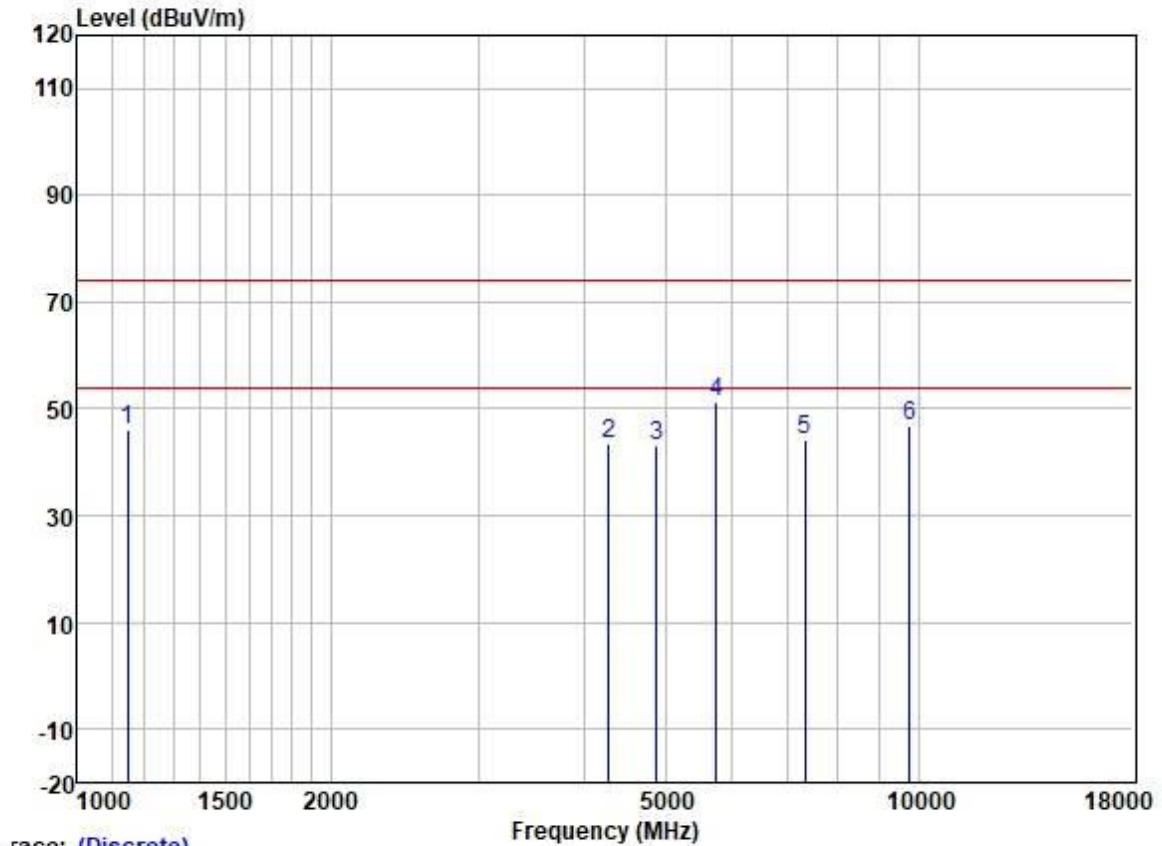


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	52.75	24.49	7.17	38.42	45.99	74.00	-28.01	VERTICAL	peak
2	4279.589	44.84	30.42	4.91	36.81	43.36	74.00	-30.64	VERTICAL	peak
3	4880.000	43.21	31.54	5.27	36.84	43.18	74.00	-30.82	VERTICAL	peak
4	5746.982	50.38	32.10	5.80	36.89	51.39	74.00	-22.61	VERTICAL	peak
5	7320.000	39.22	36.00	6.61	37.43	44.40	74.00	-29.60	VERTICAL	peak
6	9760.000	37.95	38.50	7.62	37.41	46.66	74.00	-27.34	VERTICAL	peak

Test Mode: 03; Polarity: Horizontal; Modulation: GFSK; Channel: High

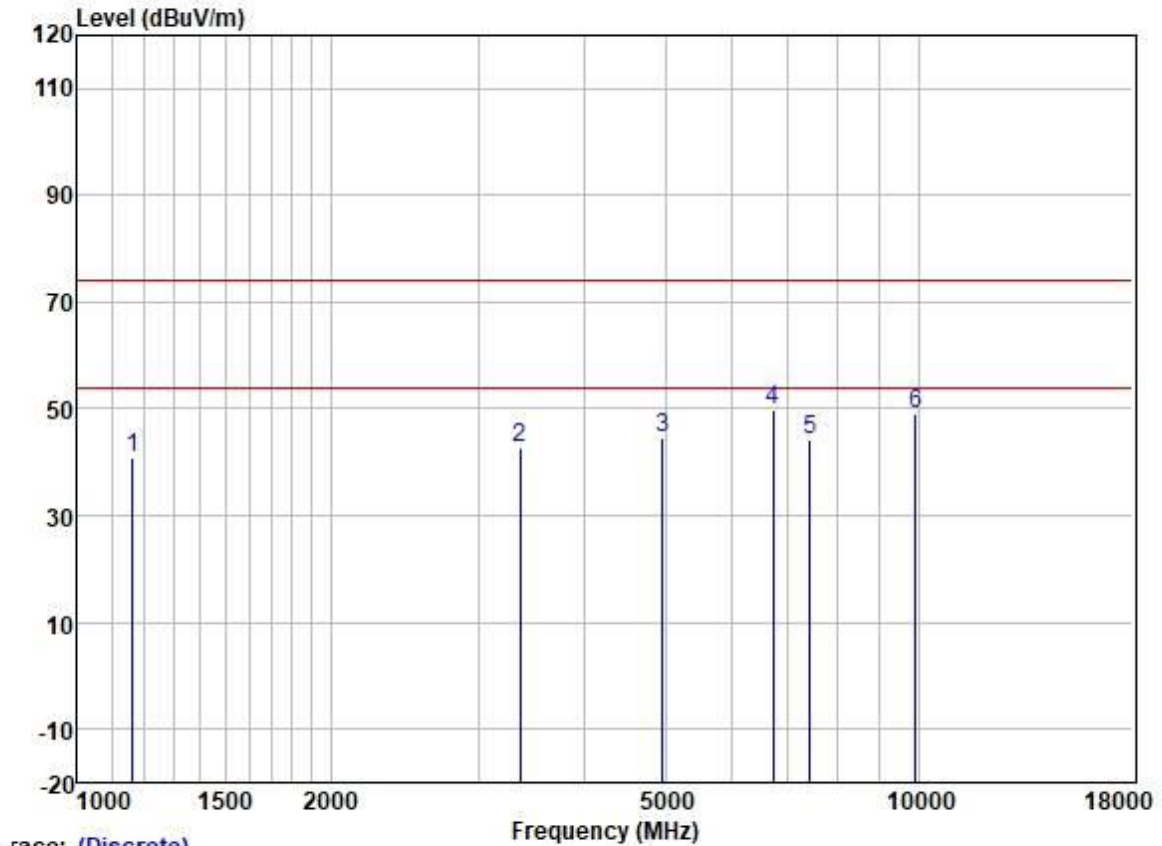

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	47.89	24.53	7.03	38.42	41.03	74.00	-32.97	HORIZONTAL	peak
2	3357.061	46.69	28.81	4.26	37.01	42.75	74.00	-31.25	HORIZONTAL	peak
3	4960.000	44.32	31.65	5.33	36.84	44.46	74.00	-29.54	HORIZONTAL	peak
4	6717.762	45.84	34.44	6.63	37.09	49.82	74.00	-24.18	HORIZONTAL	peak
5	7440.000	38.94	36.27	6.58	37.47	44.32	74.00	-29.68	HORIZONTAL	peak
6	9920.000	39.91	38.65	7.78	37.40	48.94	74.00	-25.06	HORIZONTAL	peak


Test Mode: 03; Polarity: Horizontal; Modulation: GFSK; Channel:Low

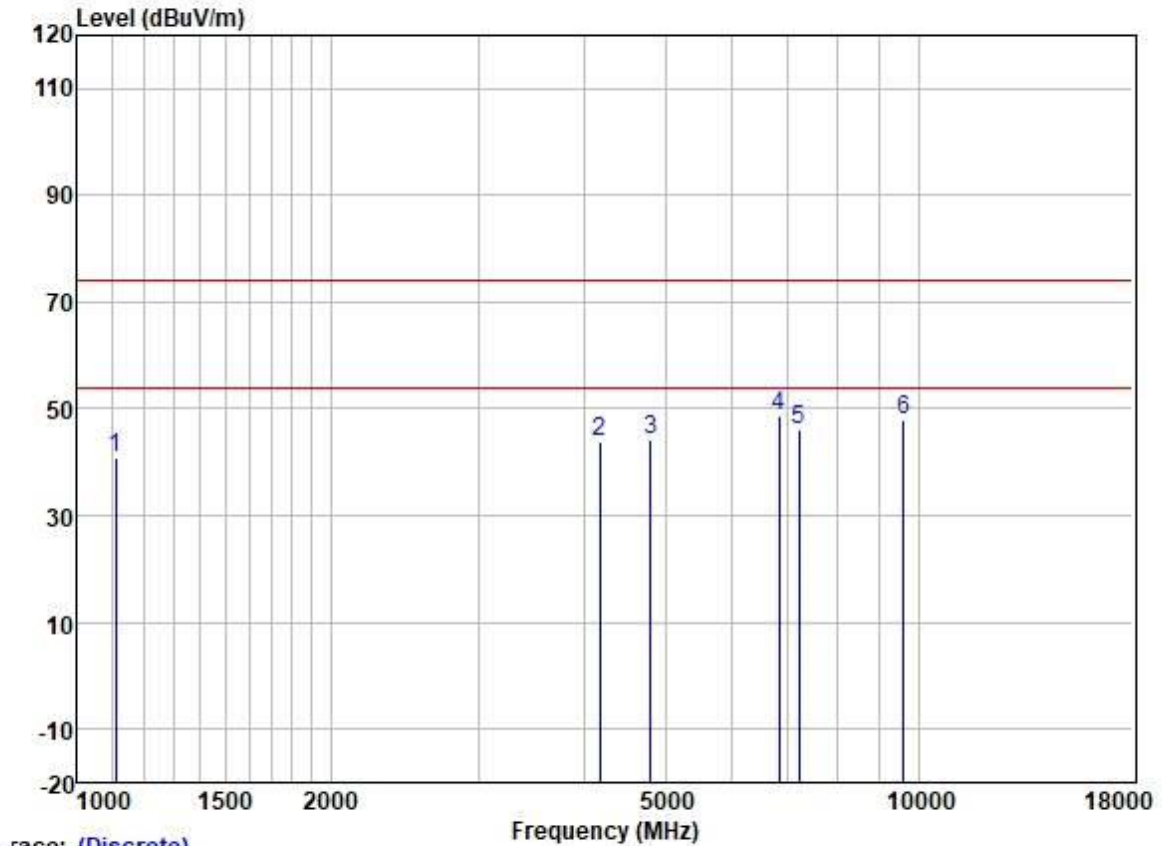

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1109.660	47.39	24.39	7.51	38.45	40.84	74.00	-33.16	HORIZONTAL	peak
2	4181.768	45.53	30.12	4.96	36.80	43.81	74.00	-30.19	HORIZONTAL	peak
3	4804.000	44.45	31.42	5.20	36.83	44.24	74.00	-29.76	HORIZONTAL	peak
4	6835.278	44.37	34.74	6.70	37.13	48.68	74.00	-25.32	HORIZONTAL	peak
5	7206.000	41.13	35.54	6.68	37.38	45.97	74.00	-28.03	HORIZONTAL	peak
6	9608.000	39.57	38.37	7.50	37.42	48.02	74.00	-25.98	HORIZONTAL	peak


Test Mode: 03; Polarity: Horizontal; Modulation: GFSK; Channel:middle

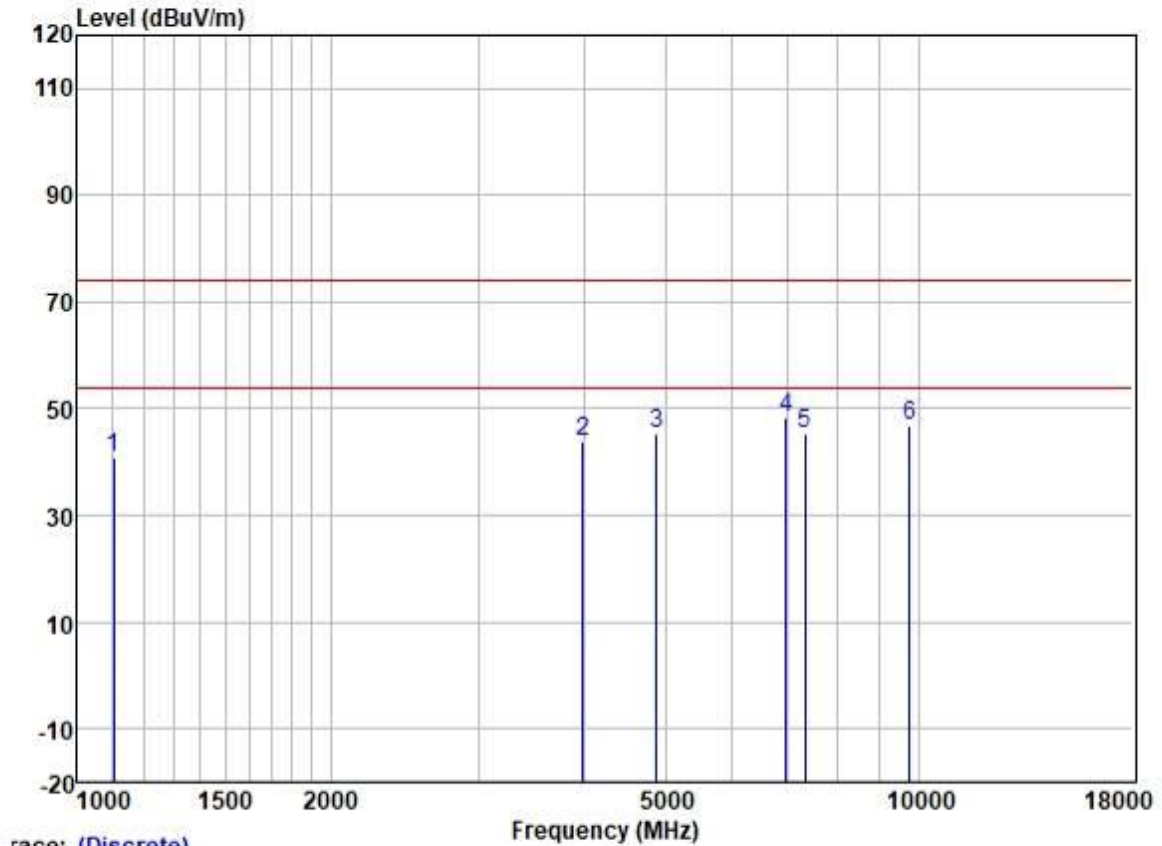

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1103.264	47.50	24.37	7.56	38.45	40.98	74.00	-33.02	HORIZONTAL	peak
2	3992.781	45.96	29.79	5.00	36.80	43.95	74.00	-30.05	HORIZONTAL	peak
3	4880.000	45.27	31.54	5.27	36.84	45.24	74.00	-28.76	HORIZONTAL	peak
4	6954.852	44.02	34.95	6.74	37.21	48.50	74.00	-25.50	HORIZONTAL	peak
5	7320.000	39.98	36.00	6.61	37.43	45.16	74.00	-28.84	HORIZONTAL	peak
6	9760.000	38.04	38.50	7.62	37.41	46.75	74.00	-27.25	HORIZONTAL	peak


Test Mode: 03; Polarity: Vertical; Modulation: GFSK; Channel: High

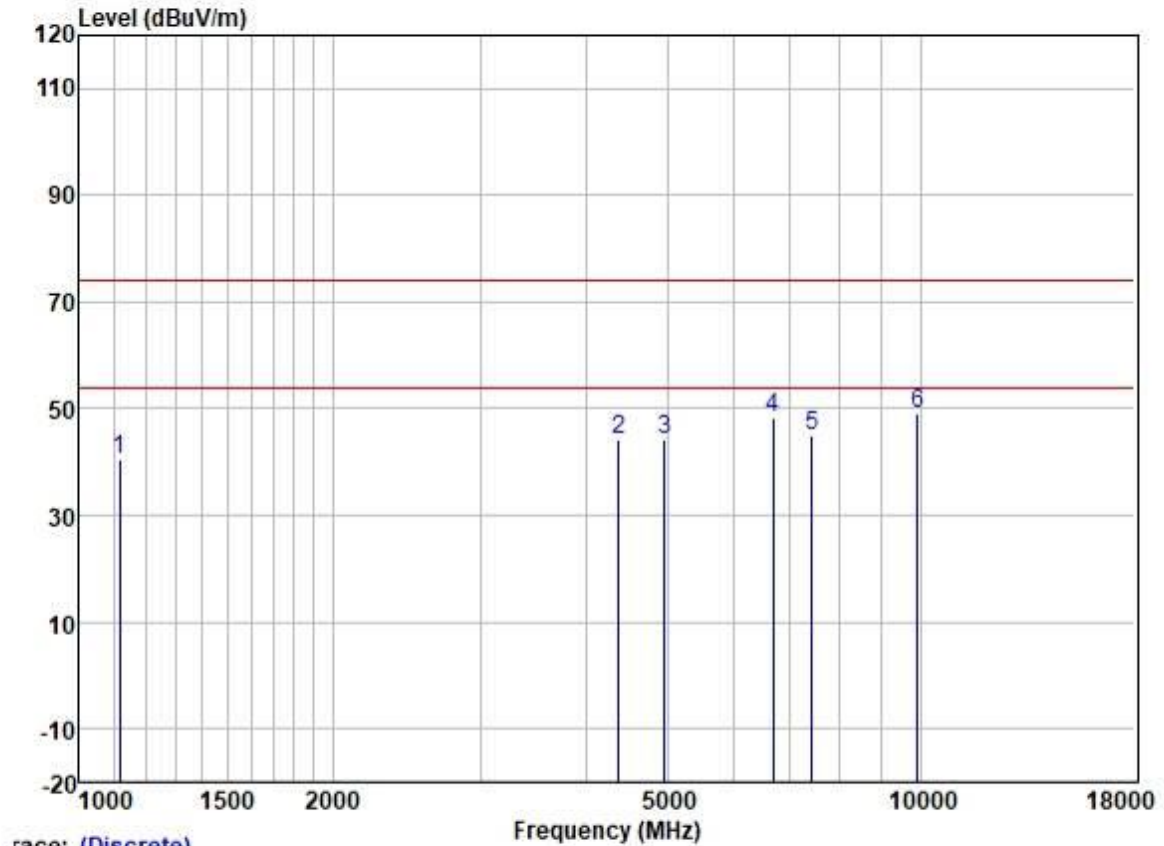

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1116.093	47.08	24.40	7.46	38.43	40.51	74.00	-33.49	VERTICAL peak
2	4379.699	45.51	30.64	4.88	36.81	44.22	74.00	-29.78	VERTICAL peak
3	4960.000	44.05	31.65	5.33	36.84	44.19	74.00	-29.81	VERTICAL peak
4	6679.040	44.35	34.33	6.61	37.07	48.22	74.00	-25.78	VERTICAL peak
5	7440.000	39.65	36.27	6.58	37.47	45.03	74.00	-28.97	VERTICAL peak
6	9920.000	39.98	38.65	7.78	37.40	49.01	74.00	-24.99	VERTICAL peak

Test Mode: 03; Polarity: Vertical; Modulation: GFSK; Channel:Low

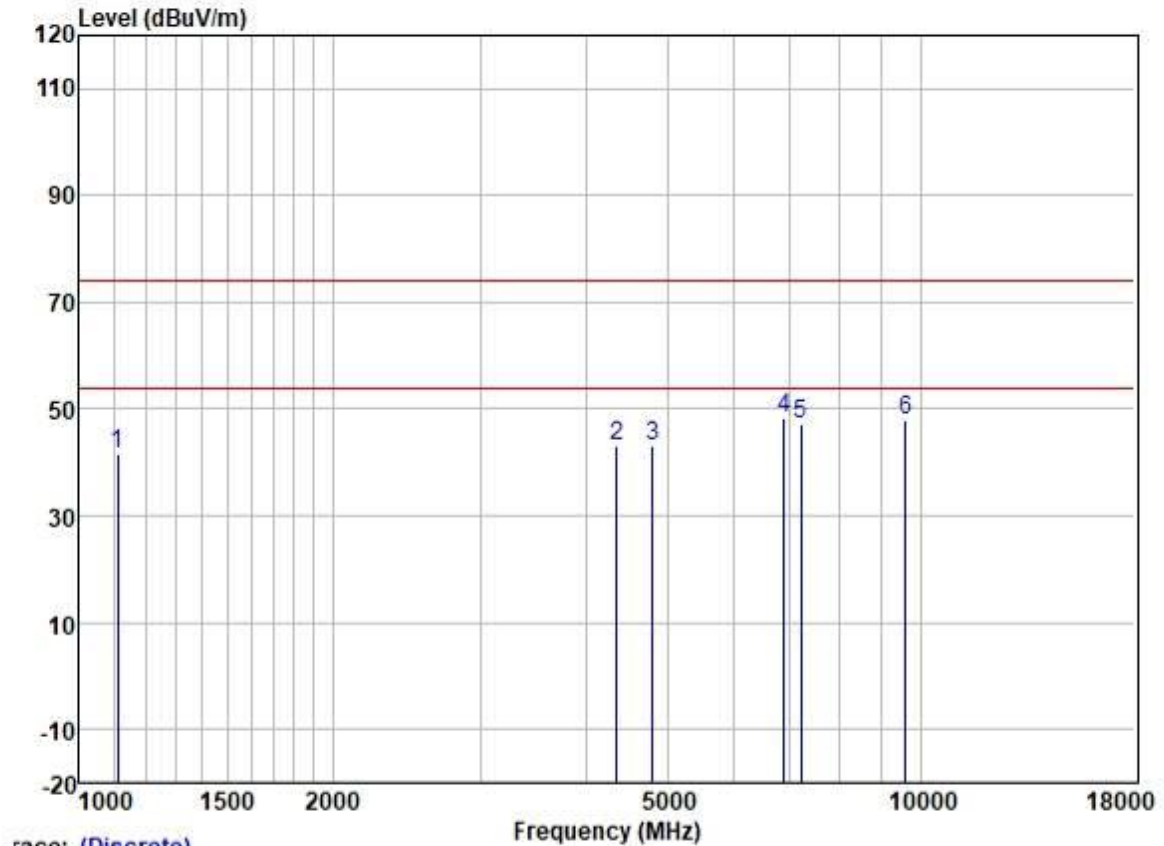

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1109.660	48.20	24.39	7.51	38.45	41.65	74.00	-32.35	VERTICAL	peak
2	4354.454	44.51	30.59	4.88	36.81	43.17	74.00	-30.83	VERTICAL	peak
3	4804.000	43.30	31.42	5.20	36.83	43.09	74.00	-30.91	VERTICAL	peak
4	6874.906	43.95	34.82	6.71	37.16	48.32	74.00	-25.68	VERTICAL	peak
5	7206.000	42.42	35.54	6.68	37.38	47.26	74.00	-26.74	VERTICAL	peak
6	9608.000	39.54	38.37	7.50	37.42	47.99	74.00	-26.01	VERTICAL	peak

Test Mode: 03; Polarity: Vertical; Modulation: GFSK; Channel:middle

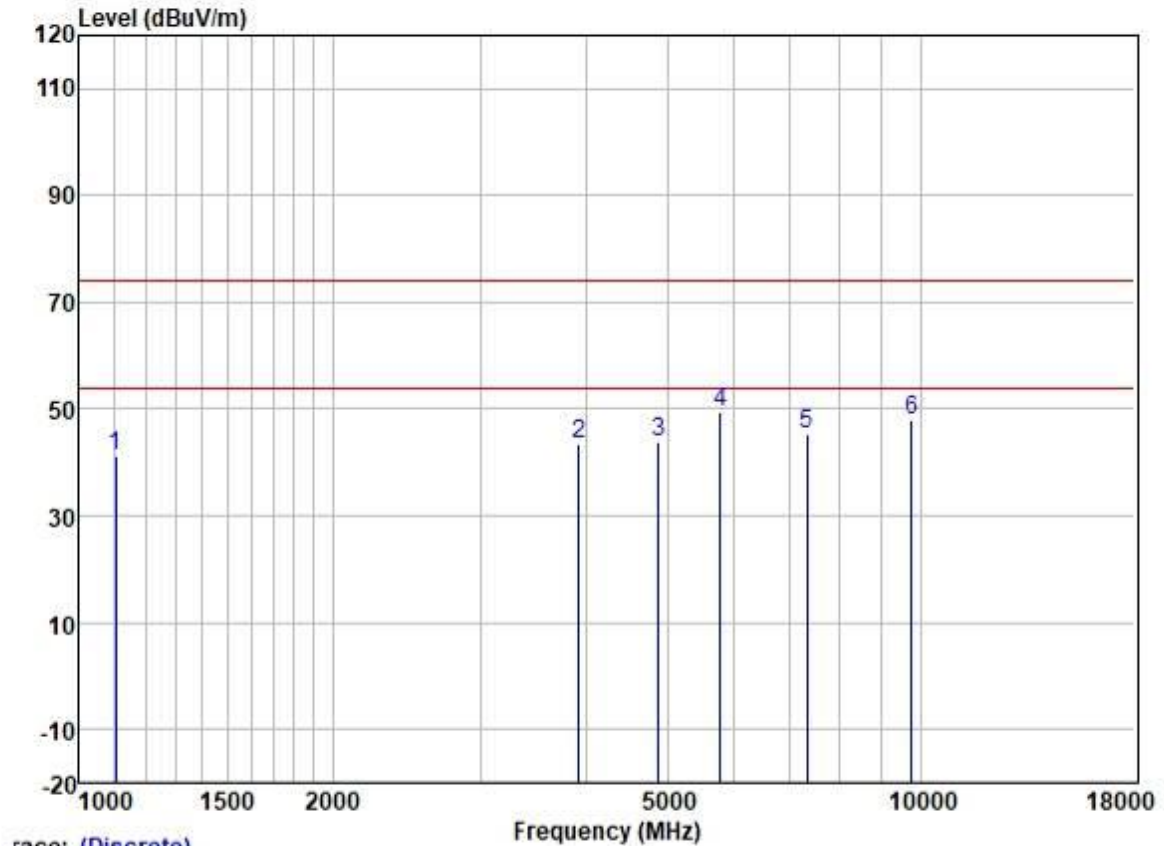

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1103.264	47.64	24.37	7.56	38.45	41.12	74.00	-32.88	VERTICAL	peak
2	3924.135	45.54	29.72	4.94	36.82	43.38	74.00	-30.62	VERTICAL	peak
3	4880.000	43.79	31.54	5.27	36.84	43.76	74.00	-30.24	VERTICAL	peak
4	5780.300	48.44	32.16	5.84	36.89	49.55	74.00	-24.45	VERTICAL	peak
5	7320.000	39.98	36.00	6.61	37.43	45.16	74.00	-28.84	VERTICAL	peak
6	9760.000	39.22	38.50	7.62	37.41	47.93	74.00	-26.07	VERTICAL	peak

8 Emission Test Results

8.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

8.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C


Humidity: 57.2 % RH

Atmospheric Pressure: 1022 mbar

8.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For Body).
Final test	03	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation(For PAD).

8.1.3 Test Setup Diagram

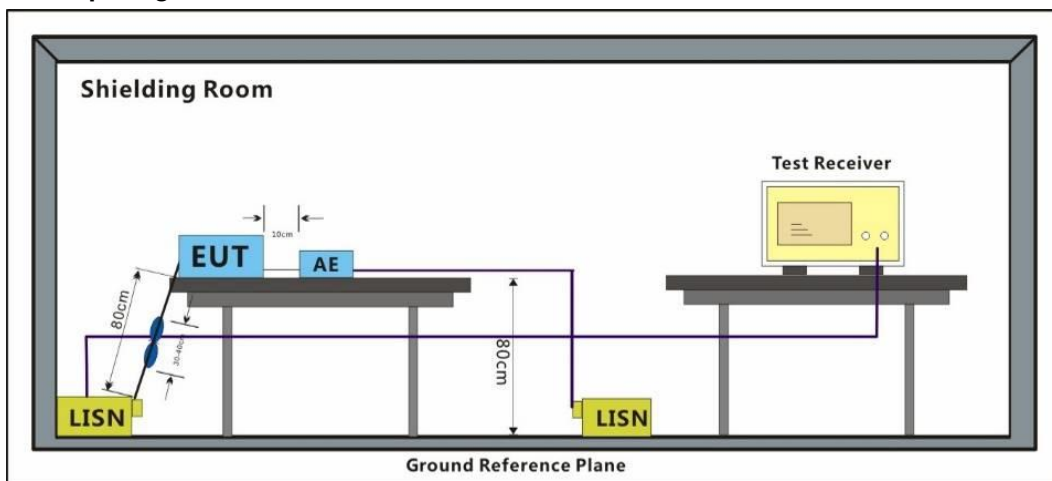


8.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


Test Mode: 02; Line: Live line

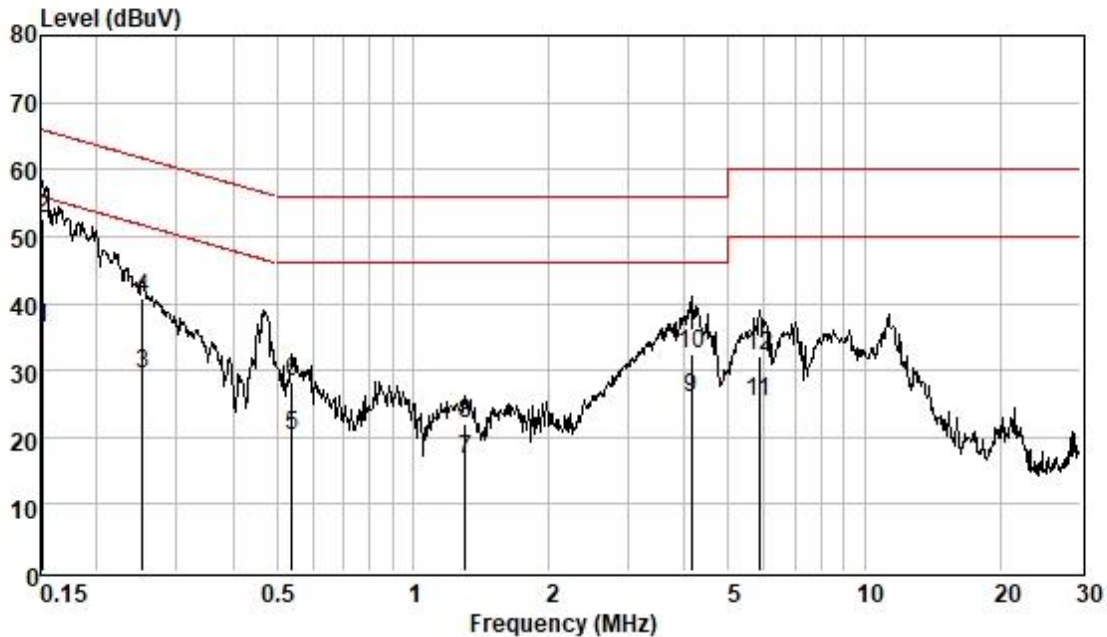

Pol : LINE
Mode :
Model :

Freque MHz	Read Level dBUV	Cable Loss dB	LISN Factor dB	Measured Level dBUV	Limit Line dBUV	Over Limit dB	Remark
0.15	26.65	0.06	9.54	36.25	55.91	-19.66	Average
0.15	43.17	0.06	9.54	52.77	65.91	-13.14	QP
0.25	19.71	0.06	9.57	29.34	51.69	-22.35	Average
0.25	31.25	0.06	9.57	40.88	61.69	-20.81	QP
0.54	10.66	0.07	9.59	20.32	46.00	-25.68	Average
0.54	18.52	0.07	9.59	28.18	56.00	-27.82	QP
1.31	6.88	0.09	9.60	16.57	46.00	-29.43	Average
1.31	12.25	0.09	9.60	21.94	56.00	-34.06	QP
4.14	16.03	0.17	9.64	25.84	46.00	-20.16	Average
4.14	22.60	0.17	9.64	32.41	56.00	-23.59	QP
5.84	15.32	0.19	9.70	25.21	50.00	-24.79	Average
5.84	22.28	0.19	9.70	32.17	60.00	-27.83	QP


Test Mode: 02; Line: Neutral Line

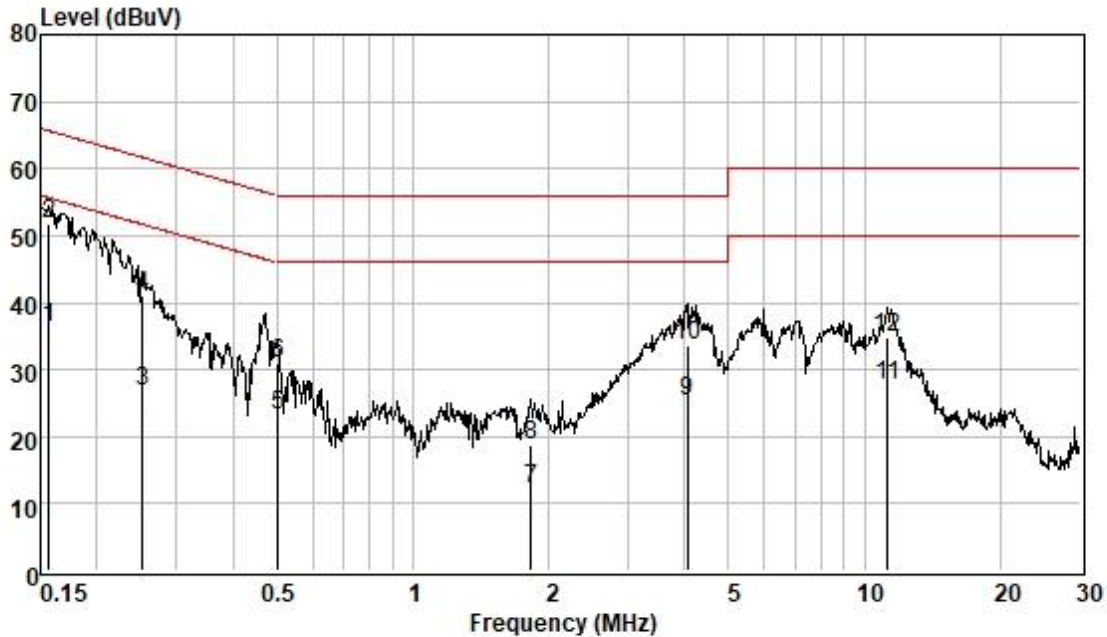

Pol : NEUTRAL
Mode :
Model :

Frequency MHz	Read Level dBUV	Cable Loss dB	LISN Factor dB	Measured Level dBUV	Limit Line dBUV	Over Limit dB	Remark
0.16	26.68	0.06	9.53	36.27	55.65	-19.38	Average
0.16	42.30	0.06	9.53	51.89	65.65	-13.76	QP
0.25	17.26	0.06	9.56	26.88	51.69	-24.81	Average
0.25	31.28	0.06	9.56	40.90	61.69	-20.79	QP
0.50	13.44	0.07	9.58	23.09	46.00	-22.91	Average
0.50	21.32	0.07	9.58	30.97	56.00	-25.03	QP
1.83	2.60	0.11	9.59	12.30	46.00	-33.70	Average
1.83	9.03	0.11	9.59	18.73	56.00	-37.27	QP
4.05	15.63	0.17	9.63	25.43	46.00	-20.57	Average
4.05	23.87	0.17	9.63	33.67	56.00	-22.33	QP
11.26	17.64	0.25	9.80	27.69	50.00	-22.31	Average
11.26	24.74	0.25	9.80	34.79	60.00	-25.21	QP


Test Mode: 03; Line: Live line

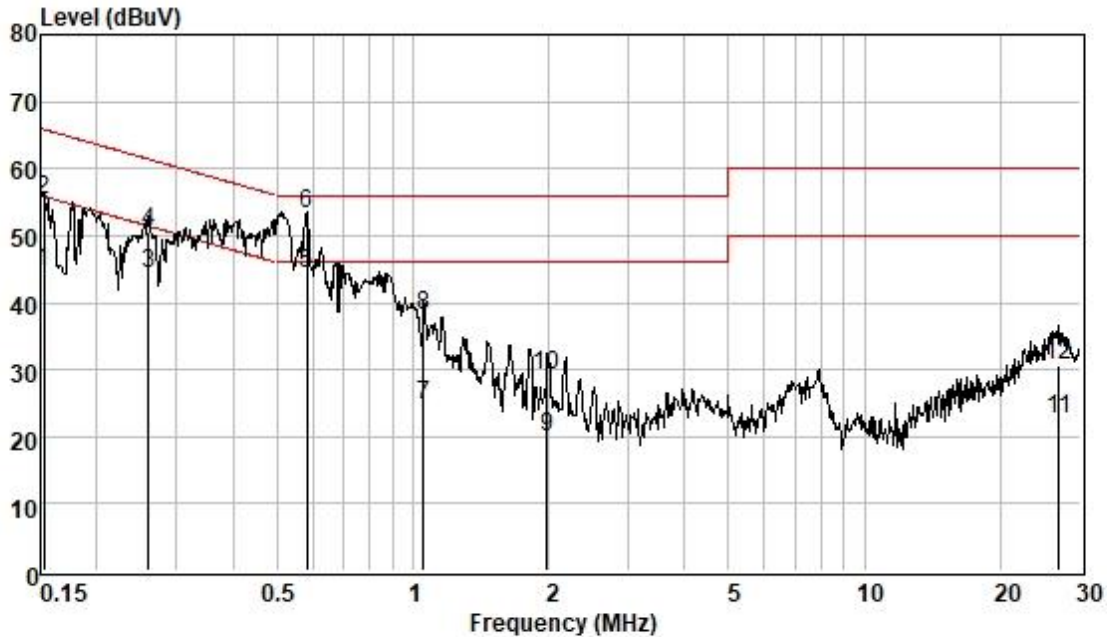

Pol : LINE
Mode :
Model :

Frequency MHz	Read Level dBUV	Cable Loss dB	LISN Factor dB	Measured Level dBUV	Limit Line dBUV	Over Limit dB	Remark
0.15	35.01	0.06	9.54	44.61	55.87	-11.26	Average
0.15	45.64	0.06	9.54	55.24	65.87	-10.63	QP
0.26	34.79	0.06	9.57	44.42	51.42	-7.00	Average
0.26	40.87	0.06	9.57	50.50	61.42	-10.92	QP
0.58	34.65	0.07	9.59	44.31	46.00	-1.69	Average
0.58	43.62	0.07	9.59	53.28	56.00	-2.72	QP
1.05	15.13	0.07	9.60	24.80	46.00	-21.20	Average
1.05	28.29	0.07	9.60	37.96	56.00	-18.04	QP
1.98	10.35	0.12	9.60	20.07	46.00	-25.93	Average
1.98	19.49	0.12	9.60	29.21	56.00	-26.79	QP
26.84	12.50	0.42	9.77	22.69	50.00	-27.31	Average
26.84	20.54	0.42	9.77	30.73	60.00	-29.27	QP

Test Mode: 03; Line: Neutral Line

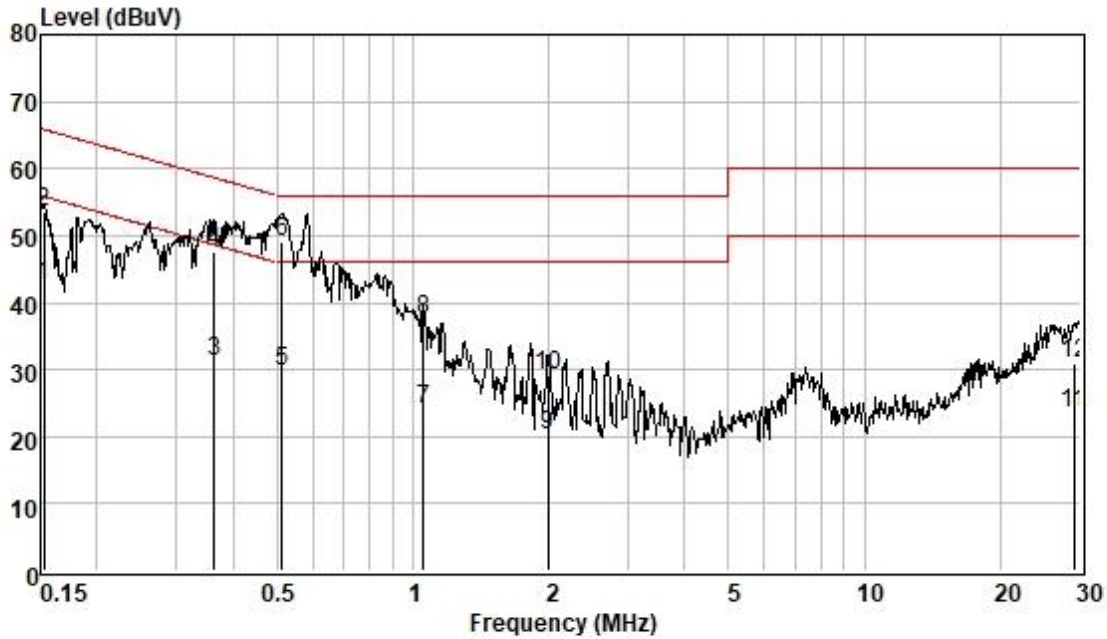

Pol : NEUTRAL
Mode :
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.15	32.83	0.06	9.53	42.42	55.87	-13.45	Average
0.15	44.03	0.06	9.53	53.62	65.87	-12.25	QP
0.36	21.71	0.06	9.57	31.34	48.65	-17.31	Average
0.36	37.90	0.06	9.57	47.53	58.65	-11.12	QP
0.51	20.19	0.07	9.58	29.84	46.00	-16.16	Average
0.51	39.42	0.07	9.58	49.07	56.00	-6.93	QP
1.05	14.52	0.07	9.59	24.18	46.00	-21.82	Average
1.05	27.96	0.07	9.59	37.62	56.00	-18.38	QP
1.99	10.41	0.12	9.59	20.12	46.00	-25.88	Average
1.99	19.37	0.12	9.59	29.08	56.00	-26.92	QP
29.06	13.12	0.44	9.91	23.47	50.00	-26.53	Average
29.06	20.71	0.44	9.91	31.06	60.00	-28.94	QP

9 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR211102137102 to GZCR211102137105

10 EUT Constructional Details (EUT Photos)

Refer to Appendix - External and Internal Photos for GZCR2111021371HS

11 Appendix

11.1 For PAD


1. Bandwidth

1.1 6dB BW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.703	≥ 0.5	Pass
		2440	1	0.697	≥ 0.5	Pass
		2480	1	0.696	≥ 0.5	Pass


1.1.2 Test Graph

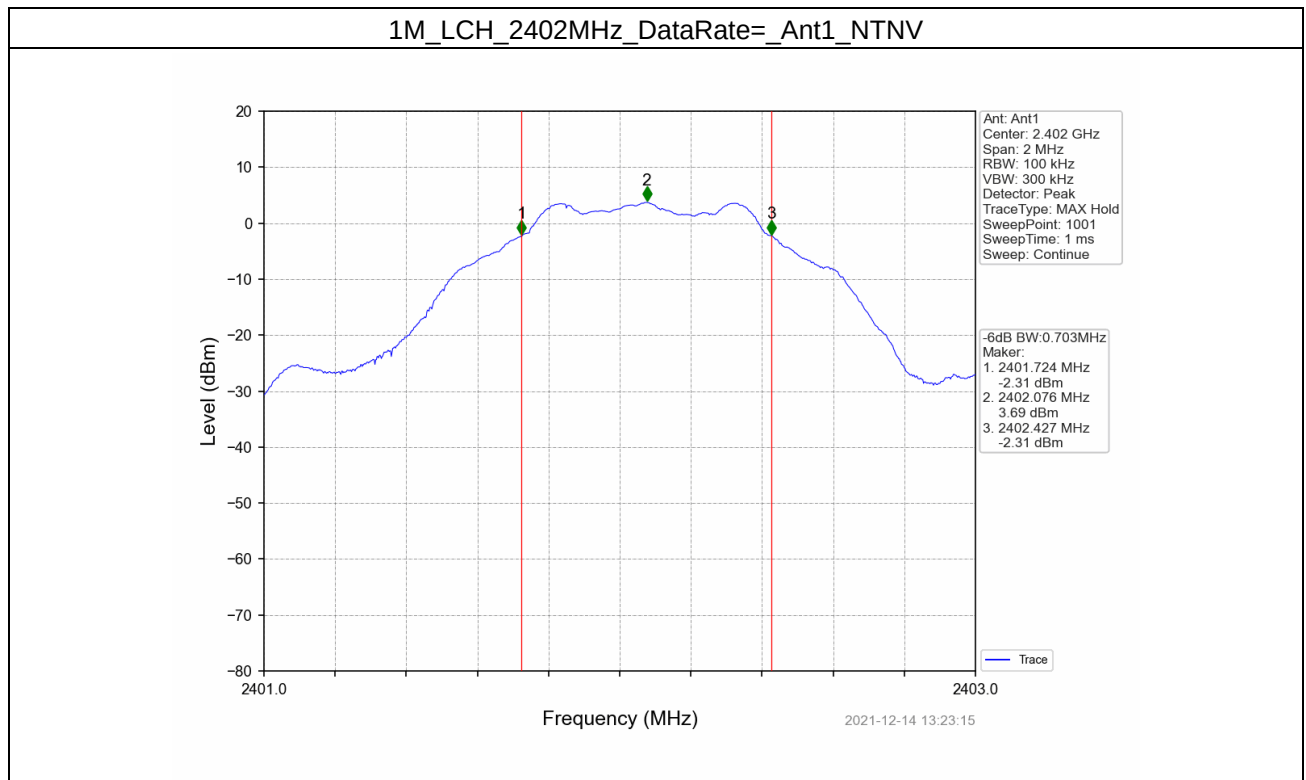

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

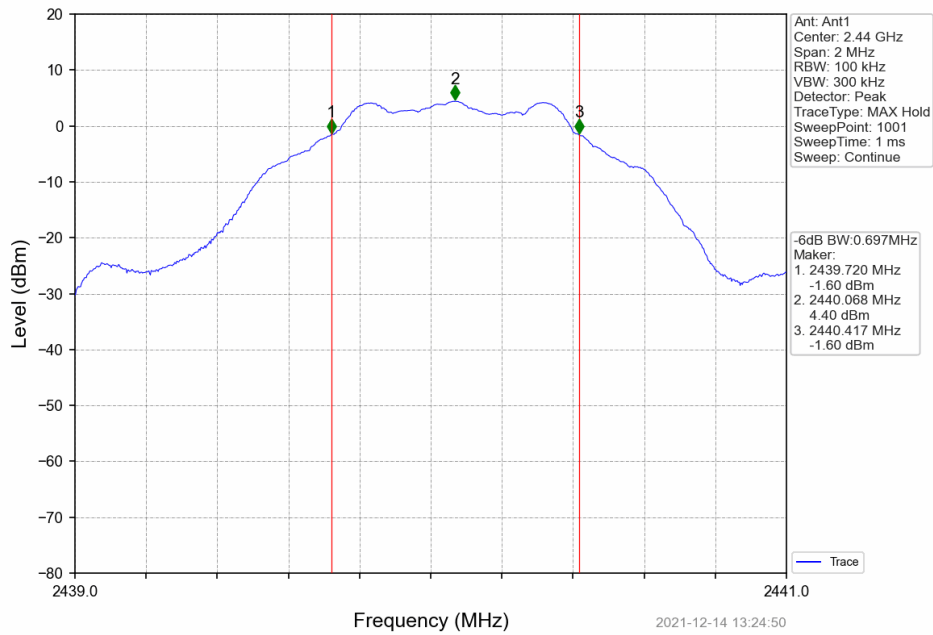

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

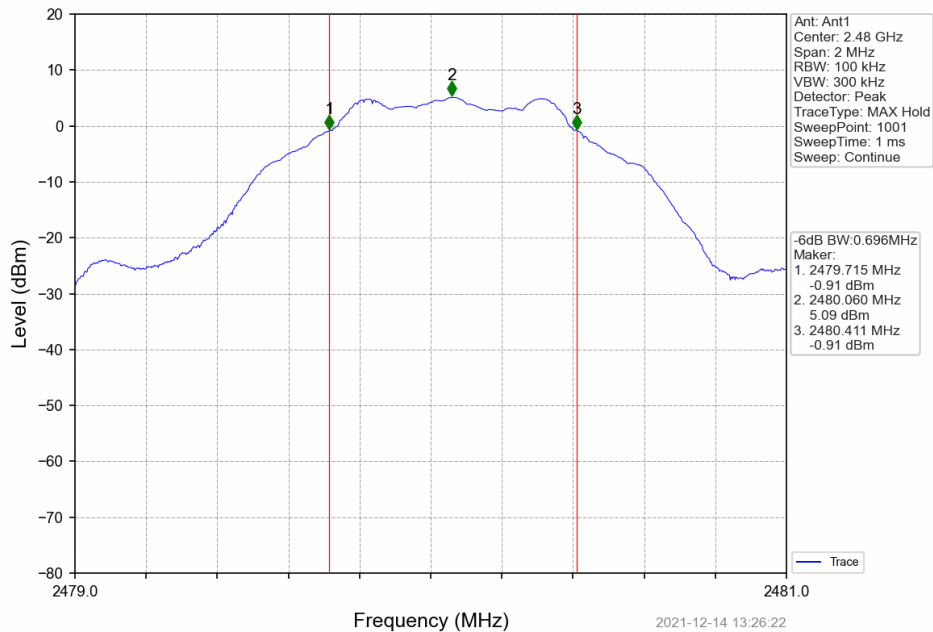

2. Maximum Conducted Output Power


2.1 Power

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			Ant1	Limit	
1M	SISO	2402	4.92	<=30	Pass
		2440	5.48	<=30	Pass
		2480	6.12	<=30	Pass

Note1: Antenna Gain: Ant1: 3.00dBi;


2.1.2 Test Graph

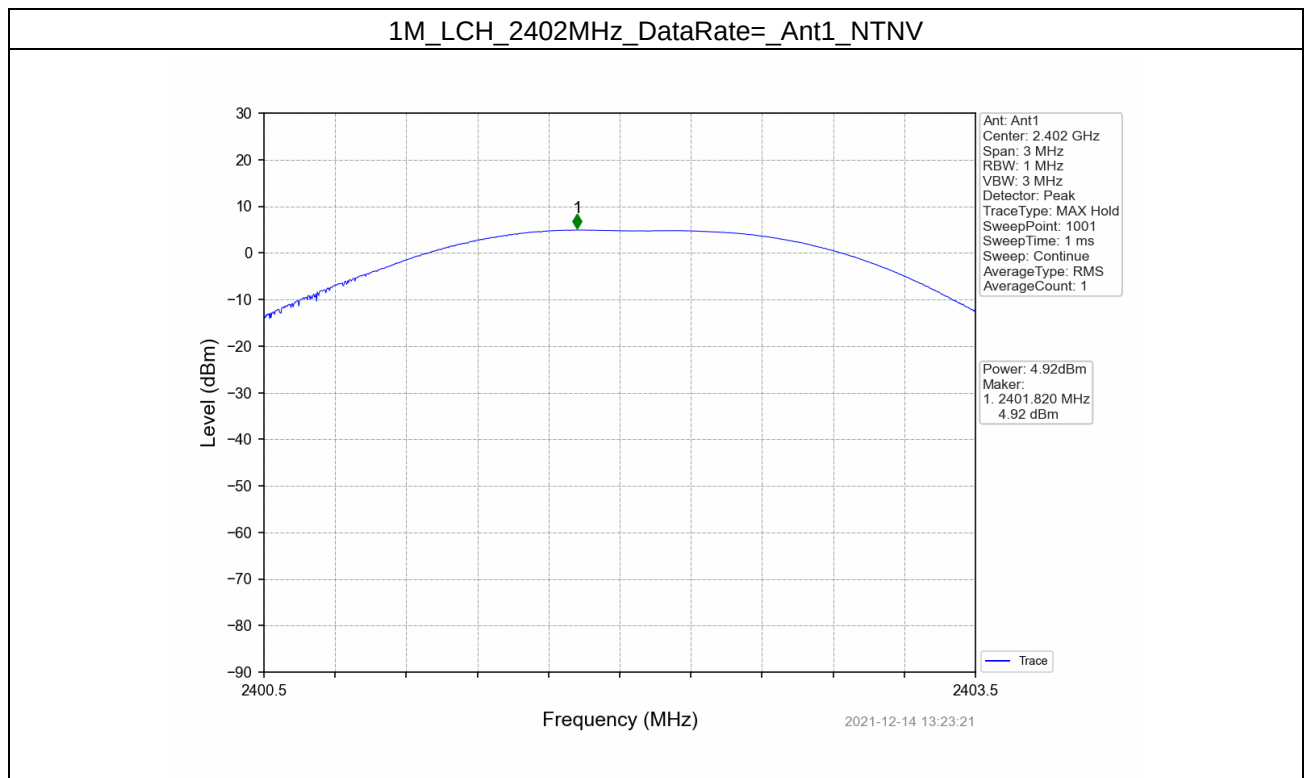

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

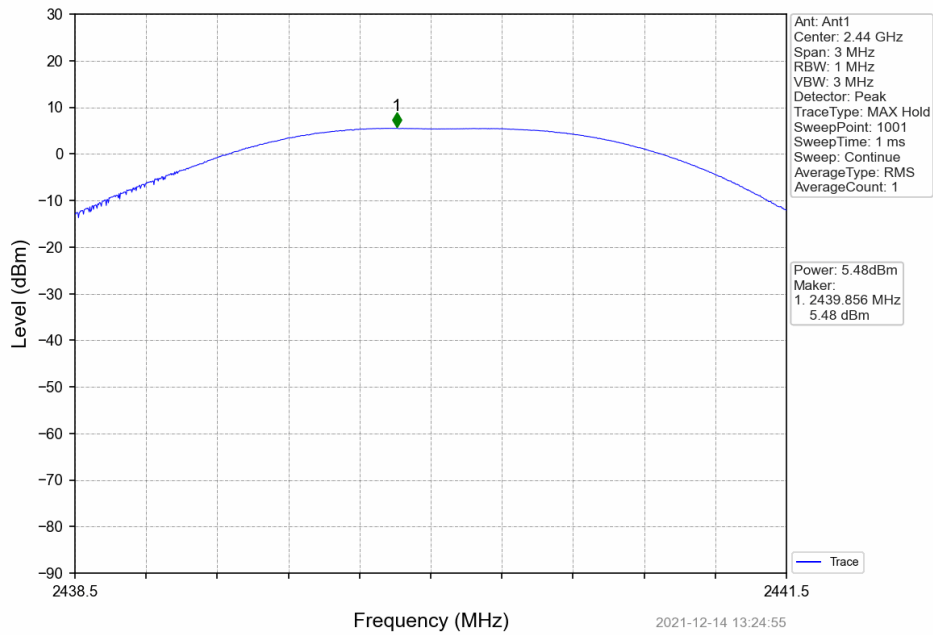

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

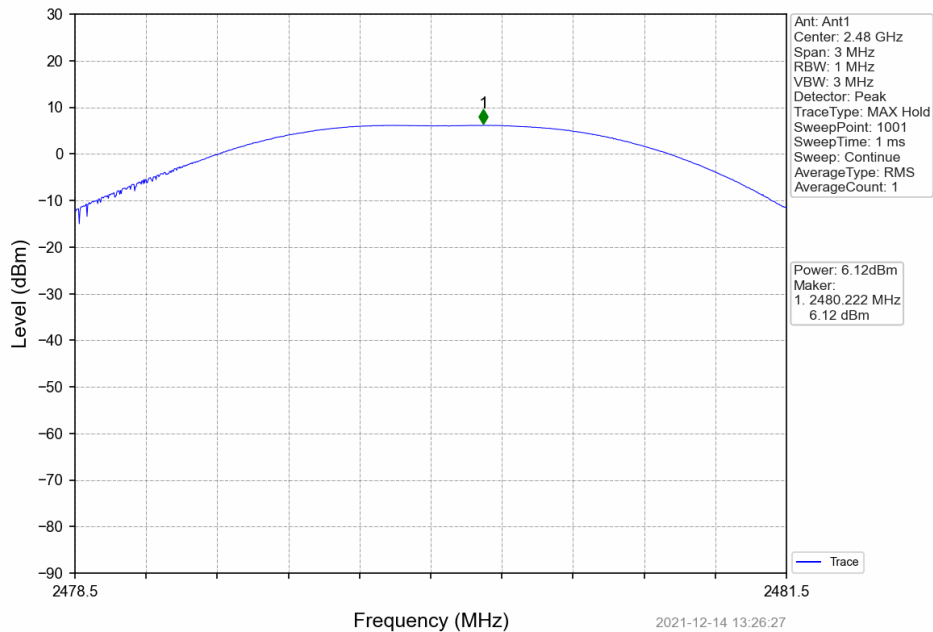

3. Maximum Power Spectral Density


3.1 PSD

3.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			Ant1	Limit	
1M	SISO	2402	-10.78	<=8	Pass
		2440	-10.24	<=8	Pass
		2480	-9.40	<=8	Pass

Note1: Antenna Gain: Ant1: 3.00dBi;


3.1.2 Test Graph

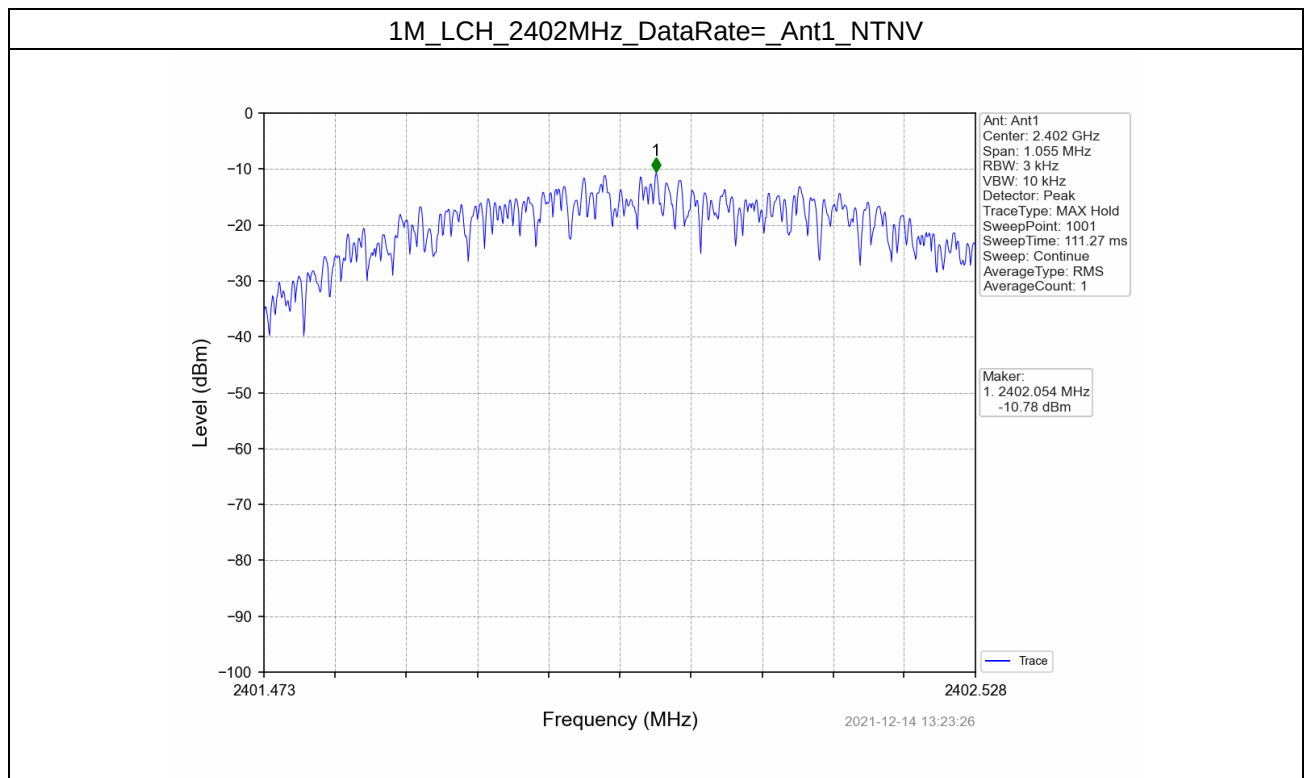

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

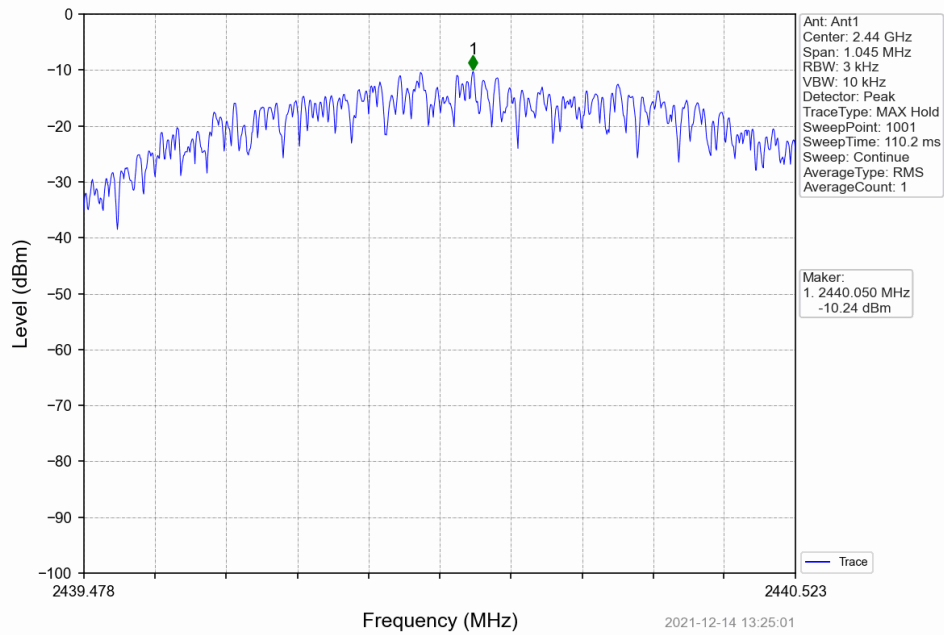

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

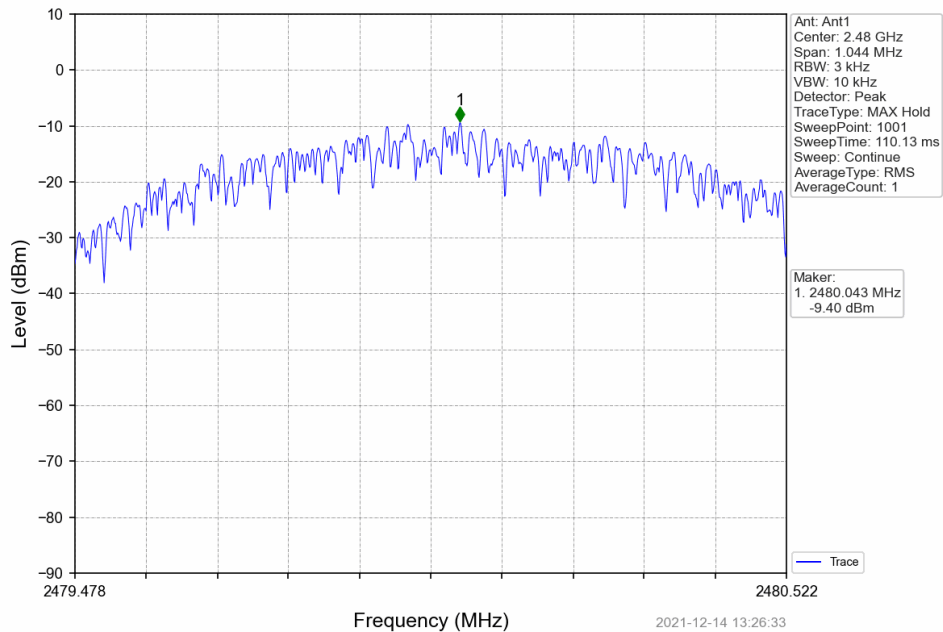

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Ref


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)
1M	SISO	2402	1	3.71
		2440	1	4.40
		2480	1	5.20


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.


4.1.2 Test Graph

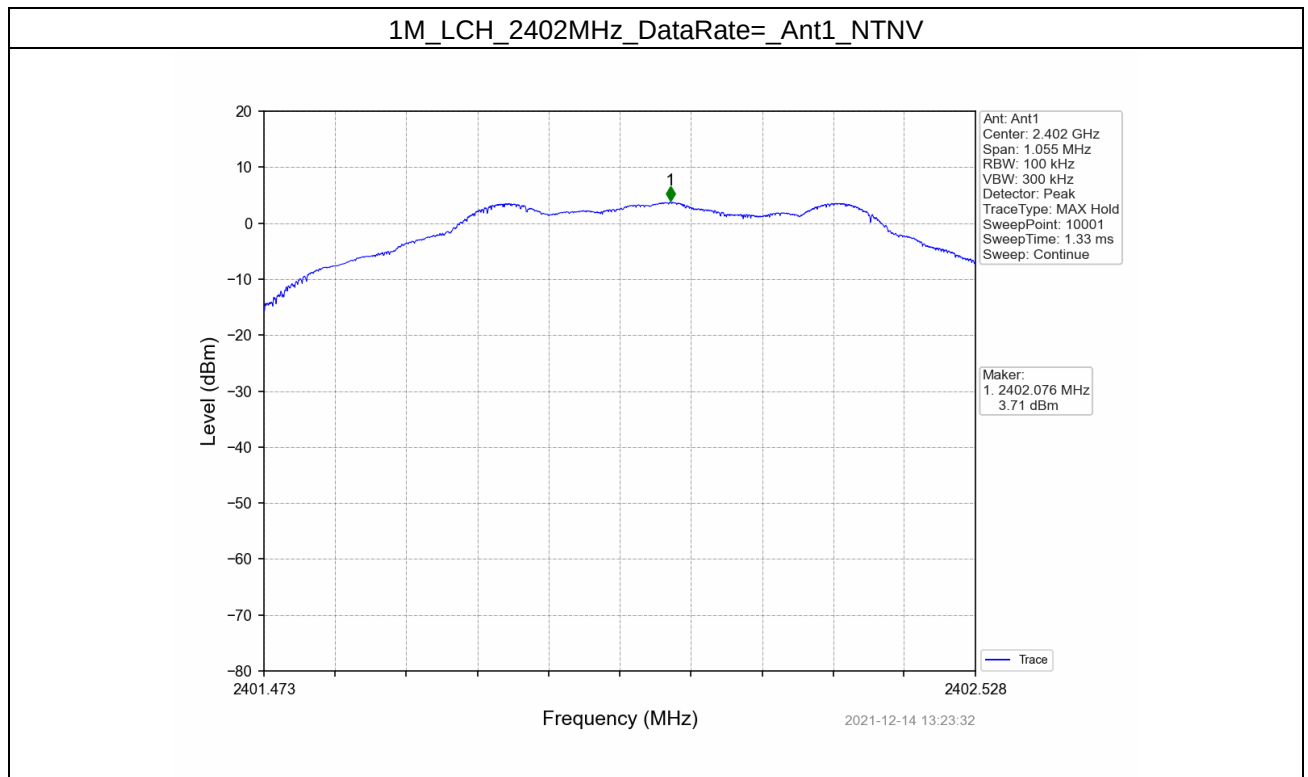

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

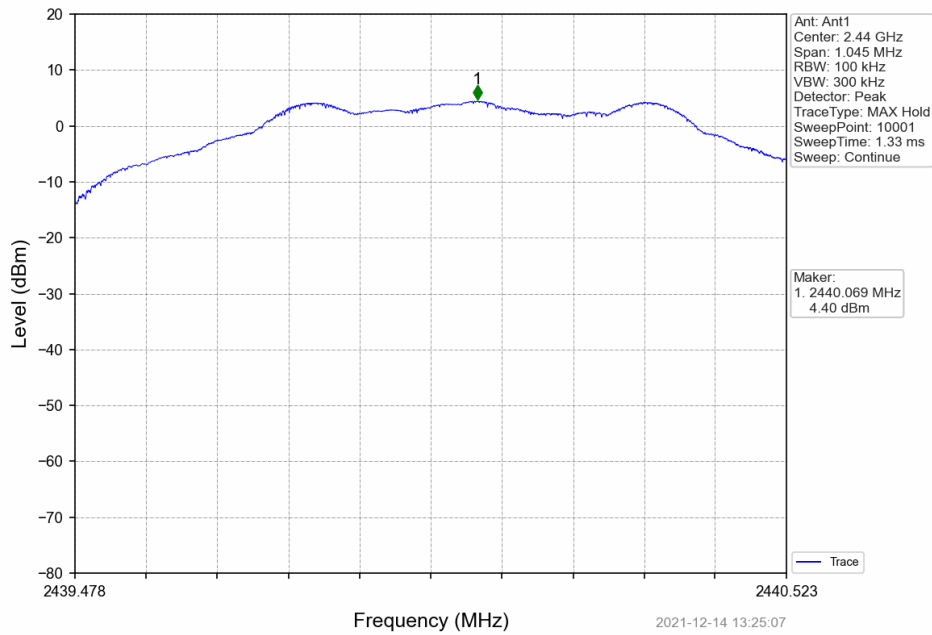

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

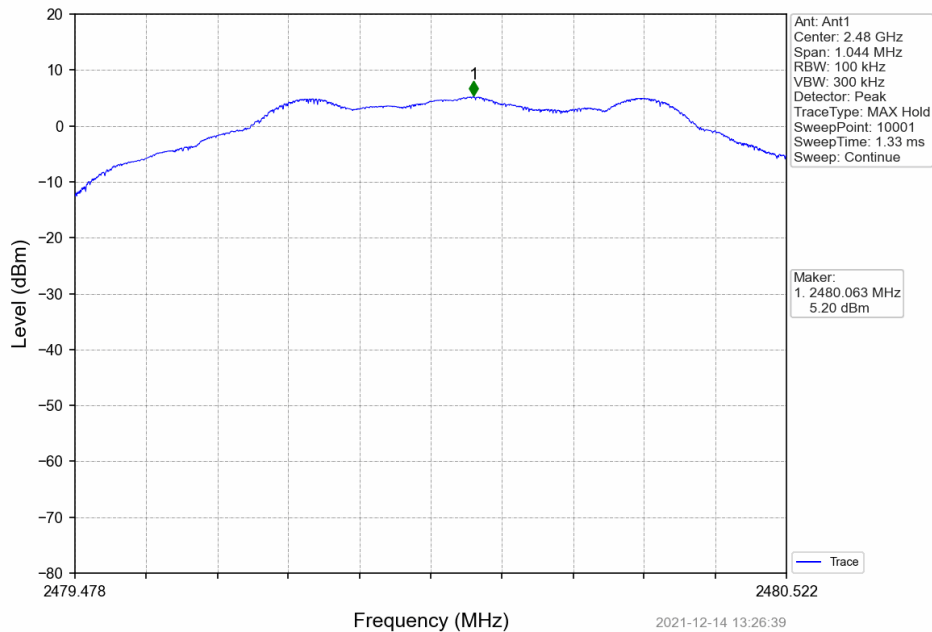

4.2 CSE


4.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	5.20	-14.80	Pass
		2440	1	5.20	-14.80	Pass
		2480	1	5.20	-14.80	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.


4.2.2 Test Graph

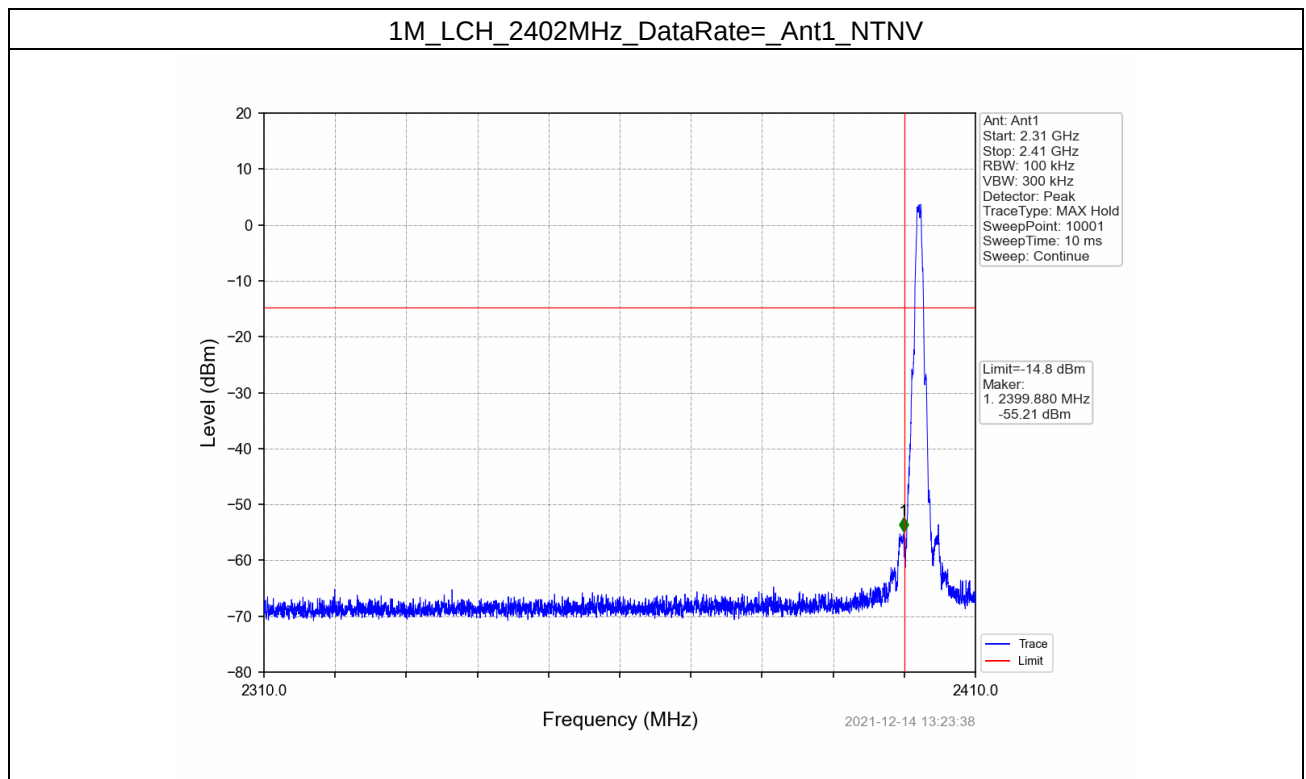


1M_LCH_2402MHz_DataRate=_Ant1_NTNV

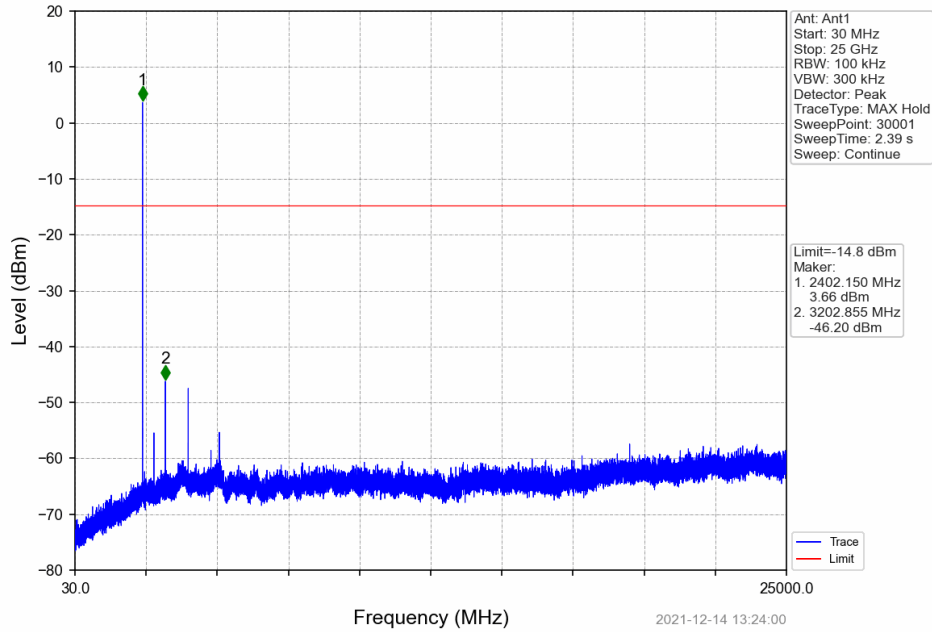


1M_MCH_2440MHz_DataRate=_Ant1_NTNV

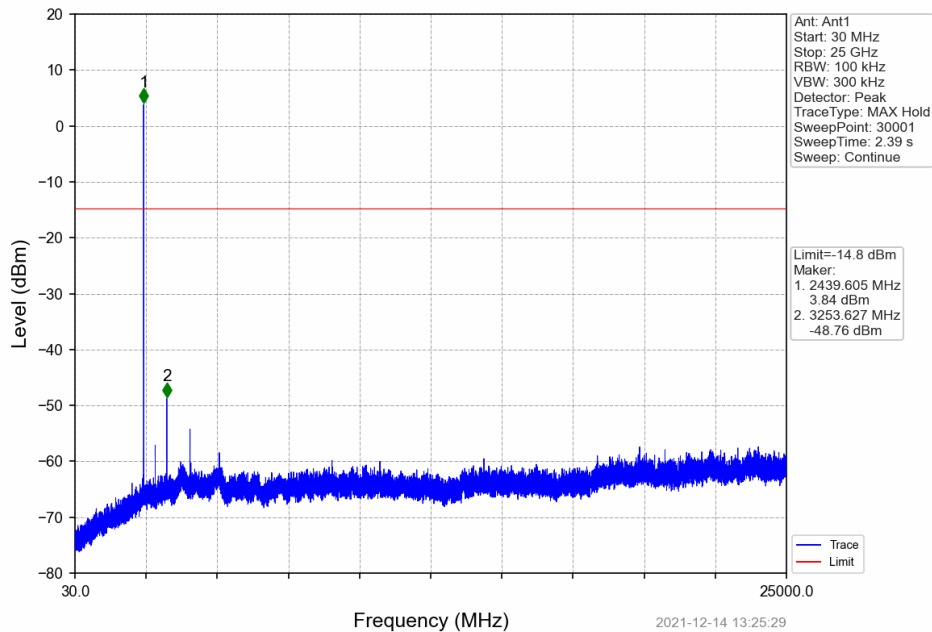

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

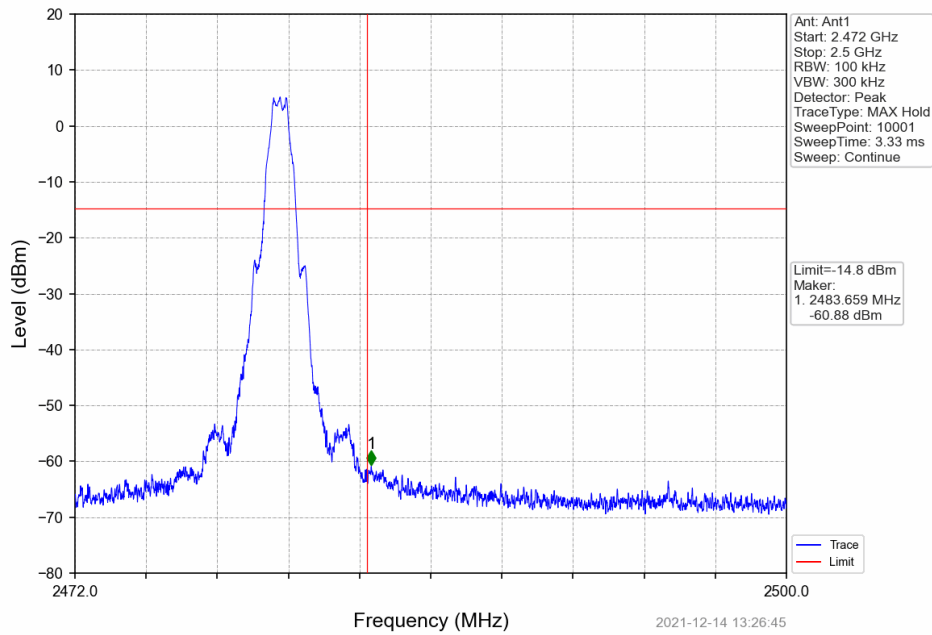

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

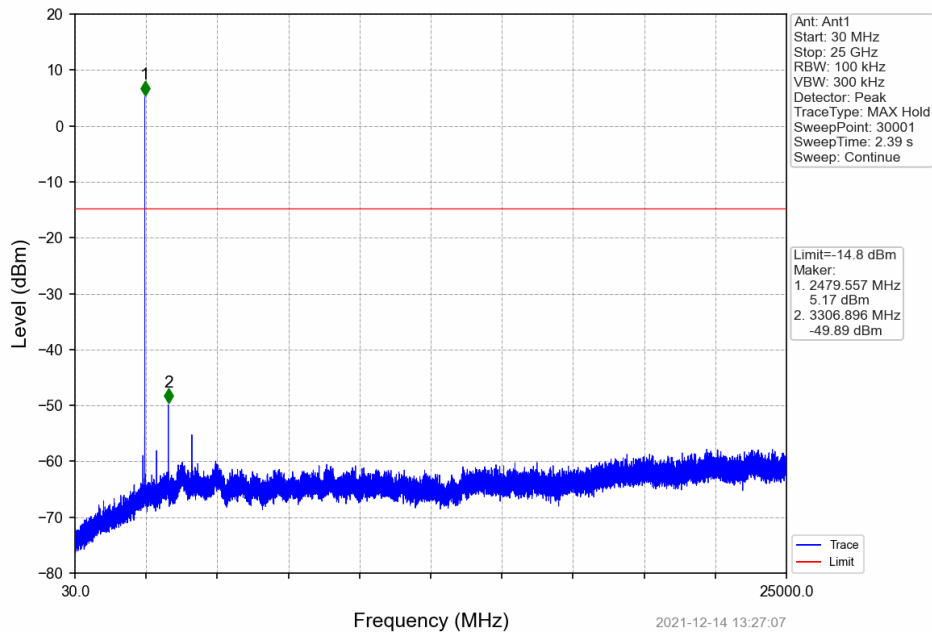

11.2 For Body


1. Bandwidth

1.1 6dB BW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.691	≥ 0.5	Pass
		2440	1	0.689	≥ 0.5	Pass
		2480	1	0.698	≥ 0.5	Pass


1.1.2 Test Graph

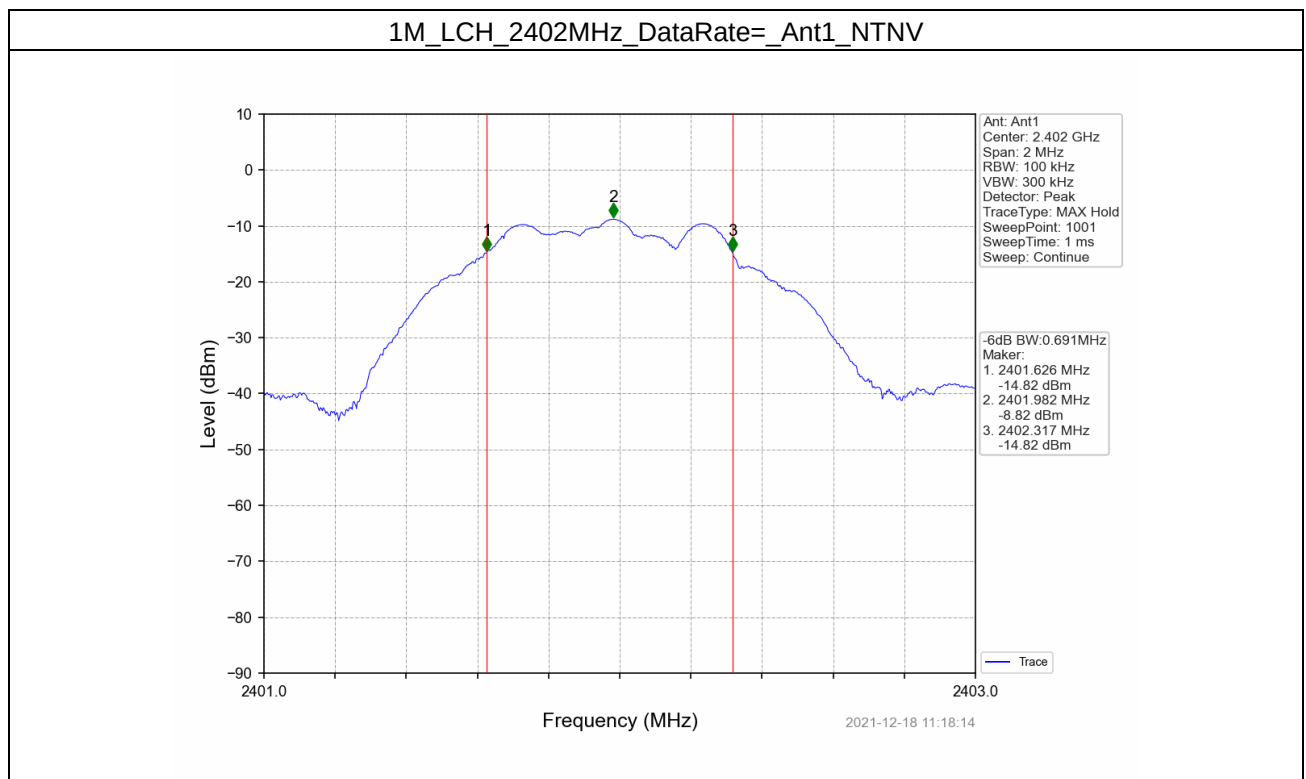

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

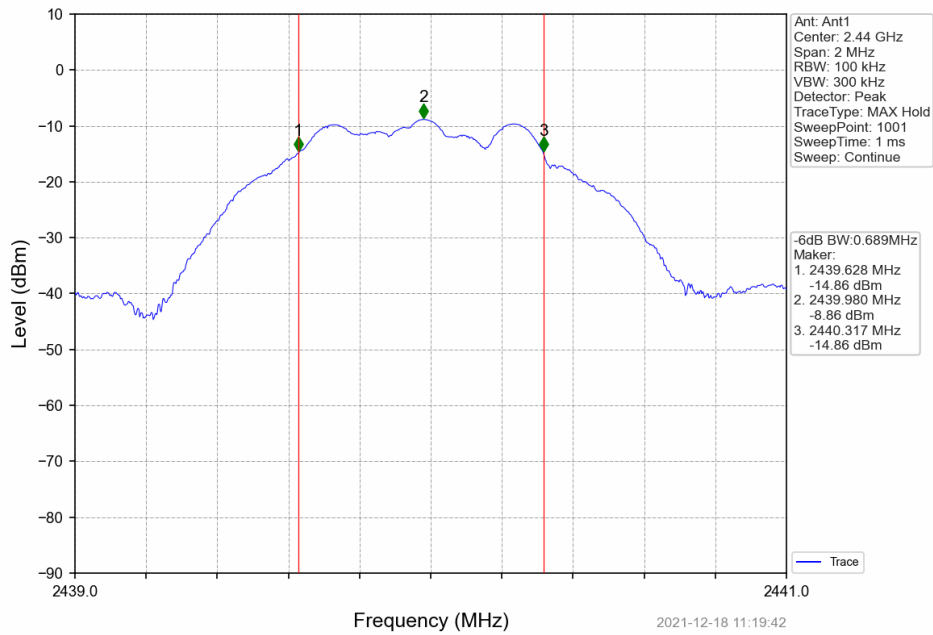

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

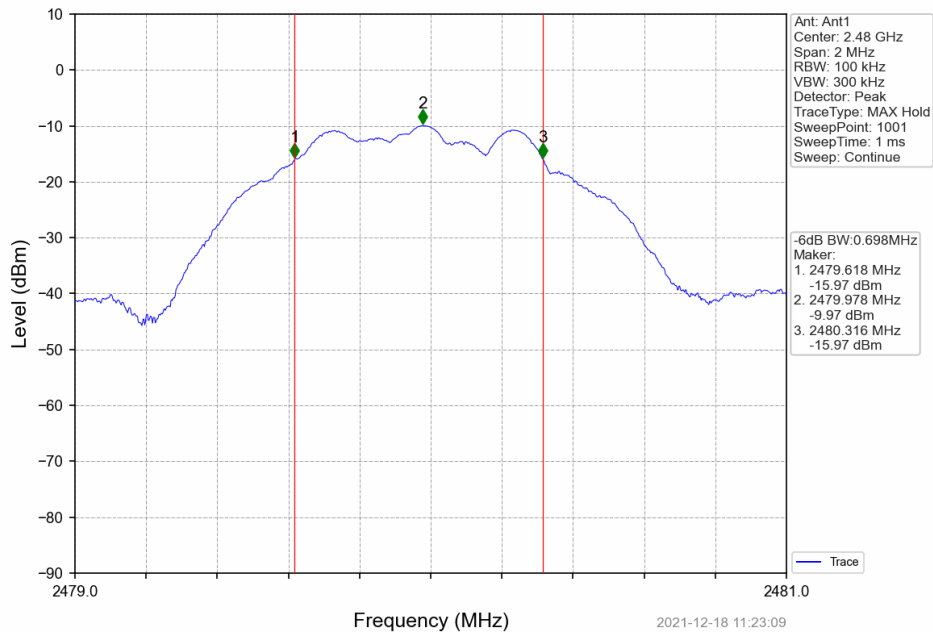

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2. Maximum Conducted Output Power


2.1 Power

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			Ant1	Limit	
1M	SISO	2402	-8.84	<=30	Pass
		2440	-8.88	<=30	Pass
		2480	-9.97	<=30	Pass

Note1: Antenna Gain: Ant1: 3.00dBi;


2.1.2 Test Graph

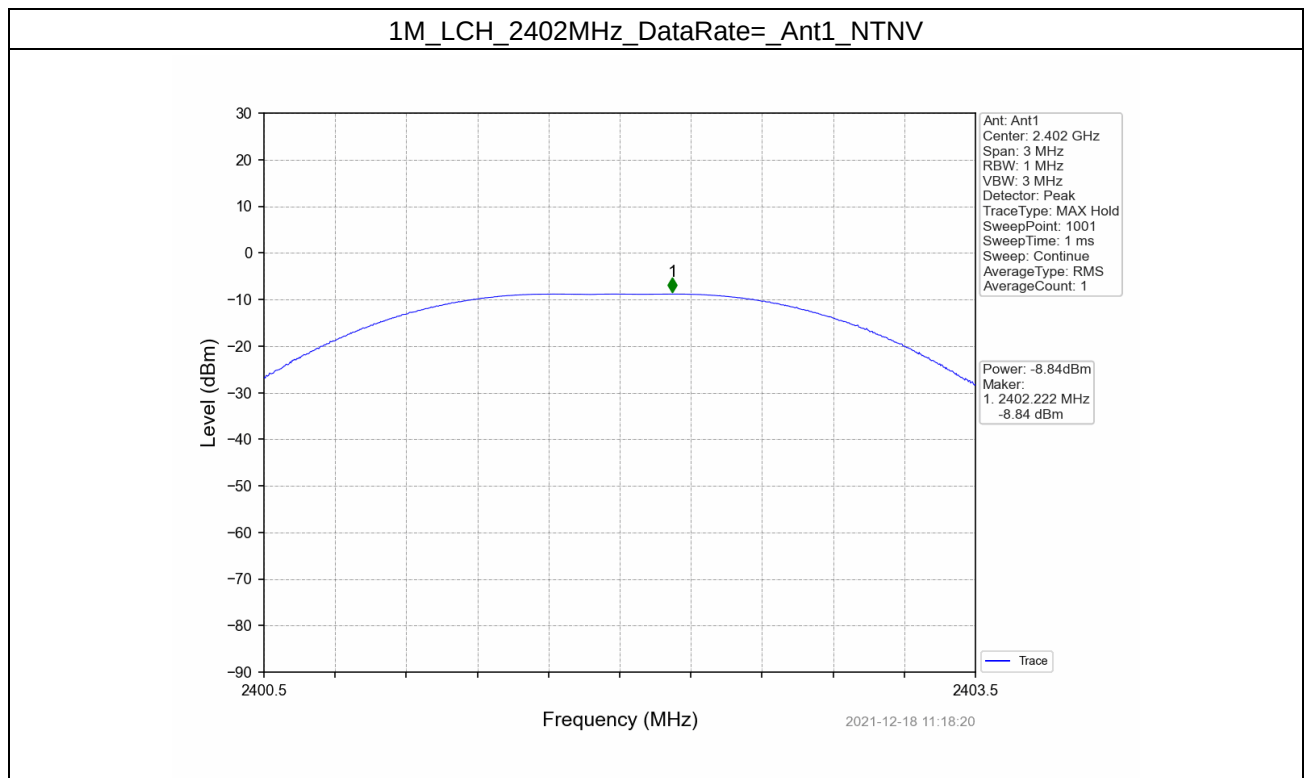

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

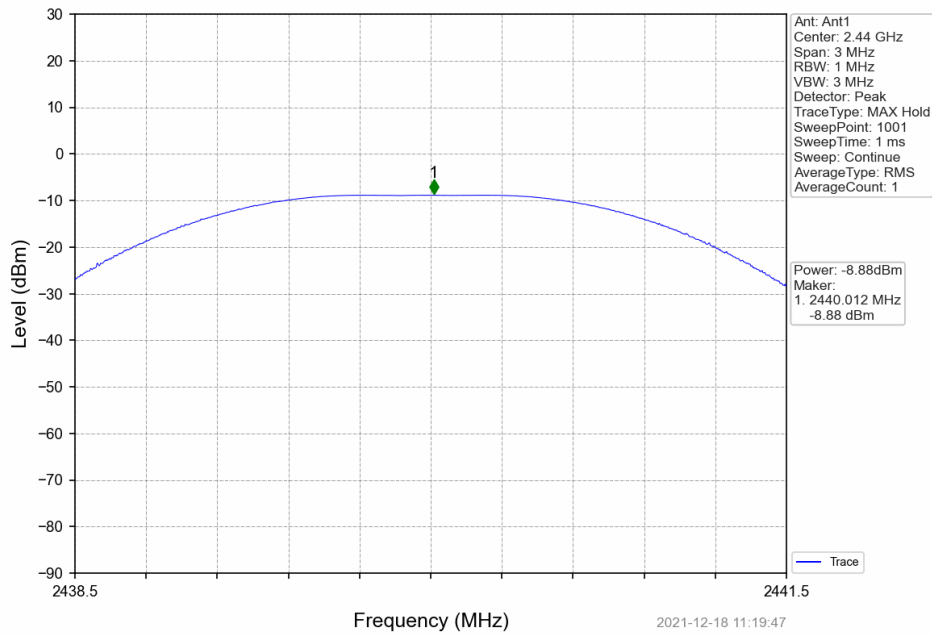

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

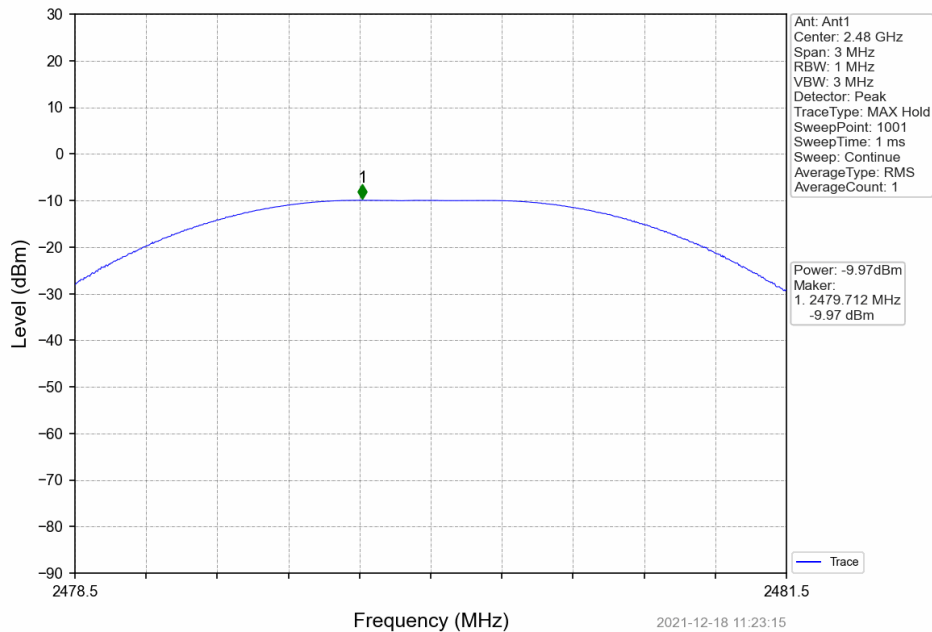

3. Maximum Power Spectral Density


3.1 PSD

3.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			Ant1	Limit	
1M	SISO	2402	-26.15	<=8	Pass
		2440	-26.15	<=8	Pass
		2480	-27.43	<=8	Pass

Note1: Antenna Gain: Ant1: 3.00dBi;


3.1.2 Test Graph

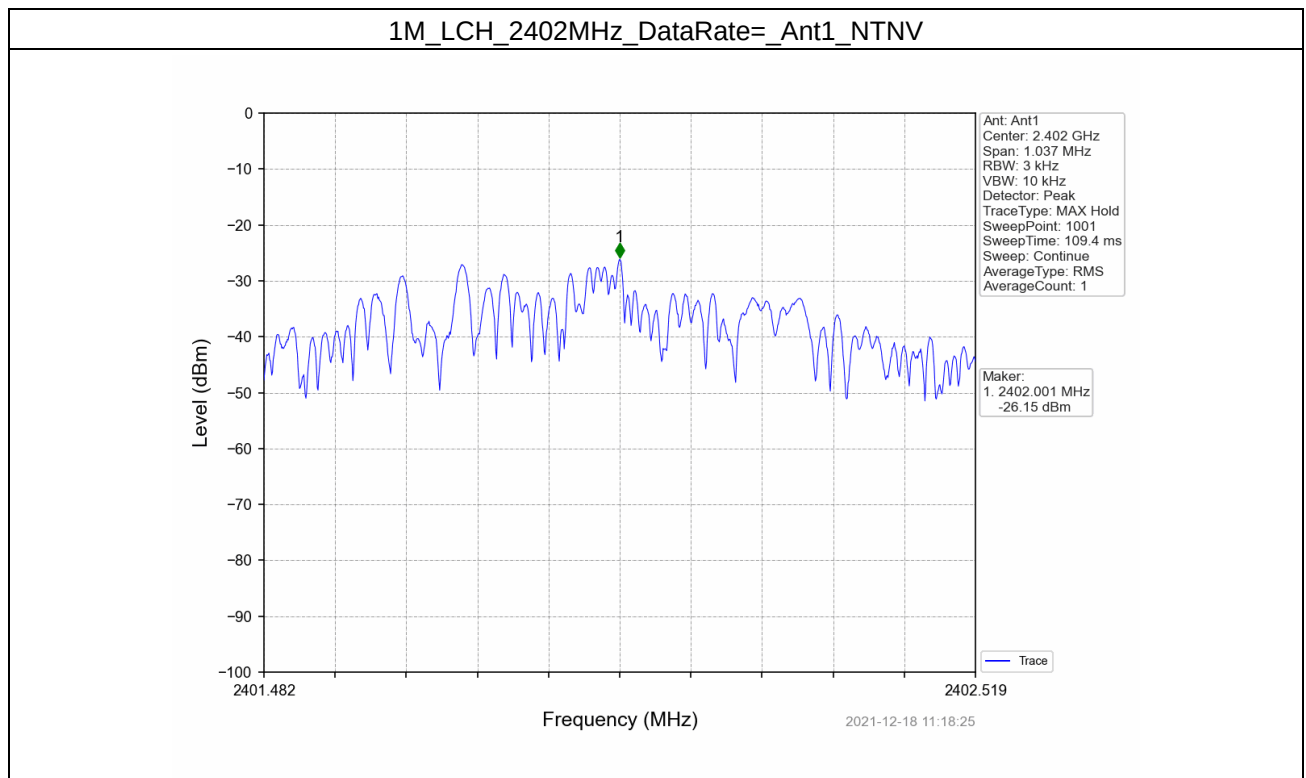

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

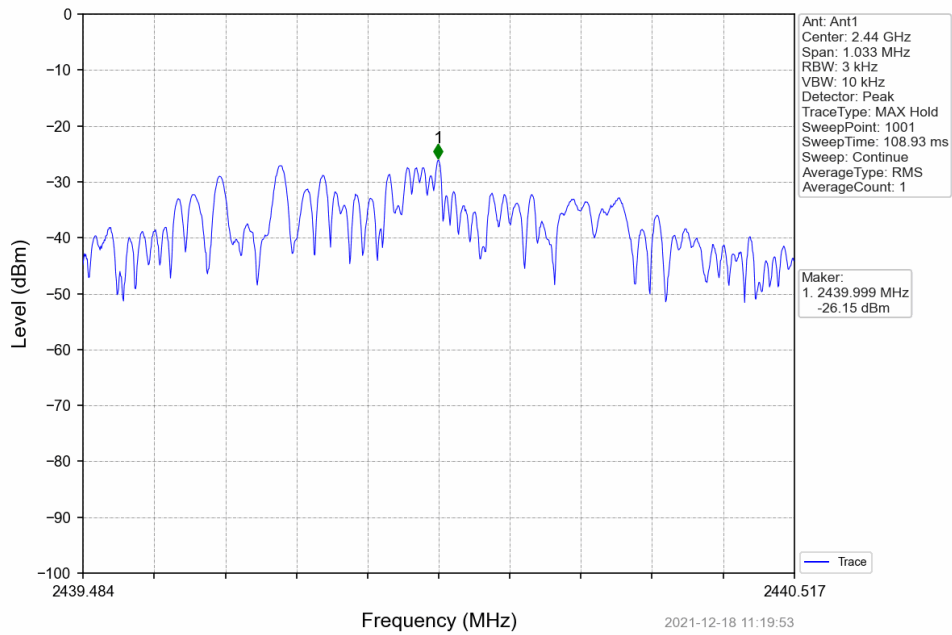

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

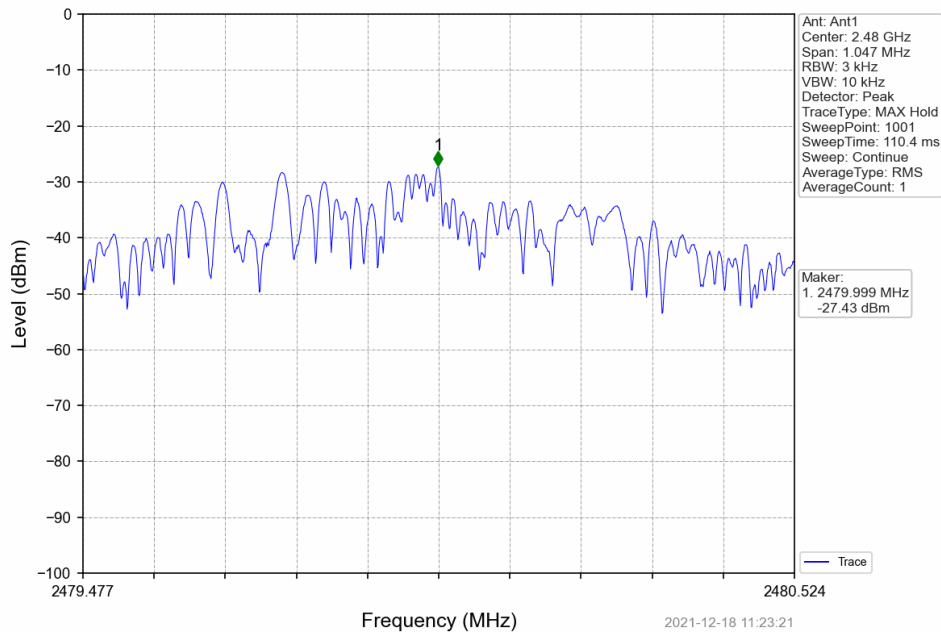

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Ref


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)
1M	SISO	2402	1	-8.84
		2440	1	-8.79
		2480	1	-9.98


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.


4.1.2 Test Graph

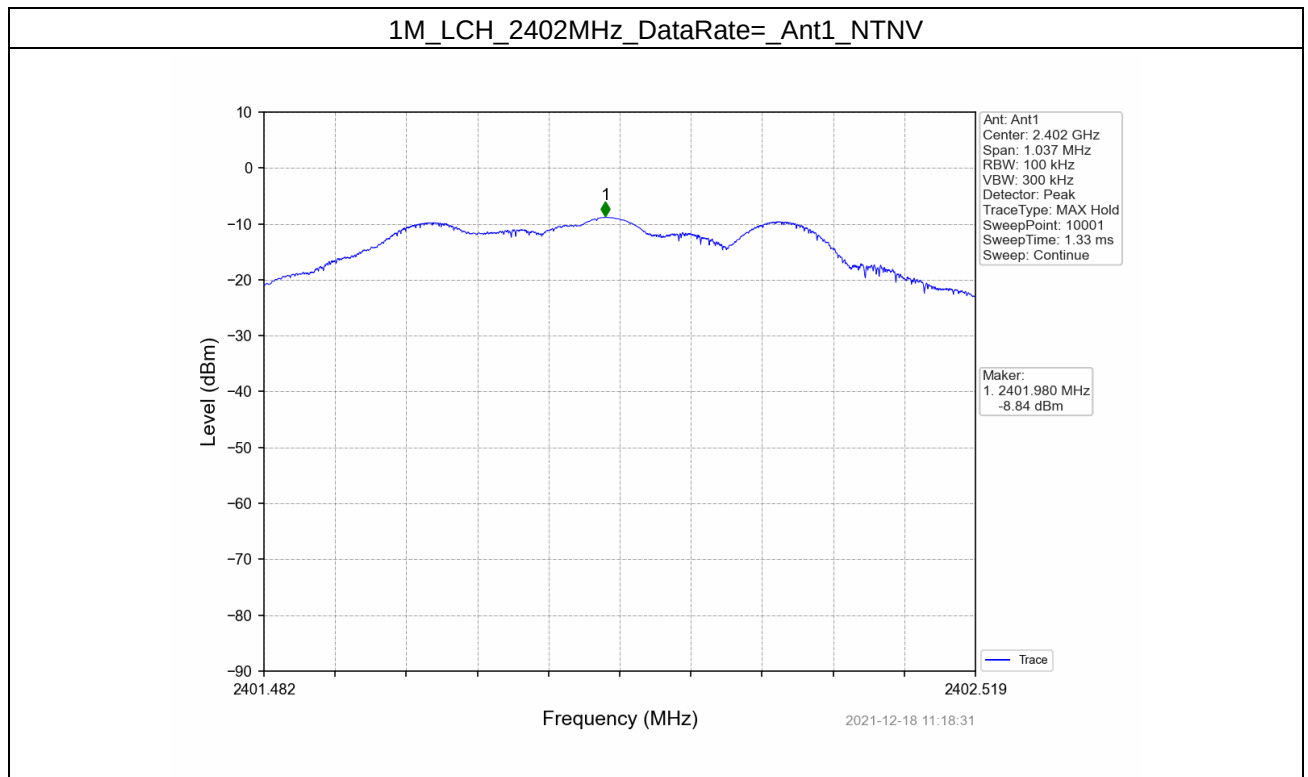

1M_MCH_2440MHz_DataRate=_Ant1_NTNV

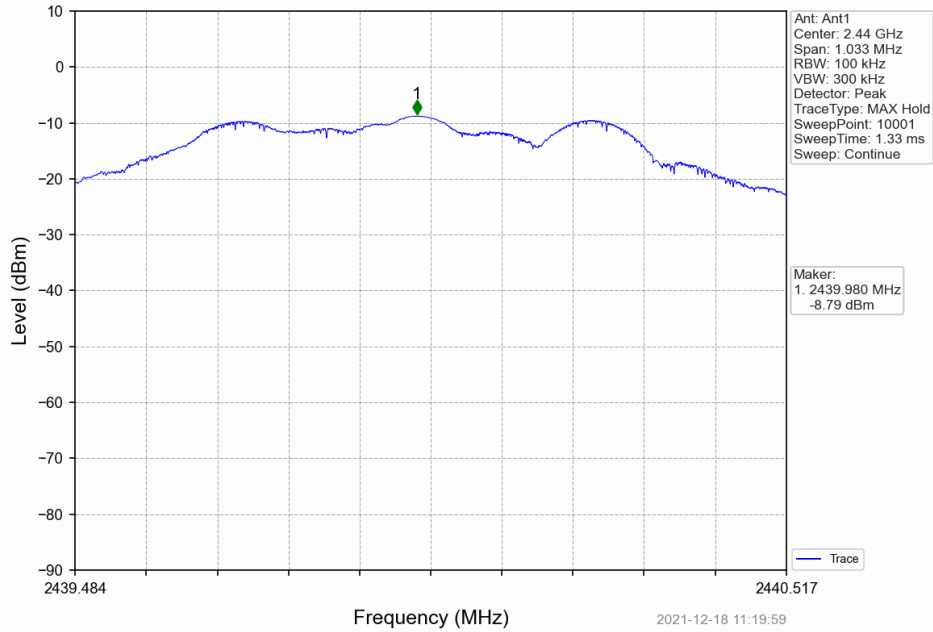

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

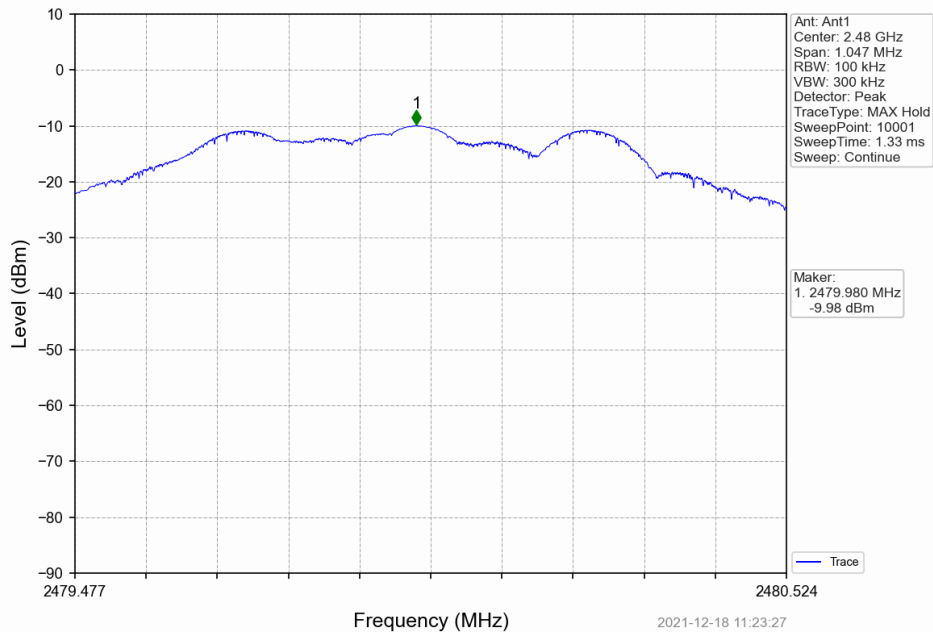

4.2 CSE


4.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Ant	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-8.79	-28.79	Pass
		2440	1	-8.79	-28.79	Pass
		2480	1	-8.79	-28.79	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.


4.2.2 Test Graph

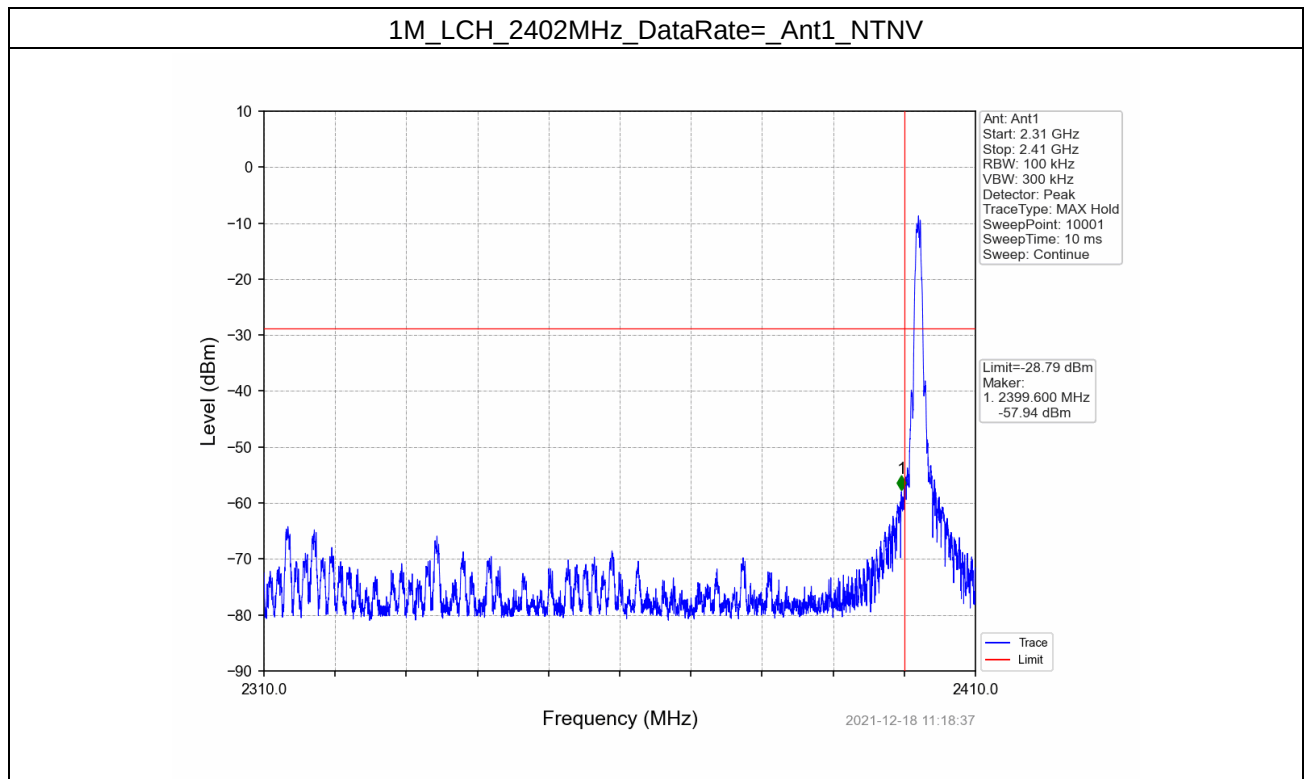


1M_LCH_2402MHz_DataRate=_Ant1_NTNV

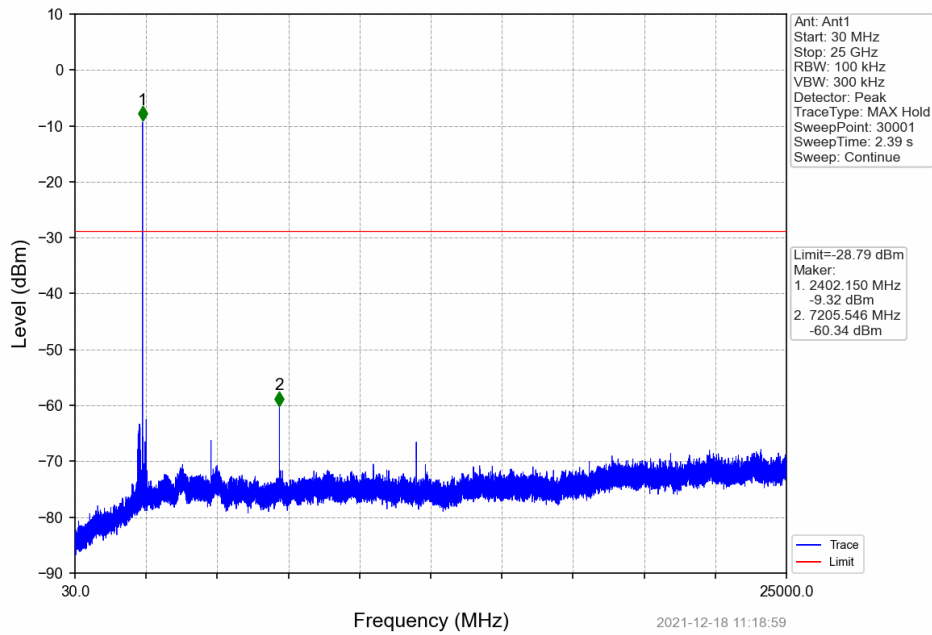


1M_MCH_2440MHz_DataRate=_Ant1_NTNV

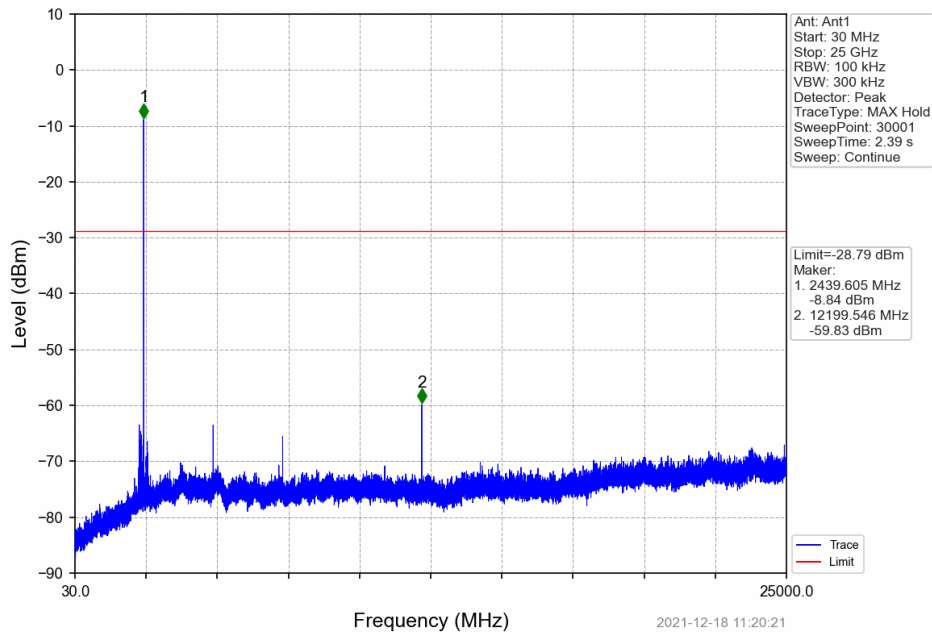

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

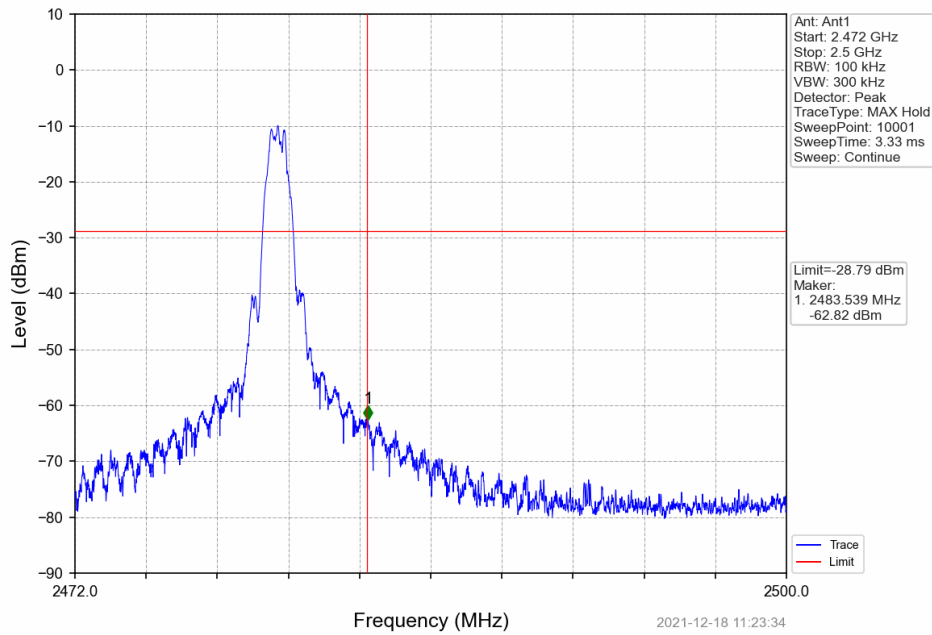

1M_HCH_2480MHz_DataRate=_Ant1_NTNV

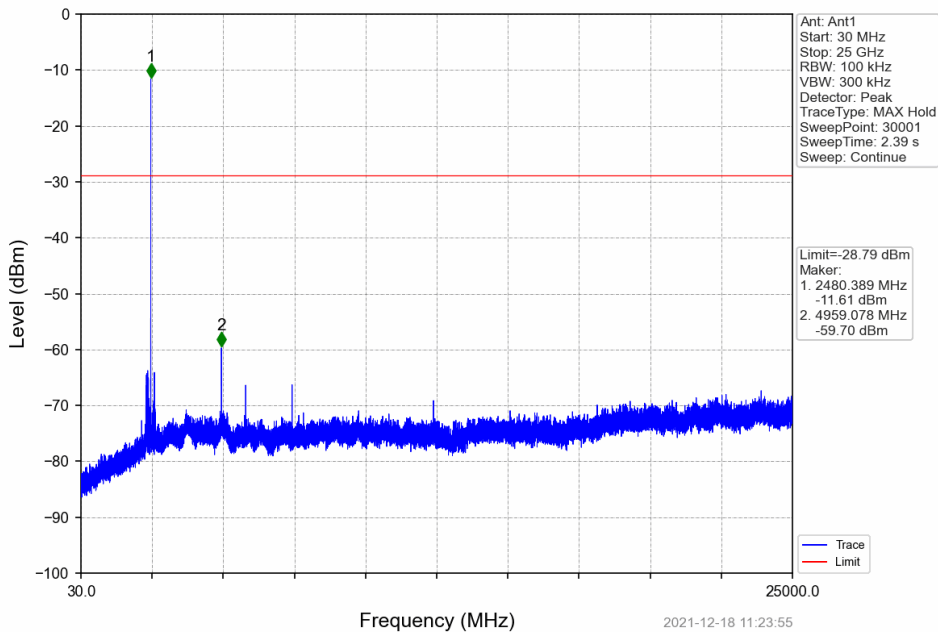

- End of the Report -