




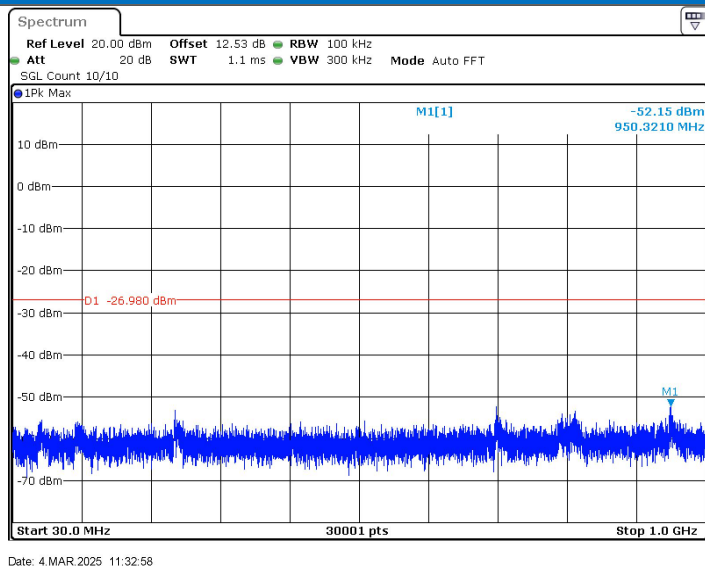


11N20SISO_Ant1_2437_1000~26500

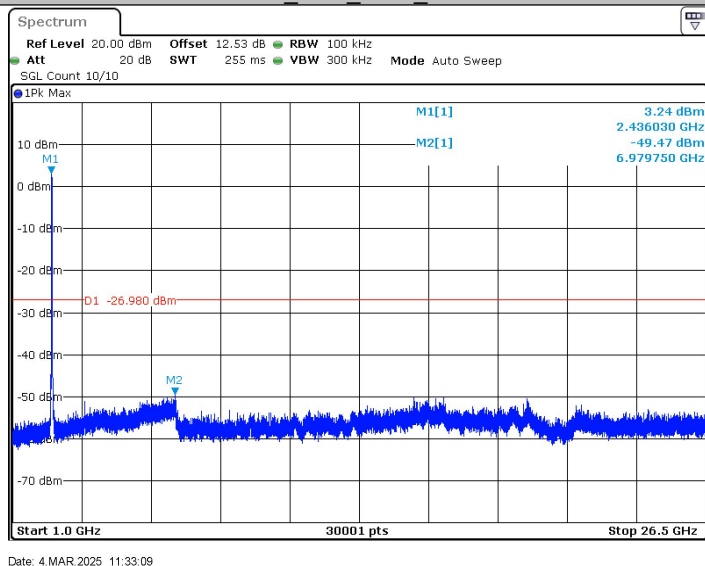

11N20SISO_Ant1_2462_0~Reference

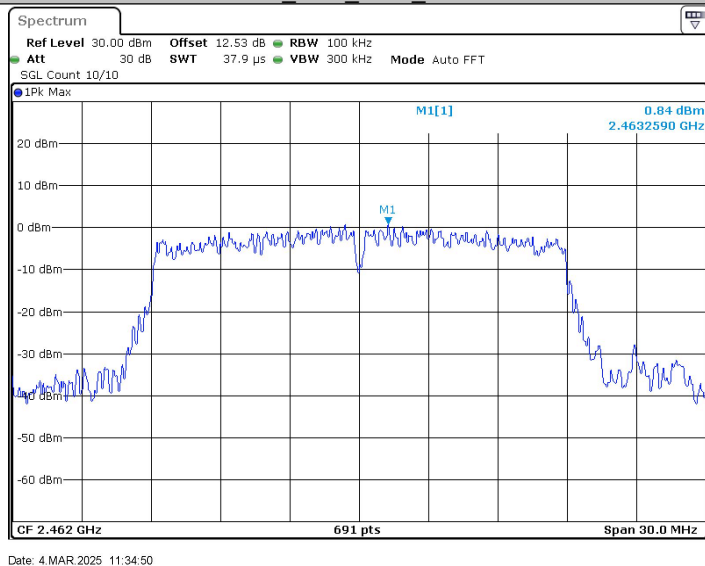


11N20SISO_Ant1_2462_30~1000

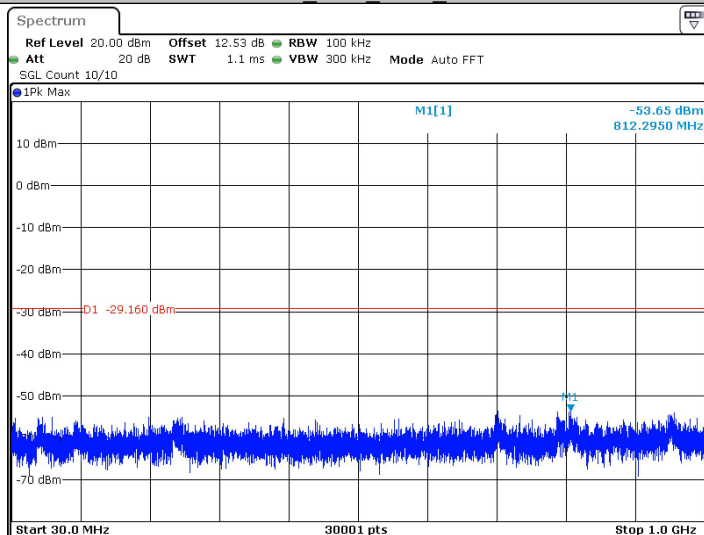


Date: 4.MAR.2025 11:34:54

11N20SISO_Ant1_2462_1000~26500

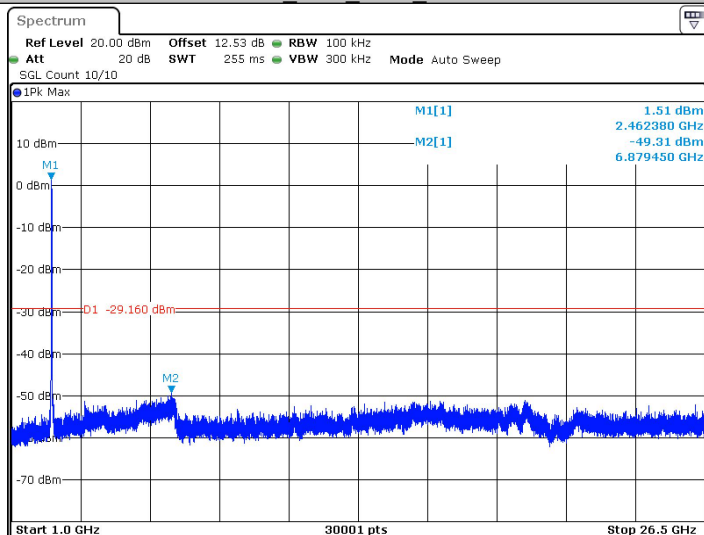


Date: 4.MAR.2025 11:35:05


11N40SISO_Ant1_2422_0~Reference

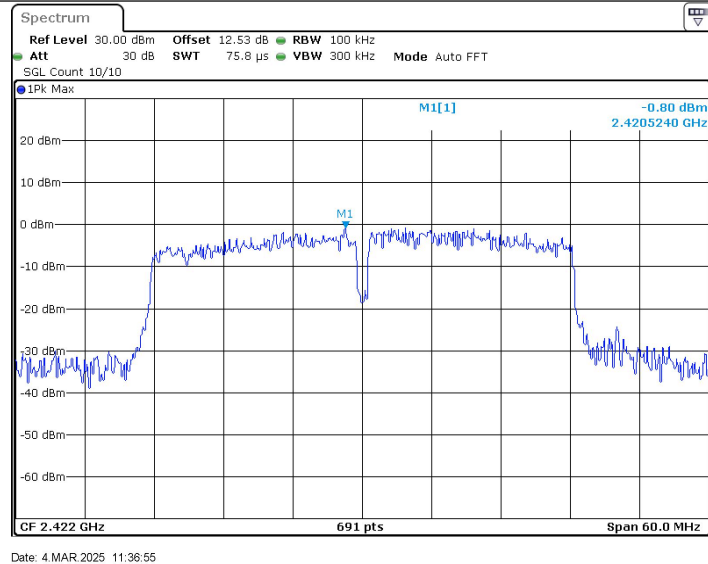


11N40SISO_Ant1_2422_30~1000

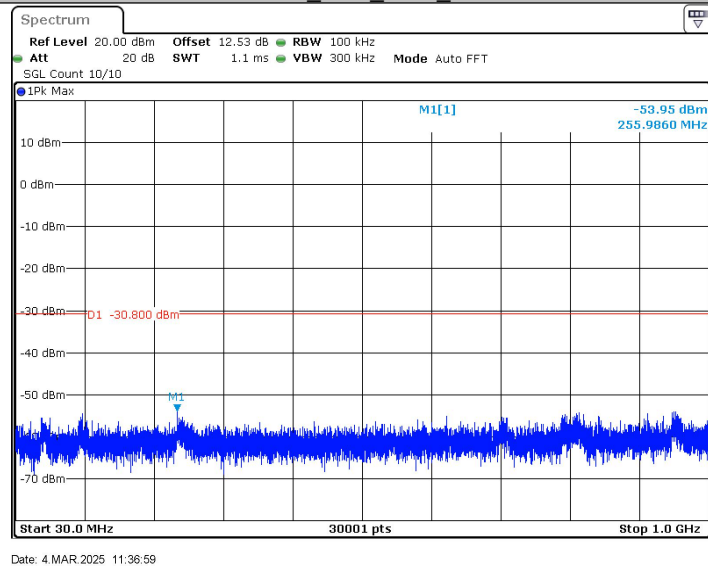

11N40SISO_Ant1_2422_1000~26500

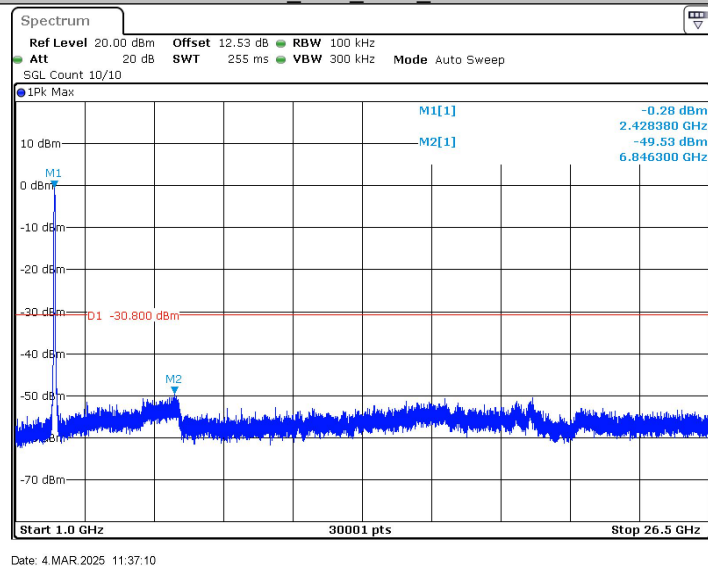


11N40SISO_Ant1_2437_0~Reference

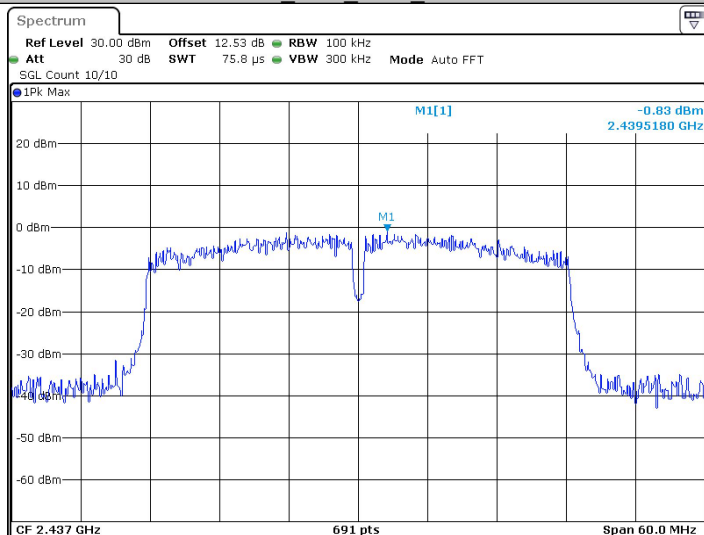


Date: 4.MAR.2025 11:42:28

11N40SISO_Ant1_2437_30~1000

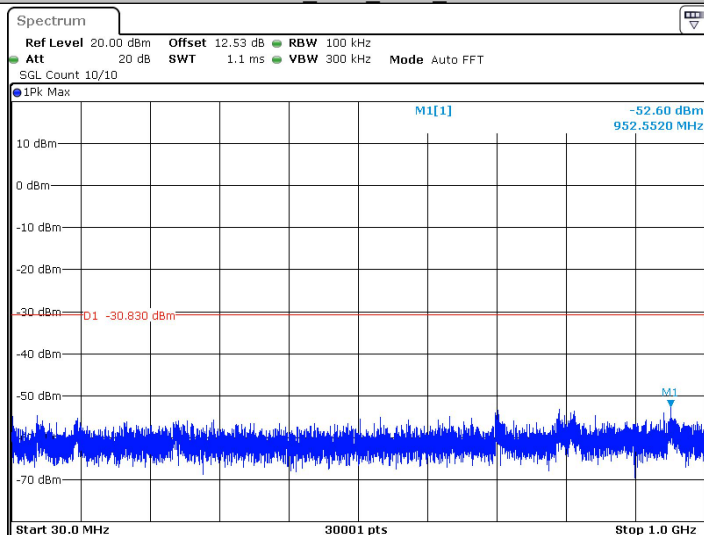


Date: 4.MAR.2025 11:42:33

11N40SISO_Ant1_2437_1000~26500

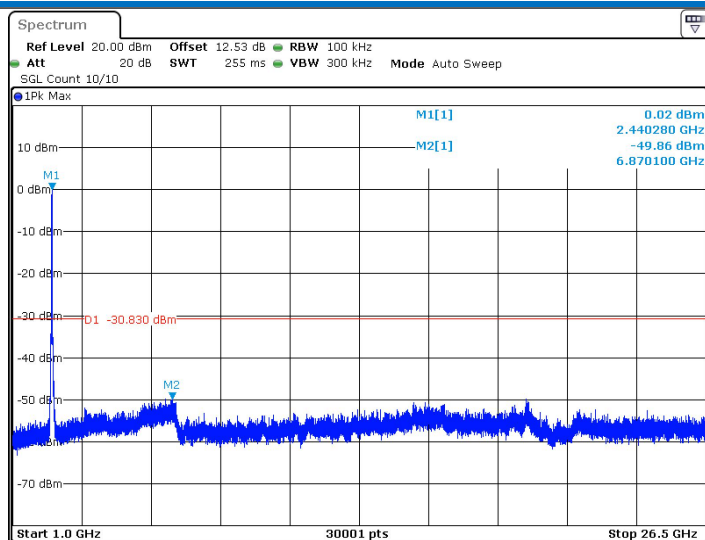


Date: 4.MAR.2025 11:42:43

11N40SISO_Ant1_2452_0~Reference

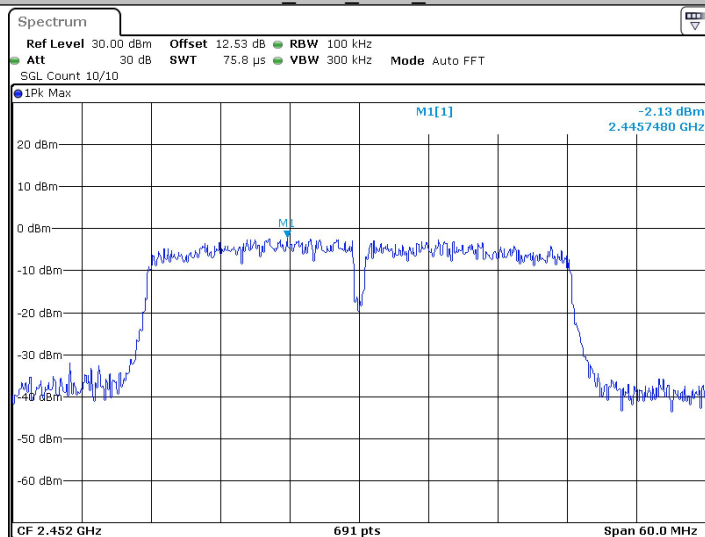


Date: 4.MAR.2025 11:44:04

11N40SISO_Ant1_2452_30~1000

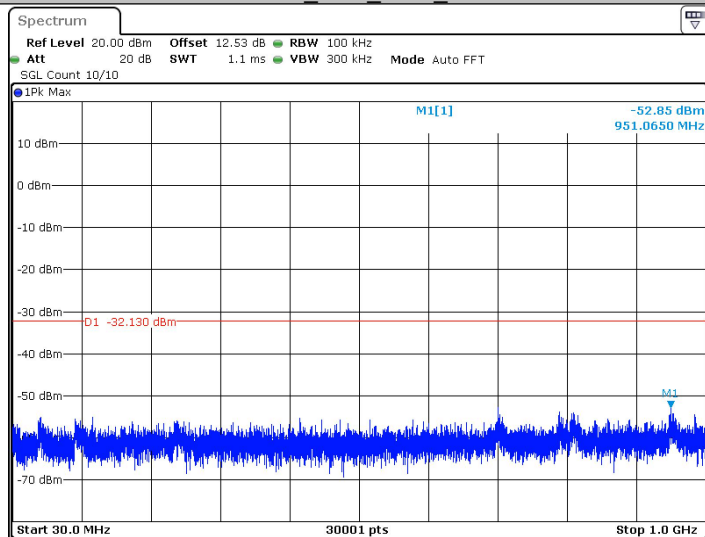

Date: 4.MAR.2025 11:44:09

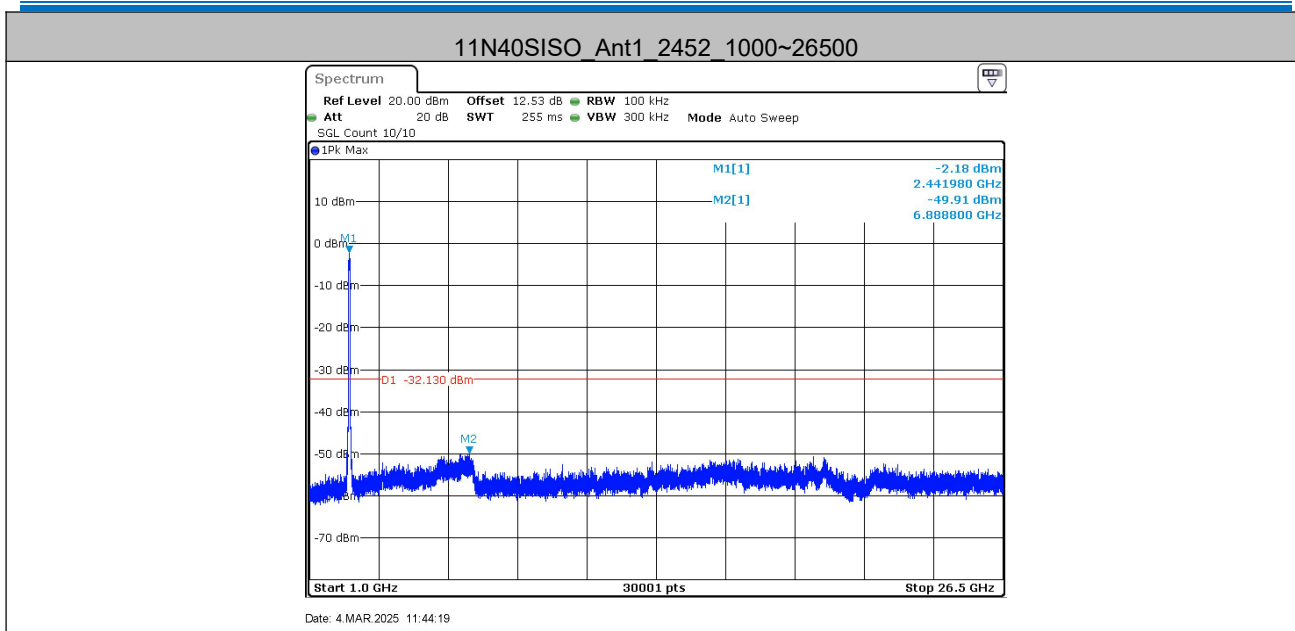

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

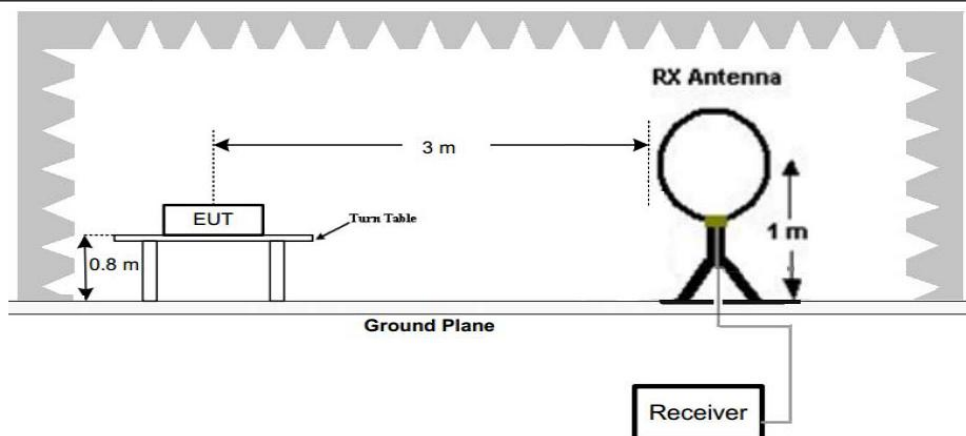


Figure 1. Below 30MHz

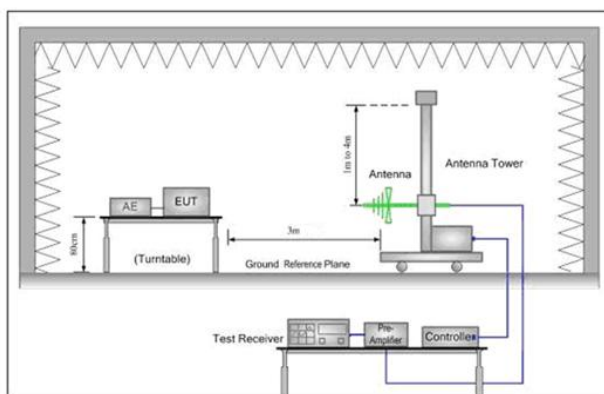


Figure 2. 30MHz to 1GHz

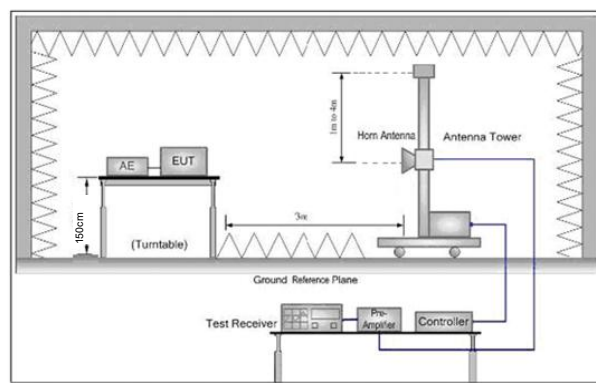


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.9.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

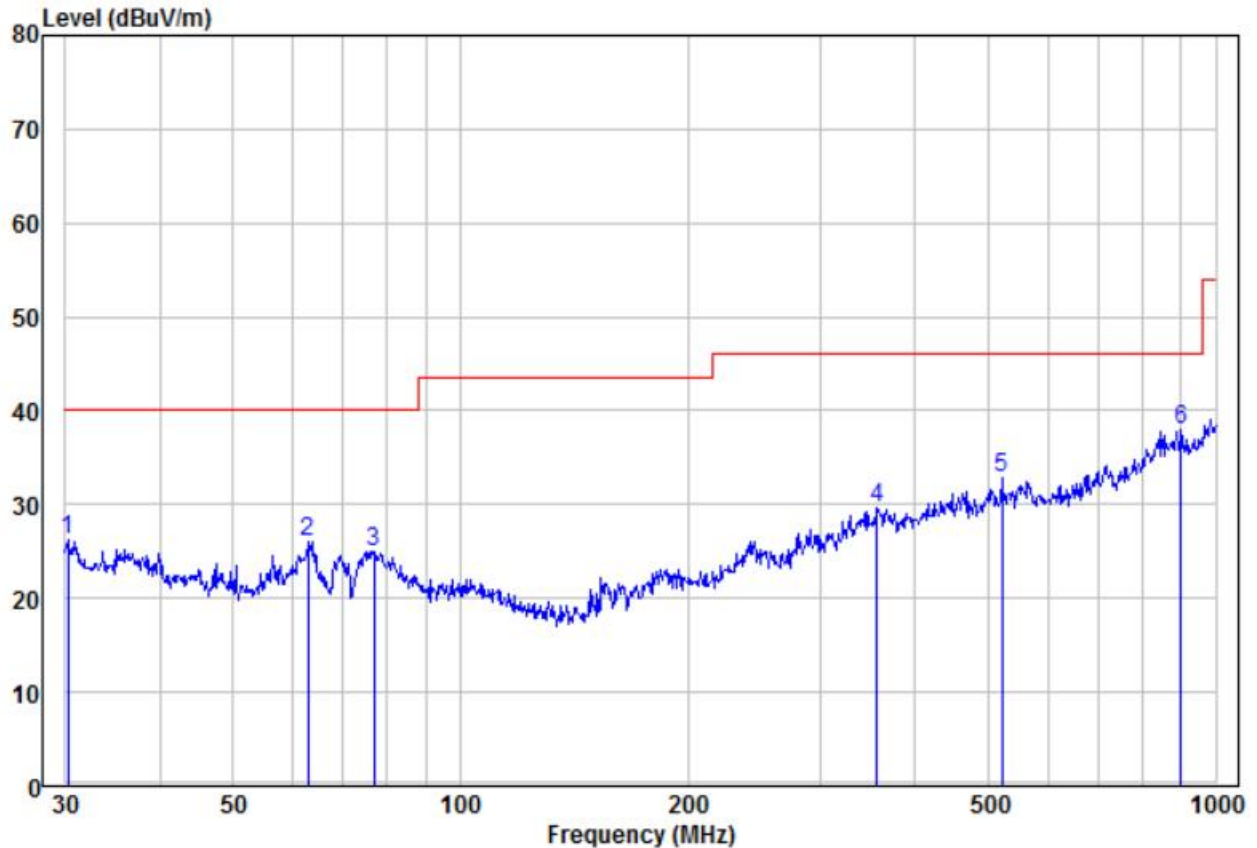

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	30.21	17.55	8.60	26.15	40.00	-13.85	Peak	VERTICAL	100	130
2	62.87	14.10	12.03	26.13	40.00	-13.87	Peak	VERTICAL	100	244
3	76.78	15.98	8.98	24.96	40.00	-15.04	Peak	VERTICAL	100	154
4	356.68	10.47	19.15	29.62	46.00	-16.38	Peak	VERTICAL	100	36
5	520.89	10.79	22.03	32.82	46.00	-13.18	Peak	VERTICAL	100	255
6 pp	900.15	8.58	29.29	37.87	46.00	-8.13	Peak	VERTICAL	100	58

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

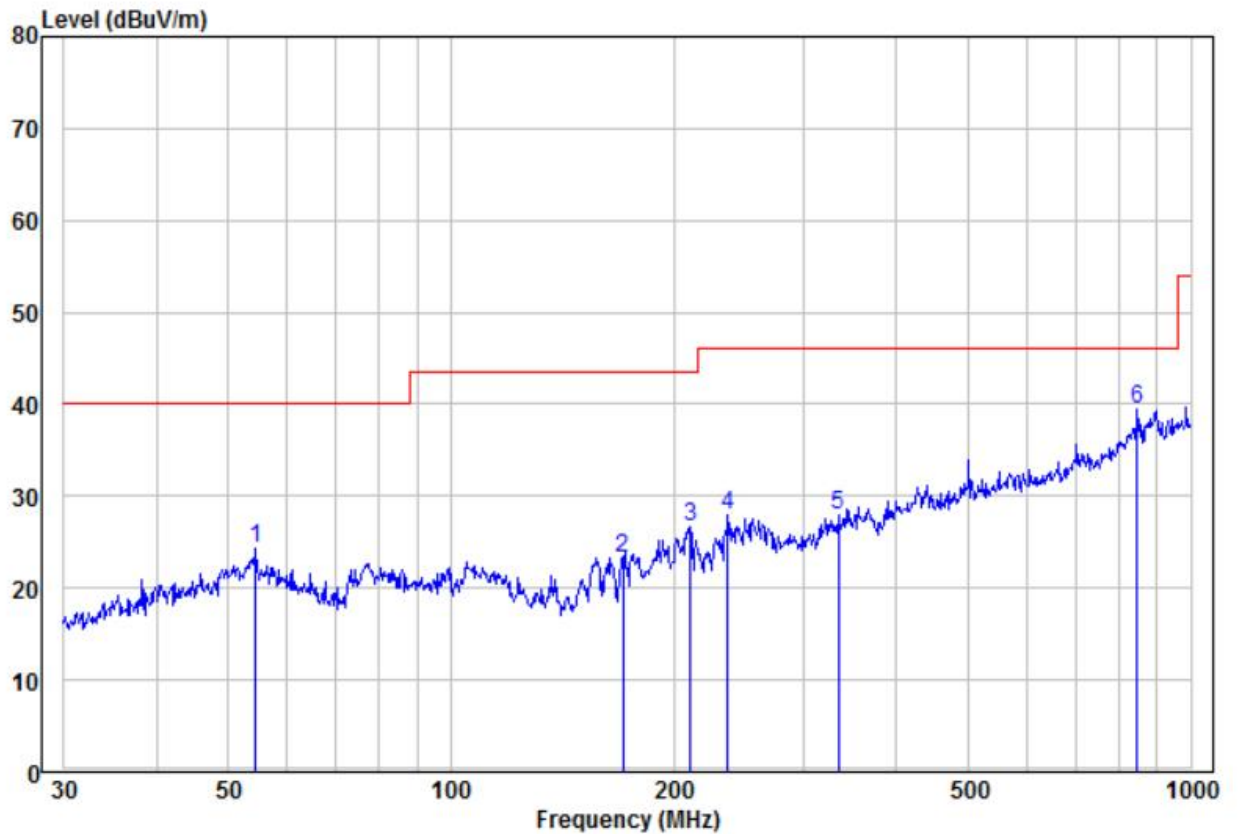

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	54.45	10.42	13.82	24.24	40.00	-15.76	Peak	HORIZONTAL	100	360
2	170.79	12.61	10.75	23.36	43.50	-20.14	Peak	HORIZONTAL	100	278
3	210.79	13.45	13.31	26.76	43.50	-16.74	Peak	HORIZONTAL	100	156
4	236.64	12.42	15.54	27.96	46.00	-18.04	Peak	HORIZONTAL	100	9
5	333.69	9.43	18.59	28.02	46.00	-17.98	Peak	HORIZONTAL	100	30
6 pp	848.06	10.42	29.03	39.45	46.00	-6.55	Peak	HORIZONTAL	100	178

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.9.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	54.15	-4.26	49.89	74	-24.11	peak	H	1.5	59
4824.000	36.55	-4.26	32.29	54	-21.71	AVG	H	1.5	164
7236.000	50.84	1.18	52.02	74	-21.98	peak	H	1.5	304
7236.000	38.52	1.18	39.70	54	-14.30	AVG	H	1.5	102
4824.000	54.37	-4.26	50.11	74	-23.89	peak	V	1.5	130
4824.000	38.64	-4.26	34.38	54	-19.62	AVG	V	1.5	206
7236.000	51.10	1.18	52.28	74	-21.72	peak	V	1.5	339
7236.000	36.39	1.18	37.57	54	-16.43	AVG	V	1.5	229

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.51	-4.12	47.39	74	-26.61	peak	H	1.5	298
4874.000	36.11	-4.12	31.99	54	-22.01	AVG	H	1.5	149
7311.000	48.29	1.46	49.75	74	-24.25	peak	H	1.5	294
7311.000	35.29	1.46	36.75	54	-17.25	AVG	H	1.5	262
4874.000	53.03	-4.12	48.91	74	-25.09	peak	V	1.5	274
4874.000	37.03	-4.12	32.91	54	-21.09	AVG	V	1.5	291
7311.000	49.67	1.46	51.13	74	-22.87	peak	V	1.5	324
7311.000	35.00	1.46	36.46	54	-17.54	AVG	V	1.5	351

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	52.03	-4.03	48.00	74	-26.00	peak	H	1.5	188
4924.000	37.06	-4.03	33.03	54	-20.97	AVG	H	1.5	357
7386.000	49.46	1.66	51.12	74	-22.88	peak	H	1.5	272
7386.000	37.53	1.66	39.19	54	-14.81	AVG	H	1.5	235
4924.000	55.04	-4.03	51.01	74	-22.99	peak	V	1.5	234
4924.000	38.80	-4.03	34.77	54	-19.23	AVG	V	1.5	321
7386.000	49.43	1.66	51.09	74	-22.91	peak	V	1.5	255
7386.000	37.82	1.66	39.48	54	-14.52	AVG	V	1.5	202

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.61	-4.26	48.35	74	-25.65	peak	H	1.5	39
4824.000	37.13	-4.26	32.87	54	-21.13	AVG	H	1.5	237
7236.000	51.37	1.18	52.55	74	-21.45	peak	H	1.5	319
7236.000	37.99	1.18	39.17	54	-14.83	AVG	H	1.5	247
4824.000	54.70	-4.26	50.44	74	-23.56	peak	V	1.5	220
4824.000	38.47	-4.26	34.21	54	-19.79	AVG	V	1.5	234
7236.000	51.11	1.18	52.29	74	-21.71	peak	V	1.5	202
7236.000	36.89	1.18	38.07	54	-15.93	AVG	V	1.5	247

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.64	-4.12	47.52	74	-26.48	peak	H	1.5	129
4874.000	36.07	-4.12	31.95	54	-22.05	AVG	H	1.5	32
7311.000	49.32	1.46	50.78	74	-23.22	peak	H	1.5	135
7311.000	35.73	1.46	37.19	54	-16.81	AVG	H	1.5	12
4874.000	54.01	-4.12	49.89	74	-24.11	peak	V	1.5	161
4874.000	36.36	-4.12	32.24	54	-21.76	AVG	V	1.5	40
7311.000	48.40	1.46	49.86	74	-24.14	peak	V	1.5	356
7311.000	36.40	1.46	37.86	54	-16.14	AVG	V	1.5	2

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)				
4924.000	51.36	-4.03	47.33	74	-26.67	peak	H	1.5	144
4924.000	37.31	-4.03	33.28	54	-20.72	AVG	H	1.5	44
7386.000	51.13	1.66	52.79	74	-21.21	peak	H	1.5	296
7386.000	37.08	1.66	38.74	54	-15.26	AVG	H	1.5	116
4924.000	54.89	-4.03	50.86	74	-23.14	peak	V	1.5	291
4924.000	37.57	-4.03	33.54	54	-20.46	AVG	V	1.5	147
7386.000	51.22	1.66	52.88	74	-21.12	peak	V	1.5	159
7386.000	37.61	1.66	39.27	54	-14.73	AVG	V	1.5	79

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.54	-4.26	49.28	74	-24.72	peak	H	1.5	100
4824.000	37.90	-4.26	33.64	54	-20.36	AVG	H	1.5	39
7236.000	51.12	1.18	52.30	74	-21.70	peak	H	1.5	288
7236.000	38.95	1.18	40.13	54	-13.87	AVG	H	1.5	164
4824.000	55.90	-4.26	51.64	74	-22.36	peak	V	1.5	139
4824.000	38.96	-4.26	34.70	54	-19.30	AVG	V	1.5	167
7236.000	50.47	1.18	51.65	74	-22.35	peak	V	1.5	185
7236.000	36.89	1.18	38.07	54	-15.93	AVG	V	1.5	346

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.58	-4.12	48.46	74	-25.54	peak	H	1.5	88
4874.000	36.11	-4.12	31.99	54	-22.01	AVG	H	1.5	113
7311.000	50.04	1.46	51.50	74	-22.50	peak	H	1.5	244
7311.000	36.52	1.46	37.98	54	-16.02	AVG	H	1.5	281
4874.000	54.19	-4.12	50.07	74	-23.93	peak	V	1.5	56
4874.000	36.66	-4.12	32.54	54	-21.46	AVG	V	1.5	134
7311.000	48.79	1.46	50.25	74	-23.75	peak	V	1.5	177
7311.000	36.54	1.46	38.00	54	-16.00	AVG	V	1.5	204

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.29	-4.03	47.26	74	-26.74	peak	H	1.5	94
4924.000	38.28	-4.03	34.25	54	-19.75	AVG	H	1.5	357
7386.000	49.27	1.66	50.93	74	-23.07	peak	H	1.5	321
7386.000	37.90	1.66	39.56	54	-14.44	AVG	H	1.5	89
4924.000	54.05	-4.03	50.02	74	-23.98	peak	V	1.5	49
4924.000	37.48	-4.03	33.45	54	-20.55	AVG	V	1.5	176
7386.000	49.41	1.66	51.07	74	-22.93	peak	V	1.5	304
7386.000	37.98	1.66	39.64	54	-14.36	AVG	V	1.5	313

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.53	-4.24	49.29	74	-24.71	peak	H	1.5	86
4824.000	36.57	-4.24	32.33	54	-21.67	AVG	H	1.5	37
7236.000	52.22	1.2	53.42	74	-20.58	peak	H	1.5	338
7236.000	37.54	1.2	38.74	54	-15.26	AVG	H	1.5	23
4824.000	55.52	-4.24	51.28	74	-22.72	peak	V	1.5	262
4824.000	39.12	-4.24	34.88	54	-19.12	AVG	V	1.5	22
7236.000	51.61	1.2	52.81	74	-21.19	peak	V	1.5	214
7236.000	36.58	1.2	37.78	54	-16.22	AVG	V	1.5	250

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.85	-4.12	48.73	74	-25.27	peak	H	1.5	73
4874.000	37.21	-4.12	33.09	54	-20.91	AVG	H	1.5	132
7311.000	49.21	1.46	50.67	74	-23.33	peak	H	1.5	106
7311.000	36.95	1.46	38.41	54	-15.59	AVG	H	1.5	231
4874.000	52.87	-4.12	48.75	74	-25.25	peak	V	1.5	290
4874.000	36.54	-4.12	32.42	54	-21.58	AVG	V	1.5	59
7311.000	48.39	1.46	49.85	74	-24.15	peak	V	1.5	84
7311.000	35.93	1.46	37.39	54	-16.61	AVG	V	1.5	12

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	53.64	-4.05	49.59	74	-24.41	peak	H	1.5	93
4924.000	37.57	-4.05	33.52	54	-20.48	AVG	H	1.5	293
7386.000	50.27	1.64	51.91	74	-22.09	peak	H	1.5	315
7386.000	37.08	1.64	38.72	54	-15.28	AVG	H	1.5	34
4924.000	55.54	-4.05	51.49	74	-22.51	peak	V	1.5	231
4924.000	39.82	-4.05	35.77	54	-18.23	AVG	V	1.5	12
7386.000	51.75	1.64	53.39	74	-20.61	peak	V	1.5	225
7386.000	35.70	1.64	37.34	54	-16.66	AVG	V	1.5	266

Remark:

- 1) The MCS0 of rate of 802.11n40 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

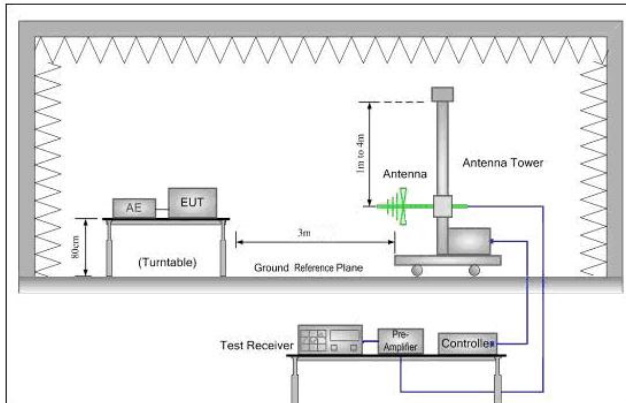


Figure 1. 30MHz to 1GHz

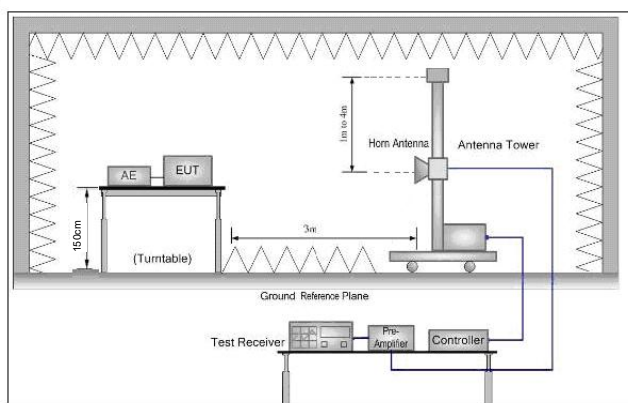


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	59.09	-9.2	49.89	74	-24.11	peak	H	1.5	44
2390.000	44.54	-9.2	35.34	54	-18.66	AVG	H	1.5	158
2400.000	60.14	-9.39	50.75	74	-23.25	peak	H	1.5	323
2400.000	46.86	-9.39	37.47	54	-16.53	AVG	H	1.5	82
2390.000	58.33	-9.2	49.13	74	-24.87	peak	V	1.5	278
2390.000	44.67	-9.2	35.47	54	-18.53	AVG	V	1.5	267
2400.000	60.16	-9.39	50.77	74	-23.23	peak	V	1.5	297
2400.000	46.78	-9.39	37.39	54	-16.61	AVG	V	1.5	137

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.78	-9.29	48.49	74	-25.51	peak	H	1.5	193
2483.500	44.28	-9.29	34.99	54	-19.01	AVG	H	1.5	164
2483.500	57.57	-9.29	48.28	74	-25.72	peak	V	1.5	162
2483.500	45.78	-9.29	36.49	54	-17.51	AVG	V	1.5	28

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.33	-9.2	49.13	74	-24.87	peak	H	1.5	112
2390.000	44.69	-9.2	35.49	54	-18.51	AVG	H	1.5	295
2400.000	59.31	-9.39	49.92	74	-24.08	peak	H	1.5	233
2400.000	46.78	-9.39	37.39	54	-16.61	AVG	H	1.5	183
2390.000	58.32	-9.2	49.12	74	-24.88	peak	V	1.5	121
2390.000	44.16	-9.2	34.96	54	-19.04	AVG	V	1.5	68
2400.000	60.24	-9.39	50.85	74	-23.15	peak	V	1.5	335
2400.000	46.83	-9.39	37.44	54	-16.56	AVG	V	1.5	205

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	58.01	-9.29	48.72	74	-25.28	peak	H	1.5	266
2483.500	43.61	-9.29	34.32	54	-19.68	AVG	H	1.5	349
2483.500	57.57	-9.29	48.28	74	-25.72	peak	V	1.5	71
2483.500	45.62	-9.29	36.33	54	-17.67	AVG	V	1.5	31

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	59.19	-9.2	49.99	74	-24.01	peak	H	1.5	28
2390.000	44.56	-9.2	35.36	54	-18.64	AVG	H	1.5	220
2400.000	59.57	-9.39	50.18	74	-23.82	peak	H	1.5	11
2400.000	46.38	-9.39	36.99	54	-17.01	AVG	H	1.5	262
2390.000	58.69	-9.2	49.49	74	-24.51	peak	V	1.5	157
2390.000	44.72	-9.2	35.52	54	-18.48	AVG	V	1.5	146
2400.000	59.33	-9.39	49.94	74	-24.06	peak	V	1.5	100
2400.000	46.26	-9.39	36.87	54	-17.13	AVG	V	1.5	24

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.65	-9.29	48.36	74	-25.64	peak	H	1.5	285
2483.500	44.41	-9.29	35.12	54	-18.88	AVG	H	1.5	202
2483.500	57.83	-9.29	48.54	74	-25.46	peak	V	1.5	244
2483.500	45.95	-9.29	36.66	54	-17.34	AVG	V	1.5	304

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.63	-9.2	49.43	74	-24.57	peak	H	1.5	339
2390.000	44.71	-9.2	35.51	54	-18.49	AVG	H	1.5	273
2400.000	60.20	-9.39	50.81	74	-23.19	peak	H	1.5	309
2400.000	46.68	-9.39	37.29	54	-16.71	AVG	H	1.5	65
2390.000	58.43	-9.2	49.23	74	-24.77	peak	V	1.5	41
2390.000	44.34	-9.2	35.14	54	-18.86	AVG	V	1.5	293
2400.000	59.85	-9.39	50.46	74	-23.54	peak	V	1.5	77
2400.000	46.50	-9.39	37.11	54	-16.89	AVG	V	1.5	20

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.54	-9.29	48.25	74	-25.75	peak	H	1.5	181
2483.500	43.66	-9.29	34.37	54	-19.63	AVG	H	1.5	144
2483.500	57.90	-9.29	48.61	74	-25.39	peak	V	1.5	287
2483.500	45.61	-9.29	36.32	54	-17.68	AVG	V	1.5	305

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

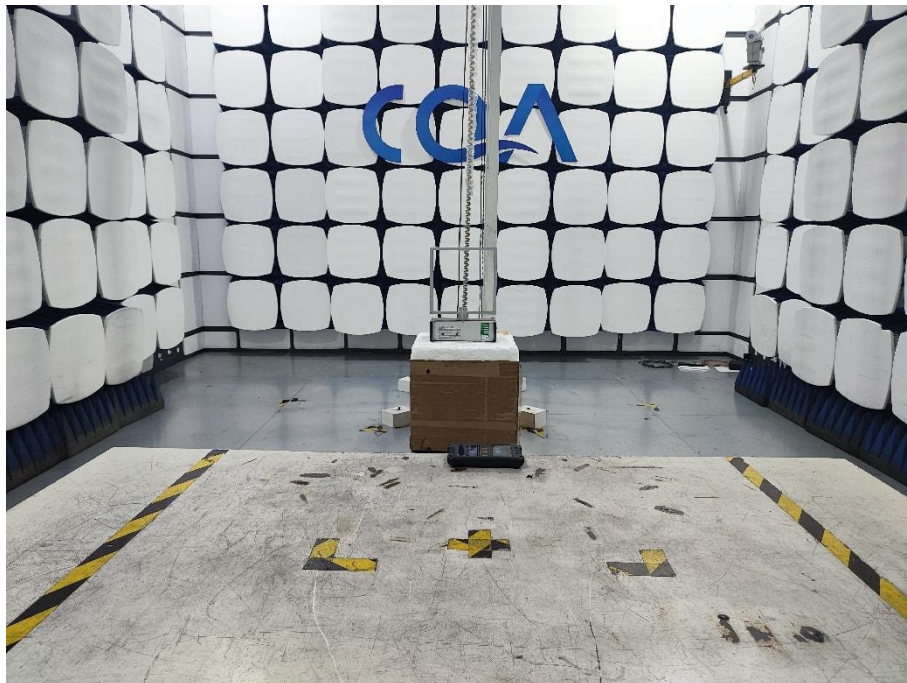


30MHz~1GHz:

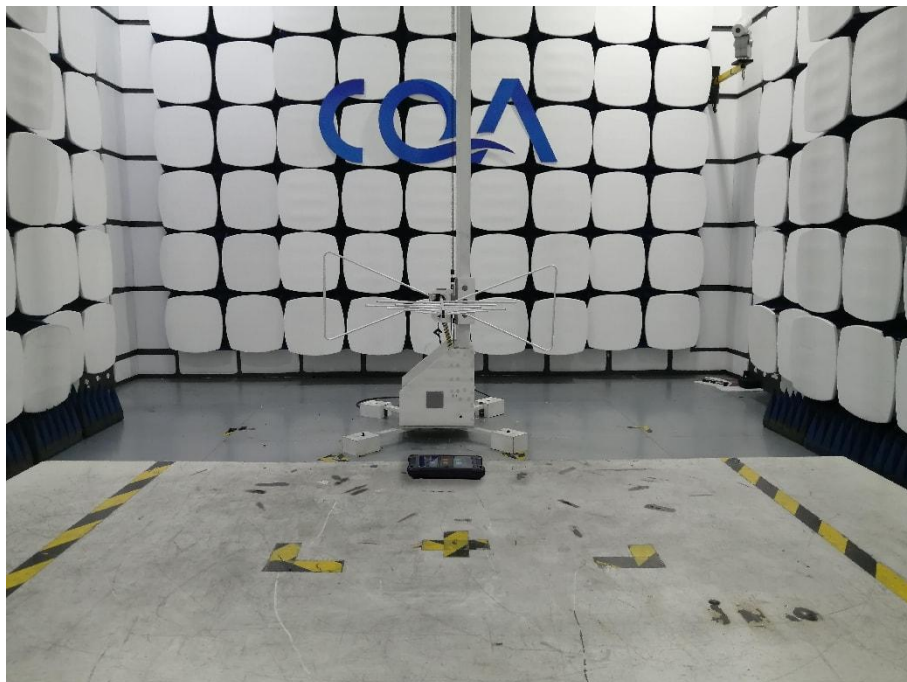

Above 1GHz:



6.2 Conducted Emission

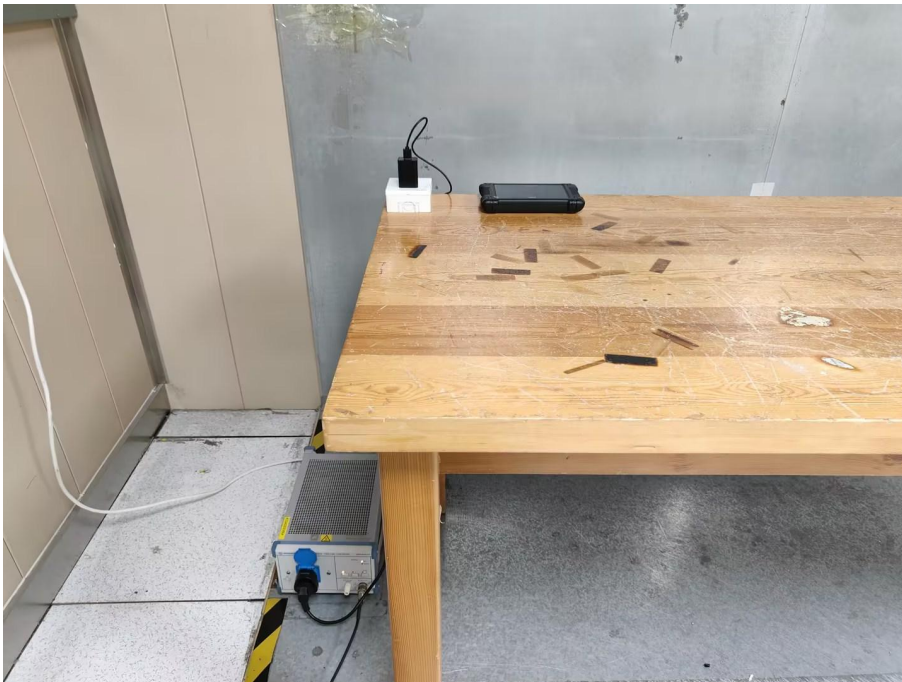

6.3 RF Conducted measurement



7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20250200364E-01.

*** END OF REPORT ***