




11N40MIMO_Ant1_2452_0~Reference

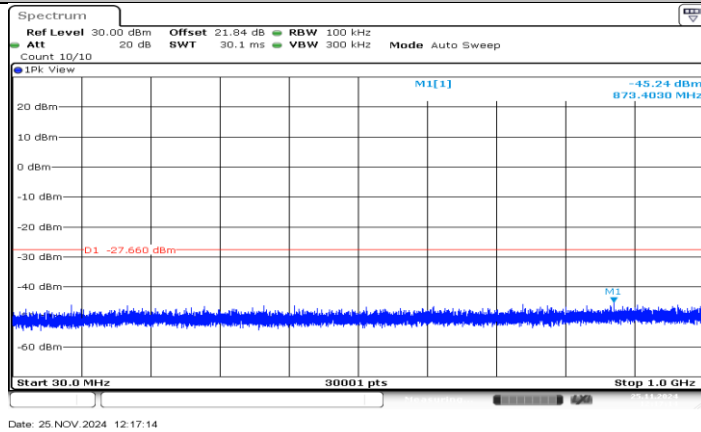


11N40MIMO_Ant1_2452_30~1000

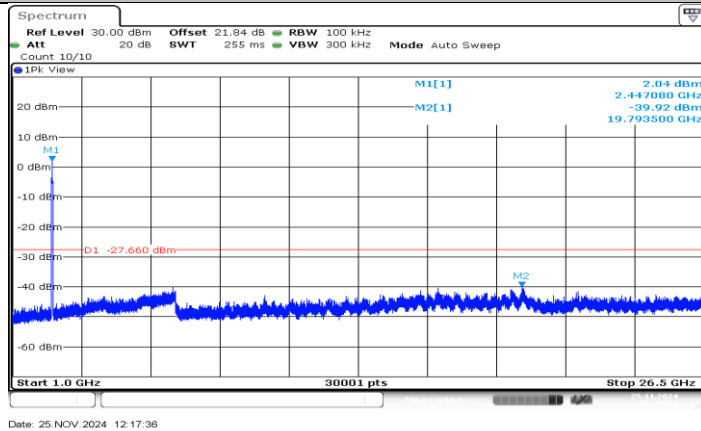


11N40MIMO_Ant1_2452_1000~26500

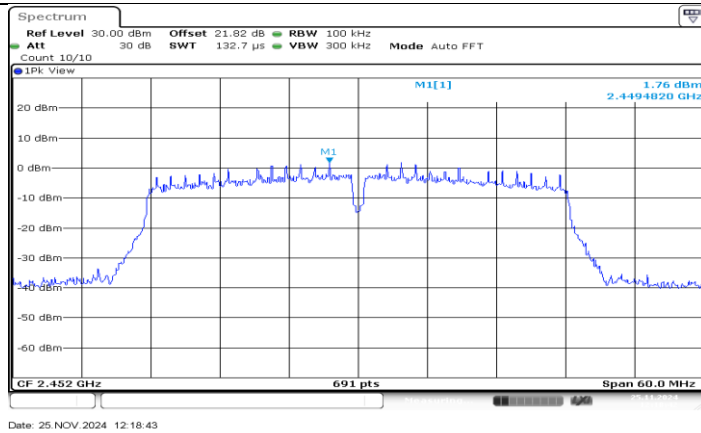

11N40MIMO_Ant2_2452_0~Reference

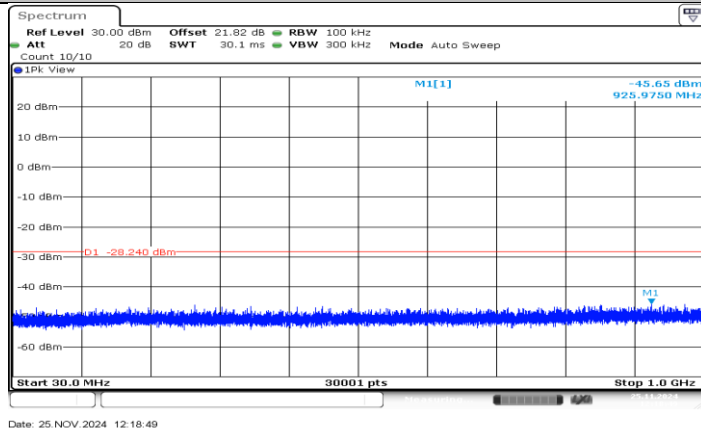

11N40MIMO_Ant2_2452_30~1000

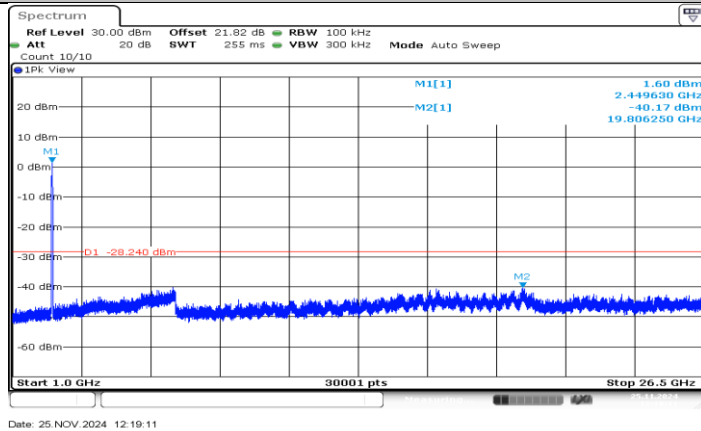

11N40MIMO_Ant2_2452_1000~26500

11.7. APPENDIX G: DUTY CYCLE**11.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.37	8.42	0.9941	99.41	0.03	0.12	0.01
11G	1.39	1.44	0.9653	96.53	0.15	0.72	1
11N20MIMO	1.29	1.34	0.9627	96.27	0.17	0.78	1
11N40MIMO	0.65	0.7	0.9286	92.86	0.32	1.54	2

Note:


Duty Cycle Correction Factor= $10\log(1/x)$.


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs

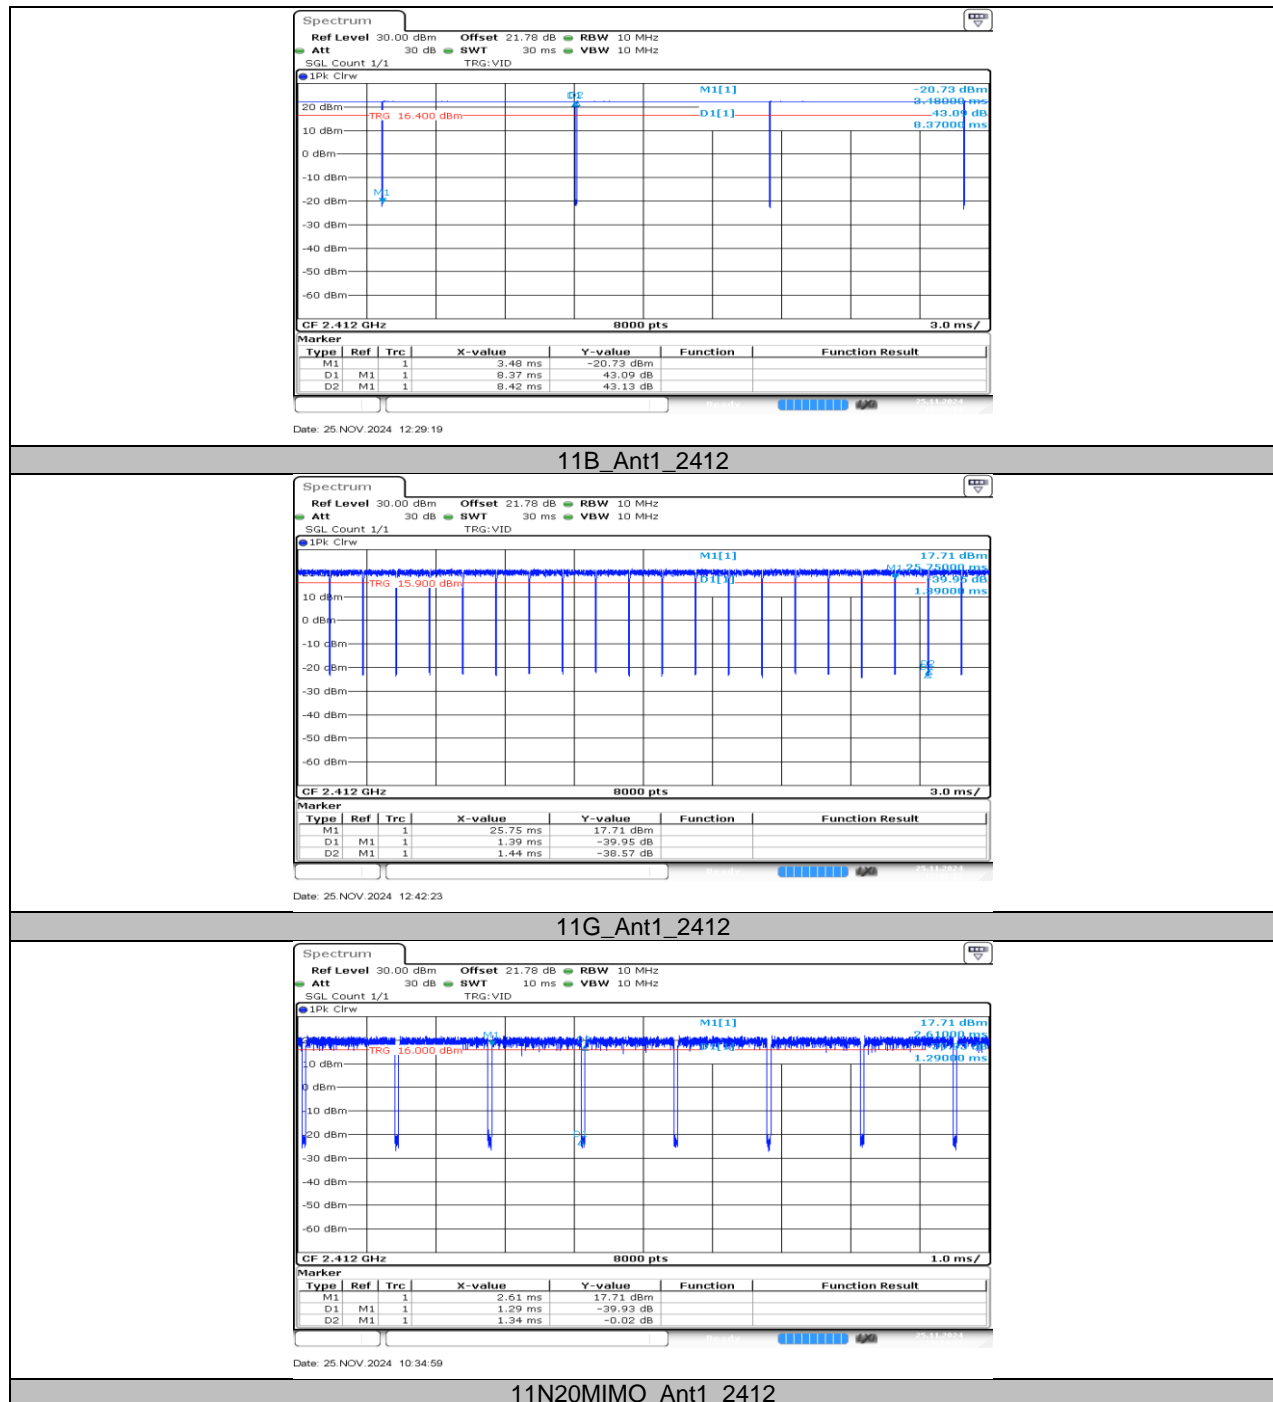

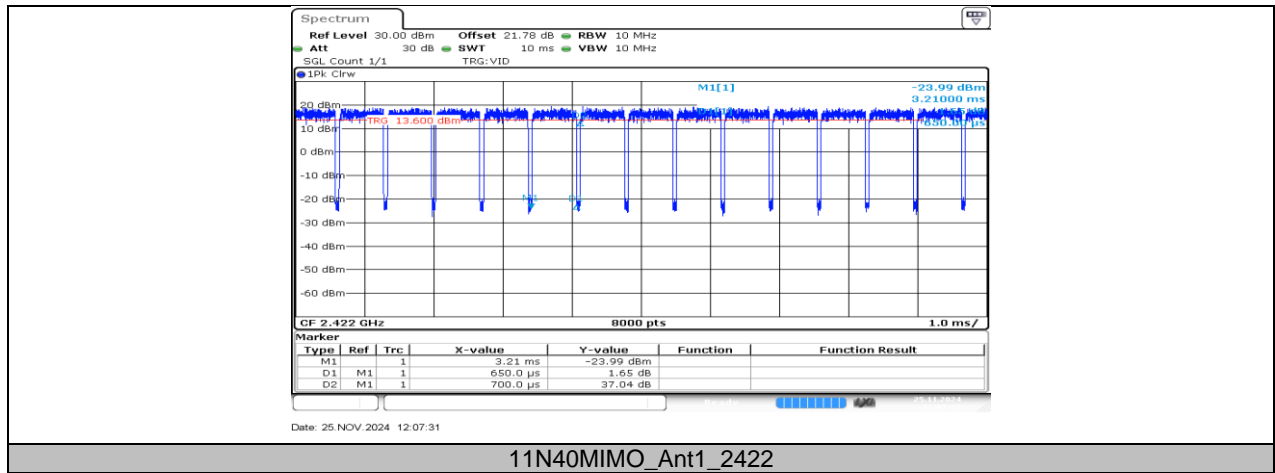

END OF REPORT