

TEST REPORT

Reference No..... : WTX20X04019590W-1
FCC ID : 2AWGB-EAL01
Applicant : Zhejiang Zhier Information Technology Co., Ltd.
Address : Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town, Xihu District,
Hangzhou City, Zhejiang Province
Manufacturer : Zhejiang Zhier Information Technology Co., Ltd.
Address : Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town, Xihu District,
Hangzhou City, Zhejiang Province
Product Name : RFID Asset Tag
Test Model. : E-AL01
Additional Model(s) No. : /
Brand Name..... : /
Standards : FCC Part 15.231e
Date of Receipt sample : Apr.16, 2020
Date of Test..... : Apr.28, 2020 to Jun.03, 2020
Date of Issue : Jun.03, 2020
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. ANTENNA REQUIREMENT	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. RADIATED EMISSIONS.....	10
4.1 STANDARD APPLICABLE.....	10
4.2 TEST PROCEDURE.....	11
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. 20DB BANDWIDTH	17
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 SUMMARY OF TEST RESULTS/PLOTS	17
6. TRANSMISSION TIME.....	18
6.1 STANDARD APPLICABLE.....	18
6.2 TEST PROCEDURE.....	18
6.3 SUMMARY OF TEST RESULTS/PLOTS	18
7. DUTY CYCLE.....	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	20
8. CONDUCTED EMISSIONS	22
8.1 TEST PROCEDURE.....	22
8.2 BASIC TEST SETUP BLOCK DIAGRAM.....	22
8.3 TEST RECEIVER SETUP	22
8.5 SUMMARY OF TEST RESULTS/PLOTS	22

Report version

Version No.	Date of issue	Description
Rev.00	Jun.03, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Zhejiang Zhier Information Technology Co., Ltd.
Address of applicant: Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town,
Xihu District, Hangzhou City, Zhejiang Province

Manufacturer: Zhejiang Zhier Information Technology Co., Ltd.
Address of manufacturer: Layer2, Building 4, No.2, Xiyuan Eight Road, Sandun Town,
Xihu District, Hangzhou City, Zhejiang Province

General Description of EUT	
Product Name:	RFID Asset Tag
Trade Name:	/
Model No.:	E-AL01
Adding Model(s):	/
Rated Voltage:	DC 3.0V
Battery Capacity:	200mAh
Power Adapter Model:	/
Software Version:	V1.0
Hardware Version:	V1.0
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	433.8 MHz
Max. Field Strength:	73.23dBuV/m(3m)
Modulation:	GFSK
Antenna Type:	Interpolation antenna
Antenna Gain:	2.15dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.231: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	433.8MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Occupied Bandwidth	Conducted	± 1.5%
Conducted Spurious Emission	Conducted	± 2.17dB
Transmission Time	Conducted	± 5%
Conducted Emissions	Conducted	9-150kHz ± 3.74dB
		0.15-30MHz ± 3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ± 4.52dB
		0.2-1GHz ± 5.56dB
		1-6GHz ± 3.84dB
		6-18GHz ± 3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(e)	Deactivation Testing	Compliant
§15.231(e)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant
§ 15.207(a)	Conducted Emission	N/A

N/A: Not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an Interpolation antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.231(e), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emission (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 150 **
174 - 260	1,500	150
260 - 470	1,500 to 5,000 **	150 to 500 **
Above 470	5,000	500

** linear interpolations

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(e) and FCC Part 15.209 Limit.


The test setup for emission measurement below 30MHz..

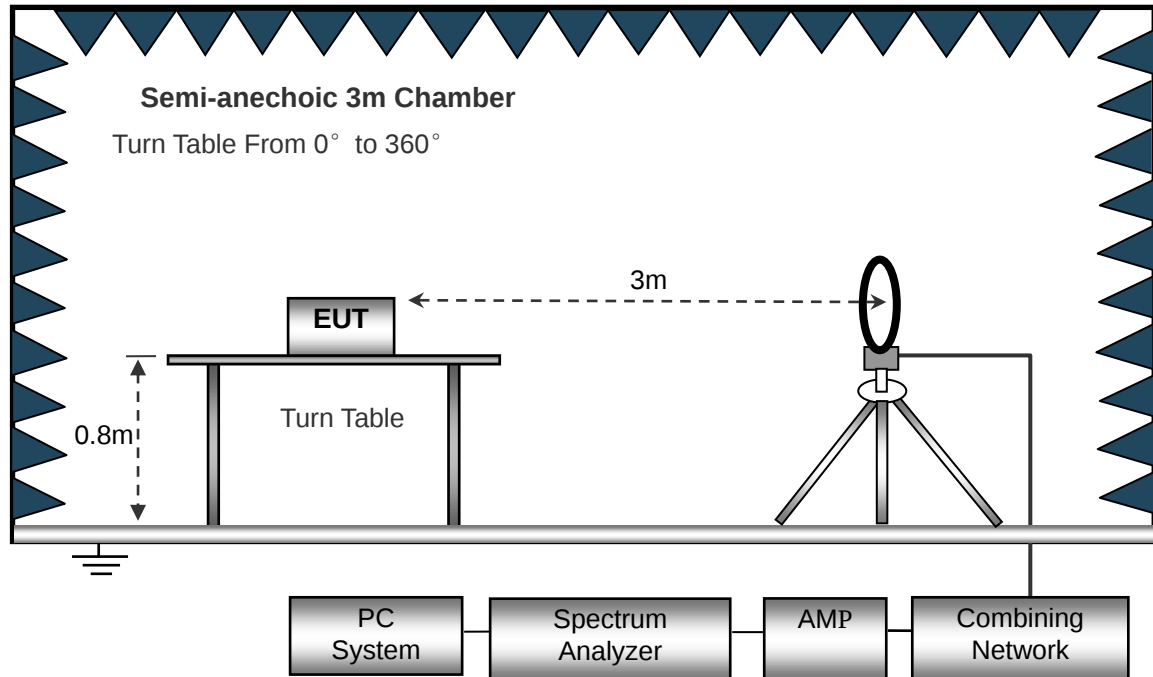

The test setup for emission measurement from 30 MHz to 1 GHz..

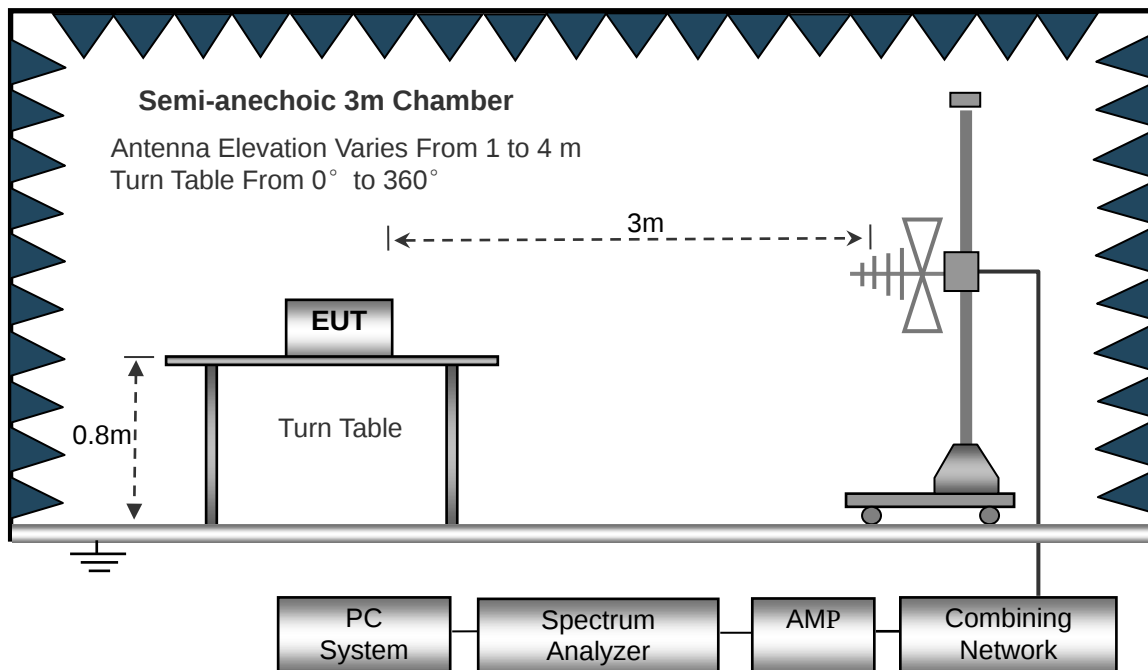

The test setup for emission measurement above 1 GHz..

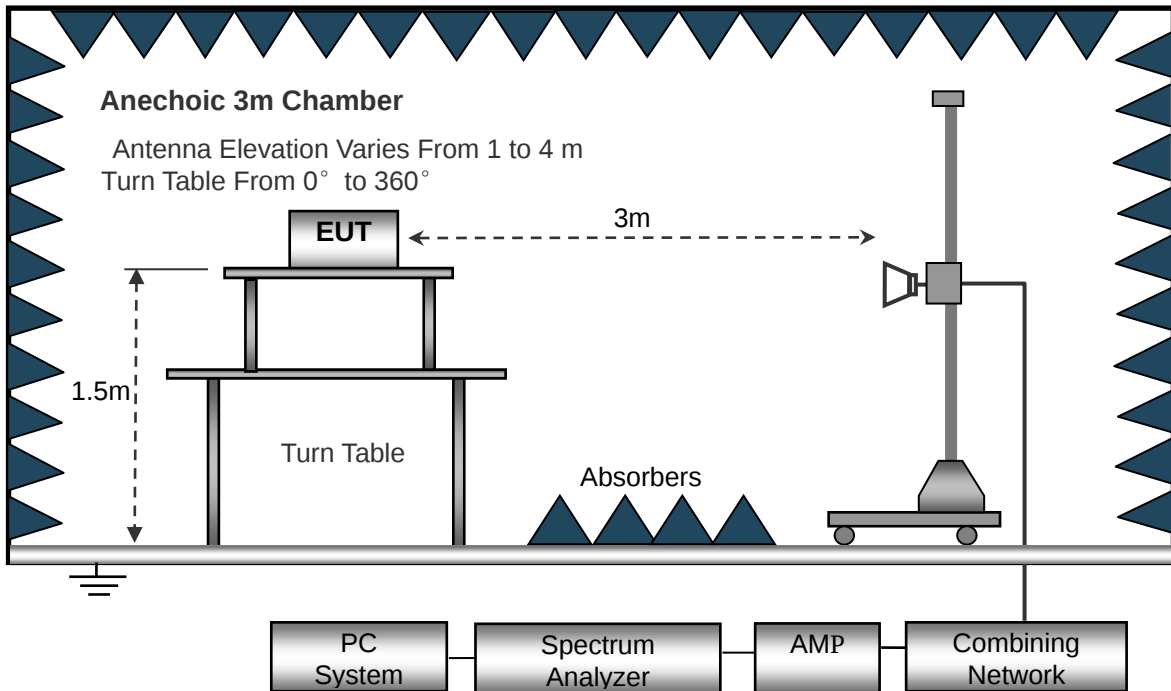

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$


The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

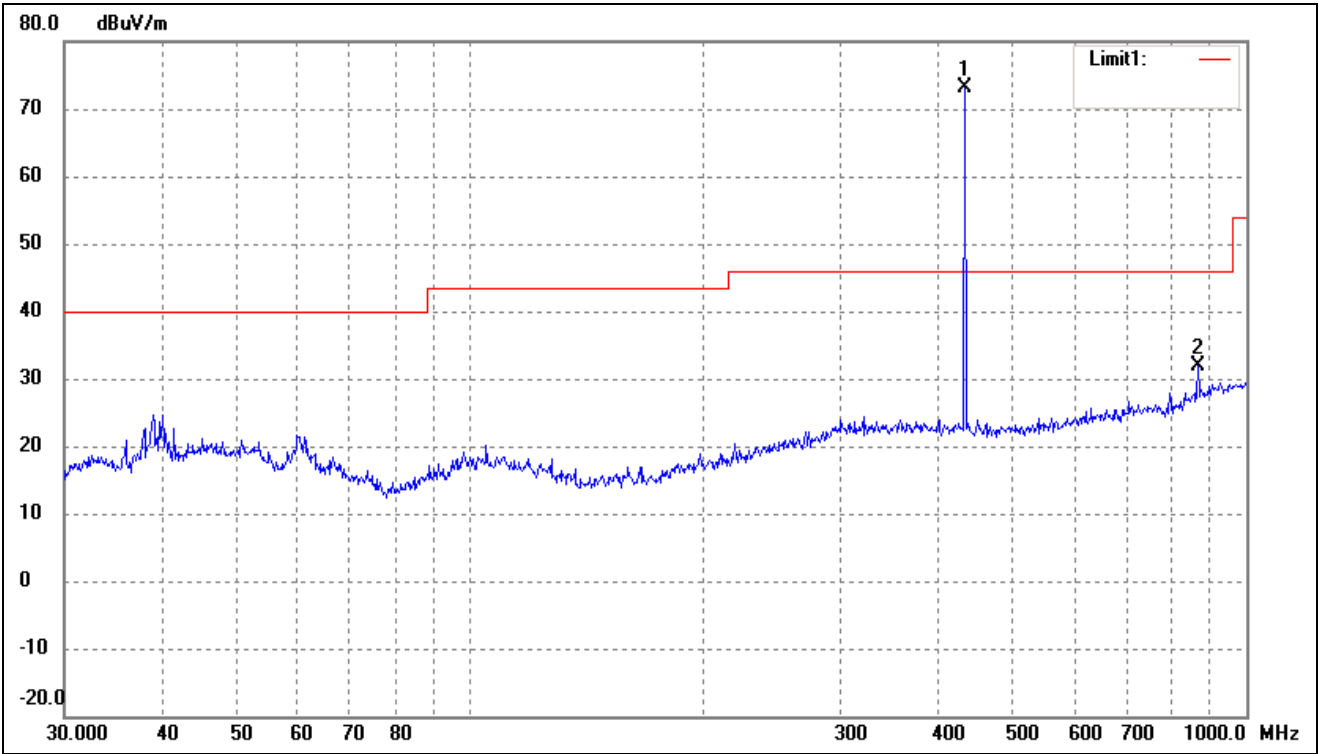


No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	Factor (dB)	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	433.8000	81.26	-8.03	N/A	73.23	92.86	-19.63	74	100	peak
	433.8000	/	/	-30.46	42.77	72.86	-30.09	65	100	Ave
2	867.6000	34.29	-2.45	N/A	31.84	72.86	-41.02	145	100	peak
	867.6000	/	/	-30.46	1.38	52.86	-51.48	131	100	Ave

Above 1GHz

No.	Frequency	Reading	Correct	Duty cycle	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	Factor (dB)	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	1301.400	51.99	-13.87	N/A	38.12	74.00	-35.88	125	150	peak
2	1301.400	/	/	-30.46	7.66	54.00	-46.34	154	150	AVG
3	1735.200	54.27	-11.08	N/A	43.19	72.86	-29.67	169	150	peak
4	1735.200	/	/	-30.46	12.73	52.86	-40.13	61	150	AVG
5	2169.000	50.56	-9.95	N/A	40.61	72.86	-32.25	123	150	peak
6	2169.000	/	/	-30.46	10.15	52.86	-42.71	154	150	AVG
7	2602.800	52.94	-9.15	N/A	43.79	72.86	-29.07	187	150	peak
8	2602.800	/	/	-30.46	13.33	52.86	-39.53	216	150	AVG
9	3036.600	55.12	-8.53	N/A	46.59	72.86	-26.27	139	150	peak
10	3036.600	/	/	-30.46	16.13	52.86	-36.73		150	AVG

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

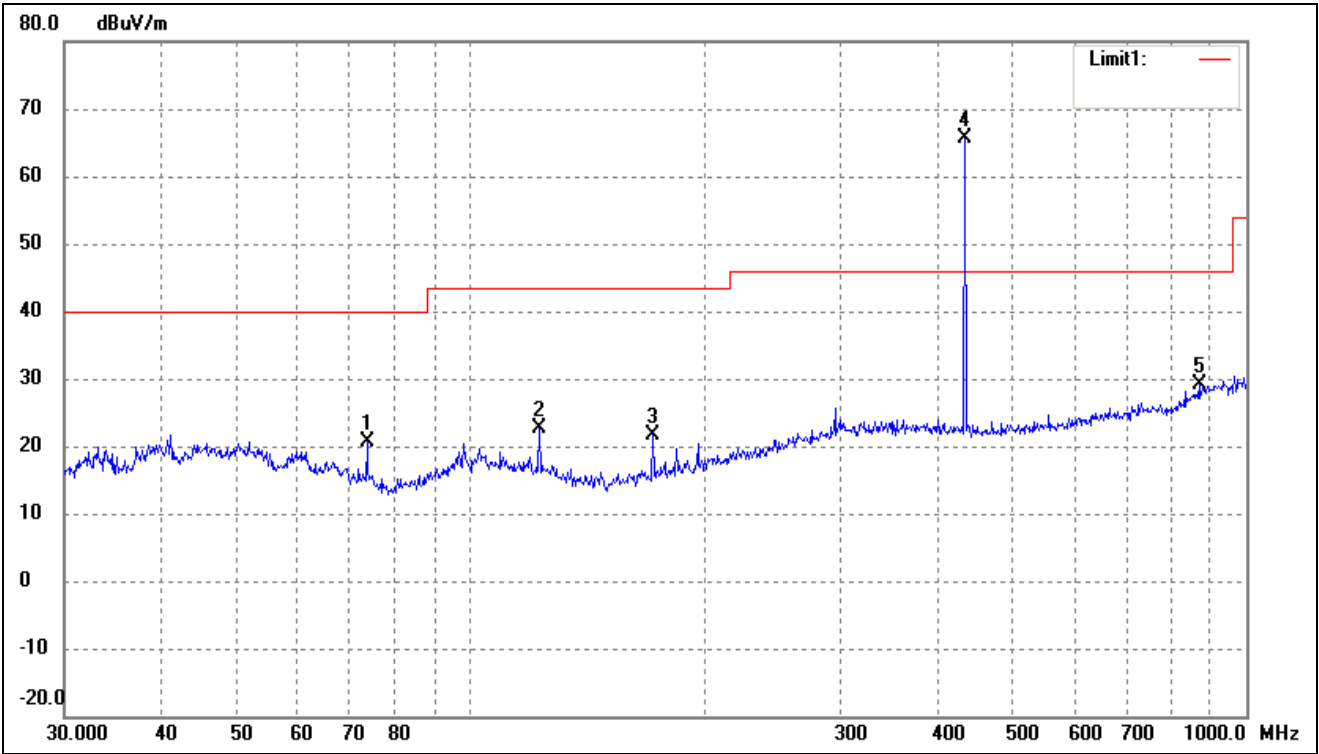

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Duty cycle Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	73.6170	38.64	-17.91	/	20.73	40.00	-19.27	135	100	peak
2	122.8340	39.02	-16.34	/	22.68	43.50	-20.82	212	100	peak
3	171.9946	37.15	-15.51	/	21.64	43.50	-21.86	78	100	peak
4	433.8000	73.75	-8.03	N/A	65.72	92.86	-27.14	32	100	peak
	433.8000	/	/	-30.46	35.26	72.86	-37.60	162	100	Ave
5	867.6000	31.57	-2.42	N/A	29.15	72.86	-43.71	127	100	peak
	867.6000	/	/	-30.46	-1.31	52.86	-54.17	183	100	Ave

Above 1GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Duty cycle Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1301.400	51.55	-13.87	N/A	37.68	74.00	-36.32	47	150	peak
2	1301.400	/	/	-30.46	7.22	54.00	-46.78	124	150	AVG
3	1735.200	50.41	-11.04	N/A	39.37	72.86	-33.49	157	150	peak
4	1735.200	/	/	-30.46	8.91	52.86	-43.95	165	150	AVG
5	2169.000	50.14	-9.95	N/A	40.19	72.86	-32.67	213	150	peak
6	2169.000	/	/	-30.46	9.73	52.86	-43.13	226	150	AVG
7	2602.800	51.26	-9.15	N/A	42.11	72.86	-30.75	217	150	peak
8	2602.800	/	/	-30.46	11.65	52.86	-41.21	87	150	AVG
9	3036.600	51.73	-8.53	N/A	43.20	72.86	-29.66	211	150	peak
10	3036.600	/	/	-30.46	12.74	52.86	-40.12	163	150	AVG

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

The fundamental frequency is 433.8MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.8MHz.

5. 20dB Bandwidth

5.1 Standard Applicable

According to FCC Part 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.2 Test Procedure


With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

5.3 Summary of Test Results/Plots

Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
433.8	223.505	1084.5	Pass

Limit = Fundamental Frequency X 0.25% = 433.8 MHz X 0.25% = 1084.5 kHz

Please refer to the attached plots.

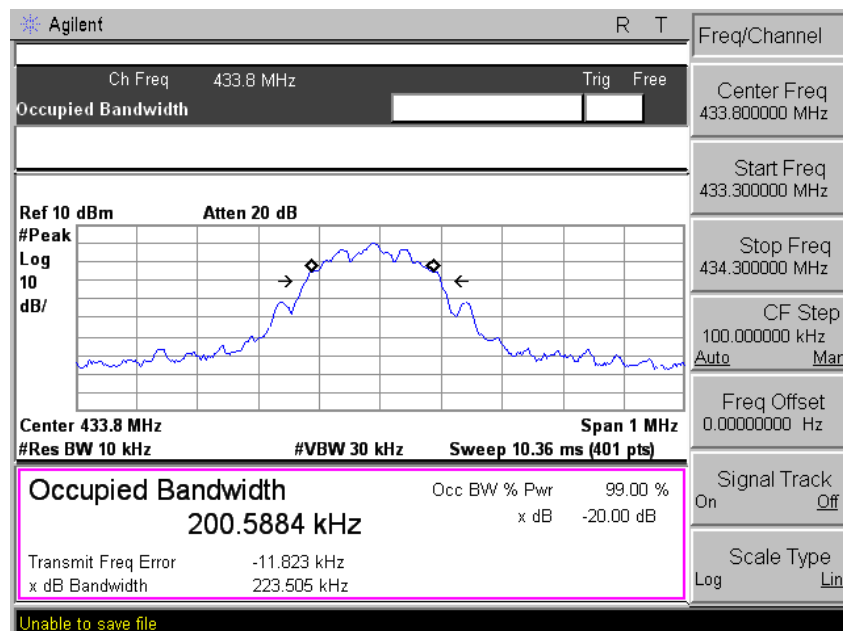

6. Transmission Time

6.1 Standard Applicable

According to FCC 15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.


6.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.8MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

6.3 Summary of Test Results/Plots

Item	Measured Value	Limit	Result
Transmission Time	0.003s	<1s	Pass
Silent Time	16.65s	>10s	Pass
Silent Time/Transmission Time	5550 times	>30 times	Pass

Please refer to the attached plots.

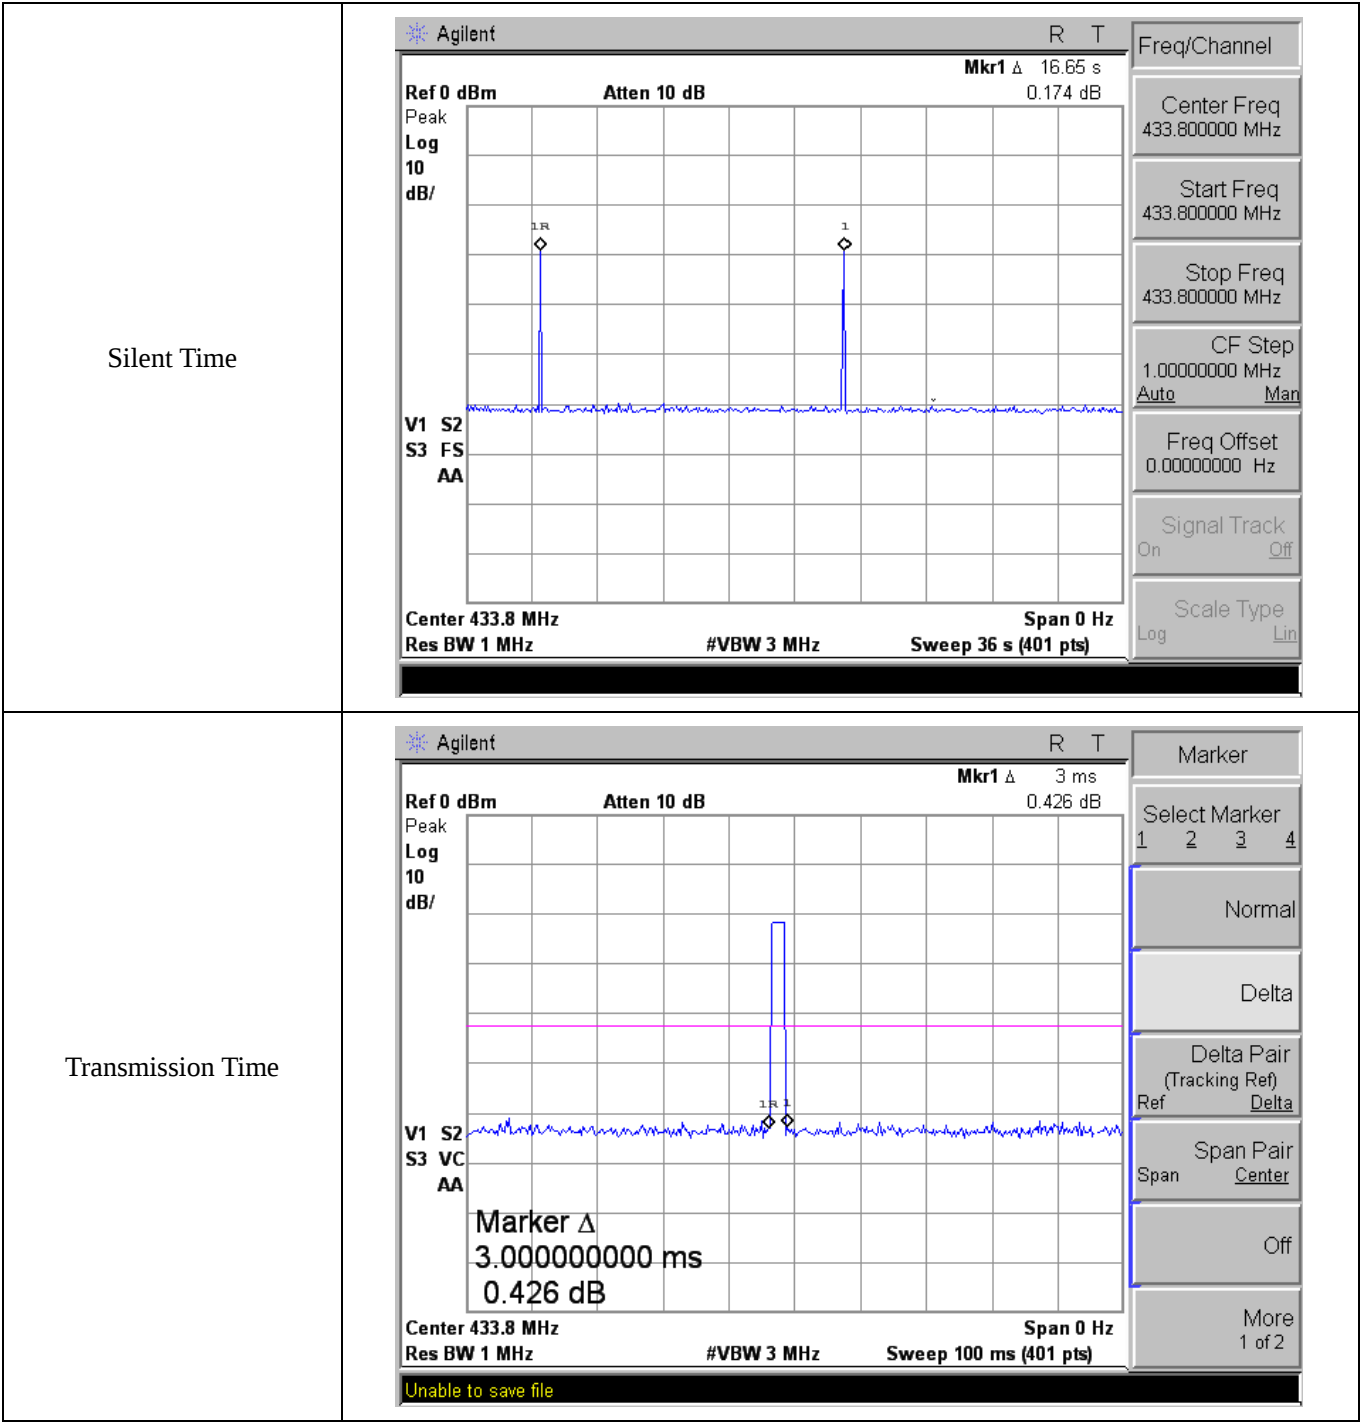

7. Duty Cycle

7.1 Standard Applicable

According to FCC Part 15.231(b)(2) and 15.35(c), for pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.8MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.


7.3 Summary of Test Results/Plots

Type of Pulse	Width of Pulse (ms)	Quantity of Pulse	Transmission Time (ms)	Total Time (T _{on}) (ms)
Pulse 1 (Wide)	3	1	3	3

Test Period (T _p)	Total Time (T _{on})	Duty Cycle	Duty Cycle Factor
ms	ms	%	dB
100	3	3	-30.46

Remark: Duty Cycle Factor=20*log(Duty Cycle)

Please refer to the attached test plots

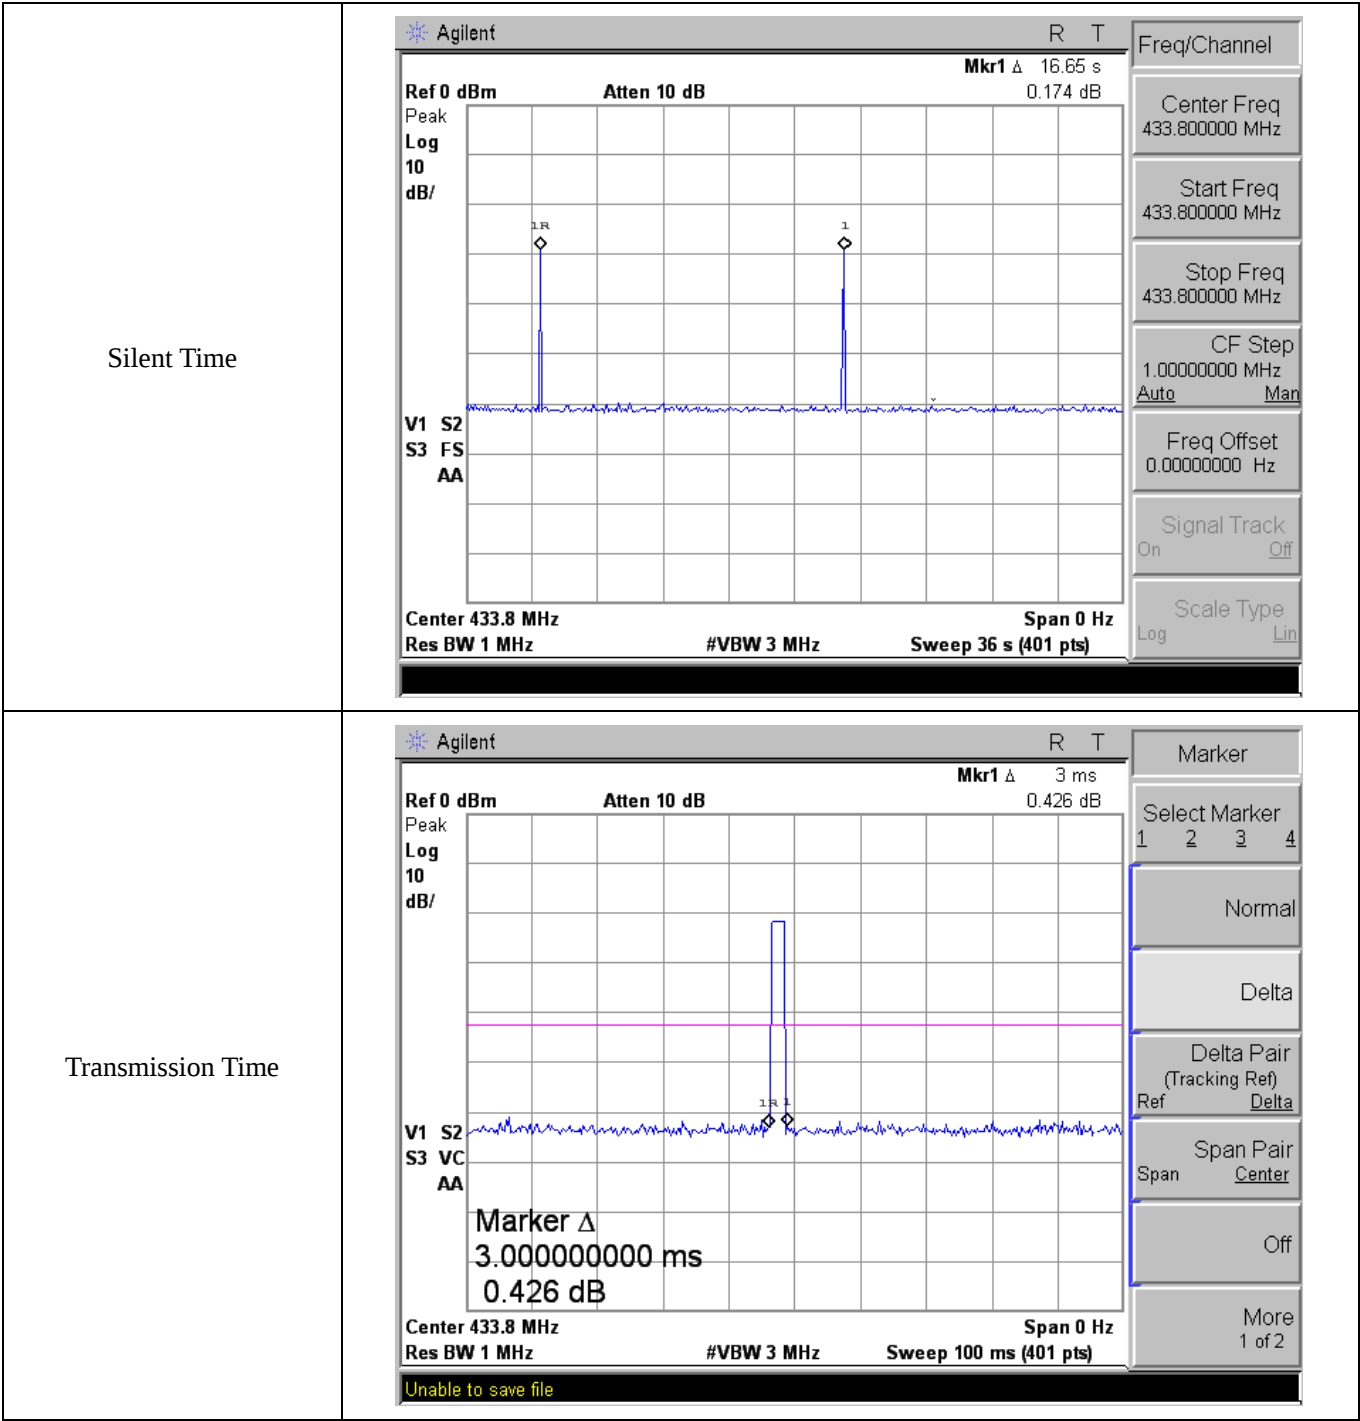

8. Conducted Emissions


8.1 Test Procedure

The setup of EUT is according with per ANSI C63.10:2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

8.2 Basic Test Setup Block Diagram

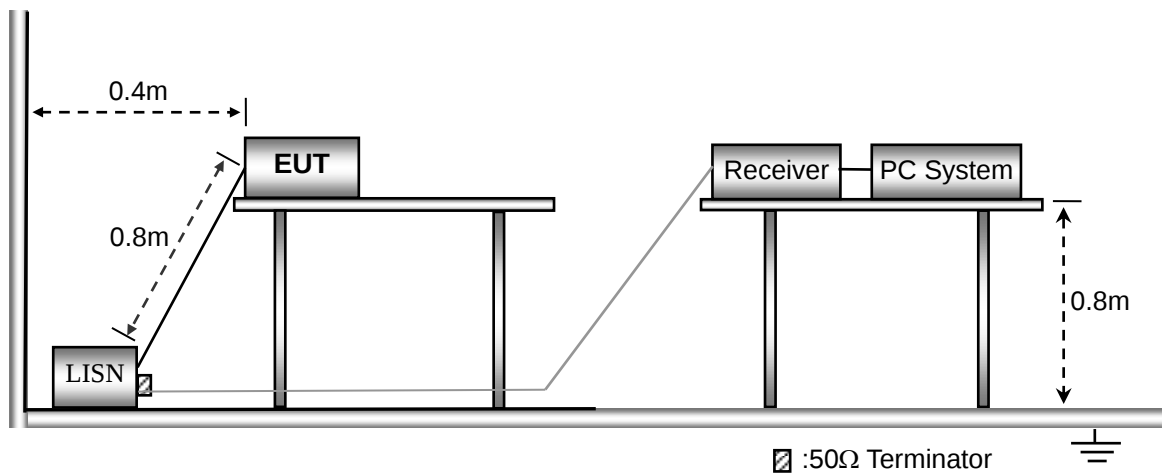

8.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz

Stop Frequency 30 MHz

Sweep Speed Auto

IF Bandwidth..... 10 kHz

Quasi-Peak Adapter Bandwidth 9 kHz

Quasi-Peak Adapter Mode Normal

8.5 Summary of Test Results/Plots

Not applicable

***** END OF REPORT *****