



Prüfbericht-Nr.: Test report no.:	CN23RJTZ (P15C-BT) 001	Auftrags-Nr.: Order no.:	48224548	Seite 1 von 25 Page 1 of 25
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-10-12	
Auftraggeber: Client:	medDV GmbH Rudolf-Diesel-Straße 10-12, 35463 Fernwald, Germany			
Prüfgegenstand: Test item:	Mobile Medical Assistant			
Bezeichnung / Typ-Nr.: Identification / Type no.:	NIDApad			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (BT)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2023-10-04			
Prüfmuster-Nr.: Test sample no.:	A003574313-017			
Prüfzeitraum: Testing period:	2023-10-17 - 2023-11-08			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: compiled by:			genehmigt von: authorized by:	
Datum: Date:	2023-11-23		Ausstellungsdatum: Issue date:	2023-11-23
Stellung / Position:	David Huang Project Manager		Stellung / Position:	Brenda Chen Senior Project Manager
Sonstiges / Other:	Only RF output power, radiated spurious emissions, and mains conducted emission tests were evaluated in this report. For other test results, please refer to module report no.: RF201119E01-2.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(1)	Peak Output Power	Pass
-	15.247(a)(1)	20 dB Bandwidth	Note 1
-	2.1049	99% Occupied Bandwidth	Pass
-	15.247(d)	Conducted Spurious Emission and Band Edges	Pass
5.1.3	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
-	15.247(a)(1)	Hopping Channel Separation	Pass
-	15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass
-	15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note:

1. Refer to module report for the details.
2. If the Frequency Hopping Systems operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1 Antenna Requirement	15
5.1.2 Peak Output Power	16
5.1.3 Radiated Spurious Emissions and Band Edges	19
5.2 MAINS EMISSION	24
5.2.1 Mains Conducted Emission.....	24

Prüfbericht - Nr.: CN23RJTZ (P15C-BT) 001
Test Report No.

Seite 4 von 25
Page 4 of 25

APPENDIX A - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN23RJTZ (P15C-BT) 001
Test Report No.

Seite 5 von 25
Page 5 of 25

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2023-11-23

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Mobile Medical Assistant. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Mobile Medical Assistant
Type Identification	NIDApad
FCC ID	2AWKZ-QCNFA765

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Number	79
Operation Voltage	7.2 Vdc (Battery) 12 Vdc (Adapter)
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
RF Module	QCNFA765
Maximum Output Power (mW)	18.408
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting		
	GFSK	$\pi/4$ -DQPSK	8DPSK
2402	11	11	11
2441	11	11	11
2480	11	11	11

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with an USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	QRCT
---------------	------

The samples were used as follows:
 A003574313-017

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	RF Output Power	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.

RF Output Power

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2402, 2441, 2480	GFSK	1DH5
-	2402 to 2480	2402, 2441, 2480	$\pi/4$ -DQPSK	2DH5
-	2402 to 2480	2402, 2441, 2480	8DPSK	3DH5

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type	Note
-	2402 to 2480	2480	8DPSK	3DH5	Harmonic
-	2402 to 2480	2480	GFSK	1DH5	Bandedge
-	2402 to 2480	2480	8DPSK	3DH5	

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2480	8DPSK	3DH5

Mains Conducted Emission Test

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2480	8DPSK	3DH5

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
RF Output Power	20.8-25.5 °C	59-66 %	Nick Guan
Radiated Spurious Emissions above 1 GHz	22.6-24.5 °C	52-54 %	Ray Huang
Radiated Spurious Emissions below 1 GHz	22.6-24.5 °C	52-54 %	Ray Huang
Mains Conducted Emission	19.1-25.9 °C	50.2-58.9 %	Roger Liao

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


No.	Product	Brand	Model	Description
B	Adapter	FSP	FSP096-AHAN3	I/P: 100-240 Vac, 1.8 A O/P: 12 Vdc, 8 A
-	Battery	medDV	OPM-P05T-C1	7.2 Vdc, 4545 mAh

Support Unit


Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
1	Power cord	Onyx Healthcare	N/A	N/A	NO	NO	180	--

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

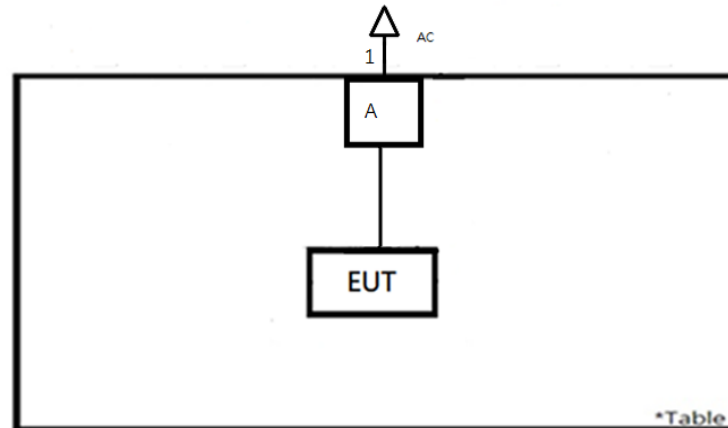

<Mains Conducted Emission mode>

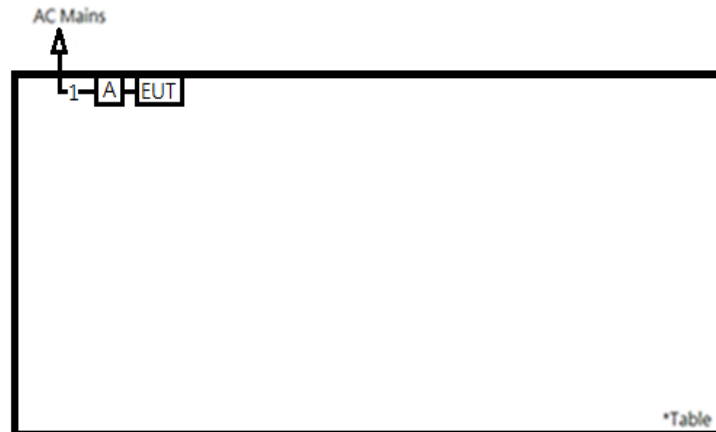

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2.46 dBi. The antenna is PIFA antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.


5.1.2 Peak Output Power

Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2023/03/17	2024/03/16	2023/10/17	2023/10/17
Power Sensor	Anritsu	MA2411B	1901008	2023/03/17	2024/03/16	2023/10/17	2023/10/17

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<GFSK>

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(mW)
Low Channel	2402	12.65	18.408	125
Middle Channel	2441	12.62	18.281	125
High Channel	2480	12.56	18.030	125

< π /4-DQPSK>

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(mW)
Low Channel	2402	10.87	12.218	125
Middle Channel	2441	10.75	11.885	125
High Channel	2480	10.83	12.106	125

<8DPSK>

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(mW)
Low Channel	2402	11.50	14.125	125
Middle Channel	2441	11.28	13.428	125
High Channel	2480	11.39	13.772	125

Average Power
<GFSK>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	12.46	17.620
Middle Channel	2441	12.42	17.458
High Channel	2480	12.35	17.179

< $\pi/4$ -DQPSK >

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	8.28	6.730
Middle Channel	2441	8.14	6.516
High Channel	2480	8.25	6.683

<8DPSK>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	8.29	6.745
Middle Channel	2441	8.15	6.531
High Channel	2480	8.26	6.699

5.1.3 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

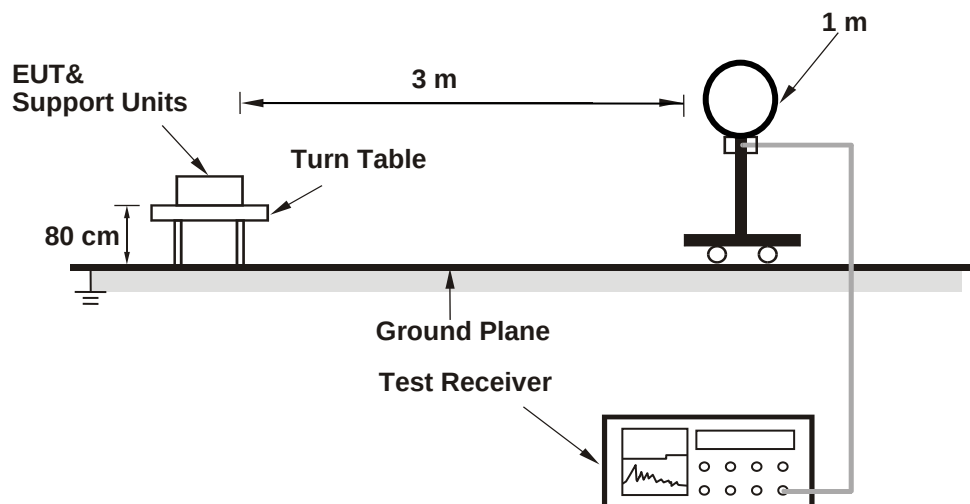

<Radiated Emissions 30 MHz to 1 GHz>

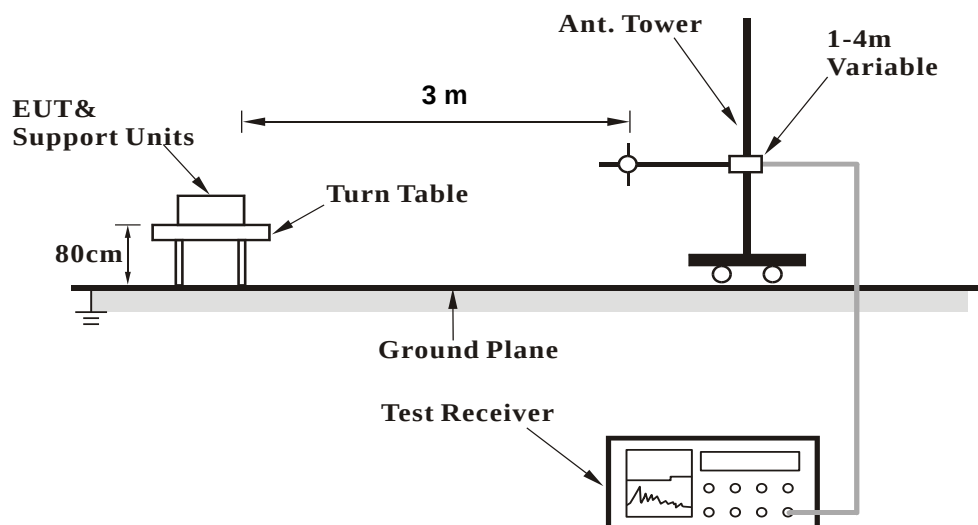

<Radiated Emissions above 1 GHz>

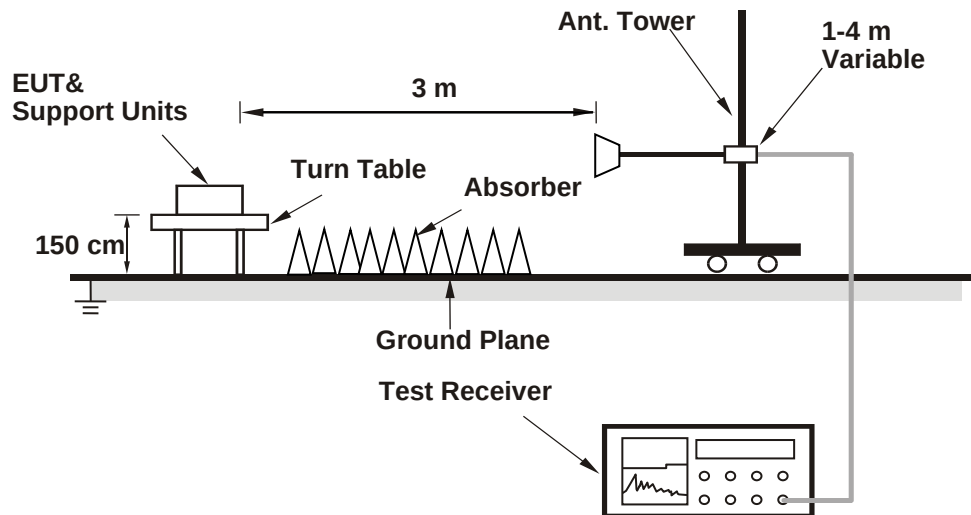

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: CN23RJTZ (P15C-BT) 001
Test Report No.
Seite 21 von 25
Page 21 of 25
Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101509	2023/4/26	2024/4/24
Horn Antenna	ETS-Lindgren	3117	00218929	2022/11/17	2023/11/16
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2023/5/4	2024/5/2
HF-AMP + AC source	EMCI	EMC051845SE	980635	2023/2/16	2024/2/15
HF-AMP + AC source	EMCI	EMC051845SE	980656	2023/1/16	2024/1/15
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2023/3/31	2024/3/29
LF-AMP	Agilent	8447D	2944A107722	2023/3/22	2024/3/20
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Below 30 MHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2023/1/4	2024/1/3
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
5. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Prüfbericht - Nr.: CN23RJTZ (P15C-BT) 001
Test Report No.

Seite 23 von 25
Page 23 of 25

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix A.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

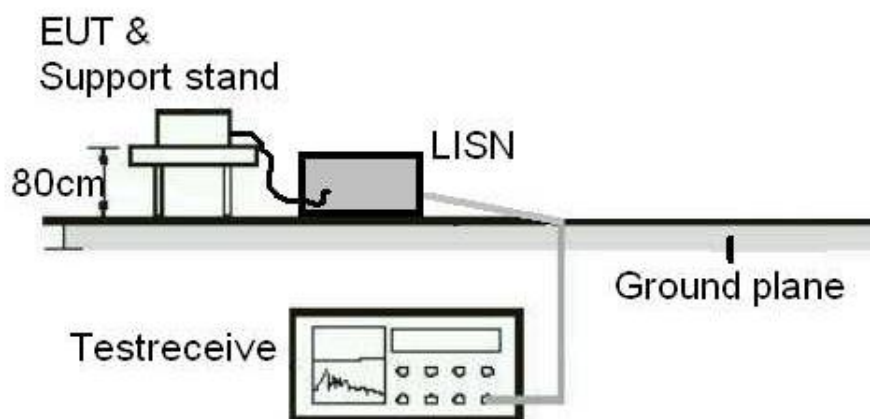

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2023/10/23	2024/10/21
EMI Test Receiver	R&S	ESCI	101094	2022/11/24	2023/11/23

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix A.

Appendix A: Test Results of Radiated Spurious Emissions & Mains

Conducted Emission Test


Band Edges, 2.31GHz ~ 2.9GHz

GFSK

High Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

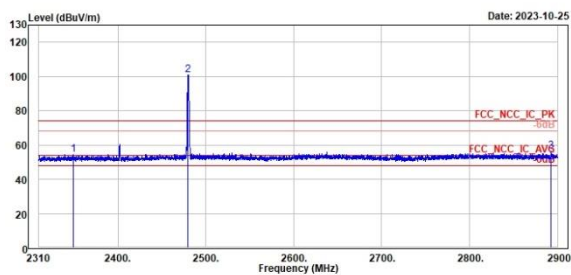


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2349.77	54.54	16.51	38.03	74.00	-19.46	315	252	Peak	Horizontal		
2 *	2480.00	101.00	62.61	38.39	74.00	-27.00	315	252	Peak	Horizontal		
3	2892.33	56.57	17.71	38.86	74.00	-17.43	315	252	Peak	Horizontal		

High Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

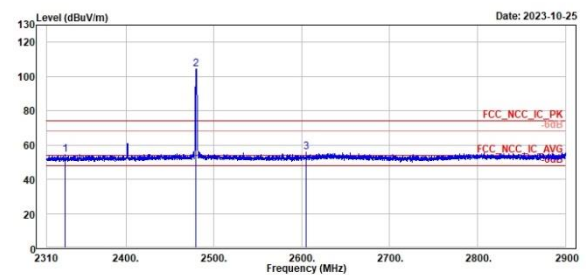


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2331.24	54.46	16.60	37.86	74.00	-19.54	183	174	Peak	Vertical		
2 *	2480.00	104.29	65.90	38.39	74.00	-30.29	183	174	Peak	Vertical		
3	2604.76	55.73	17.20	38.53	74.00	-18.27	183	174	Peak	Vertical		

GFSK

High Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

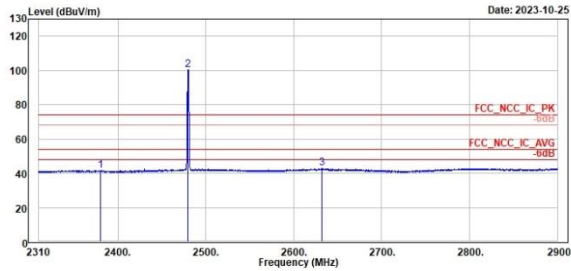

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2380.68	41.76	3.75	38.01	54.00	-12.24	315	252	Average	Horizontal	
2 *	2480.00	100.55	62.16	38.39	54.00	46.55	315	252	Average	Horizontal	
3	2632.38	42.81	4.30	38.51	54.00	-11.19	315	252	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

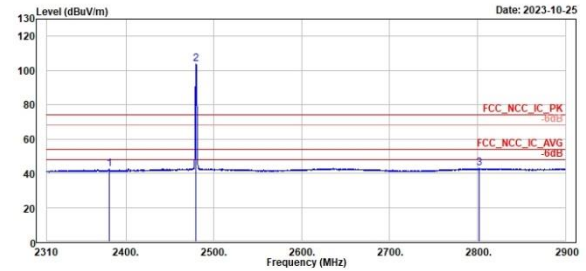


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2380.00	42.37	4.36	38.01	54.00	-11.63	183	174	Average	Vertical	
2 *	2480.00	103.67	65.28	38.39	54.00	49.67	183	174	Average	Vertical	
3	2801.94	42.80	4.13	38.67	54.00	-11.20	183	174	Average	Vertical	

8DPSK

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

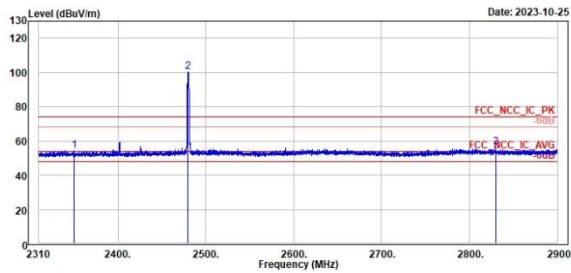

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2350.12	54.23	16.20	38.03	74.00	-19.77	314	242	Peak	Horizontal	
2 *	2480.00	100.14	61.75	38.39	74.00	26.14	314	242	Peak	Horizontal	
3	2829.67	56.42	17.71	38.71	74.00	-17.58	314	242	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

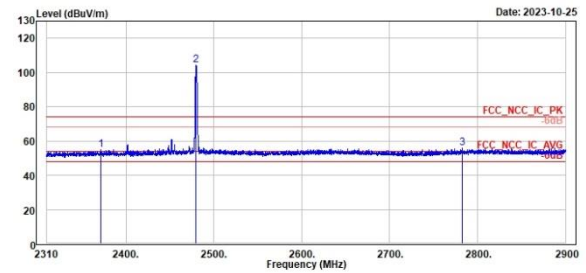


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2371.95	54.68	16.66	38.02	74.00	-19.32	368	193	Peak	Vertical	
2 *	2480.00	104.08	65.69	38.39	74.00	30.08	368	193	Peak	Vertical	
3	2782.35	56.06	17.55	38.51	74.00	-17.94	368	193	Peak	Vertical	

8DPSK

High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

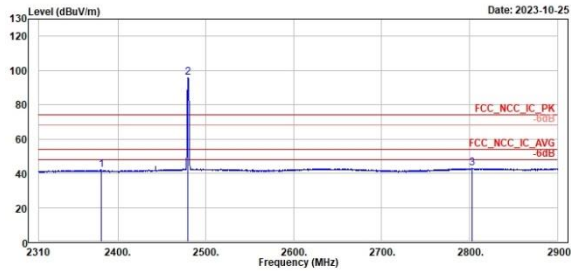


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2380.92	42.06	4.05	38.01	54.00	-11.94	314	242	Average	Horizontal	
2 *	2480.00	95.69	57.39	38.39	54.00	41.69	314	242	Average	Horizontal	
3	2803.12	42.86	4.19	38.67	54.00	-11.14	314	242	Average	Horizontal	

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

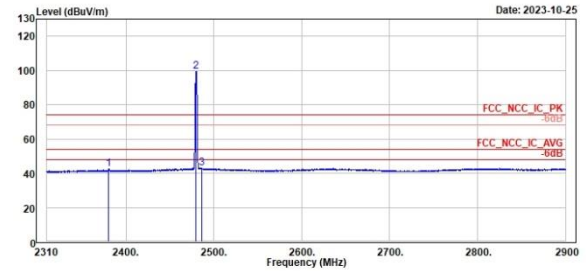

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2380.56	42.60	4.59	38.01	54.00	-11.40	368	193	Average	Vertical	
2 *	2480.00	99.56	61.17	38.39	54.00	45.56	368	193	Average	Vertical	
3	2485.94	43.03	4.64	38.39	54.00	-10.97	368	193	Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


8DPSK

High Channel (Open) 9kHz~150kHz

High Channel (Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

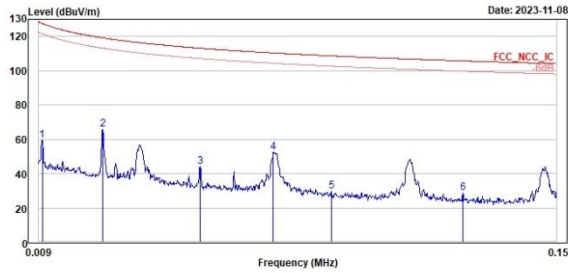

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		cm	deg			
1	0.01	59.31	41.59	17.72	127.60	-68.29	100	107	Peak	Open	
2	0.03	65.53	46.58	18.95	119.13	-53.60	100	368	Peak	Open	
3	0.05	44.02	24.98	19.04	113.11	-69.09	100	173	Peak	Open	
4	0.07	52.30	33.74	18.56	110.34	-58.04	100	189	Peak	Open	
5	0.09	29.61	11.42	18.19	108.64	-79.03	100	60	Peak	Open	
6	0.12	28.75	10.73	18.02	105.70	-76.95	100	169	Peak	Open	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

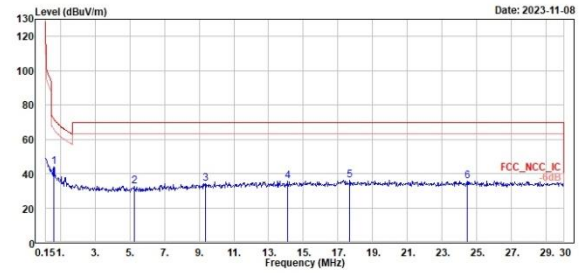

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB		cm	deg			
1	0.63	43.61	24.90	18.91	71.65	-27.04	100	299	Peak	Open	
2	5.25	32.67	13.06	19.61	69.50	-36.83	100	49	Peak	Open	
3	9.34	34.18	12.87	21.31	69.50	-35.32	100	26	Peak	Open	
4	14.12	35.72	13.84	21.88	69.50	-33.78	100	299	Peak	Open	
5	17.67	35.94	13.81	22.13	69.50	-33.56	100	102	Peak	Open	
6	24.45	35.63	13.29	22.34	69.50	-33.87	100	207	Peak	Open	


Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

8DPSK

High Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

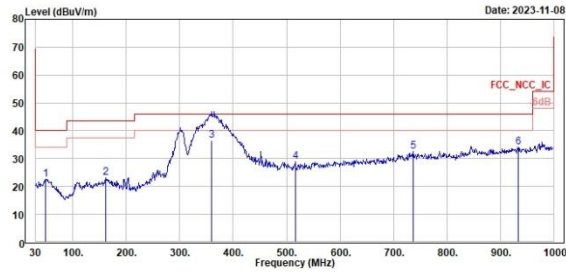

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	49.48	22.54	28.17	-5.63	48.00	-17.46	225	360	Peak	Horizontal		
2	161.92	23.18	28.88	-5.70	43.50	-20.32	180	203	Peak	Horizontal		
3	359.80	36.55	40.11	-3.56	46.00	-9.45	100	348	QP	Horizontal		
4	515.97	28.93	30.12	-1.19	46.00	-17.07	154	360	Peak	Horizontal		
5	737.13	32.47	29.92	2.55	46.00	-13.53	300	224	Peak	Horizontal		
6	933.07	33.95	28.54	5.41	46.00	-12.05	280	172	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

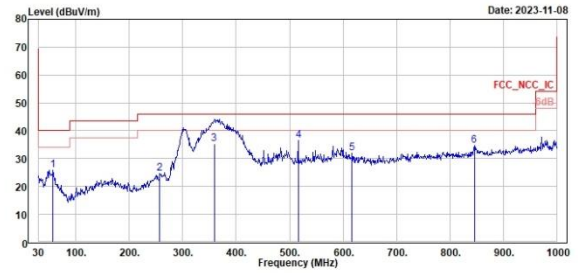

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	57.16	25.94	31.92	-5.98	48.00	-14.06	180	50	Peak	Vertical		
2	256.98	24.59	30.83	-6.24	46.00	-21.41	200	325	Peak	Vertical		
3	358.83	35.15	38.74	-3.59	46.00	-10.85	200	259	QP	Vertical		
4	515.97	36.38	37.57	-1.19	46.00	-9.62	100	195	Peak	Vertical		
5	616.85	31.83	31.19	0.64	46.00	-14.17	100	196	Peak	Vertical		
6	845.77	34.88	30.70	4.18	46.00	-11.20	200	56	Peak	Vertical		


Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

8DPSK

High Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

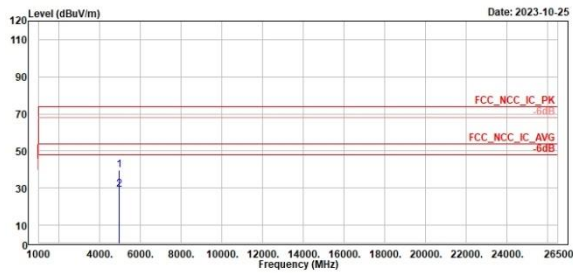

High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

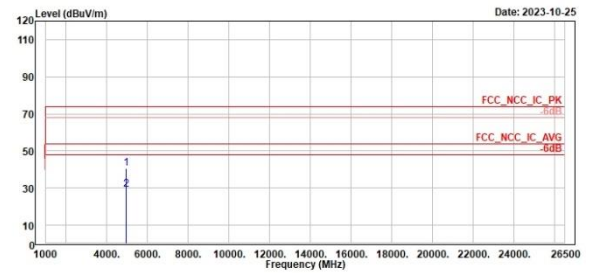

Mains Conducted Emission, TX 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

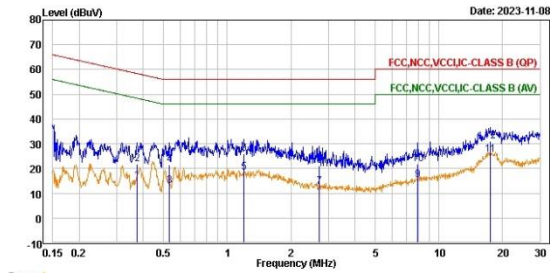


Trace: 1

Freq	Level	Read	Limit	Over	Pol/Phase	Note
MHz	dBuV	Level Factor	Line	Limit	Remark	
		dB		dB		
1	0.38	14.86	5.23	9.63	48.38 -33.52 Average	line1
2	0.38	21.76	12.13	9.63	58.38 -36.62 QP	line1
3	0.53	12.91	3.28	9.63	46.00 -33.09 Average	line1
4	0.53	21.33	11.70	9.63	56.00 -34.67 QP	line1
5	1.20	18.35	8.71	9.64	46.00 -27.65 Average	line1
6	1.20	25.78	16.14	9.64	56.00 -30.22 QP	line1
7	2.71	12.75	3.09	9.66	46.00 -33.25 Average	line1
8	2.71	21.85	11.39	9.66	56.00 -34.95 QP	line1
9	7.93	15.20	5.46	9.74	50.00 -34.80 Average	line1
10	7.93	21.67	11.93	9.74	60.00 -38.33 QP	line1
11	17.43	25.66	15.89	9.77	50.00 -24.34 Average	line1
12	17.43	31.23	21.46	9.77	60.00 -28.77 QP	line1



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

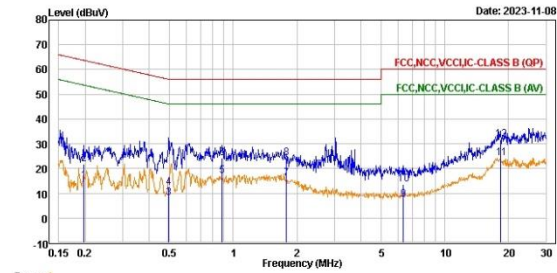

Trace: 1

Freq	Level	Read	Limit	Over	Pol/Phase	Note
MHz	dBuV	Level Factor	Line	Limit	Remark	
		dB		dB		
1	0.20	14.97	5.35	9.62	53.76 -38.79 Average	neutral
2	0.20	21.88	12.26	9.62	63.76 -41.88 QP	neutral
3	0.50	8.01	-1.62	9.63	46.06 -38.05 Average	neutral
4	0.50	12.35	2.72	9.63	56.06 -43.71 QP	neutral
5	0.88	16.97	7.33	9.64	46.00 -29.03 Average	neutral
6	0.88	24.07	14.43	9.64	56.00 -31.93 QP	neutral
7	1.79	16.07	6.41	9.66	46.00 -29.93 Average	neutral
8	1.79	24.14	14.46	9.66	56.00 -31.86 QP	neutral
9	6.37	7.34	-2.40	9.74	50.00 -42.66 Average	neutral
10	6.37	13.77	4.03	9.74	60.00 -46.23 QP	neutral
11	18.41	24.38	14.53	9.85	50.00 -25.62 Average	neutral
12	18.41	31.60	21.75	9.85	60.00 -28.40 QP	neutral