


Install Guide

WH32 VLink Wireless Hub

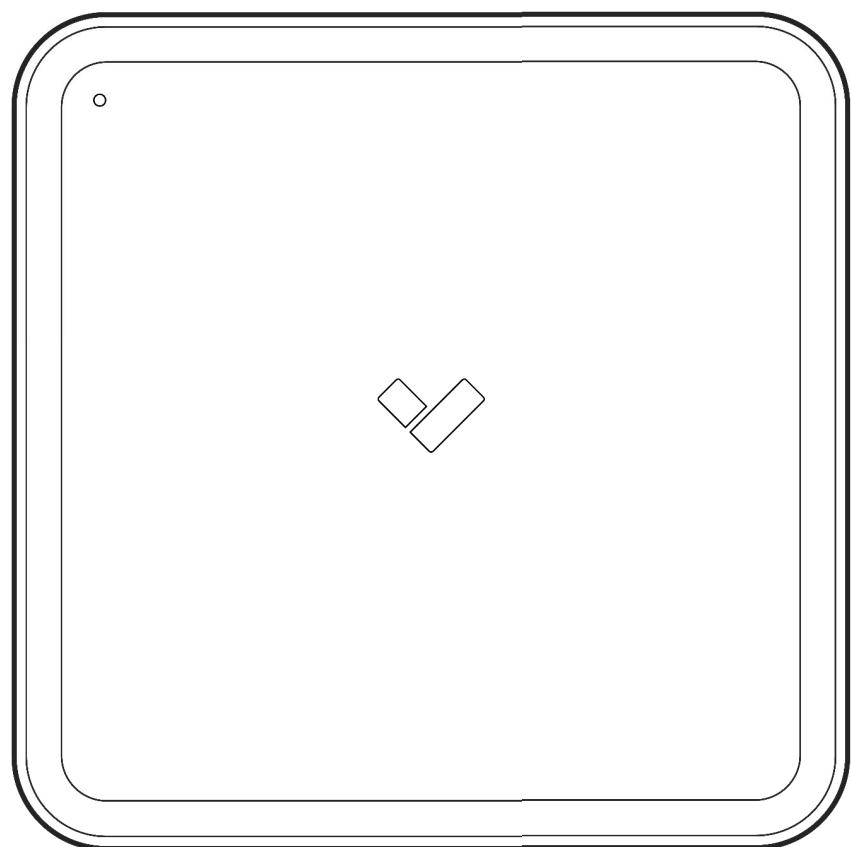

Document

Document Details

Version

V1.0 20240802

(V1.0 published 20240802)

*
UPDATE ON DAY OF
PUBLICATION

Firmware

Firmware version can be verified on Verkada Command command.verkada.com.

Product Models

This install guide pertains to model WH32.

© Copyright 2024 Verkada Inc. All rights reserved.

Verkada and the Verkada logo are registered trademarks or service marks of Verkada Inc. ("Verkada"). All other trademarks are the property of their respective owners.

Verkada may make changes to this document at any time without notice. The information presented herein may be inaccurate or outdated, and Verkada is under no obligation to maintain it. ALL INFORMATION IS PROVIDED "AS-IS" AND WITHOUT ANY WARRANTIES, IMPLIED, EXPRESS, OR OTHERWISE. VERKADA DISCLAIMS LIABILITY FOR ALL DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, ARISING OUT OF USE OF THIS DOCUMENT.

Any intellectual property rights relating to Verkada products are and shall remain Verkada's exclusive property. Use of any Verkada product is subject to Verkada's end user agreement or other executed agreement with Verkada. No license, either expressed or implied, to use or distribute any Verkada product is granted under this document.


This document may not be sold, resold, licensed or sublicensed and may not be transferred without Verkada's prior written consent. No part of this document may be reproduced in whole or in part without the express written consent of Verkada.

Introduction


What's in the box




Top Cover
(Attached to Hub)

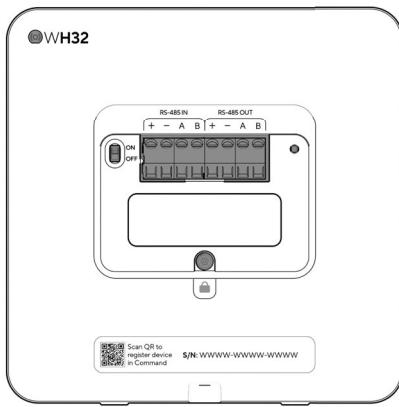

VLink Wireless Hub

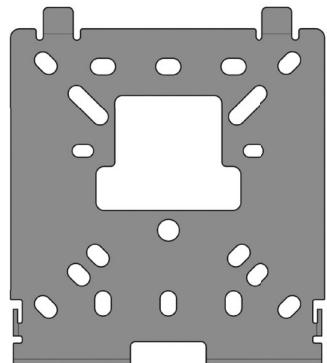


Mount Plate
(Attached to Hub)



Wall Anchors (4 pcs)
Length: XXmm



Wall Screws (4 pcs)
Length: XXmm Drive: XX



T10 Security Torx Screwdriver

What you'll need

- #2 Phillips driver (screwdriver or power drill)
- 7/32 inch (5.5mm) drill bit if using wall anchors

Placement

[EDIT]

Place the product on a wall, etc.


Connect

For easy registration and setup, scan the QR code on the product.

If you prefer to manually register your product, please proceed to:
verkada.com/start

Introduction

Overview

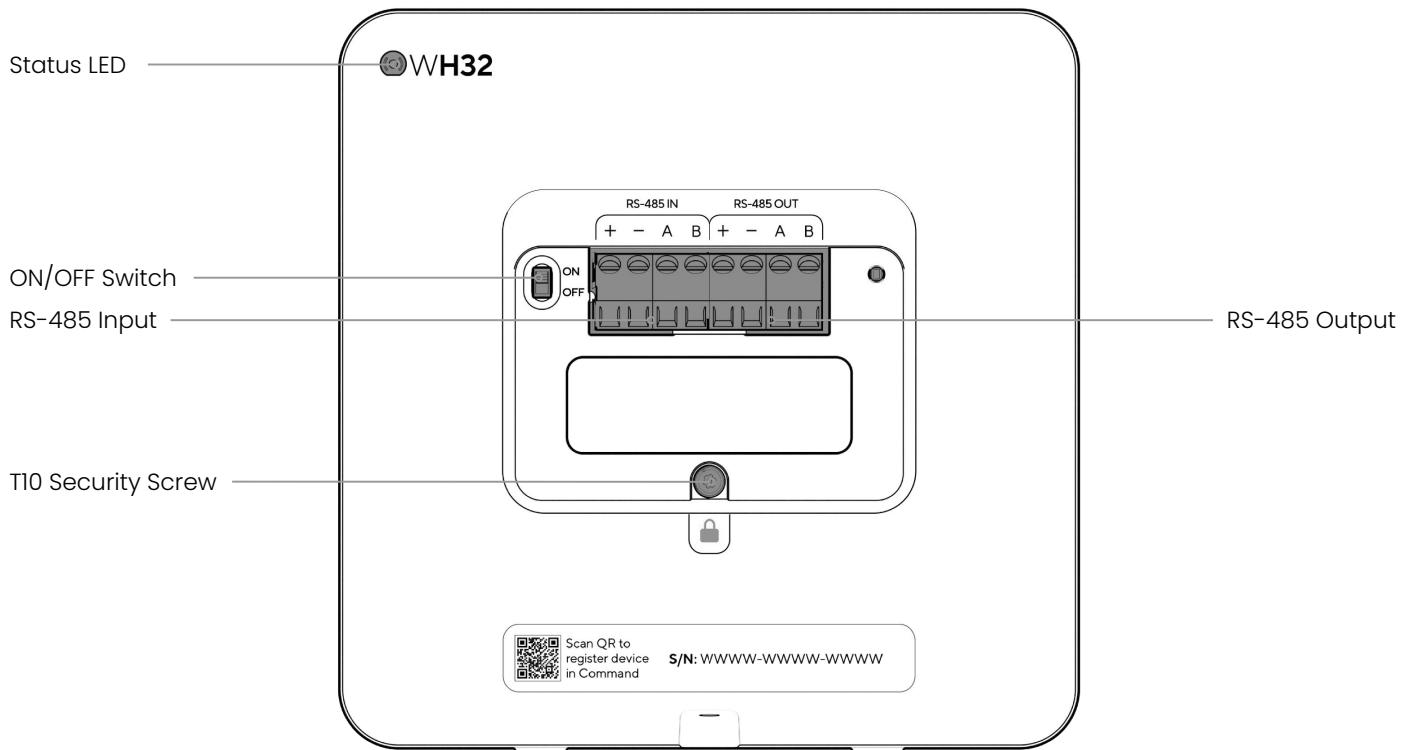

LED Behaviors

● Solid Orange

The Hub is on and booting up.

💡 Flashing Orange

The Hub is updating firmware.

● Solid Blue

The Hub is running and online.


💡 Flashing Blue

The Hub is running and offline.



Introduction

Mount Plate Overview

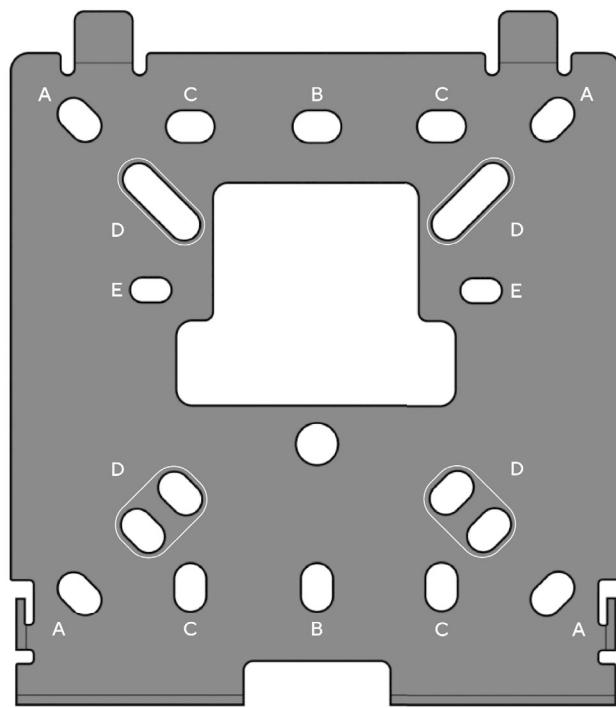

Mount plate details

[EDIT]

A Wall/Ceiling/Square Junction Box
(4 inches / 101.6 mm)

B Single Gang Junction Box

C Double Gang Junction Box

D Round Junction Box

(4 inches / 101.6 mm) and (3½ inches / 88.9 mm)

E European Junction Box

Introduction

Technical Specifications

Power Consumption	0.16W standby, 1.5W maximum. (16mA - 150mA current draw @ 10VDC input)
Input Voltage	10-36 VDC Input
Output Voltage	36V +/- 3%, 700mA max. (Only available with VDC input present)
Battery Life	24-hour battery backup (1200mAh rechargeable Ni-MH battery)
RF connectivity	863-928 MHz with a maximum Tx power of 20 dBm
I/O ports	Two RS485, work independently
LEDs	Status LEDs: RGB + Orange
Operating Temp. & Humidity	0°C-50°C / 32°F-122°, 0-90% RH non-condensing
Dimension	5.53 (in) x 5.53 (in) x 1.34 (in)
Compliance	FCC, CE, AUS, NZ

Installation

Preparation


Remove top cover

Remove mount plate


Installation

Mounting

Fasten the Mount Plate using the necessary mounting screw holes. Cut a hole into the wall if planning on routing the cables via the wall.

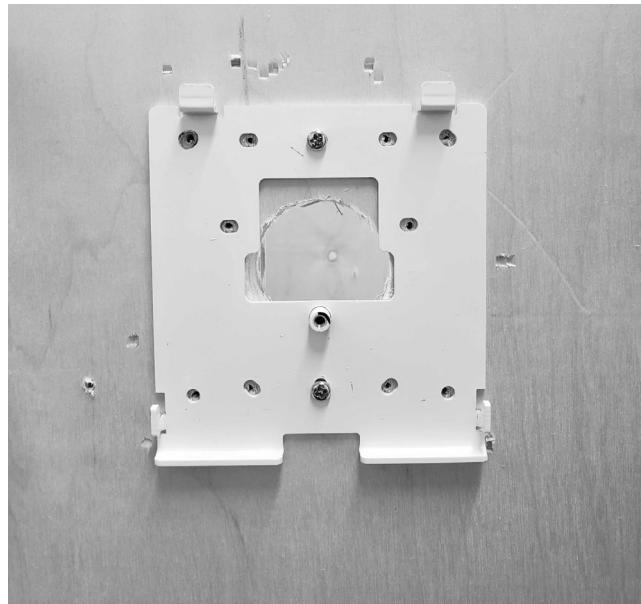

Route the necessary cabling through the holes in the wall and Mount Plate. Strip the necessary wires.

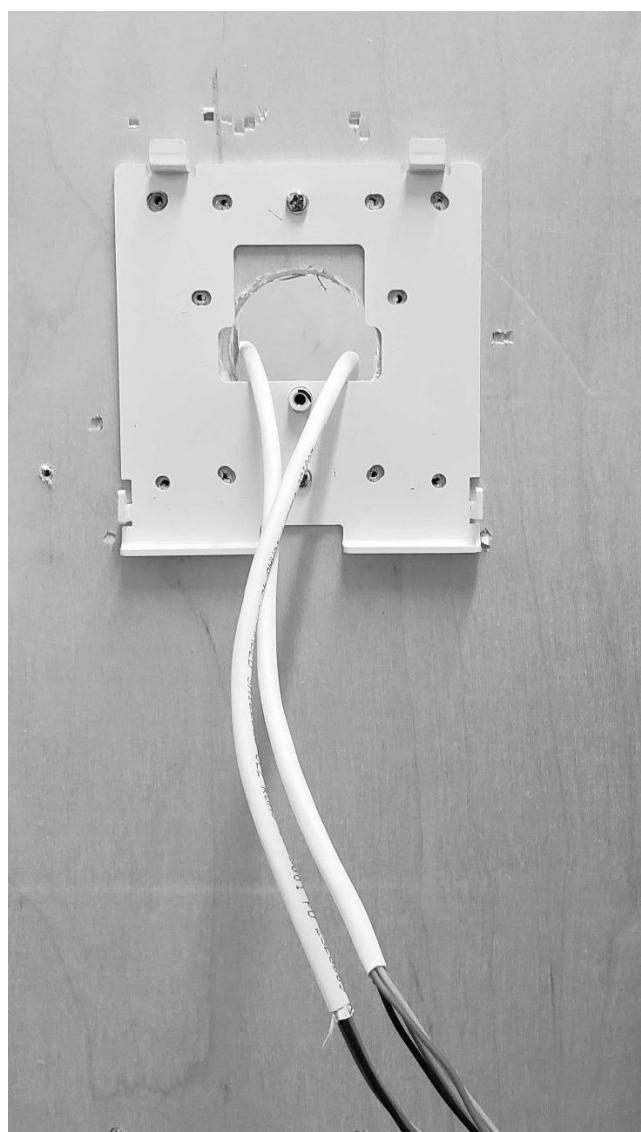

Installation **Mounting**

Pull the cables through the opening in the middle of the device.



Align the device on top of the Mount Plate and slide down to secure.




Installation **Mounting**

Using the T10 security torx driver, fasten down the security screw in the middle of the device



Connect the cable ends to the terminal blocks and push the excess back into the wall

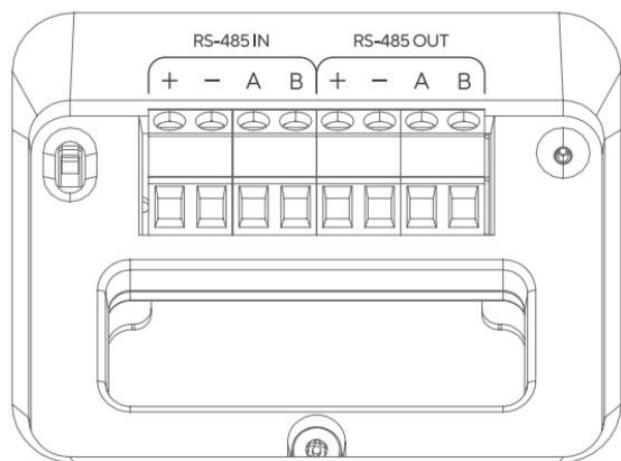

Installation **Mounting**

Once the terminal block connections are made, turn the switch to the ON position.



Toe in the Top Cover by hooking over the device.




Fasten the security screw on the bottom of the device




Installation

Mounting

Fasten the Mount Plate using the necessary mounting screw holes. Cut a hole into the wall if planning on routing the cables via the wall.

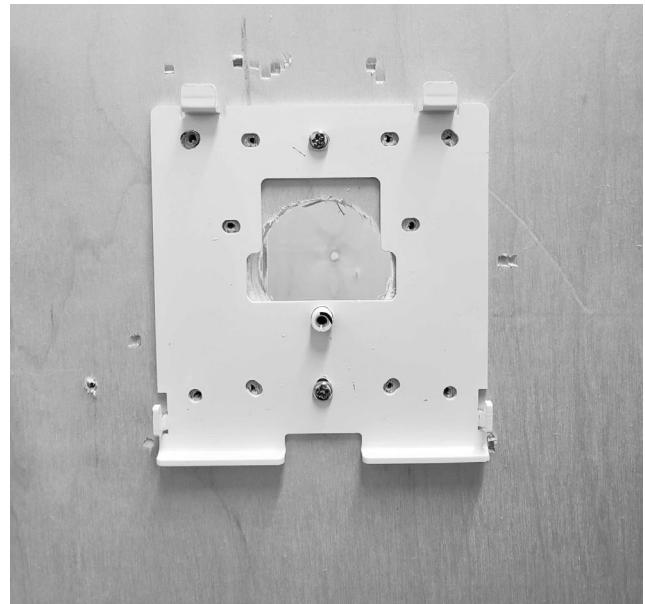

Align the device on top of the Mount Plate and slide down to secure.

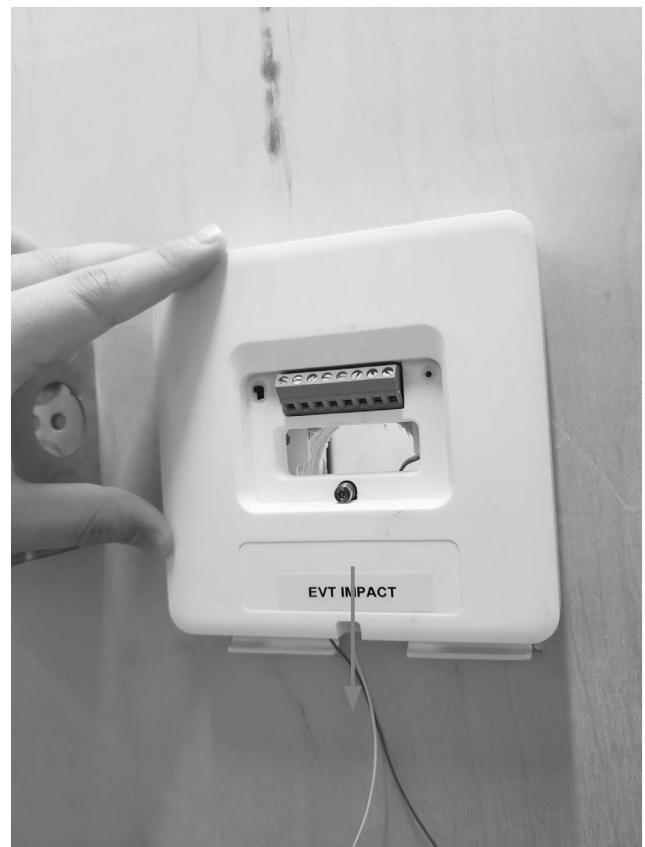

Installation **Mounting**

Using the T10 security torx driver, fasten down the security screw in the middle of the device




Push the cables through the top opening on the device and pull the ends through the middle cutout



Installation **Mounting**

Connect the cable ends to the terminal blocks and pull the excess from the top

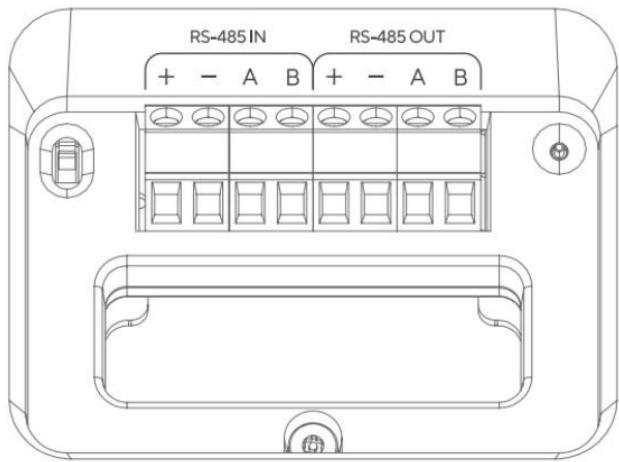


Remove the small plastic door on the top of the cover.




Installation **Mounting**

Once the terminal block connections are made, turn the switch to the ON position.

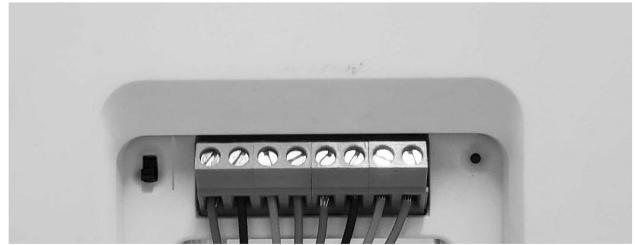

Toe in the Top Cover by hooking over the device.

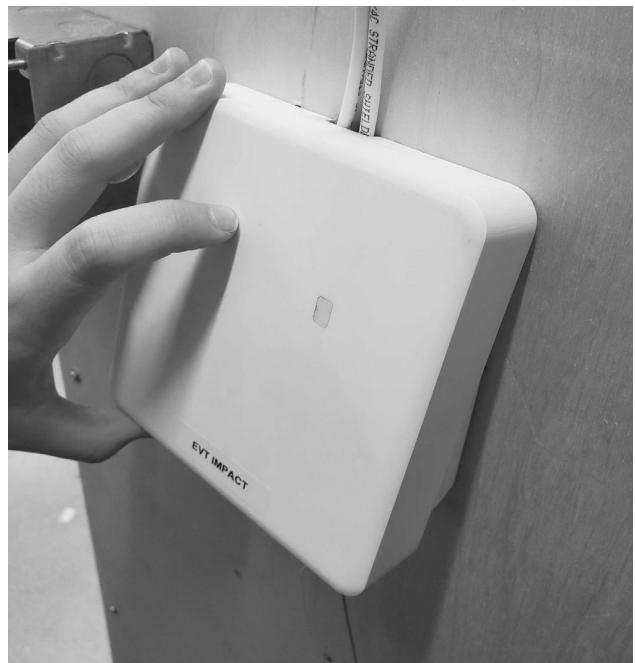


Fasten the security screw on the bottom of the device




Installation

Mounting

Fasten the Mount Plate using the necessary mounting screw holes. Cut a hole into the wall if planning on routing the cables via the wall.

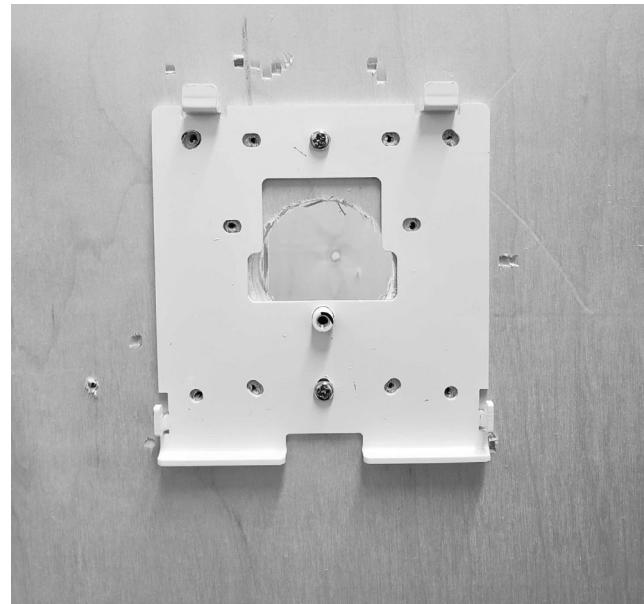

Align the device on top of the Mount Plate and slide down to secure.

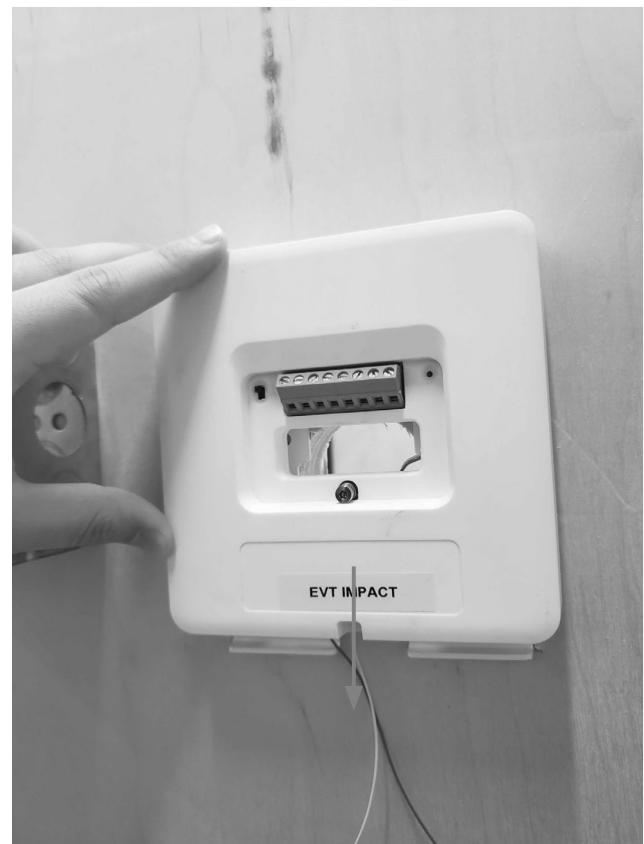

Installation **Mounting**

Using the T10 security torx driver, fasten down the security screw in the middle of the device




Push the cables through the bottom opening on the device and pull the ends through the middle cutout



Installation **Mounting**

Connect the cable ends to the terminal blocks and pull the excess from the top

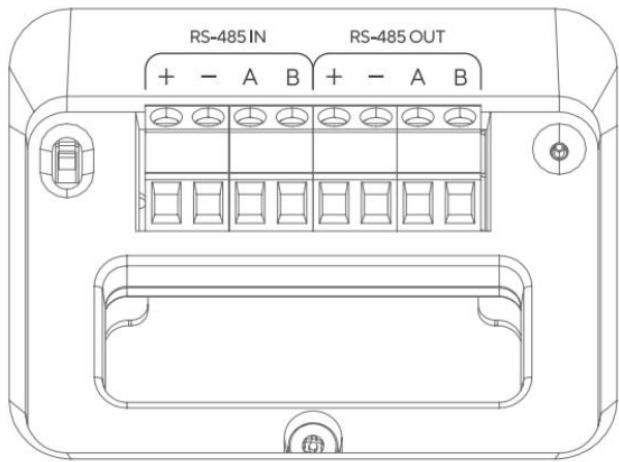


Remove the small plastic door on the bottom of the cover.



Installation **Mounting**

Once the terminal block connections are made, turn the switch to the ON position.

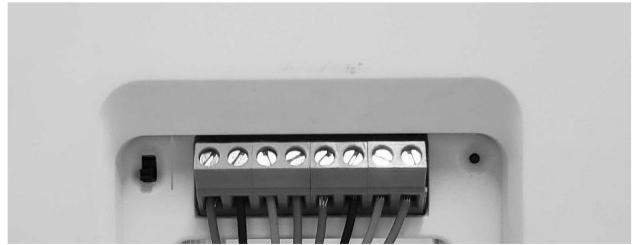

Toe in the Top Cover by hooking over the device.



Fasten the security screw on the bottom of the device



Appendix Compliance

FCC Compliance	<p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.</p> <p>IMPORTANT NOTE : FCC Radiation Exposure Statement : This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.</p>
IC Statement	<p>This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>IC Radiation Exposure Statement: This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.</p> <p>Le présent appareil est conforme aux CNR d' ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.</p> <p>Déclaration d'exposition aux rayonnements d'IC : Cet équipement est conforme aux limites d'exposition aux rayonnements IC RSS-102 définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.</p>

Appendix

Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.


Sincerely,
The Verkada Team
verkada.com/support

[DELETE BEFORE PUBLICATION] Document Assets

Signal	AWG	Conductor	Shielded	Max Length
Power (22 Gauge)	22	Yes	Yes	600 ft
Power (18 Gauge)	18	Yes	Yes	1500 ft

[EDIT] Warning

Text that customer needs to see

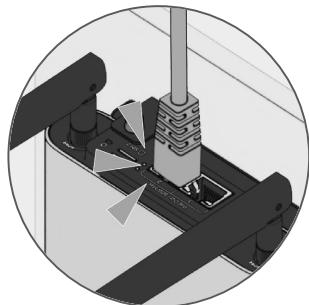

M4 x 25mm PH2 wall screws
(4 pcs)

