



# TEST REPORT

**Report No.** ..... : **CHTEW21050072**

**Project No.** ..... : **SHT2104021604EW**

**FCC ID** ..... : **2AWVP-MAROMX4G**

**Applicant's name** ..... : **NVISOL Ltd**

**Address** ..... : **Ha'Alon 6, Afula, Israel**

**Test item description** ..... : **Camera**

**Trade Mark** ..... : **-**

**Model/Type reference** ..... : **MAROM X 4G US**

**Listed Model(s)** ..... : **-**

**Standard** ..... : **FCC 47 CFR Part 2.1093**  
**IEEE Std C95.1, 1999 Edition**  
**IEEE 1528: 2013**

**Date of receipt of test sample** ..... : **Apr.12, 2021**

**Date of testing** ..... : **Apr.13, 2021-May.13, 2021**

**Date of issue** ..... : **May.14, 2021**

**Result** ..... : **PASS**

Report verification:



Compiled by  
( position+printedname+signature).... : File administrators: Fanghui Zhu

*Fanghui Zhu*

Supervised by  
( position+printedname+signature).... : Test Engineer: Patrick Qiu

*Patrick Qiu*

Approved by  
( position+printedname+signature).... : Manager: Hans Hu

*Hans Hu*

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd**

**Address** ..... : **1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China**

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

|            |                                                            |           |
|------------|------------------------------------------------------------|-----------|
| <u>1.</u>  | <u>Statement of Compliance</u>                             | <u>3</u>  |
| <u>2.</u>  | <u>Test Standards and Report version</u>                   | <u>4</u>  |
| 2.1.       | Test Standards                                             | 4         |
| 2.2.       | Report version                                             | 4         |
| <u>3.</u>  | <u>Summary</u>                                             | <u>5</u>  |
| 3.1.       | Client Information                                         | 5         |
| 3.2.       | Product Description                                        | 5         |
| 3.3.       | RF Specification Description                               | 6         |
| 3.4.       | Testing Laboratory Information                             | 7         |
| 3.5.       | Environmental conditions                                   | 7         |
| <u>4.</u>  | <u>Equipments Used during the Test</u>                     | <u>8</u>  |
| <u>5.</u>  | <u>Measurement Uncertainty</u>                             | <u>9</u>  |
| <u>6.</u>  | <u>SAR Measurements System Configuration</u>               | <u>10</u> |
| 6.1.       | SAR Measurement Set-up                                     | 10        |
| 6.2.       | DASY5 E-field Probe System                                 | 11        |
| 6.3.       | Phantoms                                                   | 12        |
| 6.4.       | Device Holder                                              | 12        |
| <u>7.</u>  | <u>SAR Test Procedure</u>                                  | <u>13</u> |
| 7.1.       | Scanning Procedure                                         | 13        |
| 7.2.       | Data Storage and Evaluation                                | 15        |
| <u>8.</u>  | <u>Dielectric Property Measurements &amp; System Check</u> | <u>17</u> |
| 8.1.       | Tissue Dielectric Parameters                               | 17        |
| 8.2.       | System Check                                               | 19        |
| <u>9.</u>  | <u>SAR Exposure Limits</u>                                 | <u>26</u> |
| <u>10.</u> | <u>Conducted Power Measurement Results</u>                 | <u>27</u> |
| 10.1.      | LTE                                                        | 27        |
| 10.2.      | Wi-Fi                                                      | 46        |
| <u>11.</u> | <u>Maximum Tune-up Limit</u>                               | <u>47</u> |
| <u>12.</u> | <u>RF Exposure Conditions (Test Configurations)</u>        | <u>54</u> |
| 12.1.      | Antenna Location                                           | 54        |
| <u>13.</u> | <u>Measured and Reported SAR Results</u>                   | <u>55</u> |
| <u>14.</u> | <u>SAR Measurement Variability</u>                         | <u>62</u> |
| <u>15.</u> | <u>TestSetup Photos</u>                                    | <u>63</u> |
| <u>16.</u> | <u>External and Internal Photos of the EUT</u>             | <u>65</u> |

## 1. Statement of Compliance

| Maximum Reported SAR (W/kg @1g) |       |       |
|---------------------------------|-------|-------|
| RF Exposure Conditions          | PCB   | DTS   |
| Body(Dist.= 0mm)                | 1.593 | 0.599 |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

## 2. Test Standards and Report version

### 2.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

### 2.2. Report version

| Revision No. | Date of issue | Description |
|--------------|---------------|-------------|
| N/A          | 2021-05-14    | Original    |
|              |               |             |
|              |               |             |
|              |               |             |
|              |               |             |

### 3. Summary

#### 3.1. Client Information

|               |                         |
|---------------|-------------------------|
| Applicant:    | NVISOL Ltd              |
| Address:      | Ha'Alon 6,Afula, Israel |
| Manufacturer: | NVISOL Ltd              |
| Address:      | Ha'Alon 6,Afula, Israel |

#### 3.2. Product Description

| Main unit                |                                                   |
|--------------------------|---------------------------------------------------|
| Name of EUT:             | Camera                                            |
| Trade Mark:              | -                                                 |
| Model No.:               | MAROM X 4G US                                     |
| Listed Model(s):         | -                                                 |
| Power supply:            | DC 3.7V                                           |
| Device Category:         | Portable                                          |
| Product stage:           | Production unit                                   |
| RF Exposure Environment: | General Population/Uncontrolled                   |
| HTW test sample No.:     | YPHT21030687008                                   |
| Hardware version:        | t3_a35_v1.2_210316                                |
| Software version:        | V2                                                |
| Device Dimension:        | Overall (Length x Width x Thickness): 105x60x40mm |

### 3.3. RF Specification Description

| LTE                                                                                                                             |                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Operation Band:                                                                                                                 | FDD Band 2<br>FDD Band 4<br>FDD Band 5<br>FDD Band 12<br>FDD Band 13<br>FDD Band 14<br>FDD Band 66<br>FDD Band 71 |
| Power Class:                                                                                                                    | Class 3                                                                                                           |
| Operating Mode:                                                                                                                 | QPSK<br>16QAM                                                                                                     |
| Antenna Type:                                                                                                                   | Loop Antenna                                                                                                      |
| Does this device support Carrier Aggregation (CA)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No          |                                                                                                                   |
| Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No                |                                                                                                                   |
| Operating Mode:                                                                                                                 | 802.11b<br>802.11g<br>802.11n(HT20)                                                                               |
| Antenna Type:                                                                                                                   | Integral Antenna                                                                                                  |
| <b>Remark:</b><br>1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power. |                                                                                                                   |

### 3.4. Testing Laboratory Information

|                      |                                                                                                                                                       |                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Laboratory Name      | Shenzhen Huatongwei International Inspection Co., Ltd.                                                                                                |                      |
| Laboratory Location  | 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China                                                          |                      |
| Connect information: | Tel: 86-755-26715499<br>E-mail: <a href="mailto:cs@szhtw.com.cn">cs@szhtw.com.cn</a><br><a href="http://www.szhtw.com.cn">http://www.szhtw.com.cn</a> |                      |
| Qualifications       | Type                                                                                                                                                  | Accreditation Number |
|                      | FCC                                                                                                                                                   | 762235               |

### 3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |                |
|---------------------|----------------|
| Ambient temperature | 18 °C to 25 °C |
| Ambient humidity    | 30%RH to 70%RH |
| Air Pressure        | 950-1050mbar   |

#### 4. Equipments Used during the Test

| Used                                   | Test Equipment                       | Manufacturer  | Model No.     | Serial No. | Cal. date (YY-MM-DD) | Due date (YY-MM-DD) |
|----------------------------------------|--------------------------------------|---------------|---------------|------------|----------------------|---------------------|
| ●                                      | Data Acquisition Electronics DAEx    | SPEAG         | DAE4          | 1549       | 2021/03/23           | 2022/03/22          |
| ●                                      | E-field Probe                        | SPEAG         | EX3DV4        | 7494       | 2021/04/09           | 2022/04/08          |
| ●                                      | Universal Radio Communication Tester | R&S           | CMW500        | 137681     | 2020/06/18           | 2021/06/17          |
| ● Tissue-equivalent liquids Validation |                                      |               |               |            |                      |                     |
| ●                                      | Dielectric Assessment Kit            | SPEAG         | DAK-3.5       | 1267       | N/A                  | N/A                 |
| ○                                      | Dielectric Assessment Kit            | SPEAG         | DAK-12        | 1130       | N/A                  | N/A                 |
| ●                                      | Network analyzer                     | Keysight      | E5071C        | MY46733048 | 2020/10/15           | 2021/10/14          |
| ● System Validation                    |                                      |               |               |            |                      |                     |
| ○                                      | System Validation Antenna            | SPEAG         | CLA-150       | 4024       | 2021/01/25           | 2024/01/24          |
| ○                                      | System Validation Dipole             | SPEAG         | D450V3        | 1102       | 2021/01/20           | 2024/01/19          |
| ●                                      | System Validation Dipole             | SPEAG         | D750V3        | 1180       | 2021/01/22           | 2024/01/21          |
| ●                                      | System Validation Dipole             | SPEAG         | D835V2        | 4d238      | 2021/01/22           | 2024/01/21          |
| ●                                      | System Validation Dipole             | SPEAG         | D1750V2       | 1164       | 2021/01/22           | 2024/01/21          |
| ●                                      | System Validation Dipole             | SPEAG         | D1900V2       | 5d226      | 2021/01/22           | 2024/01/21          |
| ●                                      | System Validation Dipole             | SPEAG         | D2450V2       | 1009       | 2021/01/25           | 2024/01/24          |
| ○                                      | System Validation Dipole             | SPEAG         | D2600V2       | 1150       | 2021/01/25           | 2024/01/24          |
| ○                                      | System Validation Dipole             | SPEAG         | D5GHzV2       | 1273       | 2021/01/26           | 2024/01/25          |
| ●                                      | Signal Generator                     | R&S           | SMB100A       | 114360     | 2020/08/11           | 2021/08/10          |
| ●                                      | Power Viewer for Windows             | R&S           | N/A           | N/A        | N/A                  | N/A                 |
| ●                                      | Power sensor                         | R&S           | NRP18A        | 101010     | 2020/08/11           | 2021/08/10          |
| ●                                      | Power sensor                         | R&S           | NRP18A        | 101386     | 2020/06/08           | 2021/06/07          |
| ●                                      | Power Amplifier                      | BONN          | BLWA 0160-2M  | 1811887    | 2020/11/12           | 2021/11/11          |
| ●                                      | Dual Directional Coupler             | Mini-Circuits | ZHDC-10-62-S+ | F975001814 | 2020/11/12           | 2021/11/11          |
| ●                                      | Attenuator                           | Mini-Circuits | VAT-3W2+      | 1819       | 2020/11/12           | 2021/11/11          |
| ●                                      | Attenuator                           | Mini-Circuits | VAT-10W2+     | 1741       | 2020/11/12           | 2021/11/11          |

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

## 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

## 6. SAR Measurements System Configuration

### 6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

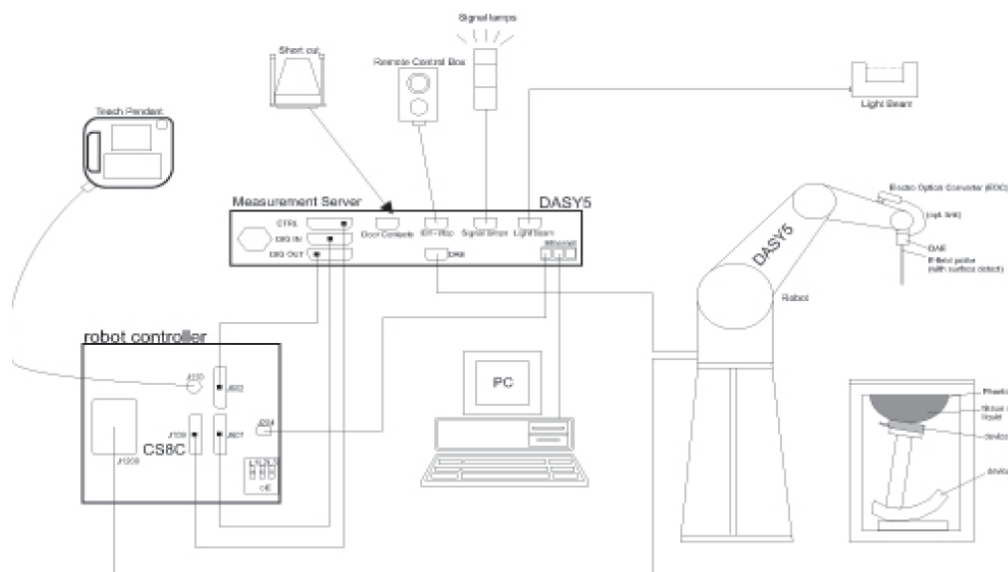

## 6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### ● Probe Specification


|               |                                                                                                                                                                                    |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration   | ISO/IEC 17025 calibration service available.                                                                                                                                       |
| Frequency     | 4 MHz to 10 GHz;<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                                                      |
| Directivity   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                                                |
| Dynamic Range | 10 $\mu$ W/g to > 100 W/kg;<br>Linearity: $\pm 0.2$ dB                                                                                                                             |
| Dimensions    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 1.0 mm                                                     |
| Application   | General dosimetry up to 6 GHz<br>Dosimetry in strong gradient fields<br>Compliance tests of Mobile Phones                                                                          |
| Compatibility | DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI                                                                                                                                     |



### ◆ Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

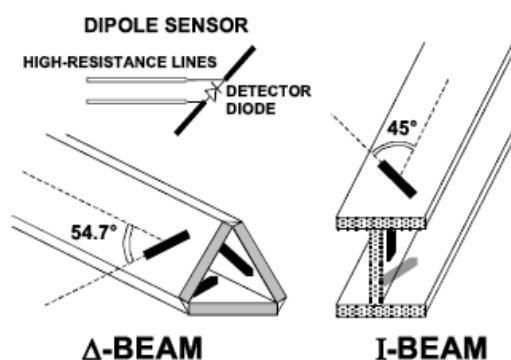

### 6.3. Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with standard and all known tissue-simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.



ELI Phantom

### 6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

## 7. SAR Test Procedure

### 7.1. Scanning Procedure

#### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

#### Area Scan Resolutions per FCC KDB Publication 865664 D01v04

|                                                                                                        | ≤ 3 GHz                                                                                                                                                                                                                                                           | > 3 GHz                                             |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm ± 1 mm                                                                                                                                                                                                                                                       | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | 30° ± 1°                                                                                                                                                                                                                                                          | 20° ± 1°                                            |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm                                                                                                                                                                                                                            | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm            |
|                                                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                     |

**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

**Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04**

|                                                                                        |                                           |                                                                                             |                                                                                     |                                                                                                                               |
|----------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ |                                           |                                                                                             | $\leq 2 \text{ GHz}: \leq 8 \text{ mm}$<br>$2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$ | $3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$<br>$4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$                                          |
| Maximum zoom scan spatial resolution, normal to phantom surface                        | uniform grid: $\Delta z_{\text{Zoom}}(n)$ |                                                                                             | $\leq 5 \text{ mm}$                                                                 | $3 - 4 \text{ GHz}: \leq 4 \text{ mm}$<br>$4 - 5 \text{ GHz}: \leq 3 \text{ mm}$<br>$5 - 6 \text{ GHz}: \leq 2 \text{ mm}$    |
|                                                                                        | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4 \text{ mm}$                                                                 | $3 - 4 \text{ GHz}: \leq 3 \text{ mm}$<br>$4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$<br>$5 - 6 \text{ GHz}: \leq 2 \text{ mm}$  |
|                                                                                        |                                           | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$                             |                                                                                                                               |
| Minimum zoom scan volume                                                               | x, y, z                                   |                                                                                             | $\geq 30 \text{ mm}$                                                                | $3 - 4 \text{ GHz}: \geq 28 \text{ mm}$<br>$4 - 5 \text{ GHz}: \geq 25 \text{ mm}$<br>$5 - 6 \text{ GHz}: \geq 22 \text{ mm}$ |

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

\* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is  $\leq 1.4 \text{ W/kg}$ ,  $\leq 8 \text{ mm}$ ,  $\leq 7 \text{ mm}$  and  $\leq 5 \text{ mm}$  zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. The SAR drift shall be kept within  $\pm 5 \%$ .

## 7.2. Data Storage and Evaluation

### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                          |                      |
|--------------------|--------------------------|----------------------|
| Probe parameters:  | Sensitivity:             | Normi, ai0, ai1, ai2 |
|                    | Conversion factor:       | ConvFi               |
|                    | Diode compression point: | Dcpi                 |
| Device parameters: | Frequency:               | f                    |
|                    | Crest factor:            | cf                   |
| Media parameters:  | Conductivity:            | σ                    |
|                    | Density:                 | ρ                    |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

|                    |                                                 |
|--------------------|-------------------------------------------------|
| Vi:                | compensated signal of channel ( i = x, y, z )   |
| Ui:                | input signal of channel ( i = x, y, z )         |
| cf:                | crest factor of exciting field (DASY parameter) |
| dcp <sub>i</sub> : | diode compression point (DASY parameter)        |

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

|        |                                                                                  |
|--------|----------------------------------------------------------------------------------|
| Vi:    | compensated signal of channel ( i = x, y, z )                                    |
| Normi: | sensor sensitivity of channel ( i = x, y, z ),<br>[mV/(V/m)²] for E-field Probes |
| ConvF: | sensitivity enhancement in solution                                              |
| aij:   | sensor sensitivity factors for H-field probes                                    |
| f:     | carrier frequency [GHz]                                                          |
| Ei:    | electric field strength of channel i in V/m                                      |
| Hi:    | magnetic field strength of channel i in A/m                                      |

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg  
Etot: total field strength in V/m  
 $\sigma$ : conductivity in [mho/m] or [Siemens/m]  
 $\rho$ : equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

## 8. Dielectric Property Measurements & System Check

### 8.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3-4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant ( $\epsilon_r$ ) and conductivity ( $\sigma$ ) of typical tissue-equivalent media recipes are expected to be within  $\pm 5\%$  of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for  $\epsilon_r$  and  $\sigma$  may be relaxed to  $\pm 10\%$ . This is limited to frequencies  $\leq 3$  GHz.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| Tissue dielectric parameters for Head and Body |              |                      |              |                      |
|------------------------------------------------|--------------|----------------------|--------------|----------------------|
| Target Frequency (MHz)                         | Head         |                      | Body         |                      |
|                                                | $\epsilon_r$ | $\sigma(\text{S/m})$ | $\epsilon_r$ | $\sigma(\text{S/m})$ |
| 750                                            | 41.9         | 0.89                 | 55.5         | 0.96                 |
| 835                                            | 41.5         | 0.90                 | 55.2         | 0.97                 |
| 1750                                           | 40.1         | 1.37                 | 53.4         | 1.49                 |
| 1800-2000                                      | 40.0         | 1.40                 | 53.3         | 1.52                 |

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**


| Dielectric performance of Head tissue simulating liquid |              |          |                      |          |                           |                       |       |              |           |
|---------------------------------------------------------|--------------|----------|----------------------|----------|---------------------------|-----------------------|-------|--------------|-----------|
| Frequency<br>(MHz)                                      | $\epsilon_r$ |          | $\sigma(\text{S/m})$ |          | Delta<br>( $\epsilon_r$ ) | Delta<br>( $\sigma$ ) | Limit | Temp<br>(°C) | Date      |
|                                                         | Target       | Measured | Target               | Measured |                           |                       |       |              |           |
| 750                                                     | 41.90        | 40.67    | 0.890                | 0.900    | -2.94%                    | 1.12%                 | ±5%   | 22.2         | 2021/5/11 |
| 835                                                     | 41.50        | 40.38    | 0.900                | 0.930    | -2.70%                    | 3.36%                 | ±5%   | 22.4         | 2021/5/12 |
| 1750                                                    | 40.10        | 38.31    | 1.370                | 1.387    | -4.46%                    | 1.24%                 | ±5%   | 22.3         | 2021/5/13 |
| 1900                                                    | 40.00        | 38.11    | 1.400                | 1.447    | -4.73%                    | 3.36%                 | ±5%   | 22.4         | 2021/5/12 |
| 2450                                                    | 39.20        | 40.99    | 1.800                | 1.811    | 4.57%                     | 0.61%                 | ±5%   | 22.4         | 2021/3/25 |

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness:  $2.0 \pm 0.2$  mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm for measurements  $> 3$  GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- The results are normalized to 1 W input power.

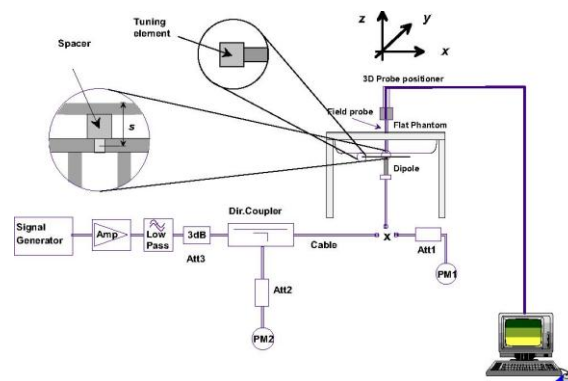

System Performance Check Setup



Photo of Dipole Setup

**System Check Result:**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within  $\pm 10\%$  of the manufacturer calibrated dipole SAR target.

| Head               |              |                    |                   |              |                    |                   |               |                |            |              |           |
|--------------------|--------------|--------------------|-------------------|--------------|--------------------|-------------------|---------------|----------------|------------|--------------|-----------|
| Frequency<br>(MHz) | 1g SAR       |                    |                   | 10g SAR      |                    |                   | Delta<br>(1g) | Delta<br>(10g) | Limit      | Temp<br>(°C) | Date      |
|                    | Target<br>1W | Normalize<br>to 1W | Measured<br>250mW | Target<br>1W | Normalize<br>to 1W | Measured<br>250mW |               |                |            |              |           |
| 750                | 8.43         | 8.64               | 2.16              | 5.59         | 5.64               | 1.41              | 2.49%         | 0.89%          | $\pm 10\%$ | 22.2         | 2021/5/11 |
| 835                | 9.39         | 10.32              | 2.58              | 6.14         | 6.68               | 1.67              | 9.90%         | 8.79%          | $\pm 10\%$ | 22.4         | 2021/5/12 |
| 1750               | 36.40        | 39.68              | 9.92              | 19.20        | 20.88              | 5.22              | 9.01%         | 8.75%          | $\pm 10\%$ | 22.3         | 2021/5/13 |
| 1900               | 39.80        | 43.20              | 10.80             | 20.30        | 22.16              | 5.54              | 8.54%         | 9.16%          | $\pm 10\%$ | 22.4         | 2021/5/12 |
| 2450               | 52.00        | 55.60              | 13.90             | 23.90        | 25.76              | 6.44              | 6.92%         | 7.78%          | $\pm 10\%$ | 22.4         | 2021/3/25 |

## Plots of System Performance Check

### System Performance Check-Head 750MHz

DUT: D750V3; Type: D750V3; Serial: 1180

Date: 2021-05-11

Communication System: UID 0, A-CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 40.672$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

#### DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.7, 10.7, 10.7) @ 750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Head/d=15mm, Pin=250mW, dist=1.4mm/Area Scan (51x121x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.92 W/kg

**Head/d=15mm, Pin=250mW, dist=1.4mm/Zoom Scan (5x5x7)/Cube 0:**


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.43 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.40 W/kg

**SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.41 W/kg**

Maximum value of SAR (measured) = 2.95 W/kg

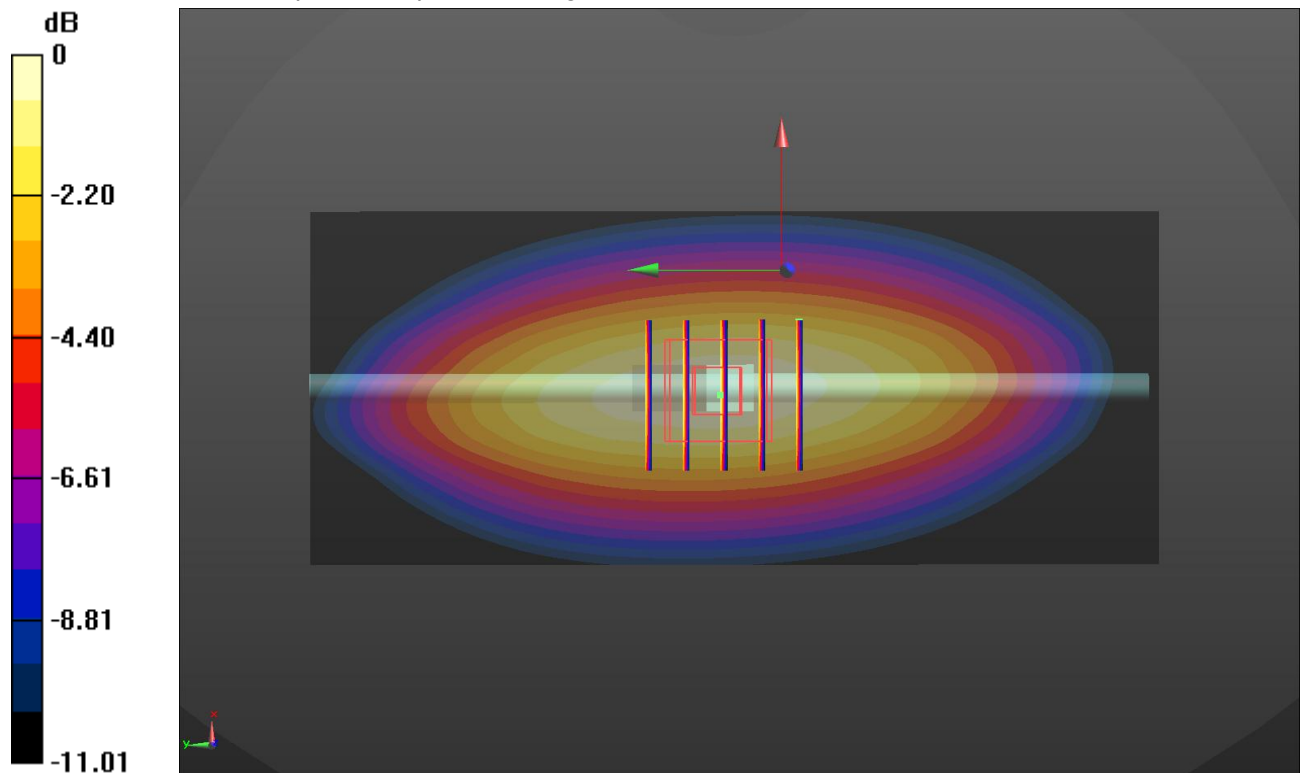

0 dB = 2.95 W/kg = 4.70 dBW/kg

**System Performance Check-Head 835MHz**

DUT: D835V2; Type: D835V2; Serial: 4d238

Date: 2021-05-12

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.93 \text{ S/m}$ ;  $\epsilon_r = 40.385$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

**DASY Configuration:**

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 835 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Head/d=15mm, Pin=250mW/Area Scan (41x101x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ 

Maximum value of SAR (interpolated) = 3.60 W/kg


**Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 62.53 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.25 W/kg

**SAR(1 g) = 2.6 W/kg; SAR(10 g) = 1.67 W/kg**

Maximum value of SAR (measured) = 3.64 W/kg

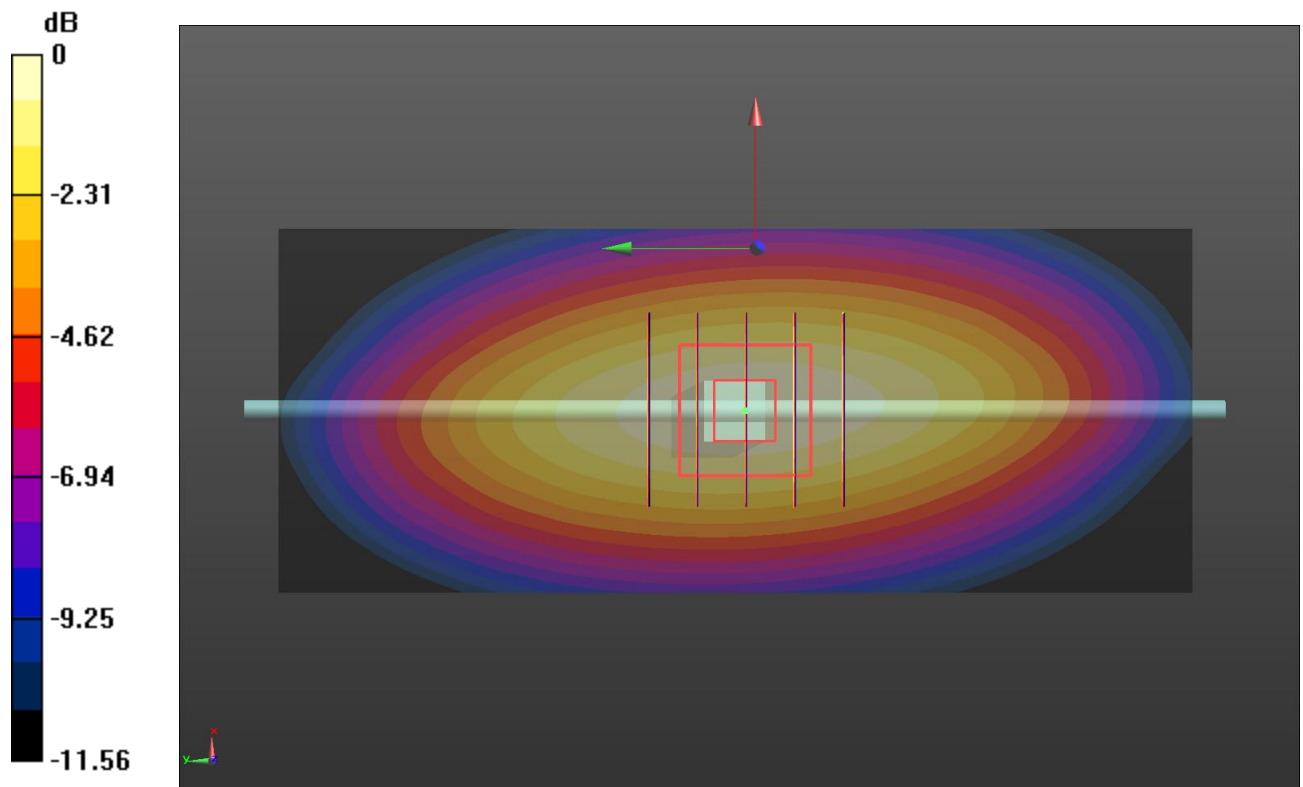

0 dB = 3.64 W/kg = 5.61 dBW/kg

**System Performance Check-Head 1750MHz**

DUT: D1750V2; Type: D1750V2; Serial: 1164

Date: 2021-05-13

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.387$  S/m;  $\epsilon_r = 38.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C; Liquid Temperature: 22.3°C;

**DASY Configuration:**

- Probe: EX3DV4 - SN7494; ConvF(8.88, 8.88, 8.88) @ 1750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Head/d=10mm, Pin=250mW/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.5 W/kg


**Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 109.0 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 18.6 W/kg

**SAR(1 g) = 9.92 W/kg; SAR(10 g) = 5.22 W/kg**

Maximum value of SAR (measured) = 15.4 W/kg

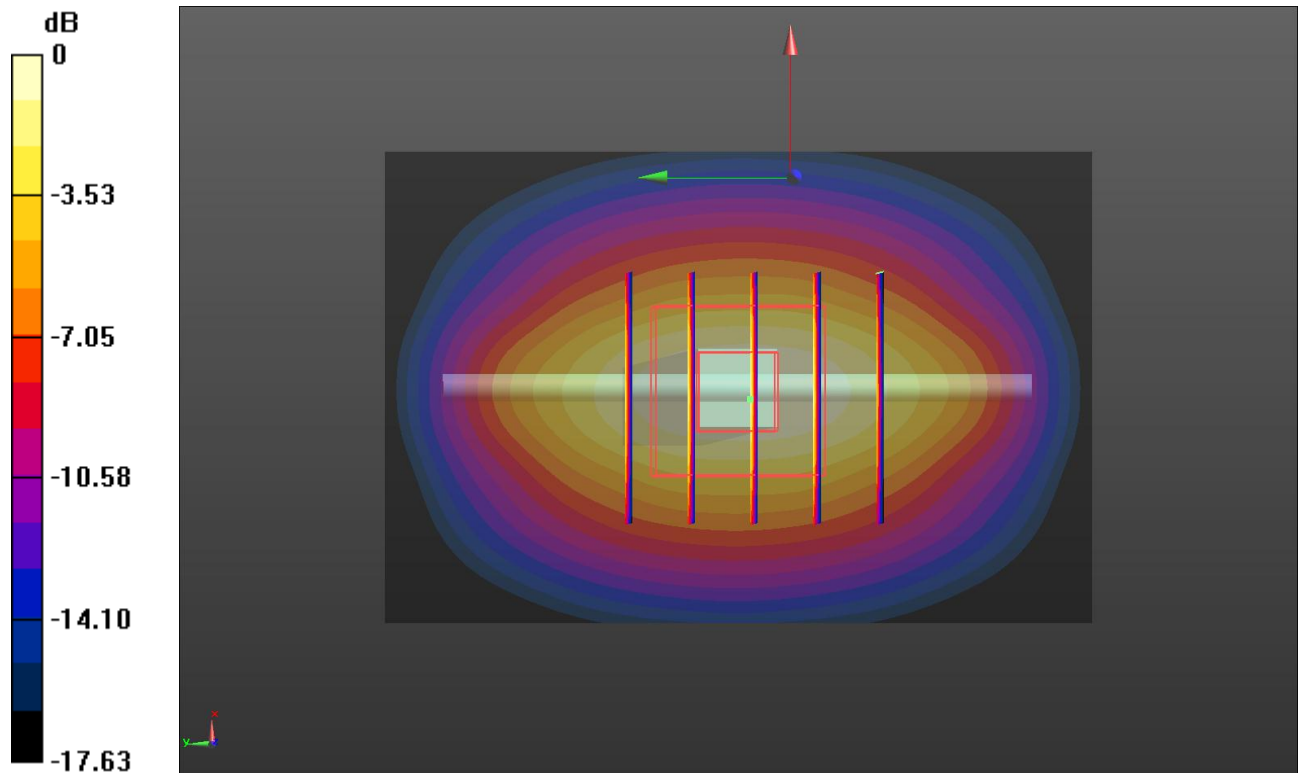

0 dB = 15.4 W/kg = 11.88 dBW/kg

**System Performance Check-Head 1900MHz**

DUT: D1900V2; Type: D1900V2; Serial: 5d226

Date: 2021-05-12

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.447$  S/m;  $\epsilon_r = 38.114$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

**DASY Configuration:**

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Head/d=10mm, Pin=250mW/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 17.3 W/kg


**Head/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 112.3 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 20.5 W/kg

**SAR(1 g) = 10.8 W/kg; SAR(10 g) = 5.54 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

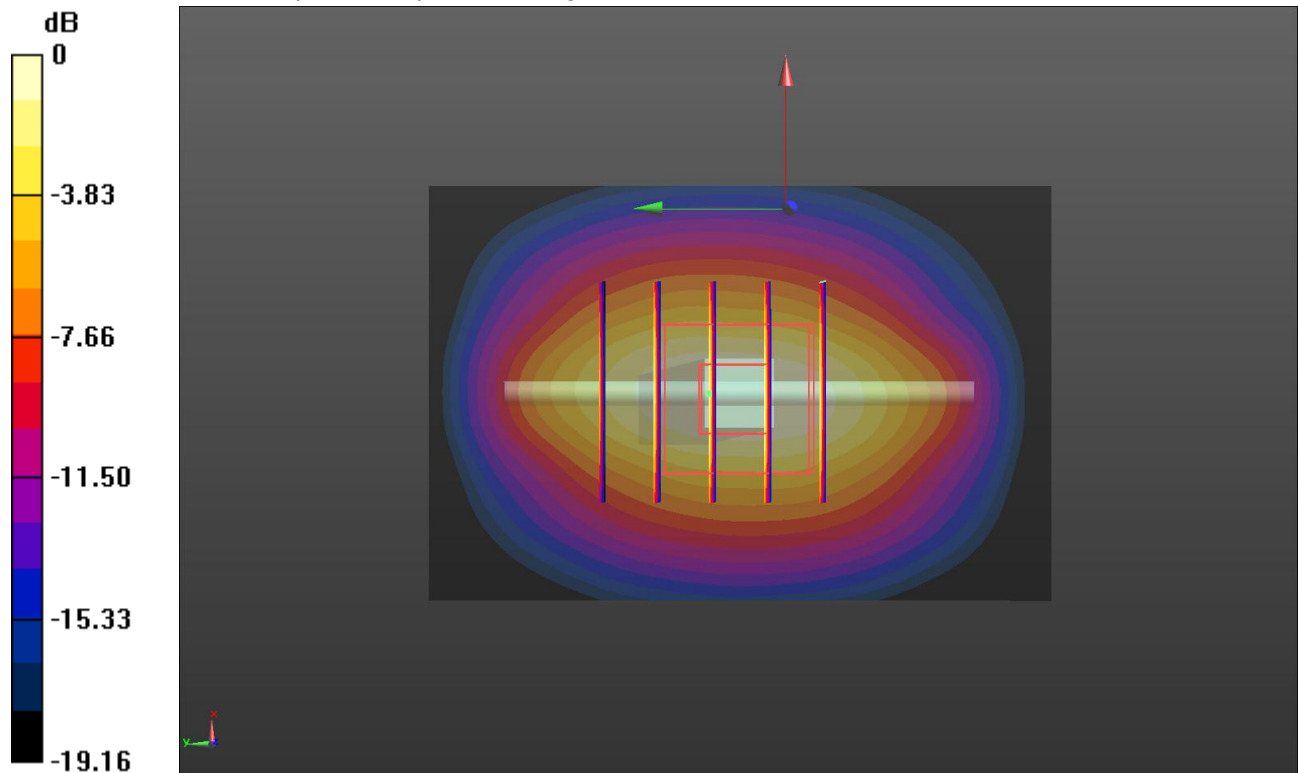

0 dB = 16.7 W/kg = 12.23 dBW/kg

## Plots of System Performance Check

### SystemPerformanceCheck-Head 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date: 2021-03-25

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.811$  S/m;  $\epsilon_r = 40.994$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

#### DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.91, 7.91, 7.91) @ 2450 MHz; Calibrated: 4/1/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/4/2020
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Head/d=10mm, Pin=250mW/Area Scan (41x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.7 W/kg


**Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.6 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 28.6 W/kg

**SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.44 W/kg**

Maximum value of SAR (measured) = 22.9 W/kg

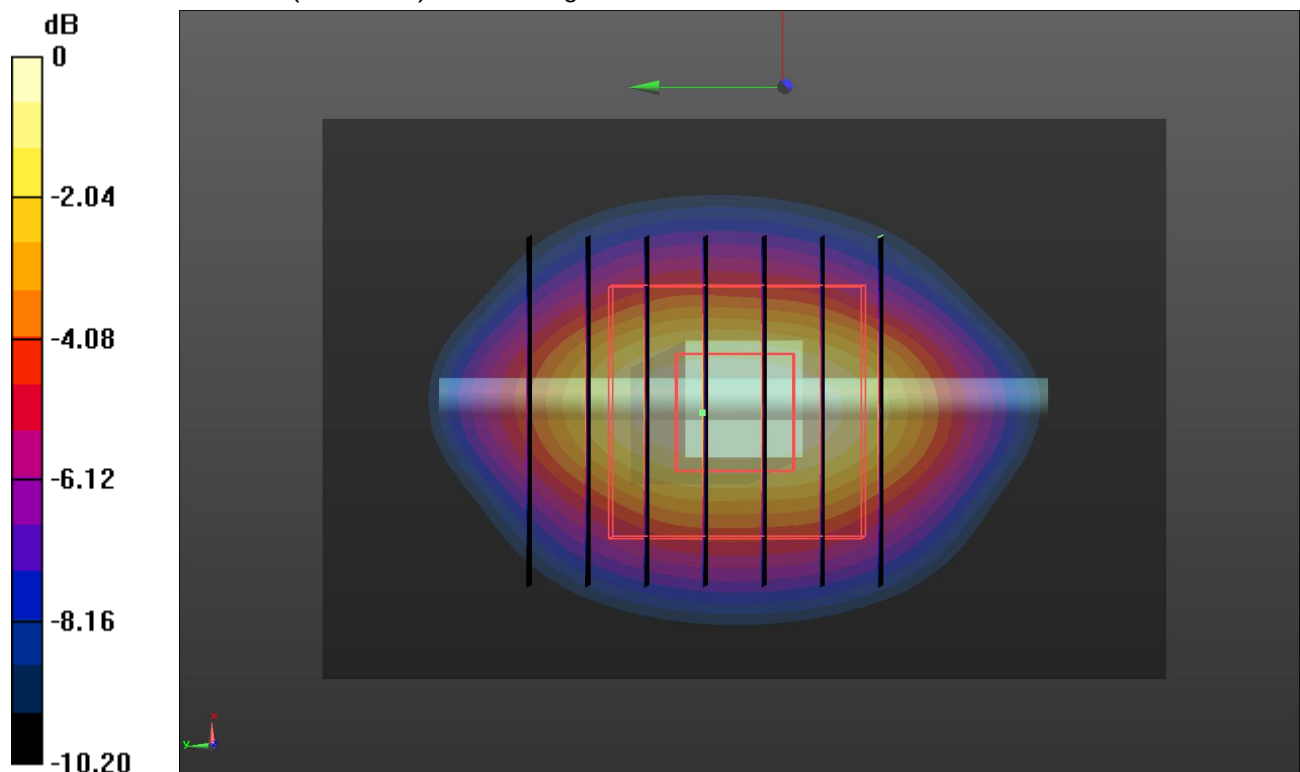

0 dB = 22.9 W/kg = 13.60 dBW/kg

## 9. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

| Type Exposure                                           | Limit (W/kg)                                             |                                                  |
|---------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------|
|                                                         | General Population/<br>Uncontrolled Exposure Environment | Occupational/<br>Controlled Exposure Environment |
| Spatial Average SAR<br>(whole body)                     | 0.08                                                     | 0.4                                              |
| Spatial Peak SAR<br>(1g cube tissue for head and trunk) | 1.6                                                      | 8.0                                              |
| Spatial Peak SAR<br>(10g for limb)                      | 4.0                                                      | 20.0                                             |

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

## **10. Conducted Power Measurement Results**

### **10.1. LTE**

#### **General Note:**

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1 RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, smaller bandwidth output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be  $\leq$  the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
  - LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)
  - LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)
  - LTE Band 5 (824-849 MHz) is covered by LTE Band 26 (814-849 MHz)
  - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

| LTE-FDD Band 2 |            |               |           | Conducted Power(dBm) |         |           |
|----------------|------------|---------------|-----------|----------------------|---------|-----------|
| Band-width     | Modulation | RB allocation | RB offset | 18607                | 18900   | 19193     |
|                |            |               |           | 1850.7MHz            | 1880MHz | 1909.3MHz |
| 1.4MHz         | QPSK       | 1             | 0         | 20.87                | 21.32   | 20.91     |
|                |            |               | 2         | 20.79                | 21.23   | 20.83     |
|                |            |               | 5         | 20.83                | 21.27   | 20.87     |
|                |            | 3             | 0         | 20.22                | 20.66   | 20.26     |
|                |            |               | 1         | 20.07                | 20.51   | 20.11     |
|                |            |               | 3         | 20.01                | 20.45   | 20.05     |
|                |            | 6             | 0         | 20.15                | 20.58   | 20.19     |
|                | 16QAM      | 1             | 0         | 20.68                | 21.19   | 20.75     |
|                |            |               | 2         | 20.60                | 21.11   | 20.67     |
|                |            |               | 5         | 20.64                | 21.14   | 20.71     |
|                |            | 3             | 0         | 20.04                | 20.53   | 20.11     |
|                |            |               | 1         | 19.89                | 20.38   | 19.96     |
|                |            |               | 3         | 19.83                | 20.32   | 19.90     |
|                |            | 6             | 0         | 19.97                | 20.46   | 20.03     |
| Band-width     | Modulation | RB allocation | RB offset | 18615                | 18900   | 19185     |
|                |            |               |           | 1851.5MHz            | 1880MHz | 1908.5MHz |
| 3MHz           | QPSK       | 1             | 0         | 20.72                | 21.37   | 20.97     |
|                |            |               | 8         | 20.64                | 21.28   | 20.89     |
|                |            |               | 14        | 20.68                | 21.32   | 20.93     |
|                |            | 8             | 0         | 20.08                | 20.71   | 20.32     |
|                |            |               | 4         | 19.93                | 20.56   | 20.17     |
|                |            |               | 7         | 19.87                | 20.49   | 20.11     |
|                |            | 15            | 0         | 20.00                | 20.63   | 20.25     |
|                | 16QAM      | 1             | 0         | 20.51                | 20.89   | 20.62     |
|                |            |               | 8         | 20.43                | 20.81   | 20.54     |
|                |            |               | 14        | 20.47                | 20.85   | 20.58     |
|                |            | 8             | 0         | 19.87                | 20.24   | 19.98     |
|                |            |               | 4         | 19.73                | 20.09   | 19.83     |
|                |            |               | 7         | 19.67                | 20.03   | 19.77     |
|                |            | 15            | 0         | 19.80                | 20.17   | 19.91     |

| LTE-FDD Band 2 |            |               |           | Conducted Power(dBm) |         |           |
|----------------|------------|---------------|-----------|----------------------|---------|-----------|
| Band-width     | Modulation | RB allocation | RB offset | 18625                | 18900   | 19175     |
|                |            |               |           | 1852.5MHz            | 1880MHz | 1907.5MHz |
| 5MHz           | QPSK       | 1             | 0         | 20.74                | 21.08   | 20.80     |
|                |            |               | 12        | 20.66                | 21.00   | 20.72     |
|                |            |               | 24        | 20.70                | 21.03   | 20.76     |
|                |            | 12            | 0         | 20.10                | 20.43   | 20.15     |
|                |            |               | 7         | 19.95                | 20.28   | 20.01     |
|                |            |               | 13        | 19.89                | 20.22   | 19.95     |
|                |            | 25            | 0         | 20.02                | 20.35   | 20.08     |
|                | 16QAM      | 1             | 0         | 20.75                | 20.97   | 20.51     |
|                |            |               | 12        | 20.67                | 20.89   | 20.43     |
|                |            |               | 24        | 20.71                | 20.93   | 20.47     |
|                |            | 12            | 0         | 20.11                | 20.32   | 19.87     |
|                |            |               | 7         | 19.96                | 20.17   | 19.73     |
|                |            |               | 13        | 19.90                | 20.11   | 19.67     |
|                |            | 25            | 0         | 20.03                | 20.25   | 19.80     |
| Band-width     | Modulation | RB allocation | RB offset | 18650                | 18900   | 19150     |
|                |            |               |           | 1855MHz              | 1880MHz | 1905MHz   |
| 10MHz          | QPSK       | 1             | 0         | 20.93                | 21.33   | 20.70     |
|                |            |               | 24        | 20.85                | 21.24   | 20.62     |
|                |            |               | 49        | 20.89                | 21.28   | 20.66     |
|                |            | 25            | 0         | 20.28                | 20.67   | 20.06     |
|                |            |               | 24        | 20.13                | 20.52   | 19.91     |
|                |            |               | 49        | 20.07                | 20.45   | 19.85     |
|                |            | 50            | 0         | 20.21                | 20.59   | 19.99     |
|                | 16QAM      | 1             | 0         | 21.10                | 21.40   | 20.70     |
|                |            |               | 24        | 21.02                | 21.31   | 20.62     |
|                |            |               | 49        | 21.05                | 21.35   | 20.66     |
|                |            | 25            | 0         | 20.45                | 20.74   | 20.06     |
|                |            |               | 24        | 20.30                | 20.58   | 19.91     |
|                |            |               | 49        | 20.23                | 20.52   | 19.85     |
|                |            | 50            | 0         | 20.37                | 20.66   | 19.99     |

| LTE-FDD Band 2 |            |               |           | Conducted Power(dBm) |         |           |
|----------------|------------|---------------|-----------|----------------------|---------|-----------|
| Band-width     | Modulation | RB allocation | RB offset | 18675                | 18900   | 19125     |
|                |            |               |           | 1857.5MHz            | 1880MHz | 1902.5MHz |
| 15MHz          | QPSK       | 1             | 0         | 20.78                | 21.23   | 20.98     |
|                |            |               | 38        | 20.70                | 21.15   | 20.90     |
|                |            |               | 74        | 20.74                | 21.18   | 20.94     |
|                |            | 38            | 0         | 20.14                | 20.57   | 20.33     |
|                |            |               | 18        | 19.99                | 20.42   | 20.18     |
|                |            |               | 37        | 19.93                | 20.36   | 20.12     |
|                |            | 75            | 0         | 20.06                | 20.50   | 20.26     |
|                | 16QAM      | 1             | 0         | 20.54                | 20.98   | 20.66     |
|                |            |               | 38        | 20.46                | 20.90   | 20.58     |
|                |            |               | 74        | 20.50                | 20.94   | 20.62     |
|                |            | 38            | 0         | 19.90                | 20.33   | 20.02     |
|                |            |               | 18        | 19.76                | 20.18   | 19.87     |
|                |            |               | 37        | 19.70                | 20.12   | 19.81     |
|                |            | 75            | 0         | 19.83                | 20.26   | 19.95     |
| Band-width     | Modulation | RB allocation | RB offset | 18700                | 18900   | 19100     |
|                |            |               |           | 1860MHz              | 1880MHz | 1900MHz   |
| 20MHz          | QPSK       | 1             | 0         | 20.69                | 21.05   | 20.72     |
|                |            |               | 49        | 20.61                | 20.97   | 20.64     |
|                |            |               | 99        | 20.65                | 21.00   | 20.68     |
|                |            | 50            | 0         | 20.05                | 20.40   | 20.08     |
|                |            |               | 25        | 19.90                | 20.25   | 19.93     |
|                |            |               | 50        | 19.84                | 20.19   | 19.87     |
|                |            | 100           | 0         | 19.98                | 20.32   | 20.00     |
|                | 16QAM      | 1             | 0         | 20.40                | 20.71   | 20.66     |
|                |            |               | 49        | 20.32                | 20.63   | 20.58     |
|                |            |               | 99        | 20.36                | 20.67   | 20.62     |
|                |            | 50            | 0         | 19.77                | 20.07   | 20.02     |
|                |            |               | 25        | 19.62                | 19.92   | 19.87     |
|                |            |               | 50        | 19.56                | 19.86   | 19.81     |
|                |            | 100           | 0         | 19.70                | 19.99   | 19.95     |

| LTE-FDD Band 4 |            |               |           | Conducted Power(dBm) |           |           |
|----------------|------------|---------------|-----------|----------------------|-----------|-----------|
| Band-width     | Modulation | RB allocation | RB offset | 19957                | 20175     | 20393     |
|                |            |               |           | 1710.7MHz            | 1732.5MHz | 1754.3MHz |
| 1.4MHz         | QPSK       | 1             | 0         | 21.03                | 21.33     | 20.47     |
|                |            |               | 2         | 20.95                | 21.24     | 20.39     |
|                |            |               | 5         | 20.98                | 21.28     | 20.43     |
|                |            | 3             | 0         | 20.38                | 20.67     | 19.83     |
|                |            |               | 1         | 20.23                | 20.52     | 19.69     |
|                |            |               | 3         | 20.17                | 20.45     | 19.63     |
|                |            | 6             | 0         | 20.30                | 20.59     | 19.76     |
|                | 16QAM      | 1             | 0         | 20.93                | 21.24     | 20.36     |
|                |            |               | 2         | 20.85                | 21.16     | 20.28     |
|                |            |               | 5         | 20.89                | 21.19     | 20.32     |
|                |            | 3             | 0         | 20.28                | 20.58     | 19.73     |
|                |            |               | 1         | 20.13                | 20.43     | 19.58     |
|                |            |               | 3         | 20.07                | 20.37     | 19.52     |
|                |            | 6             | 0         | 20.21                | 20.51     | 19.66     |
| Band-width     | Modulation | RB allocation | RB offset | 19965                | 20175     | 20385     |
|                |            |               |           | 1711.5MHz            | 1732.5MHz | 1753.5MHz |
| 3MHz           | QPSK       | 1             | 0         | 20.96                | 21.36     | 20.49     |
|                |            |               | 8         | 20.88                | 21.27     | 20.41     |
|                |            |               | 14        | 20.92                | 21.31     | 20.45     |
|                |            | 8             | 0         | 20.31                | 20.70     | 19.85     |
|                |            |               | 4         | 20.16                | 20.55     | 19.71     |
|                |            |               | 7         | 20.10                | 20.48     | 19.65     |
|                |            | 15            | 0         | 20.24                | 20.62     | 19.78     |
|                | 16QAM      | 1             | 0         | 20.84                | 21.13     | 20.31     |
|                |            |               | 8         | 20.76                | 21.05     | 20.23     |
|                |            |               | 14        | 20.80                | 21.08     | 20.27     |
|                |            | 8             | 0         | 20.19                | 20.47     | 19.68     |
|                |            |               | 4         | 20.05                | 20.32     | 19.54     |
|                |            |               | 7         | 19.98                | 20.26     | 19.48     |
|                |            | 15            | 0         | 20.12                | 20.40     | 19.61     |

| LTE-FDD Band 4 |            |               |           | Conducted Power(dBm) |           |           |
|----------------|------------|---------------|-----------|----------------------|-----------|-----------|
| Band-width     | Modulation | RB allocation | RB offset | 19975                | 20175     | 20375     |
|                |            |               |           | 1712.5MHz            | 1732.5MHz | 1752.5MHz |
| 5MHz           | QPSK       | 1             | 0         | 20.98                | 21.23     | 20.38     |
|                |            |               | 12        | 20.90                | 21.15     | 20.30     |
|                |            |               | 24        | 20.94                | 21.18     | 20.34     |
|                |            | 12            | 0         | 20.33                | 20.57     | 19.75     |
|                |            |               | 7         | 20.18                | 20.42     | 19.60     |
|                |            |               | 13        | 20.12                | 20.36     | 19.54     |
|                |            | 25            | 0         | 20.26                | 20.50     | 19.68     |
|                | 16QAM      | 1             | 0         | 21.00                | 21.15     | 20.24     |
|                |            |               | 12        | 20.92                | 21.07     | 20.16     |
|                |            |               | 24        | 20.96                | 21.10     | 20.20     |
|                |            | 12            | 0         | 20.35                | 20.49     | 19.61     |
|                |            |               | 7         | 20.20                | 20.34     | 19.47     |
|                |            |               | 13        | 20.14                | 20.28     | 19.41     |
|                |            | 25            | 0         | 20.27                | 20.42     | 19.54     |
| Band-width     | Modulation | RB allocation | RB offset | 20000                | 20175     | 20350     |
|                |            |               |           | 1715MHz              | 1732.5MHz | 1750MHz   |
| 10MHz          | QPSK       | 1             | 0         | 21.05                | 21.34     | 20.38     |
|                |            |               | 24        | 20.97                | 21.25     | 20.30     |
|                |            |               | 49        | 21.00                | 21.29     | 20.34     |
|                |            | 25            | 0         | 20.40                | 20.68     | 19.75     |
|                |            |               | 24        | 20.25                | 20.53     | 19.60     |
|                |            |               | 49        | 20.19                | 20.46     | 19.54     |
|                |            | 50            | 0         | 20.32                | 20.60     | 19.68     |
|                | 16QAM      | 1             | 0         | 21.12                | 21.33     | 20.36     |
|                |            |               | 24        | 21.04                | 21.24     | 20.28     |
|                |            |               | 49        | 21.07                | 21.28     | 20.32     |
|                |            | 25            | 0         | 20.46                | 20.67     | 19.73     |
|                |            |               | 24        | 20.32                | 20.52     | 19.58     |
|                |            |               | 49        | 20.25                | 20.45     | 19.52     |
|                |            | 50            | 0         | 20.39                | 20.59     | 19.66     |

| LTE-FDD Band 4 |            |               |           | Conducted Power(dBm) |           |           |
|----------------|------------|---------------|-----------|----------------------|-----------|-----------|
| Band-width     | Modulation | RB allocation | RB offset | 20025                | 20175     | 20325     |
|                |            |               |           | 1717.5MHz            | 1732.5MHz | 1747.5MHz |
| 15MHz          | QPSK       | 1             | 0         | 20.97                | 21.33     | 20.50     |
|                |            |               | 38        | 20.89                | 21.24     | 20.42     |
|                |            |               | 74        | 20.93                | 21.28     | 20.46     |
|                |            | 38            | 0         | 20.32                | 20.67     | 19.86     |
|                |            |               | 18        | 20.17                | 20.52     | 19.72     |
|                |            |               | 37        | 20.11                | 20.45     | 19.66     |
|                |            | 75            | 0         | 20.25                | 20.59     | 19.79     |
|                | 16QAM      | 1             | 0         | 20.85                | 21.22     | 20.32     |
|                |            |               | 38        | 20.77                | 21.14     | 20.24     |
|                |            |               | 74        | 20.81                | 21.17     | 20.28     |
|                |            | 38            | 0         | 20.20                | 20.56     | 19.69     |
|                |            |               | 18        | 20.06                | 20.41     | 19.55     |
|                |            |               | 37        | 19.99                | 20.35     | 19.49     |
|                |            | 75            | 0         | 20.13                | 20.49     | 19.62     |
| Band-width     | Modulation | RB allocation | RB offset | 20050                | 20175     | 20300     |
|                |            |               |           | 1720MHz              | 1732.5MHz | 1745MHz   |
| 20MHz          | QPSK       | 1             | 0         | 20.93                | 21.20     | 20.38     |
|                |            |               | 49        | 20.85                | 21.12     | 20.30     |
|                |            |               | 99        | 20.89                | 21.15     | 20.34     |
|                |            | 50            | 0         | 20.28                | 20.54     | 19.75     |
|                |            |               | 25        | 20.13                | 20.39     | 19.60     |
|                |            |               | 50        | 20.07                | 20.33     | 19.54     |
|                |            | 100           | 0         | 20.21                | 20.47     | 19.68     |
|                | 16QAM      | 1             | 0         | 20.79                | 21.05     | 20.34     |
|                |            |               | 49        | 20.71                | 20.97     | 20.26     |
|                |            |               | 99        | 20.75                | 21.00     | 20.30     |
|                |            | 50            | 0         | 20.14                | 20.40     | 19.71     |
|                |            |               | 25        | 20.00                | 20.25     | 19.56     |
|                |            |               | 50        | 19.94                | 20.19     | 19.51     |
|                |            | 100           | 0         | 20.07                | 20.32     | 19.64     |

| LTE-FDD Band 5 |            |               |           | Conducted Power(dBm) |          |          |
|----------------|------------|---------------|-----------|----------------------|----------|----------|
| Band-width     | Modulation | RB allocation | RB offset | 20407                | 20525    | 20643    |
|                |            |               |           | 8.4.7MHz             | 836.5MHz | 848.3MHz |
| 1.4MHz         | QPSK       | 1             | 0         | 21.64                | 22.53    | 21.24    |
|                |            |               | 2         | 21.55                | 22.44    | 21.16    |
|                |            |               | 5         | 21.59                | 22.48    | 21.19    |
|                |            | 3             | 0         | 20.97                | 21.83    | 20.58    |
|                |            |               | 1         | 20.82                | 21.67    | 20.43    |
|                |            |               | 3         | 20.75                | 21.61    | 20.37    |
|                |            | 6             | 0         | 20.89                | 21.75    | 20.51    |
|                | 16QAM      | 1             | 0         | 21.51                | 22.44    | 21.15    |
|                |            |               | 2         | 21.42                | 22.35    | 21.07    |
|                |            |               | 5         | 21.46                | 22.39    | 21.10    |
|                |            | 3             | 0         | 20.84                | 21.74    | 20.49    |
|                |            |               | 1         | 20.69                | 21.58    | 20.34    |
|                |            |               | 3         | 20.63                | 21.52    | 20.28    |
|                |            | 6             | 0         | 20.77                | 21.67    | 20.42    |
| Band-width     | Modulation | RB allocation | RB offset | 20415                | 20525    | 20635    |
|                |            |               |           | 825.5MHz             | 836.5MHz | 847.5MHz |
| 3MHz           | QPSK       | 1             | 0         | 21.59                | 22.50    | 21.34    |
|                |            |               | 8         | 21.50                | 22.41    | 21.25    |
|                |            |               | 14        | 21.54                | 22.45    | 21.29    |
|                |            | 8             | 0         | 20.92                | 21.80    | 20.68    |
|                |            |               | 4         | 20.77                | 21.64    | 20.53    |
|                |            |               | 7         | 20.70                | 21.58    | 20.46    |
|                |            | 15            | 0         | 20.84                | 21.72    | 20.60    |
|                | 16QAM      | 1             | 0         | 21.43                | 22.28    | 21.13    |
|                |            |               | 8         | 21.34                | 22.19    | 21.05    |
|                |            |               | 14        | 21.38                | 22.23    | 21.08    |
|                |            | 8             | 0         | 20.77                | 21.59    | 20.47    |
|                |            |               | 4         | 20.61                | 21.43    | 20.32    |
|                |            |               | 7         | 20.55                | 21.37    | 20.26    |
|                |            | 15            | 0         | 20.69                | 21.51    | 20.40    |

| LTE-FDD Band 5 |            |               |           | Conducted Power(dBm) |          |          |
|----------------|------------|---------------|-----------|----------------------|----------|----------|
| Band-width     | Modulation | RB allocation | RB offset | 20425                | 20525    | 20625    |
|                |            |               |           | 826.5MHz             | 836.5MHz | 846.5MHz |
| 5MHz           | QPSK       | 1             | 0         | 21.57                | 22.30    | 21.20    |
|                |            |               | 12        | 21.48                | 22.21    | 21.12    |
|                |            |               | 24        | 21.52                | 22.25    | 21.15    |
|                |            | 12            | 0         | 20.90                | 21.61    | 20.54    |
|                |            |               | 7         | 20.75                | 21.45    | 20.39    |
|                |            |               | 13        | 20.68                | 21.39    | 20.33    |
|                |            | 25            | 0         | 20.83                | 21.53    | 20.47    |
|                | 16QAM      | 1             | 0         | 21.62                | 22.24    | 20.99    |
|                |            |               | 12        | 21.53                | 22.15    | 20.91    |
|                |            |               | 24        | 21.57                | 22.19    | 20.95    |
|                |            | 12            | 0         | 20.95                | 21.55    | 20.34    |
|                |            |               | 7         | 20.80                | 21.39    | 20.19    |
|                |            |               | 13        | 20.73                | 21.33    | 20.13    |
|                |            | 25            | 0         | 20.87                | 21.47    | 20.27    |
| Band-width     | Modulation | RB allocation | RB offset | 20450                | 20525    | 20600    |
|                |            |               |           | 829MHz               | 836.5MHz | 844MHz   |
| 10MHz          | QPSK       | 1             | 0         | 21.66                | 22.53    | 21.20    |
|                |            |               | 24        | 21.57                | 22.44    | 21.12    |
|                |            |               | 49        | 21.61                | 22.48    | 21.15    |
|                |            | 25            | 0         | 20.99                | 21.83    | 20.54    |
|                |            |               | 24        | 20.83                | 21.67    | 20.39    |
|                |            |               | 49        | 20.77                | 21.61    | 20.33    |
|                |            | 50            | 0         | 20.91                | 21.75    | 20.47    |
|                | 16QAM      | 1             | 0         | 21.72                | 22.48    | 21.19    |
|                |            |               | 24        | 21.63                | 22.39    | 21.11    |
|                |            |               | 49        | 21.67                | 22.43    | 21.14    |
|                |            | 25            | 0         | 21.05                | 21.78    | 20.53    |
|                |            |               | 24        | 20.89                | 21.62    | 20.38    |
|                |            |               | 49        | 20.83                | 21.56    | 20.32    |
|                |            | 50            | 0         | 20.97                | 21.70    | 20.46    |

| LTE-FDD Band 12 |            |               |           | Conducted Power(dBm) |          |          |
|-----------------|------------|---------------|-----------|----------------------|----------|----------|
| Band-width      | Modulation | RB allocation | RB offset | 23017                | 23095    | 23173    |
|                 |            |               |           | 699.7MHz             | 707.5MHz | 715.3MHz |
| 1.4MHz          | QPSK       | 1             | 0         | 21.57                | 22.14    | 21.59    |
|                 |            |               | 2         | 21.48                | 22.05    | 21.50    |
|                 |            |               | 5         | 21.52                | 22.09    | 21.54    |
|                 |            | 3             | 0         | 20.90                | 21.45    | 20.92    |
|                 |            |               | 1         | 20.75                | 21.30    | 20.77    |
|                 |            |               | 3         | 20.68                | 21.23    | 20.70    |
|                 |            | 6             | 0         | 20.83                | 21.38    | 20.84    |
|                 | 16QAM      | 1             | 0         | 21.40                | 22.02    | 21.49    |
|                 |            |               | 2         | 21.31                | 21.93    | 21.40    |
|                 |            |               | 5         | 21.35                | 21.97    | 21.44    |
|                 |            | 3             | 0         | 20.74                | 21.34    | 20.82    |
|                 |            |               | 1         | 20.58                | 21.18    | 20.67    |
|                 |            |               | 3         | 20.52                | 21.12    | 20.61    |
|                 |            | 6             | 0         | 20.66                | 21.26    | 20.75    |
| Band-width      | Modulation | RB allocation | RB offset | 23025                | 23095    | 23165    |
|                 |            |               |           | 700.5MHz             | 707.5MHz | 714.5MHz |
| 3MHz            | QPSK       | 1             | 0         | 21.50                | 22.18    | 21.62    |
|                 |            |               | 8         | 21.41                | 22.09    | 21.53    |
|                 |            |               | 14        | 21.45                | 22.13    | 21.57    |
|                 |            | 8             | 0         | 20.83                | 21.49    | 20.95    |
|                 |            |               | 4         | 20.68                | 21.33    | 20.80    |
|                 |            |               | 7         | 20.62                | 21.27    | 20.73    |
|                 |            | 15            | 0         | 20.76                | 21.41    | 20.87    |
|                 | 16QAM      | 1             | 0         | 21.33                | 21.90    | 21.44    |
|                 |            |               | 8         | 21.24                | 21.81    | 21.35    |
|                 |            |               | 14        | 21.28                | 21.85    | 21.39    |
|                 |            | 8             | 0         | 20.67                | 21.22    | 20.77    |
|                 |            |               | 4         | 20.52                | 21.07    | 20.62    |
|                 |            |               | 7         | 20.45                | 21.00    | 20.56    |
|                 |            | 15            | 0         | 20.59                | 21.14    | 20.70    |

| LTE-FDD Band 12 |            |               |           | Conducted Power(dBm) |          |          |
|-----------------|------------|---------------|-----------|----------------------|----------|----------|
| Band-width      | Modulation | RB allocation | RB offset | 23035                | 23095    | 23155    |
|                 |            |               |           | 701.5MHz             | 707.5MHz | 713.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 21.47                | 22.00    | 21.53    |
|                 |            |               | 12        | 21.38                | 21.91    | 21.44    |
|                 |            |               | 24        | 21.42                | 21.95    | 21.48    |
|                 |            | 12            | 0         | 20.80                | 21.32    | 20.86    |
|                 |            |               | 7         | 20.65                | 21.16    | 20.71    |
|                 |            |               | 13        | 20.59                | 21.10    | 20.65    |
|                 |            | 25            | 0         | 20.73                | 21.24    | 20.79    |
|                 | 16QAM      | 1             | 0         | 21.54                | 21.96    | 21.37    |
|                 |            |               | 12        | 21.45                | 21.87    | 21.28    |
|                 |            |               | 24        | 21.49                | 21.91    | 21.32    |
|                 |            | 12            | 0         | 20.87                | 21.28    | 20.71    |
|                 |            |               | 7         | 20.72                | 21.12    | 20.56    |
|                 |            |               | 13        | 20.66                | 21.06    | 20.49    |
|                 |            | 25            | 0         | 20.80                | 21.20    | 20.63    |
| Band-width      | Modulation | RB allocation | RB offset | 23060                | 23095    | 23130    |
|                 |            |               |           | 704MHz               | 707.5MHz | 711MHz   |
| 10MHz           | QPSK       | 1             | 0         | 21.55                | 22.14    | 21.52    |
|                 |            |               | 24        | 21.46                | 22.05    | 21.43    |
|                 |            |               | 49        | 21.50                | 22.09    | 21.47    |
|                 |            | 25            | 0         | 20.88                | 21.45    | 20.85    |
|                 |            |               | 24        | 20.73                | 21.30    | 20.70    |
|                 |            |               | 49        | 20.67                | 21.23    | 20.64    |
|                 |            | 50            | 0         | 20.81                | 21.38    | 20.78    |
|                 | 16QAM      | 1             | 0         | 21.58                | 22.13    | 21.53    |
|                 |            |               | 24        | 21.49                | 22.04    | 21.44    |
|                 |            |               | 49        | 21.53                | 22.08    | 21.48    |
|                 |            | 25            | 0         | 20.91                | 21.44    | 20.86    |
|                 |            |               | 24        | 20.76                | 21.29    | 20.71    |
|                 |            |               | 49        | 20.69                | 21.22    | 20.65    |
|                 |            | 50            | 0         | 20.83                | 21.37    | 20.79    |

| LTE-FDD Band 13 |            |               |           | Conducted Power(dBm) |        |          |
|-----------------|------------|---------------|-----------|----------------------|--------|----------|
| Band-width      | Modulation | RB allocation | RB offset | 23205                | 23230  | 23255    |
|                 |            |               |           | 779.5MHz             | 782MHz | 784.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 20.78                | 21.62  | 20.93    |
|                 |            |               | 12        | 20.70                | 21.53  | 20.85    |
|                 |            |               | 24        | 20.74                | 21.57  | 20.89    |
|                 |            | 12            | 0         | 20.14                | 20.95  | 20.28    |
|                 |            |               | 7         | 19.99                | 20.80  | 20.13    |
|                 |            |               | 13        | 19.93                | 20.73  | 20.07    |
|                 |            | 25            | 0         | 20.06                | 20.87  | 20.21    |
|                 | 16QAM      | 1             | 0         | 20.70                | 21.55  | 20.85    |
|                 |            |               | 12        | 20.62                | 21.46  | 20.77    |
|                 |            |               | 24        | 20.66                | 21.50  | 20.81    |
|                 |            | 12            | 0         | 20.06                | 20.88  | 20.20    |
|                 |            |               | 7         | 19.91                | 20.73  | 20.06    |
|                 |            |               | 13        | 19.85                | 20.67  | 19.99    |
|                 |            | 25            | 0         | 19.99                | 20.81  | 20.13    |
| Band-width      | Modulation | RB allocation | RB offset |                      |        |          |
| 10MHz           | QPSK       | 1             | 0         |                      |        |          |
|                 |            |               | 24        |                      |        |          |
|                 |            |               | 49        |                      |        |          |
|                 |            | 25            | 0         |                      |        |          |
|                 |            |               | 24        |                      |        |          |
|                 |            |               | 49        |                      |        |          |
|                 |            | 50            | 0         |                      |        |          |
|                 | 16QAM      | 1             | 0         |                      |        |          |
|                 |            |               | 24        |                      |        |          |
|                 |            |               | 49        |                      |        |          |
|                 |            | 25            | 0         |                      |        |          |
|                 |            |               | 24        |                      |        |          |
|                 |            |               | 49        |                      |        |          |
|                 |            | 50            | 0         |                      |        |          |

| LTE-FDD Band 14 |            |               |           | Conducted Power(dBm) |        |          |
|-----------------|------------|---------------|-----------|----------------------|--------|----------|
| Band-width      | Modulation | RB allocation | RB offset | 23305                | 23330  | 23355    |
|                 |            |               |           | 790.5MHz             | 793MHz | 795.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 20.56                | 21.28  | 20.74    |
|                 |            |               | 12        | 20.48                | 21.19  | 20.66    |
|                 |            |               | 24        | 20.52                | 21.23  | 20.70    |
|                 |            | 12            | 0         | 19.92                | 20.62  | 20.10    |
|                 |            |               | 7         | 19.78                | 20.47  | 19.95    |
|                 |            |               | 13        | 19.72                | 20.41  | 19.89    |
|                 |            | 25            | 0         | 19.85                | 20.55  | 20.02    |
|                 | 16QAM      | 1             | 0         | 20.44                | 21.15  | 20.62    |
|                 |            |               | 12        | 20.36                | 21.07  | 20.54    |
|                 |            |               | 24        | 20.40                | 21.10  | 20.58    |
|                 |            | 12            | 0         | 19.81                | 20.49  | 19.98    |
|                 |            |               | 7         | 19.66                | 20.34  | 19.83    |
|                 |            |               | 13        | 19.60                | 20.28  | 19.77    |
|                 |            | 25            | 0         | 19.73                | 20.42  | 19.91    |
| Band-width      | Modulation | RB allocation | RB offset | CH23330              |        |          |
|                 |            |               |           | 793MHz               |        |          |
| 10MHz           | QPSK       | 1             | 0         |                      | 21.46  |          |
|                 |            |               | 24        |                      | 21.37  |          |
|                 |            |               | 49        |                      | 21.41  |          |
|                 |            | 25            | 0         |                      | 20.79  |          |
|                 |            |               | 24        |                      | 20.64  |          |
|                 |            |               | 49        |                      | 20.58  |          |
|                 |            | 50            | 0         |                      | 20.72  |          |
|                 | 16QAM      | 1             | 0         |                      | 21.20  |          |
|                 |            |               | 24        |                      | 21.12  |          |
|                 |            |               | 49        |                      | 21.15  |          |
|                 |            | 25            | 0         |                      | 20.54  |          |
|                 |            |               | 24        |                      | 20.39  |          |
|                 |            |               | 49        |                      | 20.33  |          |
|                 |            | 50            | 0         |                      | 20.47  |          |

| LTE-FDD Band 66 |            |               |           | Conducted Power(dBm) |         |           |
|-----------------|------------|---------------|-----------|----------------------|---------|-----------|
| Band-width      | Modulation | RB allocation | RB offset | 131979               | 132322  | 132665    |
|                 |            |               |           | 1710.7MHz            | 1745MHz | 1779.3MHz |
| 1.4MHz          | QPSK       | 1             | 0         | 21.20                | 22.02   | 20.89     |
|                 |            |               | 2         | 21.12                | 21.93   | 20.81     |
|                 |            |               | 5         | 21.15                | 21.97   | 20.85     |
|                 |            | 3             | 0         | 20.54                | 21.34   | 20.24     |
|                 |            |               | 1         | 20.39                | 21.18   | 20.09     |
|                 |            |               | 3         | 20.33                | 21.12   | 20.03     |
|                 |            | 6             | 0         | 20.47                | 21.26   | 20.17     |
|                 | 16QAM      | 1             | 0         | 20.96                | 21.82   | 20.69     |
|                 |            |               | 2         | 20.88                | 21.73   | 20.61     |
|                 |            |               | 5         | 20.92                | 21.77   | 20.65     |
|                 |            | 3             | 0         | 20.31                | 21.14   | 20.05     |
|                 |            |               | 1         | 20.16                | 20.99   | 19.90     |
|                 |            |               | 3         | 20.10                | 20.92   | 19.84     |
|                 |            | 6             | 0         | 20.24                | 21.07   | 19.98     |
| Band-width      | Modulation | RB allocation | RB offset | 131987               | 132322  | 132657    |
|                 |            |               |           | 1711.5MHz            | 1745MHz | 1778.5MHz |
| 3MHz            | QPSK       | 1             | 0         | 21.10                | 22.10   | 21.04     |
|                 |            |               | 8         | 21.02                | 22.01   | 20.96     |
|                 |            |               | 14        | 21.05                | 22.05   | 20.99     |
|                 |            | 8             | 0         | 20.45                | 21.41   | 20.39     |
|                 |            |               | 4         | 20.30                | 21.26   | 20.24     |
|                 |            |               | 7         | 20.23                | 21.19   | 20.18     |
|                 |            | 15            | 0         | 20.37                | 21.34   | 20.31     |
|                 | 16QAM      | 1             | 0         | 20.85                | 21.66   | 20.57     |
|                 |            |               | 8         | 20.77                | 21.57   | 20.49     |
|                 |            |               | 14        | 20.81                | 21.61   | 20.53     |
|                 |            | 8             | 0         | 20.20                | 20.99   | 19.93     |
|                 |            |               | 4         | 20.06                | 20.83   | 19.79     |
|                 |            |               | 7         | 19.99                | 20.77   | 19.73     |
|                 |            | 15            | 0         | 20.13                | 20.91   | 19.86     |

| LTE-FDD Band 66 |            |               |           | Conducted Power(dBm) |         |           |
|-----------------|------------|---------------|-----------|----------------------|---------|-----------|
| Band-width      | Modulation | RB allocation | RB offset | 131997               | 132322  | 132647    |
|                 |            |               |           | 1712.5MHz            | 1745MHz | 1777.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 21.09                | 21.79   | 20.91     |
|                 |            |               | 12        | 21.01                | 21.70   | 20.83     |
|                 |            |               | 24        | 21.04                | 21.74   | 20.87     |
|                 |            | 12            | 0         | 20.44                | 21.11   | 20.26     |
|                 |            |               | 7         | 20.29                | 20.96   | 20.11     |
|                 |            |               | 13        | 20.22                | 20.90   | 20.05     |
|                 |            | 25            | 0         | 20.36                | 21.04   | 20.19     |
|                 | 16QAM      | 1             | 0         | 21.19                | 21.67   | 20.46     |
|                 |            |               | 12        | 21.11                | 21.58   | 20.38     |
|                 |            |               | 24        | 21.14                | 21.62   | 20.42     |
|                 |            | 12            | 0         | 20.53                | 21.00   | 19.83     |
|                 |            |               | 7         | 20.38                | 20.84   | 19.68     |
|                 |            |               | 13        | 20.32                | 20.78   | 19.62     |
|                 |            | 25            | 0         | 20.46                | 20.92   | 19.75     |
| Band-width      | Modulation | RB allocation | RB offset | 132022               | 132322  | 132622    |
|                 |            |               |           | 1715MHz              | 1745MHz | 1775MHz   |
| 10MHz           | QPSK       | 1             | 0         | 21.18                | 21.92   | 20.73     |
|                 |            |               | 24        | 21.10                | 21.83   | 20.65     |
|                 |            |               | 49        | 21.13                | 21.87   | 20.69     |
|                 |            | 25            | 0         | 20.52                | 21.24   | 20.09     |
|                 |            |               | 24        | 20.37                | 21.08   | 19.94     |
|                 |            |               | 49        | 20.31                | 21.02   | 19.88     |
|                 |            | 50            | 0         | 20.45                | 21.16   | 20.01     |
|                 | 16QAM      | 1             | 0         | 21.33                | 21.95   | 20.70     |
|                 |            |               | 24        | 21.24                | 21.86   | 20.62     |
|                 |            |               | 49        | 21.28                | 21.90   | 20.66     |
|                 |            | 25            | 0         | 20.67                | 21.27   | 20.06     |
|                 |            |               | 24        | 20.52                | 21.11   | 19.91     |
|                 |            |               | 49        | 20.45                | 21.05   | 19.85     |
|                 |            | 50            | 0         | 20.59                | 21.19   | 19.99     |

| LTE-FDD Band 66 |            |               |           | Conducted Power(dBm) |         |           |
|-----------------|------------|---------------|-----------|----------------------|---------|-----------|
| Band-width      | Modulation | RB allocation | RB offset | 132047               | 132322  | 132597    |
|                 |            |               |           | 1717.5MHz            | 1745MHz | 1772.5MHz |
| 15MHz           | QPSK       | 1             | 0         | 21.12                | 21.86   | 21.09     |
|                 |            |               | 38        | 21.04                | 21.77   | 21.01     |
|                 |            |               | 74        | 21.07                | 21.81   | 21.04     |
|                 |            | 38            | 0         | 20.46                | 21.18   | 20.44     |
|                 |            |               | 18        | 20.32                | 21.03   | 20.29     |
|                 |            |               | 37        | 20.25                | 20.96   | 20.22     |
|                 |            | 75            | 0         | 20.39                | 21.11   | 20.36     |
|                 | 16QAM      | 1             | 0         | 20.80                | 21.65   | 20.63     |
|                 |            |               | 38        | 20.72                | 21.56   | 20.55     |
|                 |            |               | 74        | 20.76                | 21.60   | 20.59     |
|                 |            | 38            | 0         | 20.15                | 20.98   | 19.99     |
|                 |            |               | 18        | 20.01                | 20.83   | 19.84     |
|                 |            |               | 37        | 19.95                | 20.76   | 19.78     |
|                 |            | 75            | 0         | 20.08                | 20.90   | 19.92     |
| Band-width      | Modulation | RB allocation | RB offset | 132072               | 132322  | 132572    |
|                 |            |               |           | 1720MHz              | 1745MHz | 1770MHz   |
| 20MHz           | QPSK       | 1             | 0         | 20.87                | 21.68   | 20.76     |
|                 |            |               | 49        | 20.79                | 21.59   | 20.68     |
|                 |            |               | 99        | 20.83                | 21.63   | 20.72     |
|                 |            | 50            | 0         | 20.22                | 21.01   | 20.12     |
|                 |            |               | 25        | 20.07                | 20.85   | 19.97     |
|                 |            |               | 50        | 20.01                | 20.79   | 19.91     |
|                 |            | 100           | 0         | 20.15                | 20.93   | 20.04     |
|                 | 16QAM      | 1             | 0         | 20.58                | 21.37   | 20.62     |
|                 |            |               | 49        | 20.50                | 21.28   | 20.54     |
|                 |            |               | 99        | 20.54                | 21.32   | 20.58     |
|                 |            | 50            | 0         | 19.94                | 20.71   | 19.98     |
|                 |            |               | 25        | 19.80                | 20.56   | 19.83     |
|                 |            |               | 50        | 19.74                | 20.49   | 19.77     |
|                 |            | 100           | 0         | 19.87                | 20.63   | 19.91     |

| LTE-FDD Band 71 |            |               |           | Conducted Power(dBm) |          |          |
|-----------------|------------|---------------|-----------|----------------------|----------|----------|
| Band-width      | Modulation | RB allocation | RB offset | 133147               | 133297   | 133447   |
|                 |            |               |           | 665.5MHz             | 680.5MHz | 695.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 21.00                | 21.96    | 20.62    |
|                 |            |               | 12        | 20.92                | 21.87    | 20.54    |
|                 |            |               | 24        | 20.96                | 21.91    | 20.58    |
|                 |            | 12            | 0         | 20.35                | 21.28    | 19.98    |
|                 |            |               | 7         | 20.20                | 21.12    | 19.83    |
|                 |            |               | 13        | 20.14                | 21.06    | 19.77    |
|                 |            | 25            | 0         | 20.27                | 21.20    | 19.91    |
|                 | 16QAM      | 1             | 0         | 20.92                | 21.91    | 20.52    |
|                 |            |               | 12        | 20.84                | 21.82    | 20.44    |
|                 |            |               | 24        | 20.88                | 21.86    | 20.48    |
|                 |            | 12            | 0         | 20.27                | 21.23    | 19.88    |
|                 |            |               | 7         | 20.12                | 21.08    | 19.74    |
|                 |            |               | 13        | 20.06                | 21.01    | 19.68    |
|                 |            | 25            | 0         | 20.20                | 21.15    | 19.81    |
| Band-width      | Modulation | RB allocation | RB offset | 133172               | 133297   | 133422   |
|                 |            |               |           | 668MHz               | 680.5MHz | 693MHz   |
| 10MHz           | QPSK       | 1             | 0         | 20.91                | 22.04    | 20.65    |
|                 |            |               | 24        | 20.83                | 21.95    | 20.57    |
|                 |            |               | 49        | 20.87                | 21.99    | 20.61    |
|                 |            | 25            | 0         | 20.26                | 21.36    | 20.01    |
|                 |            |               | 24        | 20.11                | 21.20    | 19.86    |
|                 |            |               | 49        | 20.05                | 21.14    | 19.80    |
|                 |            | 50            | 0         | 20.19                | 21.28    | 19.94    |
|                 | 16QAM      | 1             | 0         | 20.80                | 21.74    | 20.44    |
|                 |            |               | 24        | 20.72                | 21.65    | 20.36    |
|                 |            |               | 49        | 20.76                | 21.69    | 20.40    |
|                 |            | 25            | 0         | 20.15                | 21.07    | 19.81    |
|                 |            |               | 24        | 20.01                | 20.91    | 19.66    |
|                 |            |               | 49        | 19.95                | 20.85    | 19.60    |
|                 |            | 50            | 0         | 20.08                | 20.99    | 19.73    |

| LTE-FDD Band 71 |            |               |           | Conducted Power(dBm) |          |          |
|-----------------|------------|---------------|-----------|----------------------|----------|----------|
| Band-width      | Modulation | RB allocation | RB offset | 133197               | 133297   | 133397   |
|                 |            |               |           | 670.5MHz             | 680.5MHz | 690.5MHz |
| 15MHz           | QPSK       | 1             | 0         | 20.94                | 21.87    | 20.62    |
|                 |            |               | 38        | 20.86                | 21.78    | 20.54    |
|                 |            |               | 74        | 20.90                | 21.82    | 20.58    |
|                 |            | 38            | 0         | 20.29                | 21.19    | 19.98    |
|                 |            |               | 18        | 20.14                | 21.04    | 19.83    |
|                 |            |               | 37        | 20.08                | 20.97    | 19.77    |
|                 |            | 75            | 0         | 20.22                | 21.11    | 19.91    |
|                 | 16QAM      | 1             | 0         | 20.99                | 21.81    | 20.42    |
|                 |            |               | 38        | 20.91                | 21.72    | 20.34    |
|                 |            |               | 74        | 20.95                | 21.76    | 20.38    |
|                 |            | 38            | 0         | 20.34                | 21.13    | 19.79    |
|                 |            |               | 18        | 20.19                | 20.98    | 19.64    |
|                 |            |               | 37        | 20.13                | 20.92    | 19.58    |
|                 |            | 75            | 0         | 20.27                | 21.06    | 19.71    |
| Band-width      | Modulation | RB allocation | RB offset | 133222               | 133322   | 133372   |
|                 |            |               |           | 673MHz               | 683MHz   | 688MHz   |
| 20MHz           | QPSK       | 1             | 0         | 21.01                | 21.92    | 20.55    |
|                 |            |               | 49        | 20.93                | 21.83    | 20.47    |
|                 |            |               | 99        | 20.97                | 21.87    | 20.51    |
|                 |            | 50            | 0         | 20.36                | 21.24    | 19.91    |
|                 |            |               | 25        | 20.21                | 21.08    | 19.77    |
|                 |            |               | 50        | 20.15                | 21.02    | 19.71    |
|                 |            | 100           | 0         | 20.28                | 21.16    | 19.84    |
|                 | 16QAM      | 1             | 0         | 21.12                | 21.93    | 20.54    |
|                 |            |               | 49        | 21.04                | 21.84    | 20.46    |
|                 |            |               | 99        | 21.07                | 21.88    | 20.50    |
|                 |            | 50            | 0         | 20.46                | 21.25    | 19.90    |
|                 |            |               | 25        | 20.32                | 21.09    | 19.76    |
|                 |            |               | 50        | 20.25                | 21.03    | 19.70    |
|                 |            | 100           | 0         | 20.39                | 21.17    | 19.83    |

## LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplinkdownlink configurations and Table 4.2-1 for Special subframe configurations.

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)**

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                              | $6592 \cdot T_s$                 | $(1+X) \cdot 2192 \cdot T_s$   | $(1+X) \cdot 2560 \cdot T_s$     | $7680 \cdot T_s$                   | $(1+X) \cdot 2192 \cdot T_s$   | $(1+X) \cdot 2560 \cdot T_s$     |
| 1                              | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 2                              | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 3                              | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$                  |                                |                                  |
| 4                              | $26336 \cdot T_s$                | $(2+X) \cdot 2192 \cdot T_s$   | $(2+X) \cdot 2560 \cdot T_s$     | $7680 \cdot T_s$                   | $(2+X) \cdot 2192 \cdot T_s$   | $(2+X) \cdot 2560 \cdot T_s$     |
| 5                              | $6592 \cdot T_s$                 |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 6                              | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 7                              | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$                  |                                |                                  |
| 8                              | $24144 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 9                              | $13168 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 10                             | $13168 \cdot T_s$                | $13152 \cdot T_s$              | $12800 \cdot T_s$                | -                                  | -                              | -                                |

**Table 4.2-2: Uplink-downlink configurations**

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048) \text{ seconds}$

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used-configuration 0 at 63.3% duty cycle.

## 10.2.Wi-Fi

For 2.4GHz Wi-Fi SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

| Wi-Fi 2.4G     |         |                 |                               |
|----------------|---------|-----------------|-------------------------------|
| Mode           | Channel | Frequency (MHz) | Conducted Average Power (dBm) |
| 802.11b        | 1       | 2412            | 17.99                         |
|                | 6       | 2437            | 18.04                         |
|                | 11      | 2462            | 18.86                         |
| 802.11g        | 1       | 2412            | 19.33                         |
|                | 6       | 2437            | 19.54                         |
|                | 11      | 2462            | 20.18                         |
| 802.11n (HT20) | 1       | 2412            | 18.00                         |
|                | 6       | 2437            | 18.23                         |
|                | 11      | 2462            | 18.73                         |

**11. Maximum Tune-up Limit**

| LTE           |                 |            |               |                       |
|---------------|-----------------|------------|---------------|-----------------------|
| Fequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 2    | 1.4             | QPSK       | 1             | 21.50                 |
|               |                 |            | 3             | 21.00                 |
|               |                 |            | 6             | 21.00                 |
|               |                 | 16QAM      | 1             | 21.50                 |
|               |                 |            | 3             | 21.00                 |
|               |                 |            | 6             | 20.50                 |
|               | 3               | QPSK       | 1             | 21.50                 |
|               |                 |            | 8             | 21.00                 |
|               |                 |            | 15            | 21.00                 |
|               |                 | 16QAM      | 1             | 21.00                 |
|               |                 |            | 8             | 20.50                 |
|               |                 |            | 15            | 20.50                 |
|               | 5               | QPSK       | 1             | 21.50                 |
|               |                 |            | 12            | 20.50                 |
|               |                 |            | 25            | 20.50                 |
|               |                 | 16QAM      | 1             | 21.00                 |
|               |                 |            | 12            | 20.50                 |
|               |                 |            | 25            | 20.50                 |
|               | 10              | QPSK       | 1             | 21.50                 |
|               |                 |            | 25            | 21.00                 |
|               |                 |            | 50            | 21.00                 |
|               |                 | 16QAM      | 1             | 21.50                 |
|               |                 |            | 25            | 21.00                 |
|               |                 |            | 50            | 21.00                 |
|               | 15              | QPSK       | 1             | 21.50                 |
|               |                 |            | 38            | 21.00                 |
|               |                 |            | 75            | 20.50                 |
|               |                 | 16QAM      | 1             | 21.00                 |
|               |                 |            | 38            | 20.50                 |
|               |                 |            | 75            | 20.50                 |
|               | 20              | QPSK       | 1             | 21.50                 |
|               |                 |            | 50            | 20.50                 |
|               |                 |            | 100           | 20.50                 |
|               |                 | 16QAM      | 1             | 21.00                 |
|               |                 |            | 50            | 20.50                 |
|               |                 |            | 100           | 20.00                 |

| LTE            |                 |            |               |                       |
|----------------|-----------------|------------|---------------|-----------------------|
| Frequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 4     | 1.4             | QPSK       | 1             | 21.50                 |
|                |                 |            | 3             | 21.00                 |
|                |                 |            | 6             | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 3             | 21.00                 |
|                |                 |            | 6             | 21.00                 |
|                | 3               | QPSK       | 1             | 21.50                 |
|                |                 |            | 8             | 21.00                 |
|                |                 |            | 15            | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 8             | 20.50                 |
|                |                 |            | 15            | 20.50                 |
|                | 5               | QPSK       | 1             | 21.50                 |
|                |                 |            | 12            | 21.00                 |
|                |                 |            | 25            | 20.50                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 12            | 20.50                 |
|                |                 |            | 25            | 20.50                 |
|                | 10              | QPSK       | 1             | 21.50                 |
|                |                 |            | 25            | 21.00                 |
|                |                 |            | 50            | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 25            | 21.00                 |
|                |                 |            | 50            | 21.00                 |
|                | 15              | QPSK       | 1             | 21.50                 |
|                |                 |            | 38            | 21.00                 |
|                |                 |            | 75            | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 38            | 21.00                 |
|                |                 |            | 75            | 20.50                 |
|                | 20              | QPSK       | 1             | 21.50                 |
|                |                 |            | 50            | 21.00                 |
|                |                 |            | 100           | 20.50                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 50            | 20.50                 |
|                |                 |            | 100           | 20.50                 |

| LTE           |                 |            |               |                       |
|---------------|-----------------|------------|---------------|-----------------------|
| Fequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 5    | 1.4             | QPSK       | 1             | 23.00                 |
|               |                 |            | 3             | 22.00                 |
|               |                 |            | 6             | 22.00                 |
|               |                 | 16QAM      | 1             | 22.50                 |
|               |                 |            | 3             | 22.00                 |
|               |                 |            | 6             | 22.00                 |
|               | 3               | QPSK       | 1             | 23.00                 |
|               |                 |            | 8             | 22.00                 |
|               |                 |            | 15            | 22.00                 |
|               |                 | 16QAM      | 1             | 22.50                 |
|               |                 |            | 8             | 22.00                 |
|               |                 |            | 15            | 22.00                 |
|               | 5               | QPSK       | 1             | 22.50                 |
|               |                 |            | 12            | 22.00                 |
|               |                 |            | 25            | 22.00                 |
|               |                 | 16QAM      | 1             | 22.50                 |
|               |                 |            | 12            | 22.00                 |
|               |                 |            | 25            | 21.50                 |
|               | 10              | QPSK       | 1             | 23.00                 |
|               |                 |            | 25            | 22.00                 |
|               |                 |            | 50            | 22.00                 |
|               |                 | 16QAM      | 1             | 22.50                 |
|               |                 |            | 25            | 22.00                 |
|               |                 |            | 50            | 22.00                 |

| LTE           |                 |            |               |                       |
|---------------|-----------------|------------|---------------|-----------------------|
| Fequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 12   | 1.4             | QPSK       | 1             | 22.50                 |
|               |                 |            | 3             | 21.50                 |
|               |                 |            | 6             | 21.50                 |
|               |                 | 16QAM      | 1             | 22.50                 |
|               |                 |            | 3             | 21.50                 |
|               |                 |            | 6             | 21.50                 |
|               | 3               | QPSK       | 1             | 22.50                 |
|               |                 |            | 8             | 21.50                 |
|               |                 |            | 15            | 21.50                 |
|               |                 | 16QAM      | 1             | 22.00                 |
|               |                 |            | 8             | 21.50                 |
|               |                 |            | 15            | 21.50                 |
|               | 5               | QPSK       | 1             | 22.50                 |
|               |                 |            | 12            | 21.50                 |
|               |                 |            | 25            | 21.50                 |
|               |                 | 16QAM      | 1             | 22.00                 |
|               |                 |            | 12            | 21.50                 |
|               |                 |            | 25            | 21.50                 |
|               | 10              | QPSK       | 1             | 22.50                 |
|               |                 |            | 25            | 21.50                 |
|               |                 |            | 50            | 21.50                 |
|               |                 | 16QAM      | 1             | 22.50                 |
|               |                 |            | 25            | 21.50                 |
|               |                 |            | 50            | 21.50                 |

| LTE            |                 |            |               |                       |
|----------------|-----------------|------------|---------------|-----------------------|
| Frequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 13    | 5               | QPSK       | 1             | 22.00                 |
|                |                 |            | 12            | 21.00                 |
|                |                 |            | 25            | 21.00                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 12            | 21.00                 |
|                |                 |            | 25            | 21.00                 |
|                | 10              | QPSK       | 1             | 22.00                 |
|                |                 |            | 25            | 21.50                 |
|                |                 |            | 50            | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 25            | 21.00                 |
|                |                 |            | 50            | 21.00                 |

| LTE            |                 |            |               |                       |
|----------------|-----------------|------------|---------------|-----------------------|
| Frequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 14    | 5               | QPSK       | 1             | 21.50                 |
|                |                 |            | 12            | 21.00                 |
|                |                 |            | 25            | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 12            | 20.50                 |
|                |                 |            | 25            | 20.50                 |
|                | 10              | QPSK       | 1             | 21.50                 |
|                |                 |            | 25            | 21.00                 |
|                |                 |            | 50            | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 25            | 21.00                 |
|                |                 |            | 50            | 20.50                 |


| LTE            |                 |            |               |                       |
|----------------|-----------------|------------|---------------|-----------------------|
| Frequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 66    | 1.4             | QPSK       | 1             | 22.50                 |
|                |                 |            | 3             | 21.50                 |
|                |                 |            | 6             | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 3             | 21.50                 |
|                |                 |            | 6             | 21.50                 |
|                | 3               | QPSK       | 1             | 22.50                 |
|                |                 |            | 8             | 21.50                 |
|                |                 |            | 15            | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 8             | 21.00                 |
|                |                 |            | 15            | 21.00                 |
|                | 5               | QPSK       | 1             | 22.00                 |
|                |                 |            | 12            | 21.50                 |
|                |                 |            | 25            | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 12            | 21.00                 |
|                |                 |            | 25            | 21.00                 |
|                | 10              | QPSK       | 1             | 22.00                 |
|                |                 |            | 25            | 21.50                 |
|                |                 |            | 50            | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 25            | 21.50                 |
|                |                 |            | 50            | 21.50                 |
|                | 15              | QPSK       | 1             | 22.00                 |
|                |                 |            | 38            | 21.50                 |
|                |                 |            | 75            | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 38            | 21.00                 |
|                |                 |            | 75            | 21.00                 |
|                | 20              | QPSK       | 1             | 22.00                 |
|                |                 |            | 50            | 21.50                 |
|                |                 |            | 100           | 21.00                 |
|                |                 | 16QAM      | 1             | 21.50                 |
|                |                 |            | 50            | 21.00                 |
|                |                 |            | 100           | 21.00                 |

| LTE            |                 |            |               |                       |
|----------------|-----------------|------------|---------------|-----------------------|
| Frequency Band | Band-width(MHz) | Modulation | RB allocation | Maximum Tune-up (dBm) |
| FDD Band 71    | 5               | QPSK       | 1             | 22.00                 |
|                |                 |            | 12            | 21.50                 |
|                |                 |            | 25            | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 12            | 21.50                 |
|                |                 |            | 25            | 21.50                 |
|                | 10              | QPSK       | 1             | 22.50                 |
|                |                 |            | 25            | 21.50                 |
|                |                 |            | 50            | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 25            | 21.50                 |
|                |                 |            | 50            | 21.00                 |
|                | 15              | QPSK       | 1             | 22.00                 |
|                |                 |            | 38            | 21.50                 |
|                |                 |            | 75            | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 38            | 21.50                 |
|                |                 |            | 75            | 21.50                 |
|                | 20              | QPSK       | 1             | 22.00                 |
|                |                 |            | 50            | 21.50                 |
|                |                 |            | 100           | 21.50                 |
|                |                 | 16QAM      | 1             | 22.00                 |
|                |                 |            | 50            | 21.50                 |
|                |                 |            | 100           | 21.50                 |

| Wi-Fi 2.4G    |         |                                                  |
|---------------|---------|--------------------------------------------------|
| Mode          | Channel | Maximum Tune-up (dBm)<br>Conducted Average Power |
| 802.11b       | 1       | 18.00                                            |
|               | 6       | 18.50                                            |
|               | 11      | 19.00                                            |
| 802.11g       | 1       | 19.50                                            |
|               | 6       | 20.00                                            |
|               | 11      | 20.50                                            |
| 802.11n(HT20) | 1       | 18.00                                            |
|               | 6       | 18.50                                            |
|               | 11      | 19.00                                            |

## 12. RF Exposure Conditions (Test Configurations)

### 12.1. Antenna Location

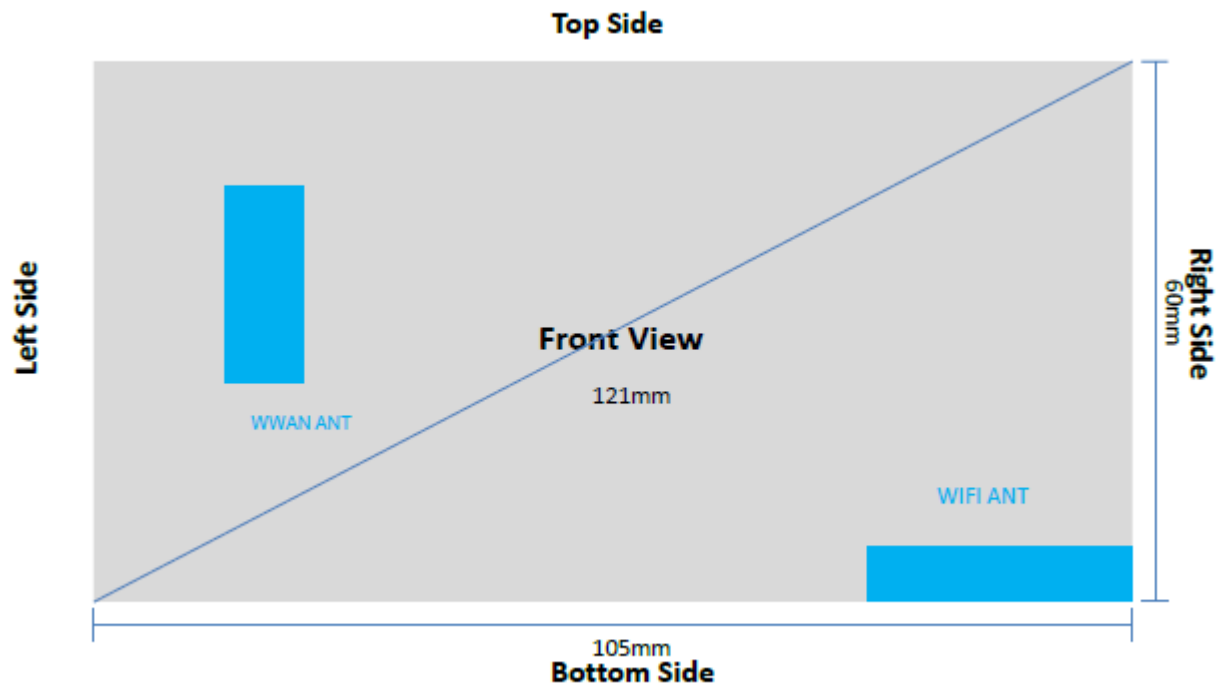

### **13. Measured and Reported SAR Results**

**SAR Test Reduction criteria are as follows:**

- Reported SAR(W/kg) for WWAN = Measured SAR \*Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR \* Tune-up scaling factor \* Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

**KDB 447498 D01 General RF Exposure Guidance:**

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

**KDB 941225 D05 SAR for LTE Devices:**

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg.
- Testing for 16-QAM and 64-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

**KDB 447498 D01 General RF Exposure Guidance:**

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

**KDB 248227 D01 SAR meas for 802.11:**

When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

| LTE Band 2    |               |           |      |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|------|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |      | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz  |                       |                     |                        |                 |                         |                       |          |
| 20M QPSK 1RB  | Front         | 18700     | 1860 | 20.69                 | 21.50               | 1.205                  | 0.18            | 1.220                   | 1.470                 | -        |
|               |               | 18900     | 1880 | 21.05                 | 21.50               | 1.109                  | -0.16           | 1.350                   | 1.497                 | 1        |
|               |               | 19100     | 1900 | 20.72                 | 21.50               | 1.197                  | -0.01           | 1.180                   | 1.412                 | -        |
|               | Rear          | 18900     | 1880 | 21.05                 | 21.50               | 1.109                  | 0.08            | 0.426                   | 0.473                 | -        |
|               | Left          | 18900     | 1880 | 21.05                 | 21.50               | 1.109                  | -0.13           | 0.183                   | 0.203                 | -        |
|               | Right         | 18900     | 1880 | 21.05                 | 21.50               | 1.109                  | 0.06            | 0.162                   | 0.180                 | -        |
|               | Top           | 18900     | 1880 | 21.05                 | 21.50               | 1.109                  | -0.14           | 0.668                   | 0.741                 | -        |
|               | Bottom        | 18900     | 1880 | 21.05                 | 21.50               | 1.109                  | 0.05            | 0.200                   | 0.222                 | -        |
| 20M QPSK 50RB | Front         | 18700     | 1860 | 20.05                 | 20.50               | 1.110                  | 0.12            | 1.080                   | 1.198                 | -        |
|               |               | 18900     | 1880 | 20.40                 | 20.50               | 1.024                  | 0.11            | 1.280                   | 1.311                 | -        |
|               |               | 19100     | 1900 | 20.08                 | 20.50               | 1.102                  | -0.03           | 0.924                   | 1.019                 | -        |
|               | Rear          | 18900     | 1880 | 20.40                 | 20.50               | 1.024                  | -0.07           | 0.400                   | 0.410                 | -        |
|               | Left          | 18900     | 1880 | 20.40                 | 20.50               | 1.024                  | 0.19            | 0.172                   | 0.176                 | -        |
|               | Right         | 18900     | 1880 | 20.40                 | 20.50               | 1.024                  | -0.12           | 0.148                   | 0.152                 | -        |
|               | Top           | 18900     | 1880 | 20.40                 | 20.50               | 1.024                  | -0.16           | 0.640                   | 0.655                 | -        |
|               | Bottom        | 18900     | 1880 | 20.40                 | 20.50               | 1.024                  | 0.03            | 0.180                   | 0.184                 | -        |

| LTE Band 4    |               |           |        |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|--------|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |        | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz    |                       |                     |                        |                 |                         |                       |          |
| 20M QPSK 1RB  | Front         | 20050     | 1720   | 20.93                 | 21.50               | 1.140                  | -0.13           | 1.320                   | 1.505                 | -        |
|               |               | 20175     | 1732.5 | 21.20                 | 21.50               | 1.072                  | -0.16           | 1.470                   | 1.575                 | 2        |
|               |               | 20300     | 1745   | 20.38                 | 21.50               | 1.294                  | 0.14            | 1.200                   | 1.553                 | -        |
|               | Rear          | 20175     | 1732.5 | 21.20                 | 21.50               | 1.072                  | -0.17           | 0.500                   | 0.536                 | -        |
|               | Left          | 20175     | 1732.5 | 21.20                 | 21.50               | 1.072                  | -0.06           | 0.206                   | 0.221                 | -        |
|               | Right         | 20175     | 1732.5 | 21.20                 | 21.50               | 1.072                  | -0.08           | 0.180                   | 0.193                 | -        |
|               | Top           | 20175     | 1732.5 | 21.20                 | 21.50               | 1.072                  | 0.13            | 0.720                   | 0.771                 | -        |
|               | Bottom        | 20175     | 1732.5 | 21.20                 | 21.50               | 1.072                  | 0.19            | 0.220                   | 0.236                 | -        |
| 20M QPSK 50RB | Front         | 20050     | 1720   | 20.28                 | 21.00               | 1.180                  | 0.08            | 1.200                   | 1.416                 | -        |
|               |               | 20175     | 1732.5 | 20.54                 | 21.00               | 1.111                  | -0.07           | 1.300                   | 1.445                 | -        |
|               |               | 20300     | 1745   | 19.75                 | 21.00               | 1.334                  | 0.16            | 1.060                   | 1.414                 | -        |
|               | Rear          | 20175     | 1732.5 | 20.54                 | 21.00               | 1.111                  | 0.05            | 0.474                   | 0.527                 | -        |
|               | Left          | 20175     | 1732.5 | 20.54                 | 21.00               | 1.111                  | -0.06           | 0.183                   | 0.203                 | -        |
|               | Right         | 20175     | 1732.5 | 20.54                 | 21.00               | 1.111                  | -0.02           | 0.162                   | 0.180                 | -        |
|               | Top           | 20175     | 1732.5 | 20.54                 | 21.00               | 1.111                  | 0.14            | 0.680                   | 0.756                 | -        |
|               | Bottom        | 20175     | 1732.5 | 20.54                 | 21.00               | 1.111                  | -0.15           | 0.210                   | 0.233                 | -        |

| LTE Band 5    |               |           |       |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|-------|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |       | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz   |                       |                     |                        |                 |                         |                       |          |
| 10M QPSK 1RB  | Front         | 20450     | 829   | 21.66                 | 23.00               | 1.361                  | 0.13            | 0.660                   | 0.899                 | -        |
|               |               | 20525     | 836.5 | 22.53                 | 23.00               | 1.114                  | 0.04            | 0.832                   | 0.927                 | 3        |
|               |               | 20600     | 844   | 21.20                 | 23.00               | 1.514                  | -0.12           | 0.520                   | 0.787                 | -        |
|               | Rear          | 20525     | 836.5 | 22.53                 | 23.00               | 1.114                  | -0.08           | 0.220                   | 0.245                 | -        |
|               | Left          | 20525     | 836.5 | 22.53                 | 23.00               | 1.114                  | 0.06            | 0.096                   | 0.107                 | -        |
|               | Right         | 20525     | 836.5 | 22.53                 | 23.00               | 1.114                  | 0.14            | 0.082                   | 0.091                 | -        |
|               | Top           | 20525     | 836.5 | 22.53                 | 23.00               | 1.114                  | 0.07            | 0.280                   | 0.312                 | -        |
|               | Bottom        | 20525     | 836.5 | 22.53                 | 23.00               | 1.114                  | -0.06           | 0.106                   | 0.118                 | -        |
| 10M QPSK 50RB | Front         | 20450     | 829   | 20.99                 | 22.00               | 1.262                  | 0.11            | 0.620                   | 0.783                 | -        |
|               |               | 20525     | 836.5 | 21.83                 | 22.00               | 1.040                  | 0.16            | 0.802                   | 0.834                 | -        |
|               |               | 20600     | 844   | 20.54                 | 22.00               | 1.399                  | -0.06           | 0.500                   | 0.699                 | -        |
|               | Rear          | 20525     | 836.5 | 21.83                 | 22.00               | 1.040                  | 0.12            | 0.194                   | 0.202                 | -        |
|               | Left          | 20525     | 836.5 | 21.83                 | 22.00               | 1.040                  | 0.01            | 0.077                   | 0.080                 | -        |
|               | Right         | 20525     | 836.5 | 21.83                 | 22.00               | 1.040                  | -0.08           | 0.060                   | 0.062                 | -        |
|               | Top           | 20525     | 836.5 | 21.83                 | 22.00               | 1.040                  | -0.19           | 0.267                   | 0.278                 | -        |
|               | Bottom        | 20525     | 836.5 | 21.83                 | 22.00               | 1.040                  | -0.10           | 0.090                   | 0.094                 | -        |

| LTE Band 12   |               |           |       |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|-------|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |       | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz   |                       |                     |                        |                 |                         |                       |          |
| 10M QPSK 1RB  | Front         | 23095     | 707.5 | 22.14                 | 22.50               | 1.086                  | -0.10           | 0.106                   | 0.115                 | 4        |
|               | Rear          | 23095     | 707.5 | 22.14                 | 22.50               | 1.086                  | -0.16           | 0.032                   | 0.035                 | -        |
|               | Left          | 23095     | 707.5 | 22.14                 | 22.50               | 1.086                  | -0.05           | 0.016                   | 0.017                 | -        |
|               | Right         | 23095     | 707.5 | 22.14                 | 22.50               | 1.086                  | 0.13            | 0.012                   | 0.013                 | -        |
|               | Top           | 23095     | 707.5 | 22.14                 | 22.50               | 1.086                  | 0.07            | 0.050                   | 0.054                 | -        |
|               | Bottom        | 23095     | 707.5 | 22.14                 | 22.50               | 1.086                  | -0.02           | 0.022                   | 0.024                 | -        |
| 10M QPSK 25RB | Front         | 23095     | 707.5 | 21.45                 | 21.50               | 1.011                  | -0.06           | 0.102                   | 0.103                 | -        |
|               | Rear          | 23095     | 707.5 | 21.45                 | 21.50               | 1.011                  | -0.14           | 0.030                   | 0.030                 | -        |
|               | Left          | 23095     | 707.5 | 21.45                 | 21.50               | 1.011                  | -0.11           | 0.013                   | 0.013                 | -        |
|               | Right         | 23095     | 707.5 | 21.45                 | 21.50               | 1.011                  | 0.08            | 0.010                   | 0.010                 | -        |
|               | Top           | 23095     | 707.5 | 21.45                 | 21.50               | 1.011                  | 0.03            | 0.044                   | 0.044                 | -        |
|               | Bottom        | 23095     | 707.5 | 21.45                 | 21.50               | 1.011                  | 0.15            | 0.018                   | 0.018                 | -        |

| LTE Band 13   |               |           |     |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|-----|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |     | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz |                       |                     |                        |                 |                         |                       |          |
| 10M QPSK 1RB  | Front         | 23230     | 782 | 21.68                 | 22.00               | 1.076                  | 0.17            | 0.378                   | 0.407                 | 5        |
|               | Rear          | 23230     | 782 | 21.68                 | 22.00               | 1.076                  | -0.06           | 0.087                   | 0.094                 | -        |
|               | Left          | 23230     | 782 | 21.68                 | 22.00               | 1.076                  | 0.14            | 0.044                   | 0.047                 | -        |
|               | Right         | 23230     | 782 | 21.68                 | 22.00               | 1.076                  | -0.08           | 0.040                   | 0.043                 | -        |
|               | Top           | 23230     | 782 | 21.68                 | 22.00               | 1.076                  | 0.14            | 0.101                   | 0.109                 | -        |
|               | Bottom        | 23230     | 782 | 21.68                 | 22.00               | 1.076                  | -0.16           | 0.062                   | 0.067                 | -        |
| 10M QPSK 25RB | Front         | 23230     | 782 | 21.01                 | 21.50               | 1.120                  | -0.08           | 0.350                   | 0.392                 | -        |
|               | Rear          | 23230     | 782 | 21.01                 | 21.50               | 1.120                  | 0.13            | 0.080                   | 0.090                 | -        |
|               | Left          | 23230     | 782 | 21.01                 | 21.50               | 1.120                  | 0.07            | 0.038                   | 0.043                 | -        |
|               | Right         | 23230     | 782 | 21.01                 | 21.50               | 1.120                  | -0.02           | 0.035                   | 0.039                 | -        |
|               | Top           | 23230     | 782 | 21.01                 | 21.50               | 1.120                  | 0.19            | 0.094                   | 0.105                 | -        |
|               | Bottom        | 23230     | 782 | 21.01                 | 21.50               | 1.120                  | -0.07           | 0.055                   | 0.062                 | -        |

| LTE Band 14   |               |           |     |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|-----|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |     | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz |                       |                     |                        |                 |                         |                       |          |
| 10M QPSK 1RB  | Front         | 23330     | 793 | 21.46                 | 21.50               | 1.009                  | 0.01            | 0.442                   | 0.446                 | 6        |
|               | Rear          | 23330     | 793 | 21.46                 | 21.50               | 1.009                  | -0.07           | 0.092                   | 0.093                 | -        |
|               | Left          | 23330     | 793 | 21.46                 | 21.50               | 1.009                  | 0.16            | 0.051                   | 0.051                 | -        |
|               | Right         | 23330     | 793 | 21.46                 | 21.50               | 1.009                  | -0.18           | 0.046                   | 0.046                 | -        |
|               | Top           | 23330     | 793 | 21.46                 | 21.50               | 1.009                  | 0.02            | 0.110                   | 0.111                 | -        |
|               | Bottom        | 23330     | 793 | 21.46                 | 21.50               | 1.009                  | 0.13            | 0.071                   | 0.072                 | -        |
| 10M QPSK 25RB | Front         | 23330     | 793 | 20.79                 | 21.00               | 1.049                  | -0.14           | 0.422                   | 0.442                 | -        |
|               | Rear          | 23330     | 793 | 21.46                 | 21.50               | 1.009                  | 0.17            | 0.083                   | 0.084                 | -        |
|               | Left          | 23330     | 793 | 20.79                 | 21.00               | 1.049                  | 0.06            | 0.046                   | 0.048                 | -        |
|               | Right         | 23330     | 793 | 20.79                 | 21.00               | 1.049                  | -0.05           | 0.040                   | 0.042                 | -        |
|               | Top           | 23330     | 793 | 20.79                 | 21.00               | 1.049                  | 0.12            | 0.099                   | 0.104                 | -        |
|               | Bottom        | 23330     | 793 | 20.79                 | 21.00               | 1.049                  | 0.11            | 0.060                   | 0.063                 | -        |

| LTE Band 66   |               |           |      |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|------|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |      | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz  |                       |                     |                        |                 |                         |                       |          |
| 20M QPSK 1RB  | Front         | 132072    | 1720 | 20.87                 | 22.00               | 1.297                  | 0.13            | 1.180                   | 1.531                 | -        |
|               |               | 132322    | 1745 | 21.68                 | 22.00               | 1.076                  | 0.11            | 1.480                   | 1.593                 | 7        |
|               |               | 132572    | 1770 | 20.76                 | 22.00               | 1.330                  | -0.12           | 1.060                   | 1.410                 | -        |
|               | Rear          | 132322    | 1745 | 21.68                 | 22.00               | 1.076                  | -0.16           | 0.520                   | 0.560                 | -        |
|               | Left          | 132322    | 1745 | 21.68                 | 22.00               | 1.076                  | -0.08           | 0.210                   | 0.226                 | -        |
|               | Right         | 132322    | 1745 | 21.68                 | 22.00               | 1.076                  | 0.13            | 0.190                   | 0.205                 | -        |
|               | Top           | 132322    | 1745 | 21.68                 | 22.00               | 1.076                  | -0.05           | 0.740                   | 0.797                 | -        |
|               | Bottom        | 132322    | 1745 | 21.68                 | 22.00               | 1.076                  | 0.12            | 0.240                   | 0.258                 | -        |
| 20M QPSK 50RB | Front         | 132072    | 1720 | 20.22                 | 21.50               | 1.342                  | 0.11            | 0.996                   | 1.337                 | -        |
|               |               | 132322    | 1745 | 21.01                 | 21.50               | 1.120                  | -0.19           | 1.400                   | 1.568                 | -        |
|               |               | 132572    | 1770 | 20.12                 | 21.50               | 1.375                  | -0.08           | 0.968                   | 1.331                 | -        |
|               | Rear          | 132322    | 1745 | 21.01                 | 21.50               | 1.120                  | 0.07            | 0.472                   | 0.529                 | -        |
|               | Left          | 132322    | 1745 | 21.01                 | 21.50               | 1.120                  | 0.13            | 0.183                   | 0.205                 | -        |
|               | Right         | 132322    | 1745 | 21.01                 | 21.50               | 1.120                  | -0.02           | 0.174                   | 0.195                 | -        |
|               | Top           | 132322    | 1745 | 21.01                 | 21.50               | 1.120                  | 0.06            | 0.702                   | 0.786                 | -        |
|               | Bottom        | 132322    | 1745 | 21.01                 | 21.50               | 1.120                  | 0.19            | 0.220                   | 0.246                 | -        |

| LTE Band 71   |               |           |     |                       |                     |                        |                 |                         |                       |          |
|---------------|---------------|-----------|-----|-----------------------|---------------------|------------------------|-----------------|-------------------------|-----------------------|----------|
| Mode          | Test Position | Frequency |     | Conducted Power (dBm) | Tune up limit (dBm) | Tune up scaling factor | Power Drift(dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|               |               | CH        | MHz |                       |                     |                        |                 |                         |                       |          |
| 20M QPSK 1RB  | Front         | 133322    | 683 | 21.92                 | 22.00               | 1.019                  | -0.15           | 0.078                   | 0.079                 | 8        |
|               | Rear          | 133322    | 683 | 21.92                 | 22.00               | 1.019                  | -0.07           | 0.010                   | 0.010                 | -        |
|               | Left          | 133322    | 683 | 21.92                 | 22.00               | 1.019                  | 0.13            | 0.006                   | 0.006                 | -        |
|               | Right         | 133322    | 683 | 21.92                 | 22.00               | 1.019                  | -0.02           | 0.040                   | 0.041                 | -        |
|               | Top           | 133322    | 683 | 21.92                 | 22.00               | 1.019                  | 0.14            | 0.050                   | 0.051                 | -        |
|               | Bottom        | 133322    | 683 | 21.92                 | 22.00               | 1.019                  | -0.09           | 0.020                   | 0.020                 | -        |
| 20M QPSK 25RB | Front         | 133322    | 683 | 21.24                 | 21.50               | 1.062                  | 0.13            | 0.070                   | 0.074                 | -        |
|               | Rear          | 133322    | 683 | 21.24                 | 21.50               | 1.062                  | -0.08           | 0.008                   | 0.008                 | -        |
|               | Left          | 133322    | 683 | 21.24                 | 21.50               | 1.062                  | 0.12            | 0.004                   | 0.004                 | -        |
|               | Right         | 133322    | 683 | 21.24                 | 21.50               | 1.062                  | -0.09           | 0.002                   | 0.002                 | -        |
|               | Top           | 133322    | 683 | 21.24                 | 21.50               | 1.062                  | 0.14            | 0.044                   | 0.047                 | -        |
|               | Bottom        | 133322    | 683 | 21.24                 | 21.50               | 1.062                  | -0.16           | 0.014                   | 0.015                 | -        |

Note:

For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9%) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

| Wi-Fi 2.4G |               |           |      |                       |                     |                        |            |                           |                  |                         |                       |          |
|------------|---------------|-----------|------|-----------------------|---------------------|------------------------|------------|---------------------------|------------------|-------------------------|-----------------------|----------|
| Mode       | Test Position | Frequency |      | Conducted Power (dBm) | Tune-up limit (dBm) | Tune-up scaling factor | Duty Cycle | Duty Cycle Scaling Factor | Power Drift (dB) | Measured SAR(1g) (W/kg) | Report SAR(1g) (W/kg) | Plot No. |
|            |               | CH        | MHz  |                       |                     |                        |            |                           |                  |                         |                       |          |
| 802.11b    | Front         | 11        | 2462 | 18.86                 | 19.00               | 1.033                  | 90.12%     | 1.11                      | -0.04            | 0.523                   | 0.599                 | 1        |
|            | Rear          | 11        | 2462 | 18.86                 | 19.00               | 1.033                  | 90.12%     | 1.11                      | 0.08             | 0.104                   | 0.119                 | -        |
|            | Right         | 11        | 2462 | 18.86                 | 19.00               | 1.033                  | 90.12%     | 1.11                      | -0.13            | 0.128                   | 0.147                 | -        |
|            | Top           | 11        | 2462 | 18.86                 | 19.00               | 1.033                  | 90.12%     | 1.11                      | 0.06             | 0.085                   | 0.097                 | -        |
|            | Bottom        | 11        | 2462 | 18.86                 | 19.00               | 1.033                  | 90.12%     | 1.11                      | 0.09             | 0.117                   | 0.134                 | -        |

SAR Test Data Plots to the Appendix A.


## 14. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

| Band             | Test Position | Frequency |        | Highest Measured SAR (W/kg) | First Repeated     |                               | Second Repeated    |                               |
|------------------|---------------|-----------|--------|-----------------------------|--------------------|-------------------------------|--------------------|-------------------------------|
|                  |               | CH        | MHz    |                             | Measured SAR(W/kg) | Largest to Smallest SAR Ratio | Measured SAR(W/kg) | Largest to Smallest SAR Ratio |
| LTE Band 2 1RB   | Front         | 18900     | 1880   | 1.350                       | 1.330              | 1.015                         | N/A                | N/A                           |
| LTE Band 2 50RB  | Front         | 18900     | 1880   | 1.280                       | 1.260              | 1.016                         | N/A                | N/A                           |
| LTE Band 4 1RB   | Front         | 20175     | 1732.5 | 1.470                       | 1.450              | 1.014                         | N/A                | N/A                           |
| LTE Band 4 50RB  | Front         | 20175     | 1732.5 | 1.300                       | 1.280              | 1.016                         | N/A                | N/A                           |
| LTE Band 5 1RB   | Front         | 20525     | 836.5  | 0.832                       | 0.820              | 1.015                         | N/A                | N/A                           |
| LTE Band 5 50RB  | Front         | 20525     | 836.5  | 0.802                       | 0.793              | 1.011                         | N/A                | N/A                           |
| LTE Band 66 1RB  | Front         | 132322    | 1745   | 1.480                       | 1.460              | 1.014                         | N/A                | N/A                           |
| LTE Band 66 50RB | Front         | 132322    | 1745   | 1.400                       | 1.370              | 1.022                         | N/A                | N/A                           |

## 15. TestSetup Photos

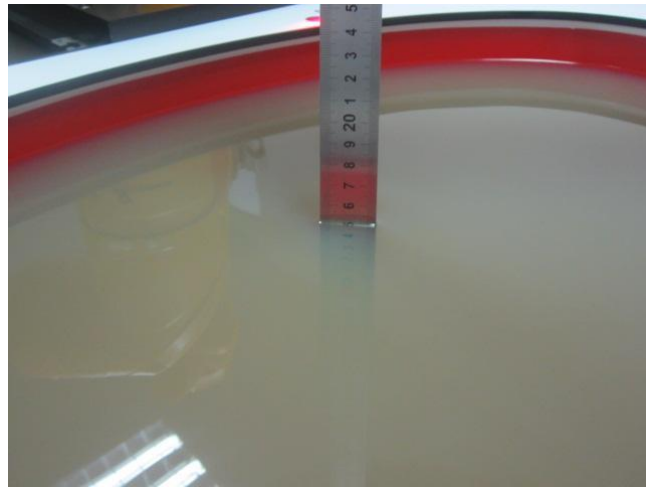


Liquid depth in the Body phantom



Rear (0mm)



Front (0mm)

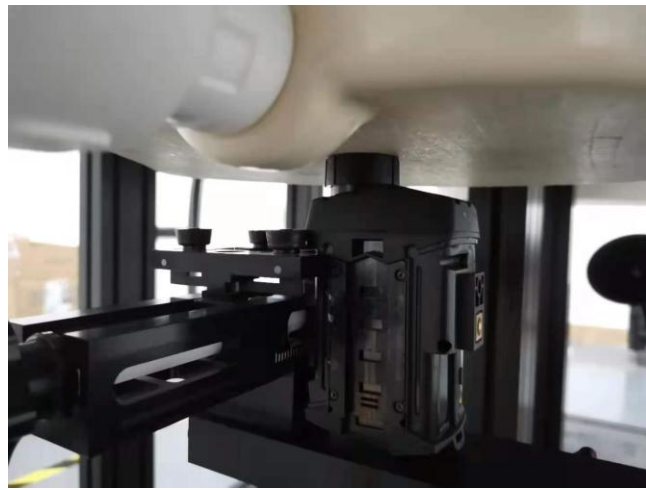

Left Side (0mm)



Right Side (0mm)



Top Side (0mm)



Bottom Side (0mm)

## **16. External and Internal Photos of the EUT**

Please reference to the report No.: CHTEW21040142

***-----End of Report-----***

## LTE Band 2-Body

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.465$  S/m;  $\epsilon_r = 38.142$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.8°C; Liquid Temperature: 22.6°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body/CH 18900/Area Scan (61x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 2.51 W/kg


**Body/CH 18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 35.15 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.49 W/kg

**SAR(1 g) = 1.35 W/kg; SAR(10 g) = 0.741 W/kg**

Maximum value of SAR (measured) = 2.01 W/kg

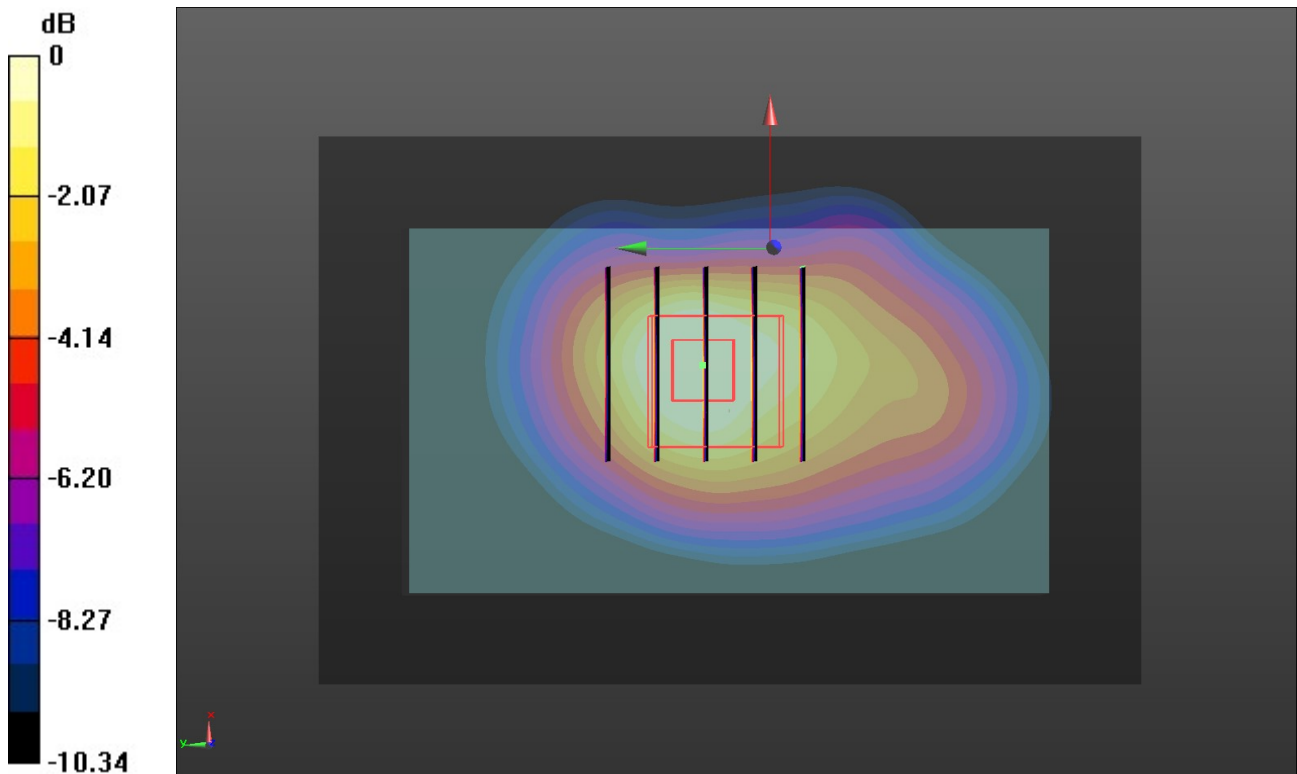

Test Laboratory: Huatongwei International Inspection Co., Ltd., SAR Lab

Date: 5/13/2021

## LTE Band 4-Body

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 38.325$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C; Liquid Temperature: 22.5°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.88, 8.88, 8.88) @ 1732.5 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body/CH 20175/Area Scan (61x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 3.31 W/kg


**Body/CH 20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 34.24 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.37 W/kg

**SAR(1 g) = 1.47 W/kg; SAR(10 g) = 0.911 W/kg**

Maximum value of SAR (measured) = 2.34 W/kg

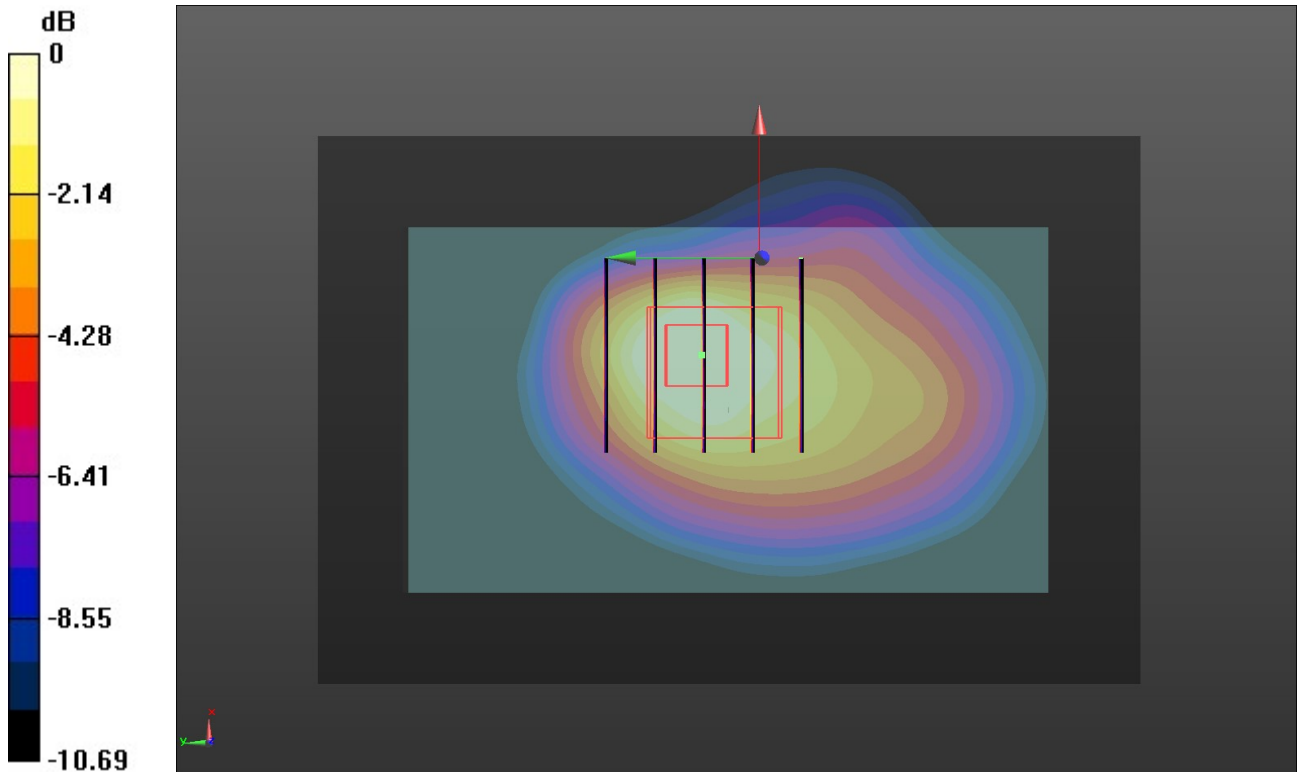

0 dB = 2.34 W/kg = 4.53 dBW/kg

## LTE Band 5-Body

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.931$  S/m;  $\epsilon_r = 40.383$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 836.5 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body/CH 20525/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.32 W/kg


**Body/CH 20525/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.66 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.495 W/kg**

Maximum value of SAR (measured) = 1.46 W/kg

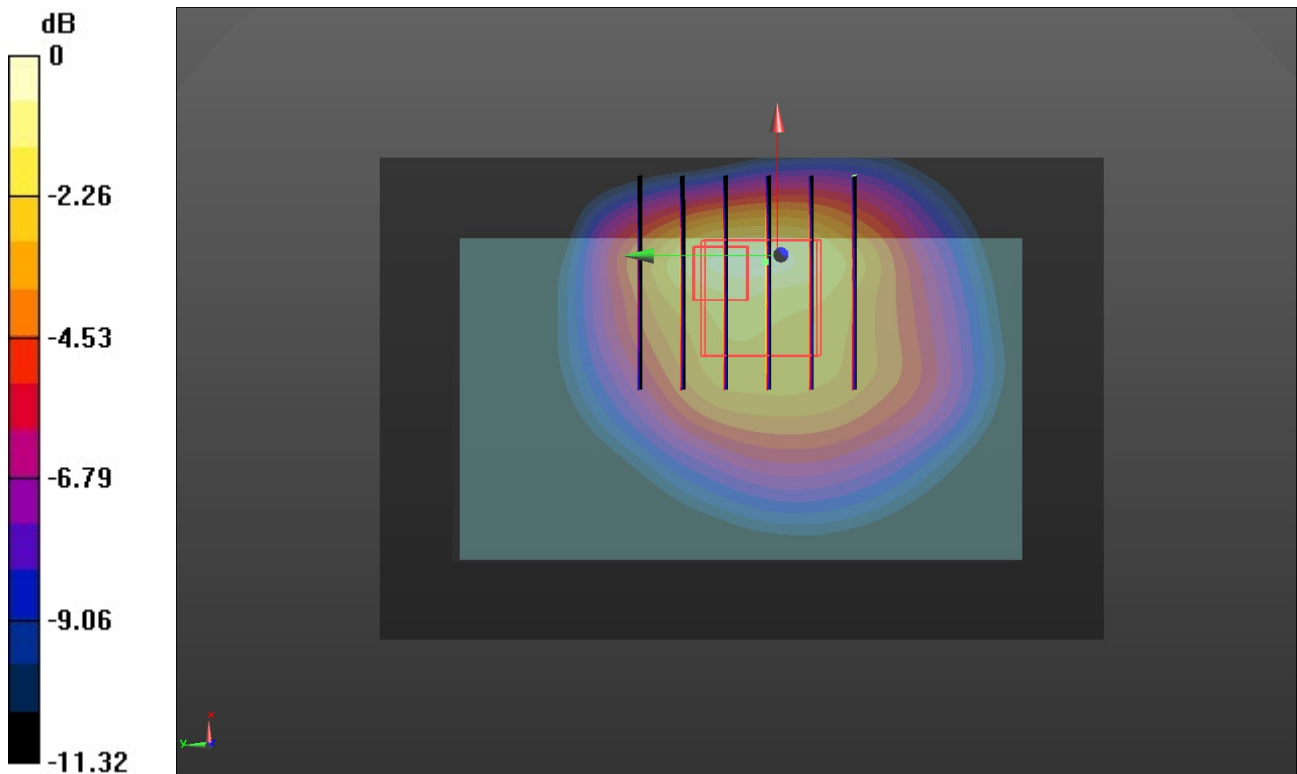

## LTE Band 12-Body

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 40.794$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C; Liquid Temperature: 22.3°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.7, 10.7, 10.7) @ 707.5 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body/CH 23095/Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.186 W/kg


**Body/CH 23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.106 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.297 W/kg

**SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.195 W/kg

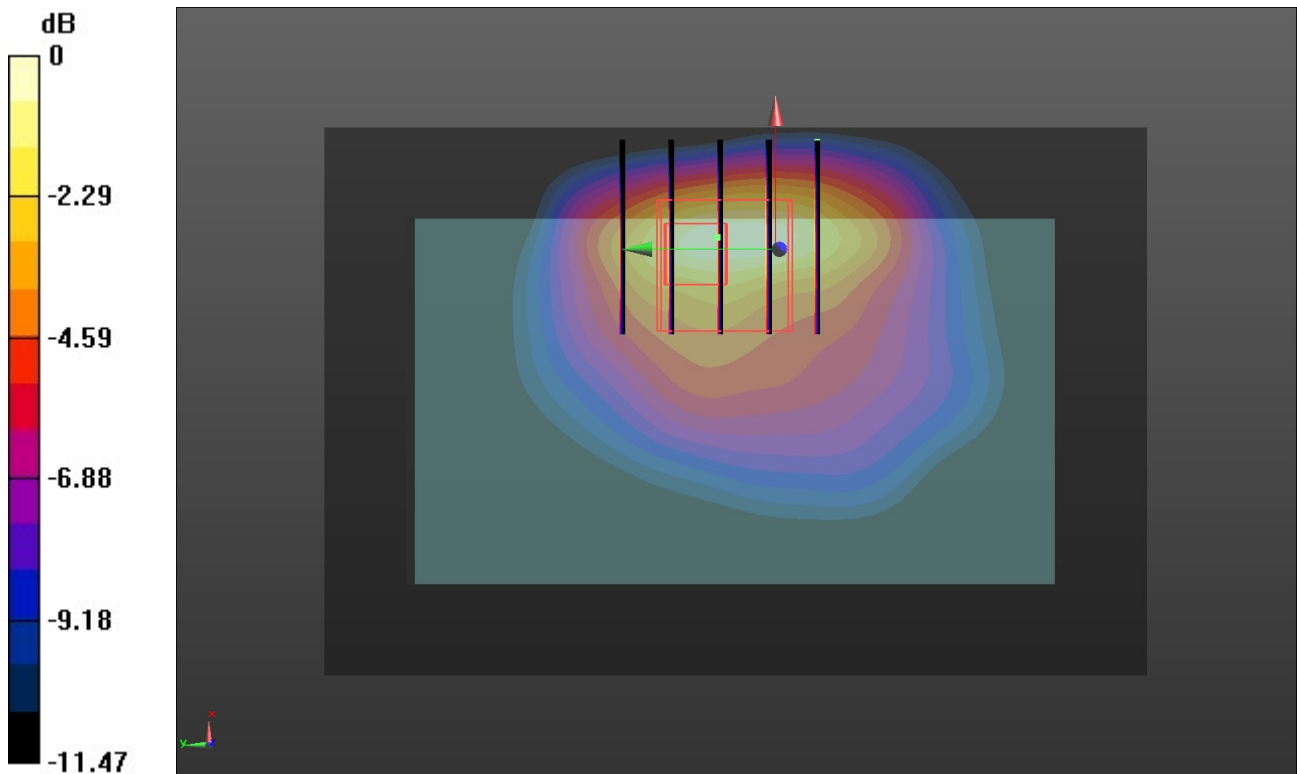

0 dB = 0.195 W/kg = -7.10 dBW/kg

## LTE Band 13-Body

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 782 \text{ MHz}$ ;  $\sigma = 0.905 \text{ S/m}$ ;  $\epsilon_r = 40.502$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.4°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.7, 10.7, 10.7) @ 782 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body/CH 23230/Area Scan (61x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.639 W/kg


**Body/CH 23230/Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.59 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 0.739 W/kg

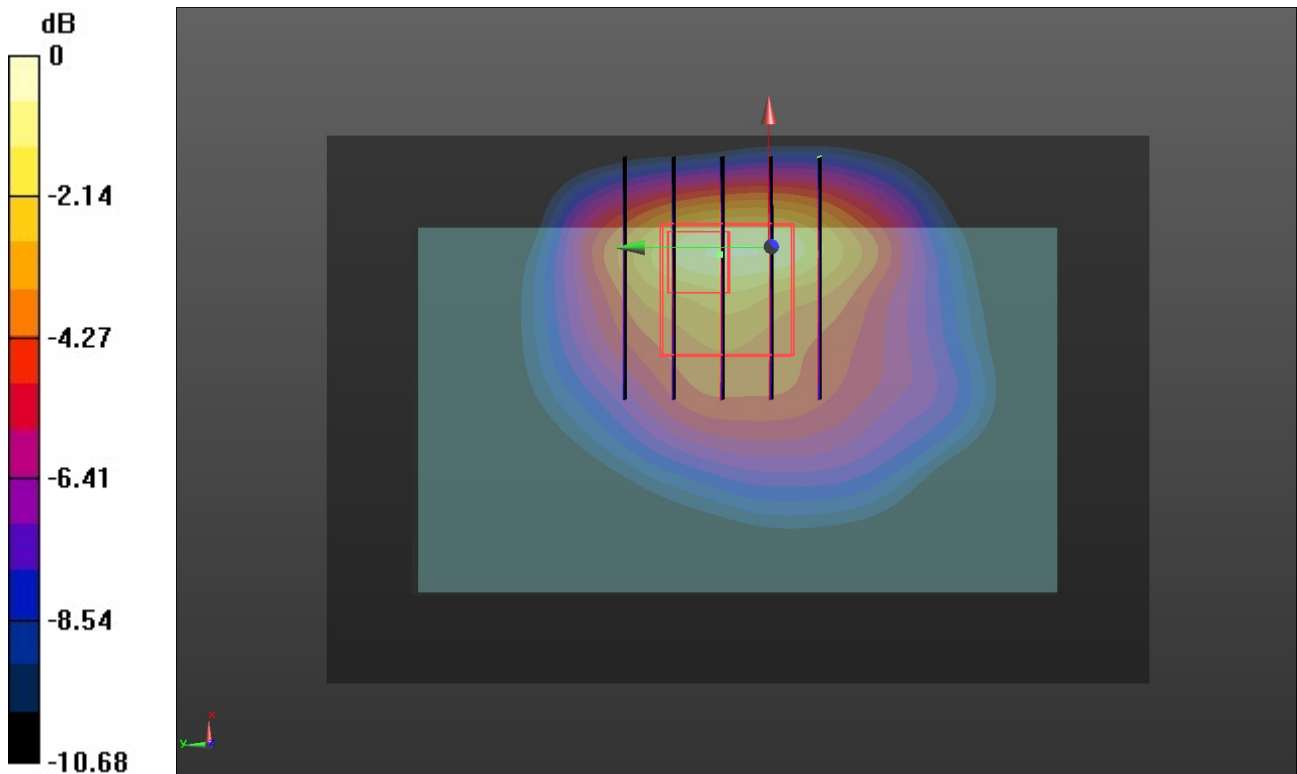

0 dB = 0.739 W/kg = -1.31 dBW/kg

**LTE Band 14-Body**

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 793$  MHz;  $\sigma = 0.908$  S/m;  $\epsilon_r = 40.453$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C; Liquid Temperature: 22.1°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.7, 10.7, 10.7) @ 793 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body/CH 23330/Area Scan (61x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.727 W/kg


**Body/CH 23330/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 19.63 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 0.875 W/kg

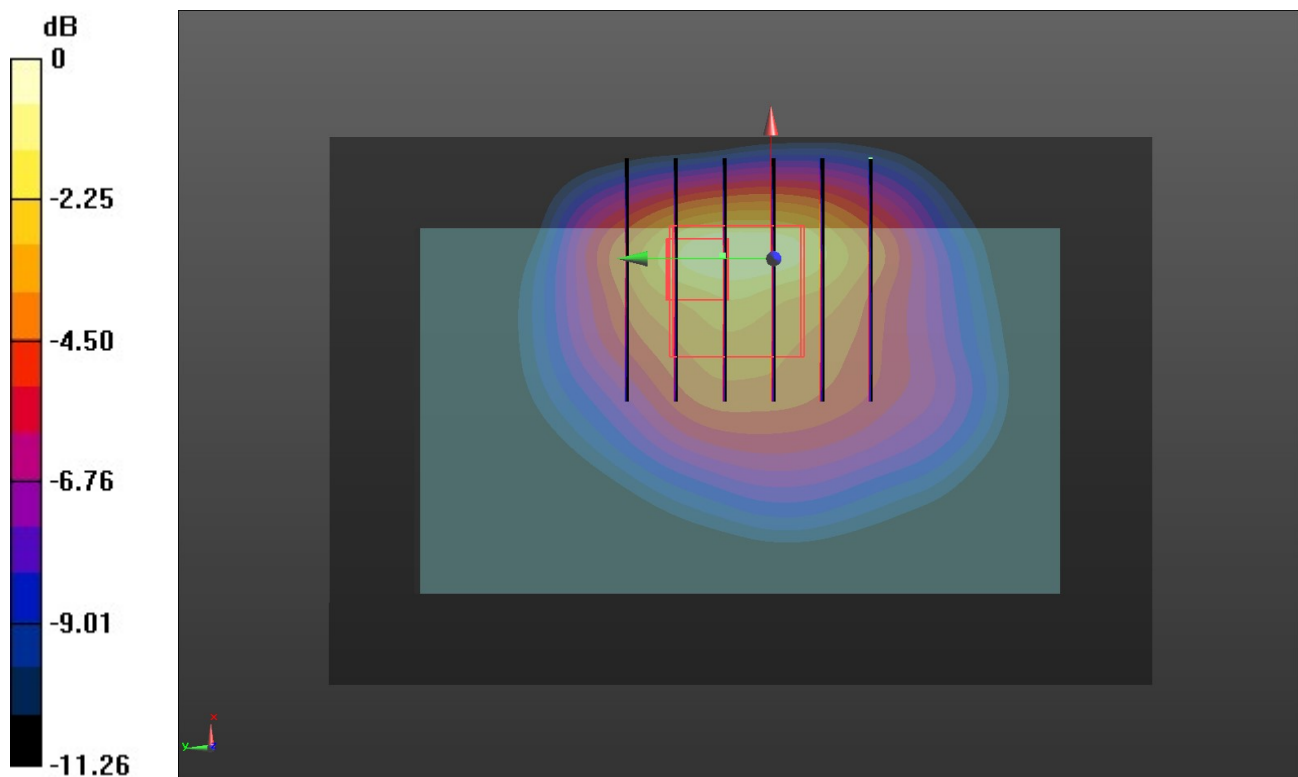

0 dB = 0.875 W/kg = -0.58 dBW/kg

## LTE Band 66-Body

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 38.314$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2°C; Liquid Temperature: 22.0°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.88, 8.88, 8.88) @ 1745 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Body/CH 132322/Area Scan (61x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 1.57 W/kg


**Body/CH 132322/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 26.65 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.36 W/kg

**SAR(1 g) = 1.48 W/kg; SAR(10 g) = 0.635 W/kg**

Maximum value of SAR (measured) = 1.70 W/kg

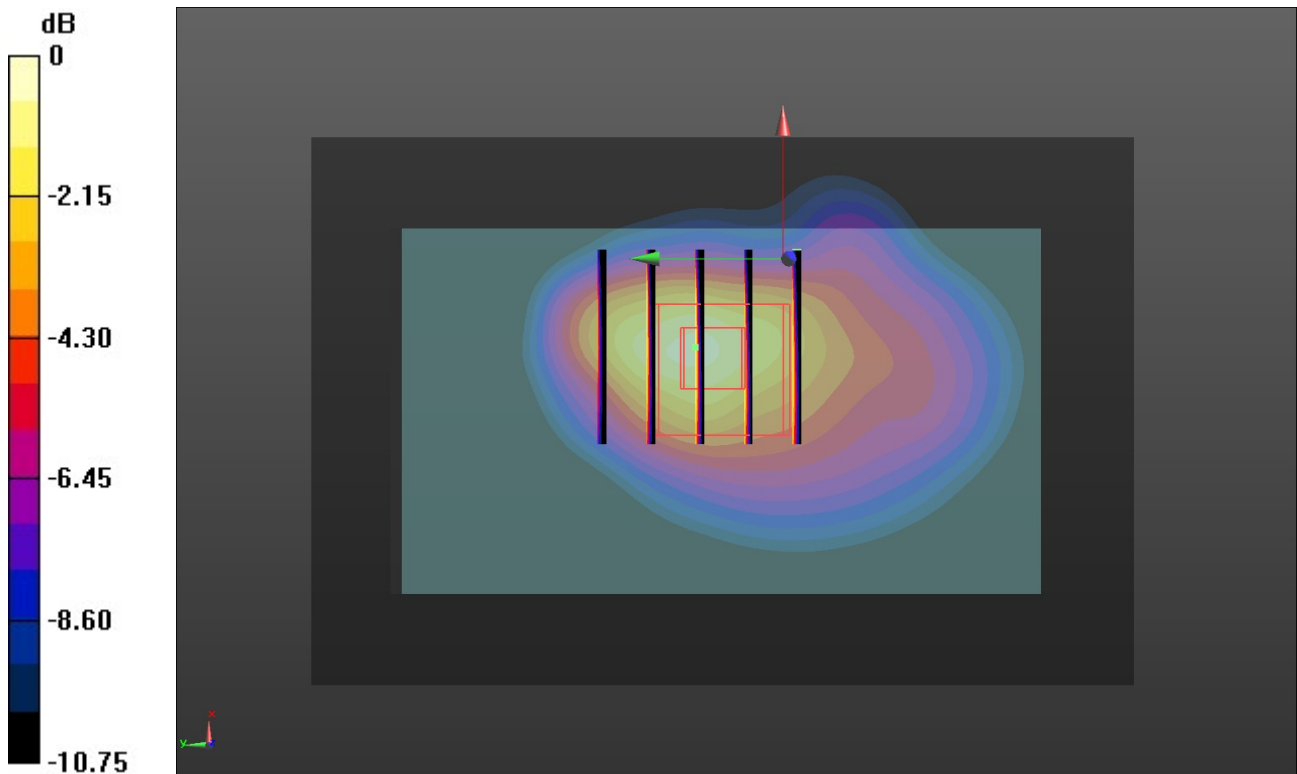

0 dB = 1.70 W/kg = 5.31 dBW/kg