

FCC Radio Test Report

FCC ID: 2AX2URW350RGLL

Report No. : BTL-FCCP-7-2504T032
Equipment : 5G module
Model Name : RW350R-GL
Brand Name : Rolling Wireless
Applicant : Rolling Wireless S.a r.l.
Address : 8-10, rue Mathias Hardt 1717, Ville-Haute Luxembourg

Radio Function : NR Band n5, n26

FCC Rule Part(s) : FCC CFR Title 47, Part 22, Subpart H

Date of Receipt : 2025/4/8
Date of Test : 2025/4/28 ~ 2025/6/2
Issued Date : 2025/6/18

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Brett Shen
Brett Shen, Engineer

Approved by : Jerry Chuang
Jerry Chuang, Supervisor



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	REFERENCE TEST GUIDANCE	6
1.2	TEST FACILITY	6
1.3	MEASUREMENT UNCERTAINTY	6
1.4	TEST ENVIRONMENT CONDITIONS	6
2	GENERAL INFORMATION	7
2.1	DESCRIPTION OF EUT	7
2.2	TEST MODES	9
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4	SUPPORT UNITS	10
3	EFFECTIVE RADIATED POWER MEASUREMENT	11
3.1	LIMIT	11
3.2	TEST PROCEDURE	11
3.3	DEVIATION FROM TEST STANDARD	11
3.4	TEST SETUP	11
3.5	EUT OPERATING CONDITIONS	11
3.6	TEST RESULT	11
4	RADIATED SPURIOUS EMISSIONS MEASUREMENT	12
4.1	LIMIT	12
4.2	TEST PROCEDURE	12
4.3	DEVIATION FROM TEST STANDARD	12
4.4	TEST SETUP	13
4.5	EUT OPERATING CONDITIONS	13
4.6	TEST RESULT	13
5	LIST OF MEASURING EQUIPMENTS	14
6	EUT TEST PHOTO	15
7	EUT PHOTOS	15
APPENDIX A	EFFECTIVE RADIATED POWER	16
APPENDIX B	RADIATED SPURIOUS EMISSIONS	24

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-7-2504T032	R00	Original Report.	2025/6/18	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
2.1046 22.913(a)(5)	Effective Radiated Power	APPENDIX A	Pass	-----
2.1053 22.917(a)	Radiated Spurious Emissions	APPENDIX B	Pass	-----

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This test report is issued for the RF module (FCC ID: 2AX2URW350RGLL) to be incorporated to the host device (Model number: TP00167A), Product name: Notebook Computer).
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.

1.1 REFERENCE TEST GUIDANCE

ANSI C63.26-2015
ANSI/TIA-603-E-2016
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

1.2 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C05 ☒ SR10 ☐ SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C06 ☒ CB21 ☐ CB22

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

A. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.4 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
Effective Radiated Power	23 °C, 58 %	AC 120V	Easton Tsai
Radiated Spurious Emissions	Refer to data	AC 120V	Mark Wang

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	5G module						
Model Name	RW350R-GL						
Brand Name	Rolling Wireless						
Model Difference	N/A						
Power Source	Supplied from host system.						
Power Rating	3.3 Vdc						
Host device information							
Equipment	Notebook Computer						
Model Name	TP00167A						
Brand Name	Lenovo						
Model Difference	N/A						
Power Source	DC voltage supplied from External Power Supply. (Lenovo / ADL180YGSLC3A, ADL180YGSAC3A, ADL180YGSHC3A)						
Power Rating	Model: ADL180YGSLC3A Input: 100-240V~ 3.0A 50-60Hz Output: 36.0VDC 5.0A 180W / 28.0VDC 5.0A / 20.0VDC 5.0A / 15.0VDC 3.0A / 9.0VDC 3.0A / 5.0VDC 3.0A 15.0W						
	Model: ADL180YGSAC3A Input: 100-240V~ 2.5A 50-60Hz Output: 36.0VDC 5.0A 180W / 28.0VDC 5.0A / 20.0VDC 5.0A / 15.0VDC 3.0A / 9.0VDC 3.0A / 5.0VDC 3.0A 15.0W						
	Model: ADL180YGSHC3A Input: 100-240V~ 2.5A 50-60Hz Output: 36.0VDC 5.0A 180W / 5.0VDC 3.0A 15.0W / 9.0VDC 3.0A 27.0W / 15.0VDC 3.0A 45.0W / 20.0VDC 5.0A 100.0W / 28.0VDC 5.0A 140.0W						
WIFI+BT Module	Intel® BE200NGW / BE200NGW						
WWAN Module	Rolling Wireless / RW350R-GL						
NFC Module	FOXCONN / T77H747						
Operation Frequency	Band	UL Frequency (MHz)			DL Frequency (MHz)		
	NR n5	824 ~ 849			869 ~ 894		
	NR n26	824 ~ 849			869 ~ 894		
Maximum ERP	Band	SCS (K)	BW (MHz)	Modulation	Mode	Power (W)	
	NR n5	15	5	DFT-s-OFDM	QPSK	0.182	
					16QAM	0.146	
					QPSK	0.184	
			10		16QAM	0.148	
					QPSK	0.186	
					16QAM	0.149	
			15		QPSK	0.188	
					16QAM	0.150	
			20		PI/2 BPSK	0.183	
					QPSK	0.189	
			25	DFT-s-OFDM	16QAM	0.155	
					64QAM	0.111	
					256QAM	0.068	
			CP-OFDM		QPSK	0.137	

Maximum ERP	NR n5	30	10	DFT-s-OFDM	QPSK	0.176	
			30		DFT-s-OFDM	16QAM	0.138
						QPSK	0.177
						16QAM	0.140
						QPSK	0.179
						16QAM	0.142
				30		DFT-s-OFDM	PI/2 BPSK
			QPSK		0.182		
			16QAM		0.144		
			64QAM		0.107		
			256QAM		0.066		
			CP-OFDM		QPSK		0.131
	NR n26	15	5	DFT-s-OFDM	QPSK	0.165	
			20		DFT-s-OFDM	16QAM	0.132
						QPSK	0.168
						16QAM	0.132
						QPSK	0.170
						16QAM	0.135
				20		DFT-s-OFDM	PI/2 BPSK
			QPSK		0.172		
			16QAM		0.137		
			64QAM		0.098		
			256QAM		0.061		
			CP-OFDM		QPSK		0.124
	NR n26	30	10	DFT-s-OFDM	QPSK	0.166	
			15		DFT-s-OFDM	16QAM	0.132
						QPSK	0.169
						16QAM	0.135
				20		DFT-s-OFDM	PI/2 BPSK
			QPSK		0.171		
			16QAM		0.137		
			64QAM		0.097		
			256QAM		0.062		
			CP-OFDM		QPSK		0.124
Test Model					RW350R-GL		
Sample Status					Engineering Sample		
EUT Modification(s)					N/A		

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Table for Filed Antenna:

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main	Speedwire	DC330027Q10	PIFA	I-PEX	1.84	NR Band n5
					1.52	NR Band n26
Aux	Speedwire	DC330027Q10	PIFA	I-PEX	-	RX only
MIMO1	Speedwire	DC330027Q10	PIFA	I-PEX	-	RX only
MIMO2	Speedwire	DC330027Q10	PIFA	I-PEX	-	-

(3) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES


Test Items	Band	Test Mode	Note
Effective Radiated Power	NR n5	Refer to APPENDIX A	-
	NR n26		
Radiated Spurious Emissions (Below 1G)	NR n5	Refer to APPENDIX B	-
	NR n26		
	NSA 48A_n5A		
Radiated Spurious Emissions (Above 1G)	NR n5	Refer to APPENDIX B	-
	NR n26		
	NSA 48A_n5A		
Radiated Spurious Emissions (Above 18G)	NSA 48A_n5A	Refer to APPENDIX B	-

NOTE:

- (1) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (2) For Radiated Spurious Emissions both PI/2 BPSK, QPSK, 16QAM, 64QAM and 256QAM are evaluated, but only the worst case (QPSK) is recorded.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

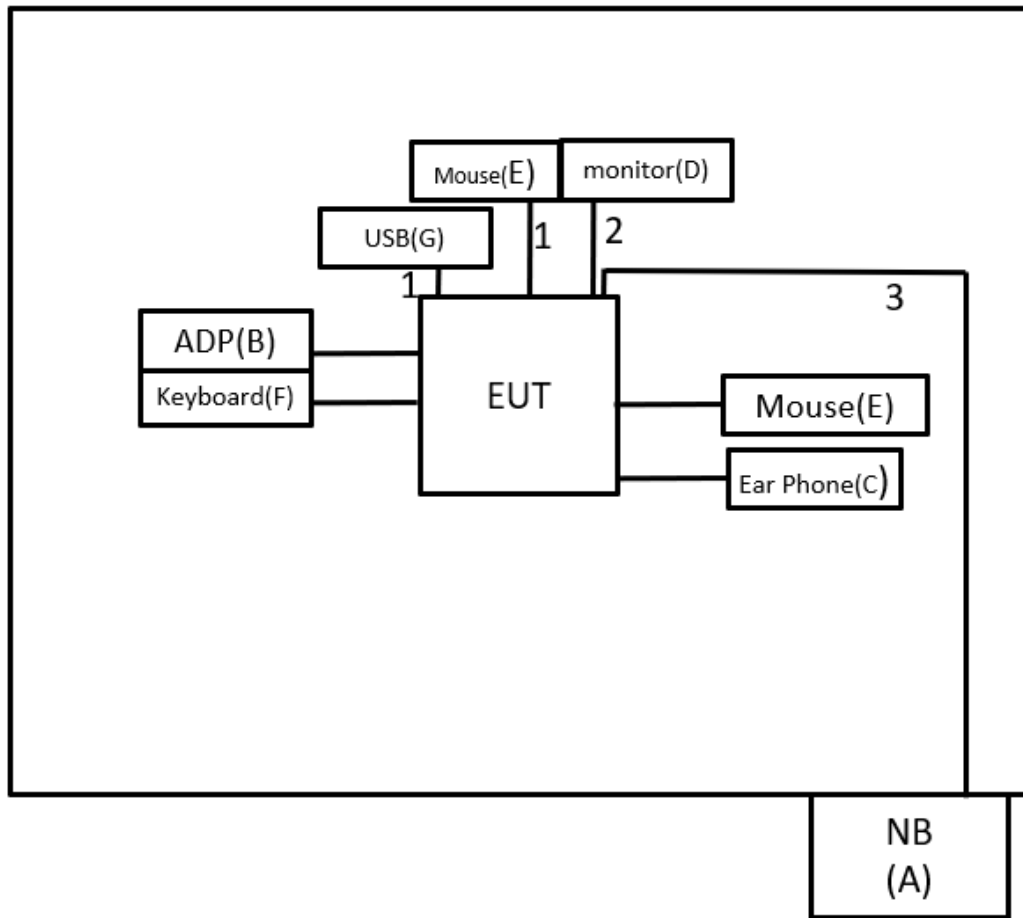

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	HP	TPN-I119	N/A	Furnished by test lab.
B	ADP	Lenovo	ADL180YGSHC 3A	N/A	Supplied by test requester.
C	Ear Phone	HTC	S260	N/A	Furnished by test lab.
D	27" 4K Monitor	DELL	P2415Q	N/A	Furnished by test lab.
E	Mouse	Lenovo	SM-8823	N/A	Furnished by test lab.
F	Keyboard	Bloody	KB-8	N/A	Furnished by test lab.
G	USB	ADATA	UV150	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	0.1m	USB-C to USB 3.0 CABLE	Furnished by test lab.
2	N/A	N/A	1.8m	HDMI	Furnished by test lab.
3	N/A	N/A	10m	RJ45 Cable	Furnished by test lab.

3 EFFECTIVE RADIATED POWER MEASUREMENT

3.1 LIMIT

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts (38.45 dBm).

3.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.8.


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi.}$
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

Conducted Measurement:



3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBm)		Correct Factor (dB/m)		Measurement Value (dBm)
-50.43	+	-2.11	=	-52.54

Measurement Value (dBm)		Limit Value (dBm)		Margin Level (dB)
-52.54	-	-13	=	-39.54

4.2 TEST PROCEDURE


The testing follows FCC KDB 971168 v03r01 Section 6.2.

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi}$.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

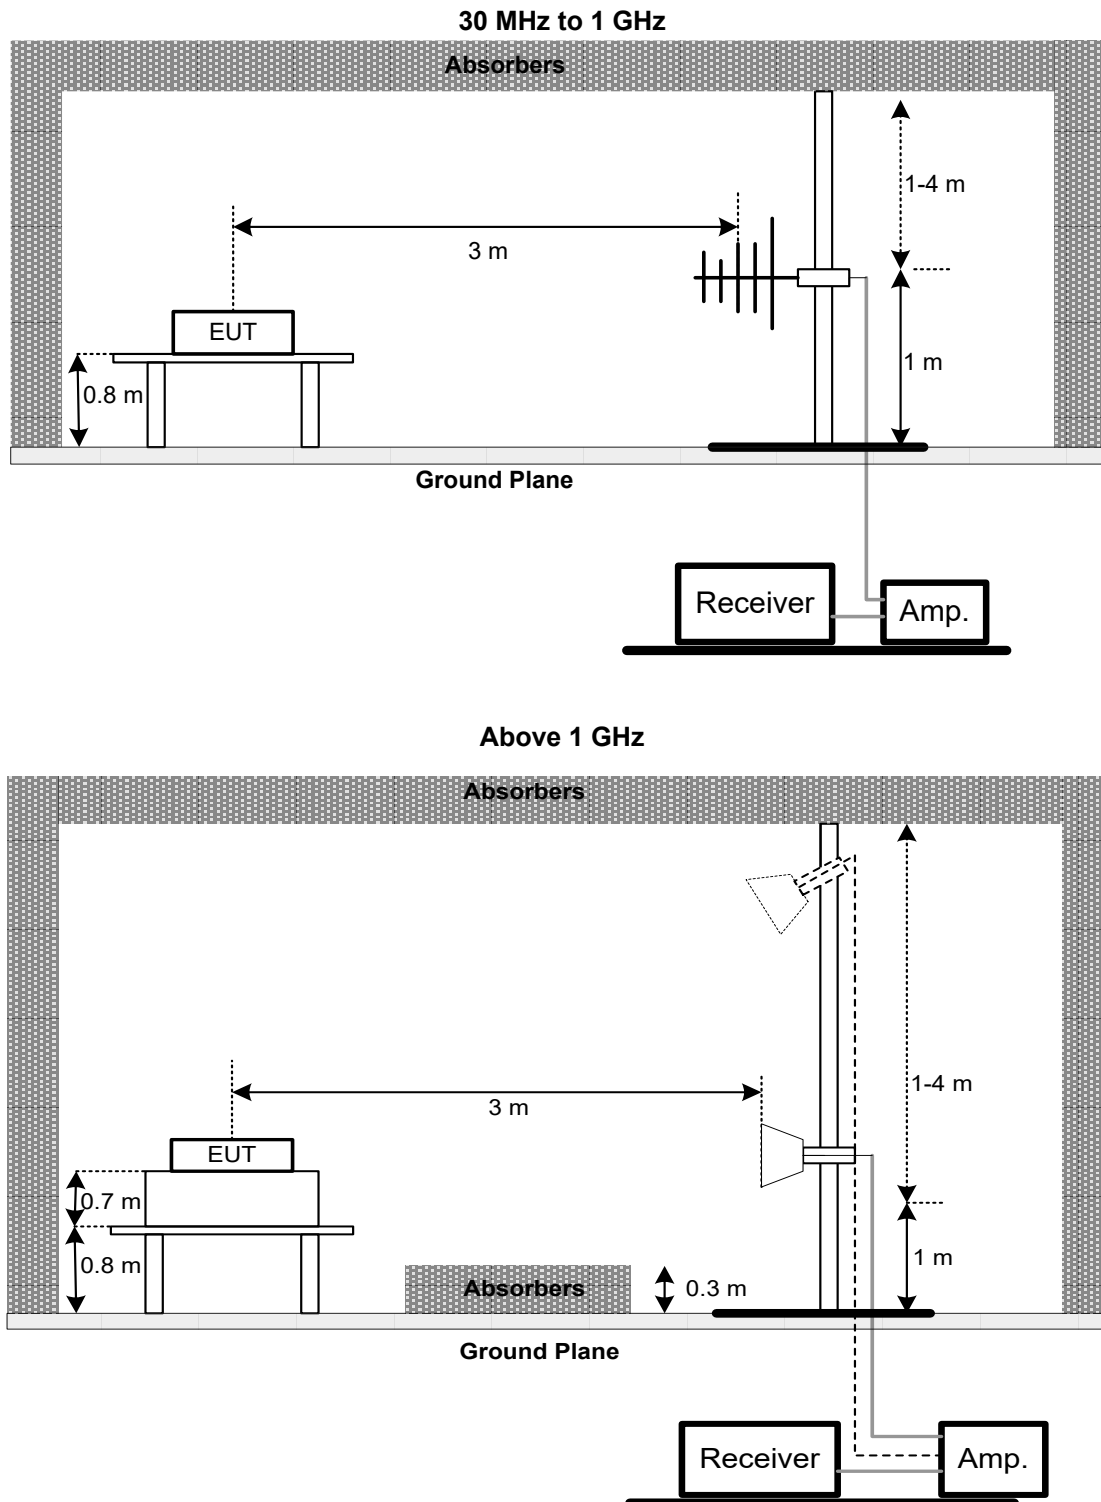

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT

Please refer to the APPENDIX B.

5 LIST OF MEASURING EQUIPMENTS

Effective Radiated Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	WIRELESS COMMUNICATION TEST SET	Agilent	E5515C	GB47390193	2024/7/7	2025/7/6
2	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2024/11/19	2025/11/18
3	Radio Communication Analyzer	ANRITSU	MT8000A	6262036844	2024/11/20	2025/11/19

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2024/9/5	2025/9/4
2	Preamplifier	EMCI	EMC118A45SE	980819	2025/3/5	2026/3/4
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2024/9/4	2025/9/3
4	Preamplifier	EMCI	EMC001340	980579	2024/9/4	2025/9/3
5	Test Cable	EMCI	EMC104-SM-1000	180809	2025/3/5	2026/3/4
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2025/3/5	2026/3/4
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2025/3/5	2026/3/4
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2025/2/19	2026/2/18
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2024/9/9	2025/9/8
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2024/5/9	2025/5/8
					2025/5/9	2026/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2024/5/17	2025/5/16
					2025/5/15	2026/5/14
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2024/6/14	2025/6/13
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2024/6/14	2025/6/13
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2025/3/12	2026/3/11
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2025/3/12	2026/3/11
16	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A
17	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2024/11/19	2025/11/18

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

6 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2504T032-FCCP-1 (APPENDIX-TEST PHOTOS).

7 EUT PHOTOS

Please refer to document Appendix No.: EP-2504T032-1 (APPENDIX-EUT PHOTOS).

APPENDIX A EFFECTIVE RADIATED POWER

NR Band n5 Power:

Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	0.0	22.87	22.56	0.180
					DFT-s-OFDM 16QAM	1@1	1.0	21.96	21.65	0.146
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.91	22.60	0.182
					DFT-s-OFDM 16QAM	1@1	1.0	21.93	21.62	0.145
			169300	846.5	DFT-s-OFDM QPSK	1@1	0.0	22.90	22.59	0.181
					DFT-s-OFDM 16QAM	1@1	1.0	21.87	21.56	0.143
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	15	10	165800	829.0	DFT-s-OFDM QPSK	1@1	0.0	22.94	22.63	0.183
					DFT-s-OFDM 16QAM	1@1	1.0	21.98	21.67	0.147
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.96	22.65	0.184
					DFT-s-OFDM 16QAM	1@1	1.0	22.00	21.69	0.148
			168800	844.0	DFT-s-OFDM QPSK	1@1	0.0	22.94	22.63	0.183
					DFT-s-OFDM 16QAM	1@1	1.0	21.88	21.57	0.143
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	0.0	22.97	22.66	0.185
					DFT-s-OFDM 16QAM	1@1	1.0	22.05	21.74	0.149
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.98	22.67	0.185
					DFT-s-OFDM 16QAM	1@1	1.0	22.02	21.71	0.148
			168300	841.5	DFT-s-OFDM QPSK	1@1	0.0	23.01	22.70	0.186
					DFT-s-OFDM 16QAM	1@1	1.0	21.95	21.64	0.146
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	15	20	166800	834.0	DFT-s-OFDM QPSK	1@1	0.0	23.03	22.72	0.187
					DFT-s-OFDM 16QAM	1@1	1.0	22.08	21.77	0.150
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	23.05	22.74	0.188
					DFT-s-OFDM 16QAM	1@1	1.0	22.06	21.75	0.150
			167800	839.0	DFT-s-OFDM QPSK	1@1	0.0	23.03	22.72	0.187
					DFT-s-OFDM 16QAM	1@1	1.0	22.02	21.71	0.148

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	15	25	167300	836.5	DFT-s-OFDM PI/2 BPSK	64@32	0.2	22.93	22.62	0.183
						1@1	0.2	22.88	22.57	0.181
						1@131	0.2	22.87	22.56	0.180
					DFT-s-OFDM QPSK	64@32	0.0	23.02	22.71	0.187
						1@1	0.0	23.07	22.76	0.189
						1@131	0.0	23.03	22.72	0.187
					DFT-s-OFDM 16QAM	64@32	1.0	22.21	21.90	0.155
						1@1	1.0	22.09	21.78	0.151
						1@131	1.0	22.09	21.78	0.151
					DFT-s-OFDM 64QAM	64@32	2.5	20.62	20.31	0.107
						1@1	2.5	20.77	20.46	0.111
						1@131	2.5	20.52	20.21	0.105
					DFT-s-OFDM 256QAM	64@32	4.5	18.55	18.24	0.067
						1@1	4.5	18.64	18.33	0.068
						1@131	4.5	18.63	18.32	0.068
					CP-OFDM QPSK	67@33	1.5	21.40	21.09	0.129
						1@1	1.5	21.67	21.36	0.137
						1@131	1.5	21.56	21.25	0.133

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	30	10	165800	829.0	DFT-s-OFDM QPSK	1@1	0.0	22.76	22.45	0.176
					DFT-s-OFDM 16QAM	1@1	1.0	21.72	21.41	0.138
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.70	22.39	0.173
					DFT-s-OFDM 16QAM	1@1	1.0	21.57	21.26	0.134
			168800	844.0	DFT-s-OFDM QPSK	1@1	0.0	22.69	22.38	0.173
					DFT-s-OFDM 16QAM	1@1	1.0	21.68	21.37	0.137
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	30	15	166300	831.5	DFT-s-OFDM QPSK	1@1	0.0	22.79	22.48	0.177
					DFT-s-OFDM 16QAM	1@1	1.0	21.78	21.47	0.140
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.77	22.46	0.176
					DFT-s-OFDM 16QAM	1@1	1.0	21.66	21.35	0.136
			168300	841.5	DFT-s-OFDM QPSK	1@1	0.0	22.75	22.44	0.175
					DFT-s-OFDM 16QAM	1@1	1.0	21.73	21.42	0.139
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	30	20	166800	834.0	DFT-s-OFDM QPSK	1@1	0.0	22.82	22.51	0.178
					DFT-s-OFDM 16QAM	1@1	1.0	21.83	21.52	0.142
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.83	22.52	0.179
					DFT-s-OFDM 16QAM	1@1	1.0	21.80	21.49	0.141
			167800	839.0	DFT-s-OFDM QPSK	1@1	0.0	22.83	22.52	0.179
					DFT-s-OFDM 16QAM	1@1	1.0	21.78	21.47	0.140
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	30	30	167300	836.5	DFT-s-OFDM PI/2 BPSK	32@16	0.2	22.64	22.33	0.171
						1@1	0.2	22.77	22.46	0.176
						1@63	0.2	22.55	22.24	0.167
					DFT-s-OFDM QPSK	32@16	0.0	22.81	22.50	0.178
						1@1	0.0	22.92	22.61	0.182
						1@63	0.0	22.73	22.42	0.175
					DFT-s-OFDM 16QAM	32@16	1.0	21.89	21.58	0.144
						1@1	1.0	21.89	21.58	0.144
						1@63	1.0	21.91	21.60	0.144
					DFT-s-OFDM 64QAM	32@16	2.5	20.40	20.09	0.102
						1@1	2.5	20.59	20.28	0.107
						1@63	2.5	20.41	20.10	0.102
					DFT-s-OFDM 256QAM	32@16	4.5	18.39	18.08	0.064
						1@1	4.5	18.53	18.22	0.066
						1@63	4.5	18.31	18.00	0.063
					CP-OFDM QPSK	33@16	1.5	21.38	21.07	0.128
						1@1	1.5	21.48	21.17	0.131
						1@63	1.5	21.31	21.00	0.126

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

NR Band n26 Power:

Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
26	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	0.0	22.82	22.19	0.165
					DFT-s-OFDM 16QAM	1@1	1.0	21.82	21.19	0.131
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.62	21.99	0.158
					DFT-s-OFDM 16QAM	1@1	1.0	21.62	20.99	0.126
			169300	846.5	DFT-s-OFDM QPSK	1@1	0.0	22.66	22.03	0.160
					DFT-s-OFDM 16QAM	1@1	1.0	21.83	21.20	0.132
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
26	15	10	165800	829.0	DFT-s-OFDM QPSK	1@1	0.0	22.89	22.26	0.168
					DFT-s-OFDM 16QAM	1@1	1.0	21.85	21.22	0.132
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.70	22.07	0.161
					DFT-s-OFDM 16QAM	1@1	1.0	21.76	21.13	0.130
			168800	844.0	DFT-s-OFDM QPSK	1@1	0.0	22.71	22.08	0.161
					DFT-s-OFDM 16QAM	1@1	1.0	21.85	21.22	0.132
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
26	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	0.0	22.94	22.31	0.170
					DFT-s-OFDM 16QAM	1@1	1.0	21.86	21.23	0.133
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.77	22.14	0.164
					DFT-s-OFDM 16QAM	1@1	1.0	21.79	21.16	0.131
			168300	841.5	DFT-s-OFDM QPSK	1@1	0.0	22.80	22.17	0.165
					DFT-s-OFDM 16QAM	1@1	1.0	21.93	21.30	0.135

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
26	15	20	166800	834.0	DFT-s-OFDM PI/2 BPSK	50@25	0.2	22.64	22.01	0.159
						1@1	0.2	22.83	22.20	0.166
						1@104	0.2	22.62	21.99	0.158
					DFT-s-OFDM QPSK	50@25	0.0	22.75	22.12	0.163
						1@1	0.0	22.98	22.35	0.172
						1@104	0.0	22.76	22.13	0.163
					DFT-s-OFDM 16QAM	50@25	1.0	21.90	21.27	0.134
						1@1	1.0	21.95	21.32	0.136
						1@104	1.0	21.92	21.29	0.135
					DFT-s-OFDM 64QAM	50@25	2.5	20.33	19.70	0.093
						1@1	2.5	20.56	19.93	0.098
						1@104	2.5	20.44	19.81	0.096
					DFT-s-OFDM 256QAM	50@25	4.5	18.32	17.69	0.059
						1@1	4.5	18.51	17.88	0.061
						1@104	4.5	18.35	17.72	0.059
					CP-OFDM QPSK	50@25	1.5	21.28	20.65	0.116
						1@1	1.5	21.55	20.92	0.124
						1@104	1.5	21.30	20.67	0.117
			167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	0.2	22.73	22.10	0.162
						1@1	0.2	22.63	22.00	0.158
						1@104	0.2	22.70	22.07	0.161
					DFT-s-OFDM QPSK	50@25	0.0	22.84	22.21	0.166
						1@1	0.0	22.81	22.18	0.165
						1@104	0.0	22.80	22.17	0.165
					DFT-s-OFDM 16QAM	50@25	1.0	22.00	21.37	0.137
						1@1	1.0	21.87	21.24	0.133
						1@104	1.0	21.84	21.21	0.132
					DFT-s-OFDM 64QAM	50@25	2.5	20.41	19.78	0.095
						1@1	2.5	20.36	19.73	0.094
						1@104	2.5	20.32	19.69	0.093
					DFT-s-OFDM 256QAM	50@25	4.5	18.44	17.81	0.060
						1@1	4.5	18.37	17.74	0.059
						1@104	4.5	18.36	17.73	0.059
					CP-OFDM QPSK	50@25	1.5	21.46	20.83	0.121
						1@1	1.5	21.34	20.71	0.118
						1@104	1.5	21.37	20.74	0.119
			167800	839.0	DFT-s-OFDM PI/2 BPSK	50@25	0.2	22.60	21.97	0.158
						1@1	0.2	22.68	22.05	0.160
						1@104	0.2	22.62	21.99	0.158
					DFT-s-OFDM QPSK	50@25	0.0	22.79	22.16	0.164
						1@1	0.0	22.82	22.19	0.166
						1@104	0.0	22.73	22.10	0.162
					DFT-s-OFDM 16QAM	50@25	1.0	21.87	21.24	0.133
						1@1	1.0	21.98	21.35	0.136
						1@104	1.0	21.84	21.21	0.132
					DFT-s-OFDM 64QAM	50@25	2.5	20.45	19.82	0.096
						1@1	2.5	20.39	19.76	0.095
						1@104	2.5	20.34	19.71	0.094
					DFT-s-OFDM 256QAM	50@25	4.5	18.31	17.68	0.059
						1@1	4.5	18.34	17.71	0.059
						1@104	4.5	18.34	17.71	0.059
					CP-OFDM QPSK	50@25	1.5	21.32	20.69	0.117
						1@1	1.5	21.40	20.77	0.119
						1@104	1.5	21.25	20.62	0.115

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
26	30	10	165800	829.0	DFT-s-OFDM QPSK	1@1	0.0	22.69	22.06	0.161
					DFT-s-OFDM 16QAM	1@1	1.0	21.52	20.89	0.123
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.84	22.21	0.166
					DFT-s-OFDM 16QAM	1@1	1.0	21.85	21.22	0.132
			168800	844.0	DFT-s-OFDM QPSK	1@1	0.0	22.58	21.95	0.157
					DFT-s-OFDM 16QAM	1@1	1.0	21.75	21.12	0.129
Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
26	30	15	166300	831.5	DFT-s-OFDM QPSK	1@1	0.0	22.71	22.08	0.161
					DFT-s-OFDM 16QAM	1@1	1.0	21.61	20.98	0.125
			167300	836.5	DFT-s-OFDM QPSK	1@1	0.0	22.91	22.28	0.169
					DFT-s-OFDM 16QAM	1@1	1.0	21.95	21.32	0.135
			168300	841.5	DFT-s-OFDM QPSK	1@1	0.0	22.62	21.99	0.158
					DFT-s-OFDM 16QAM	1@1	1.0	21.83	21.20	0.132

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	SCS	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	MPR	Average power (dBm)	ERP power (dBm)	ERP power (W)
26	30	20	166800	834.0	DFT-s-OFDM PI/2 BPSK	25@12	0.2	22.75	22.12	0.163
						1@1	0.2	22.63	22.00	0.158
						1@49	0.2	22.50	21.87	0.154
					DFT-s-OFDM QPSK	25@12	0.0	22.85	22.22	0.167
						1@1	0.0	22.73	22.10	0.162
						1@49	0.0	22.63	22.00	0.158
					DFT-s-OFDM 16QAM	25@12	1.0	21.93	21.30	0.135
						1@1	1.0	21.64	21.01	0.126
						1@49	1.0	21.81	21.18	0.131
					DFT-s-OFDM 64QAM	25@12	2.5	20.45	19.82	0.096
						1@1	2.5	20.28	19.65	0.092
						1@49	2.5	20.22	19.59	0.091
					DFT-s-OFDM 256QAM	25@12	4.5	18.43	17.80	0.060
						1@1	4.5	18.23	17.60	0.058
						1@49	4.5	18.17	17.54	0.057
					CP-OFDM QPSK	25@12	1.5	21.45	20.82	0.121
						1@1	1.5	21.33	20.70	0.117
						1@49	1.5	21.15	20.52	0.113
			167300	836.5	DFT-s-OFDM PI/2 BPSK	25@12	0.2	22.65	22.02	0.159
						1@1	0.2	22.85	22.22	0.167
						1@49	0.2	22.66	22.03	0.160
					DFT-s-OFDM QPSK	25@12	0.0	22.82	22.19	0.166
						1@1	0.0	22.97	22.34	0.171
						1@49	0.0	22.77	22.14	0.164
					DFT-s-OFDM 16QAM	25@12	1.0	21.99	21.36	0.137
						1@1	1.0	21.99	21.36	0.137
						1@49	1.0	21.81	21.18	0.131
					DFT-s-OFDM 64QAM	25@12	2.5	20.47	19.84	0.096
						1@1	2.5	20.50	19.87	0.097
						1@49	2.5	20.26	19.63	0.092
					DFT-s-OFDM 256QAM	25@12	4.5	18.43	17.80	0.060
						1@1	4.5	18.56	17.93	0.062
						1@49	4.5	18.19	17.56	0.057
					CP-OFDM QPSK	25@12	1.5	21.38	20.75	0.119
						1@1	1.5	21.56	20.93	0.124
						1@49	1.5	21.37	20.74	0.119
			167800	839.0	DFT-s-OFDM PI/2 BPSK	25@12	0.2	22.49	21.86	0.153
						1@1	0.2	22.54	21.91	0.155
						1@49	0.2	22.56	21.93	0.156
					DFT-s-OFDM QPSK	25@12	0.0	22.68	22.05	0.160
						1@1	0.0	22.70	22.07	0.161
						1@49	0.0	22.65	22.02	0.159
					DFT-s-OFDM 16QAM	25@12	1.0	21.70	21.07	0.128
						1@1	1.0	21.86	21.23	0.133
						1@49	1.0	21.69	21.06	0.128
					DFT-s-OFDM 64QAM	25@12	2.5	20.30	19.67	0.093
						1@1	2.5	20.37	19.74	0.094
						1@49	2.5	20.18	19.55	0.090
					DFT-s-OFDM 256QAM	25@12	4.5	18.22	17.59	0.057
						1@1	4.5	18.20	17.57	0.057
						1@49	4.5	18.25	17.62	0.058
					CP-OFDM QPSK	25@12	1.5	21.25	20.62	0.115
						1@1	1.5	21.25	20.62	0.115
						1@49	1.5	21.24	20.61	0.115

NOTE:


(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

APPENDIX B RADIATED SPURIOUS EMISSIONS

Test Mode	NR n5	Test Date	2025/5/26
Test Channel	CH167300	Polarization	Vertical
Temp	22°C	Hum.	54%

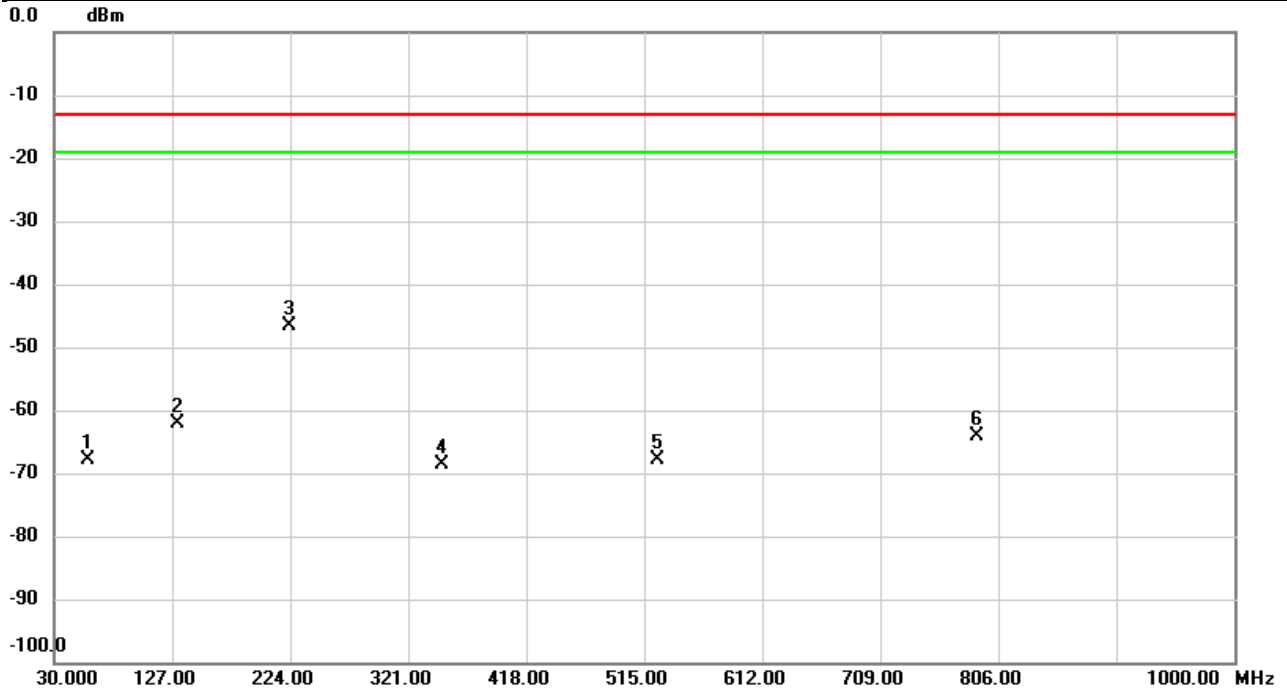


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.9683	-62.67	-5.31	-67.98	-13.00	-54.98	peak	
2		131.2357	-59.07	-3.15	-62.22	-13.00	-49.22	peak	
3	*	223.9030	-45.44	-1.30	-46.74	-13.00	-33.74	peak	
4		348.4187	-67.95	-0.76	-68.71	-13.00	-55.71	peak	
5		525.4760	-71.55	3.63	-67.92	-13.00	-54.92	peak	
6		788.2490	-70.08	5.99	-64.09	-13.00	-51.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n5	Test Date	2025/5/26
Test Channel	CH167300	Polarization	Horizontal
Temp	22°C	Hum.	54%

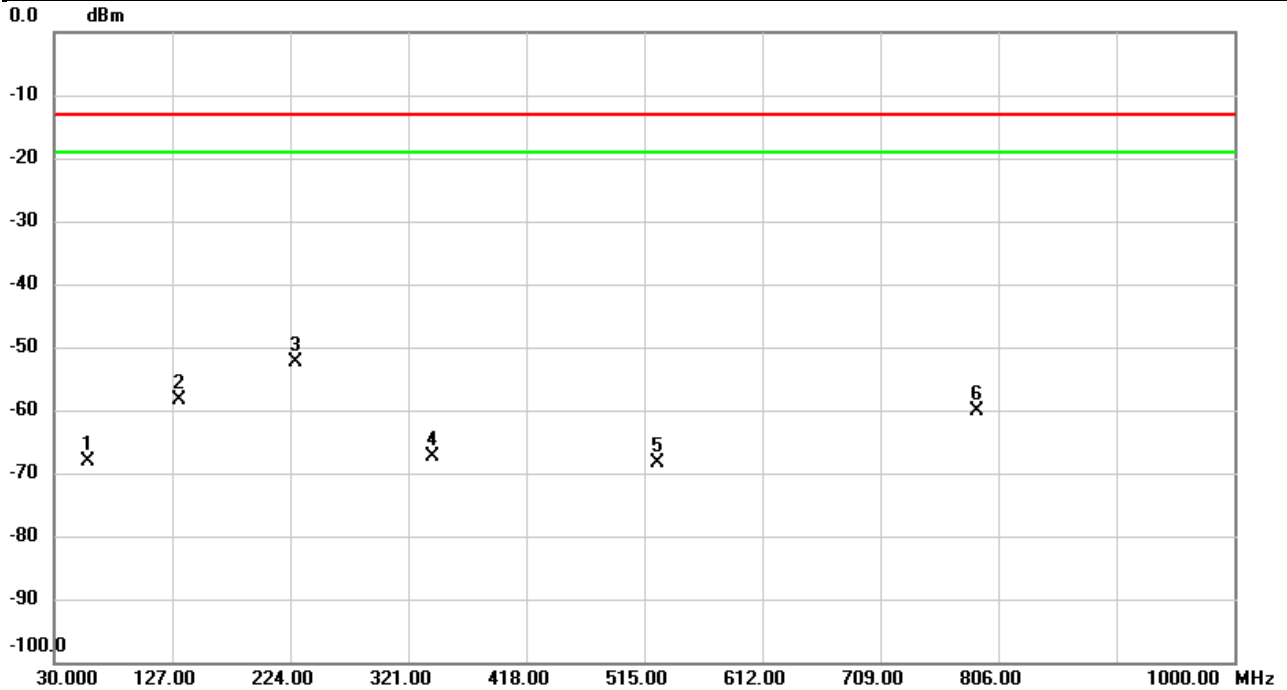


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		57.7420	-66.91	-1.14	-68.05	-13.00	-55.05	peak	
2		132.2056	-54.16	-4.22	-58.38	-13.00	-45.38	peak	
3	*	229.1733	-46.58	-5.91	-52.49	-13.00	-39.49	peak	
4		340.6910	-66.21	-1.08	-67.29	-13.00	-54.29	peak	
5		525.4760	-69.45	1.13	-68.32	-13.00	-55.32	peak	
6		788.2490	-66.18	6.06	-60.12	-13.00	-47.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n5	Test Date	2025-5-29
Test Channel	CH166800	Polarization	Vertical
Temp	22°C	Hum.	54%

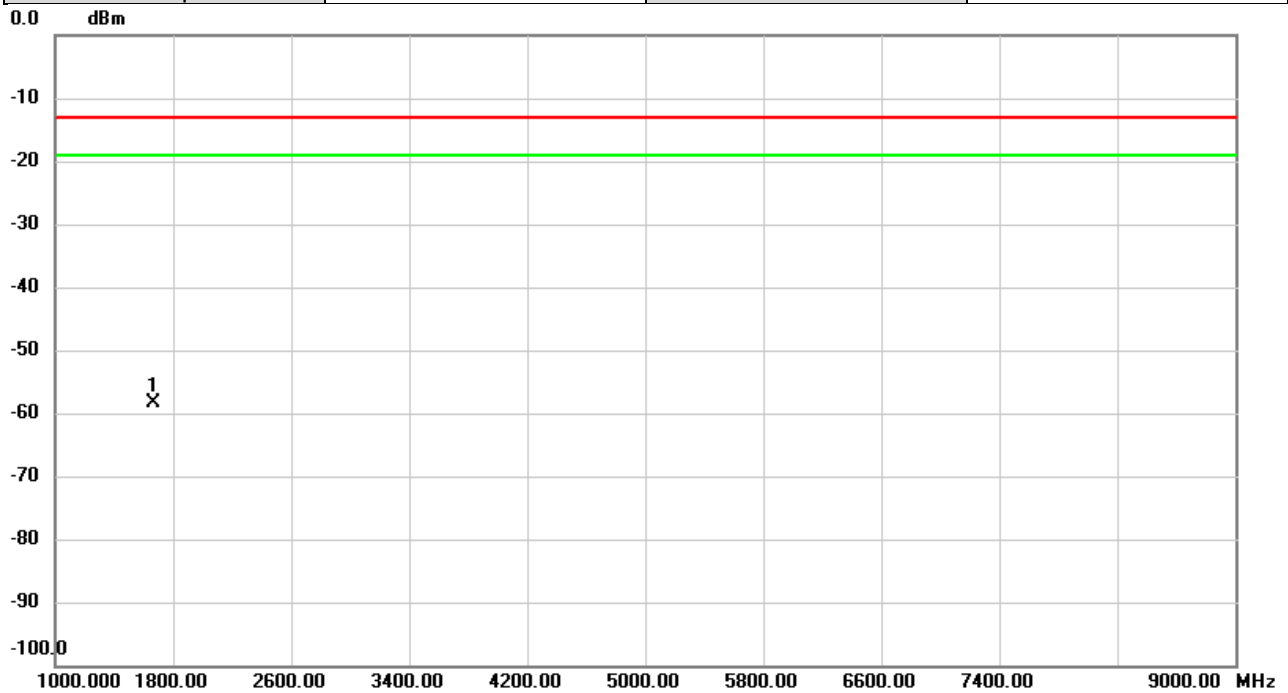


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1668.000	-64.04	5.76	-58.28	-13.00	-45.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n5	Test Date	2025-5-29
Test Channel	CH166800	Polarization	Horizontal
Temp	22°C	Hum.	54%

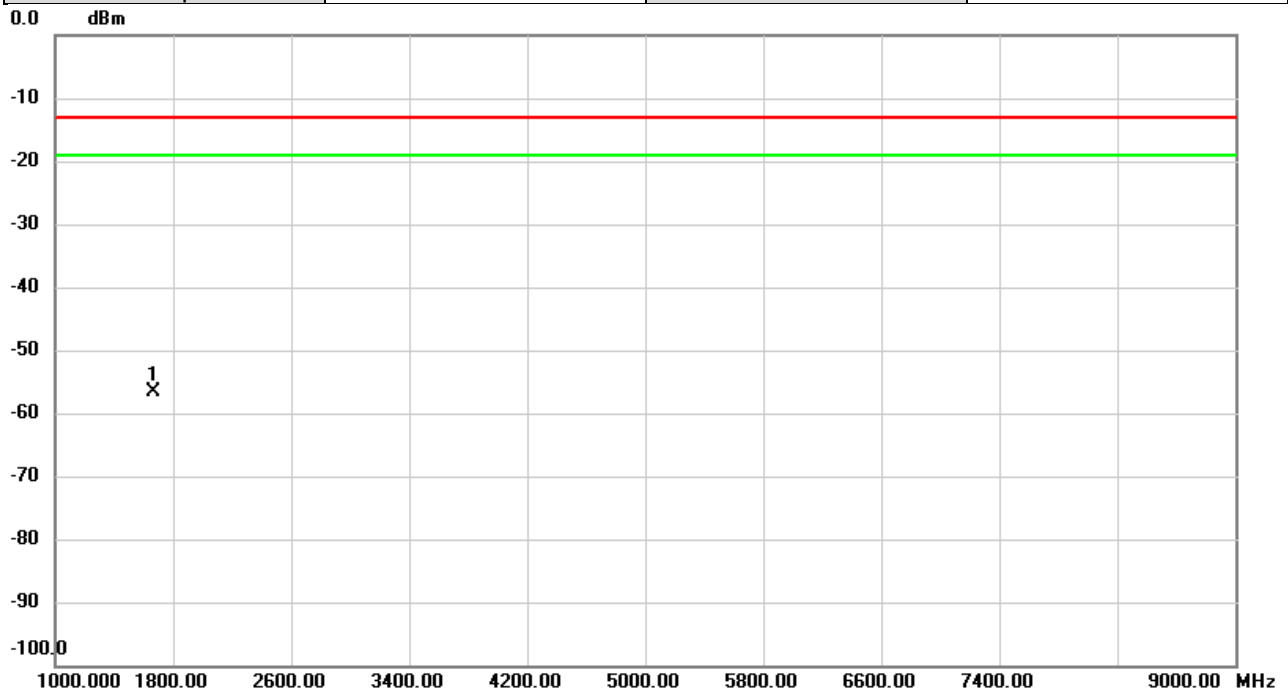


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1668.000	-61.97	5.47	-56.50	-13.00	-43.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n5	Test Date	2025-5-29
Test Channel	CH167300	Polarization	Vertical
Temp	22°C	Hum.	54%

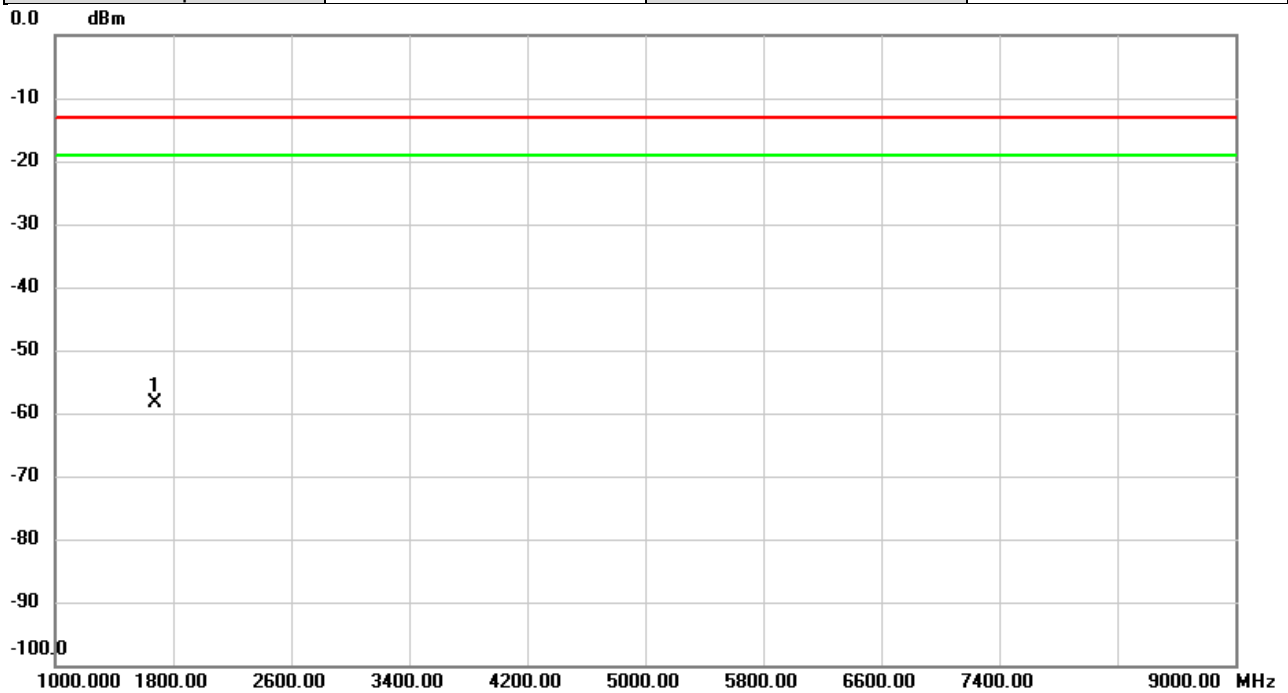


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1673.000	-64.02	5.76	-58.26	-13.00	-45.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n5	Test Date	2025-5-29
Test Channel	CH167300	Polarization	Horizontal
Temp	22°C	Hum.	54%

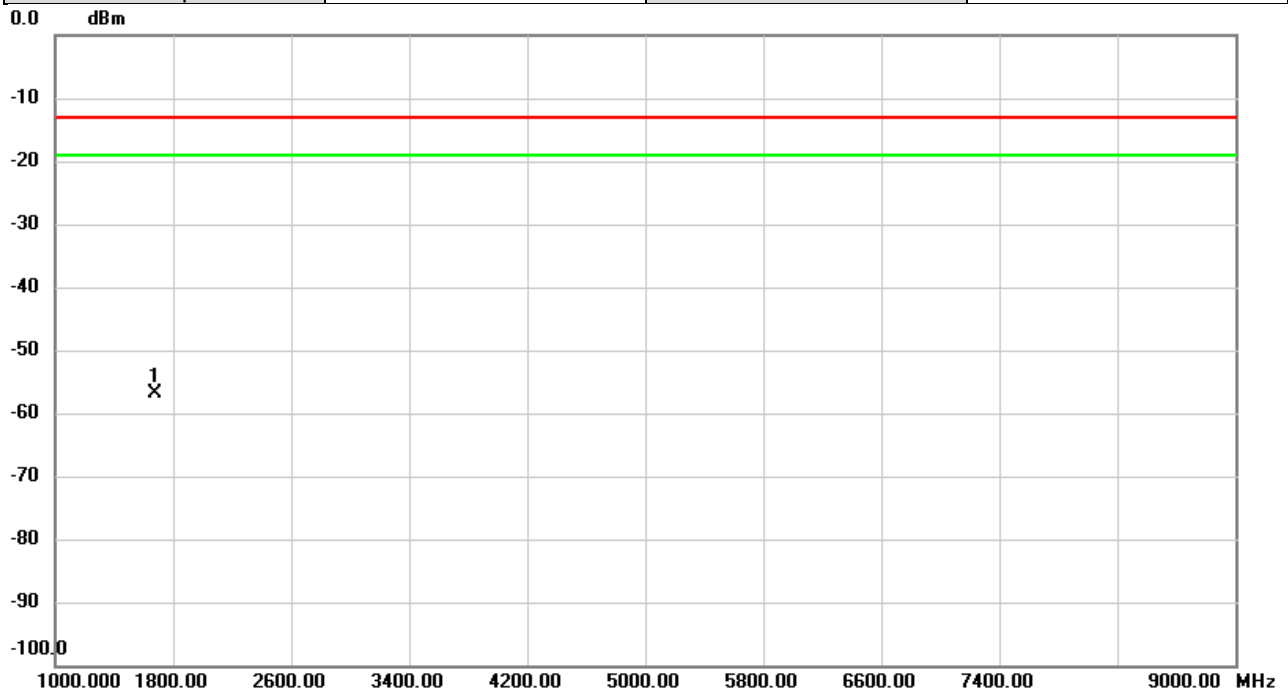


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1673.000	-62.44	5.49	-56.95	-13.00	-43.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n5	Test Date	2025-5-29
Test Channel	CH167800	Polarization	Vertical
Temp	22°C	Hum.	54%

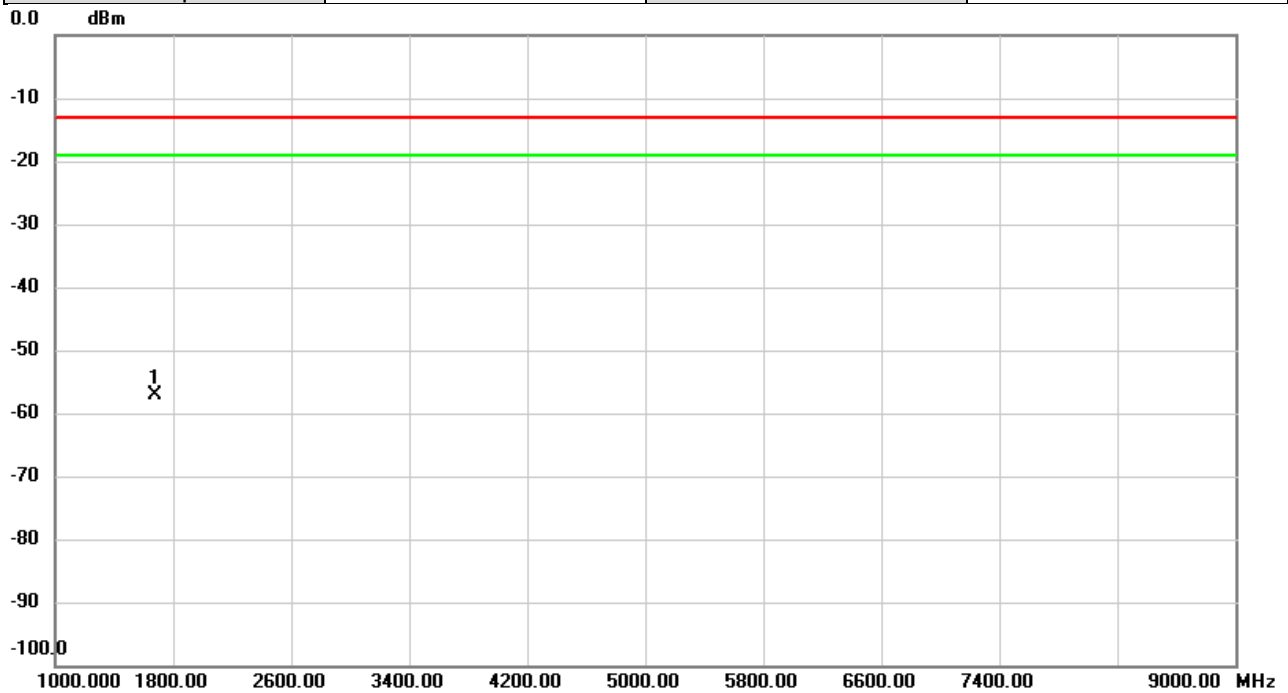


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1678.000	-62.88	5.77	-57.11	-13.00	-44.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n5	Test Date	2025-5-29
Test Channel	CH167800	Polarization	Horizontal
Temp	22°C	Hum.	54%

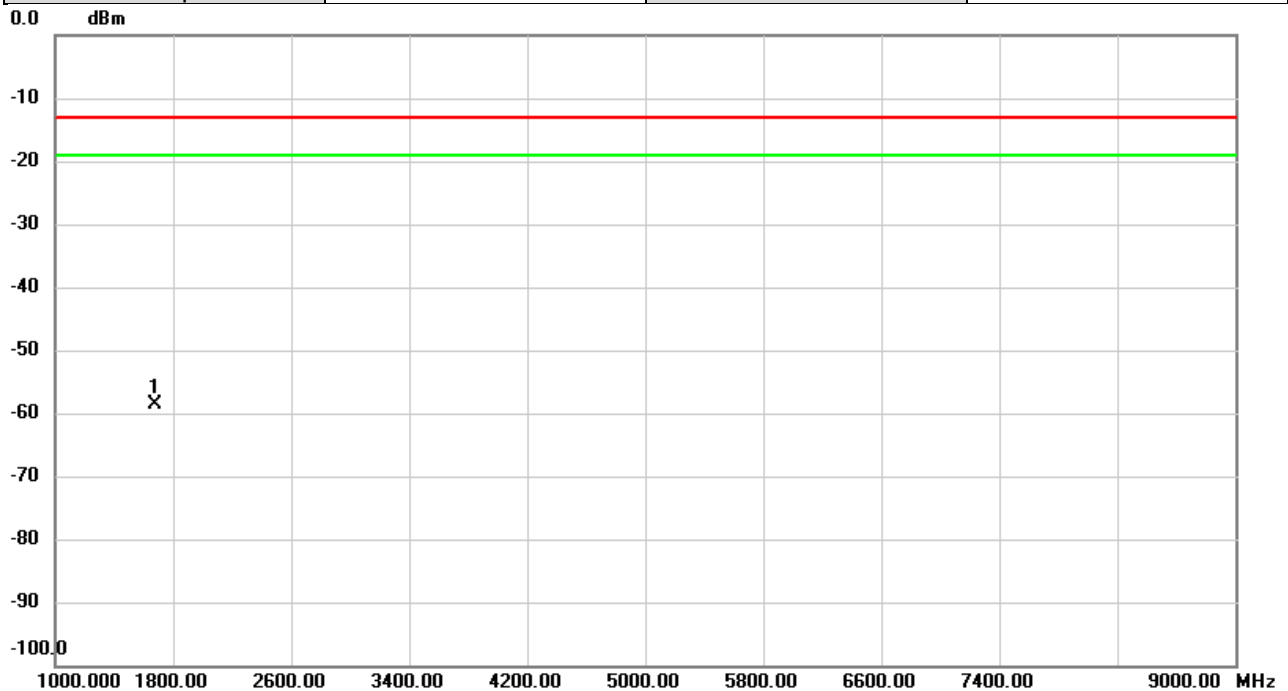


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1678.000	-64.08	5.50	-58.58	-13.00	-45.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025/5/26
Test Channel	CH173800	Polarization	Vertical
Temp	22°C	Hum.	54%

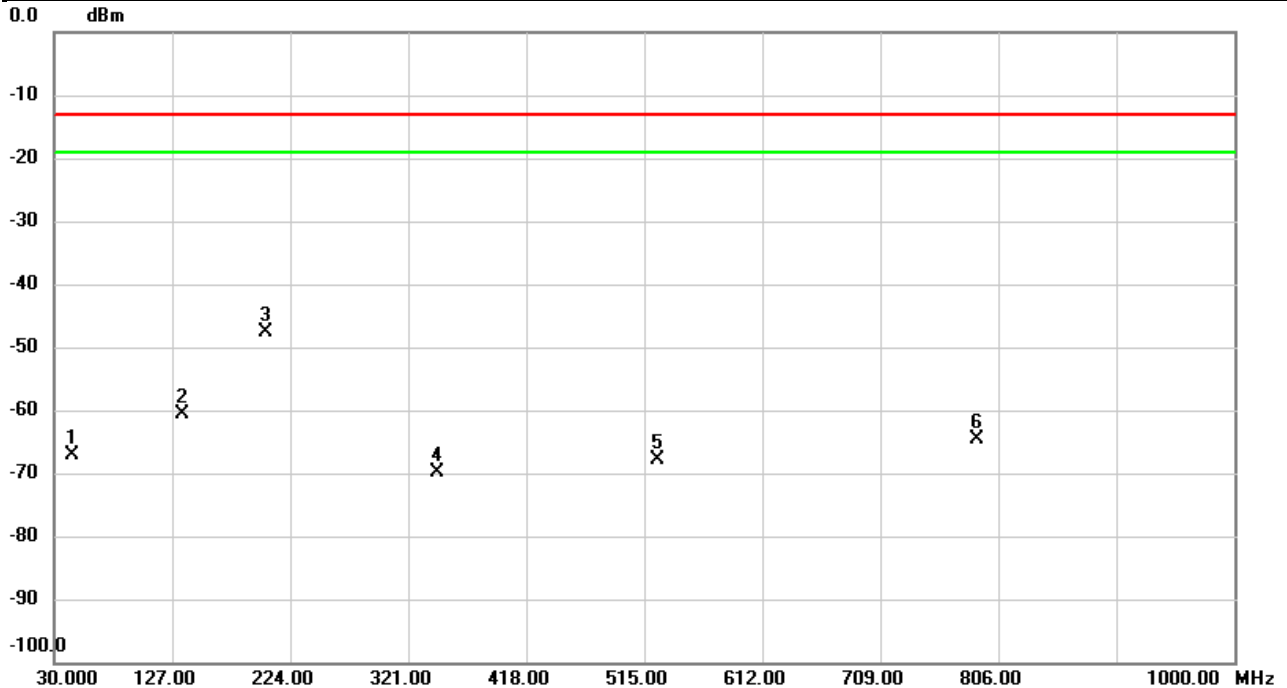


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		44.9057	-63.64	-3.50	-67.14	-13.00	-54.14	peak	
2		135.2450	-58.35	-2.26	-60.61	-13.00	-47.61	peak	
3	*	203.5977	-46.40	-1.24	-47.64	-13.00	-34.64	peak	
4		344.6680	-68.97	-0.79	-69.76	-13.00	-56.76	peak	
5		525.5082	-71.62	3.63	-67.99	-13.00	-54.99	peak	
6		788.2490	-70.69	5.99	-64.70	-13.00	-51.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025/5/26
Test Channel	CH173800	Polarization	Horizontal
Temp	22°C	Hum.	54%

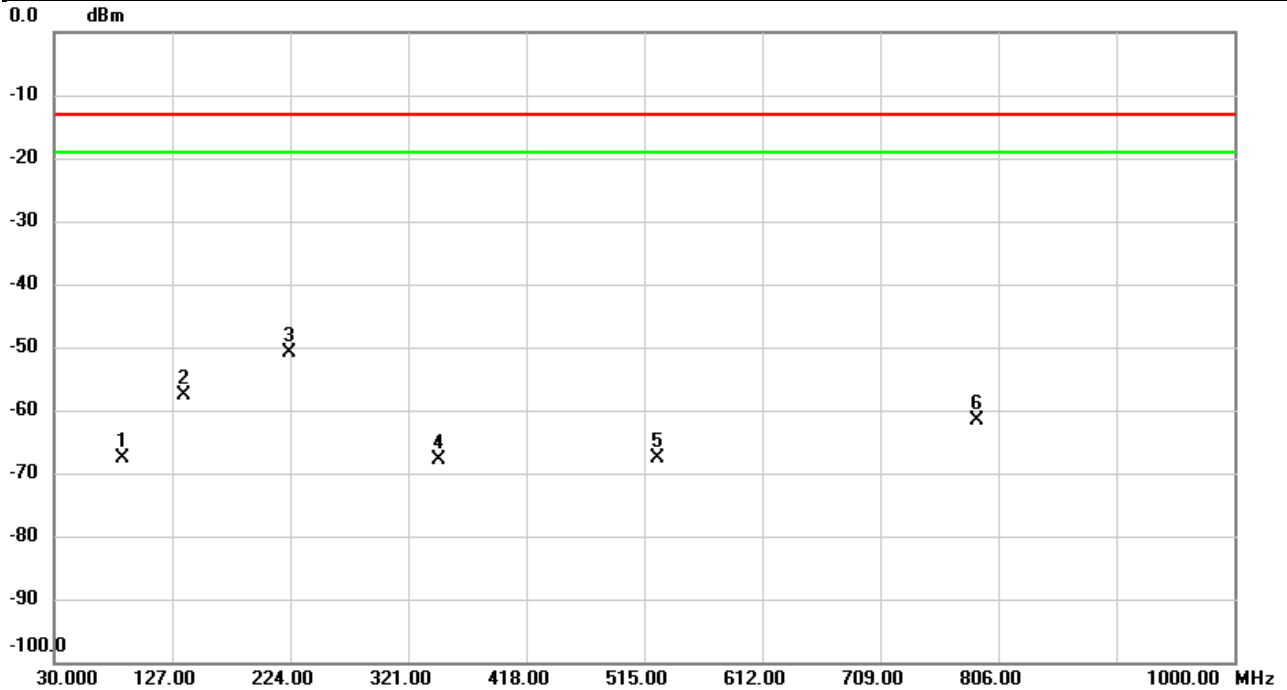


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		86.8743	-61.59	-6.12	-67.71	-13.00	-54.71	peak	
2		136.3766	-53.81	-3.85	-57.66	-13.00	-44.66	peak	
3	*	223.4180	-44.18	-6.59	-50.77	-13.00	-37.77	peak	
4		346.2846	-67.27	-0.67	-67.94	-13.00	-54.94	peak	
5		525.5082	-68.70	1.13	-67.57	-13.00	-54.57	peak	
6		788.2490	-67.58	6.06	-61.52	-13.00	-48.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025-5-29
Test Channel	CH175800	Polarization	Vertical
Temp	22°C	Hum.	54%

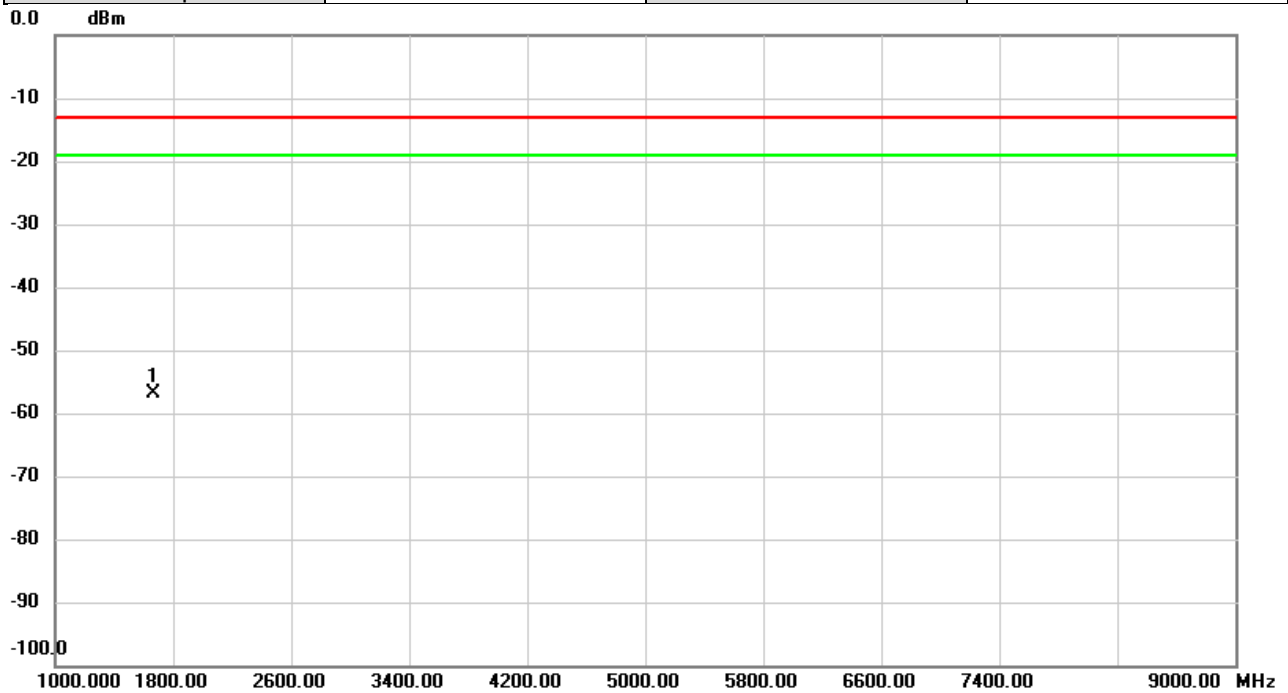


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1668.000	-62.56	5.76	-56.80	-13.00	-43.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025-5-29
Test Channel	CH175800	Polarization	Horizontal
Temp	22°C	Hum.	54%

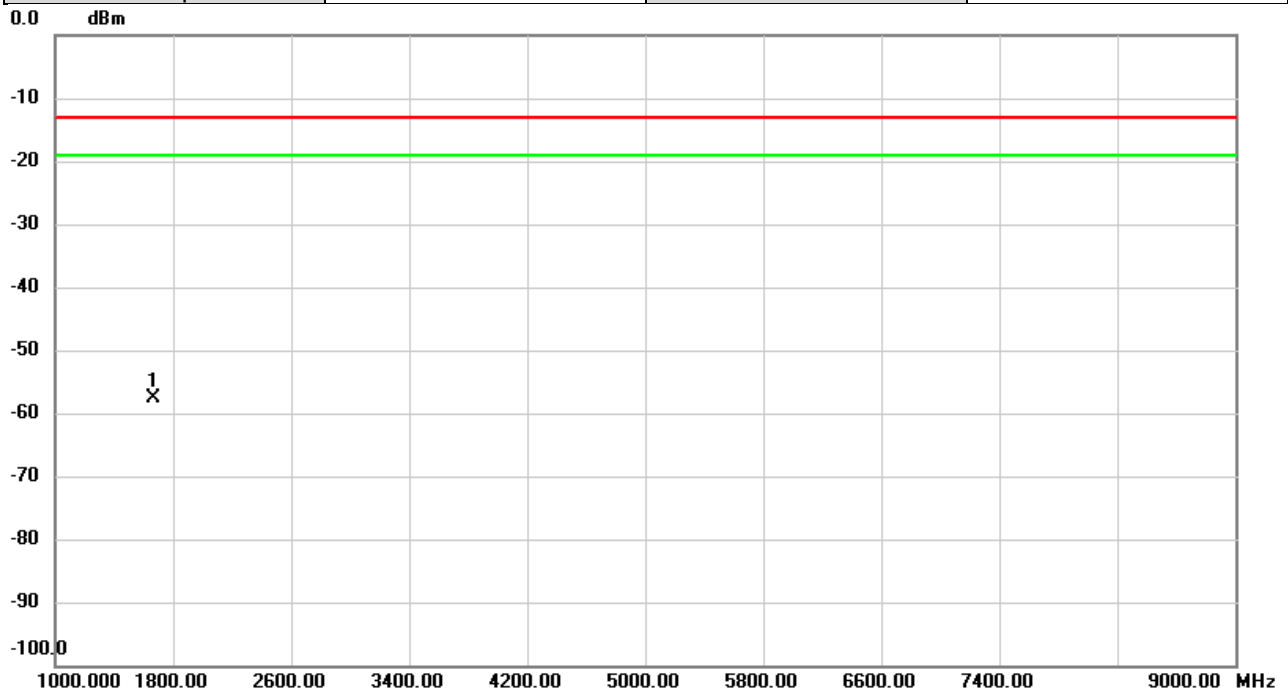


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1668.000	-63.09	5.47	-57.62	-13.00	-44.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025-5-29
Test Channel	CH176300	Polarization	Vertical
Temp	22°C	Hum.	54%

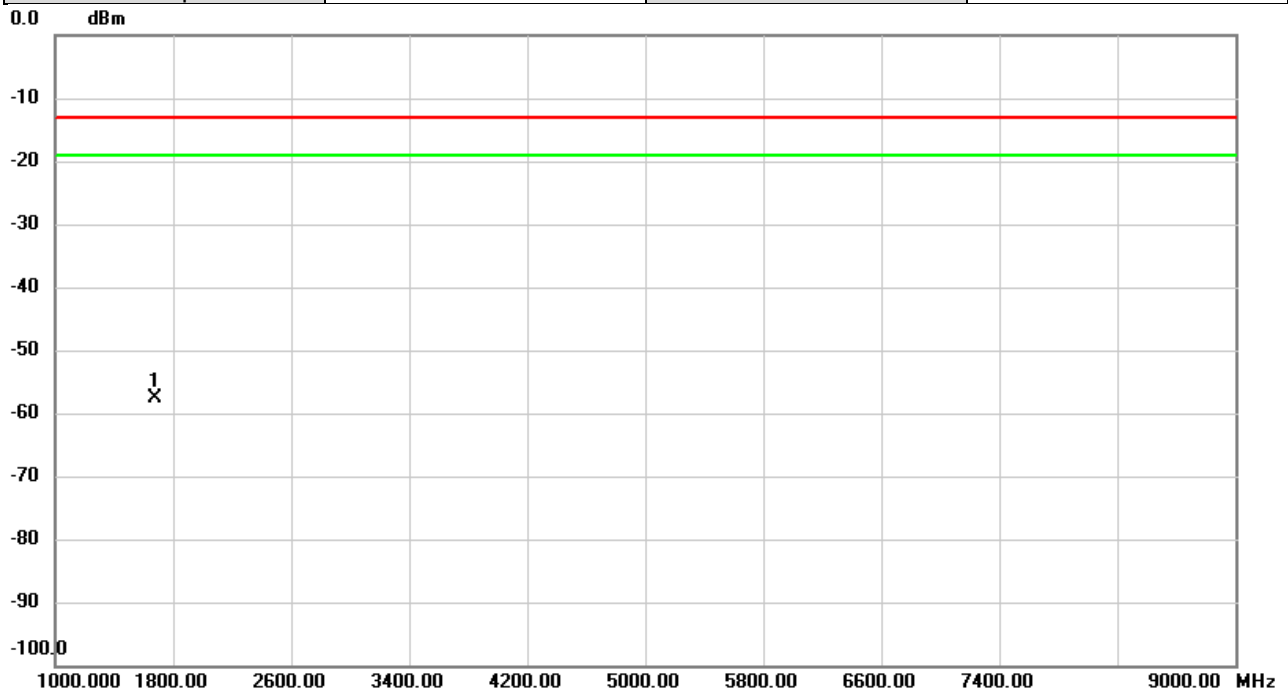


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1673.000	-63.49	5.76	-57.73	-13.00	-44.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025-5-29
Test Channel	CH176300	Polarization	Horizontal
Temp	22°C	Hum.	54%

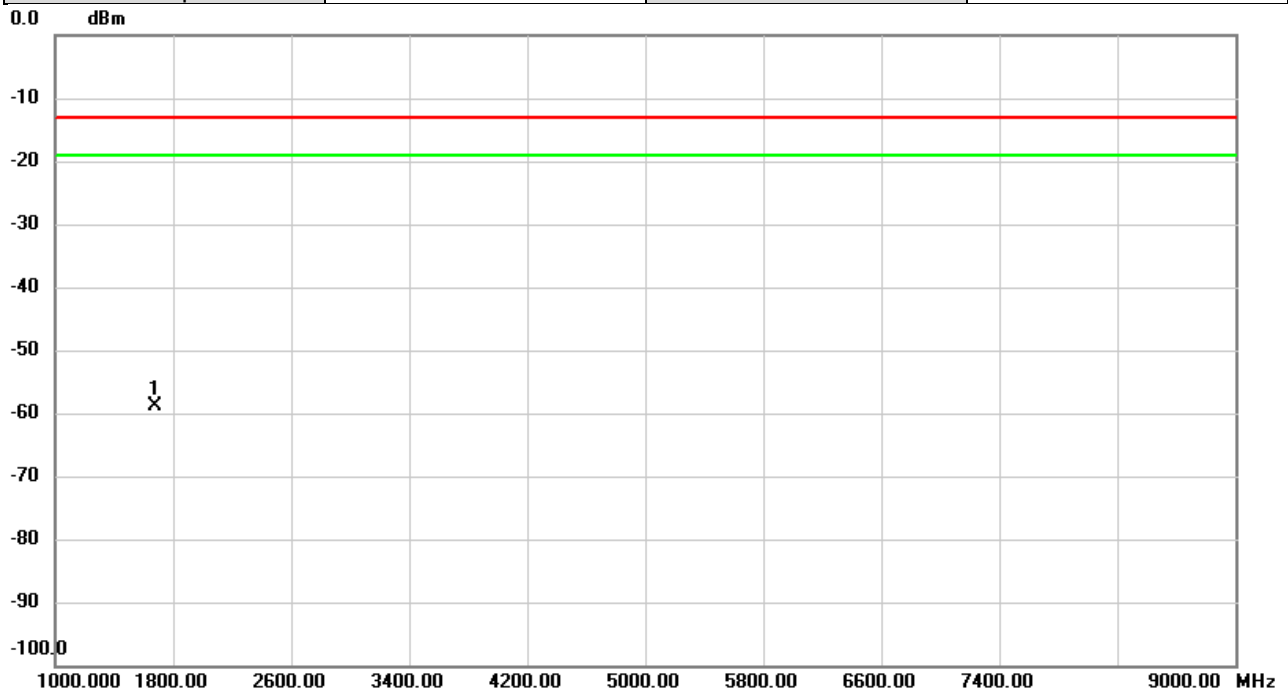


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1673.000	-64.34	5.49	-58.85	-13.00	-45.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025-5-29
Test Channel	CH176800	Polarization	Vertical
Temp	22°C	Hum.	54%

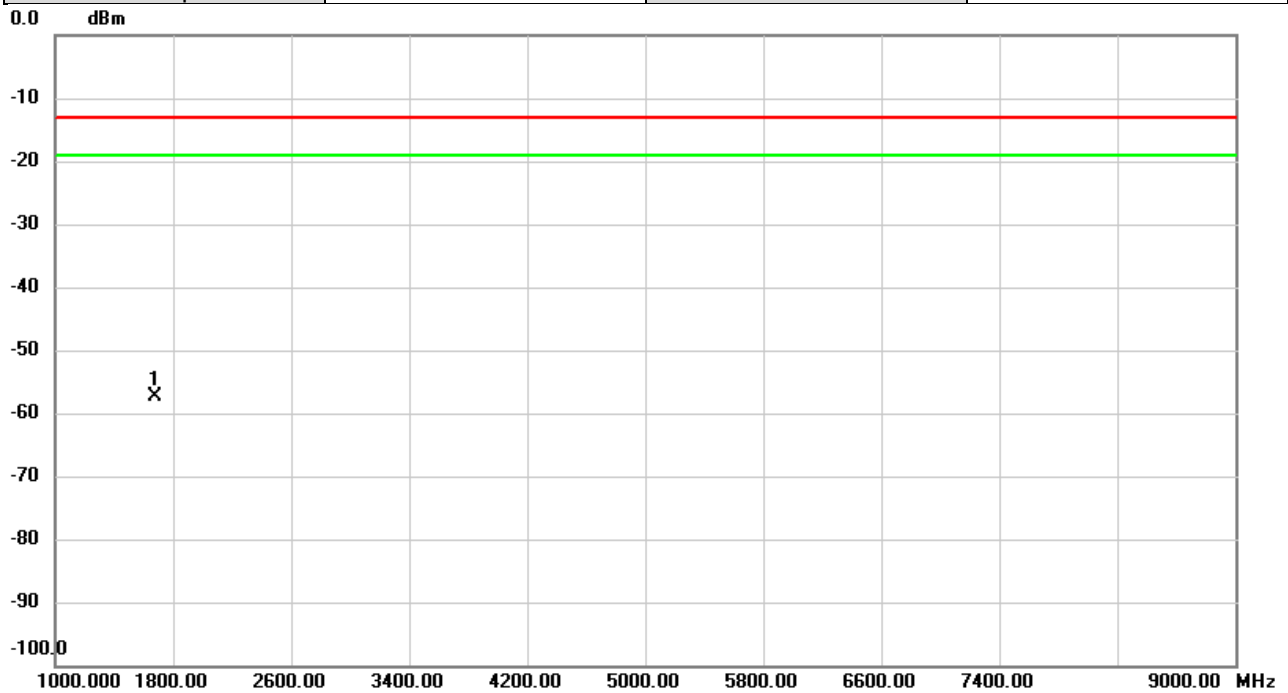


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1678.000	-63.15	5.77	-57.38	-13.00	-44.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2025-5-29
Test Channel	CH176800	Polarization	Horizontal
Temp	22°C	Hum.	54%

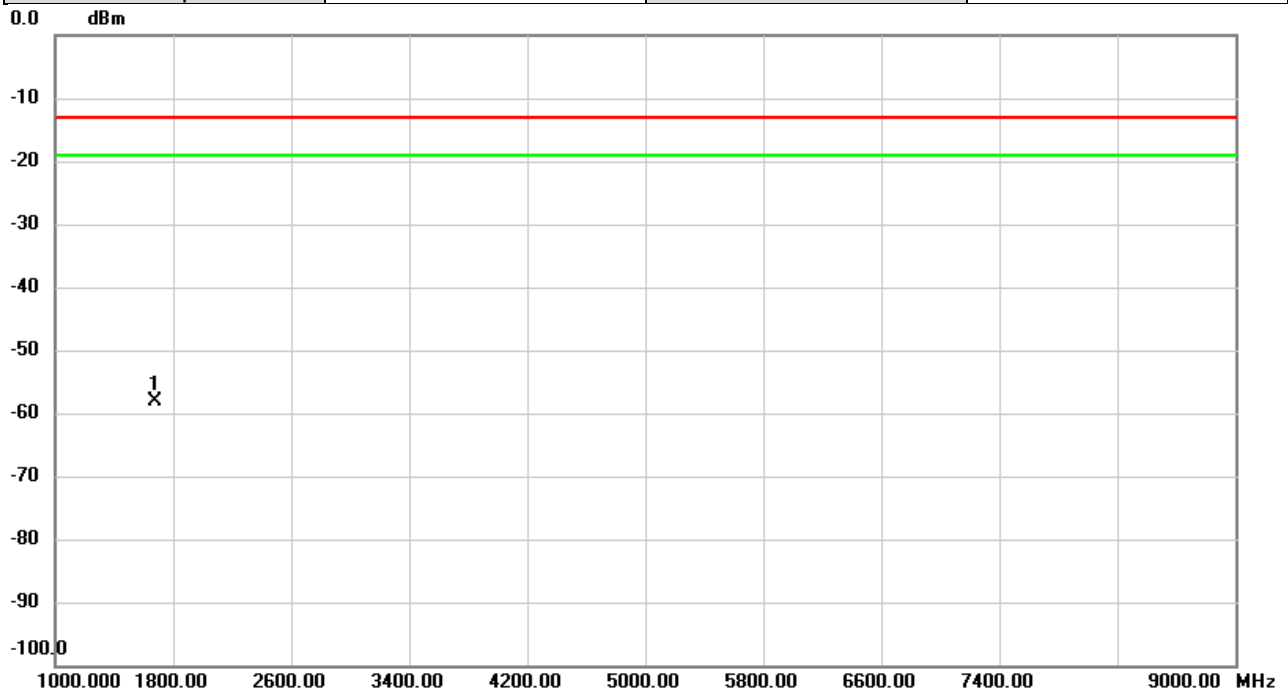


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1678.000	-63.55	5.50	-58.05	-13.00	-45.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Mid CH	Polarization	Vertical
Temp	28°C	Hum.	64%

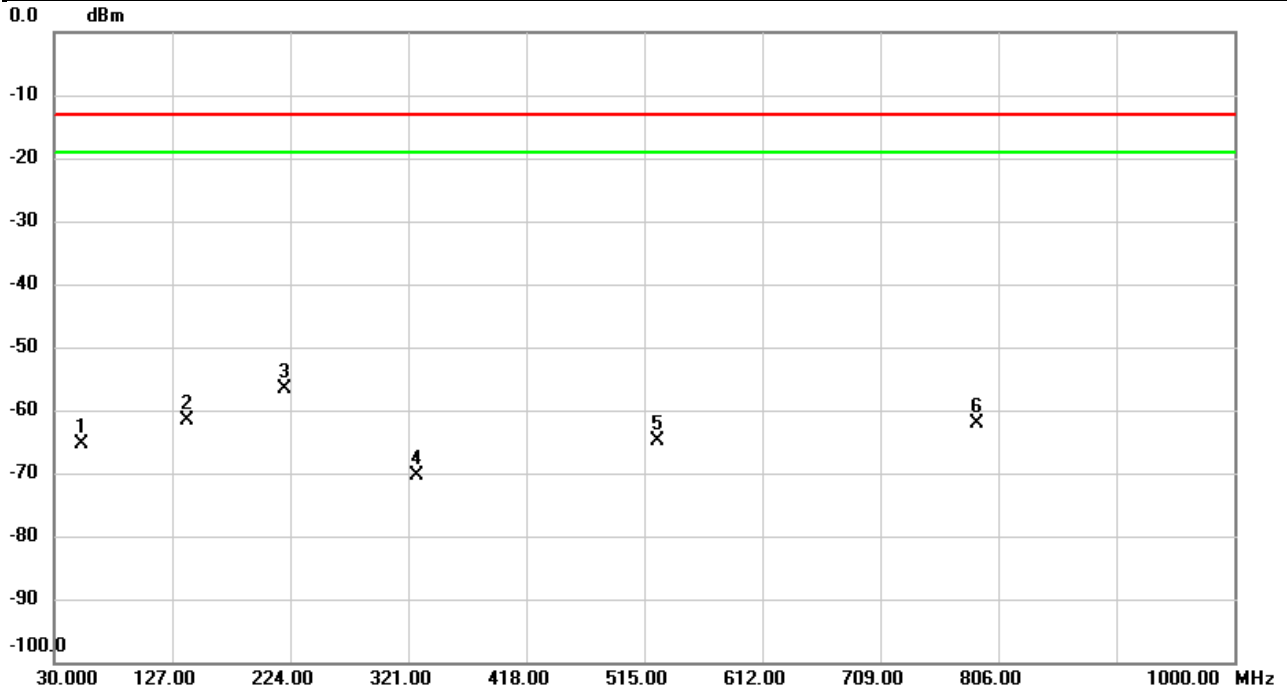


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		53.2153	-60.29	-5.12	-65.41	-13.00	-52.41	peak	
2		138.8987	-60.06	-1.45	-61.51	-13.00	-48.51	peak	
3	*	219.4410	-55.01	-1.69	-56.70	-13.00	-43.70	peak	
4		328.2750	-69.30	-0.95	-70.25	-13.00	-57.25	peak	
5		525.5082	-68.38	3.63	-64.75	-13.00	-51.75	peak	
6		788.2490	-68.22	5.99	-62.23	-13.00	-49.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	28°C	Hum.	64%

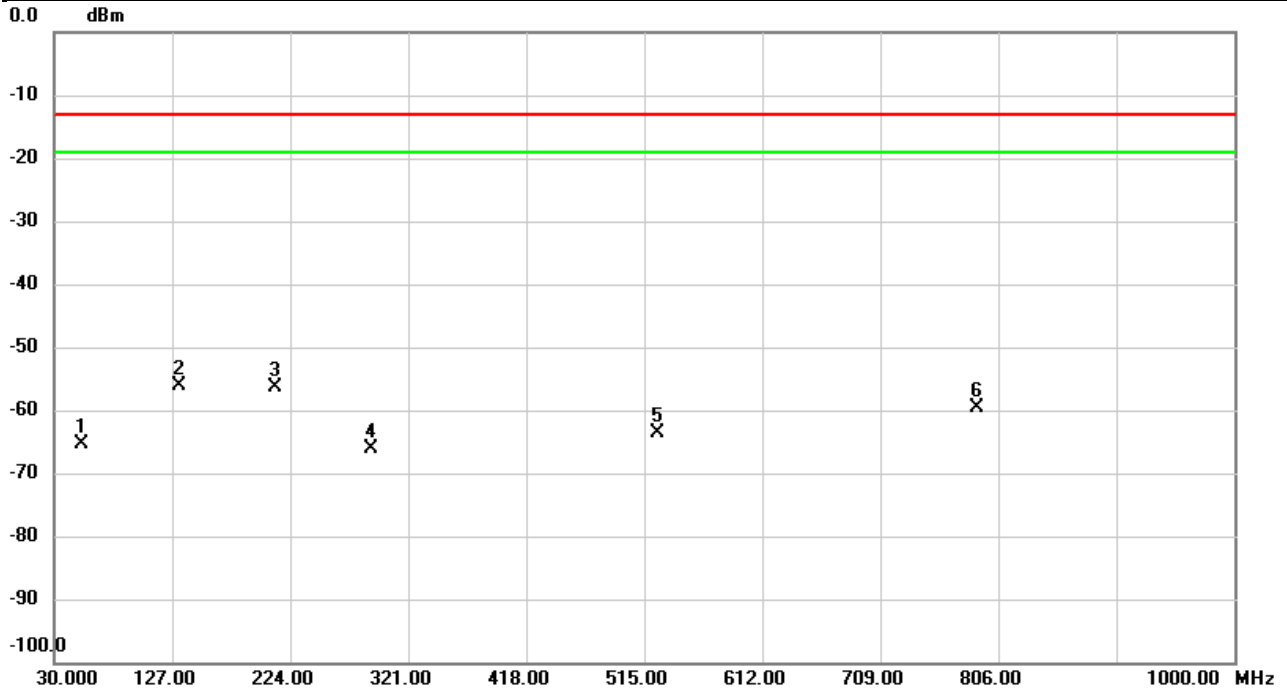


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		52.8920	-65.97	0.64	-65.33	-13.00	-52.33	peak	
2	*	133.2080	-52.10	-4.13	-56.23	-13.00	-43.23	peak	
3		211.4223	-49.13	-7.30	-56.43	-13.00	-43.43	peak	
4		290.9946	-61.82	-4.39	-66.21	-13.00	-53.21	peak	
5		525.5082	-64.69	1.13	-63.56	-13.00	-50.56	peak	
6		788.2490	-65.73	6.06	-59.67	-13.00	-46.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Low CH	Polarization	Vertical
Temp	28°C	Hum.	64%

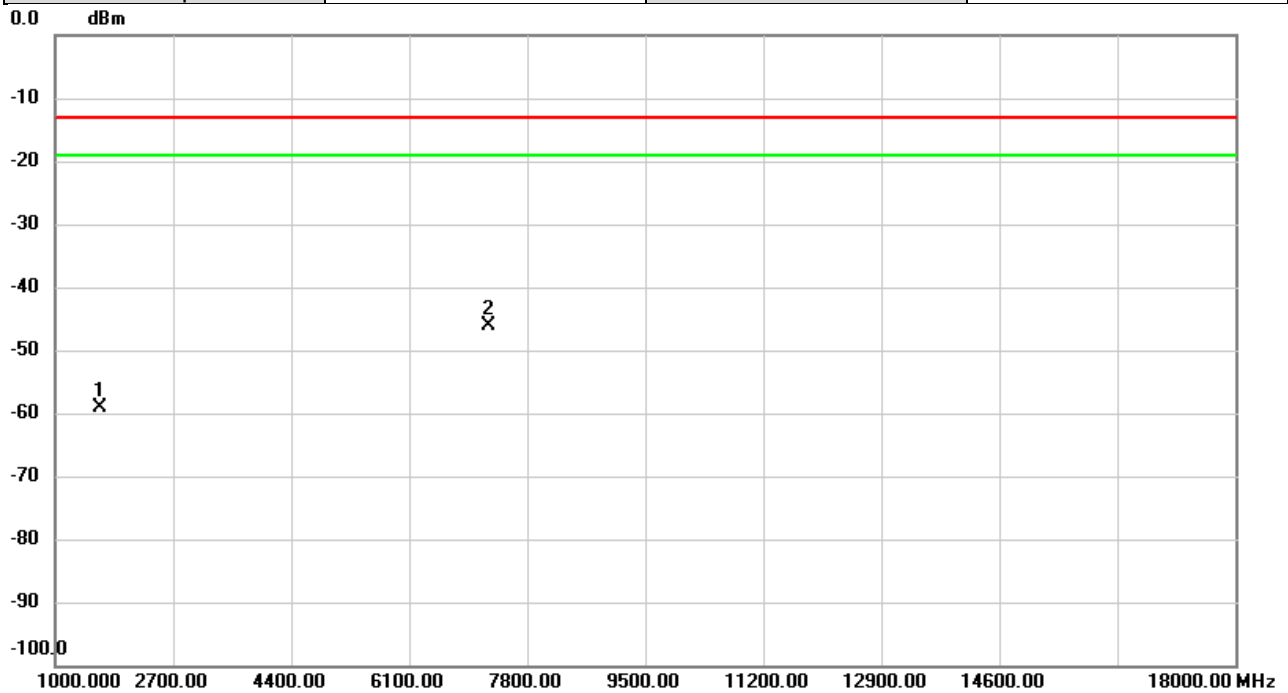


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1650.000	-64.96	5.74	-59.22	-13.00	-46.22	peak	
2	*	7241.000	-63.98	17.80	-46.18	-13.00	-33.18	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Low CH	Polarization	Horizontal
Temp	28°C	Hum.	64%

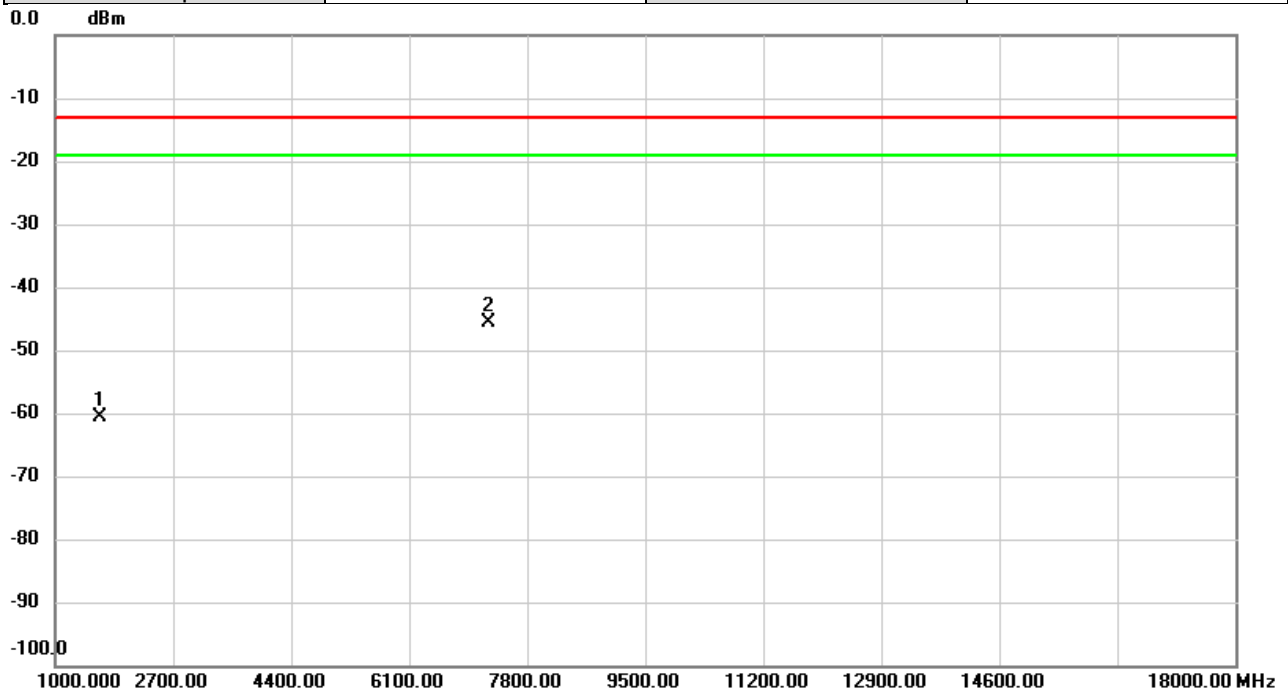


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1650.000	-66.07	5.43	-60.64	-13.00	-47.64	peak	
2	*	7241.000	-63.00	17.43	-45.57	-13.00	-32.57	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Mid CH	Polarization	Vertical
Temp	28°C	Hum.	64%

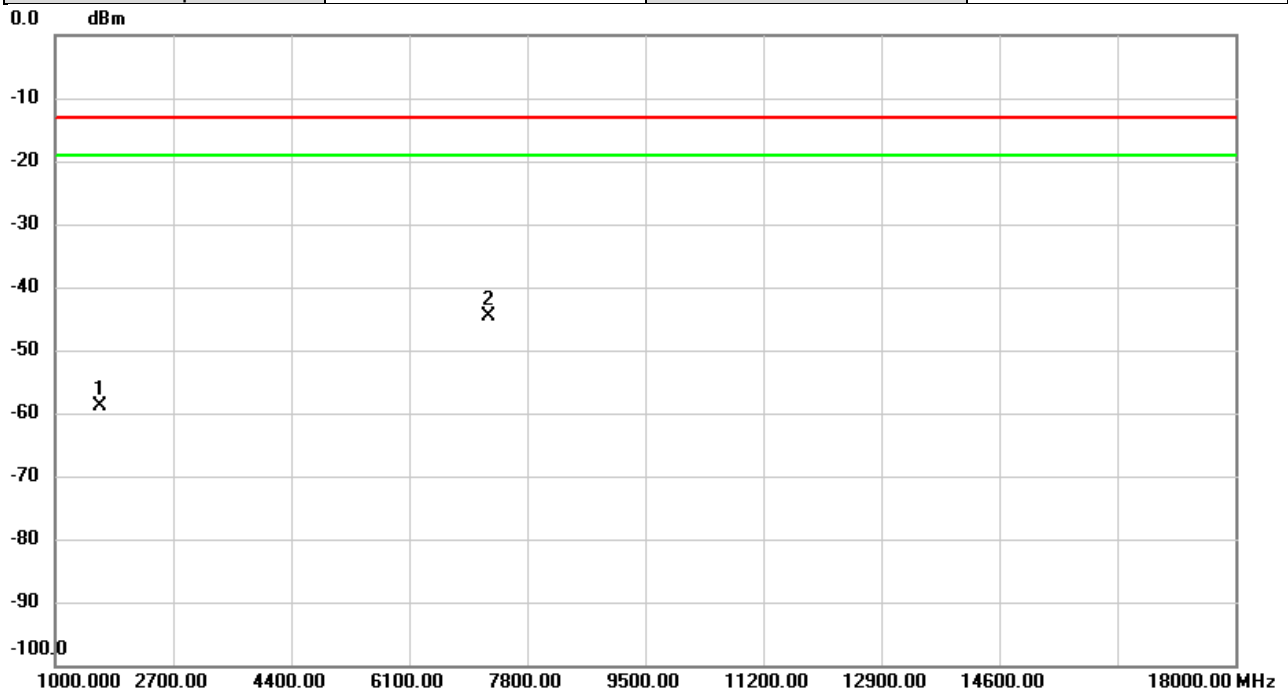


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1654.500	-64.52	5.74	-58.78	-13.00	-45.78	peak	
2	*	7241.000	-62.43	17.80	-44.63	-13.00	-31.63	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	28°C	Hum.	64%

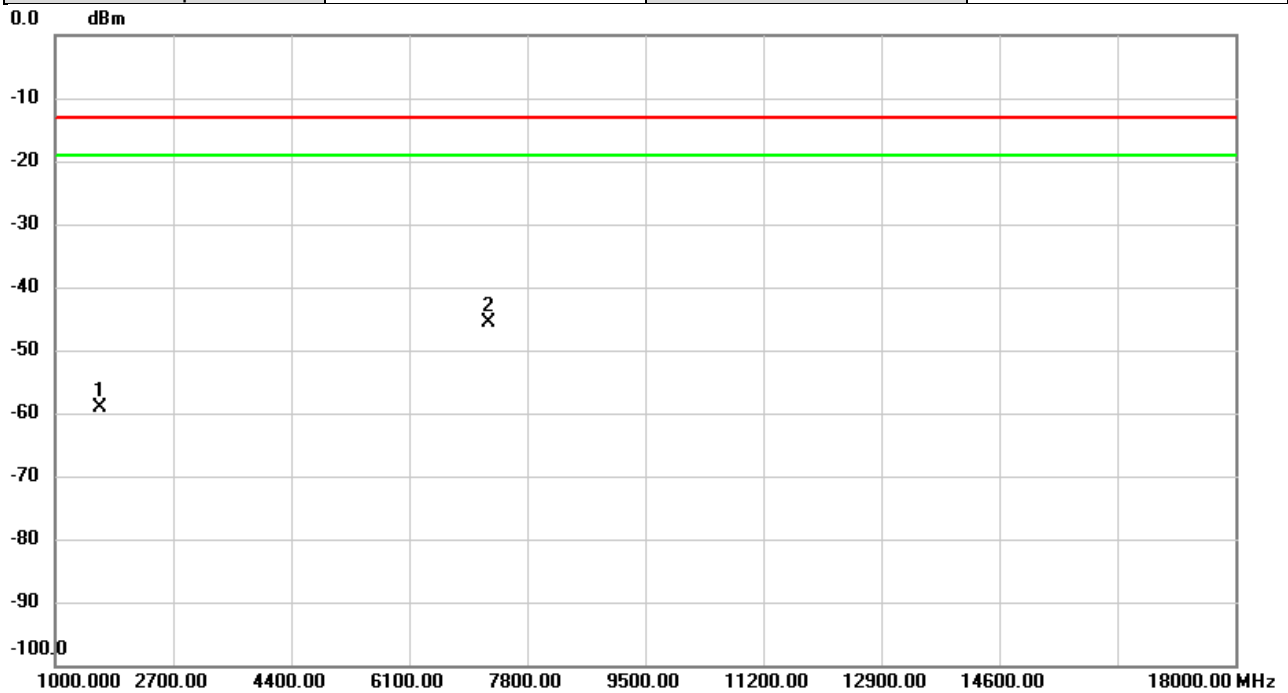


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1654.500	-64.59	5.44	-59.15	-13.00	-46.15	peak	
2	*	7241.000	-62.93	17.43	-45.50	-13.00	-32.50	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX High CH	Polarization	Vertical
Temp	28°C	Hum.	64%

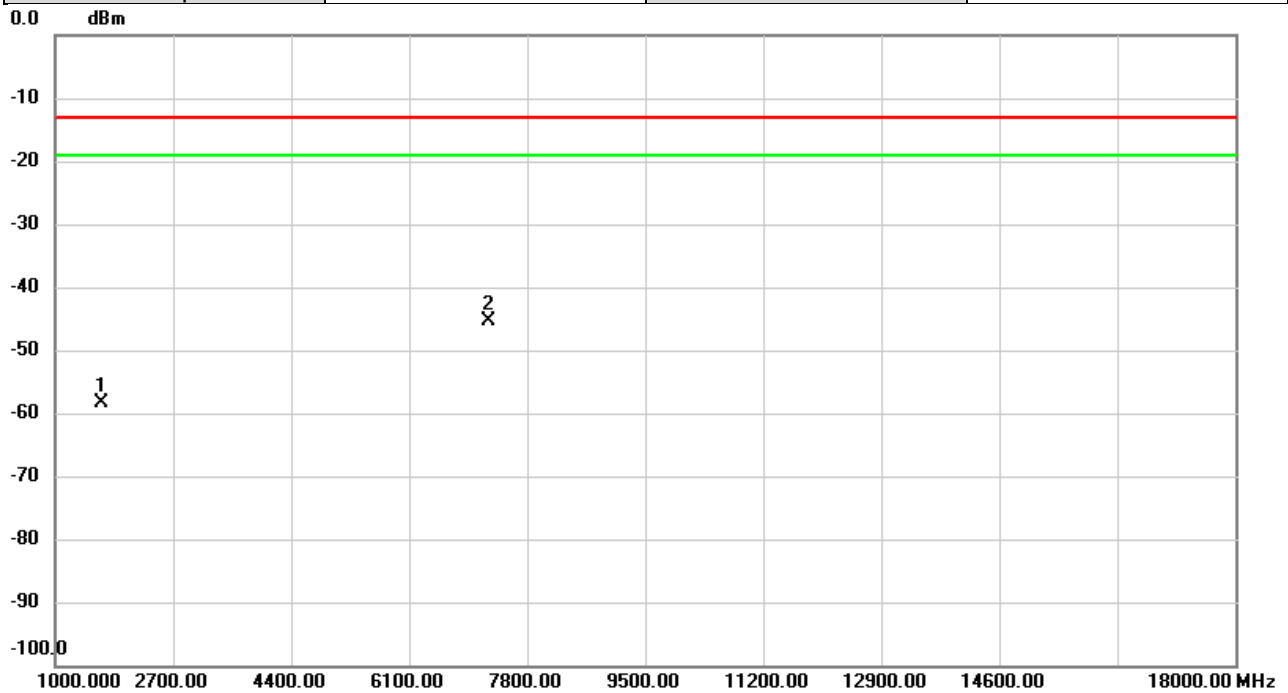


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1660.000	-64.19	5.75	-58.44	-13.00	-45.44	peak	
2	*	7241.000	-63.19	17.80	-45.39	-13.00	-32.39	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX High CH	Polarization	Horizontal
Temp	28°C	Hum.	64%

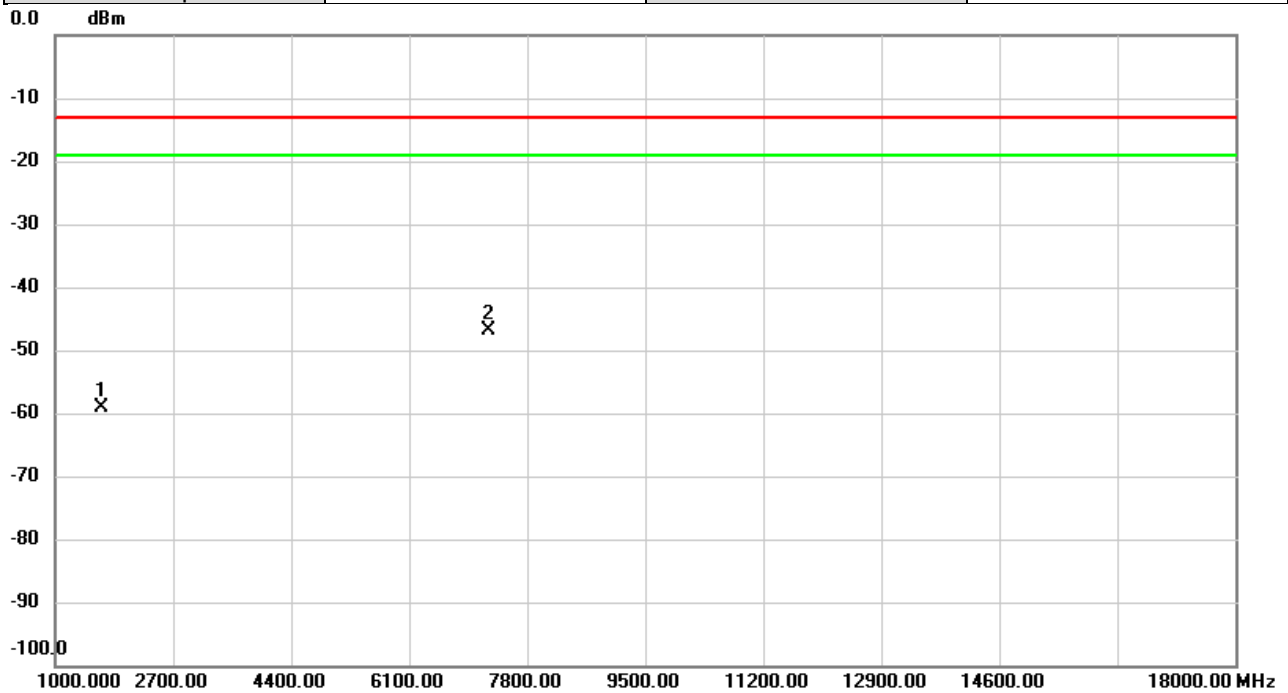


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		1660.000	-64.47	5.45	-59.02	-13.00	-46.02	peak	
2	*	7241.000	-64.27	17.43	-46.84	-13.00	-33.84	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Mid CH	Polarization	Vertical
Temp	28°C	Hum.	64%

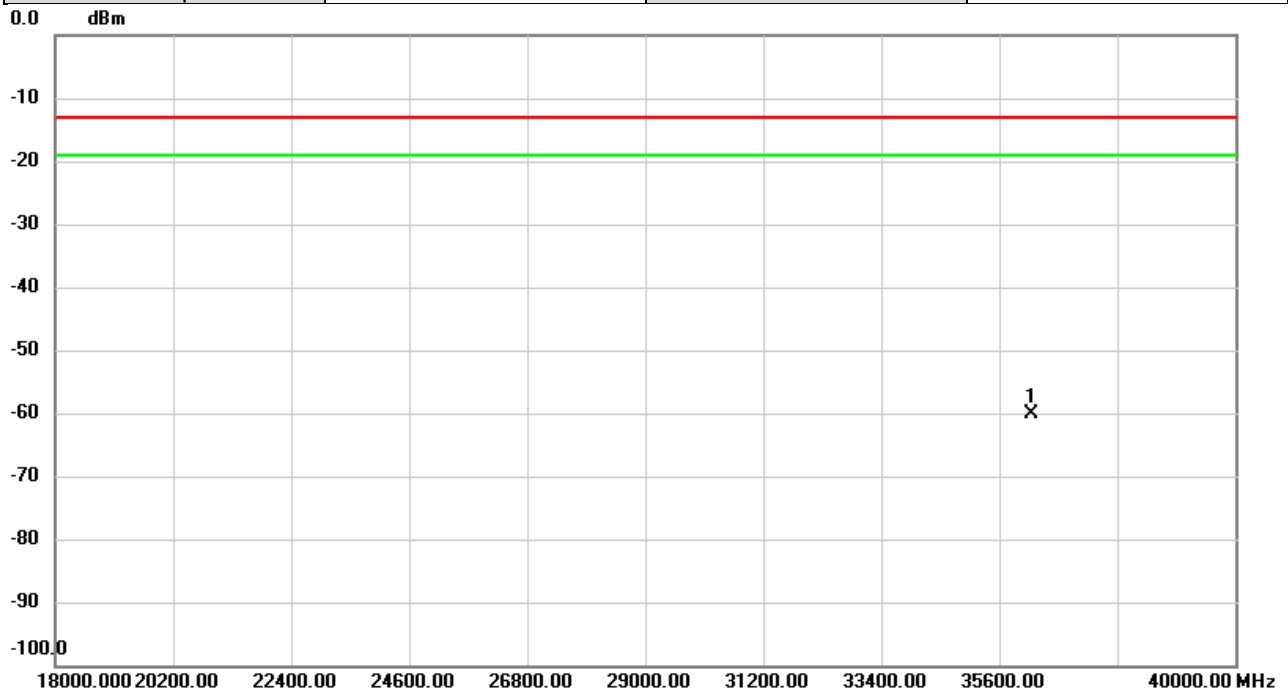


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	36205.00	-55.22	-5.02	-60.24	-13.00	-47.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 48A-n5A	Test Date	2025/6/2
Test Channel	TX Mid CH	Polarization	Horizontal
Temp	28°C	Hum.	64%

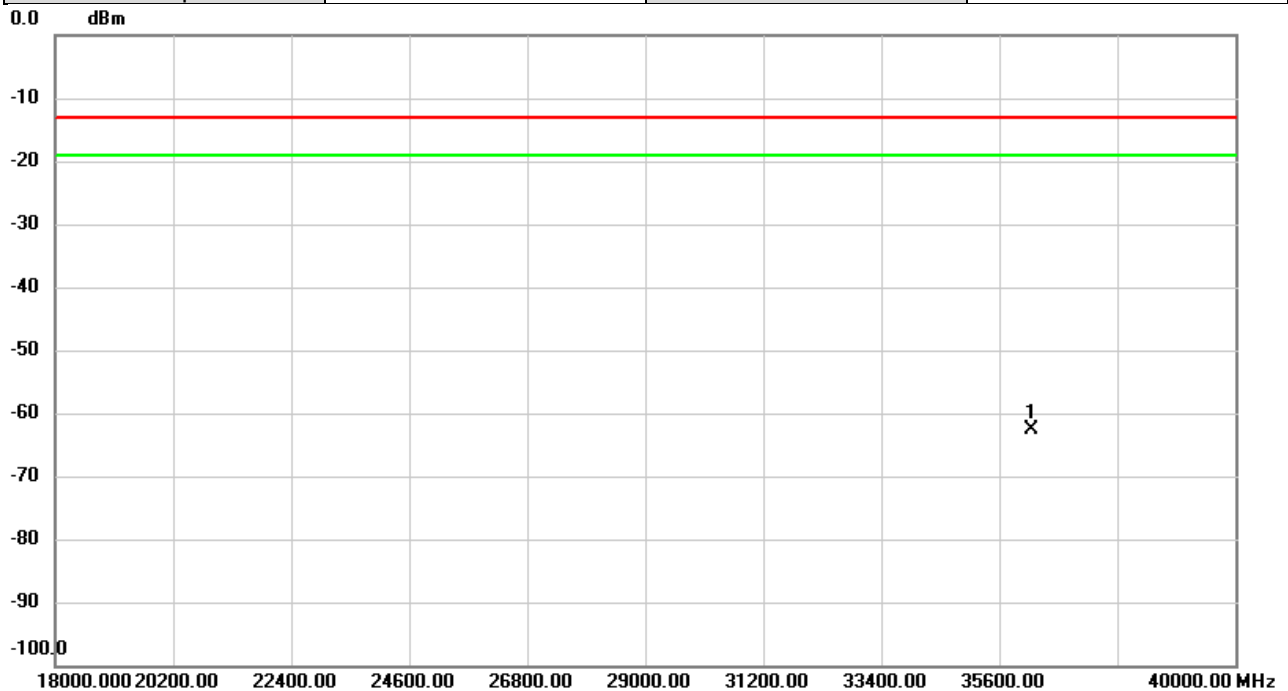

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	36205.00	-56.26	-6.41	-62.67	-13.00	-49.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report