



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GTS20200907014-1-12

FCC ID.....: 2AX7EWCUBE-1000

Compiled by

(position+printed name+signature)...: File administrators Peter Xiao

Supervised by

(position+printed name+signature)...: Test Engineer Moon Tan

Approved by

(position+printed name+signature)...: Manager Simon Hu



Date of issue.....: Nov.23, 2020

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Applicant's name Donica Aviation Engineering Co., Ltd.

Address: 1st Floor, Bldg 15, Wisdomland Business Park, No. 15 Guankou 2nd Road, Nantou, Nanshan District, Shenzhen, China

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Wireless Cube (abbreviated as wCube, also called AirCinema Cube)

Trade Mark: DONICA

Manufacturer: Donica Aviation Engineering Co., Ltd.

Model/Type reference.....: wCube-1000

Listed Models: N/A

Operation Frequency.....: From 2412MHz to 2462MHz

Hardware Version: V1.0

Software Version: V1.0

Rating: DC 28.0V

Result.....: **PASS**

TEST REPORT

Test Report No. : GTS20200907014-1-12	Nov.23, 2020 Date of issue
---	-------------------------------

Equipment under Test : Wireless Cube (abbreviated as wCube, also called AirCinema Cube)

Model /Type : wCube-1000

Listed Models : N/A

Applicant : **Donica Aviation Engineering Co., Ltd.**

Address : 1st Floor, Bldg 15, Wisdomland Business Park, No. 15 Guankou 2nd Road, Nantou, Nanshan District, Shenzhen, China

Manufacturer : **Donica Aviation Engineering Co., Ltd.**

Address : 1st Floor, Bldg 15, Wisdomland Business Park, No. 15 Guankou 2nd Road, Nantou, Nanshan District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	7
2.4. Short description of the Equipment under Test (EUT)	7
2.5. EUT operation mode	7
2.6. Block Diagram of Test Setup	7
2.7. Related Submittal(s) / Grant (s)	8
2.8. EUT Exercise Software	8
2.9. Special Accessories	8
2.10. External I/O Cable	8
2.11. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	9
3.5. Test Description	10
3.6. Equipments Used during the Test.....	11
4. TEST CONDITIONS AND RESULTS	12
4.1. AC Power Conducted Emission	12
4.2. Radiated Emission	14
4.3. Maximum Peak Output Power	25
4.4. Power Spectral Density	28
4.5. 6dB Bandwidth	43
4.6. Band Edge Compliance of RF Emission	58
4.7. Antenna Requirement	77
5. TEST SETUP PHOTOS OF THE EUT	79
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	81

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 DTS Meas Guidance v05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Sep.24, 2020
	:	
Testing commenced on	:	Sep.24, 2020
	:	
Testing concluded on	:	Nov.23, 2020

2.2. Product Description

Product Name	Wireless Cube (abbreviated as wCube, also called AirCinema Cube)
Trade Mark	DONICA
Model/Type reference	wCube-1000
List Model	N/A
Model Declaration	N/A
Hardware version	V1.0
Software version	V1.0
Power supply:	DC 28.0V
Sample ID	GTS20200907014-1-1#& GTS20200907014-1-2#
2G	
Support Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
Release Version	R99
GPRS Class	Class 12
EGPRS Class	Class 12
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
Type Of Modulation	GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Description	Internal Antenna; 0dBi (max.) For GSM 850; 0dBi (max.) For DCS 1900;
3G	
UMTS Operation Frequency Band	UMTS FDD Band 2(1850 MHz -1910MHz) UMTS FDD Band 4(1710 MHz -1755MHz) UMTS FDD Band 5(824 MHz -849MHz)
WCDMA Release Version	R6
HSDPA Release Version	Release 6
Modulation Type	QPSK for UMTS
Antenna Description	Internal Antenna; 1.0dBi (max.) For WCDMA Band 2, 4,5;
LTE	
LTE Operation Frequency Band	E-UTRA Band 2(1850 MHz -1910MHz) E-UTRA Band 4(1710 MHz -1755MHz) E-UTRA Band 5(824 MHz -849MHz) E-UTRA Band 7(2500 MHz -2570MHz) E-UTRA Band 12(699 MHz -716MHz) E-UTRA Band 13(777 MHz -787MHz) E-UTRA Band 25(1850 MHz -1915MHz)

	E-UTRA Band 26(814 MHz -824MHz) E-UTRA Band 26(824 MHz -849MHz) E-UTRA Band 38(2570 MHz -2620MHz) E-UTRA Band 41(2496 MHz -2690MHz)
LTE Release Version	R9
Type Of Modulation	QPSK/16QAM
Antenna Description	External&Internal Antenna; 2.0dBi (max.) For LTE Band 2, 4, 5, 7, 12, 13, 25, 26, 38, 41
WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11 Channel for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	802.11b: DSSS; 802.11g/n/ax: OFDM
Antenna Description	Four same Internal Antenna, support 4*4MIMO technology ANT9 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band ANT10 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band ANT11 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band ANT12 used for WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band
WIFI(5.2G Band)	
Frequency Range	5180MHz ~ 5240MHz
Channel Number	4 Channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	802.11a/n/ac/ax: OFDM
Antenna Description	Four Internal Antennas; support 4*4MIMO technology ANT5 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band ANT6 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band ANT7 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band ANT8 used for WIFI TX/RX, 2.0dBi(Max.) for 5.2G Band
WIFI (5.8G Band)	
Frequency Range	5745MHz ~ 5825MHz
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	802.11a/n/ac/ax: OFDM
Antenna Description	Four Internal Antennas; support 4*4MIMO technology ANT1 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band ANT2 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band ANT3 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band ANT4 used for WIFI TX/RX, 2.0dBi(Max.) for 5.8G Band

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐	230V / 50 Hz	☐	120V / 60Hz
		☐	12 V DC	☐	24 V DC
		☒	Other (specified in blank below)		

DC 28.0V

2.4. Short description of the Equipment under Test (EUT)

This is a Wireless Cube (abbreviated as wCube, also called AirCinema Cube).
For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Antenna	Chain 9		Chain 10		Chain 11		Chain 12		Simultaneously
Bandwidth Mode	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	/
IEEE 802.11b	☒	☐	☒	☐	☒	☐	☒	☐	☐
IEEE 802.11g	☒	☐	☒	☐	☒	☐	☒	☐	☐
IEEE 802.11n	☒	☒	☒	☒	☒	☒	☒	☒	☒
IEEE 802.11ax	☒	☒	☒	☒	☒	☒	☒	☒	☒


Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

The EUT has been tested under operating condition.

AC main conducted emission pre-test voltage at both AC 120V/60Hz and AC 240V/50Hz, recorded worst case;
AC main conducted emission pre-test at charge from PC modes, recorded worst case;

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.
Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11g mode (MCH).

2.6. Block Diagram of Test Setup

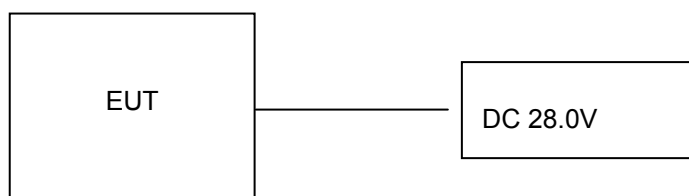

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AX7EWCUBE-1000** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (FTP Server) provided by application.

2.9. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
PHILIPS	Displayer	203V5L	/	SDOC
MEAN WELL ENTERPRISES CO.,LTD.	Adapter	LPV-60-24	/	SDOC

Note: The Displayer is only used for auxiliary testing.

2.10. External I/O Cable

I/O Port Description	Quantity	Cable
VGA Port	1	1.0m, Unscreened Cable
USB Port	1	N/A
LAN Port	1	1.0m, Unscreened Cable
DC IN Port	1	1.0m, Unscreened Cable

2.11. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is 165725.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

Applied Standard: FCC Part 15 Subpart C				
FCC Rules	Description of Test	Test Sample	Result	Remark
/	On Time and Duty Cycle	GTS20200907014-1-1#	/	/
§15.247(b)	Maximum Conducted Output Power	GTS20200907014-1-1#	Compliant	Note 1
§15.247(e)	Power Spectral Density	GTS20200907014-1-1#	Compliant	Note 1
§15.247(a)(2)	6dB Bandwidth	GTS20200907014-1-1#	Compliant	Note 1
§2.1047	99% Occupied Bandwidth	/	N/A	N/A
§15.209, §15.247(d)	Conducted Spurious Emissions	GTS20200907014-1-1#	Compliant	Note 1
§15.209, §15.247(d)	Radiated Spurious Emissions	GTS20200907014-1-1# GTS20200907014-1-2#	Compliant	Note 1
§15.205	Emissions at Restricted Band	GTS20200907014-1-1# GTS20200907014-1-2#	Compliant	Note 1
§15.207(a)	AC Conducted Emissions	GTS20200907014-1-2#	Compliant	Note 1
§15.203	Antenna Requirements	GTS20200907014-1-1#	Compliant	Note 1
§15.247(i)§2.1091	RF Exposure	/	Compliant	Note 2

Remark:

1. The measurement uncertainty is not included in the test result.
2. N/A = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (SAR Report).
5. We tested all test mode and recorded worst case in report

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10 th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	13.5Mbps	3/6/11
	11ax(20MHz)/OFDM	6.5Mbps	1/6/11
	11ax(40MHz)/OFDM	13.5Mbps	3/6/11
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5Mbps	3/9
	11ax(20MHz)/OFDM	6.5Mbps	1/11
	11ax(40MHz)/OFDM	13.5Mbps	3/9

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2020/09/19	2021/09/18
LISN	R&S	ESH2-Z5	893606/008	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESPI3	101841-cd	2020/09/19	2021/09/18
EMI Test Receiver	R&S	ESCI7	101102	2020/09/19	2021/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2020/09/19	2021/09/18
Spectrum Analyzer	R&S	FSV40	100019	2020/09/19	2021/09/18
Vector Signal generator	Agilent	N5181A	MY49060502	2020/09/19	2021/09/18
Signal generator	Agilent	E4421B	3610AO1069	2020/09/19	2021/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2020/09/19	2021/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2020/09/19	2021/09/18
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2020/10/11	2021/10/10
Bilog Antenna	Schwarzbeck	VULB9163	000976	2020/05/26	2021/05/25
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV 9743	#202	2020/09/19	2021/09/18
Amplifier	Schwarzbeck	BBV9179	9719-025	2020/09/19	2021/09/18
Amplifier	EMCI	EMC051845B	980355	2020/09/19	2021/09/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2020/09/19	2021/09/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2020/09/19	2021/09/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2020/09/19	2021/09/18
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2020/09/19	2021/09/18
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2020/09/19	2021/09/18
Data acquisition card	Agilent	U2531A	TW53323507	2020/09/19	2021/09/18
Power Sensor	Agilent	U2021XA	MY5365004	2020/09/19	2021/09/18
Test Control Unit	Tonscend	JS0806-1	178060067	2020/06/20	2021/06/19
Automated filter bank	Tonscend	JS0806-F	19F8060177	2020/06/20	2021/06/19
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

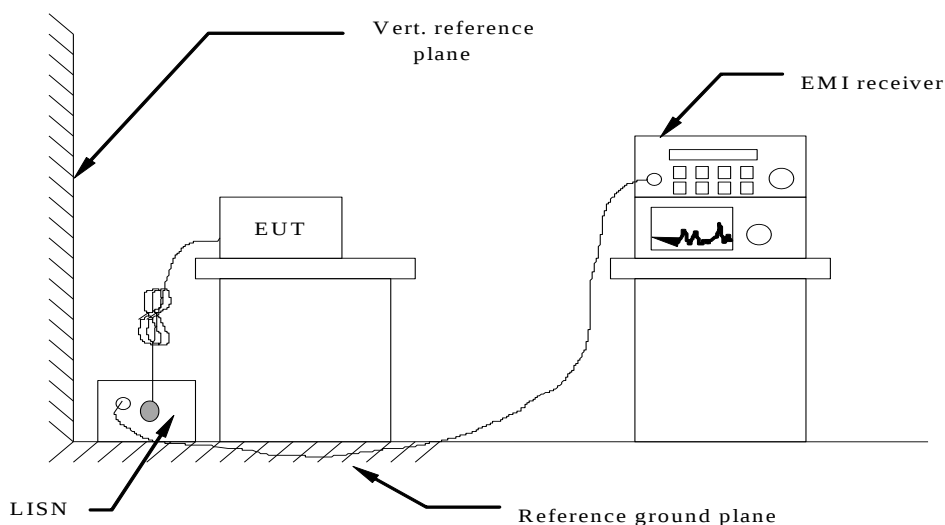

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
- 4 The EUT received DC 28V power, the adapter received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark: We measured Conducted Emission at 802.11b/802.11g/802.11n HT20/802.11n HT40 mode from 150 KHz to 30MHz in AC120V and the worst case was recorded.

Temperature	24.2°C	Humidity	54.2%
Test Engineer	Moon Tan	Configurations	IEEE 802.11g (MCH)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List												
NO	Frequency [MHz]	QP Reading [dBμV]	AVG Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG Result [dBμV]	QP Limit [dBμV]	AVG Limit [dBμV]	QP Margin [dB]	AVG Margin [dB]	Line	Remark
1	0.2040	43.80	40.25	10.06	53.86	50.31	63.45	53.45	9.59	3.14	L1	PASS
2	0.2490	43.67	30.19	10.02	53.69	40.21	61.79	51.79	8.10	11.58	L1	PASS
3	0.5370	35.55	22.38	10.06	45.61	32.44	56.00	46.00	10.39	13.56	L1	PASS
4	1.6620	35.32	19.08	10.13	45.45	29.21	56.00	46.00	10.55	16.79	L1	PASS
5	3.2280	30.09	11.87	10.31	40.40	22.18	56.00	46.00	15.60	23.82	L1	PASS
6	5.2395	33.39	16.19	10.49	43.88	26.68	60.00	50.00	16.12	23.32	L1	PASS


Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Test Graph


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

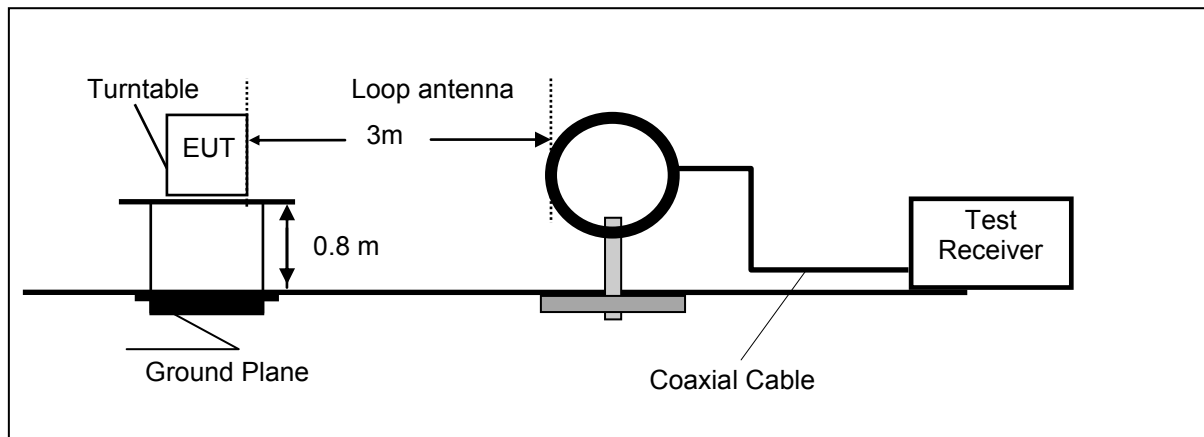

Frequency range 30MHz – 1000MHz

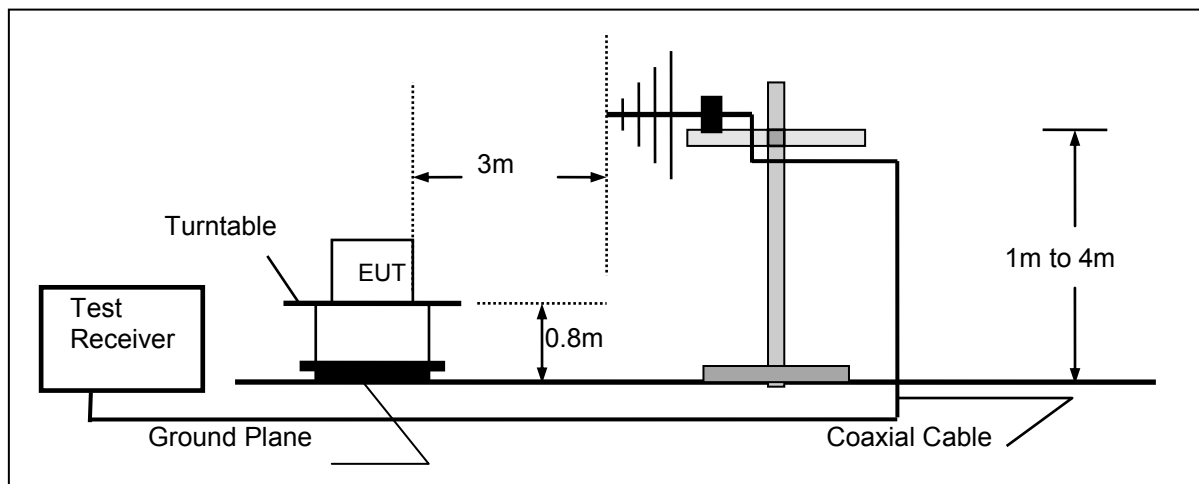

Frequency range above 1GHz-25GHz

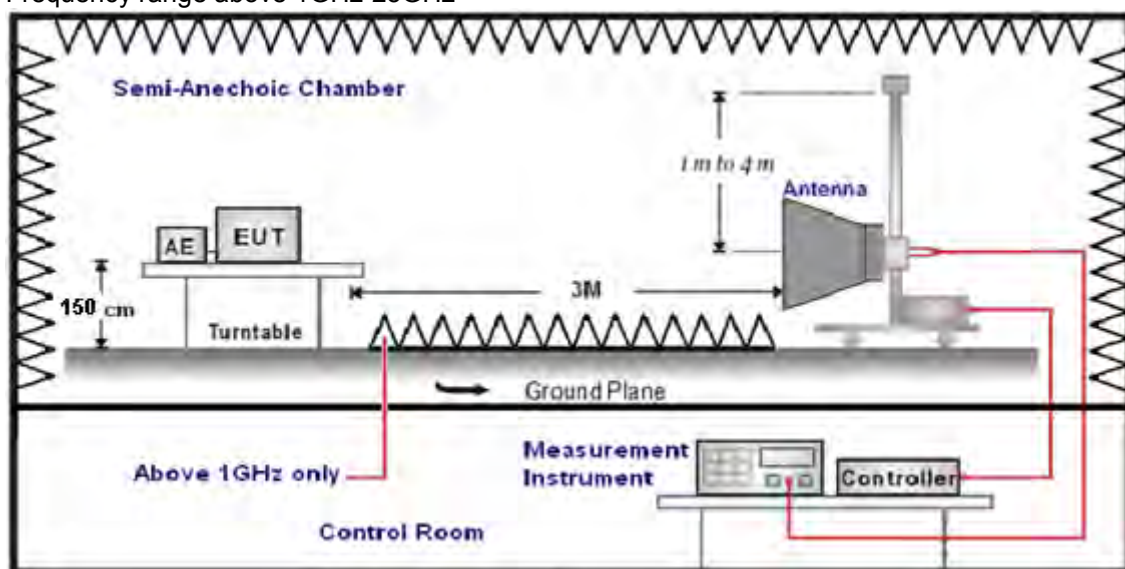

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 30MHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 30MHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = AF + CL - AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.


The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at 802.11b/802.11g/802.11n HT20/802.11n HT40 mode from 30 MHz to 25GHz in AC120V and the worst case was recorded.


Temperature	23.4°C	Humidity	54.5%
Test Engineer	Moon Tan	Configurations	IEEE 802.11g (MCH)

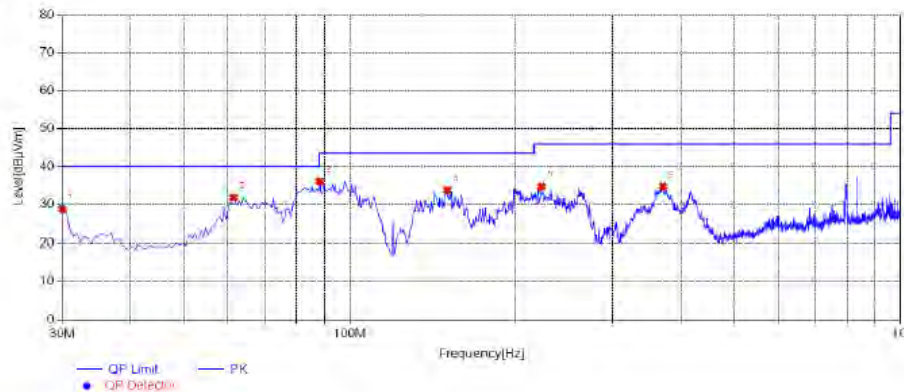For 30MHz-1GHz**Horizontal****Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30.0000	40.52	-11.70	28.82	40.00	11.18	100	358	PK	Horizontal	PASS
2	61.5250	40.70	-8.80	31.90	40.00	8.10	100	330	PK	Horizontal	PASS
3	88.2000	47.03	-10.88	36.15	43.50	7.35	100	285	PK	Horizontal	PASS
4	150.2800	46.52	-12.71	33.81	43.50	9.69	100	271	PK	Horizontal	PASS
5	223.0300	43.77	-8.97	34.80	46.00	11.20	100	197	PK	Horizontal	PASS
6	370.4700	40.45	-5.62	34.83	46.00	11.17	100	211	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

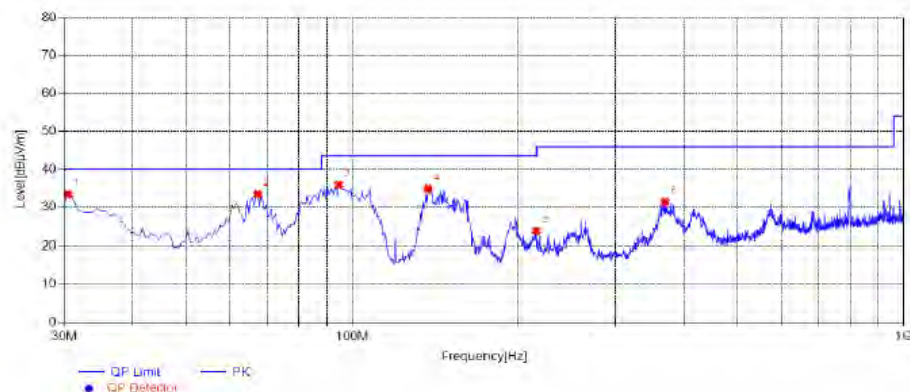Vertical**Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30.4850	44.75	-11.42	33.33	40.00	6.67	100	282	PK	Vertical	PASS
2	67.3450	42.88	-9.44	33.44	40.00	6.56	100	251	PK	Vertical	PASS
3	94.5050	45.33	-9.38	35.95	43.50	7.55	100	7	PK	Vertical	PASS
4	137.1850	47.05	-12.19	34.86	43.50	8.64	100	21	PK	Vertical	PASS
5	215.7550	33.06	-9.29	23.77	43.50	19.73	100	2	PK	Vertical	PASS
6	369.5000	37.12	-5.65	31.47	46.00	14.53	100	4	PK	Vertical	PASS

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 25GHz

IEEE 802.11b

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	50.03	32.44	30.25	7.95	60.17	74.00	-13.83	Peak	Horizontal
4824.00	35.28	32.44	30.25	7.95	45.42	54.00	-8.58	Average	Horizontal
4824.00	54.48	32.44	30.25	7.95	64.62	74.00	-9.38	Peak	Vertical
4824.00	34.62	32.44	30.25	7.95	44.76	54.00	-9.24	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.68	32.52	30.31	8.12	61.01	74.00	-12.99	Peak	Horizontal
4874.00	36.34	32.52	30.31	8.12	46.67	54.00	-7.33	Average	Horizontal
4874.00	52.25	32.52	30.31	8.12	62.58	74.00	-11.42	Peak	Vertical
4874.00	35.46	32.52	30.31	8.12	45.79	54.00	-8.21	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	50.96	32.68	30.27	7.88	61.25	74.00	-12.75	Peak	Horizontal
4924.00	36.50	32.68	30.27	7.88	46.79	54.00	-7.21	Average	Horizontal
4924.00	48.97	32.68	30.27	7.88	59.26	74.00	-14.74	Peak	Vertical
4924.00	31.58	32.68	30.27	7.88	41.87	54.00	-12.13	Average	Vertical

IEEE 802.11g

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	49.95	32.44	30.25	7.95	60.09	74.00	-13.91	Peak	Horizontal
4824.00	35.60	32.44	30.25	7.95	45.74	54.00	-8.26	Average	Horizontal
4824.00	54.16	32.44	30.25	7.95	64.30	74.00	-9.70	Peak	Vertical
4824.00	34.93	32.44	30.25	7.95	45.07	54.00	-8.93	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.70	32.52	30.31	8.12	60.03	74.00	-13.97	Peak	Horizontal
4874.00	37.36	32.52	30.31	8.12	47.69	54.00	-6.31	Average	Horizontal
4874.00	50.81	32.52	30.31	8.12	61.14	74.00	-12.86	Peak	Vertical
4874.00	36.71	32.52	30.31	8.12	47.04	54.00	-6.96	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	50.69	32.68	30.27	7.88	60.98	74.00	-13.02	Peak	Horizontal
4924.00	36.36	32.68	30.27	7.88	46.65	54.00	-7.35	Average	Horizontal
4924.00	48.71	32.68	30.27	7.88	59.00	74.00	-15.00	Peak	Vertical
4924.00	30.66	32.68	30.27	7.88	40.95	54.00	-13.05	Average	Vertical

IEEE802.11 n HT20

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	50.24	32.44	30.25	7.95	60.38	74.00	-13.62	Peak	Horizontal
4824.00	35.38	32.44	30.25	7.95	45.52	54.00	-8.48	Average	Horizontal
4824.00	53.33	32.44	30.25	7.95	63.47	74.00	-10.53	Peak	Vertical
4824.00	34.81	32.44	30.25	7.95	44.95	54.00	-9.05	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.91	32.52	30.31	8.12	60.24	74.00	-13.76	Peak	Horizontal
4874.00	36.26	32.52	30.31	8.12	46.59	54.00	-7.41	Average	Horizontal
4874.00	51.56	32.52	30.31	8.12	61.89	74.00	-12.11	Peak	Vertical
4874.00	35.04	32.52	30.31	8.12	45.37	54.00	-8.63	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	50.97	32.68	30.27	7.88	61.26	74.00	-12.74	Peak	Horizontal
4924.00	36.07	32.68	30.27	7.88	46.36	54.00	-7.64	Average	Horizontal
4924.00	48.61	32.68	30.27	7.88	58.90	74.00	-15.10	Peak	Vertical
4924.00	30.77	32.68	30.27	7.88	41.06	54.00	-12.94	Average	Vertical

IEEE802.11 n HT40

Channel 1 / 2422 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	49.49	32.44	30.25	7.95	59.63	74.00	-14.37	Peak	Horizontal
4844.00	35.44	32.44	30.25	7.95	45.58	54.00	-8.42	Average	Horizontal
4844.00	52.96	32.44	30.25	7.95	63.10	74.00	-10.90	Peak	Vertical
4844.00	34.82	32.44	30.25	7.95	44.96	54.00	-9.04	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.75	32.52	30.31	8.12	61.08	74.00	-12.92	Peak	Horizontal
4874.00	37.43	32.52	30.31	8.12	47.76	54.00	-6.24	Average	Horizontal
4874.00	51.45	32.52	30.31	8.12	61.78	74.00	-12.22	Peak	Vertical
4874.00	36.20	32.52	30.31	8.12	46.53	54.00	-7.47	Average	Vertical

Channel 11 / 2452 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	50.49	32.68	30.27	7.88	60.78	74.00	-13.22	Peak	Horizontal
4904.00	35.29	32.68	30.27	7.88	45.58	54.00	-8.42	Average	Horizontal
4904.00	50.38	32.68	30.27	7.88	60.67	74.00	-13.33	Peak	Vertical
4904.00	30.67	32.68	30.27	7.88	40.96	54.00	-13.04	Average	Vertical

IEEE802.11 ax HT20

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	51.21	32.44	30.25	7.95	61.35	74.00	-12.65	Peak	Horizontal
4824.00	35.39	32.44	30.25	7.95	45.53	54.00	-8.47	Average	Horizontal
4824.00	53.81	32.44	30.25	7.95	63.95	74.00	-10.05	Peak	Vertical
4824.00	34.96	32.44	30.25	7.95	45.10	54.00	-8.90	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.83	32.52	30.31	8.12	61.16	74.00	-12.84	Peak	Horizontal
4874.00	37.58	32.52	30.31	8.12	47.91	54.00	-6.09	Average	Horizontal
4874.00	51.17	32.52	30.31	8.12	61.50	74.00	-12.50	Peak	Vertical
4874.00	36.18	32.52	30.31	8.12	46.51	54.00	-7.49	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	50.51	32.68	30.27	7.88	60.80	74.00	-13.20	Peak	Horizontal
4924.00	36.32	32.68	30.27	7.88	46.61	54.00	-7.39	Average	Horizontal
4924.00	48.62	32.68	30.27	7.88	58.91	74.00	-15.09	Peak	Vertical
4924.00	32.48	32.68	30.27	7.88	42.77	54.00	-11.23	Average	Vertical

IEEE802.11 ax HT40

Channel 1 / 2422 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	51.29	32.44	30.25	7.95	61.43	74.00	-12.57	Peak	Horizontal
4844.00	35.73	32.44	30.25	7.95	45.87	54.00	-8.13	Average	Horizontal
4844.00	54.50	32.44	30.25	7.95	64.64	74.00	-9.36	Peak	Vertical
4844.00	35.80	32.44	30.25	7.95	45.94	54.00	-8.06	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.29	32.52	30.31	8.12	59.62	74.00	-14.38	Peak	Horizontal
4874.00	36.13	32.52	30.31	8.12	46.46	54.00	-7.54	Average	Horizontal
4874.00	52.32	32.52	30.31	8.12	62.65	74.00	-11.35	Peak	Vertical
4874.00	35.99	32.52	30.31	8.12	46.32	54.00	-7.68	Average	Vertical

Channel 11 / 2452 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	50.07	32.68	30.27	7.88	60.36	74.00	-13.64	Peak	Horizontal
4904.00	36.39	32.68	30.27	7.88	46.68	54.00	-7.32	Average	Horizontal
4904.00	49.83	32.68	30.27	7.88	60.12	74.00	-13.88	Peak	Vertical
4904.00	32.44	32.68	30.27	7.88	42.73	54.00	-11.27	Average	Vertical

NOTE: We measured Radiated Emission at Antenna 9 & Antenna 10& Antenna 11& Antenna 12 mode from 1GHz to 25GHz and the worst case was recorded.

4*4MIMO:

IEEE 802.11b

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	49.78	32.44	30.25	7.95	59.92	74.00	-14.08	Peak	Horizontal
4824.00	35.68	32.44	30.25	7.95	45.82	54.00	-8.18	Average	Horizontal
4824.00	54.23	32.44	30.25	7.95	64.37	74.00	-9.63	Peak	Vertical
4824.00	34.49	32.44	30.25	7.95	44.63	54.00	-9.37	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.89	32.52	30.31	8.12	60.22	74.00	-13.78	Peak	Horizontal
4874.00	37.51	32.52	30.31	8.12	47.84	54.00	-6.16	Average	Horizontal
4874.00	51.10	32.52	30.31	8.12	61.43	74.00	-12.57	Peak	Vertical
4874.00	35.86	32.52	30.31	8.12	46.19	54.00	-7.81	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.13	32.68	30.27	7.88	61.42	74.00	-12.58	Peak	Horizontal
4924.00	36.90	32.68	30.27	7.88	47.19	54.00	-6.81	Average	Horizontal
4924.00	48.91	32.68	30.27	7.88	59.20	74.00	-14.80	Peak	Vertical
4924.00	32.02	32.68	30.27	7.88	42.31	54.00	-11.69	Average	Vertical

IEEE 802.11g

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	50.47	32.44	30.25	7.95	60.61	74.00	-13.39	Peak	Horizontal
4824.00	36.03	32.44	30.25	7.95	46.17	54.00	-7.83	Average	Horizontal
4824.00	53.51	32.44	30.25	7.95	63.65	74.00	-10.35	Peak	Vertical
4824.00	34.95	32.44	30.25	7.95	45.09	54.00	-8.91	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.83	32.52	30.31	8.12	60.16	74.00	-13.84	Peak	Horizontal
4874.00	36.43	32.52	30.31	8.12	46.76	54.00	-7.24	Average	Horizontal
4874.00	52.39	32.52	30.31	8.12	62.72	74.00	-11.28	Peak	Vertical
4874.00	35.39	32.52	30.31	8.12	45.72	54.00	-8.28	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.91	32.68	30.27	7.88	62.20	74.00	-11.80	Peak	Horizontal
4924.00	35.99	32.68	30.27	7.88	46.28	54.00	-7.72	Average	Horizontal
4924.00	50.00	32.68	30.27	7.88	60.29	74.00	-13.71	Peak	Vertical
4924.00	31.02	32.68	30.27	7.88	41.31	54.00	-12.69	Average	Vertical

IEEE802.11 n HT20

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	49.42	32.44	30.25	7.95	59.56	74.00	-14.44	Peak	Horizontal
4824.00	36.35	32.44	30.25	7.95	46.49	54.00	-7.51	Average	Horizontal
4824.00	54.14	32.44	30.25	7.95	64.28	74.00	-9.72	Peak	Vertical
4824.00	34.57	32.44	30.25	7.95	44.71	54.00	-9.29	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.43	32.52	30.31	8.12	59.76	74.00	-14.24	Peak	Horizontal
4874.00	37.28	32.52	30.31	8.12	47.61	54.00	-6.39	Average	Horizontal
4874.00	52.62	32.52	30.31	8.12	62.95	74.00	-11.05	Peak	Vertical
4874.00	36.09	32.52	30.31	8.12	46.42	54.00	-7.58	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.77	32.68	30.27	7.88	62.06	74.00	-11.94	Peak	Horizontal
4924.00	35.52	32.68	30.27	7.88	45.81	54.00	-8.19	Average	Horizontal
4924.00	50.09	32.68	30.27	7.88	60.38	74.00	-13.62	Peak	Vertical
4924.00	32.34	32.68	30.27	7.88	42.63	54.00	-11.37	Average	Vertical

IEEE802.11 n HT40

Channel 1 / 2422 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	49.69	32.44	30.25	7.95	59.83	74.00	-14.17	Peak	Horizontal
4844.00	35.10	32.44	30.25	7.95	45.24	54.00	-8.76	Average	Horizontal
4844.00	54.23	32.44	30.25	7.95	64.37	74.00	-9.63	Peak	Vertical
4844.00	35.81	32.44	30.25	7.95	45.95	54.00	-8.05	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.31	32.52	30.31	8.12	60.64	74.00	-13.36	Peak	Horizontal
4874.00	37.63	32.52	30.31	8.12	47.96	54.00	-6.04	Average	Horizontal
4874.00	52.05	32.52	30.31	8.12	62.38	74.00	-11.62	Peak	Vertical
4874.00	35.68	32.52	30.31	8.12	46.01	54.00	-7.99	Average	Vertical

Channel 11 / 2452 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	51.74	32.68	30.27	7.88	62.03	74.00	-11.97	Peak	Horizontal
4904.00	36.75	32.68	30.27	7.88	47.04	54.00	-6.96	Average	Horizontal
4904.00	50.28	32.68	30.27	7.88	60.57	74.00	-13.43	Peak	Vertical
4904.00	32.09	32.68	30.27	7.88	42.38	54.00	-11.62	Average	Vertical

IEEE802.11 ax HT20

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	50.53	32.44	30.25	7.95	60.67	74.00	-13.33	Peak	Horizontal
4824.00	36.27	32.44	30.25	7.95	46.41	54.00	-7.59	Average	Horizontal
4824.00	54.15	32.44	30.25	7.95	64.29	74.00	-9.71	Peak	Vertical
4824.00	35.53	32.44	30.25	7.95	45.67	54.00	-8.33	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.53	32.52	30.31	8.12	60.86	74.00	-13.14	Peak	Horizontal
4874.00	37.39	32.52	30.31	8.12	47.72	54.00	-6.28	Average	Horizontal
4874.00	51.77	32.52	30.31	8.12	62.10	74.00	-11.90	Peak	Vertical
4874.00	36.36	32.52	30.31	8.12	46.69	54.00	-7.31	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	52.00	32.68	30.27	7.88	62.29	74.00	-11.71	Peak	Horizontal
4924.00	35.80	32.68	30.27	7.88	46.09	54.00	-7.91	Average	Horizontal
4924.00	49.12	32.68	30.27	7.88	59.41	74.00	-14.59	Peak	Vertical
4924.00	32.30	32.68	30.27	7.88	42.59	54.00	-11.41	Average	Vertical

IEEE802.11 ax HT40

Channel 1 / 2422 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	49.82	32.44	30.25	7.95	59.96	74.00	-14.04	Peak	Horizontal
4844.00	36.17	32.44	30.25	7.95	46.31	54.00	-7.69	Average	Horizontal
4844.00	54.14	32.44	30.25	7.95	64.28	74.00	-9.72	Peak	Vertical
4844.00	34.77	32.44	30.25	7.95	44.91	54.00	-9.09	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.69	32.52	30.31	8.12	60.02	74.00	-13.98	Peak	Horizontal
4874.00	36.83	32.52	30.31	8.12	47.16	54.00	-6.84	Average	Horizontal
4874.00	50.96	32.52	30.31	8.12	61.29	74.00	-12.71	Peak	Vertical
4874.00	35.72	32.52	30.31	8.12	46.05	54.00	-7.95	Average	Vertical

Channel 11 / 2452 MHz


Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	51.84	32.68	30.27	7.88	62.13	74.00	-11.87	Peak	Horizontal
4904.00	36.14	32.68	30.27	7.88	46.43	54.00	-7.57	Average	Horizontal
4904.00	49.44	32.68	30.27	7.88	59.73	74.00	-14.27	Peak	Vertical
4904.00	31.39	32.68	30.27	7.88	41.68	54.00	-12.32	Average	Vertical

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2. and Average conducted output power, 9.2.3.1.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple detector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Temperature	24.2°C	Humidity	54.9%
Test Engineer	Moon Tan	Configurations	IEEE 802.11b/g/n

Antenna 9:

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	15.60	12.32	30.00	Pass
	06	15.61	12.29		
	11	15.97	12.51		
802.11g	01	15.58	12.95	30.00	Pass
	06	15.31	12.38		
	11	15.36	12.82		
802.11n(HT20)	01	13.70	9.74	30.00	Pass
	06	13.31	9.25		
	11	13.36	9.11		
802.11n(HT40)	03	13.50	8.02	30.00	Pass
	06	13.02	8.57		
	09	13.67	8.88		
802.11ax(HT20)	01	13.92	8.80	30.00	Pass
	06	13.44	8.14		
	11	13.99	8.85		
802.11ax(HT40)	03	13.15	8.84	30.00	Pass
	06	13.75	8.39		
	09	13.33	8.77		

Antenna 10:

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	15.10	12.18	30.00	Pass
	06	15.09	12.59		
	11	15.88	12.96		
802.11g	01	15.93	12.34	30.00	Pass
	06	15.47	12.16		
	11	15.30	12.04		
802.11n(HT20)	01	13.02	9.48	30.00	Pass
	06	13.78	9.55		
	11	13.05	9.77		
802.11n(HT40)	03	13.32	8.93	30.00	Pass
	06	13.63	8.54		
	09	13.13	8.00		
802.11ax(HT20)	01	13.99	8.00	30.00	Pass
	06	13.35	8.52		
	11	13.80	8.73		
802.11ax(HT40)	03	13.26	8.42	30.00	Pass
	06	13.42	8.87		
	09	13.91	8.81		

Antenna 11:

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	15.28	12.52	30.00	Pass
	06	15.41	12.76		
	11	15.97	12.55		
802.11g	01	15.07	12.44	30.00	Pass
	06	15.40	12.77		
	11	15.91	12.57		
802.11n(HT20)	01	13.63	9.77	30.00	Pass
	06	13.05	9.23		
	11	13.25	9.20		
802.11n(HT40)	03	13.71	8.24	30.00	Pass
	06	13.98	8.11		
	09	13.19	8.54		
802.11ax(HT20)	01	13.62	8.10	30.00	Pass
	06	13.25	8.97		
	11	13.93	8.21		
802.11ax(HT40)	03	13.26	8.01	30.00	Pass
	06	13.65	8.71		
	09	13.77	8.18		

Antenna 12:

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	15.25	12.69	30.00	Pass
	06	15.17	12.23		
	11	15.99	12.92		
802.11g	01	15.64	12.44	30.00	Pass
	06	15.86	12.04		
	11	15.24	12.36		
802.11n(HT20)	01	13.09	9.28	30.00	Pass
	06	13.41	9.80		
	11	13.54	9.06		
802.11n(HT40)	03	13.95	8.87	30.00	Pass
	06	13.94	8.65		
	09	13.14	8.52		
802.11ax(HT20)	01	13.78	8.39	30.00	Pass
	06	13.59	8.90		
	11	13.95	8.82		
802.11ax(HT40)	03	13.17	8.69	30.00	Pass
	06	13.14	8.13		
	09	13.13	8.76		

Note: 1.The test results including the cable lose.


Duty cycle used in all test items: 100%

MIMO*4

Type	Channel	Peak Output power ANT9 (dBm)	Peak Output power ANT10 (dBm)	Peak Output power ANT11 (dBm)	Peak Output power ANT12 (dBm)	Peak Output power Total (dBm)	Limit (dBm)	Result
802.11n (HT20)	01	13.70	13.02	13.63	13.09	19.39	30.00	Pass
	06	13.31	13.78	13.05	13.41	19.42		
	11	13.36	13.05	13.25	13.54	19.32		
802.11n (HT40)	03	13.50	13.32	13.71	13.95	19.65	30.00	Pass
	06	13.02	13.63	13.98	13.94	19.68		
	09	13.67	13.13	13.19	13.14	19.31		
802.11ax (HT20)	01	13.92	13.99	13.62	13.78	19.85	30.00	Pass
	06	13.44	13.35	13.25	13.59	19.43		
	11	13.99	13.8	13.93	13.95	19.94		
802.11ax (HT40)	03	13.15	13.26	13.26	13.17	19.23	30.00	Pass
	06	13.75	13.42	13.65	13.14	19.52		
	09	13.33	13.91	13.77	13.13	19.57		

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

Temperature	24.2°C	Humidity	54.9%
Test Engineer	Moon Tan	Configurations	IEEE 802.11b/g/n

Antenna 9:

Type	Channel	Power Spectral Density (dBm/10KHz)	RBW factor (dB)	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-1.85	5.23	-7.08	8.00	Pass
	06	-1.25	5.23	-6.48		
	11	0.72	5.23	-4.51		
802.11g	01	0.10	5.23	-5.13	8.00	Pass
	06	-0.47	5.23	-5.70		
	11	-0.55	5.23	-5.78		
802.11n(HT20)	01	-6.82	5.23	-12.05	8.00	Pass
	06	-6.36	5.23	-11.59		
	11	-6.14	5.23	-11.37		
802.11n(HT40)	03	-8.16	5.23	-13.39	8.00	Pass
	06	-7.46	5.23	-12.69		
	09	-6.29	5.23	-11.52		
802.11ax(HT20)	01	-6.24	5.23	-11.47	8.00	Pass
	06	-6.27	5.23	-11.50		
	11	-6.47	5.23	-11.70		
802.11ax(HT40)	03	-8.71	5.23	-13.94	8.00	Pass
	06	-9.58	5.23	-14.81		
	09	-9.66	5.23	-14.89		

Antenna 10:

Type	Channel	Power Spectral Density (dBm/10KHz)	RBW factor (dB)	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	1.38	5.23	-3.85	8.00	Pass
	06	-0.40	5.23	-5.63		
	11	0.32	5.23	-4.91		
802.11g	01	-1.59	5.23	-6.82	8.00	Pass
	06	-0.73	5.23	-5.96		
	11	-1.46	5.23	-6.69		
802.11n(HT20)	01	-4.50	5.23	-9.73	8.00	Pass
	06	-4.88	5.23	-10.11		
	11	-6.26	5.23	-11.49		
802.11n(HT40)	03	-8.94	5.23	-14.17	8.00	Pass
	06	-8.68	5.23	-13.91		
	09	-8.73	5.23	-13.96		
802.11ax(HT20)	01	-7.40	5.23	-12.63	8.00	Pass
	06	-7.63	5.23	-12.86		
	11	-7.12	5.23	-12.35		
802.11ax(HT40)	03	-10.05	5.23	-15.28	8.00	Pass
	06	-9.91	5.23	-15.14		
	09	-9.49	5.23	-14.72		

Antenna 11:

Type	Channel	Power Spectral Density (dBm/10KHz)	RBW factor (dB)	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-1.90	5.23	-7.13	8.00	Pass
	06	-2.45	5.23	-7.68		
	11	-2.24	5.23	-7.47		
802.11g	01	-0.85	5.23	-6.08	8.00	Pass
	06	-1.59	5.23	-6.82		
	11	-0.88	5.23	-6.11		
802.11n(HT20)	01	-6.66	5.23	-11.89	8.00	Pass
	06	-6.69	5.23	-11.92		
	11	-6.52	5.23	-11.75		
802.11n(HT40)	03	-8.65	5.23	-13.88	8.00	Pass
	06	-8.38	5.23	-13.61		
	09	-8.92	5.23	-14.15		
802.11ax(HT20)	01	-7.66	5.23	-12.89	8.00	Pass
	06	-7.51	5.23	-12.74		
	11	-7.37	5.23	-12.6		
802.11ax(HT40)	03	-9.74	5.23	-14.97	8.00	Pass
	06	-9.70	5.23	-14.93		
	09	-9.09	5.23	-14.32		

Antenna 12:

Type	Channel	Power Spectral Density (dBm/10KHz)	RBW factor (dB)	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	1.51	5.23	-3.72	8.00	Pass
	06	-1.53	5.23	-6.76		
	11	-1.90	5.23	-7.13		
802.11g	01	-5.10	5.23	-10.33	8.00	Pass
	06	-6.05	5.23	-11.28		
	11	-5.79	5.23	-11.02		
802.11n(HT20)	01	-6.72	5.23	-11.95	8.00	Pass
	06	-6.41	5.23	-11.64		
	11	-6.35	5.23	-11.58		
802.11n(HT40)	03	-9.00	5.23	-14.23	8.00	Pass
	06	-8.68	5.23	-13.91		
	09	-7.68	5.23	-12.91		
802.11ax(HT20)	01	-7.38	5.23	-12.61	8.00	Pass
	06	-7.18	5.23	-12.41		
	11	-7.39	5.23	-12.62		
802.11ax(HT40)	03	-10.56	5.23	-15.79	8.00	Pass
	06	-9.19	5.23	-14.42		
	09	-9.97	5.23	-15.20		

MIMO*4

Type	Channel	Power Spectral Density ANT9 (dBm/3KHz)	Power Spectral Density ANT10 (dBm/3KHz)	Power Spectral Density ANT11 (dBm/3KHz)	Power Spectral Density ANT12 (dBm/3KHz)	Power Spectral Density Total (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11n(HT20)	01	-12.05	-9.73	-11.89	-11.95	-5.27	5.98	Pass
	06	-11.59	-10.11	-11.92	-11.64	-5.23		
	11	-11.37	-11.49	-11.75	-11.58	-5.52		
802.11n(HT40)	03	-13.39	-14.17	-13.88	-14.23	-7.88	5.98	Pass
	06	-12.69	-13.91	-13.61	-13.91	-7.48		
	09	-11.52	-13.96	-14.15	-12.91	-6.98		
802.11ax(HT20)	01	-11.47	-12.63	-12.89	-12.61	-6.34	5.98	Pass
	06	-11.50	-12.86	-12.74	-12.41	-6.32		
	11	-11.70	-12.35	-12.60	-12.62	-6.28		
802.11ax(HT40)	03	-13.94	-15.28	-14.97	-15.79	-8.92	5.98	Pass
	06	-14.81	-15.14	-14.93	-14.42	-8.80		
	09	-14.89	-14.72	-14.32	-15.2	-8.75		


Remark:


The Directional Gain= Gain of individual transmit antennas (dBi) + Array gain;

Array gain = 10 log (Nant), where Nant is the number of transmit antennas


Directional Gain=8.02 dBi

Antenna 9:

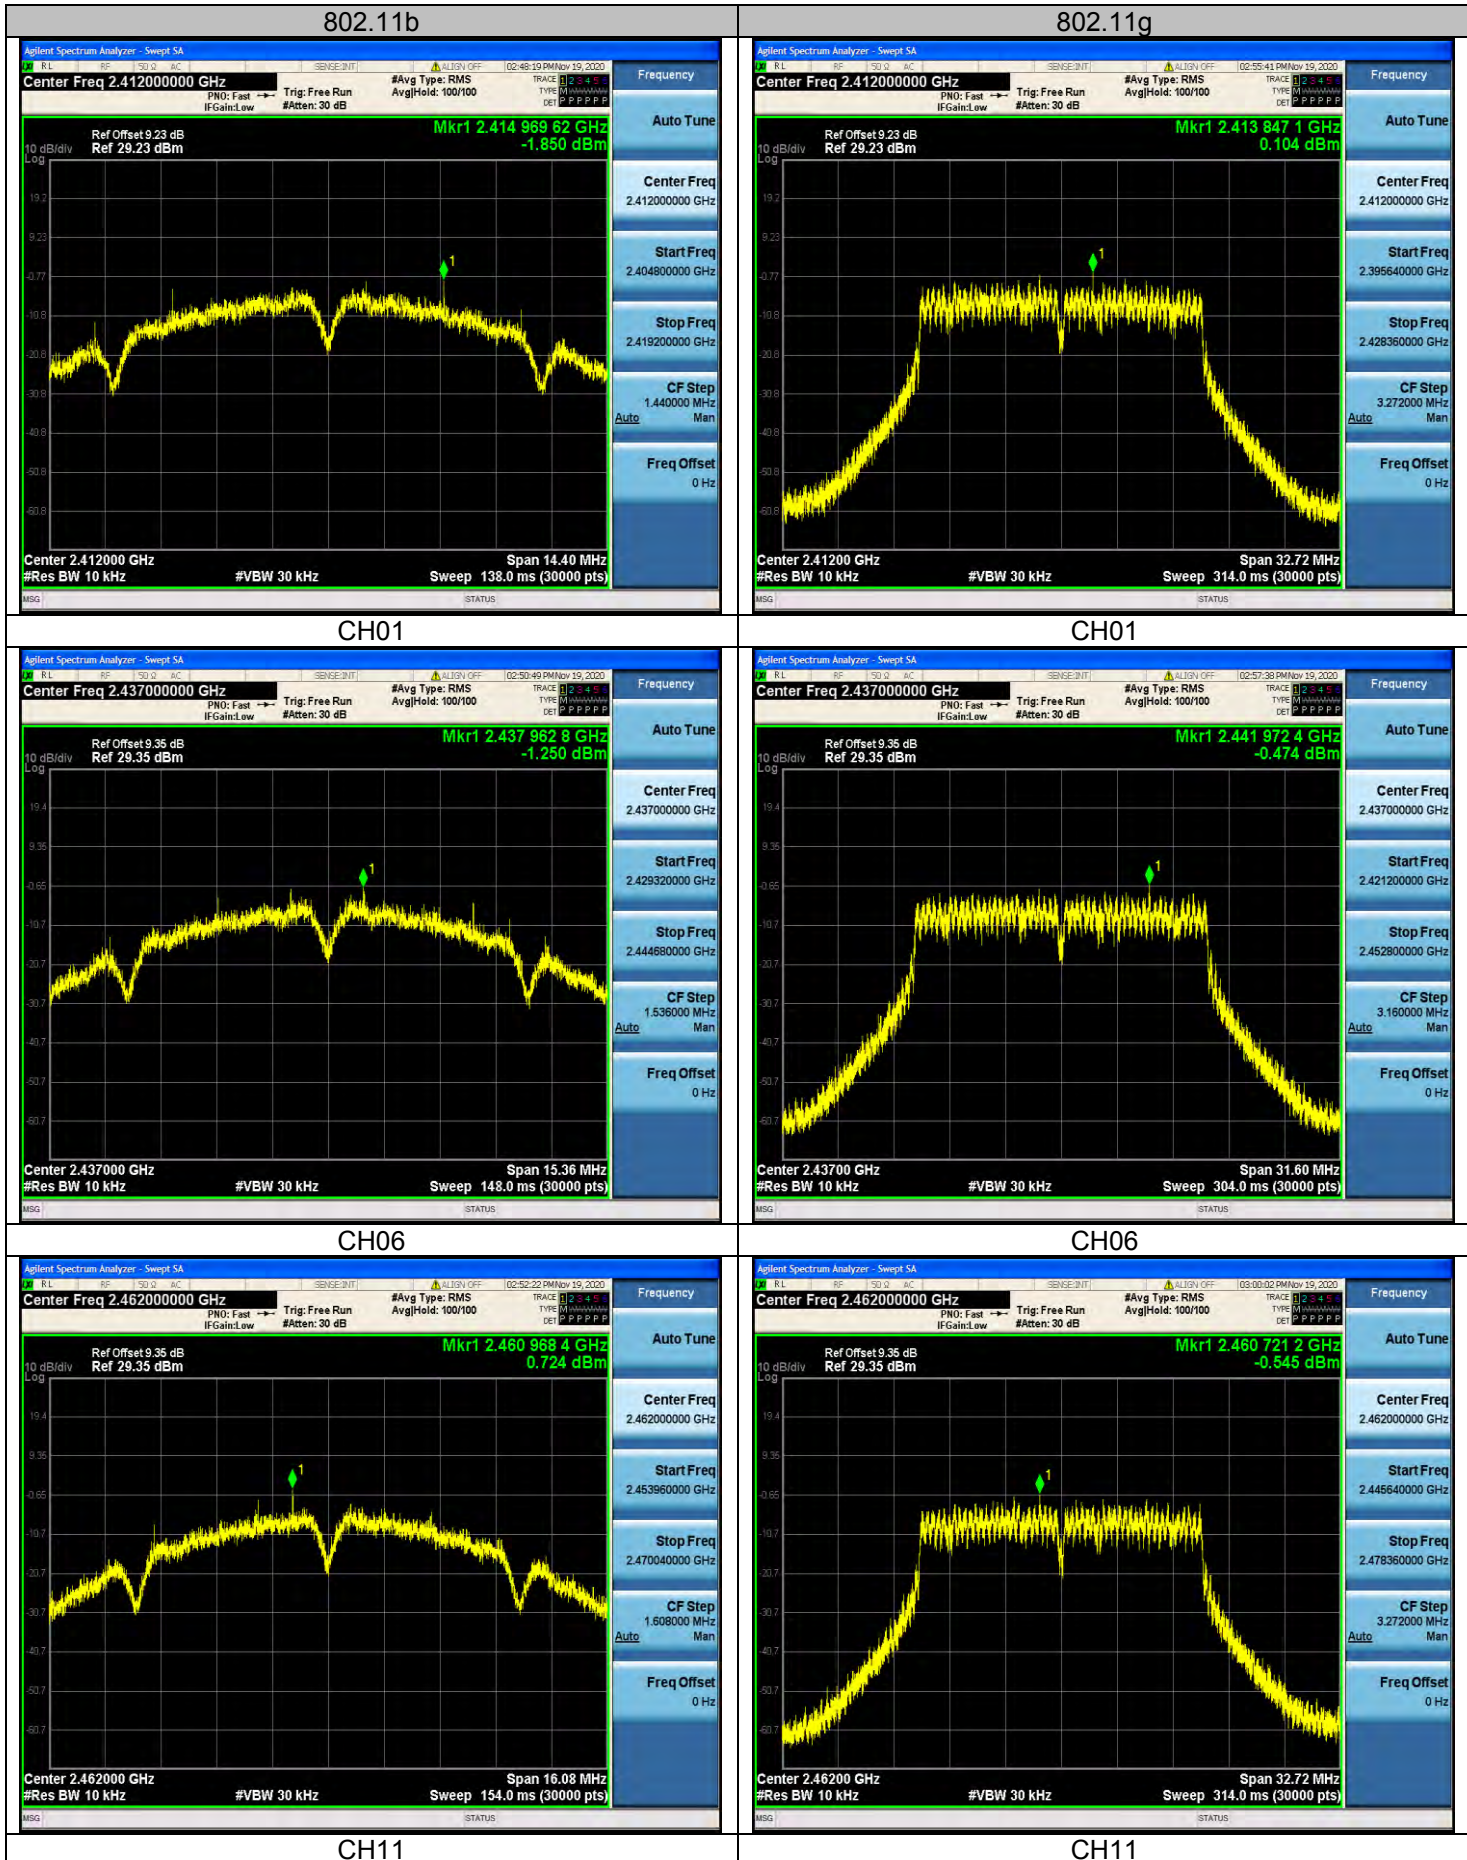


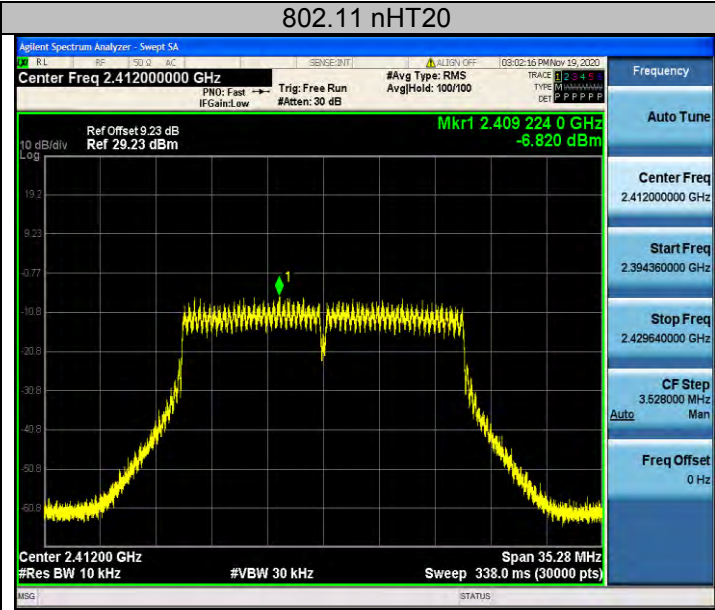


CH01

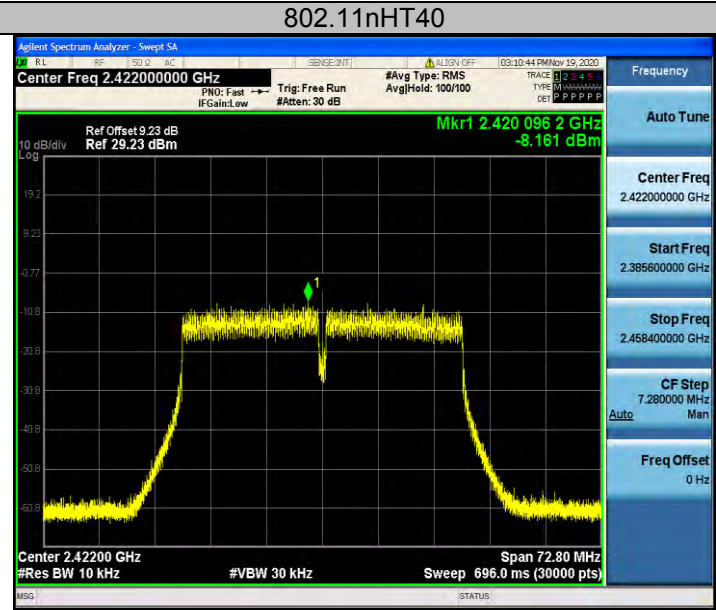


CH03

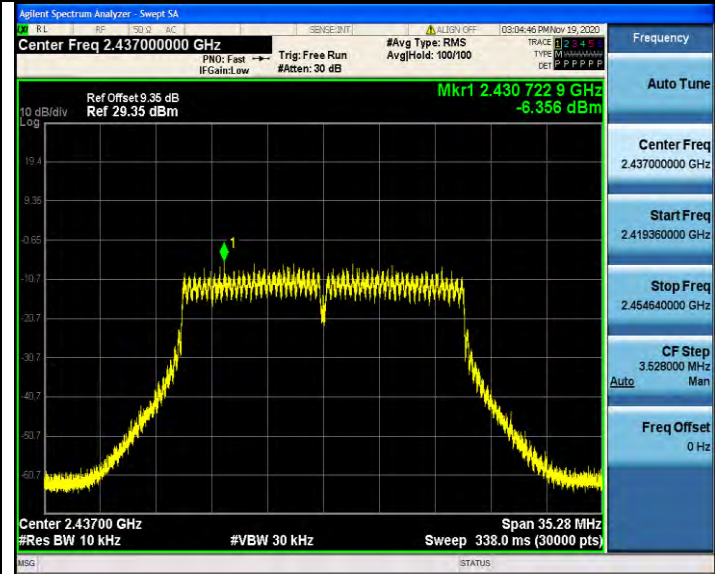


CH06

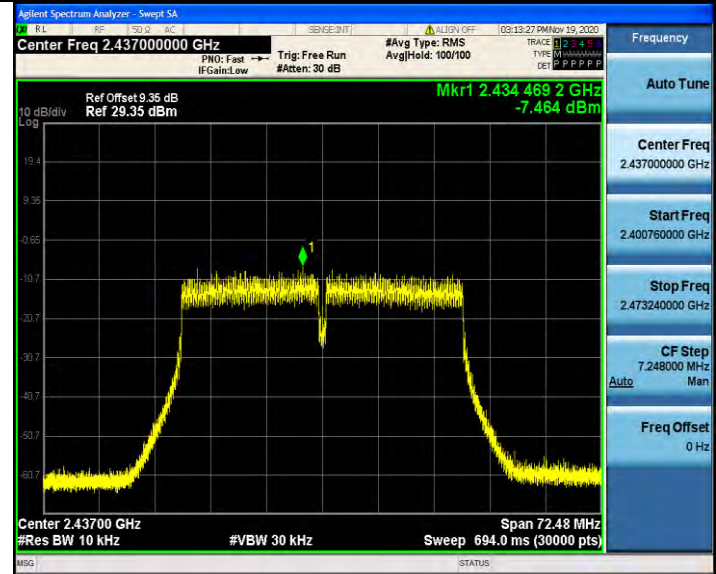


CH06

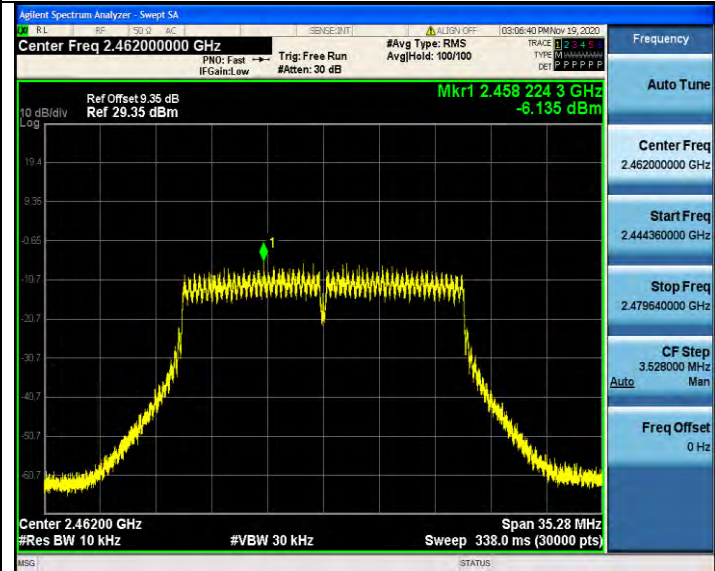


CH11

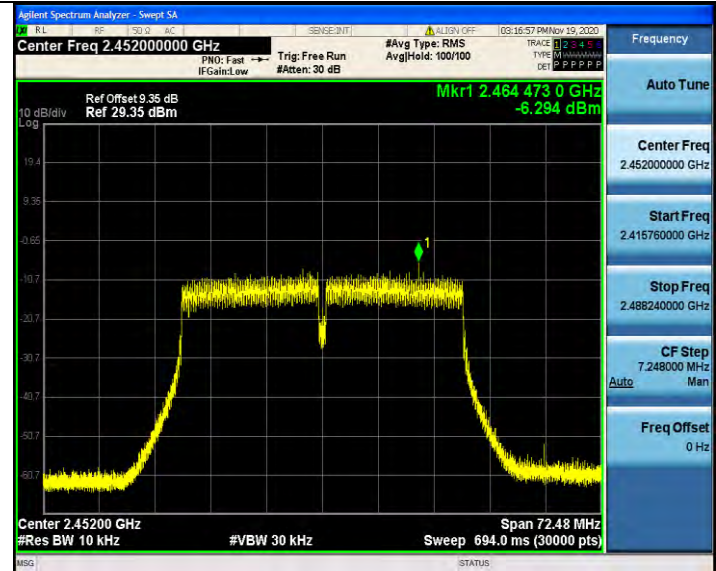


CH09

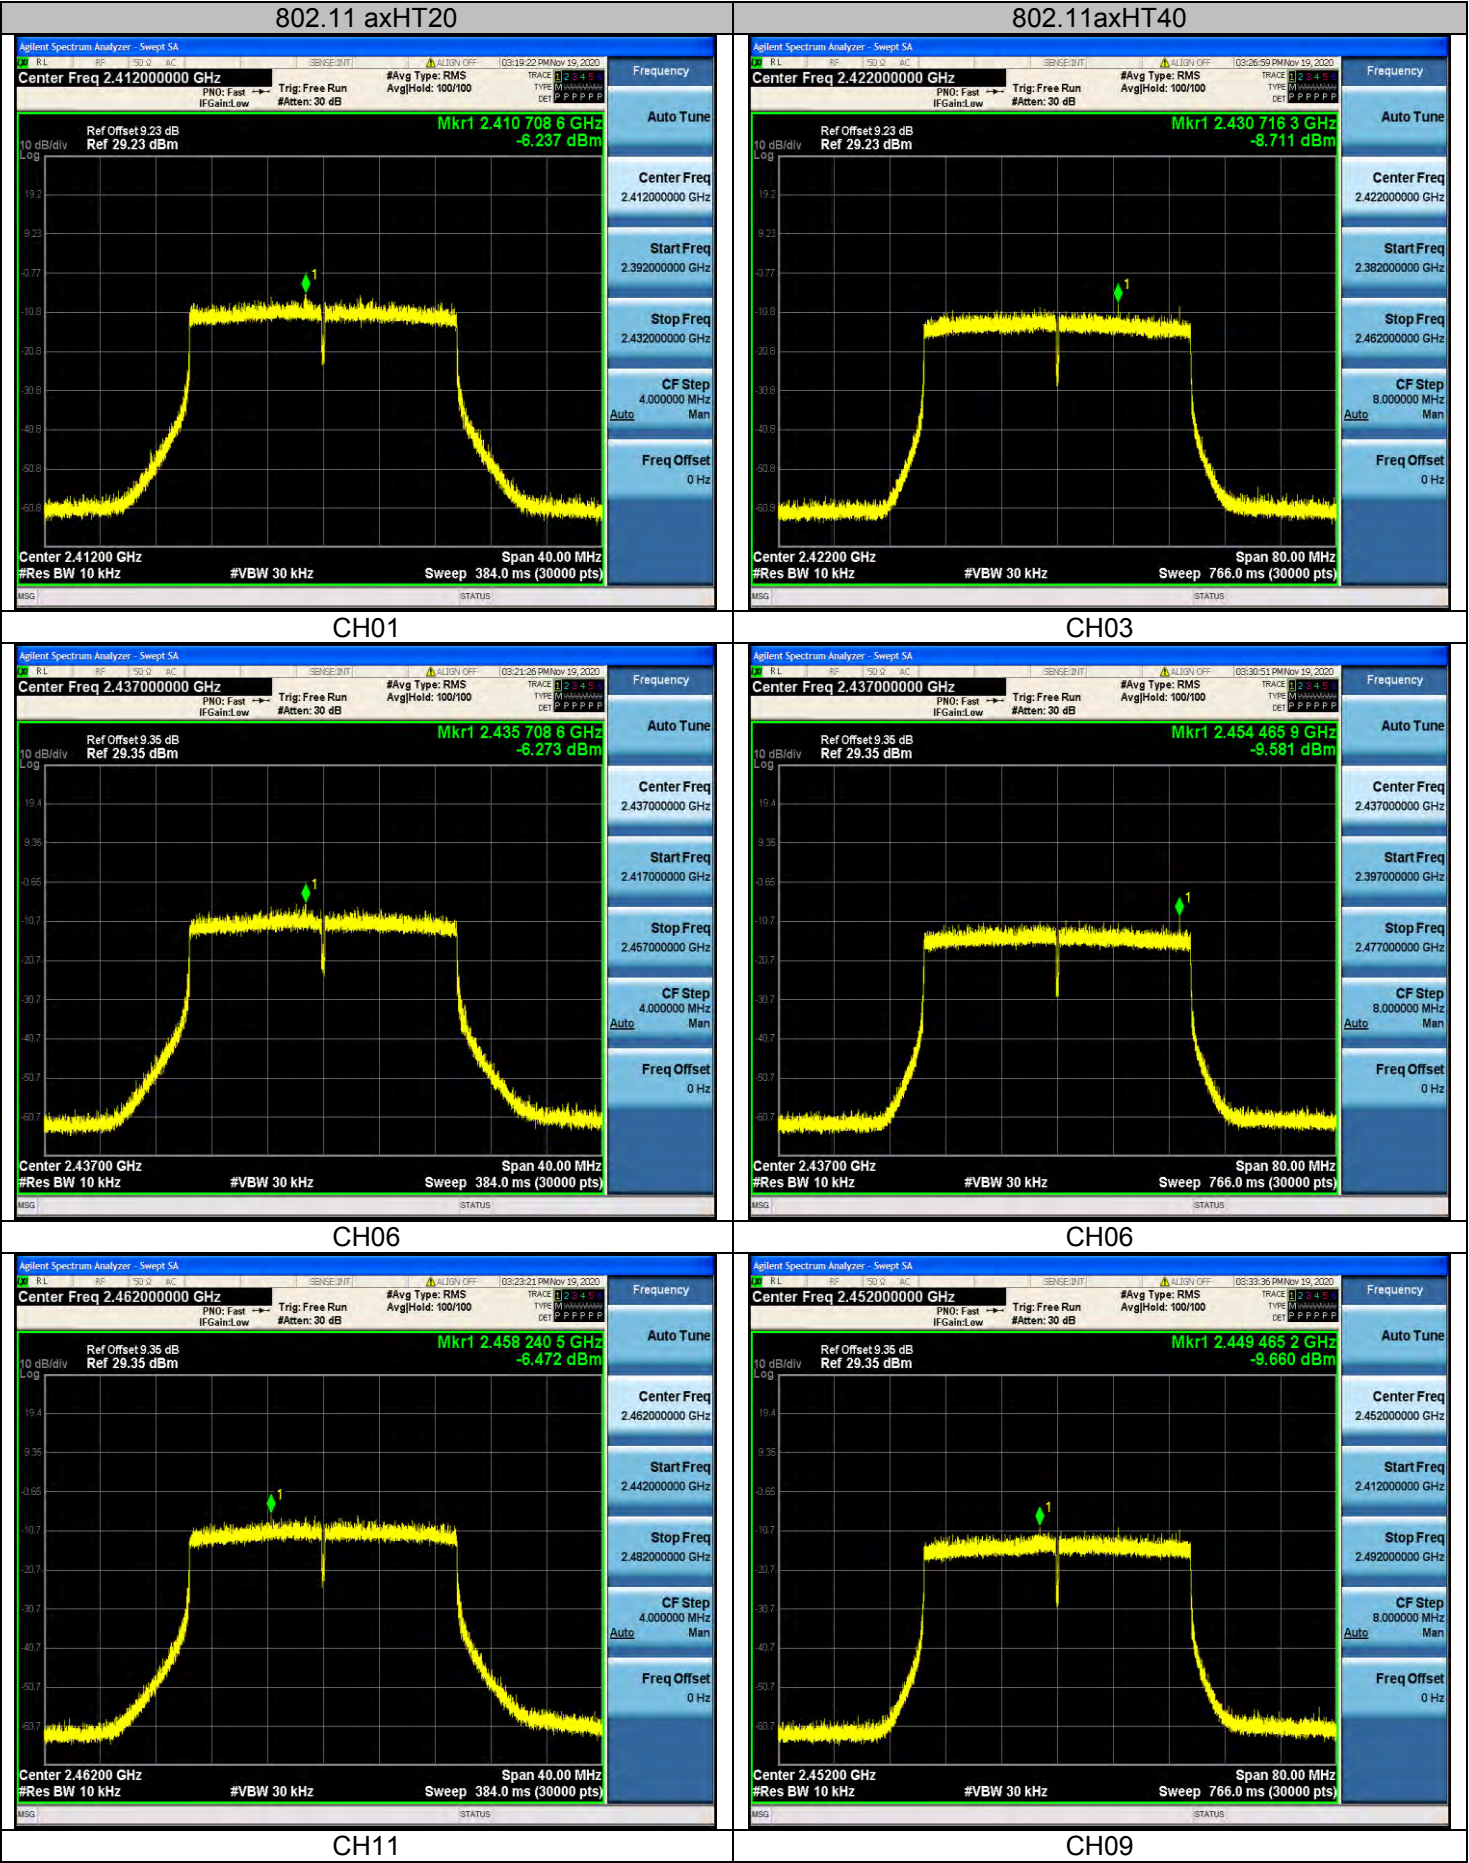

Antenna 10:

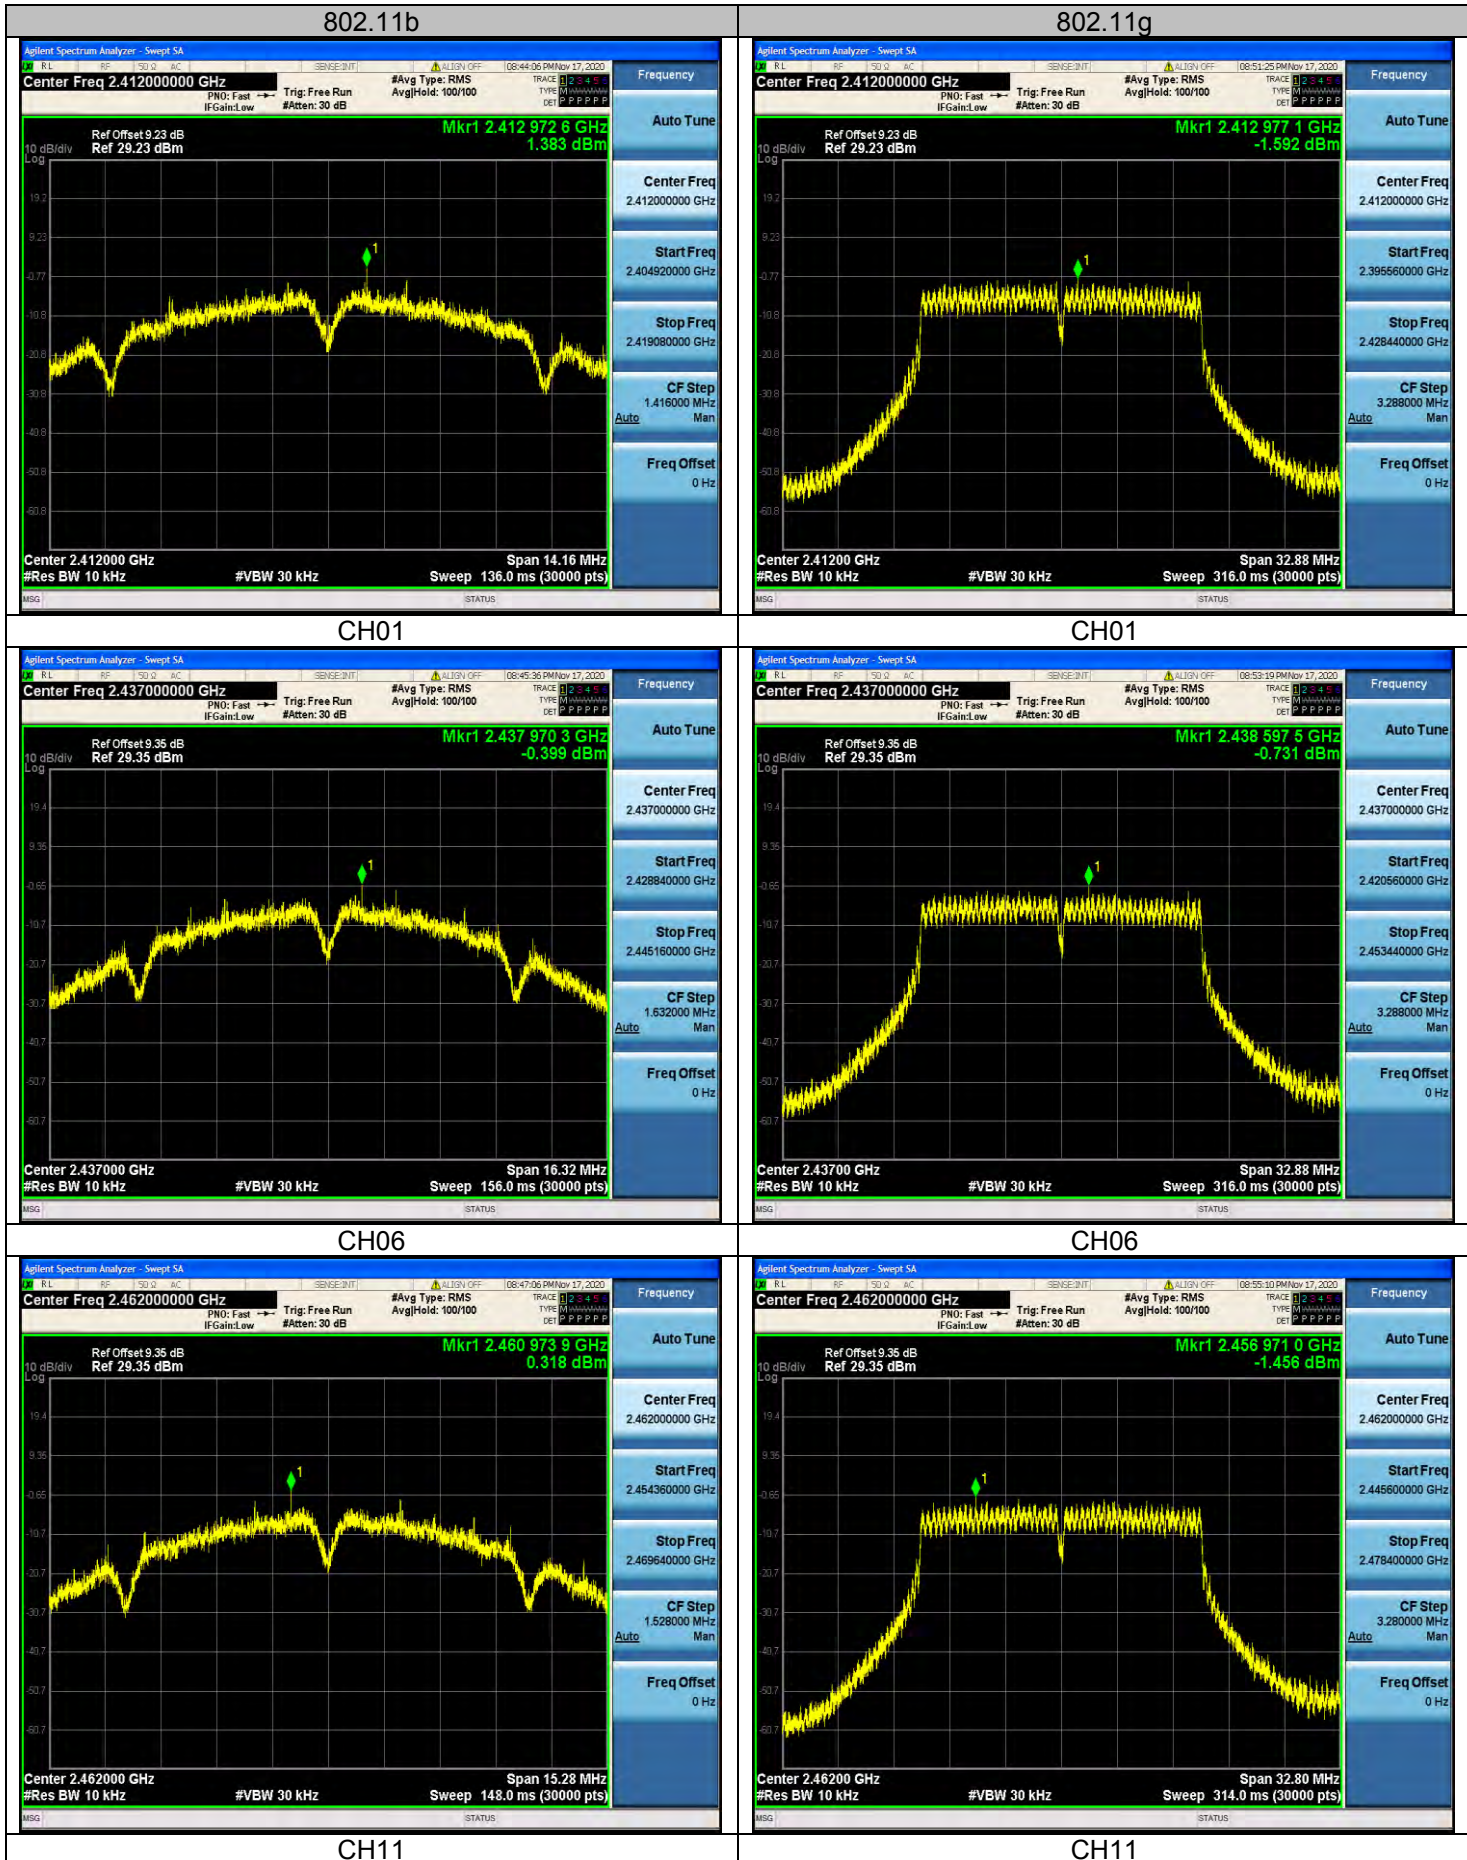


802.11 nHT20

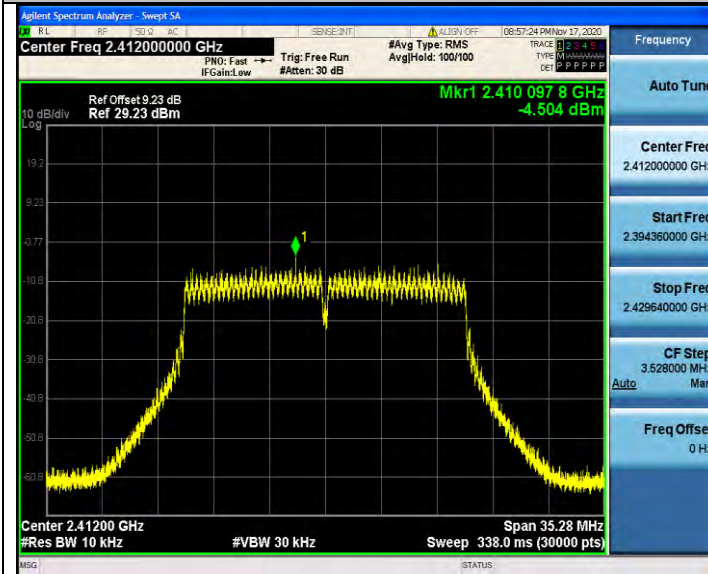


CH01


802.11nHT40

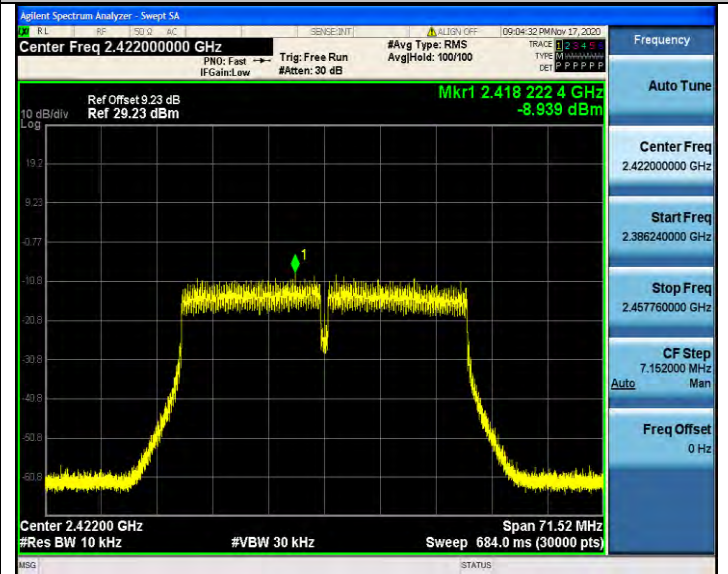


CH03

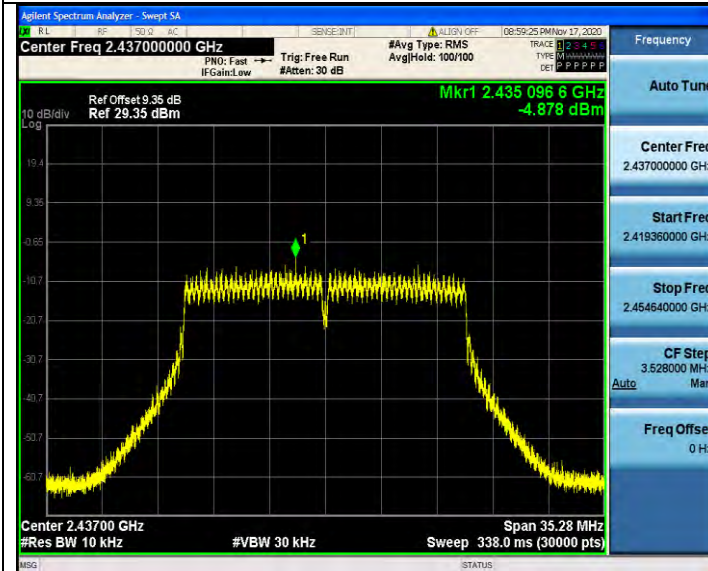


CH06

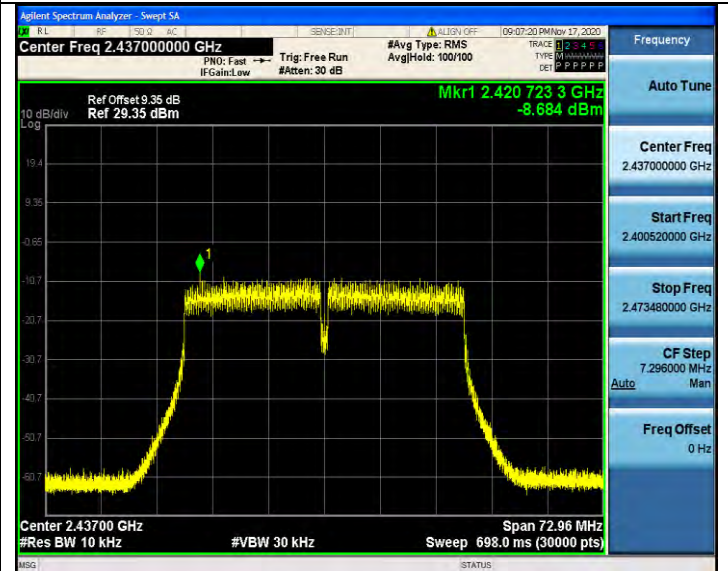


CH06

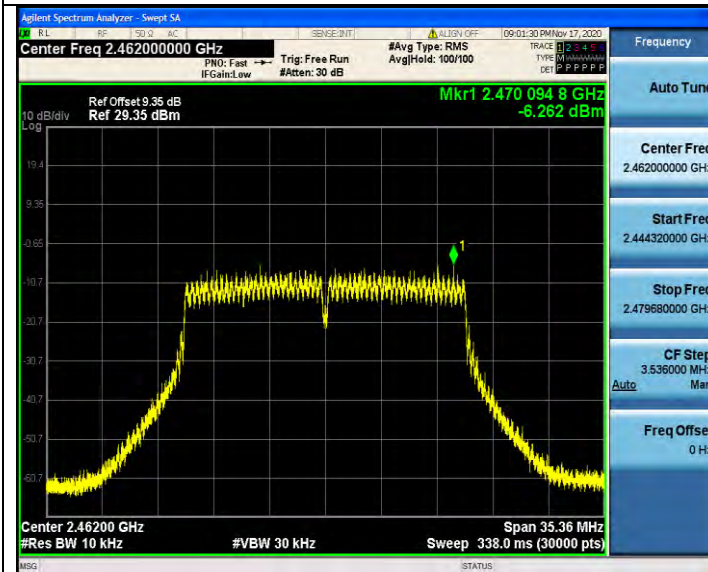


CH11

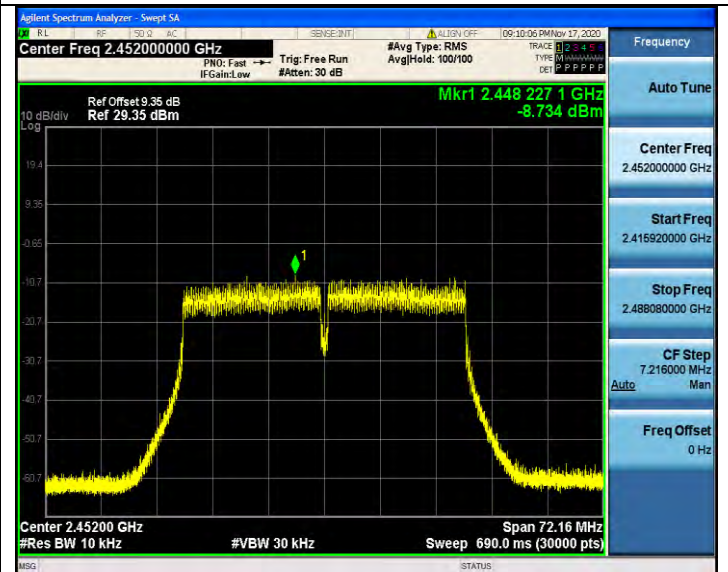


CH09

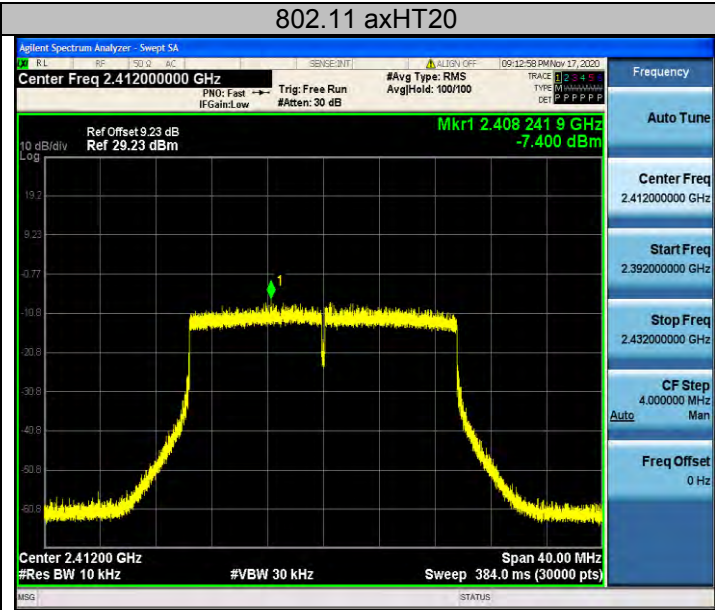


CH01

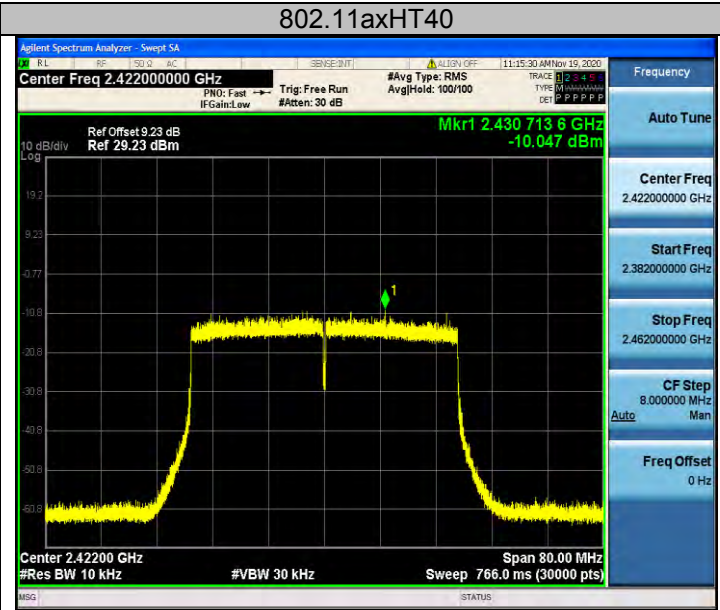


CH03

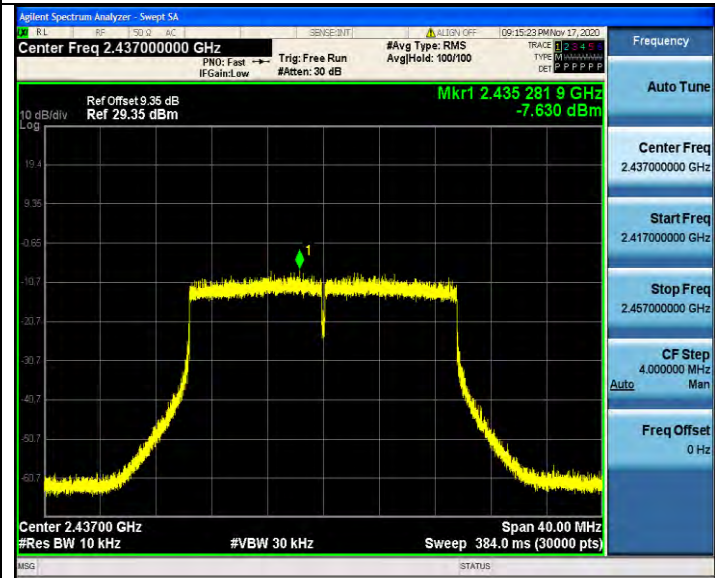


CH06

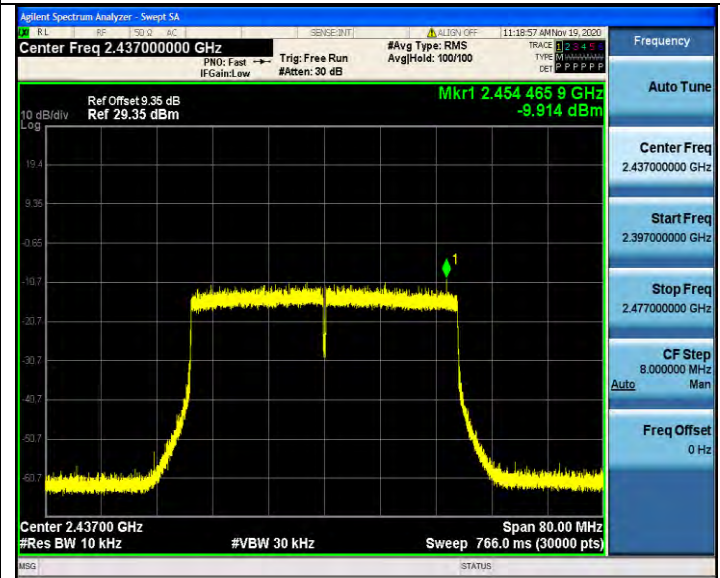

CH06

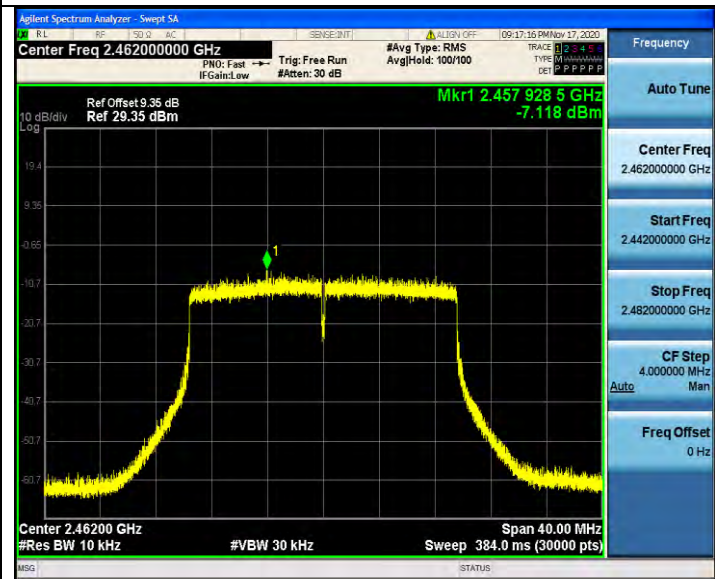


CH11

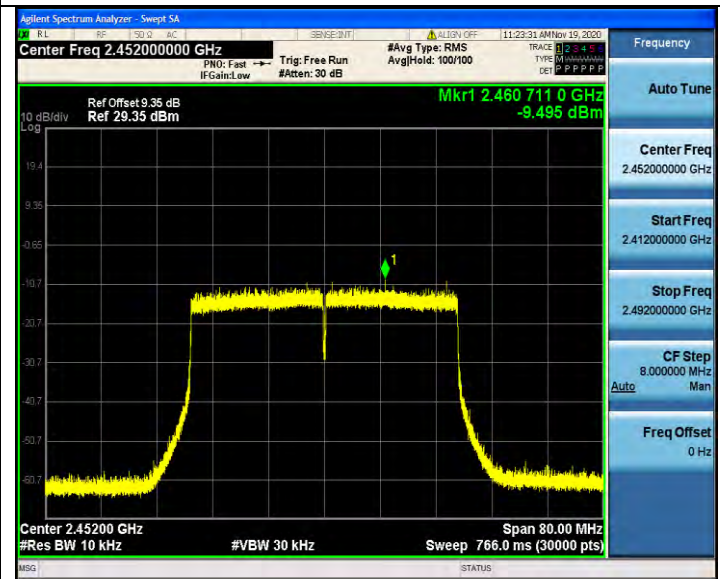


CH09

Antenna 11:

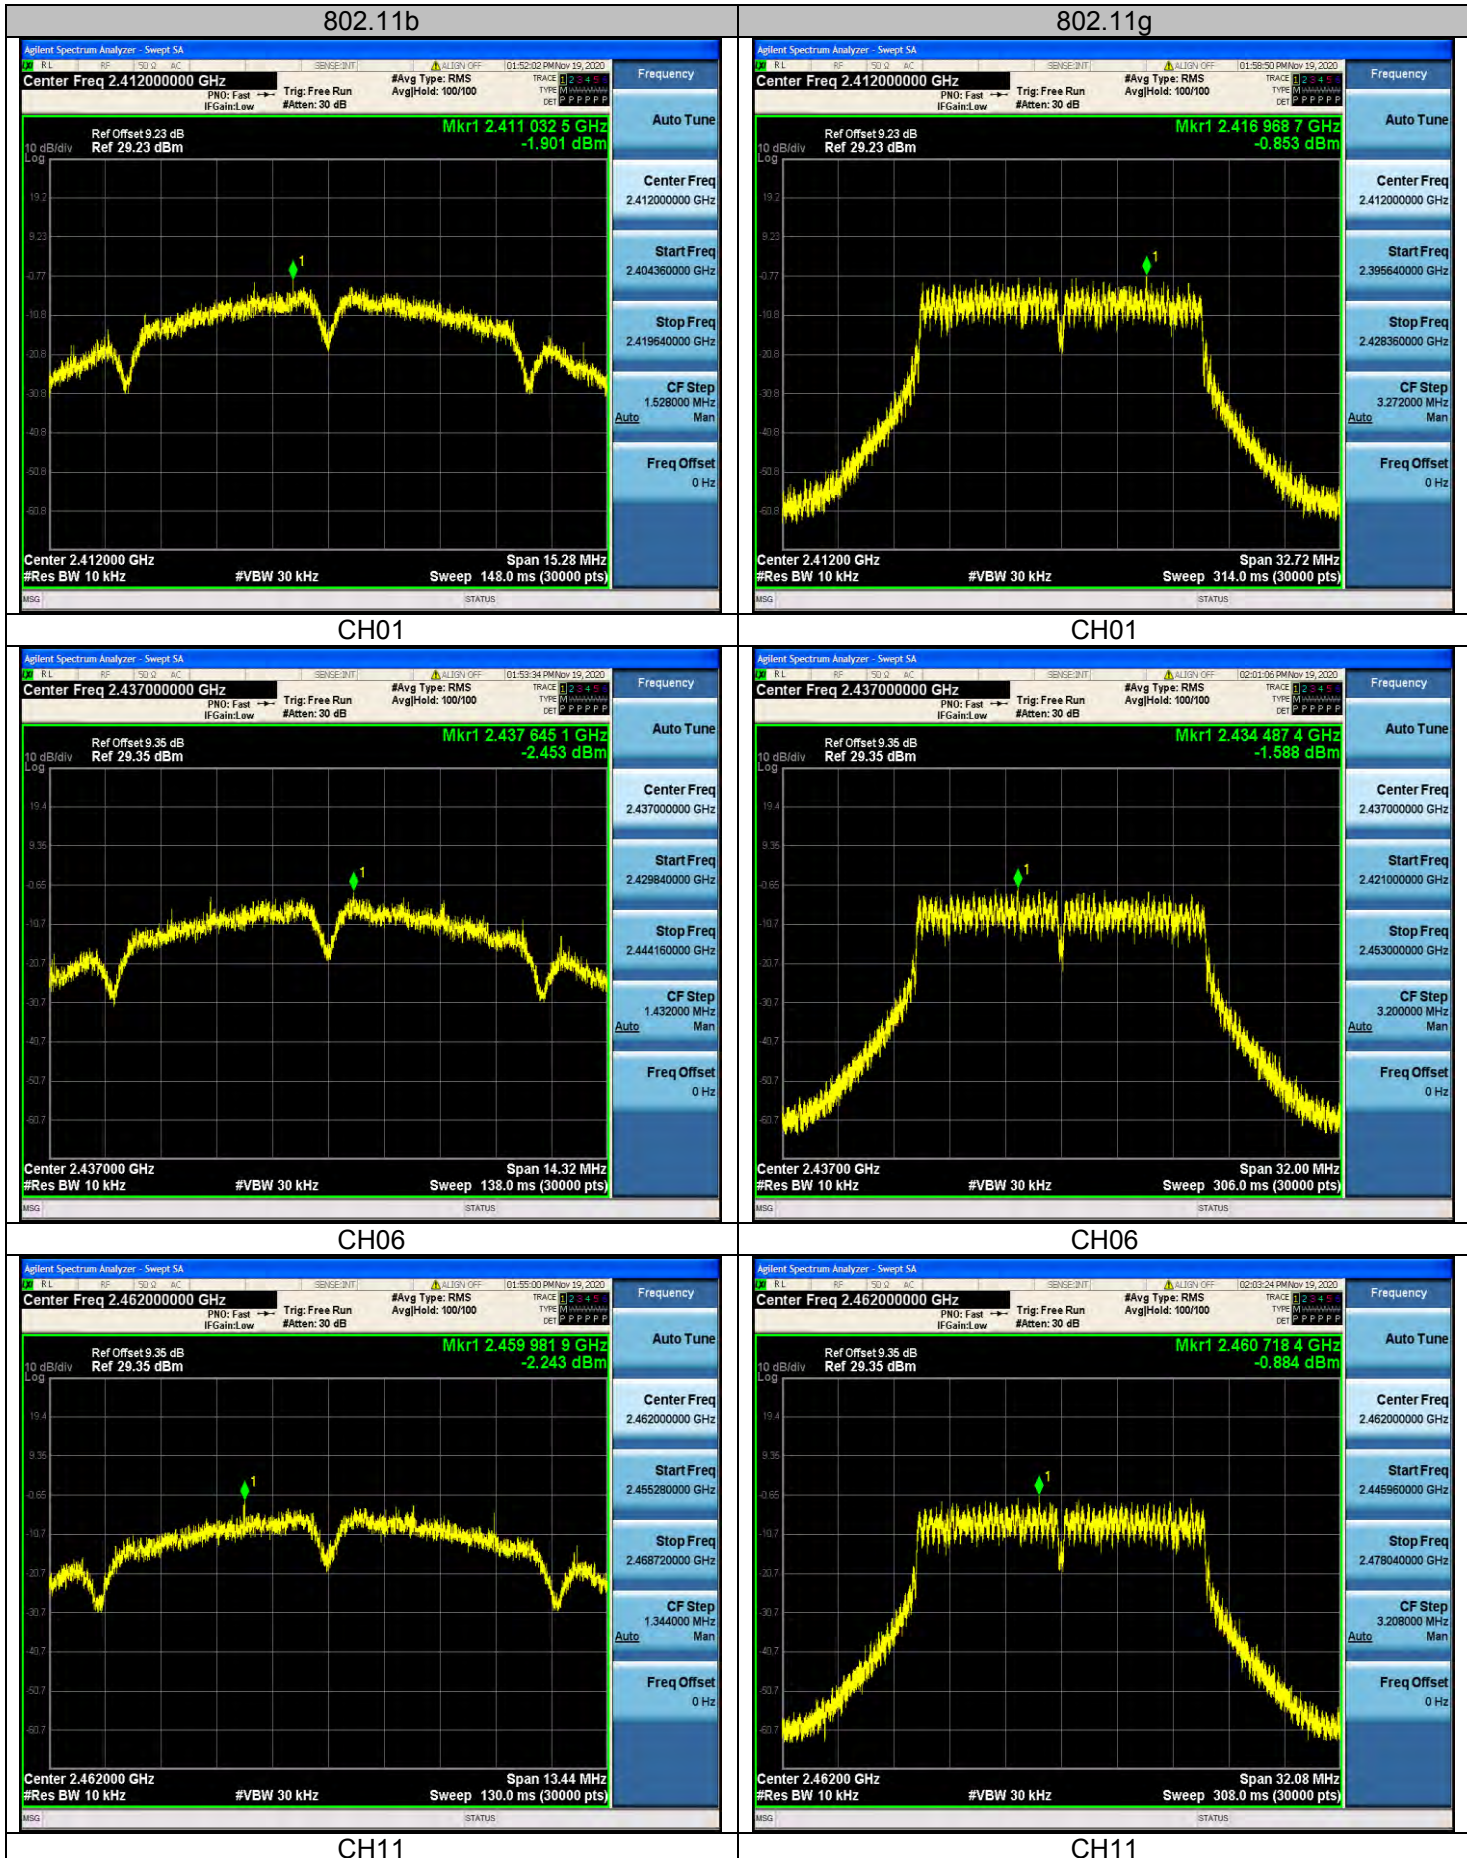


802.11 nHT20

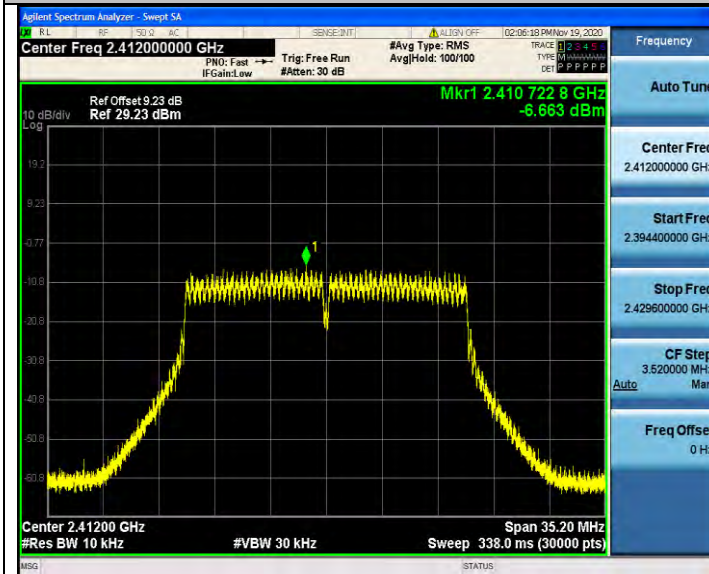


CH01


802.11nHT40

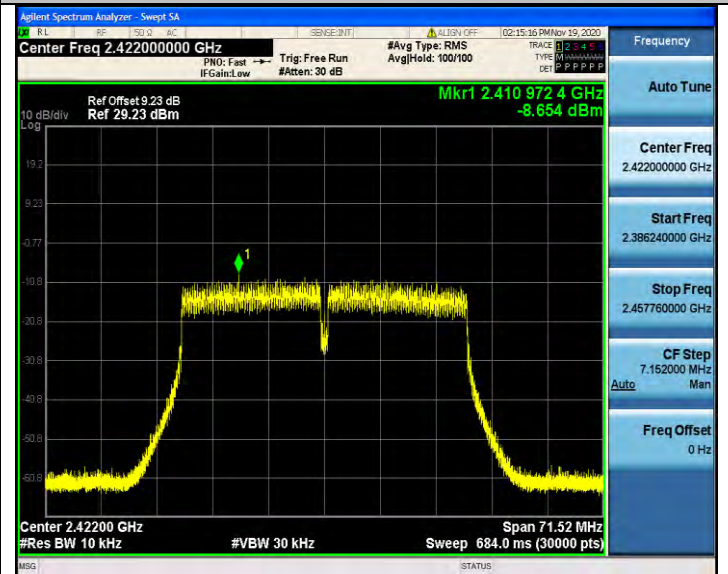


CH03

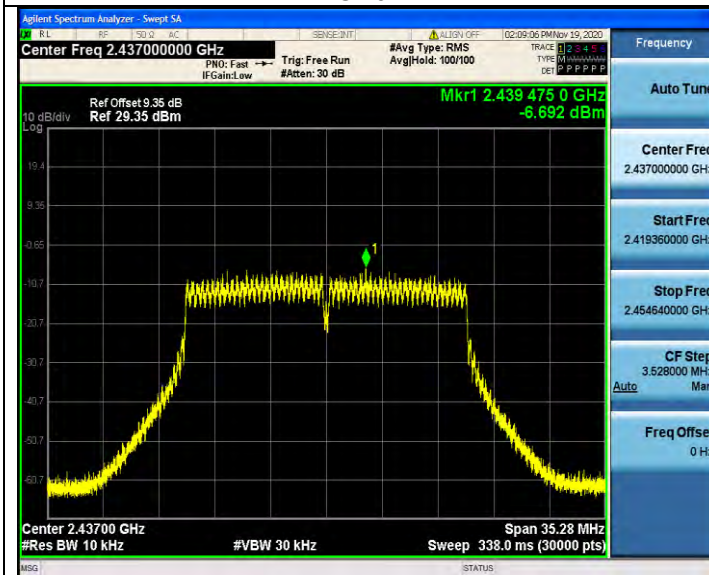


CH06

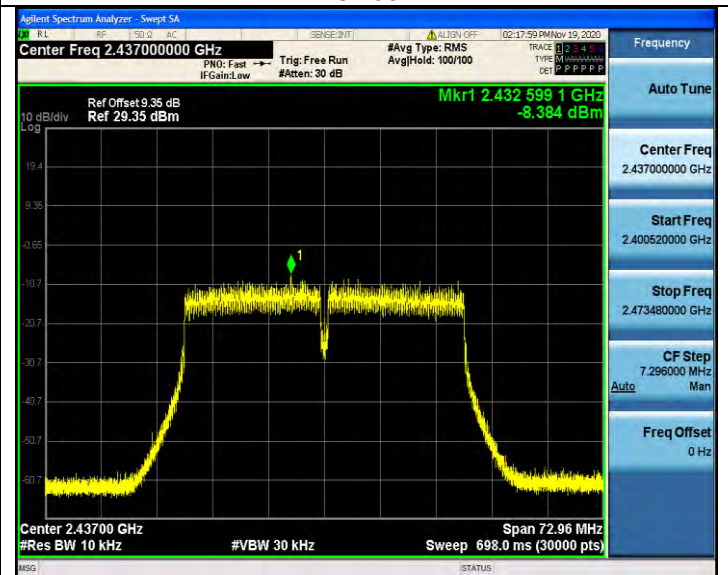

CH06

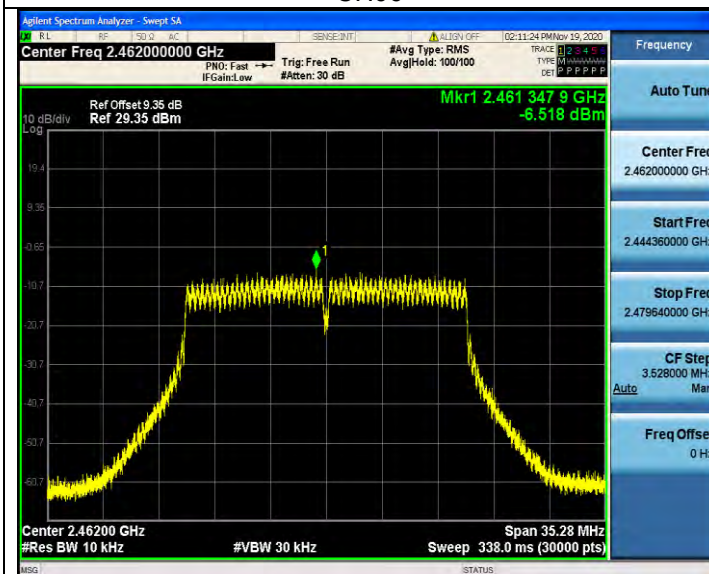


CH11

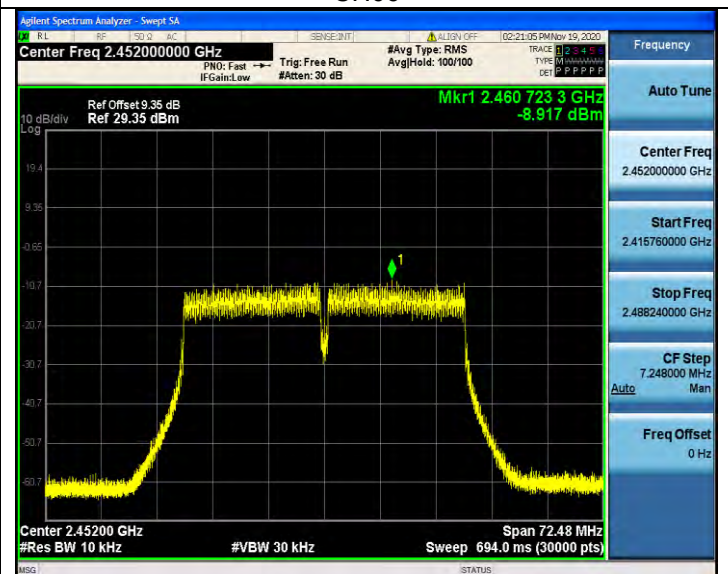


CH09

802.11 axHT20

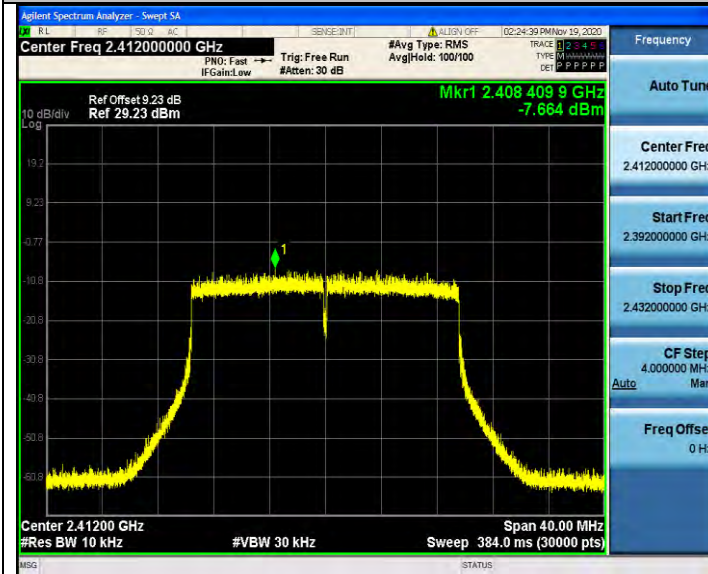


CH01


802.11axHT40

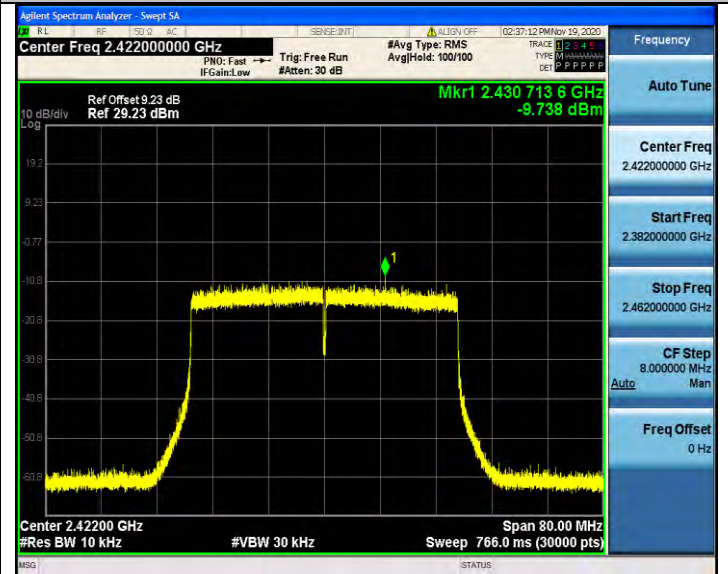


CH03

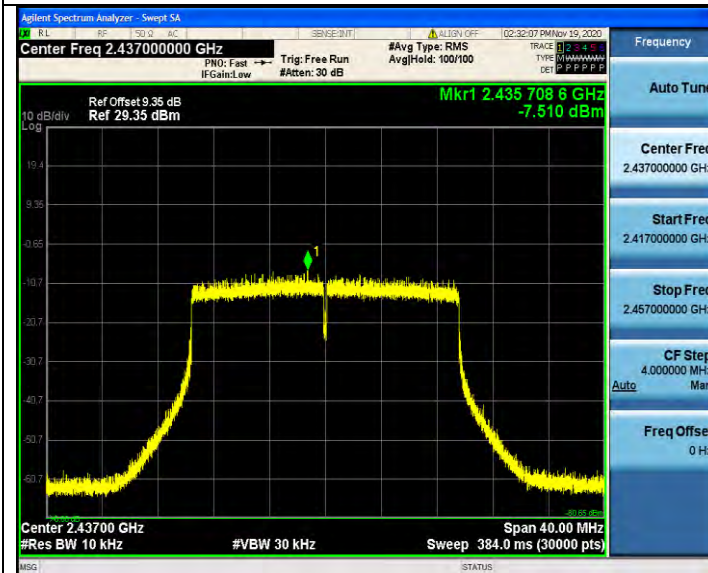


CH06

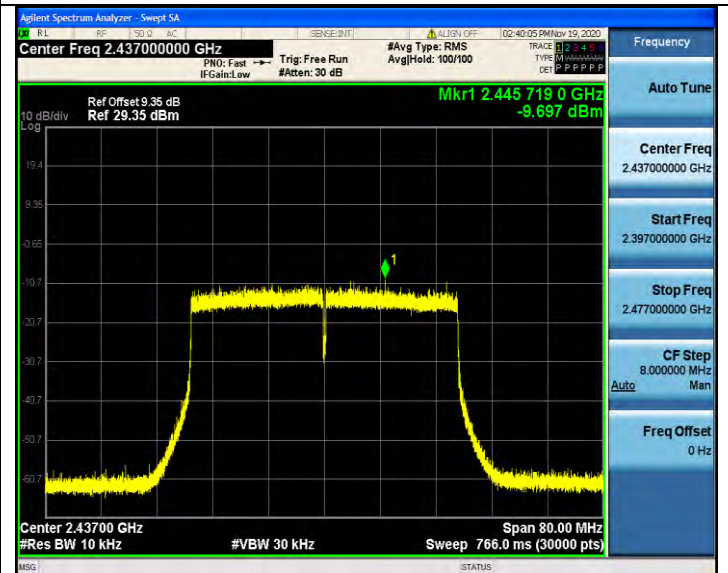

CH06

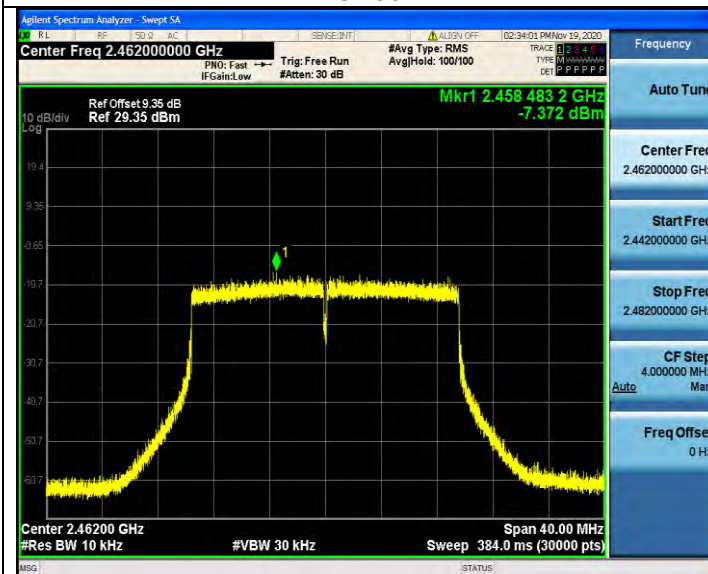



CH11

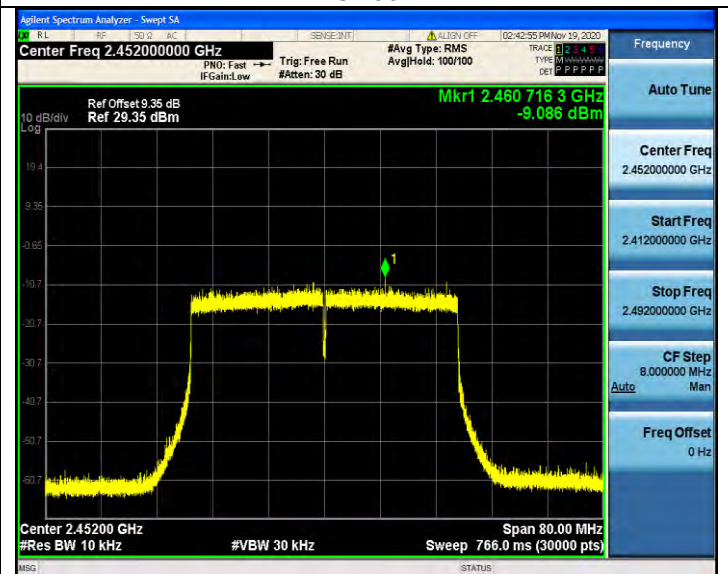


CH09

Antenna 12:

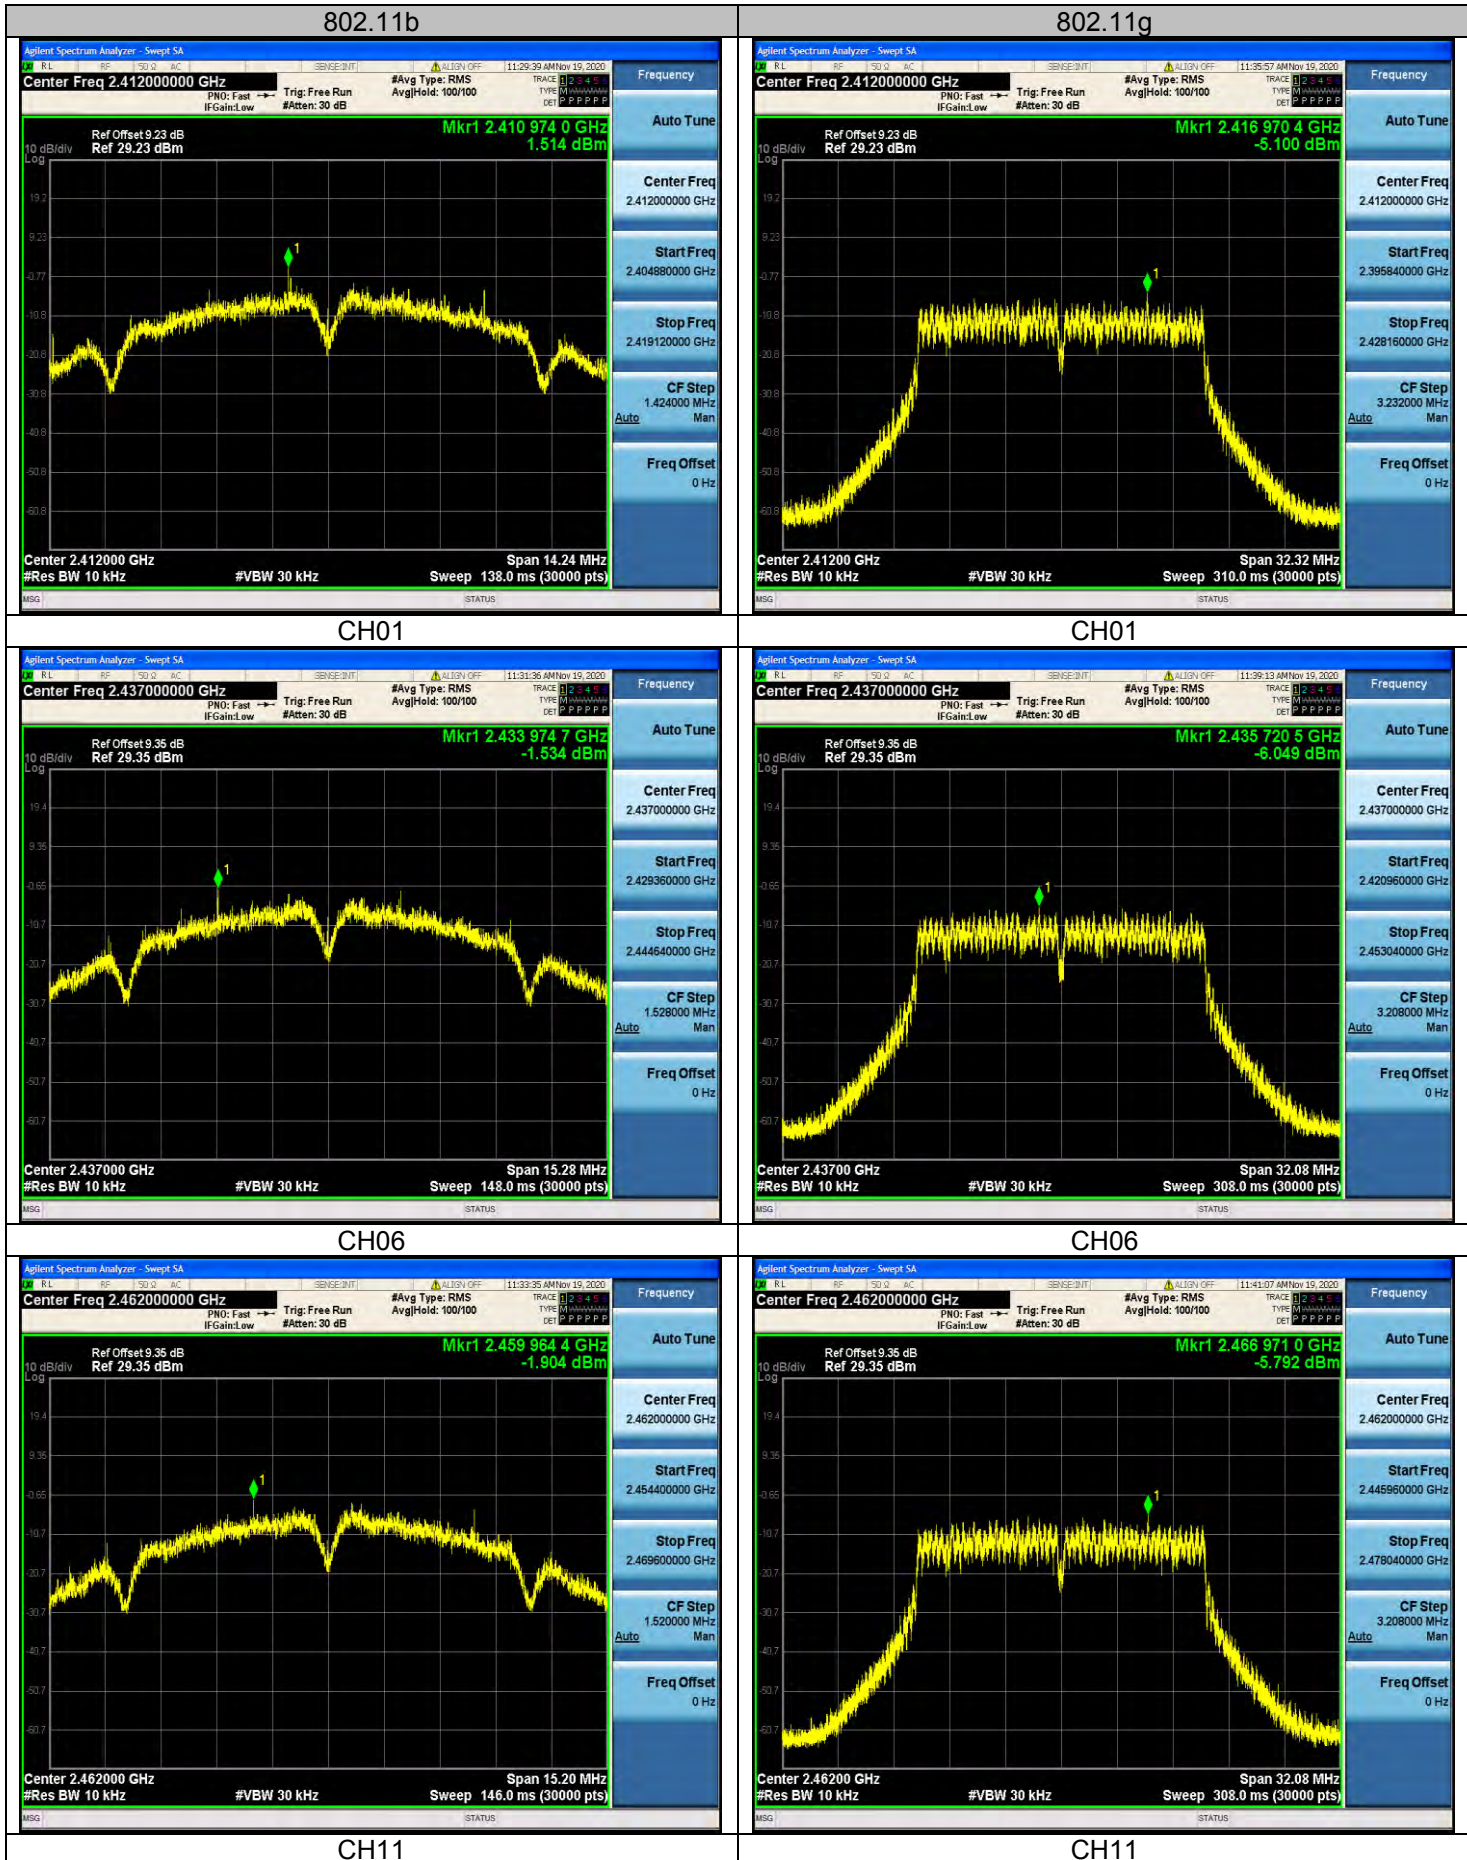


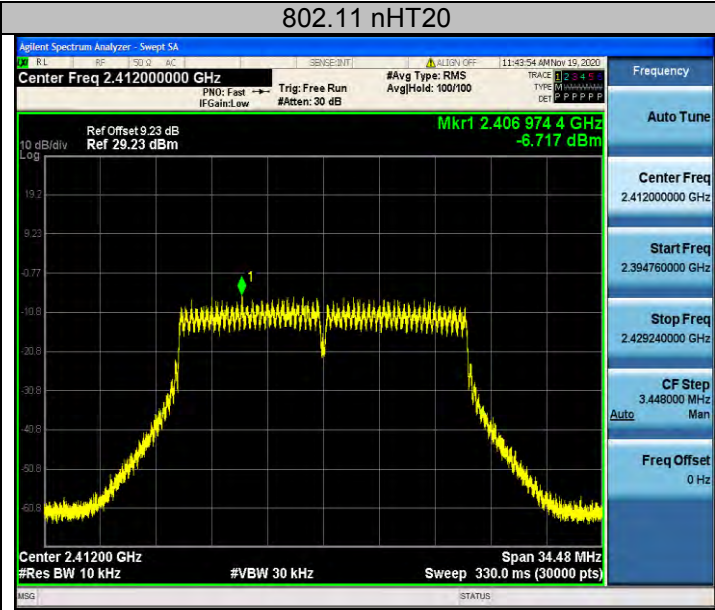


CH01

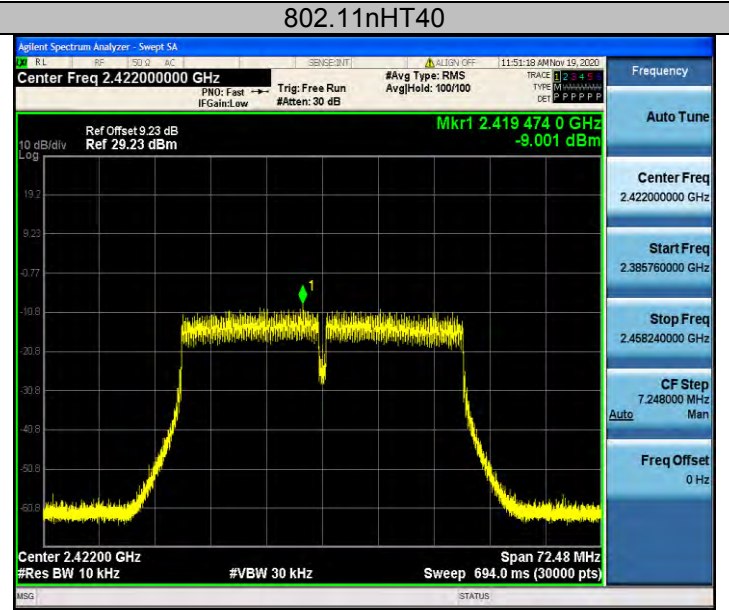


CH03

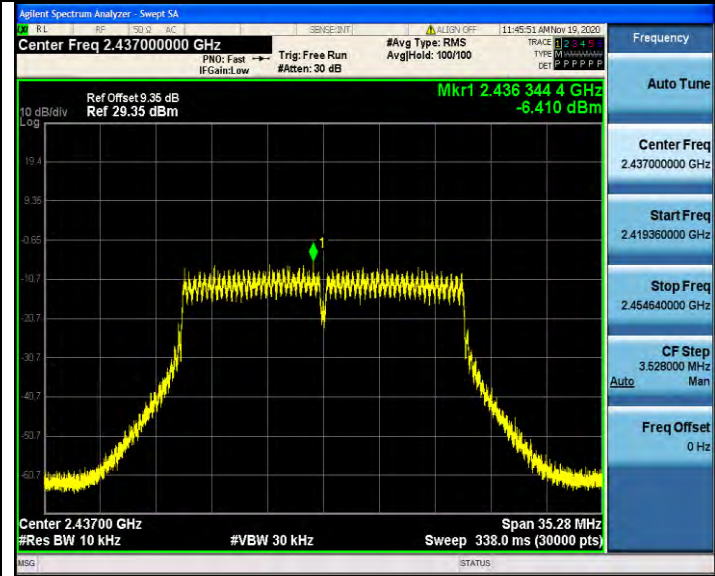


CH06

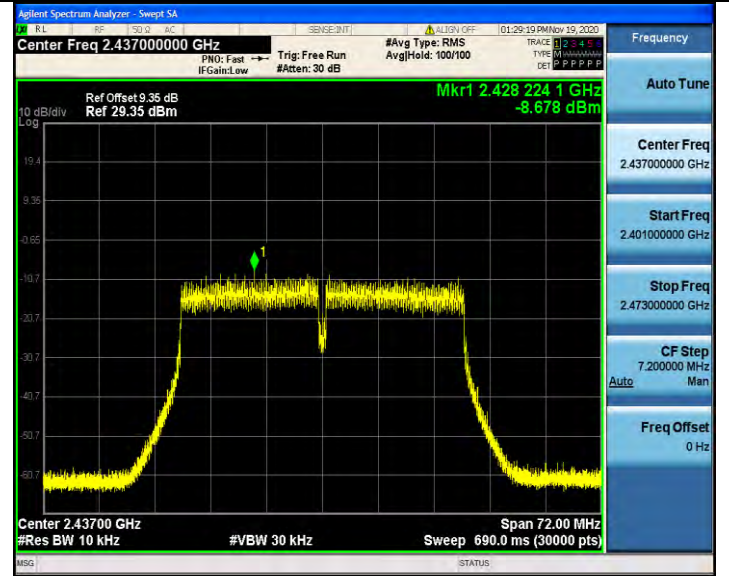


CH06

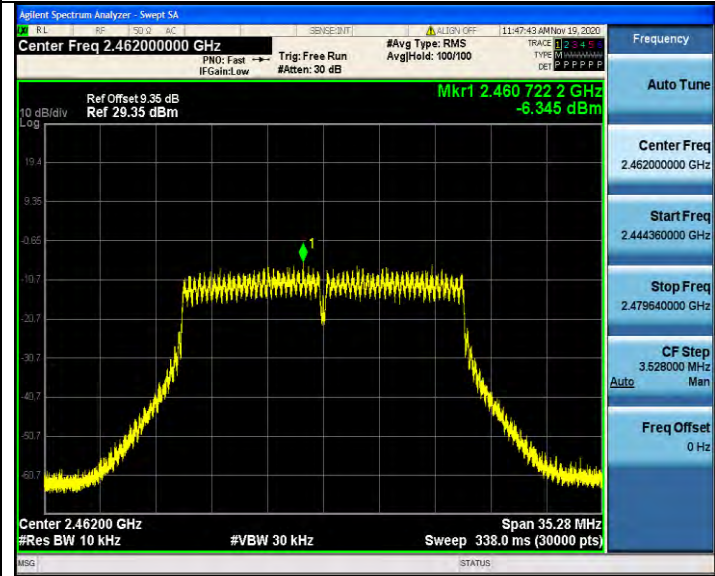


CH11

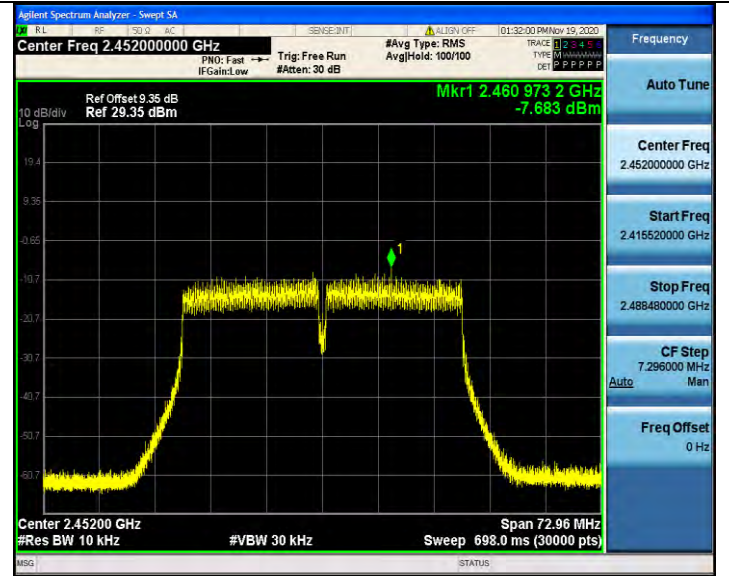


CH09

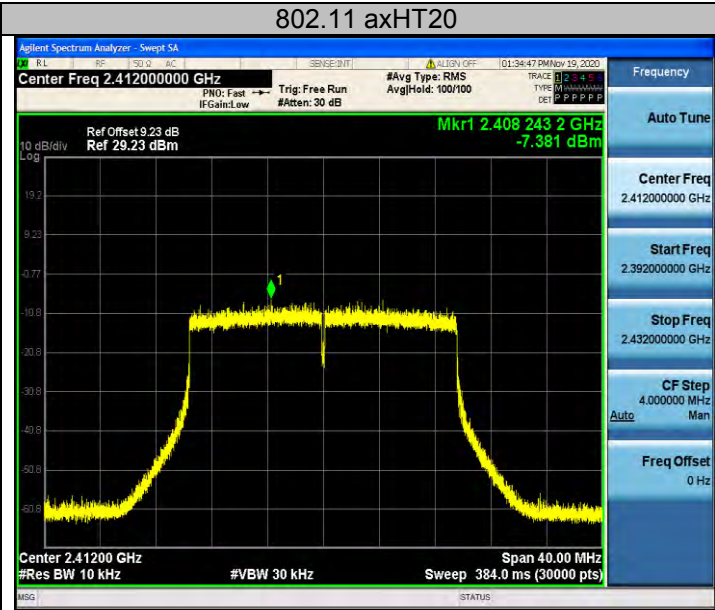


CH01

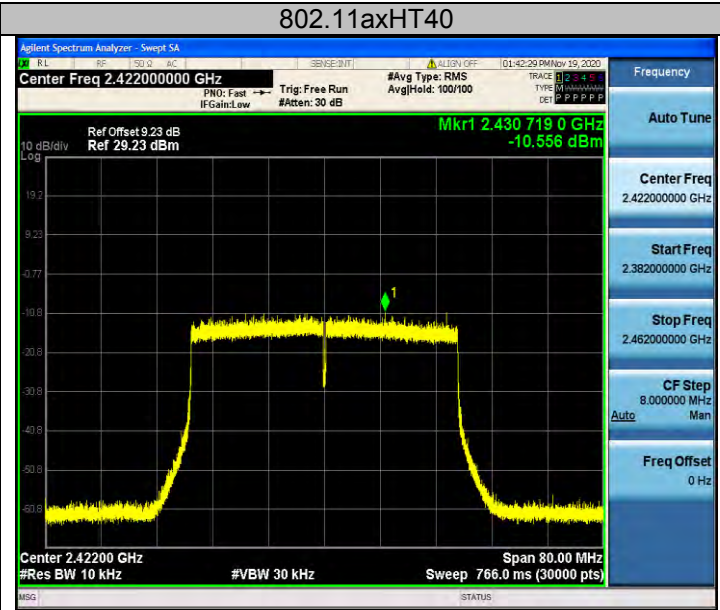


CH03

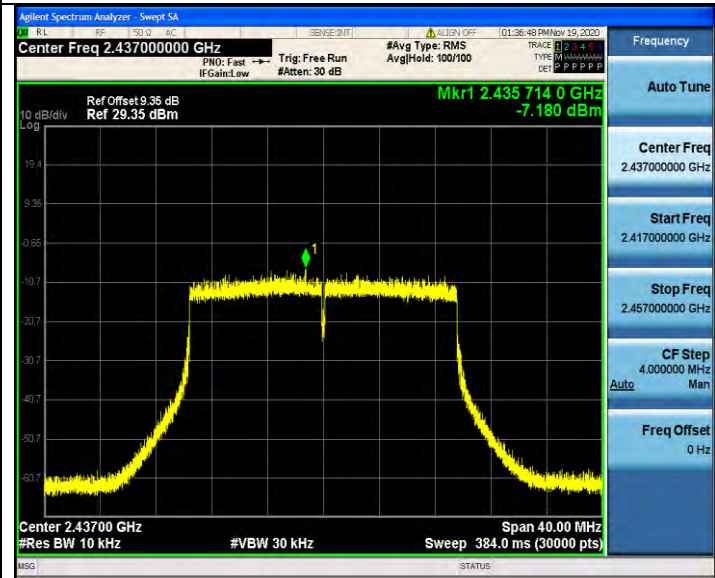


CH06

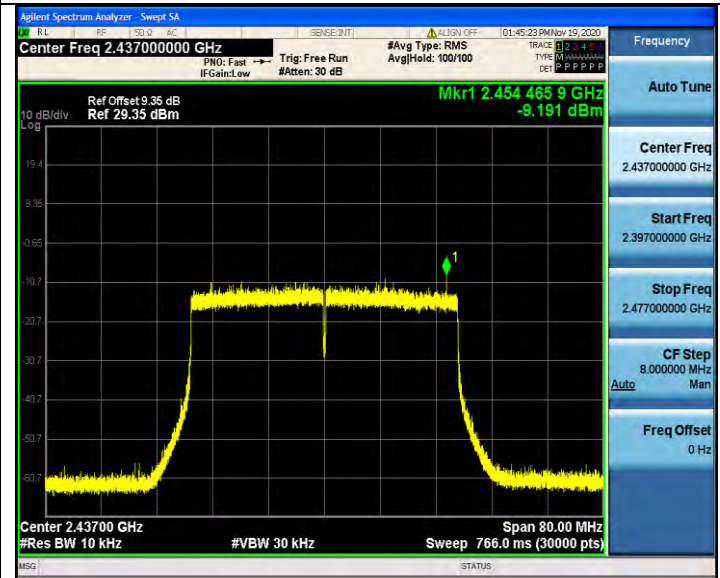

CH06

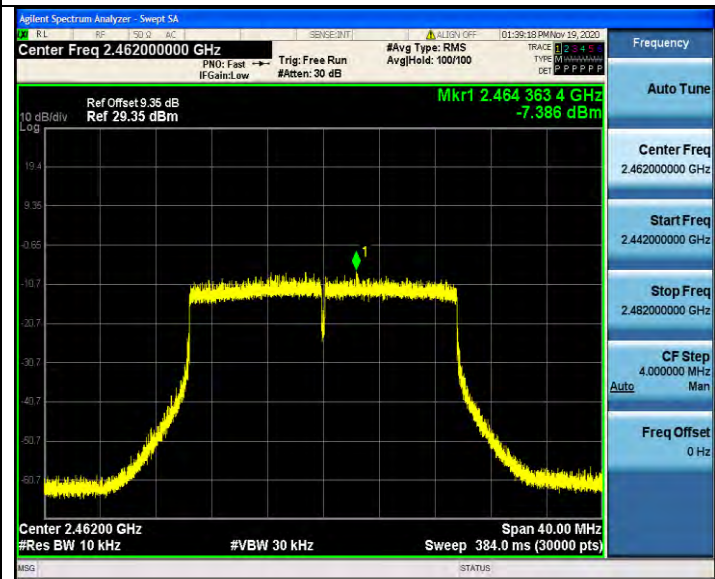

CH11

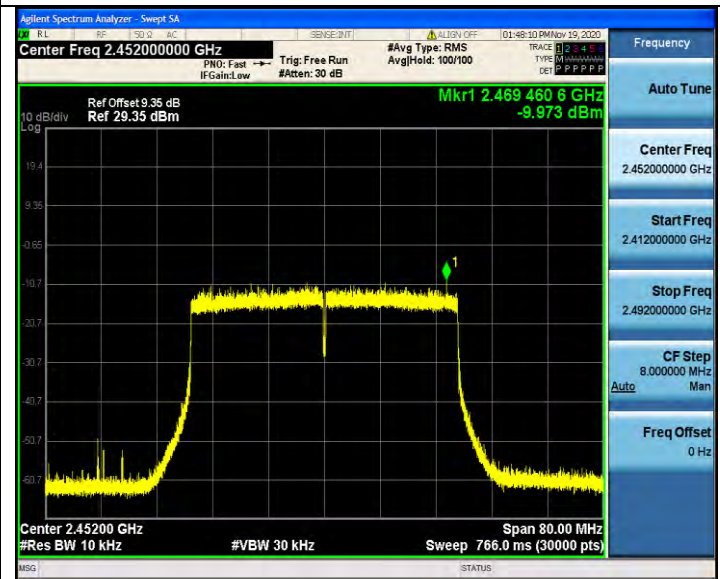

CH09