

TEST REPORT



Applicant	SNOOZ, INC
Address	6255 McLeod Dr. Suite 17 Las Vegas, NV 89120 USA

Manufacturer or Supplier	DONG GUAN KAN TSANG ELECTROACOUSTIC TECHNOLOGY CO., LTD.
Address	Room 402, Unit 1, No.8, Lu Yi Yi Road, Tang Xia Town, Dong Guan City, China.
Product	White Noise Machine
Brand Name	Snooz
Model	SNOOZ-B1
Additional Model & Model Difference	N/A
Date of tests	Nov. 26, 2020 ~ Dec. 23, 2020

the tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Evans He Project Engineer / EMC Department	Approved by David Huang Assistant Manager / EMC Department
	 Date: Dec. 25, 2020

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4 DESCRIPTION OF SUPPORT UNITS	10
4 TEST TYPES AND RESULTS.....	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2 TEST INSTRUMENTS.....	11
4.1.3 TEST PROCEDURES	12
4.1.4 DEVIATION FROM TEST STANDARD	12
4.1.5 TEST SETUP	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2 TEST INSTRUMENTS.....	17
4.2.3 TEST PROCEDURES	18
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP	19
4.2.6 EUT OPERATING CONDITIONS	20
4.2.7 TEST RESULTS	21
4.3 6DB BANDWIDTH MEASUREMENT	26
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	26
4.3.2 TEST INSTRUMENTS.....	26
4.3.3 TEST PROCEDURE.....	27
4.3.4 DEVIATION FROM TEST STANDARD	27



Test Report No.: RF2011WSZ0113-2

4.3.5	TEST SETUP	28
4.3.6	EUT OPERATING CONDITIONS	28
4.3.7	TEST RESULTS	29
4.4	CONDUCTED OUTPUT POWER.....	31
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	31
4.4.2	TEST SETUP	31
4.4.3	TEST INSTRUMENTS.....	31
4.4.4	TEST PROCEDURES	32
4.4.5	DEVIATION FROM TEST STANDARD	32
4.4.6	EUT OPERATING CONDITIONS	32
4.4.7	TEST RESULTS	32
4.4.7.1	MAXIMUM PEAK OUTPUT POWER	32
4.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	32
4.5	POWER SPECTRAL DENSITY MEASUREMENT	33
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	33
4.5.2	TEST SETUP	33
4.5.3	TEST INSTRUMENTS.....	33
4.5.4	TEST PROCEDURE.....	33
4.5.5	DEVIATION FROM TEST STANDARD	33
4.5.6	EUT OPERATING CONDITION	33
4.5.7	TEST RESULTS	34
4.6	OUT OF BAND EMISSION MEASUREMENT	35
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	35
4.6.2	TEST SETUP	35
4.6.3	TEST INSTRUMENTS.....	35
4.6.4	TEST PROCEDURE.....	35
4.6.5	DEVIATION FROM TEST STANDARD	36
4.6.6	EUT OPERATING CONDITION	36
4.6.7	TEST RESULTS	37
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	40
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	41



Test Report No.: RF2011WSZ0113-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2011WSZ0113-2	Original release	Dec. 25, 2020

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.205 15.209	Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	0.15MHz ~ 30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.74dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	White Noise Machine
BRAND	Snooz
MODEL NO.	SNOOZ-B1
ADDITIONAL MODEL	N/A
FCC ID	2AXA7-SNOOZBUTTON
NOMINAL VOLTAGE	DC 5V from Adapter
MODULATION TECHNOLOGY	DTS
MODULATION TYPE	BT-LE(GFSK)
OPERATING FREQUENCY	2402-2480MHz
PEAK OUTPUT POWER	5.916mW (Max. Measured)
ANTENNA TYPE	PCB Antenna, 0dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	DC Line: Unshielded, Non-Detachable 1.9m

NOTES:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
2. Please refer to the EUT photo document (Reference No.: 2011WSZ0113) for detailed product photo.
3. The EUT were powered by the following adapter:

ADAPTER	
BRAND:	SWITCHING
MODEL:	S006AYU0500120
INPUT:	AC 100-240V, 50/60hz 0.3A
OUTPUT:	DC 5V, 1.2A
DC LINE:	Unshielded, Non-detachable, 1.9m.

3.2 DESCRIPTION OF TEST MODES

40 channels are provided for BT-LE(GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports
The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Powered By DC 5V from adapter with BT link

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
 PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channels were selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	39	DTS	GFSK	1

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channels were selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0,19, 39	DTS	GFSK	1

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channels were selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 39	39	DTS	GFSK	DH5



ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channels were selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0, 19, 39	DTS	GFSK	1

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 55%RH	DC 5V from adapter	Aaron Liang
RE≥1G	25deg. C, 55%RH	DC 5V from adapter	Aaron Liang
PLC	25deg. C, 49%RH	DC 5V from adapter	Aaron Liang
APCM	25deg. C, 60%RH	DC 5V from adapter	Aaron Liang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

Note: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCS30	8471241027	Mar. 24, 20	Mar. 24, 21
Artificial Mains Network	SCHWARZBECK	8127	8127713	Mar. 24, 20	Mar. 24, 21
ISN	Com-Power	ISN T800	34373	Mar. 24, 20	Mar. 24, 21
Test software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTE:

1. The test was performed in shielded room 553.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

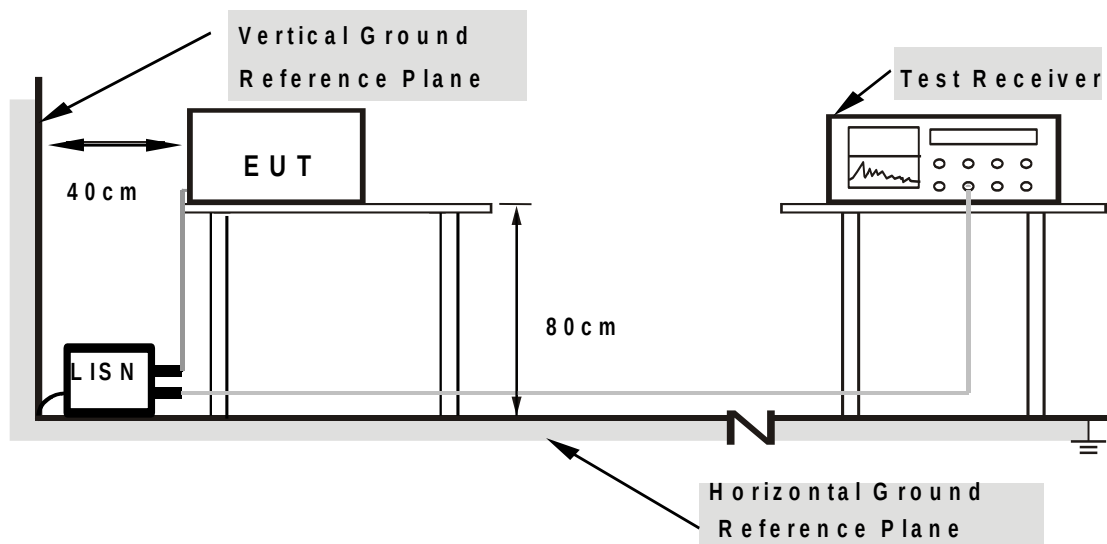

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



**BUREAU
VERITAS**

Test Report No.: RF2011WSZ0113-2


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: BT-LE(GFSK) CH39

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

NO.	P/L	FREQUENCY (MHZ)	READING (DBUV)	DETECTOR	CORRECTED (DB)	RESULT (DBUV)	LIMIT (DBUV)	MARGIN (DB)
1	L1	0.4542	36.57	QP	10.17	46.74	56.80	-10.06
2	L1	0.4542	32.22	AVG	10.17	42.39	46.80	-4.41
3	L1	1.3629	36.05	QP	10.21	46.26	56.00	-9.74
4	L1	1.3629	31.90	AVG	10.21	42.11	46.00	-3.89
5	L1	2.2677	38.47	QP	10.23	48.70	56.00	-7.30
6	L1	2.2677	33.81	AVG	10.23	44.04	46.00	-1.96
7	L1	3.1755	39.86	QP	10.26	50.12	56.00	-5.88
8	L1	3.1755	32.54	AVG	10.26	42.80	46.00	-3.20
9	L1	5.4414	37.30	QP	10.33	47.63	60.00	-12.37
10	L1	5.4414	23.18	AVG	10.33	33.51	50.00	-16.49
11	L1	8.1714	27.34	QP	10.44	37.78	60.00	-22.22
12	L1	8.1714	10.86	AVG	10.44	21.30	50.00	-28.70

REMARKS: The emission levels of other frequencies were very low against the limit.

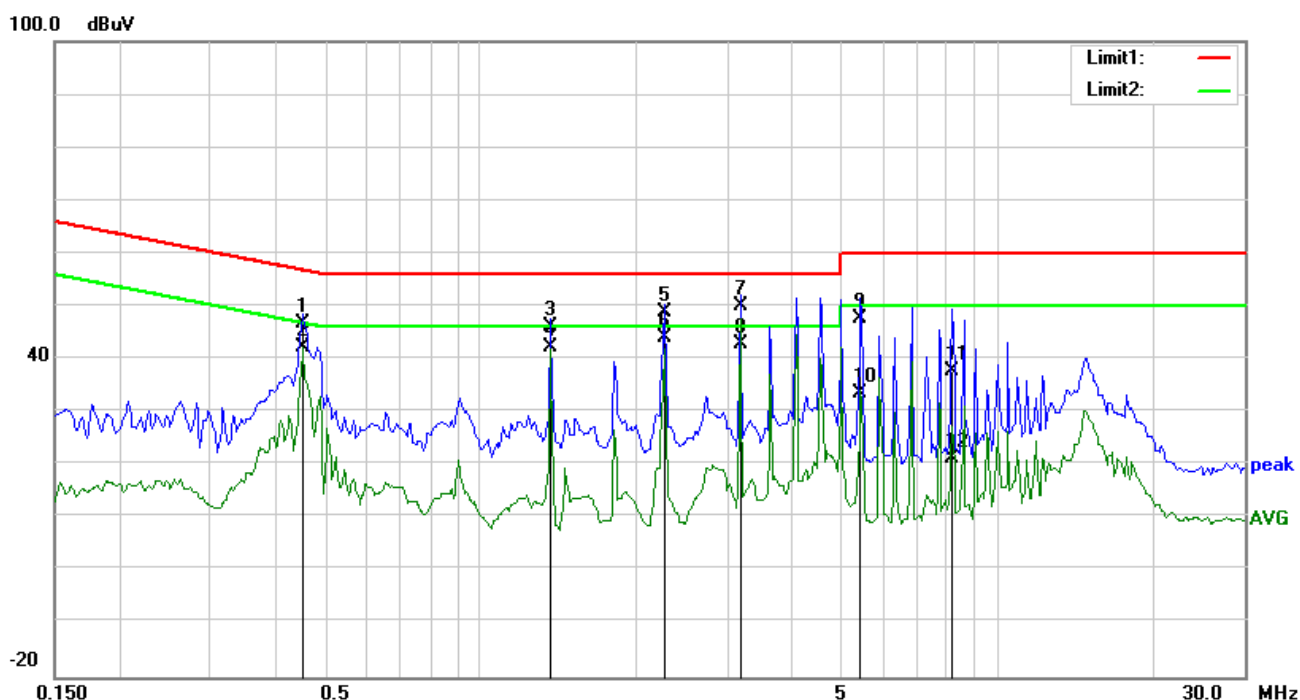




**BUREAU
VERITAS**

Test Report No.: RF2011WSZ0113-2

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

NO.	P/L	FREQUENCY (MHZ)	READING (DBUV)	DETECTOR	CORRECTED (DB}	RESULT (DBUV)	LIMIT (DBUV)	MARGIN (DB)
1	N	0.4542	31.07	QP	10.17	41.24	56.80	-15.56
2	N	0.4542	28.09	AVG	10.17	38.26	46.80	-8.54
3	N	1.3590	30.15	QP	10.25	40.40	56.00	-15.60
4	N	1.3590	26.43	AVG	10.25	36.68	46.00	-9.32
5	N	2.2677	32.59	QP	10.29	42.88	56.00	-13.12
6	N	2.2677	28.26	AVG	10.29	38.55	46.00	-7.45
7	N	4.0803	35.51	QP	10.38	45.89	56.00	-10.11
8	N	4.0803	28.53	AVG	10.38	38.91	46.00	-7.09
9	N	5.4375	28.49	QP	10.44	38.93	60.00	-21.07
10	N	5.4375	14.89	AVG	10.44	25.33	50.00	-24.67
11	N	14.6844	19.29	QP	10.75	30.04	60.00	-29.96
12	N	14.6844	14.90	AVG	10.75	25.65	50.00	-24.35

REMARKS: The emission levels of other frequencies were very low against the limit.

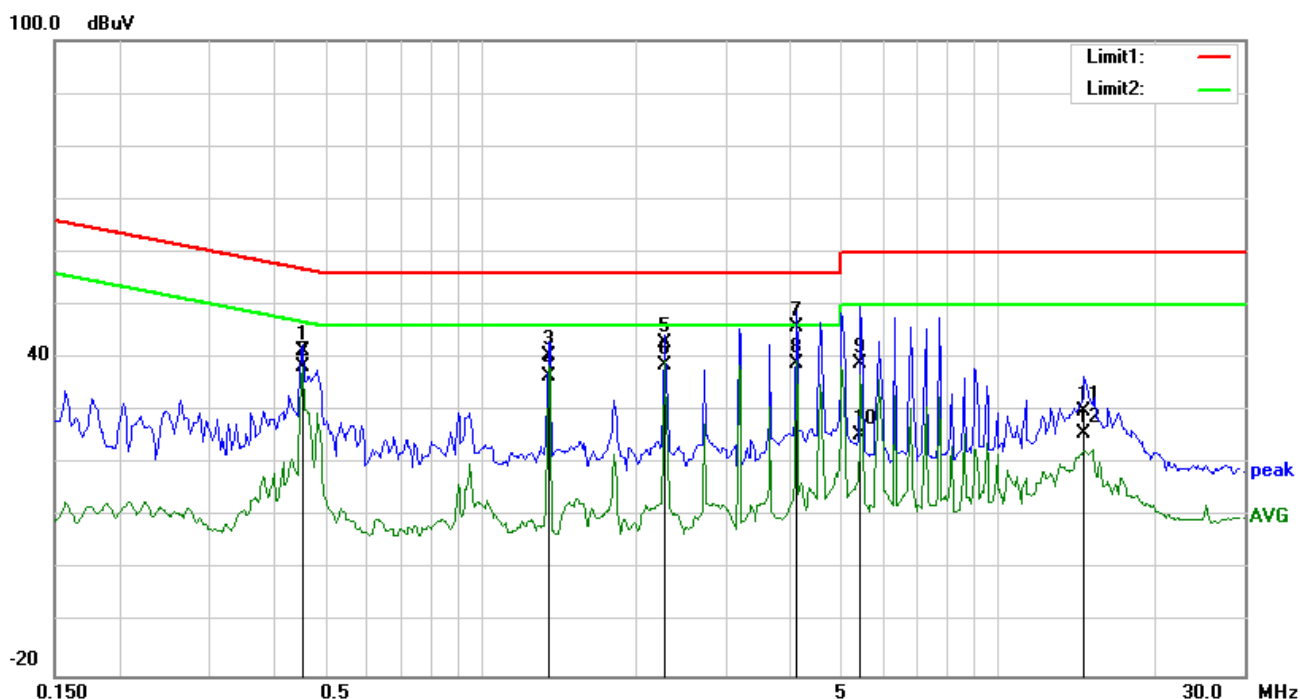



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06 -100262-eQ	Mar. 24,20	Mar. 24,21
Bilog Antenna	Sunol Sciences	JB6	A110712	Apr. 08, 20	Apr. 07, 21
Active Antenna	CMO-POWER	AL-130	121031	Mar. 27, 20	Mar. 26, 21
Signal Amplifier	HP	8447E	443008	Mar. 24,20	Mar. 24,21
Spectrum	Agilent	E4446A	MY46180622	May. 08, 20	May. 07, 21
MXA signal analyzer	Agilent	N9020A	MY49100060	Mar. 24, 20	Mar. 24, 21
Horn Antenna	COM-POWER	HAH-118	71259	Apr. 17, 20	Apr. 17, 21
Horn Antenna	COM-POWER	HAH-118	71283	Mar. 20, 20	Mar. 19, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170147	Jun. 30, 20	Jun. 29, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170242	Jun. 30, 20	Jun. 29, 21
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Mar. 24, 20	Mar. 24, 21
AMPLIFIER	Emc Instruments Corporation	Emc012645	980077	Jan. 04, 20	Jan. 03,21
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18,18	Oct. 17,21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months (except 3m Semi-anechoic Chamber). And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above1GHz if tested.
4. The FCC Site Registration No. is 535293.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

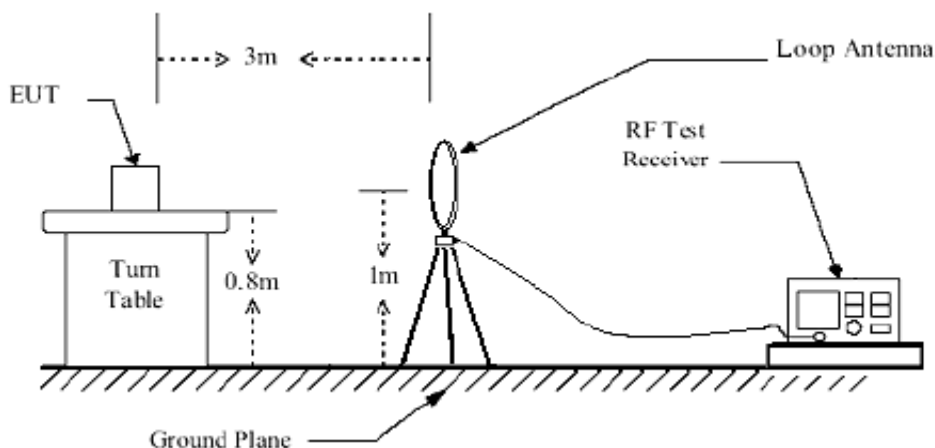


Below 1GHz test setup

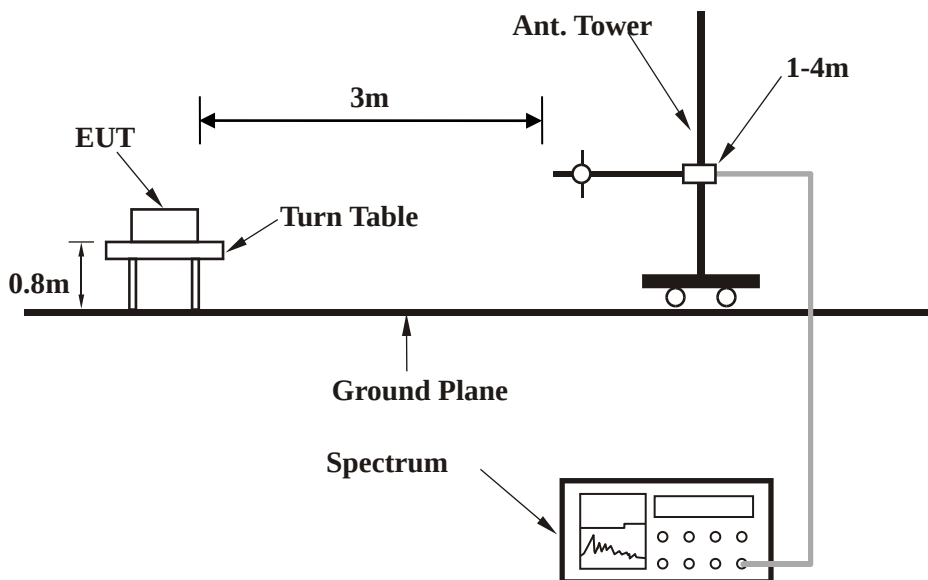

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

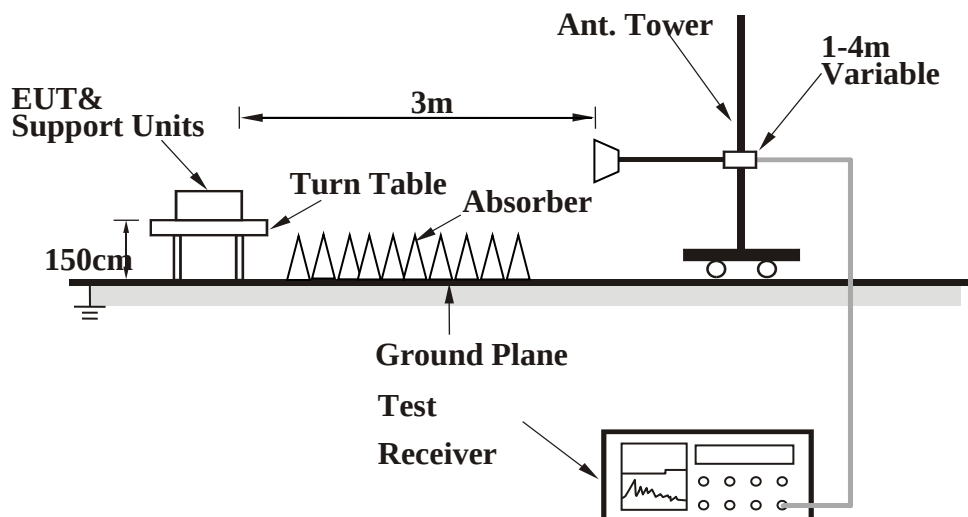

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


BT-LE (GFSK)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	34.5173	29.32	18.04	21.62	0.65	26.39	40.00	-13.61	100	69
2	54.8348	33.32	7.32	21.62	0.77	19.79	40.00	-20.21	100	201
3	120.2766	30.46	12.88	21.65	1.11	22.80	43.50	-20.70	100	314
4	207.8501	31.37	12.10	21.81	1.42	23.08	43.50	-20.42	200	264
5	431.0316	27.65	16.37	22.01	1.99	24.00	46.00	-22.00	100	197
6	790.6188	29.80	21.27	21.72	2.67	32.02	46.00	-13.98	100	155

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

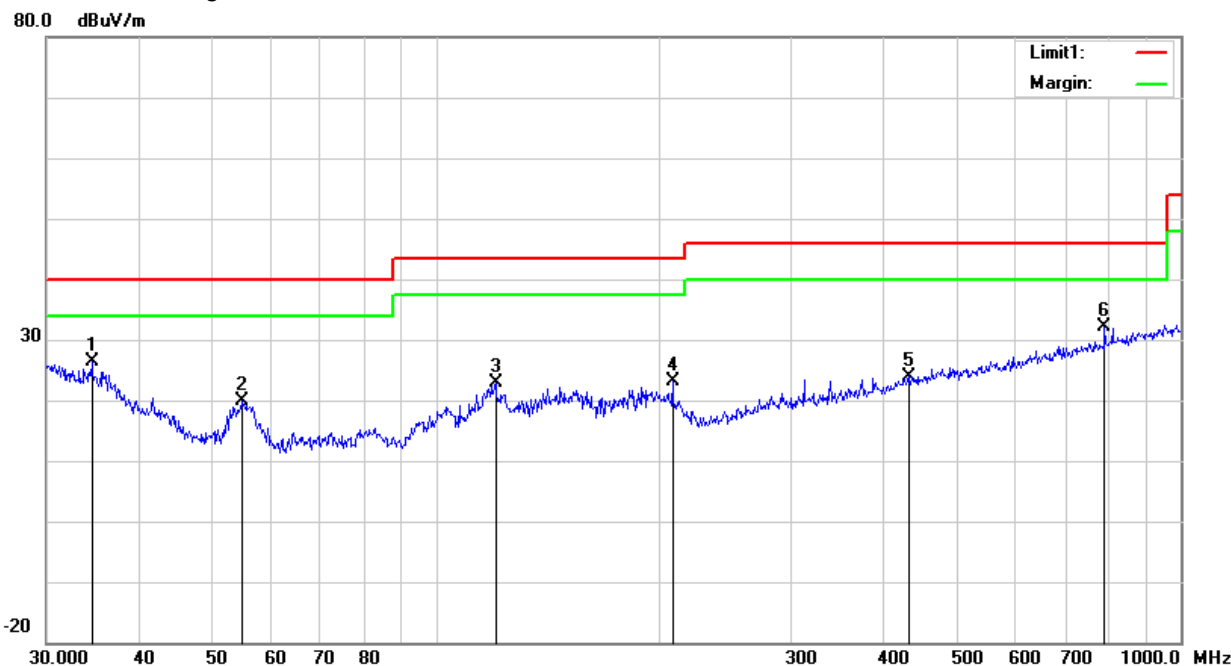



BUREAU
VERITAS


Test Report No.: RF2011WSZ0113-2

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	40.7016	38.46	13.69	21.62	0.68	31.21	40.00	-8.79	100	330
2	55.2207	49.03	7.31	21.62	0.77	35.49	40.00	-4.51	200	306
3	164.9075	32.86	11.94	21.73	1.27	24.34	43.50	-19.16	100	191
4	336.0352	27.55	14.18	22.00	1.81	21.54	46.00	-24.46	100	113
5	535.7073	28.56	17.99	22.03	2.19	26.71	46.00	-19.29	200	211
6	896.9965	28.89	22.37	21.54	2.87	32.59	46.00	-13.41	100	110

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

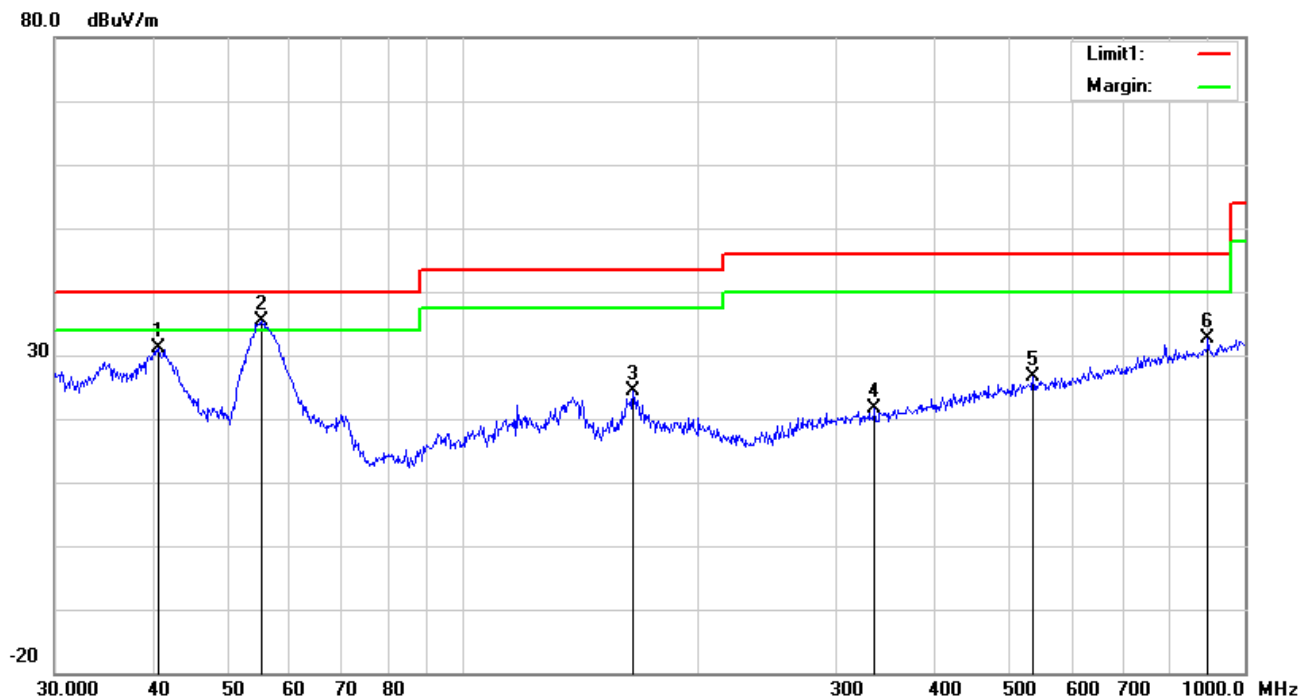

ABOVE 1GHz TEST DATA:

BT-LF (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390	55.45 PK	74	-18.55	234	65	66.83	-11.38
2	2390	43.23 AV	54	-10.77	234	65	54.61	-11.38
3	*2402	90.11 PK			160	144	101.49	-11.38
4	*2402	89.46 AV			160	144	100.84	-11.38
5	4804	48.78 PK	74	-25.22	210	167	54.85	-6.07
6	4804	39.34 AV	54	-14.66	210	167	45.41	-6.07
7	7206	55.42 PK	74	-18.58	177	79	55.13	0.29
8	7206	45.68 AV	54	-8.32	177	79	45.39	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2361.77	51.13 PK	74	-22.87	135	131	62.51	-11.38
2	2361.77	43.08 AV	54	-10.92	135	131	54.46	-11.38
3	*2402	80.77 PK			143	3	92.15	-11.38
4	*2402	80.28 AV			143	3	91.66	-11.38
5	4804	50.5 PK	74	-23.5	215	277	56.57	-6.07
6	4804	39.35 AV	54	-14.65	215	277	45.42	-6.07
7	7206	56.82 PK	74	-17.18	192	39	56.53	0.29
8	7206	45.81 AV	54	-8.19	192	39	45.52	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440	94.88 PK			176	10	106.26	-11.38
2	*2440	94.3 AV			176	10	105.68	-11.38
3	4880	49.61 PK	74	-24.39	155	355	55.68	-6.07
4	4880	41 AV	54	-13	155	355	47.07	-6.07
5	7320	56.41 PK	74	-17.59	181	188	56.12	0.29
6	7320	46.9 AV	54	-7.1	181	188	46.61	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440	91.21 PK			118	122	102.59	-11.38
2	*2440	90.7 AV			118	122	102.08	-11.38
3	4880	51.56 PK	74	-22.44	145	134	57.63	-6.07
4	4880	40.89 AV	54	-13.11	145	134	46.96	-6.07
5	7320	57.29 PK	74	-16.71	188	168	57	0.29
6	7320	47.21 AV	54	-6.79	188	168	46.92	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF2011WSZ0113-2

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.5	66.96 PK	74	-7.04	131	60	78.34	-11.38
2	2483.5	36.77 AV	54	-17.23	131	60	48.15	-11.38
3	*2480	91.58 PK			217	126	102.96	-11.38
4	*2480	90.99 AV			217	126	102.37	-11.38
5	4960	48.51 PK	74	-25.49	229	172	54.58	-6.07
6	4960	39.55 AV	54	-14.45	229	172	45.62	-6.07
7	7440	53.23 PK	74	-20.77	147	85	52.94	0.29
8	7440	45.08 AV	54	-8.92	147	85	44.79	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.5	62.88 PK	74	-11.12	120	72	74.26	-11.38
2	2483.5	36.02 AV	54	-17.98	120	72	47.4	-11.38
3	*2480	87.36 PK			128	6	98.74	-11.38
4	*2480	86.92 AV			128	6	98.3	-11.38
5	4960	48.42 PK	74	-25.58	188	213	54.49	-6.07
6	4960	39.78 AV	54	-14.22	188	213	45.85	-6.07
7	7440	54.24 PK	74	-19.76	113	266	53.95	0.29
8	7440	45.26 AV	54	-8.74	113	266	44.97	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 18, 19	Dec. 17, 20
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 17, 20	Dec. 16, 21
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24,20	Mar. 24,21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24,20	Mar. 24,21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24,20	Mar. 24,21
Signal Generation	Agilent	E4421B	US40051152	Dec. 18, 19	Dec. 17, 20
Signal Generation	Agilent	E4421B	US40051152	Dec. 17, 20	Dec. 16, 21
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30,20	Mar. 30,21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24,20	Mar. 24,21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27,20	Mar. 27,21

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


4.3.3 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

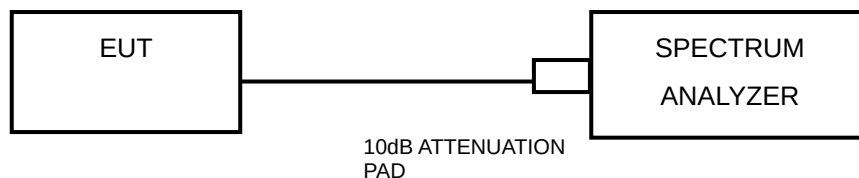

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.524	0.5	PASS
19	2440	0.540	0.5	PASS
39	2480	0.516	0.5	PASS


CH 0



CH 19



CH 39

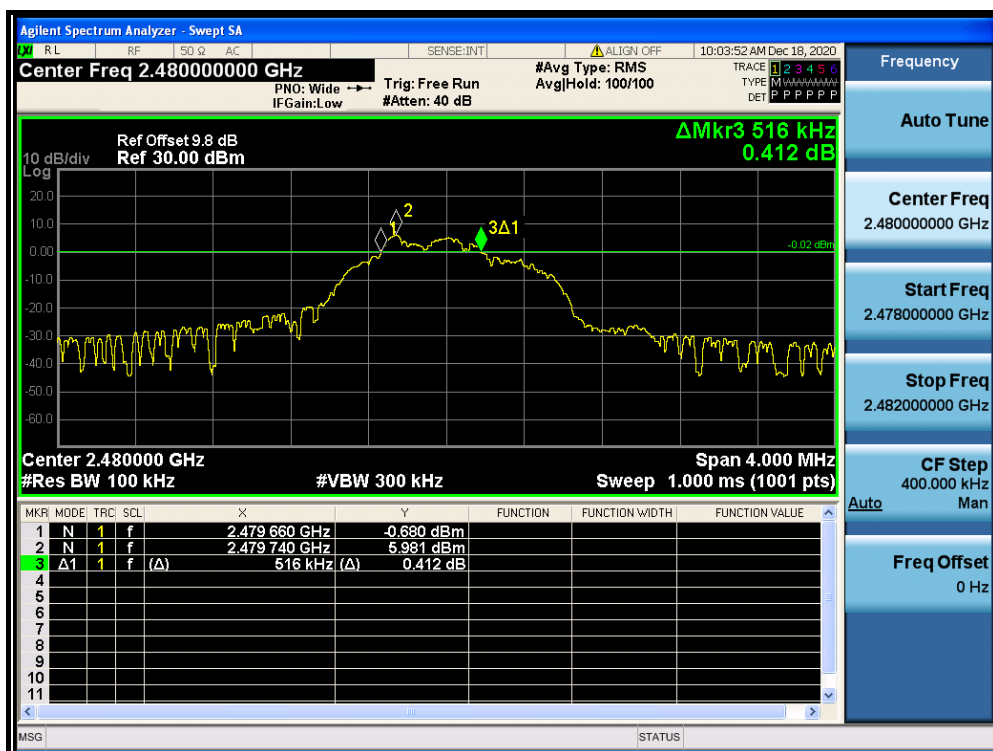


4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

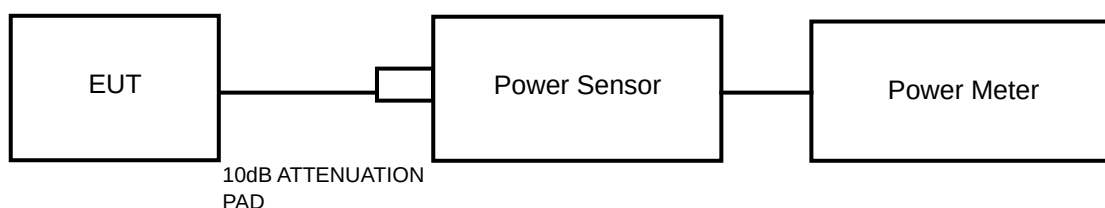

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 18, 19	Dec. 17, 20
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 17, 20	Dec. 16, 21
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24,20	Mar. 24,21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24,20	Mar. 24,21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24,20	Mar. 24,21
Signal Generation	Agilent	E4421B	US40051152	Dec. 18, 19	Dec. 17, 20
Signal Generation	Agilent	E4421B	US40051152	Dec. 17, 20	Dec. 16, 21
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30,20	Mar. 30,21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24,20	Mar. 24,21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27,20	Mar. 27,21

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.

4.4.4 TEST PROCEDURES

A peak sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 TEST RESULTS

4.4.7.1 MAXIMUM PEAK OUTPUT POWER

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	7.31	5.383	1	PASS
19	2440	7.72	5.916	1	PASS
39	2480	6.42	4.385	1	PASS

4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

BT-LE (GFSK)


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	6.26
19	2440	6.51
39	2480	5.27

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS

BT-LE (GFSK)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-10.982	8	PASS
19	2440	-10.980	8	PASS
39	2480	-12.045	8	PASS

WORSE PLOT

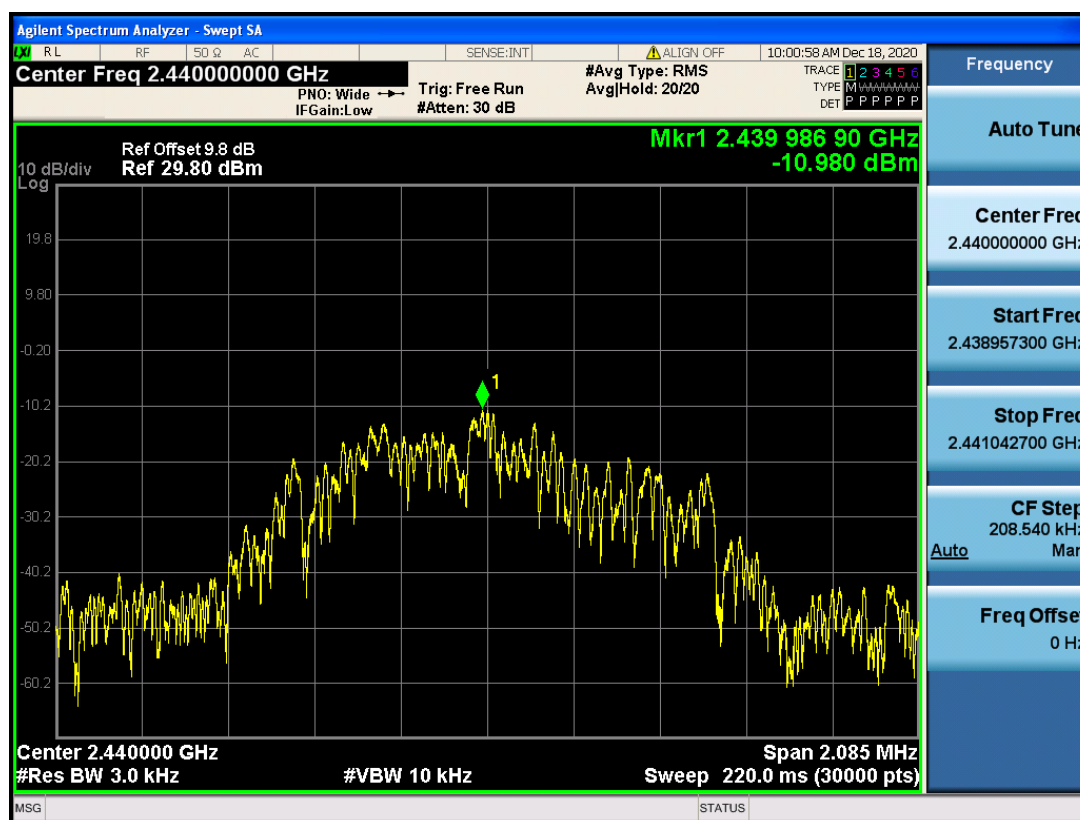


4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

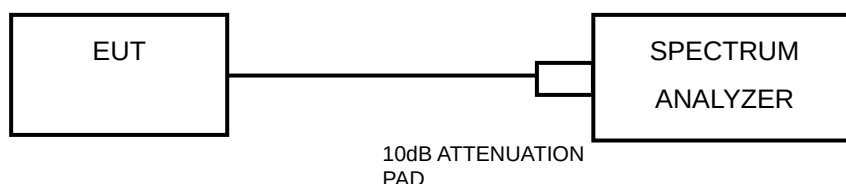

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




BUREAU
VERITAS

Test Report No.: RF2011WSZ0113-2

4.6.7 TEST RESULTS

BT-LE (GFSK)

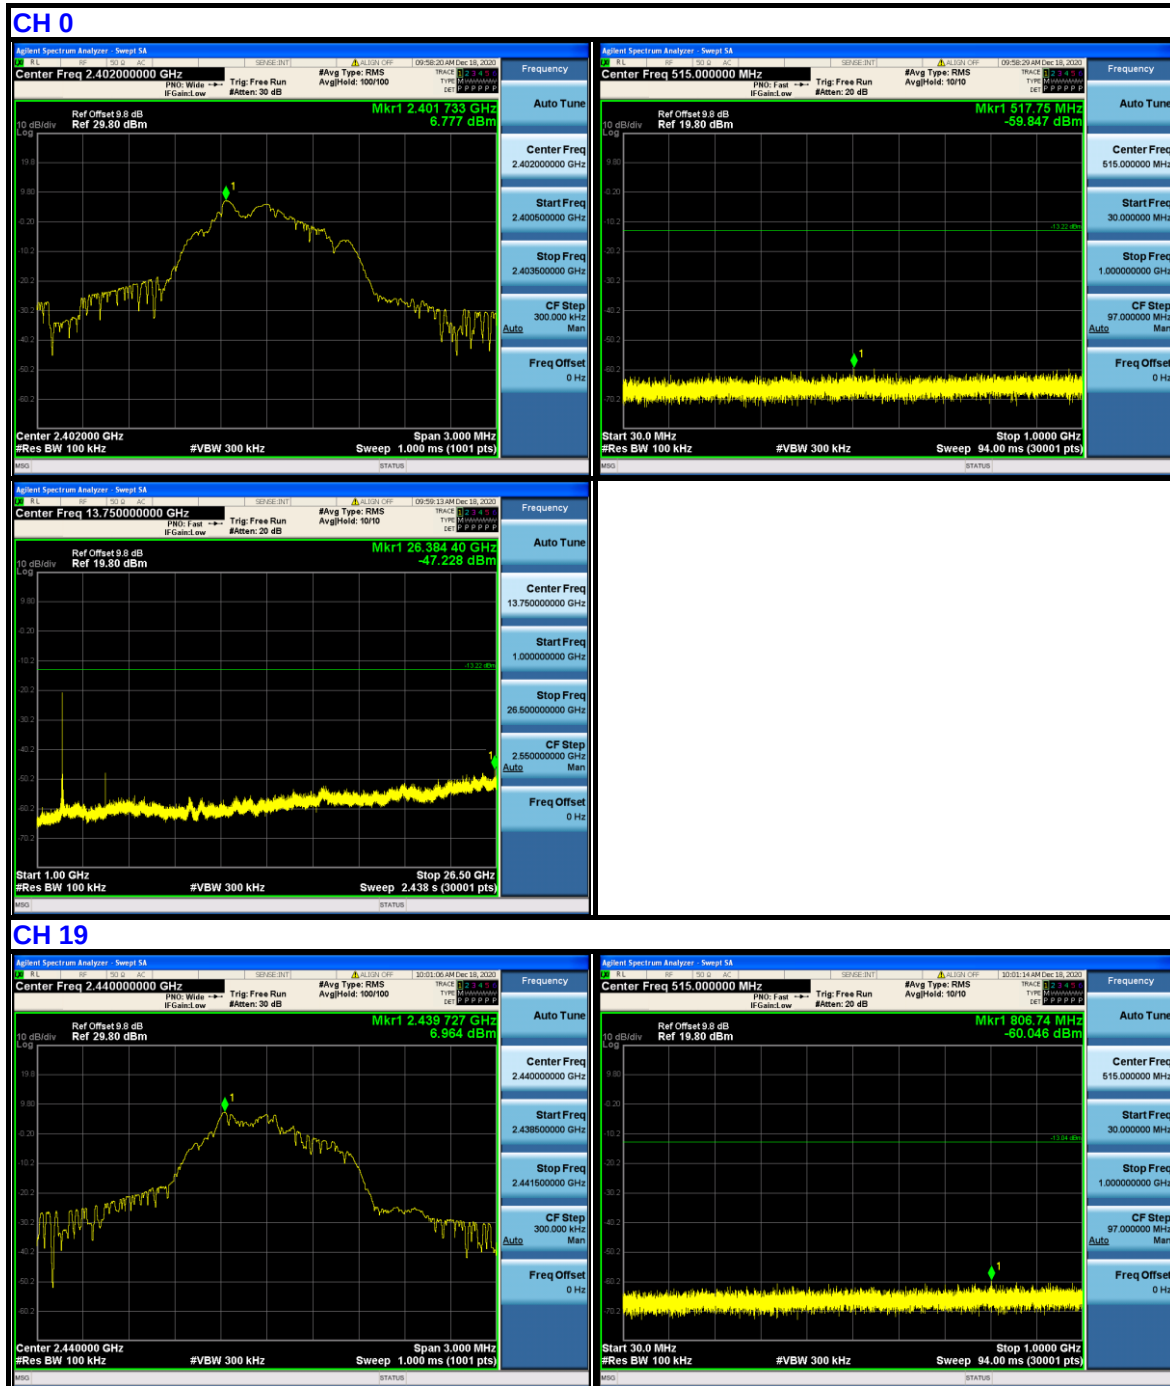

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com






BUREAU
VERITAS

Test Report No.: RF2011WSZ0113-2

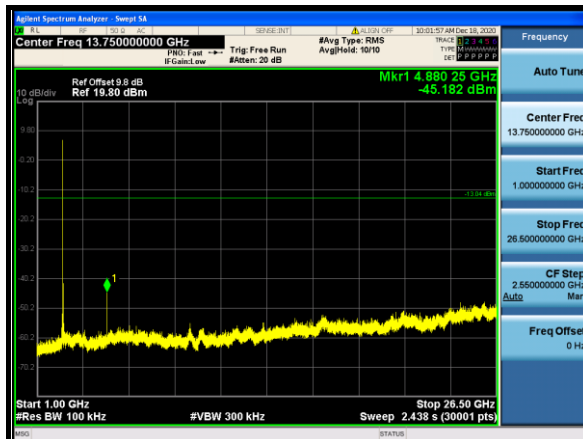

CH 39

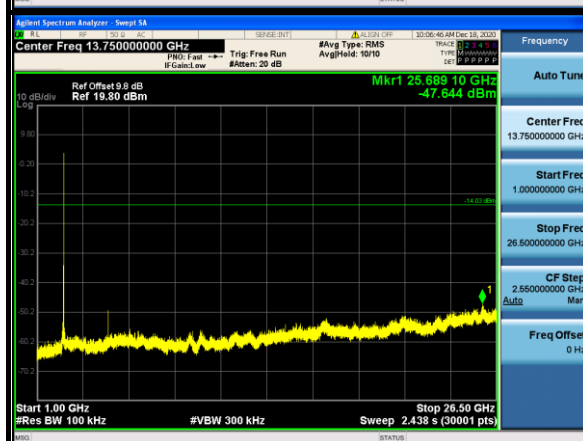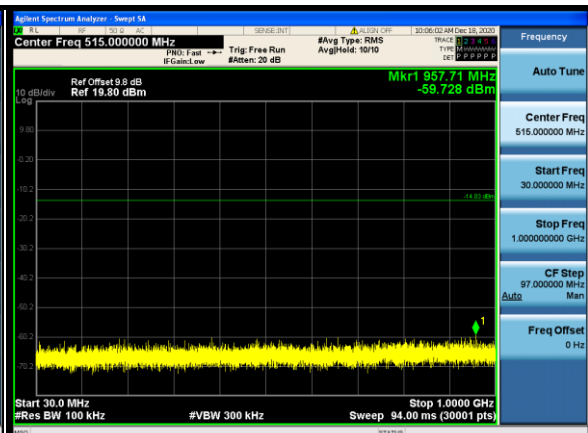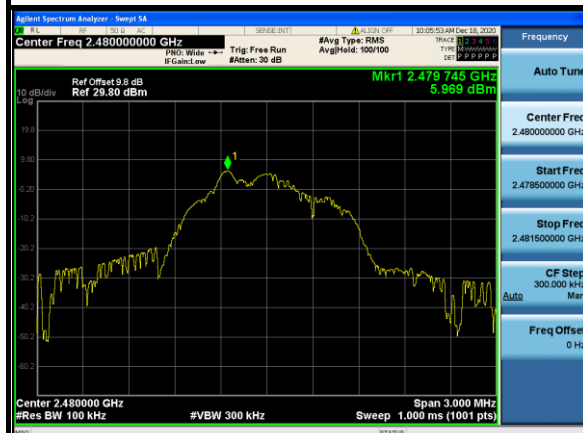


Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com

Band Edge:

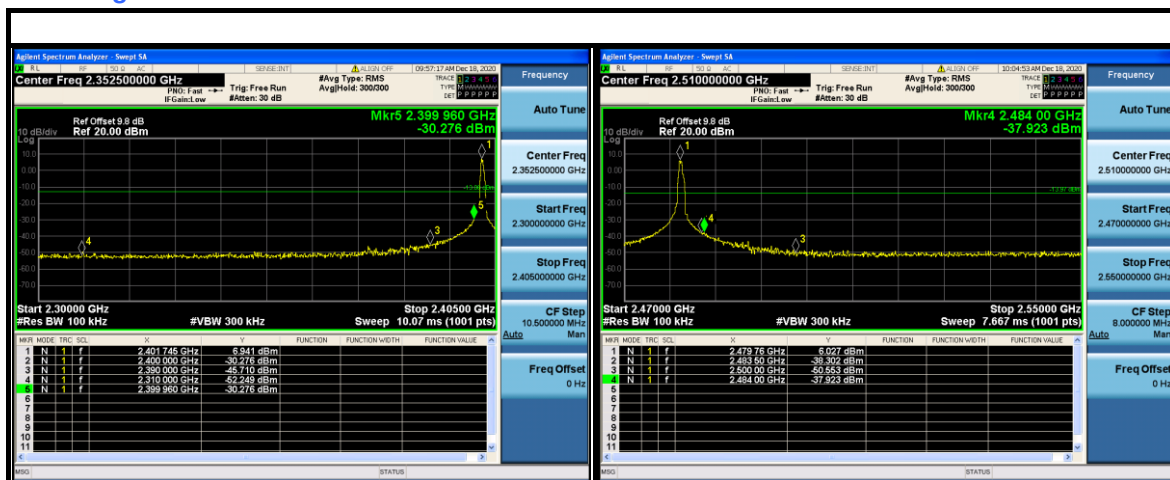



Test Report No.: RF2011WSZ0113-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---