

Conducted test results

No.1-8800-24-02-05_TR1-A201-R1

November 27, 2024

Test Standard(s)	FCC 15.247 - NI FCC 15.247, ISSED RSS247 - NI NA - NI
------------------	---

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski
Lab Manager
Radio Labs

Table of Content

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	3
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps	8
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	13
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps	24
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	35
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps	43
NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	51
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	57
FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps	62
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	67
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps	75

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	18.11.2024 22:26:39
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.53	dBm	INFO
Ref. frequency	---	---	2402.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.53 8.85 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

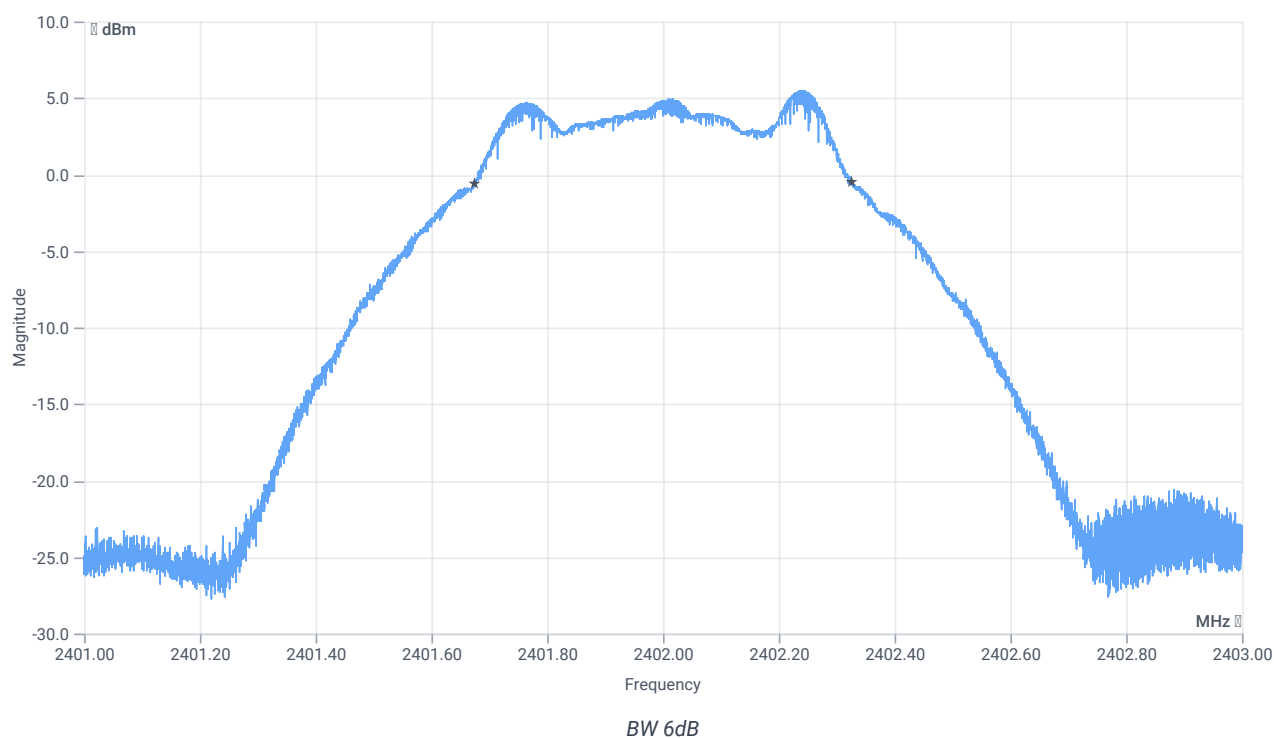

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	651	kHz	PASS


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.74	dBm	INFO
Ref. frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.74 8.94 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

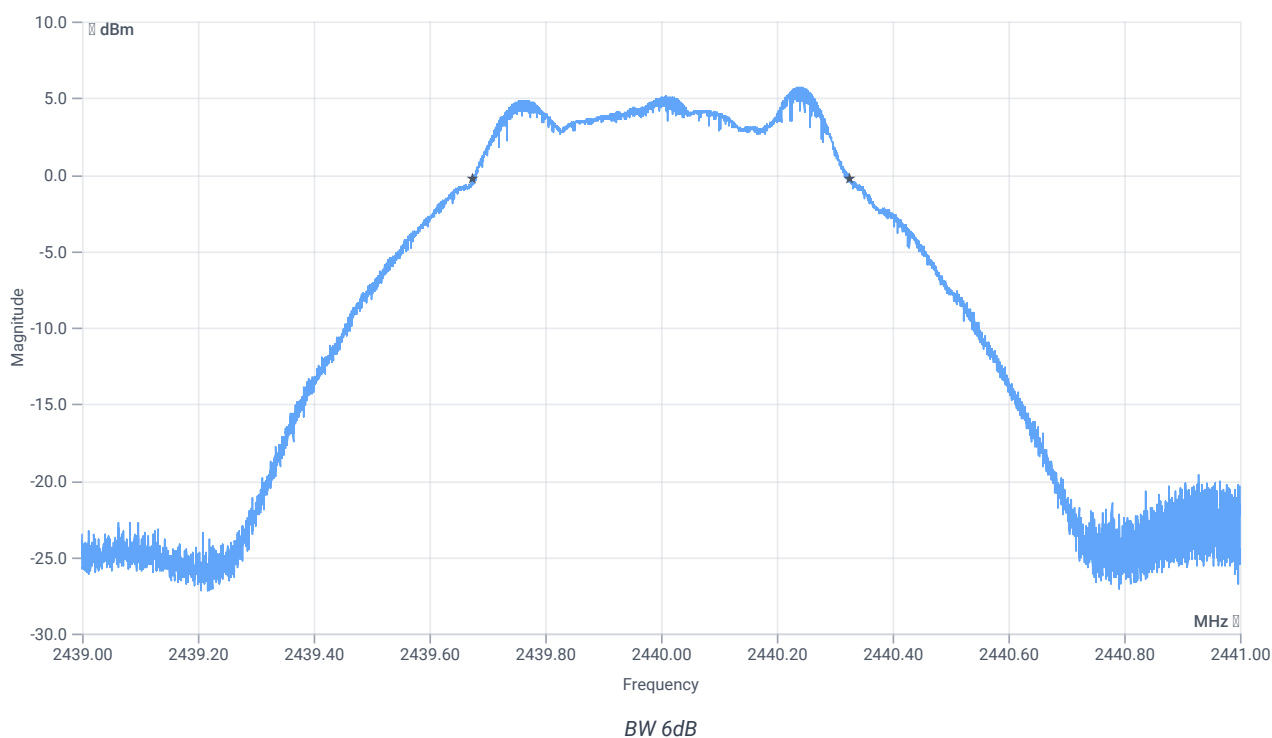

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	650	kHz	PASS


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.69	dBm	INFO
Ref. frequency	---	---	2480.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.31 9.03 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

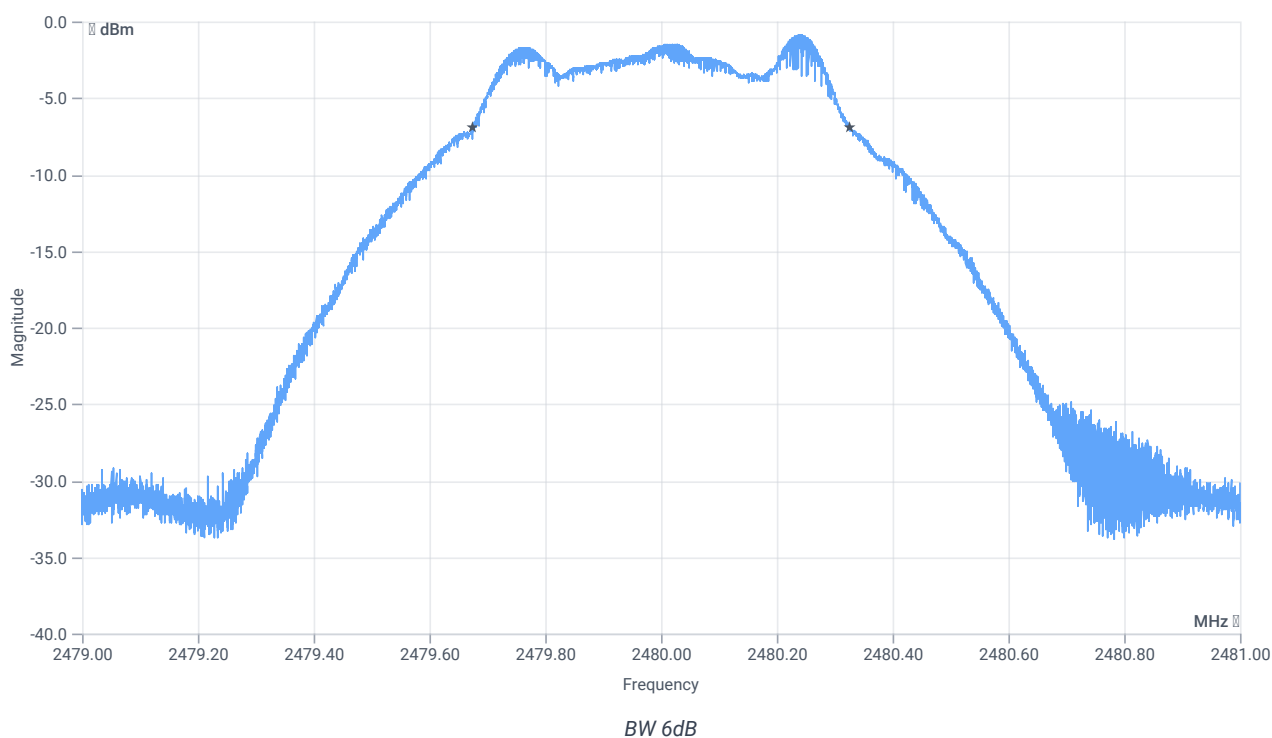

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	651	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps

References

TC start	18.11.2024 23:16:34
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2404 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.60	dBm	INFO
Ref. frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.60 8.86 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

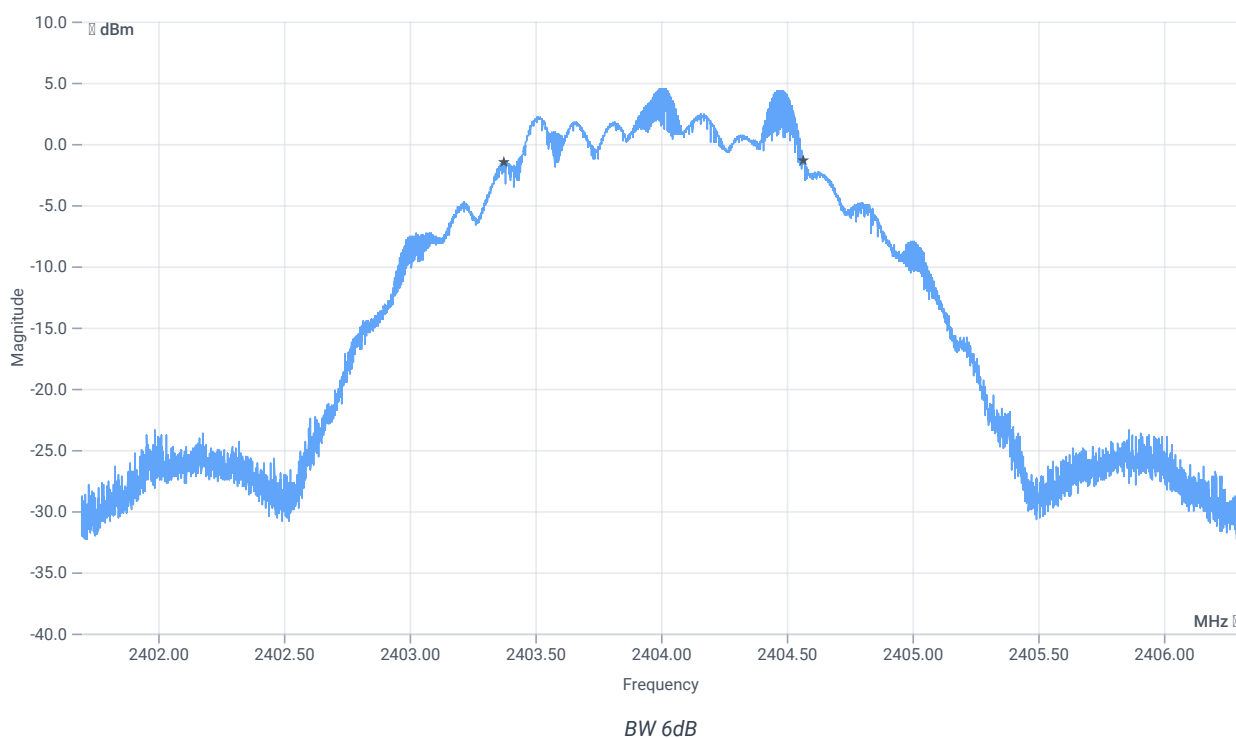

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	1192	kHz	PASS


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.83	dBm	INFO
Ref. frequency	---	---	2440.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.83 8.94 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

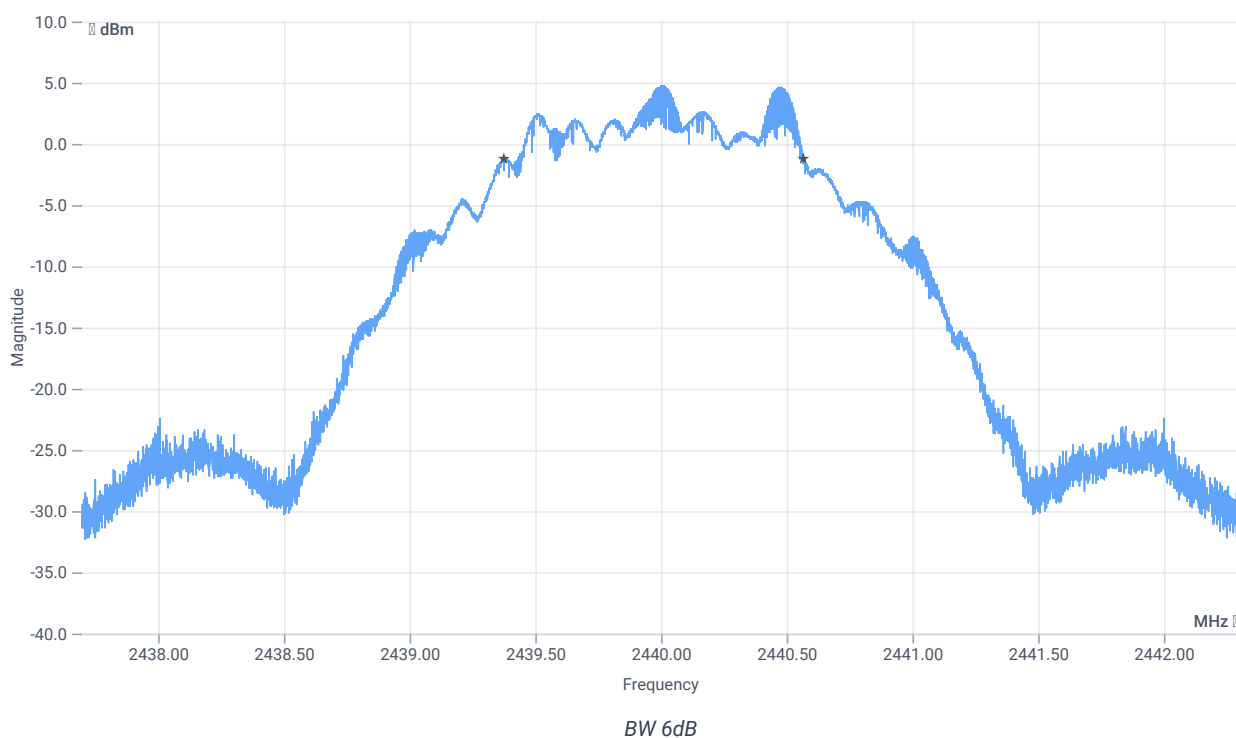

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	1189	kHz	PASS


Test at TX 2478 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.53	dBm	INFO
Ref. frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.53 9.03 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

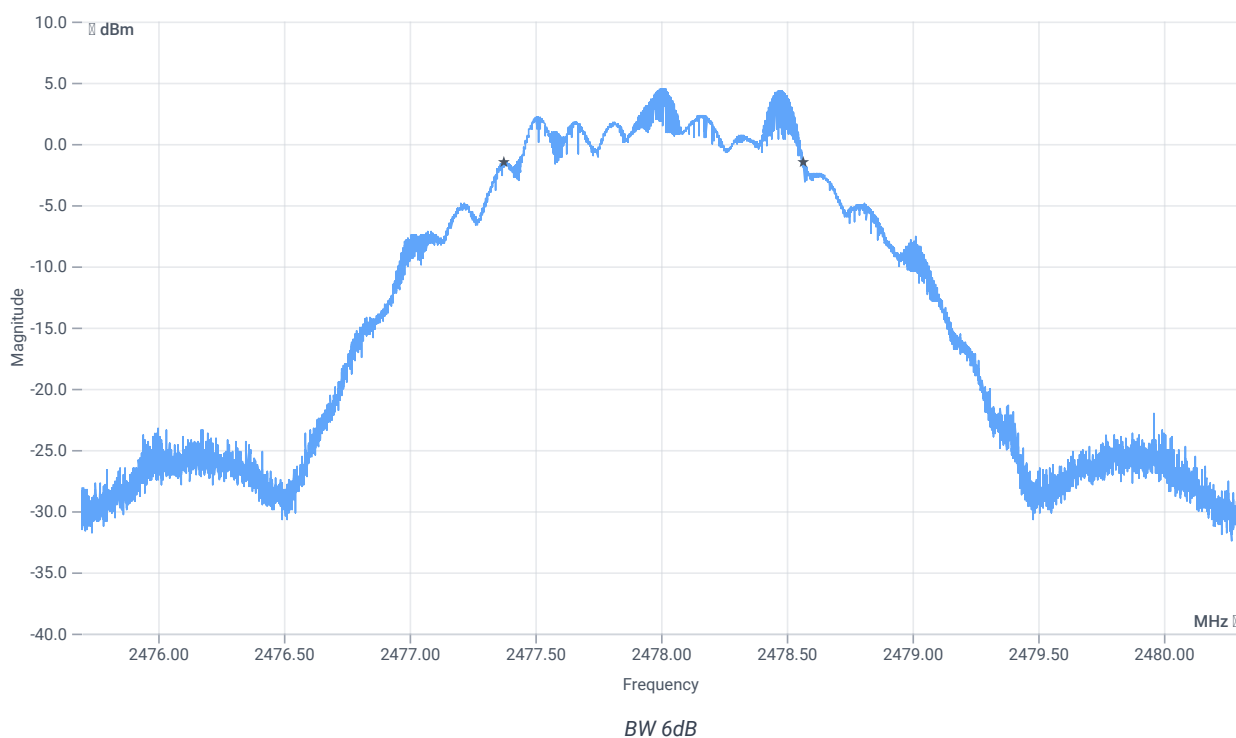

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	1190	kHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	18.11.2024 22:30:27
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.51	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.51 8.85 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

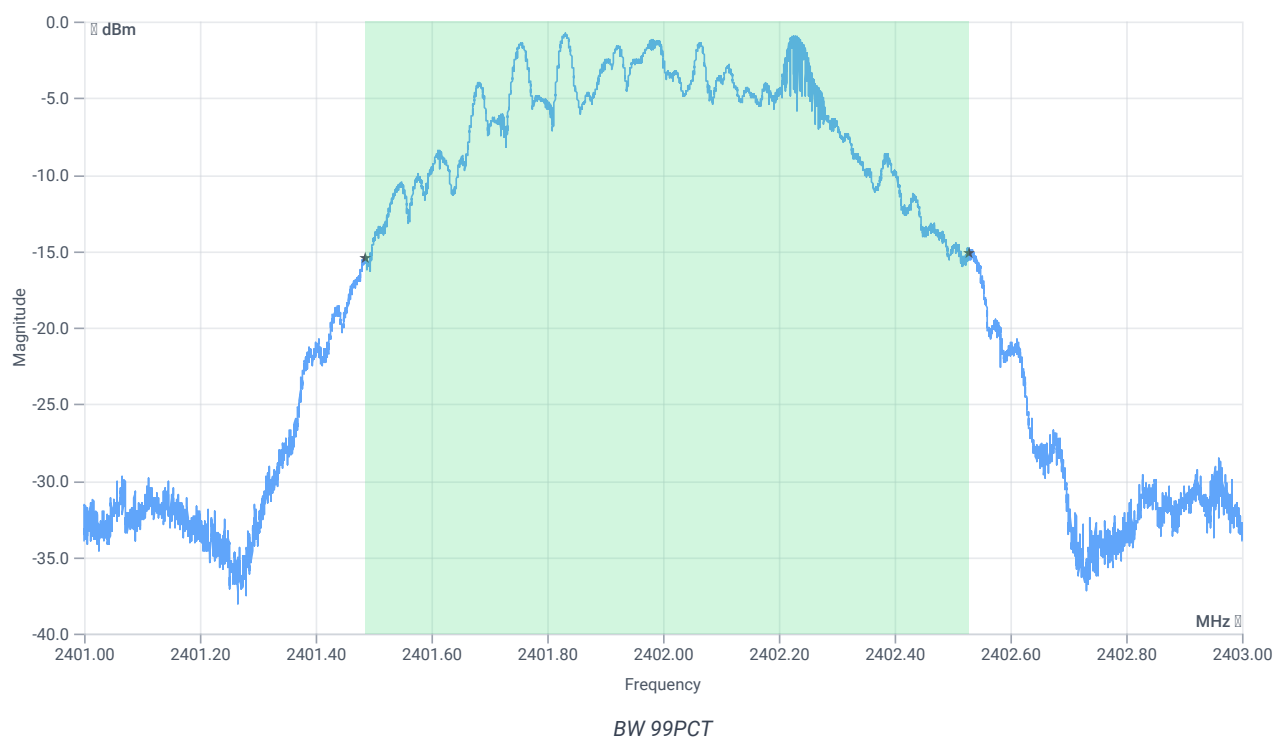


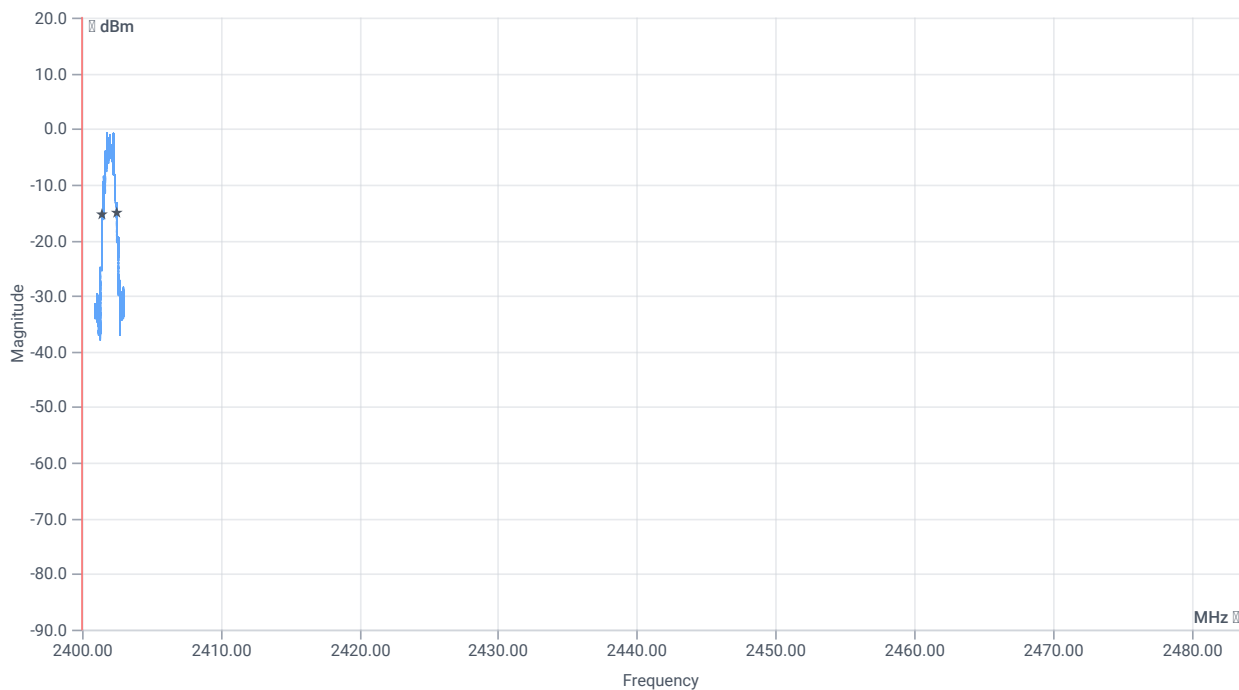


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1043.000	kHz	INFO
T1 99%	2400.000000	---	2401.4855	MHz	PASS
T2 99%	---	2483.500000	2402.5287	MHz	PASS

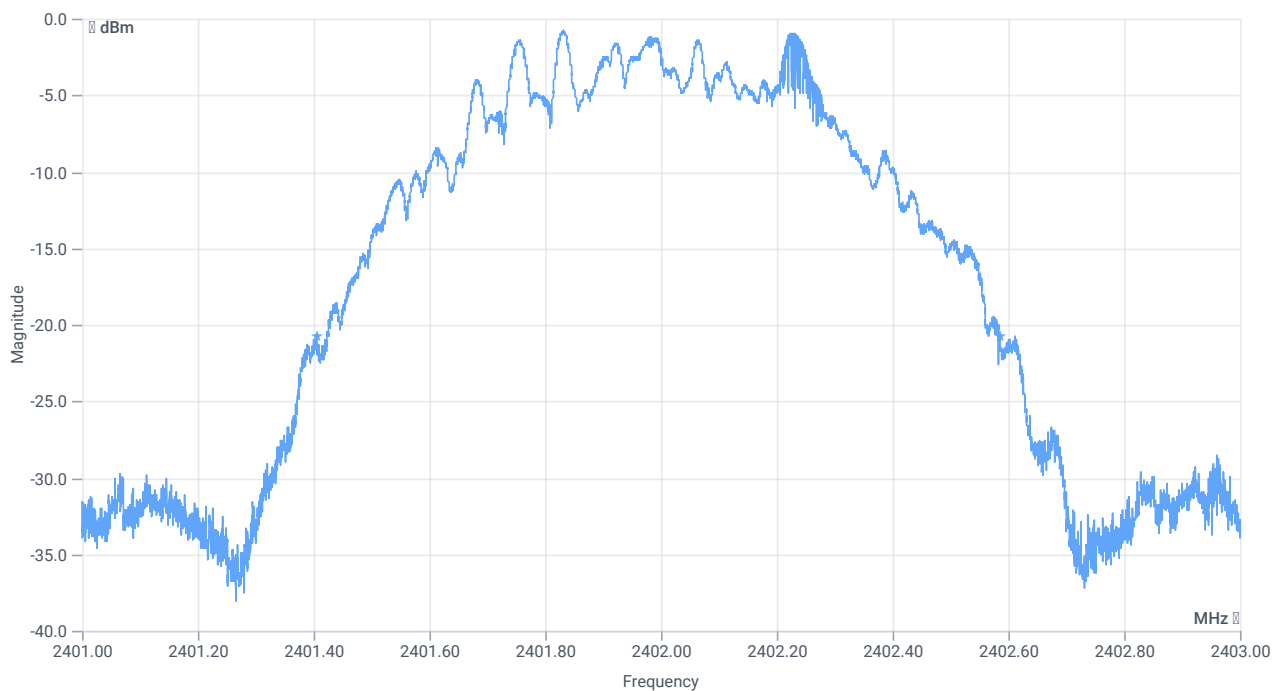

BW 20dB

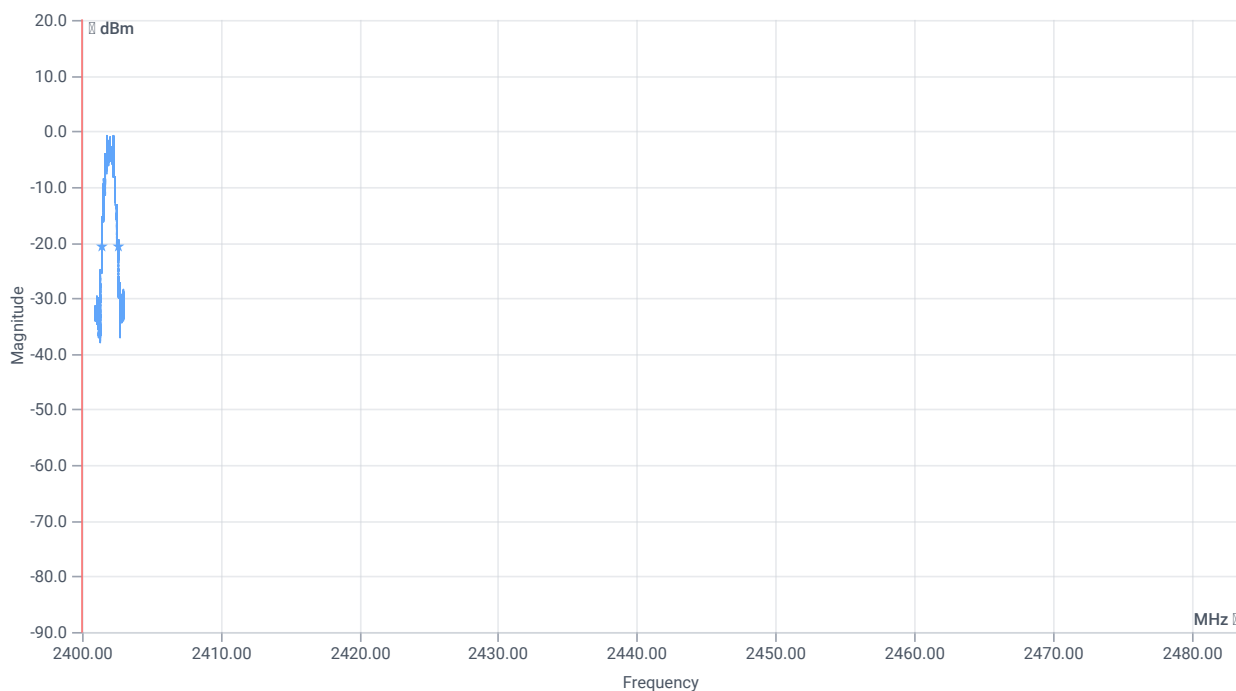

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1181	kHz	INFO
T1 20dB	2400.000000	---	2401.4046	MHz	PASS
T2 20dB	---	2483.500000	2402.5852	MHz	PASS


Test at TX 2440 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.74	dBm	INFO
Ref. frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.74 8.94 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

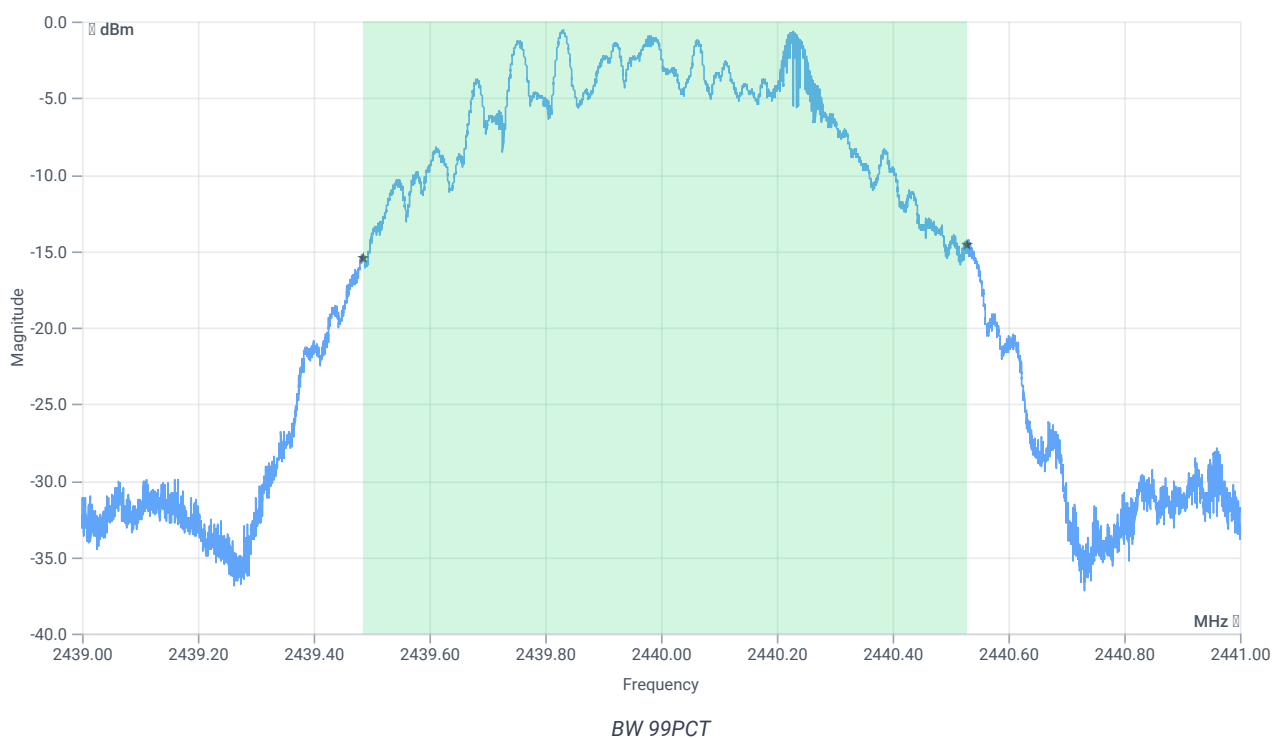


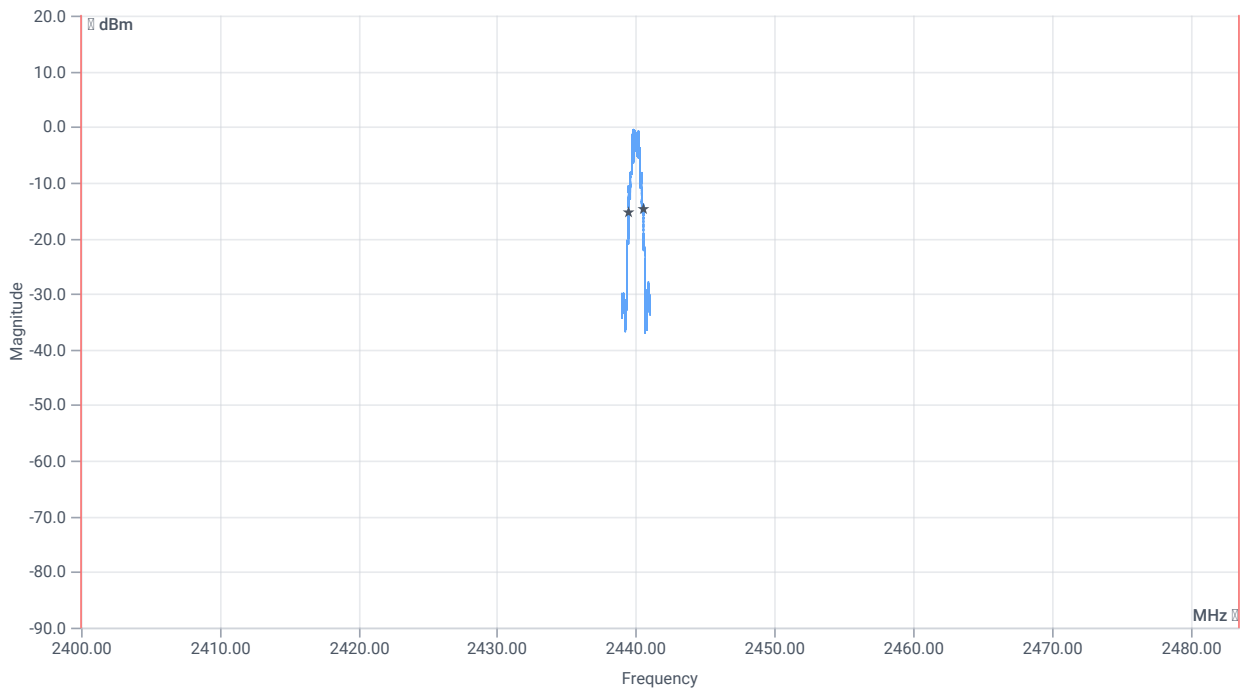


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1044.000	kHz	INFO
T1 99%	2400.000000	---	2439.4857	MHz	PASS
T2 99%	---	2483.500000	2440.5297	MHz	PASS

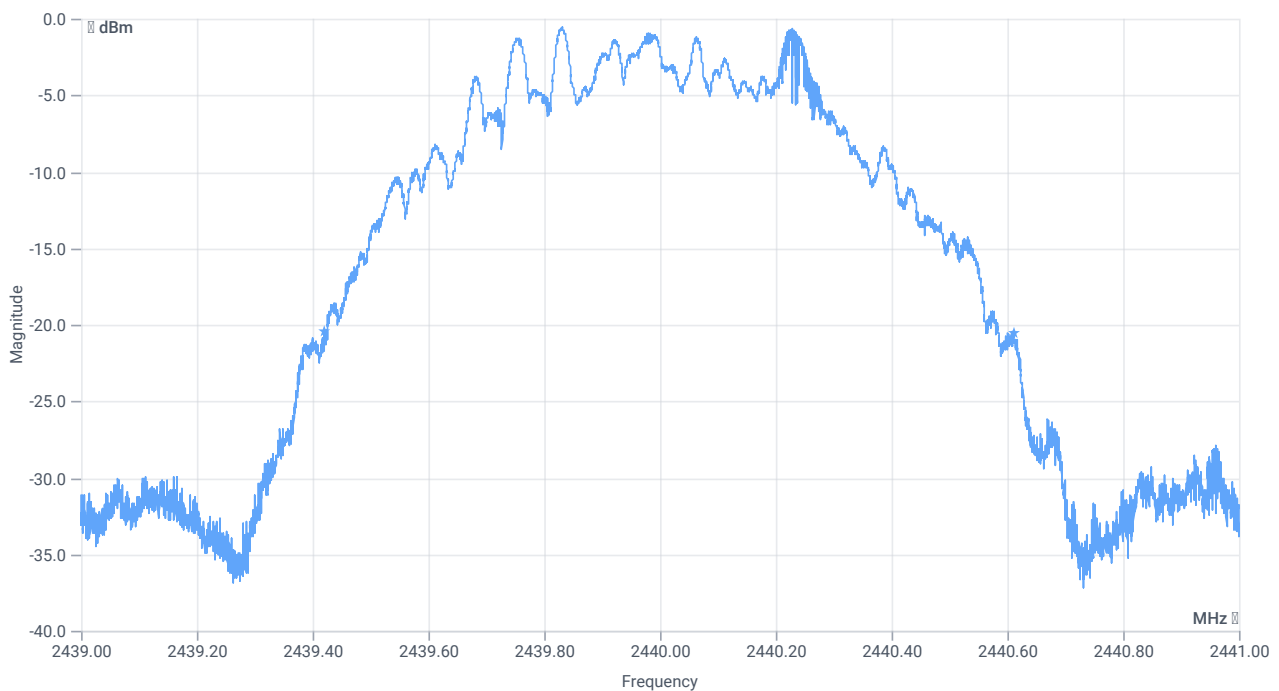

BW 20dB

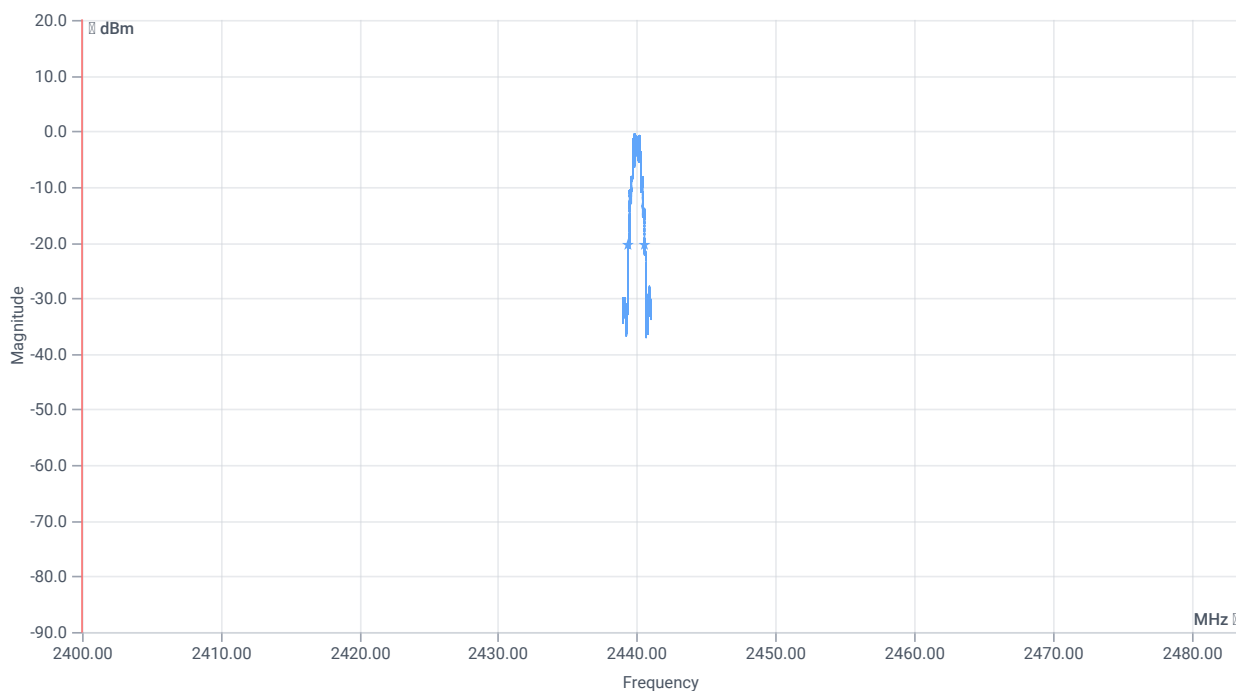

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1190	kHz	INFO
T1 20dB	2400.000000	---	2439.4212	MHz	PASS
T2 20dB	---	2483.500000	2440.6110	MHz	PASS


Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.71	dBm	INFO
Ref. frequency	---	---	2480.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.29 9.03 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

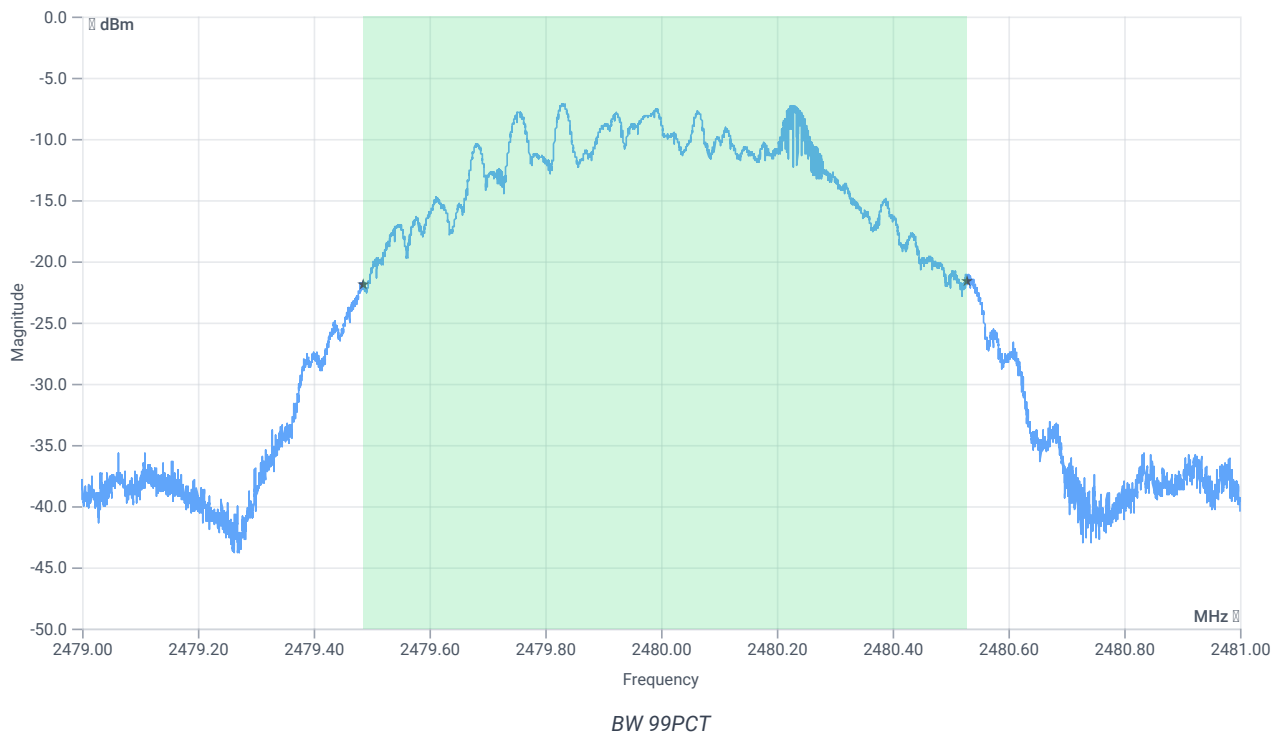


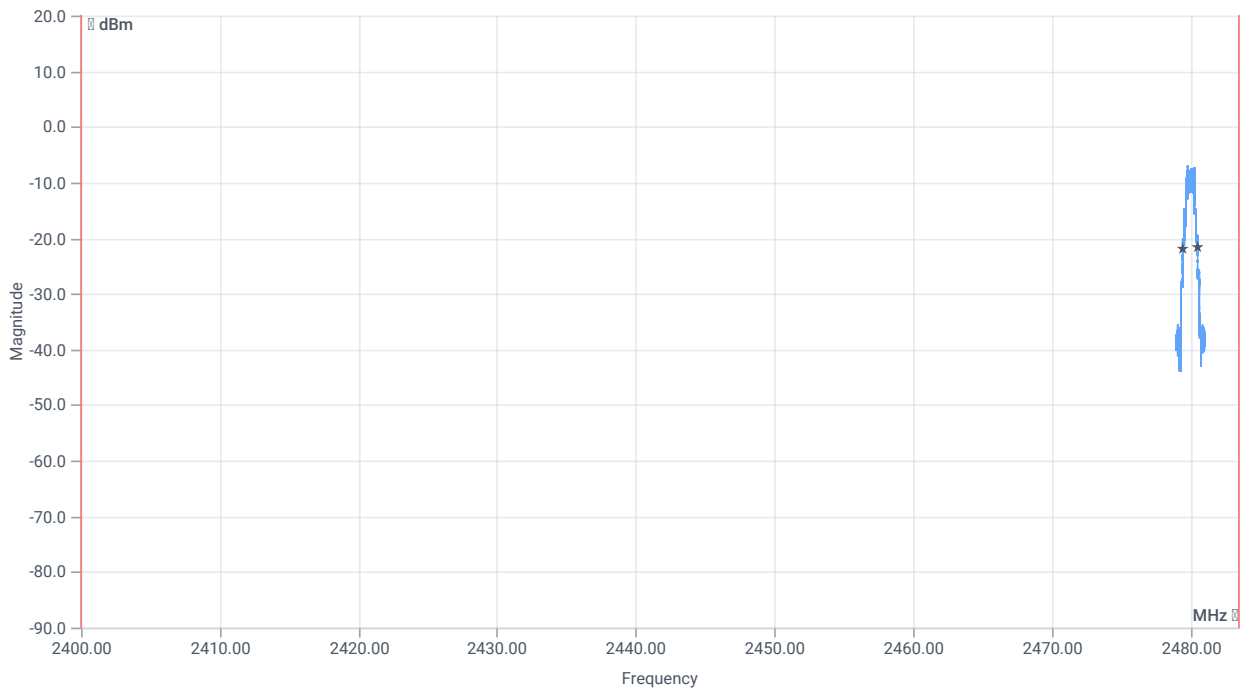


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1044.000	kHz	INFO
T1 99%	2400.000000	---	2479.4855	MHz	PASS
T2 99%	---	2483.500000	2480.5293	MHz	PASS

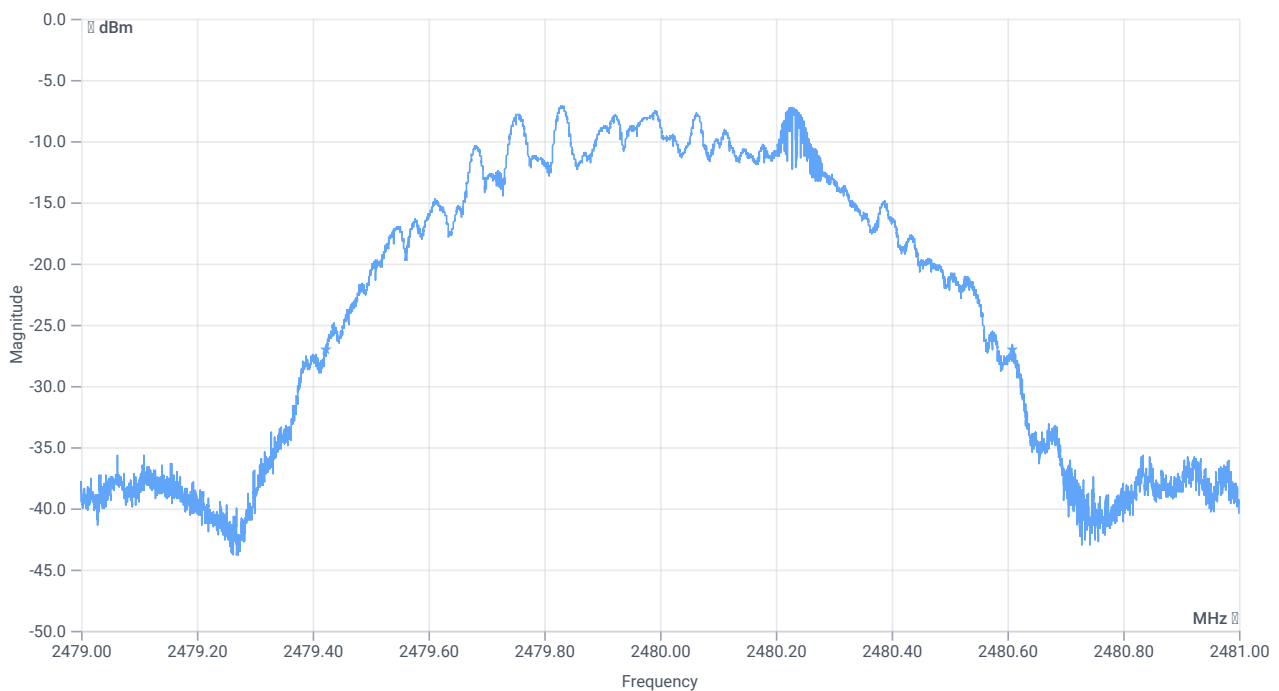

BW 20dB

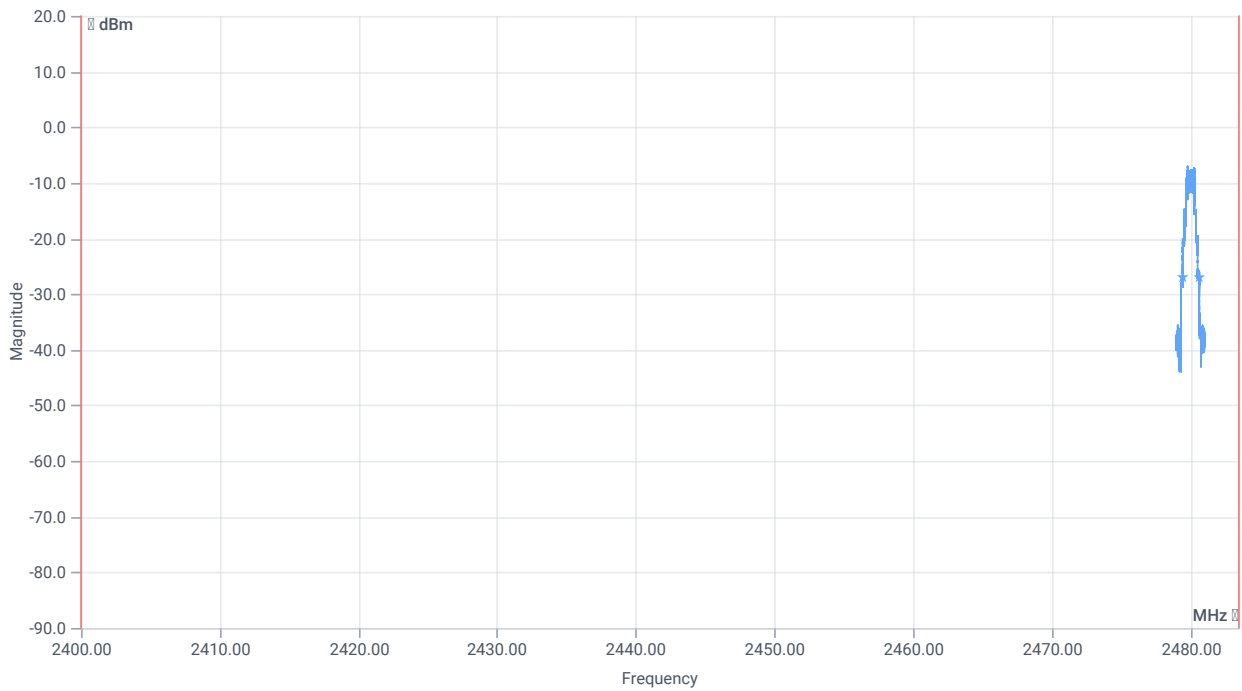

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1186	kHz	INFO
T1 20dB	2400.000000	---	2479.4228	MHz	PASS
T2 20dB	---	2483.500000	2480.6088	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps

References

TC start	18.11.2024 23:20:21
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2404 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.56	dBm	INFO
Ref. frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.56 8.86 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

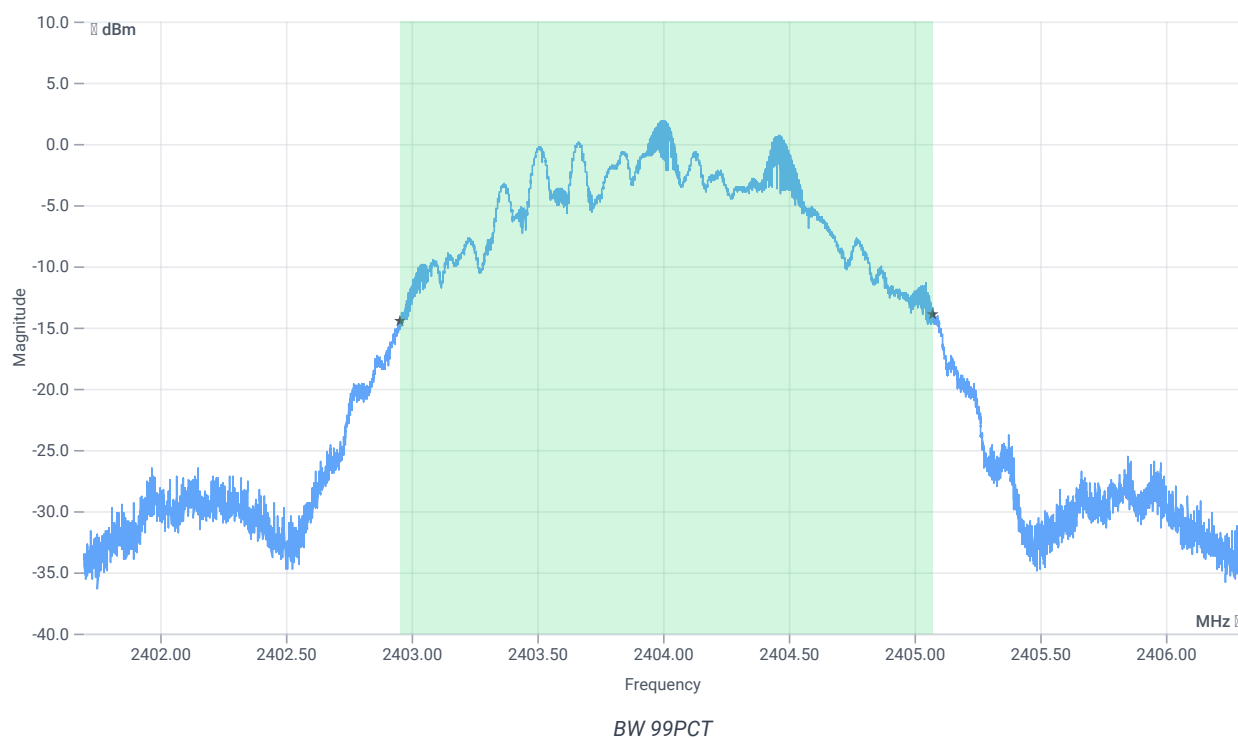


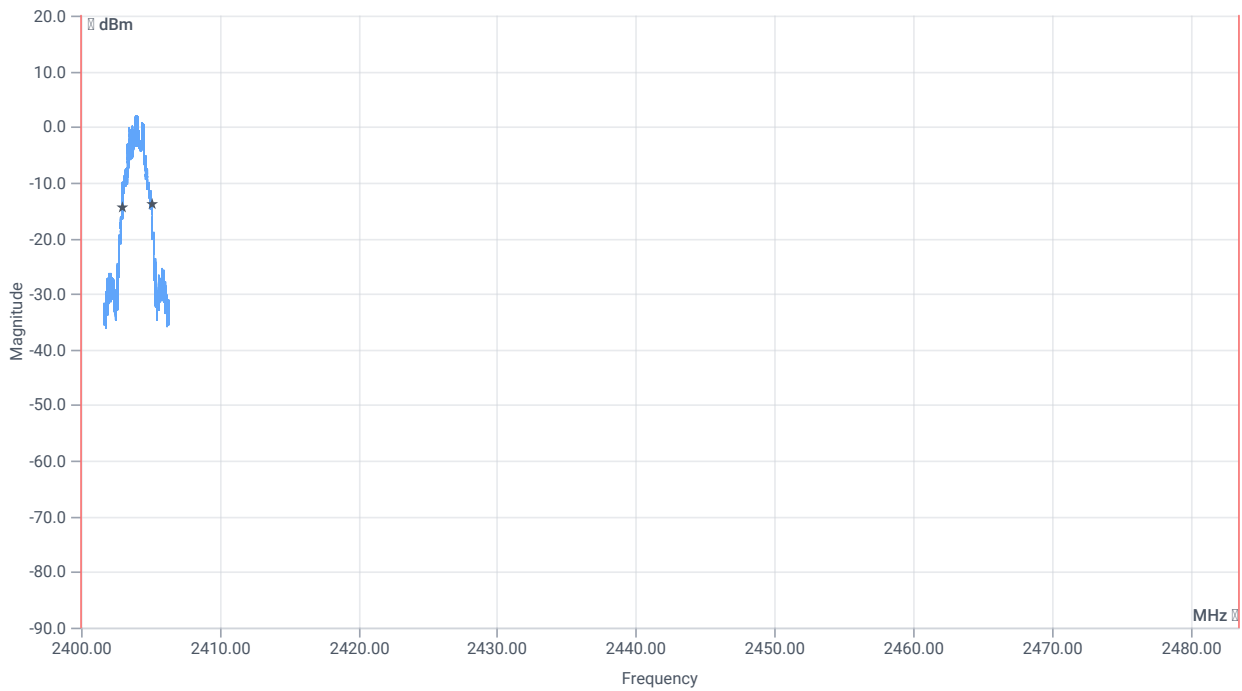


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2116.000	kHz	INFO
T1 99%	2400.000000	---	2402.9559	MHz	PASS
T2 99%	---	2483.500000	2405.0722	MHz	PASS

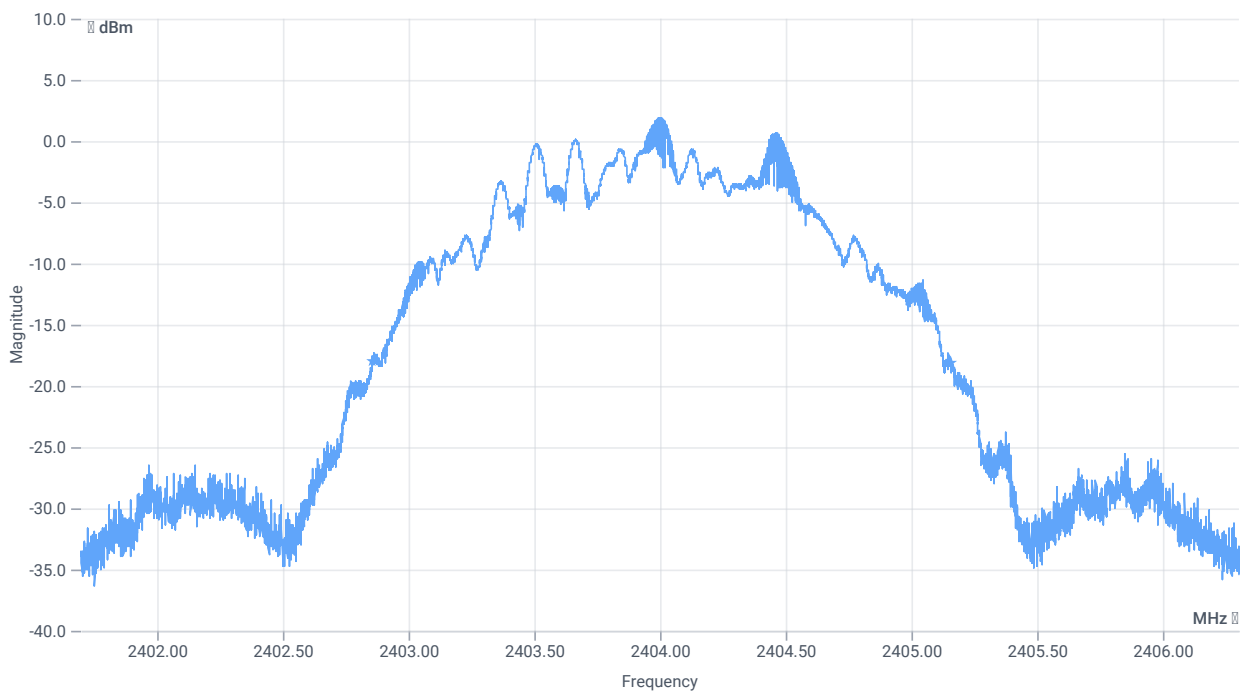

BW 20dB

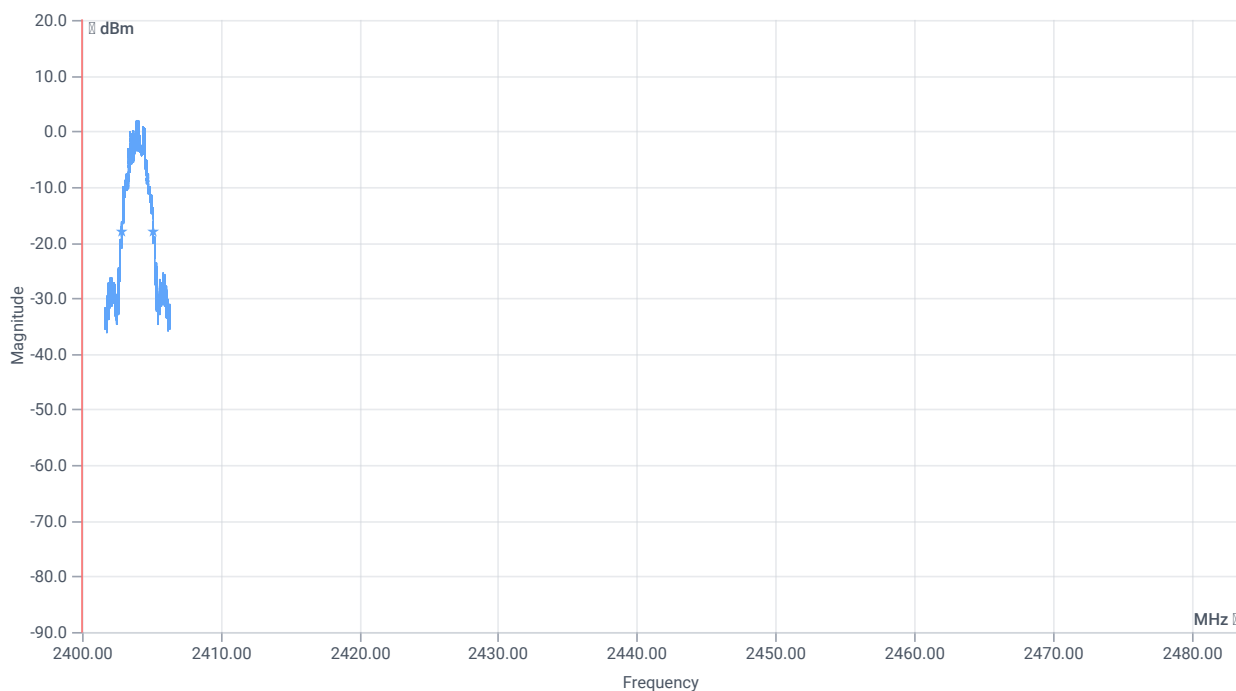

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2301	kHz	INFO
T1 20dB	2400.000000	---	2402.8555	MHz	PASS
T2 20dB	---	2483.500000	2405.1569	MHz	PASS


Test at TX 2440 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.82	dBm	INFO
Ref. frequency	---	---	2440.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.82 8.94 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

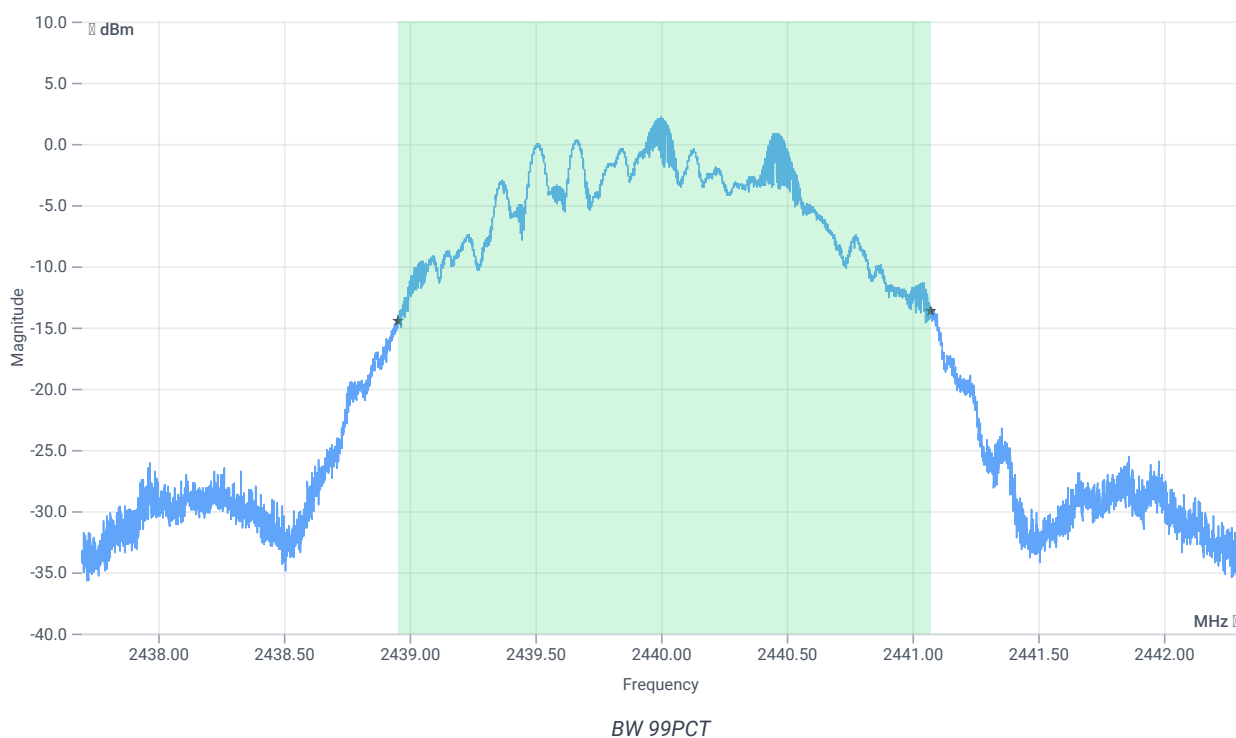


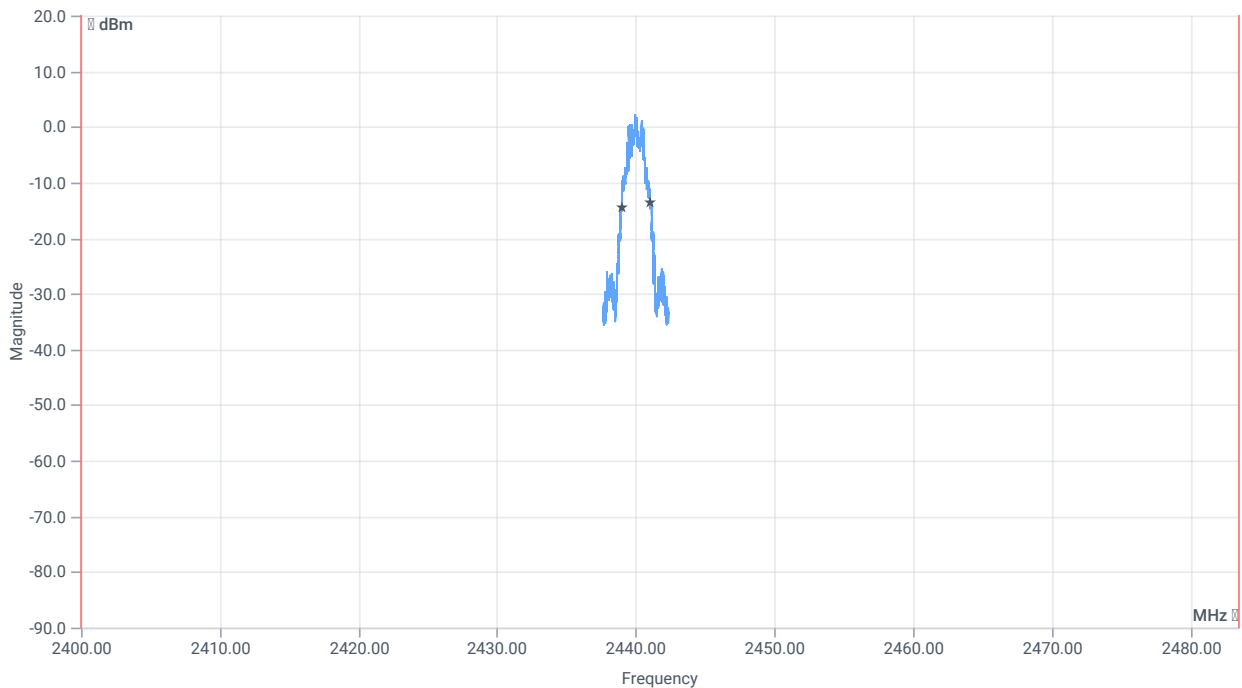

BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2118.000	kHz	INFO
T1 99%	2400.000000	---	2438.9550	MHz	PASS
T2 99%	---	2483.500000	2441.0731	MHz	PASS

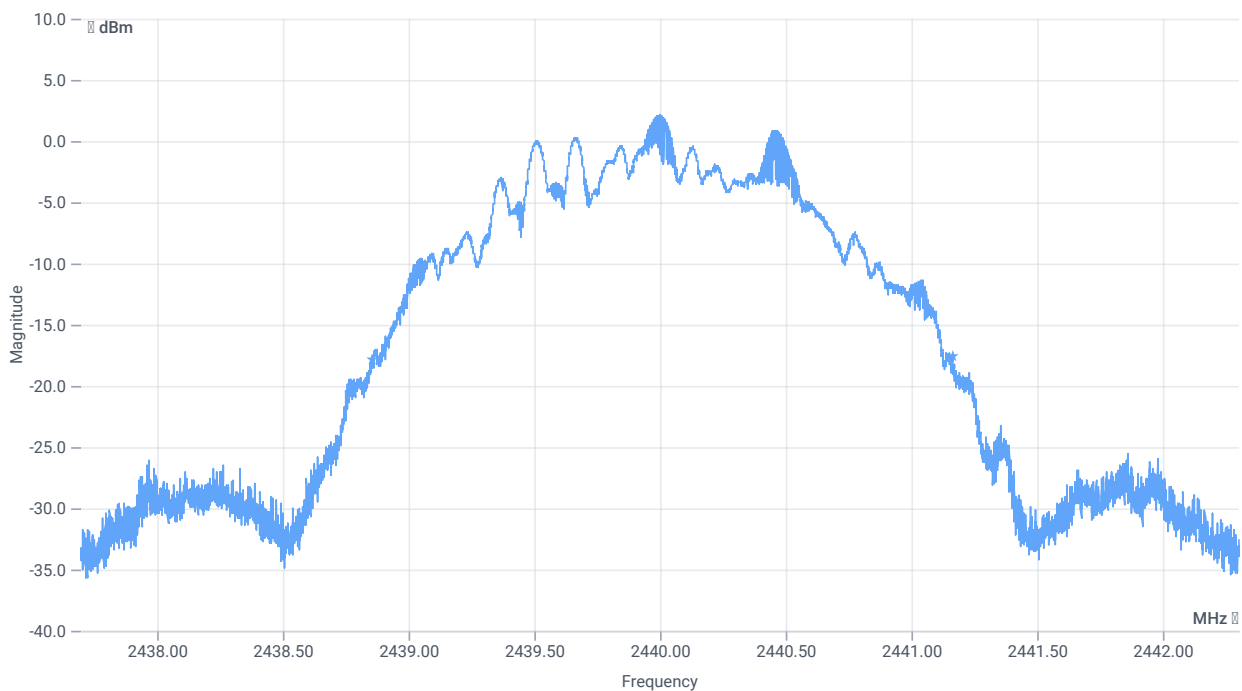

BW 20dB



BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2306	kHz	INFO
T1 20dB	2400.000000	---	2438.8551	MHz	PASS
T2 20dB	---	2483.500000	2441.1615	MHz	PASS


Test at TX 2478 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.54	dBm	INFO
Ref. frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.54 9.03 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

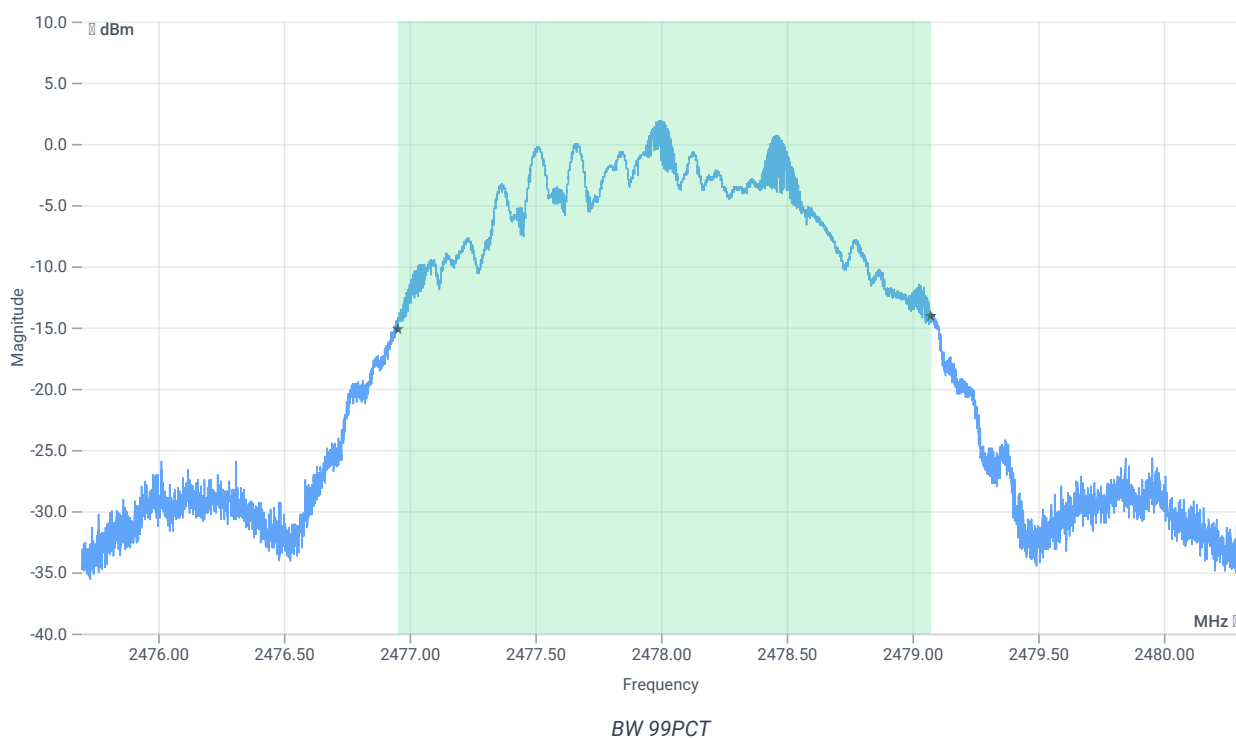


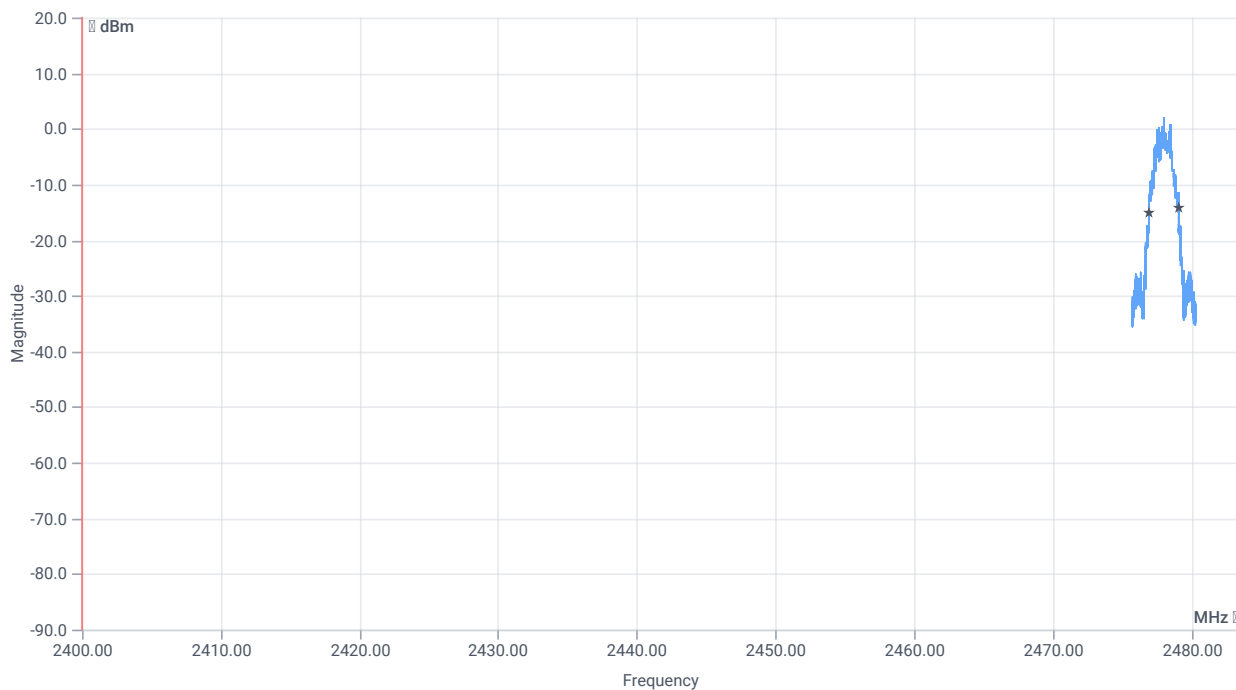


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2119.000	kHz	INFO
T1 99%	2400.000000	---	2476.9527	MHz	PASS
T2 99%	---	2483.500000	2479.0722	MHz	PASS

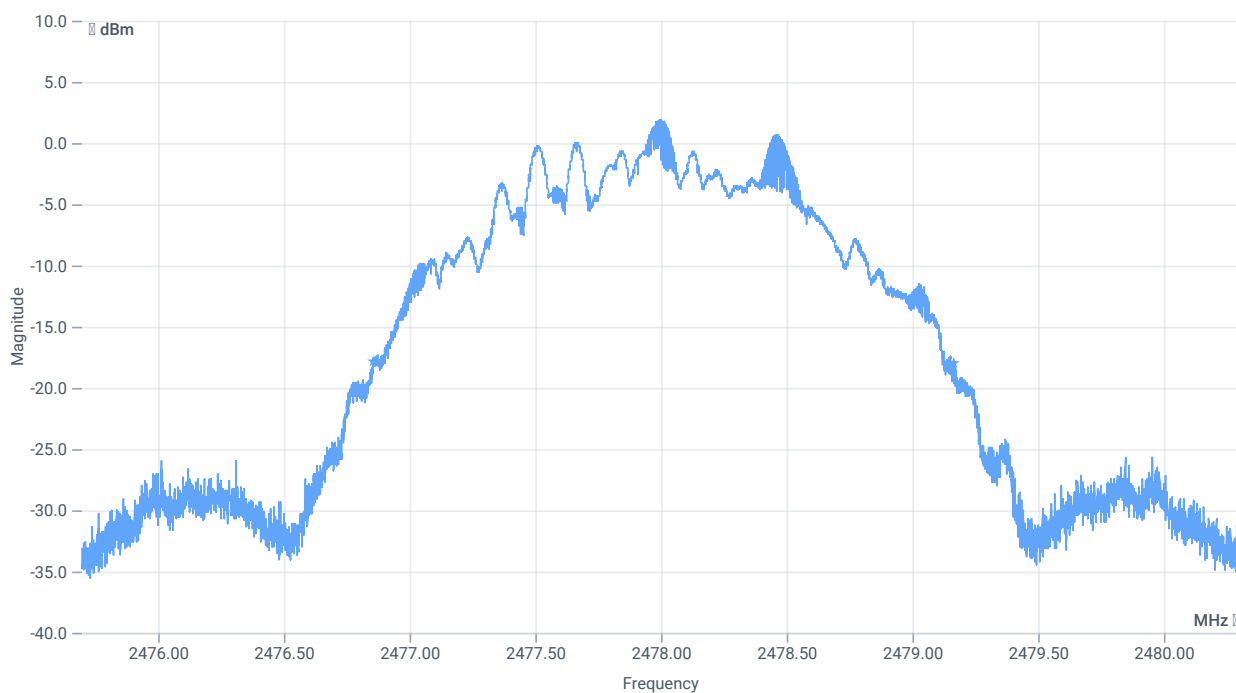

BW 20dB

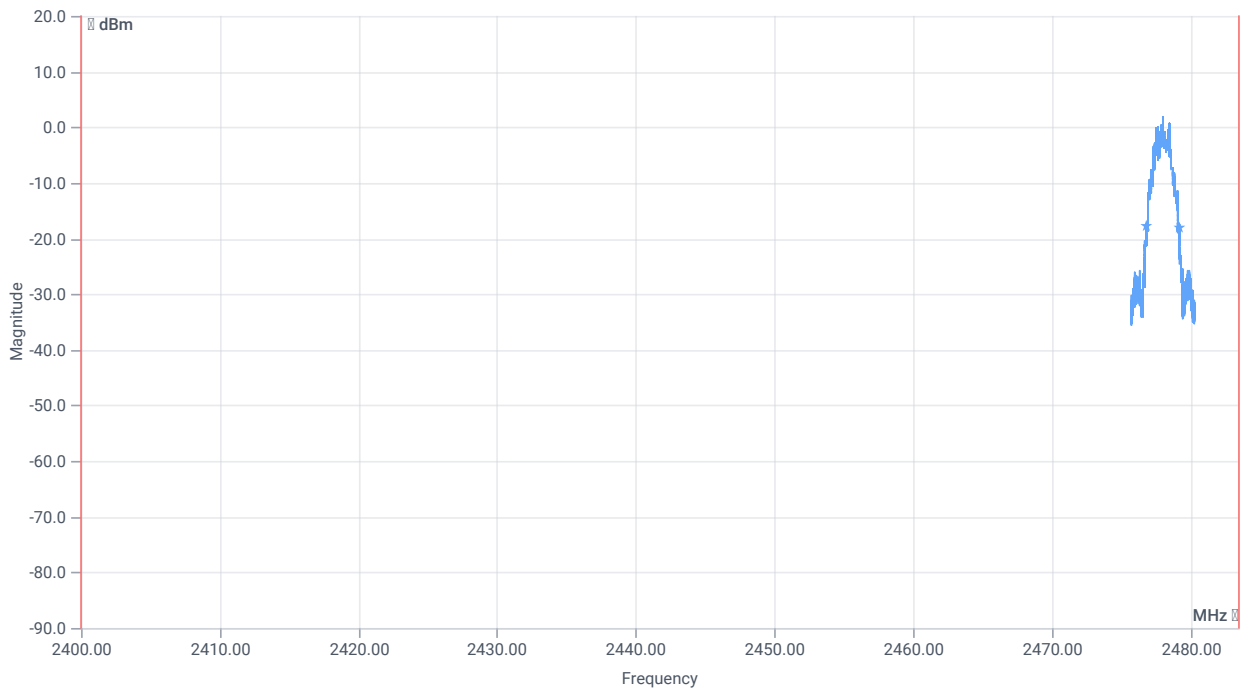

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2304	kHz	INFO
T1 20dB	2400.000000	---	2476.8592	MHz	PASS
T2 20dB	---	2483.500000	2479.1629	MHz	PASS

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	18.11.2024 22:24:21
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum peak output power conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	Yes No

Test Parameter

Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MPSIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.51	dBm	INFO
Ref. frequency	---	---	2402.300	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.51 8.85 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	650	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.51 8.85 25
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

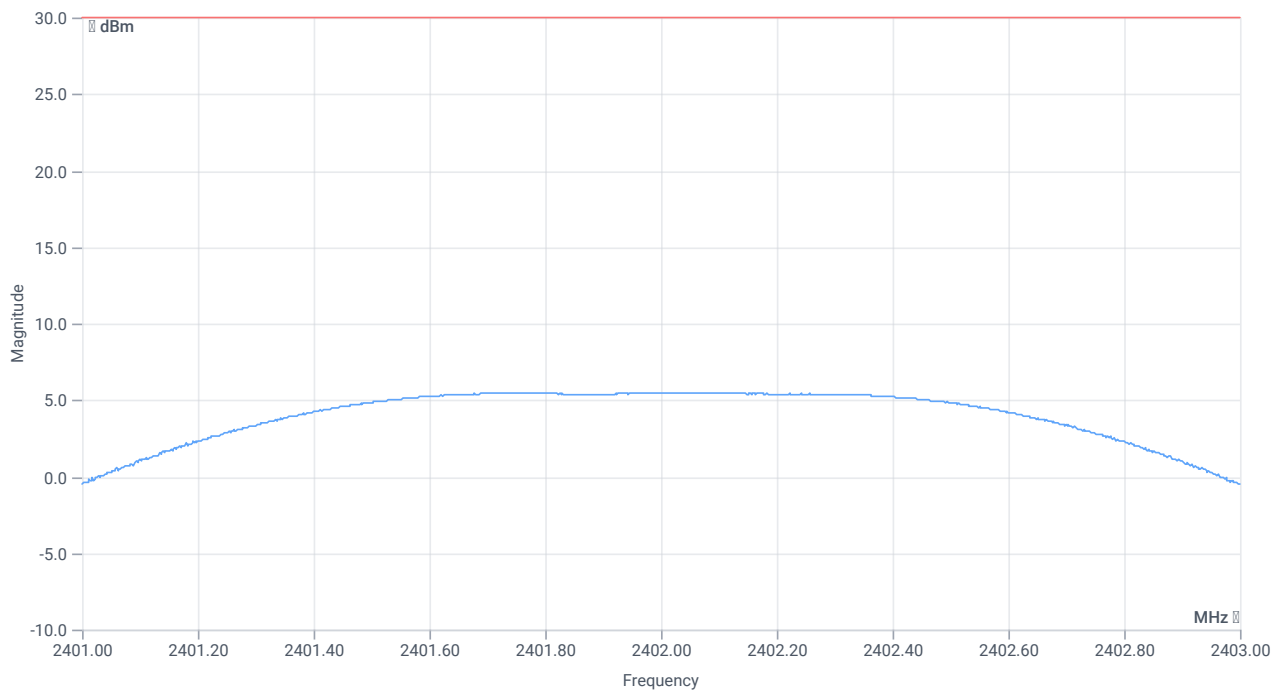

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	5.49	dBm	PASS
Peak power	---	1000	3.539973	mW	PASS
Frequency at peak	---	---	2402.01	MHz	INFO

Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.78	dBm	INFO
Ref. frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.78 8.94 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	650	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.78 8.94 25
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

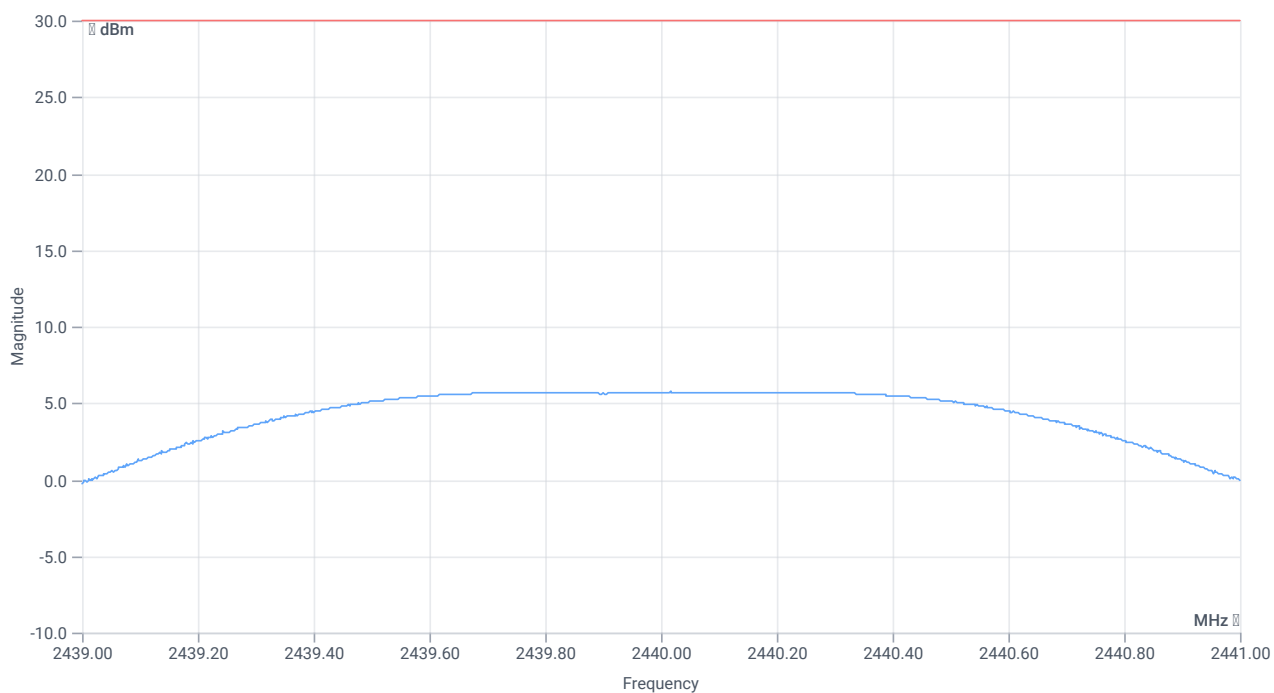

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	5.73	dBm	PASS
Peak power	---	1000	3.741106	mW	PASS
Frequency at peak	---	---	2440.016	MHz	INFO

Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.75	dBm	INFO
Ref. frequency	---	---	2480.300	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.25 9.03 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	649	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.25 9.03 20
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

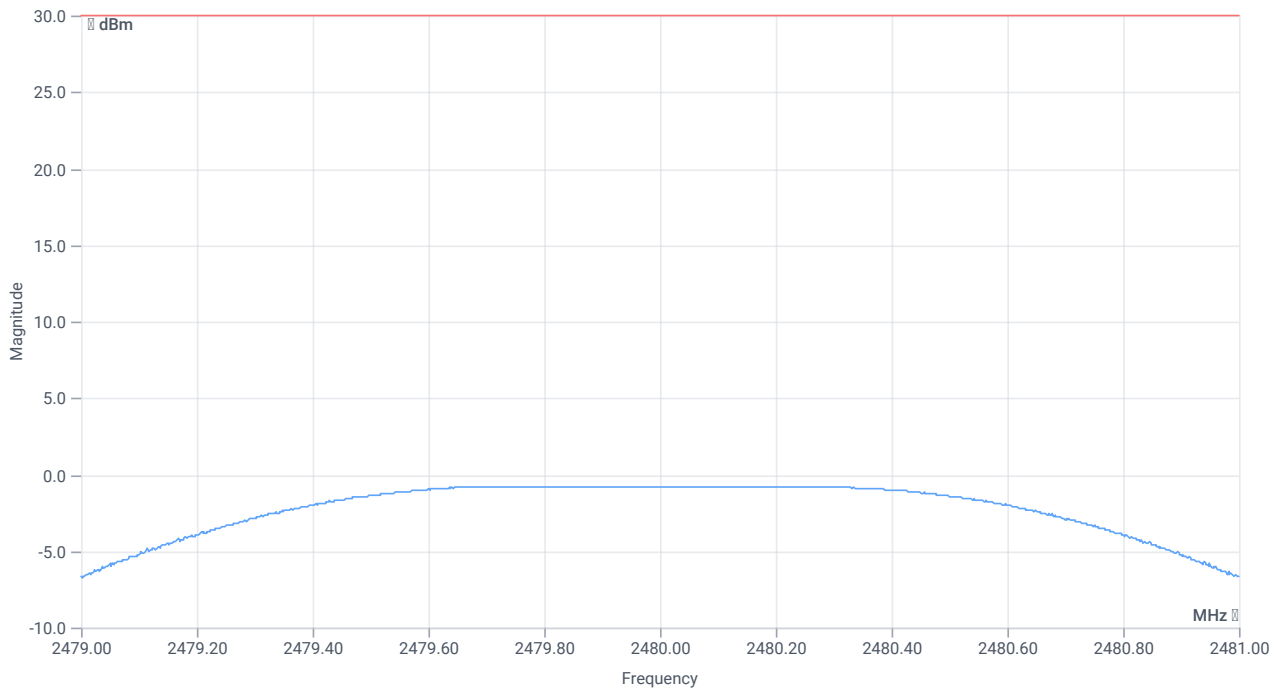

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-0.77	dBm	PASS
Peak power	---	1000	0.837529	mW	PASS
Frequency at peak	---	---	2479.742	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps

References

TC start	18.11.2024 23:14:16
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum peak output power conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	Yes No

Test Parameter

Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2404 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.59	dBm	INFO
Ref. frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.59 8.86 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	1195	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.59 8.86 25
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

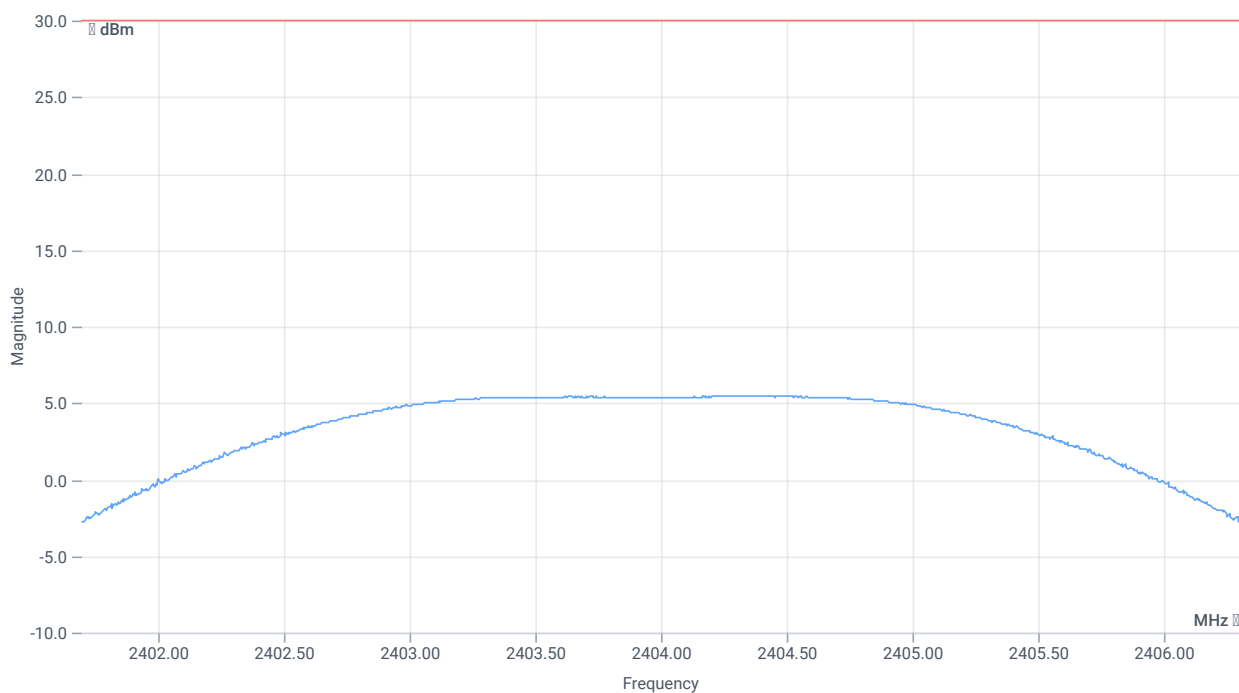

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	5.48	dBm	PASS
Peak power	---	1000	3.531832	mW	PASS
Frequency at peak	---	---	2404.345	MHz	INFO

Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.80	dBm	INFO
Ref. frequency	---	---	2440.500	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.80 8.94 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	1184	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.80 8.94 25
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

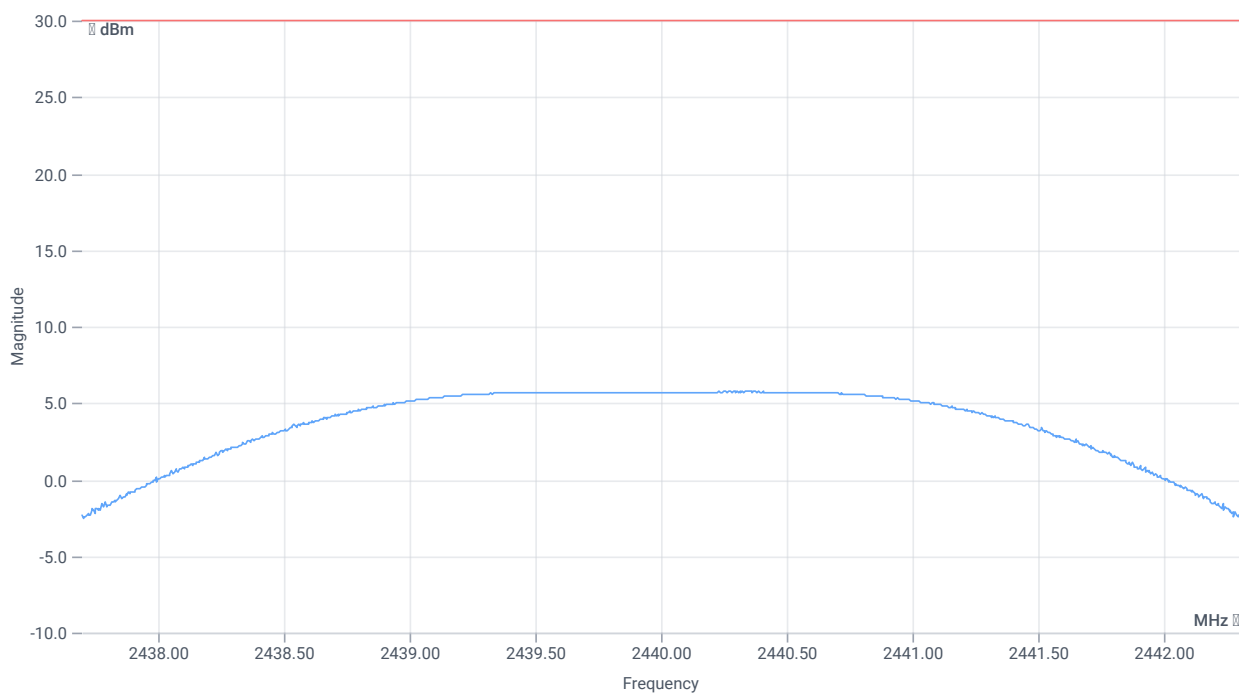

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	5.75	dBm	PASS
Peak power	---	1000	3.758374	mW	PASS
Frequency at peak	---	---	2440.29	MHz	INFO

Test at TX 2478 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.48	dBm	INFO
Ref. frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.48 9.03 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	1196	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.48 9.03 25
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

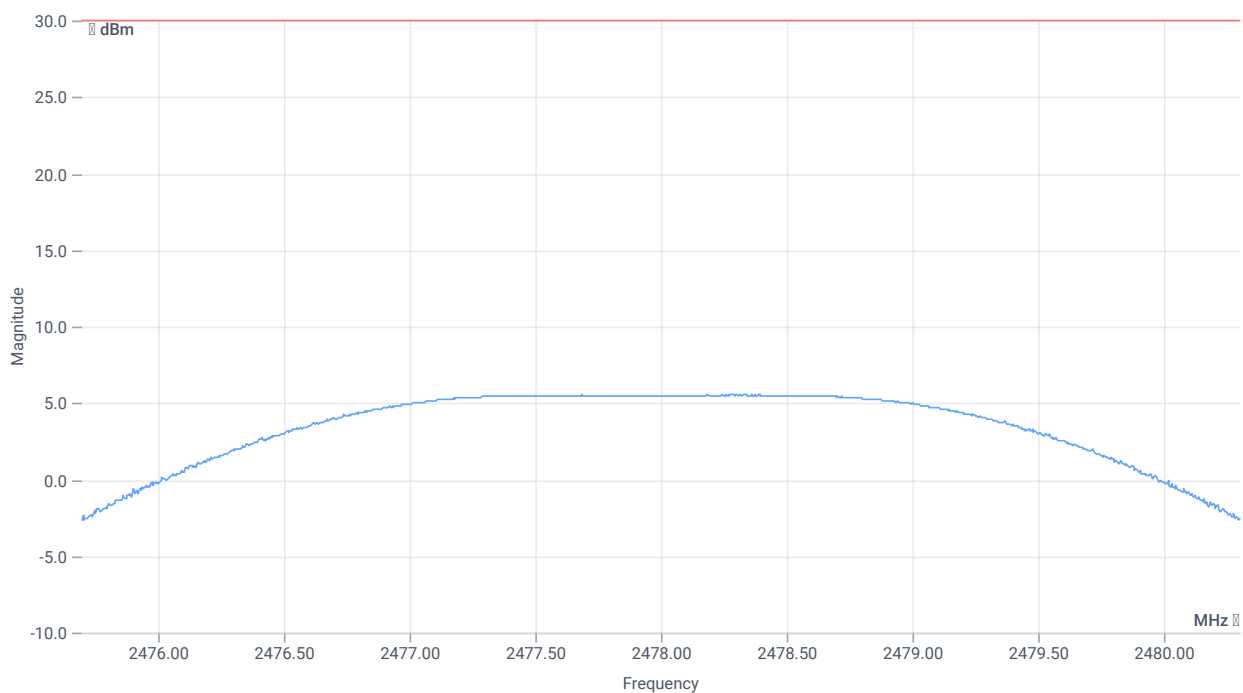

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	5.54	dBm	PASS
Peak power	---	1000	3.580964	mW	PASS
Frequency at peak	---	---	2478.317	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	19.11.2024 16:00:23
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1.5
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Climatic box,CTS,T-40/50,053031,LAN

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No Yes
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.31	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.31 8.85 25
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

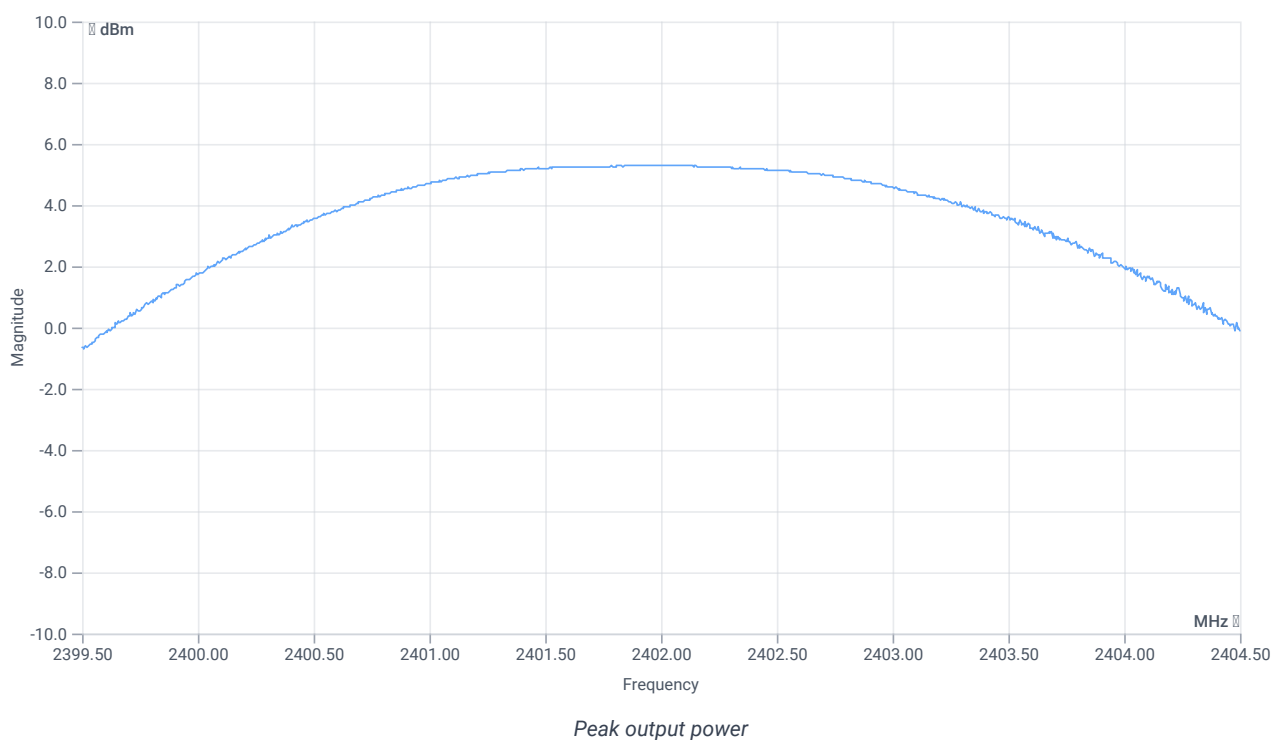

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	5.31	dBm	INFO
Peak power	---	---	3.396253	mW	INFO
Frequency at peak	---	---	2401.965	MHz	INFO


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.51	dBm	INFO
Ref. frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.51 8.94 25
Start [MHz] Stop [MHz]	2437.500 2442.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

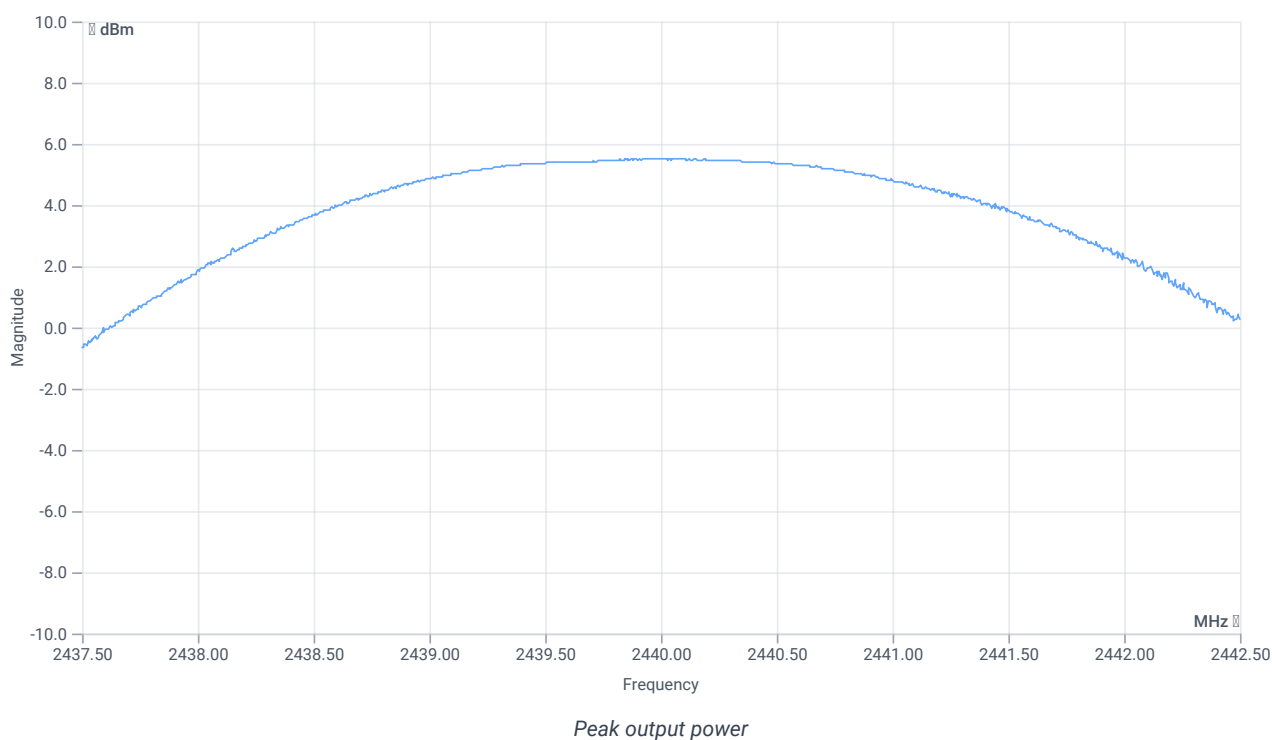

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	5.51	dBm	INFO
Peak power	---	---	3.556313	mW	INFO
Frequency at peak	---	---	2439.935	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.84	dBm	INFO
Ref. frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.16 9.03 20
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

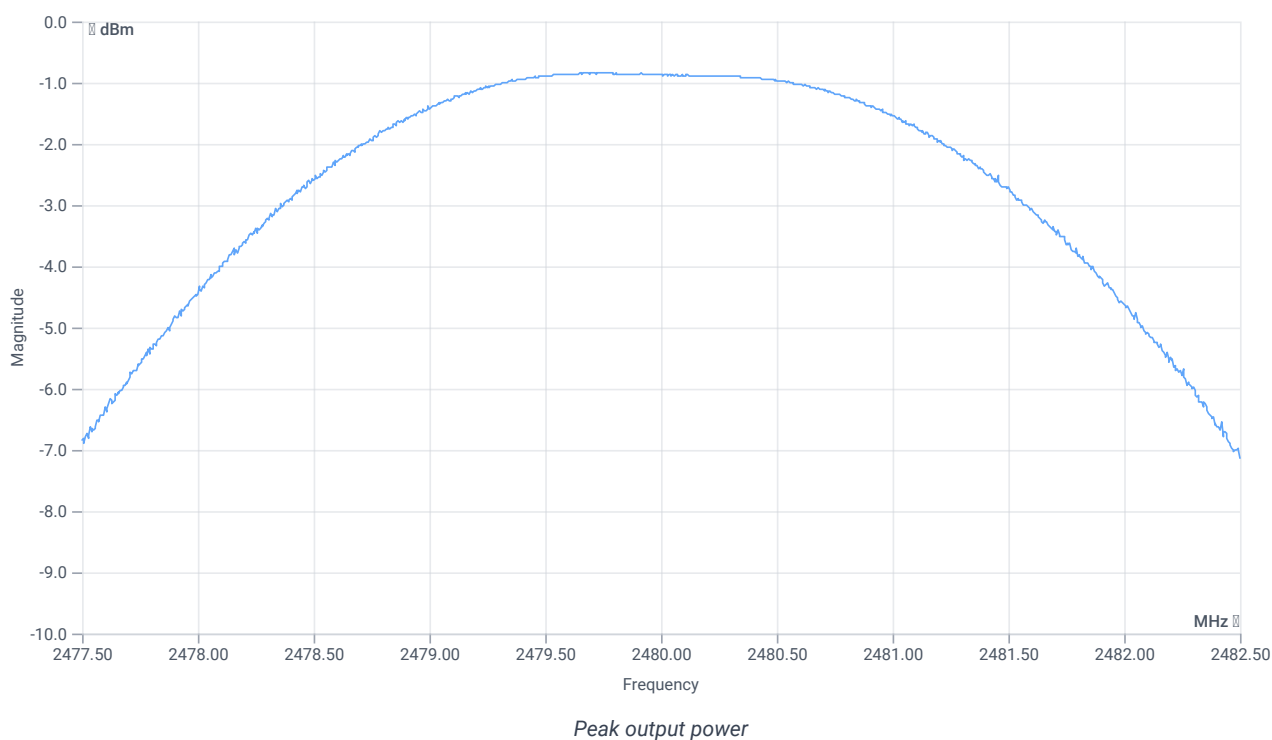

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	-0.83	dBm	INFO
Peak power	---	---	0.826038	mW	INFO
Frequency at peak	---	---	2479.73	MHz	INFO

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	18.11.2024 22:28:19
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.52	dBm	INFO
Ref. frequency	---	---	2402.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.52 8.85 20
Start [MHz] Stop [MHz]	2401.250 2402.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

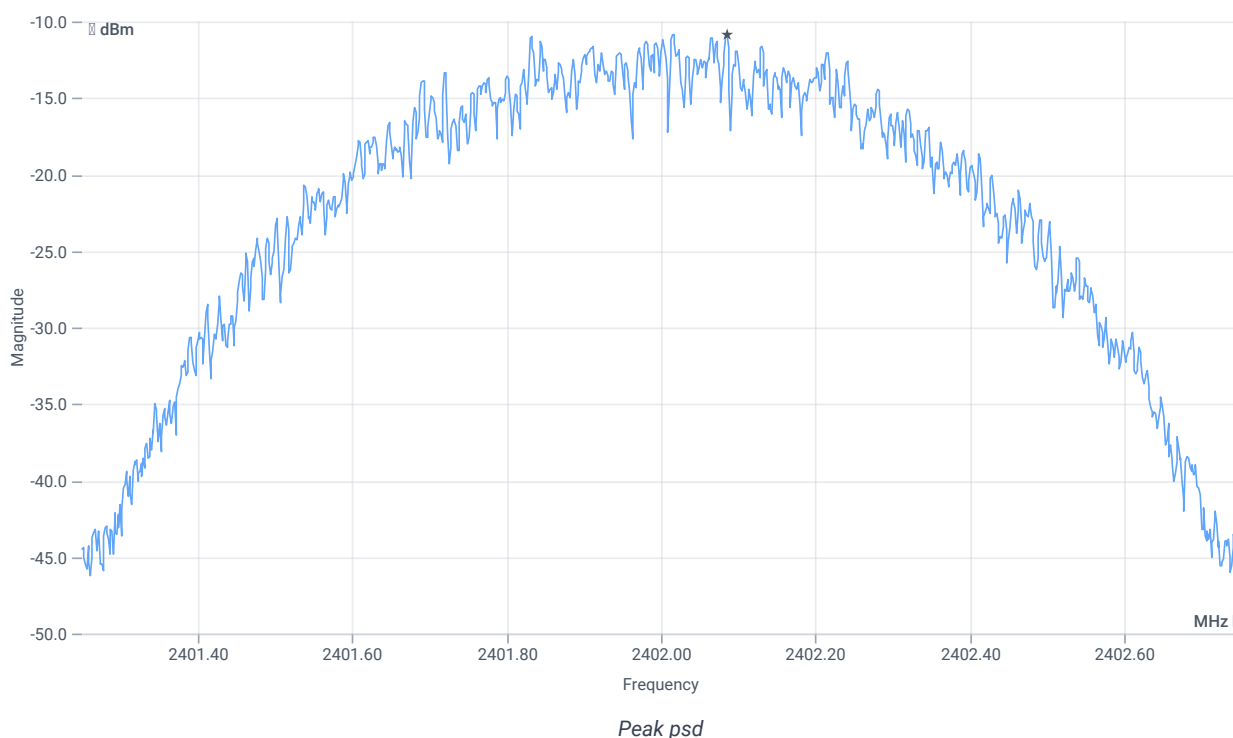

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-10.82	dBm/3KHz	PASS


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.76	dBm	INFO
Ref. frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.76 8.94 20
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

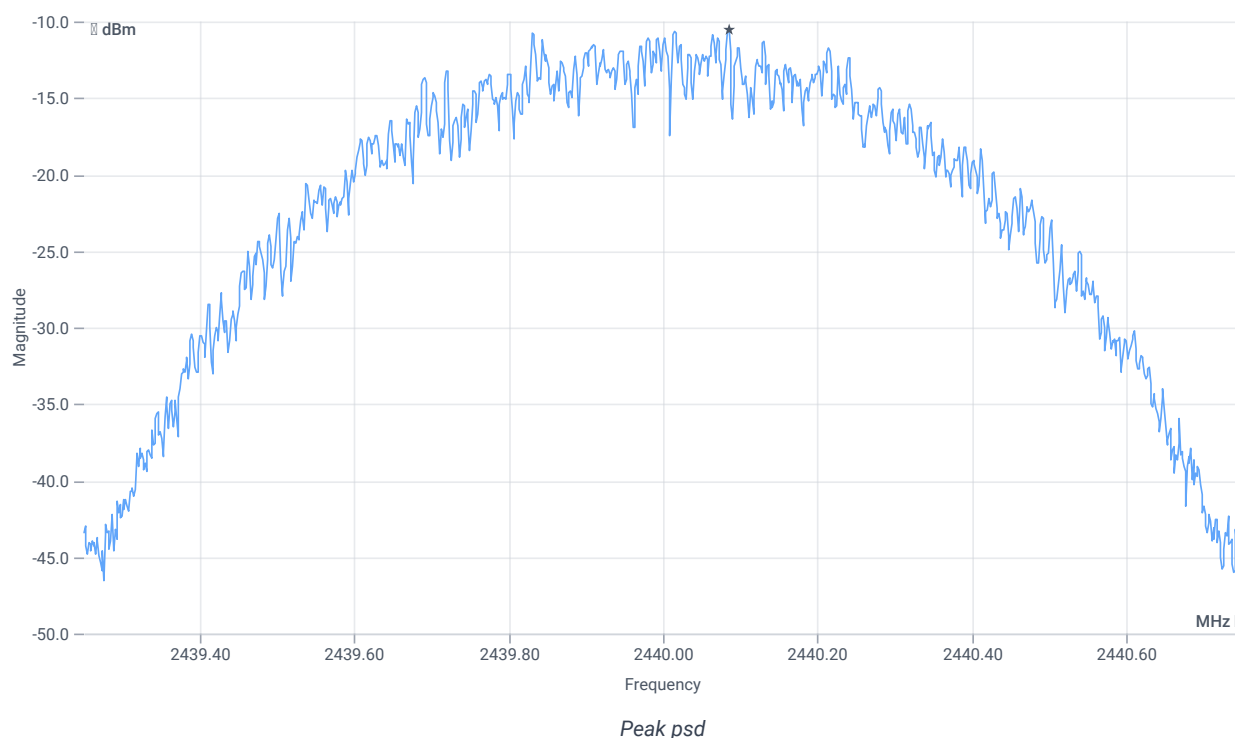

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-10.5	dBm/3KHz	PASS


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.70	dBm	INFO
Ref. frequency	---	---	2480.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.30 9.03 15
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

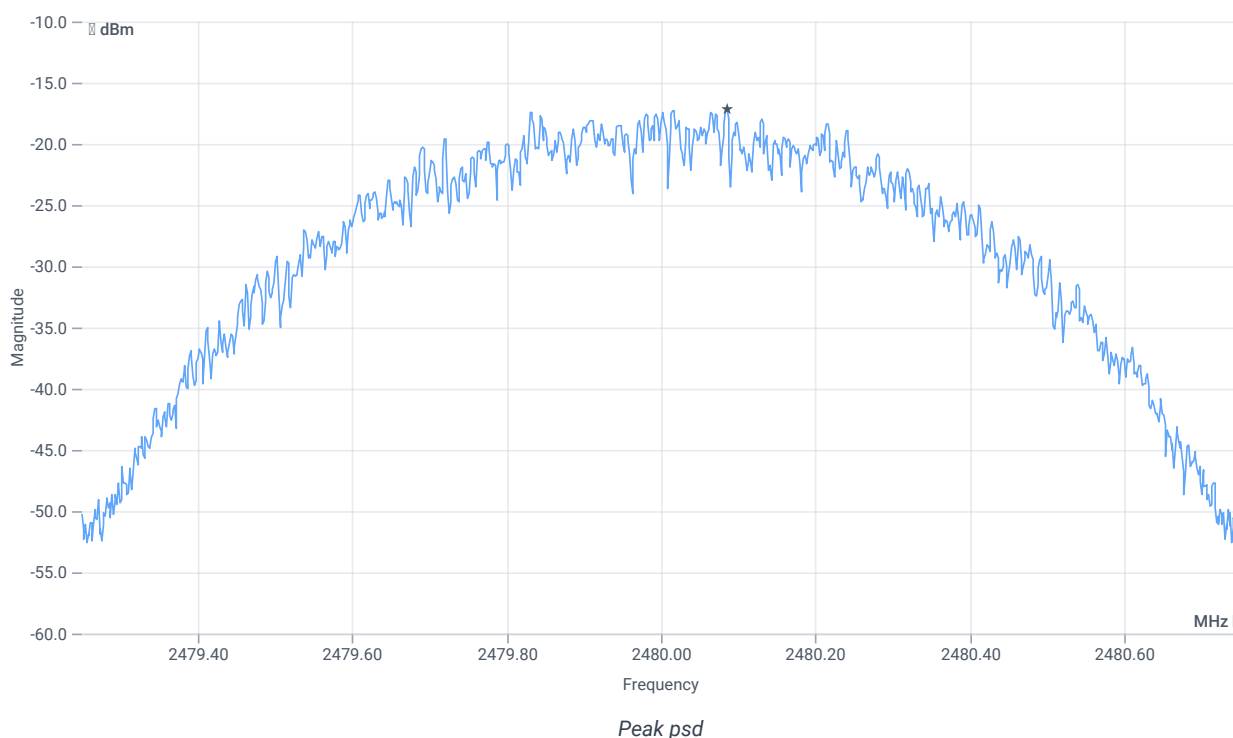

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-17.12	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps

References

TC start	18.11.2024 23:18:13
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetekom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2404 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.57	dBm	INFO
Ref. frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.57 8.86 20
Start [MHz] Stop [MHz]	2402.275 2405.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

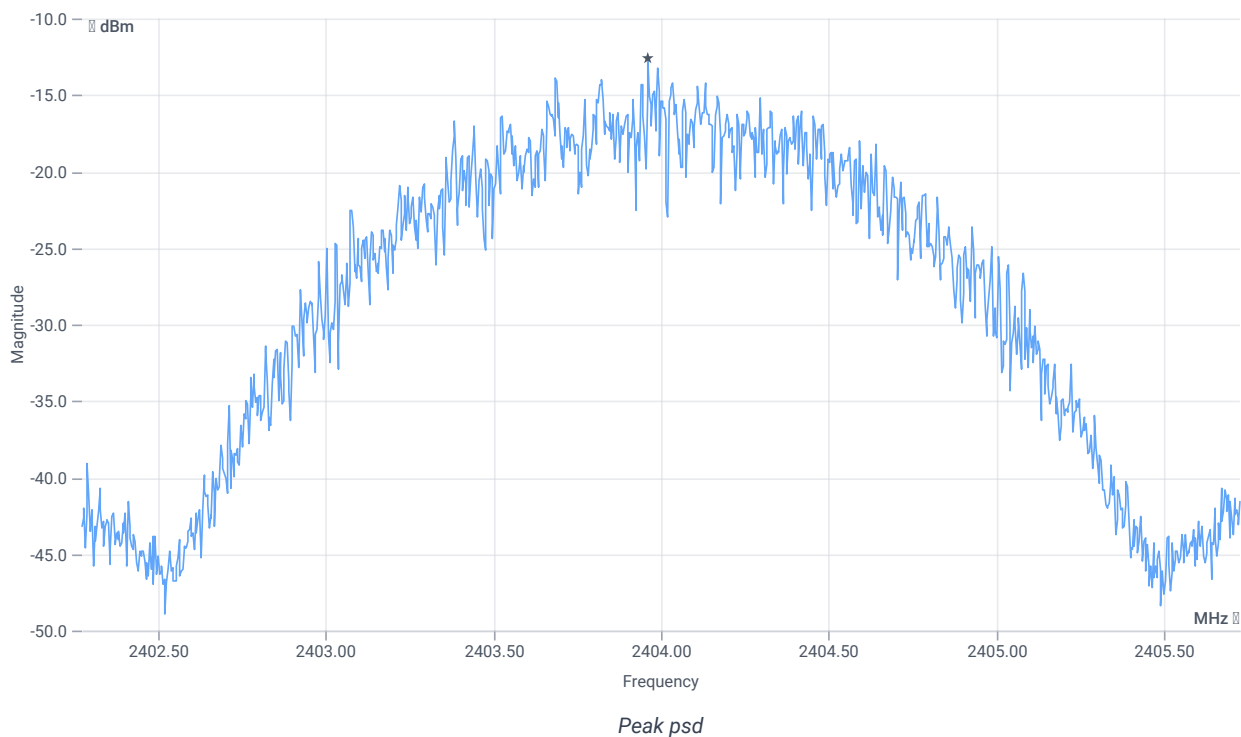

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-12.62	dBm/3KHz	PASS


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.82	dBm	INFO
Ref. frequency	---	---	2440.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.82 8.94 20
Start [MHz] Stop [MHz]	2438.275 2441.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

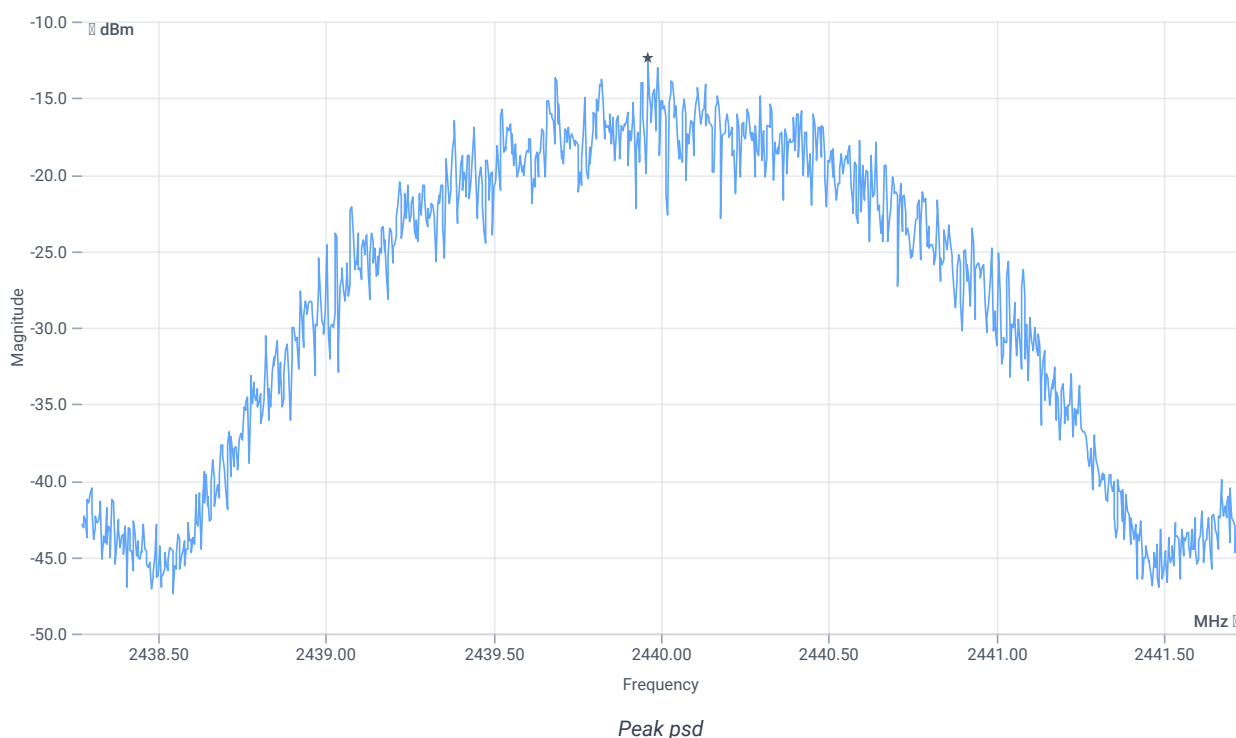

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-12.4	dBm/3KHz	PASS


Test at TX 2478 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.53	dBm	INFO
Ref. frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.53 9.03 20
Start [MHz] Stop [MHz]	2476.275 2479.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

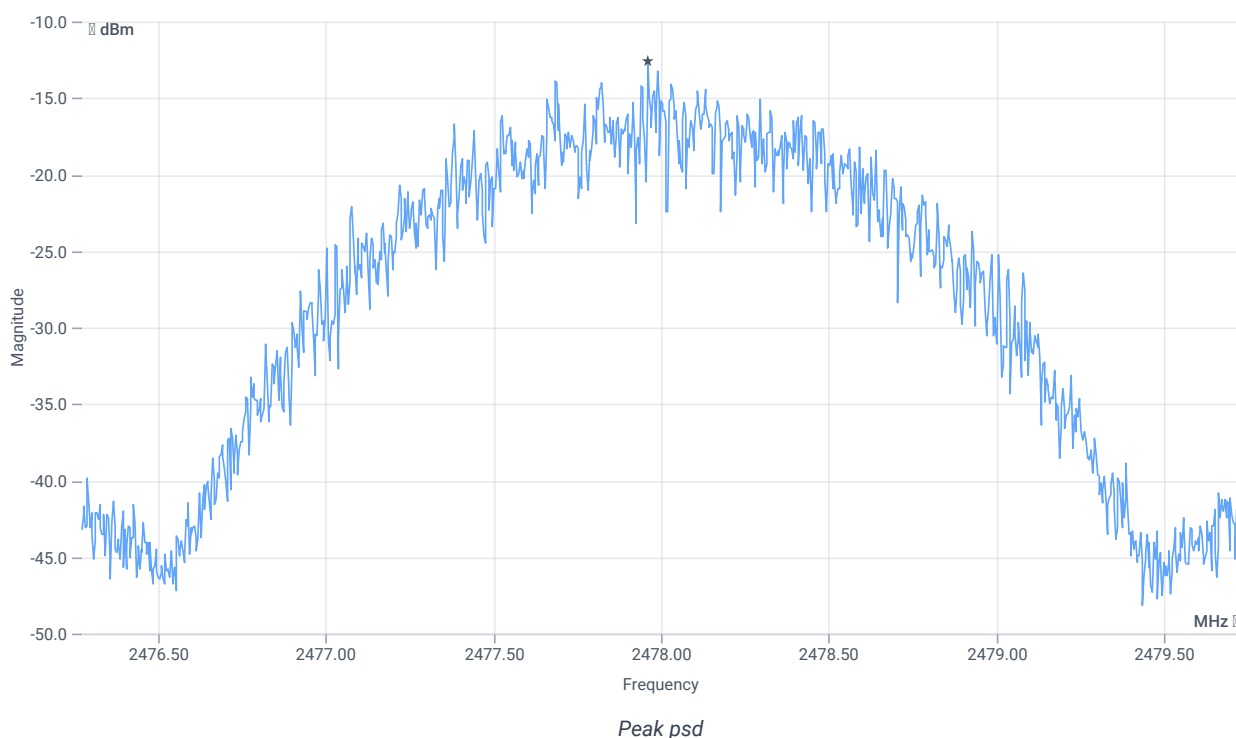

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-12.57	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	18.11.2024 22:32:30
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX emissions conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.53	dBm	INFO
Ref. frequency	---	---	2402.300	MHz	INFO

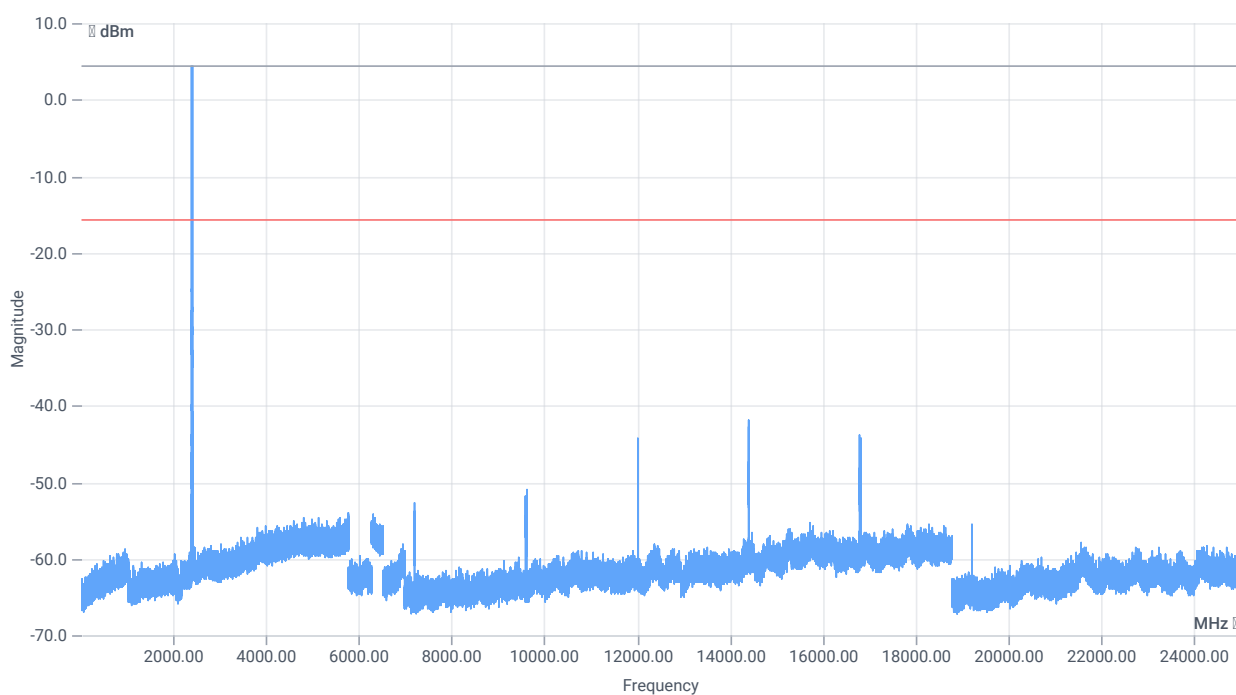

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.53 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

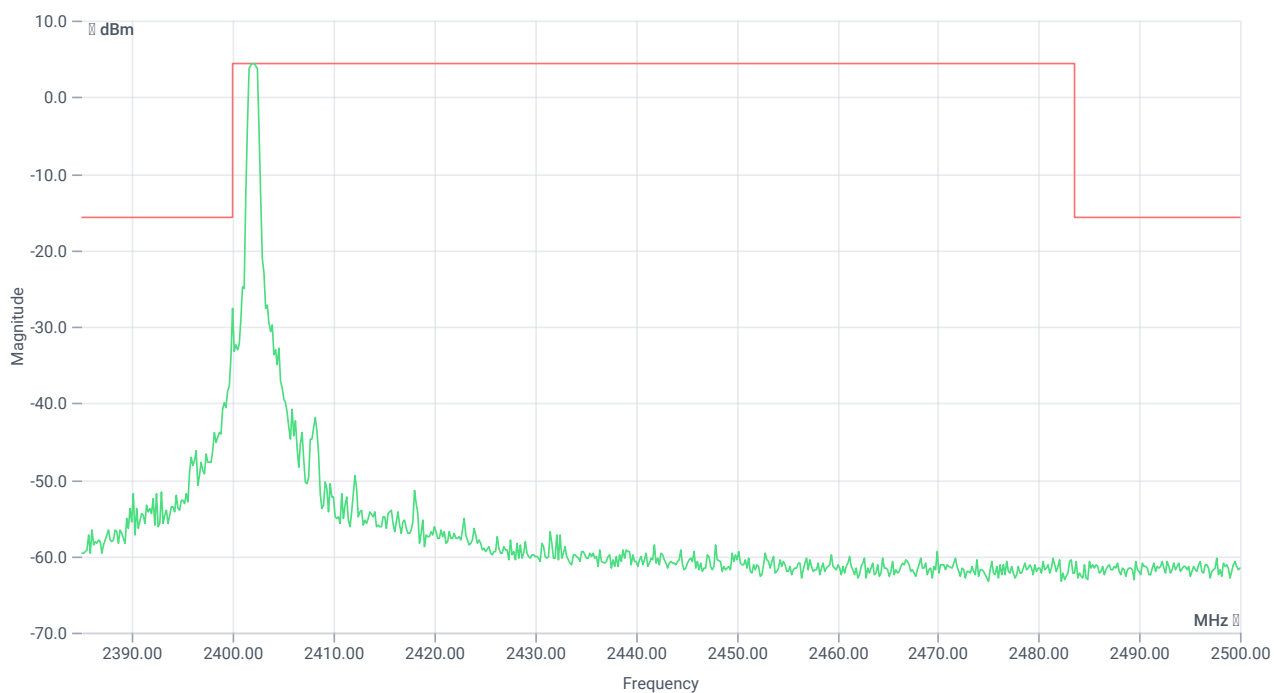


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2402.17 MHz	---	---	4.31	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-136.06	dB	INFO

Test at TX 2440 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.73	dBm	INFO
Ref. frequency	---	---	2440.200	MHz	INFO

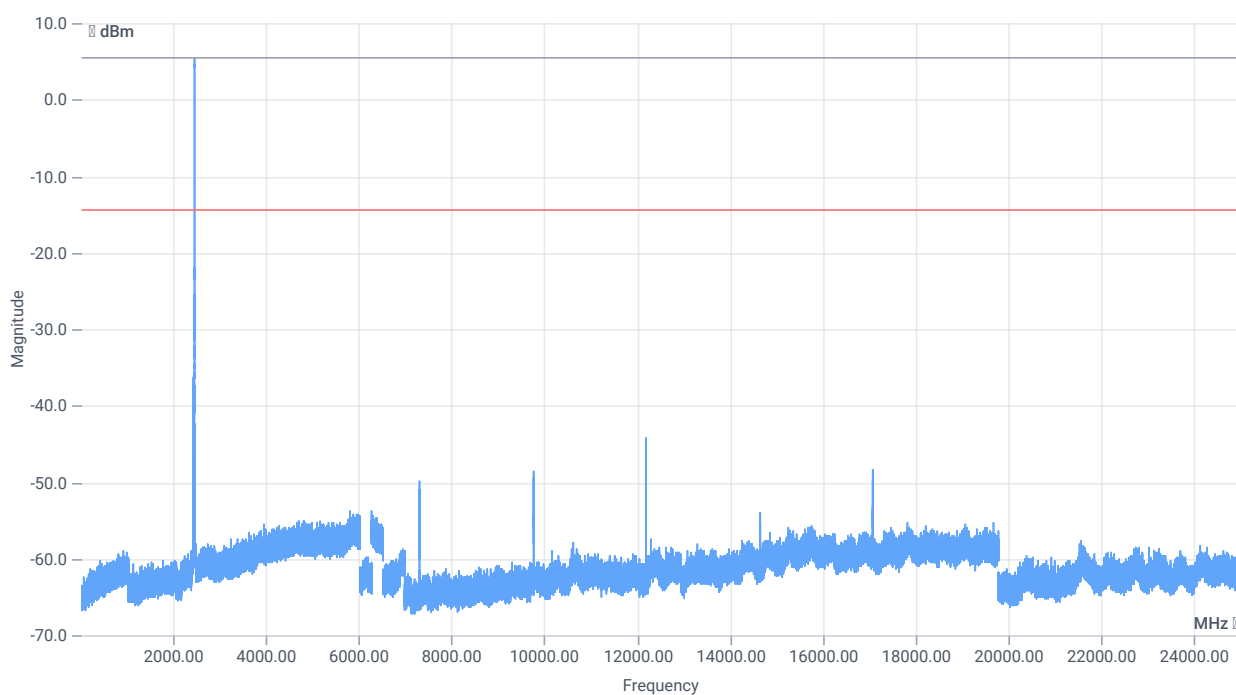

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.73 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

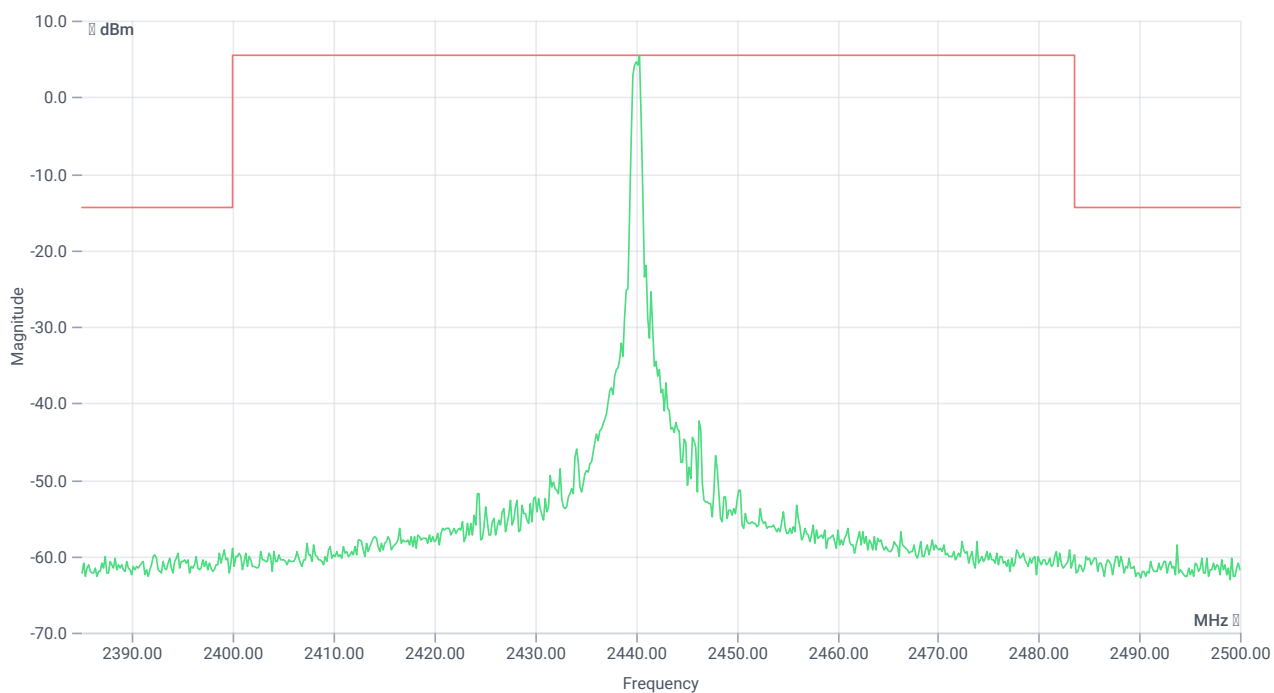


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2440.33 MHz	---	---	5.56	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12201.167 MHz	0	---	29.79	dB	INFO

Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.67	dBm	INFO
Ref. frequency	---	---	2480.300	MHz	INFO

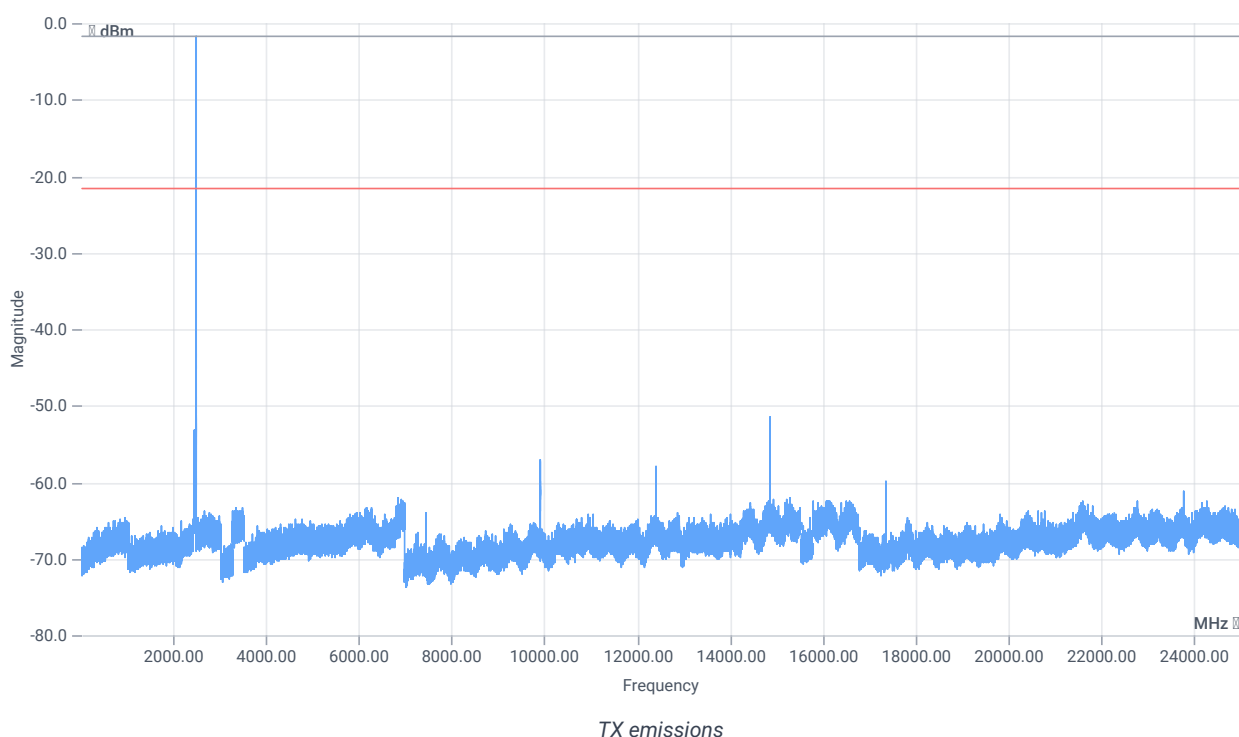

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-0.67 17.03 0
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

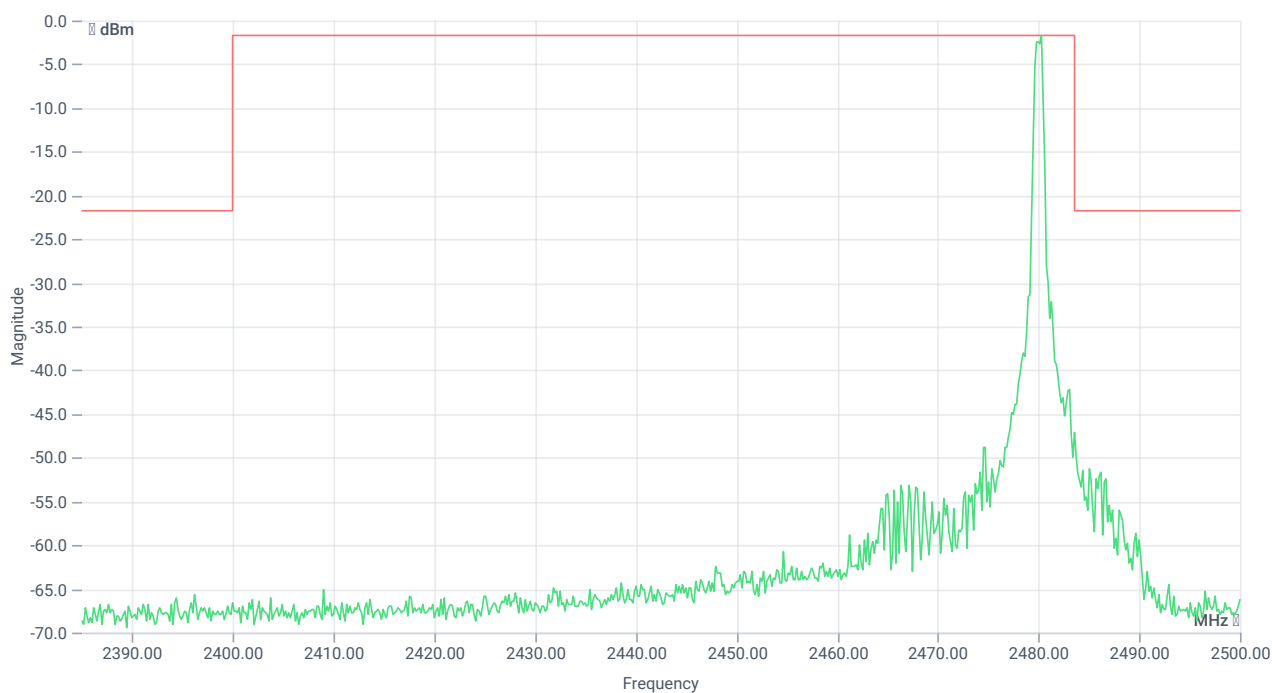

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2480.33 MHz	---	---	-1.67	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-129.97	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps

References

TC start	18.11.2024 23:22:25
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.2.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX emissions conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling settings	USB_RS232 TWO 3 2400 None S1 None On
Signaling RF settings	RF1com 0 0 On
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power supply,HAMEG,HMP2020,026640516,HW50010002/SW2.51

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	Yes No
Additional path loss [dB]	0.7


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2404 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.57	dBm	INFO
Ref. frequency	---	---	2404.500	MHz	INFO

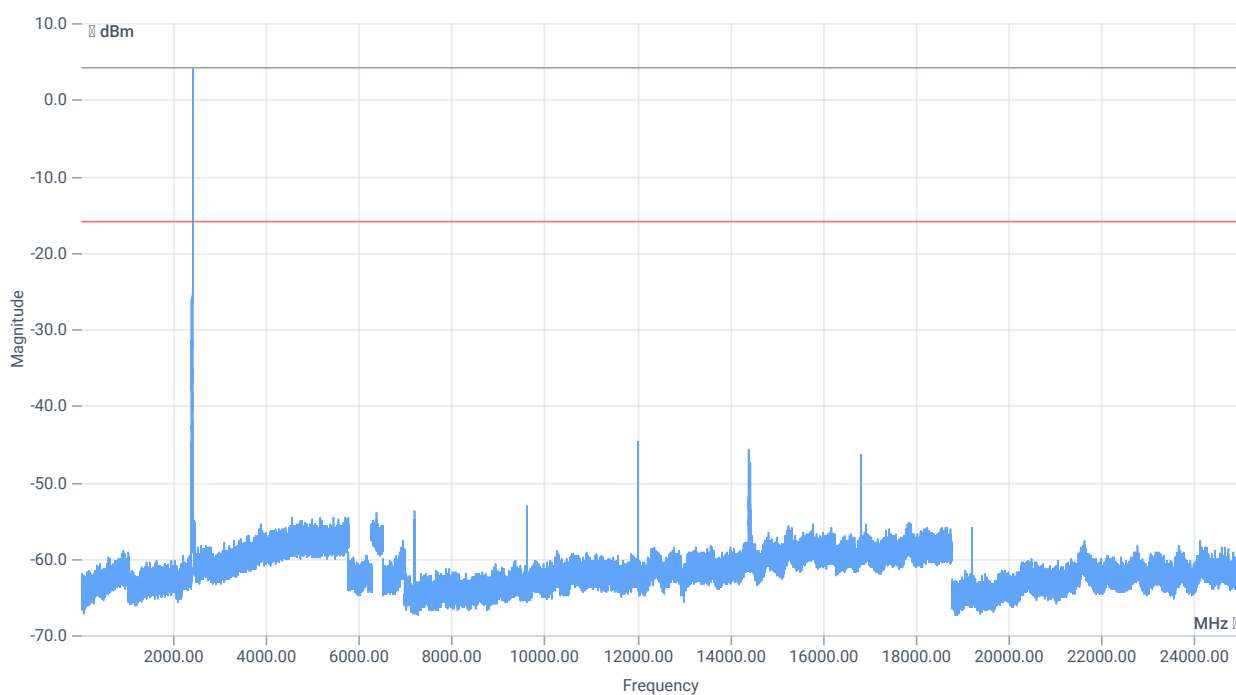

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.57 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

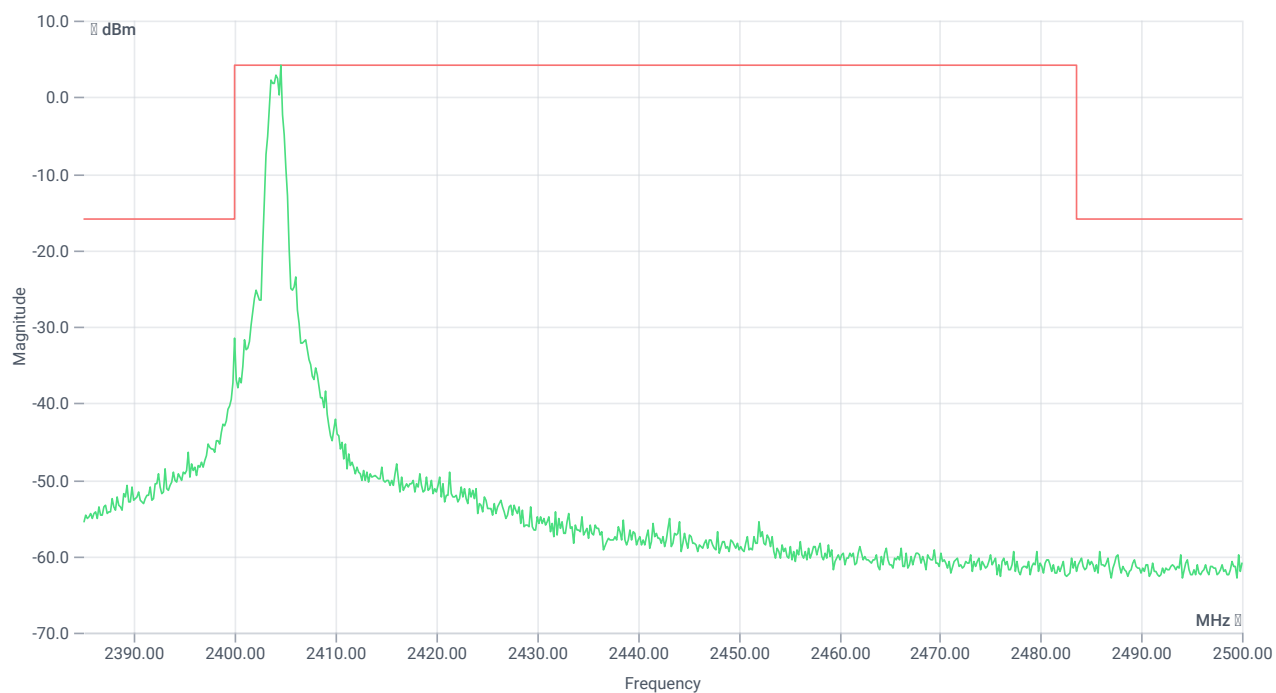


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2404.50 MHz	---	---	4.12	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	21.47	dB	INFO

Test at TX 2440 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.78	dBm	INFO
Ref. frequency	---	---	2440.500	MHz	INFO

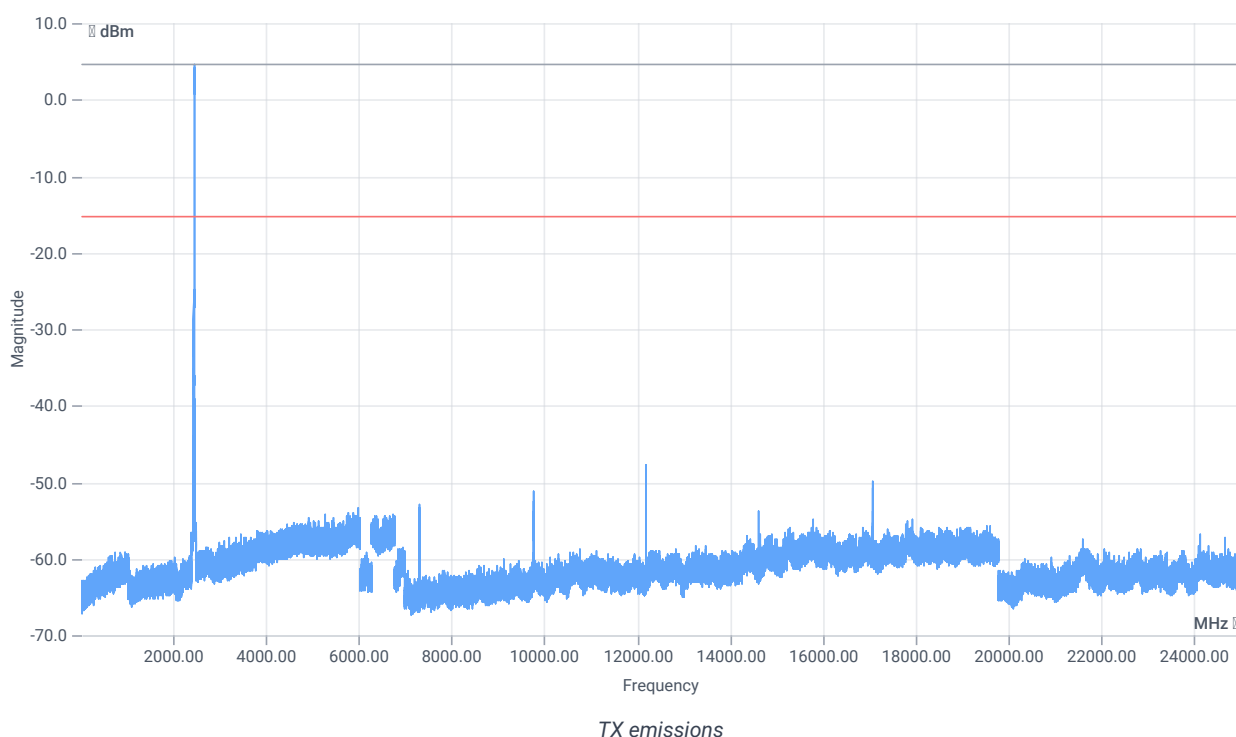

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.78 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

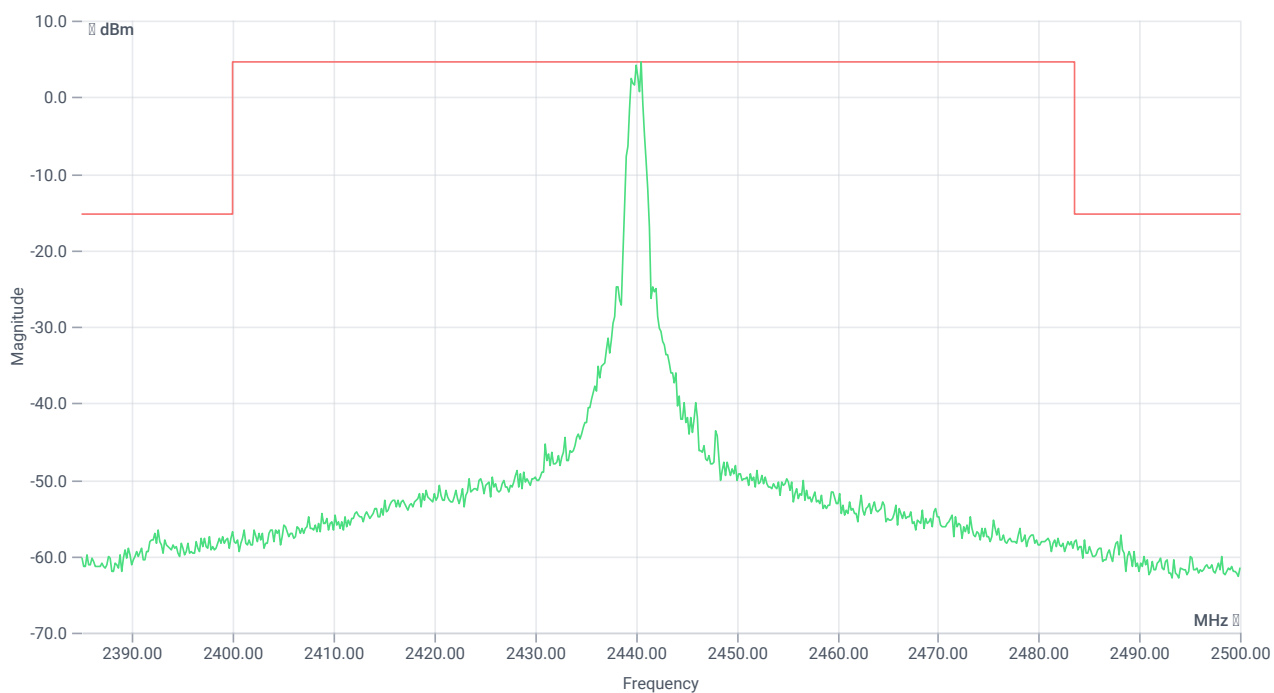

TX emissions band zoomed


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2440.50 MHz	---	---	4.62	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12197.5 MHz	0	---	32.25	dB	INFO

Test at TX 2478 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.51	dBm	INFO
Ref. frequency	---	---	2478.500	MHz	INFO

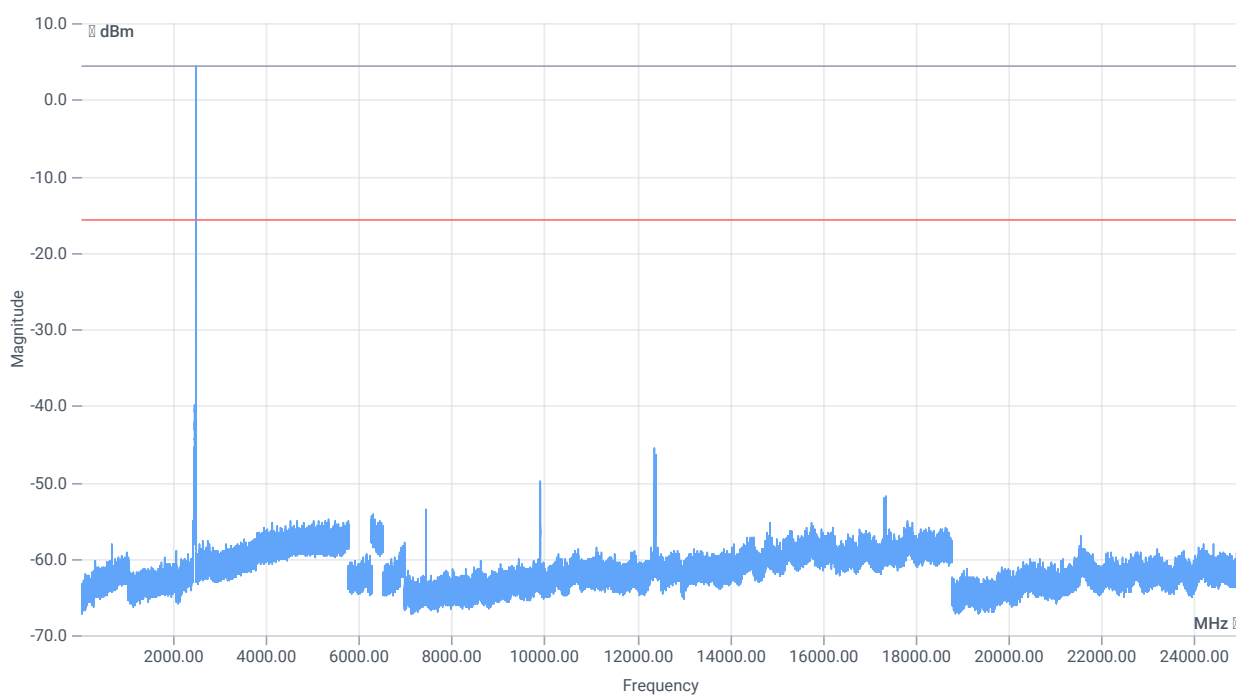

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.51 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

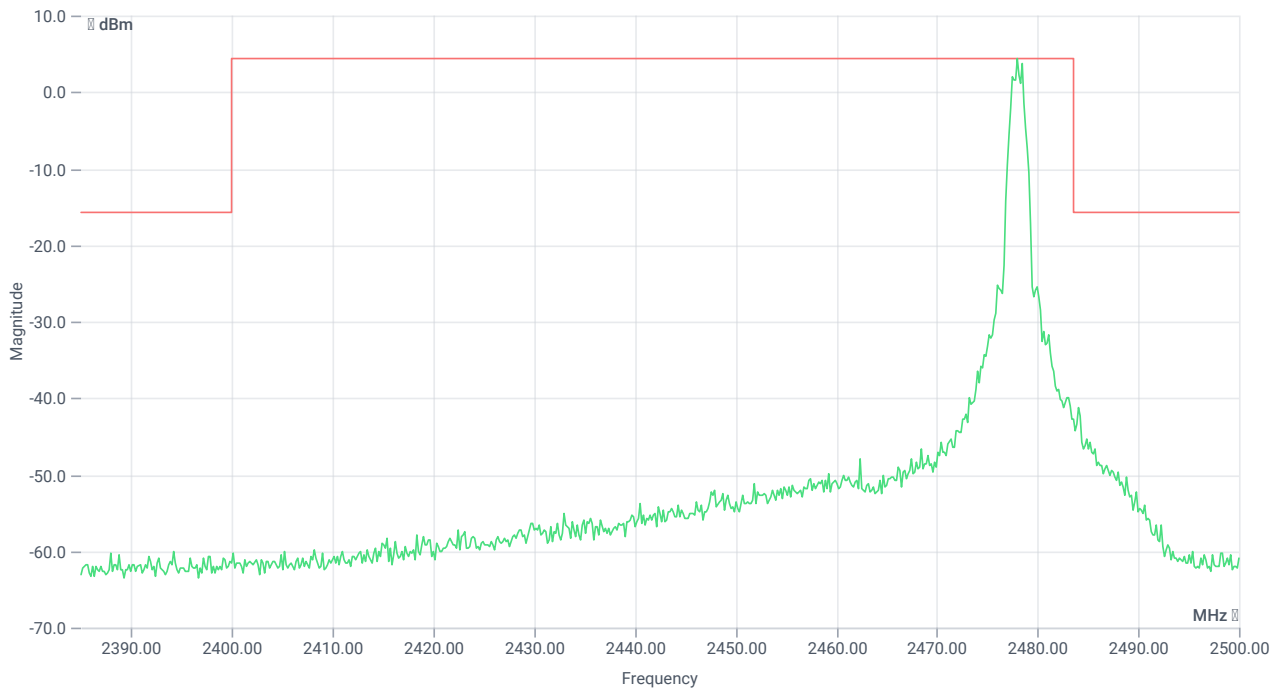

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2478.00 MHz	---	---	4.32	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2484 MHz	0	---	25.5	dB	INFO

Verdict

PASS

- END OF DOCUMENT -