

RF Exposure Evaluation Declaration

FCC ID: 2AXJ4XE75

Applicant: TP-Link Corporation Limited.

Application Type: Certification

Product: AXE5400 Whole Home Mesh Wi-Fi 6E System,
AXE5300 Whole Home Mesh Wi-Fi 6E System

Model No.: Deco XE75, Deco XE5300

Trademark: tp-link

FCC Classification: Digital Transmission System (DTS)
Unlicensed National Information Infrastructure (NII)

Reviewed By: 
(Paddy Chen)

Approved By: 
(Chenz Ker)



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2109TW0010-U4	V1.0	Original Report	2021-12-10	Valid

CONTENTS

Description	Page
1. INTRODUCTION.....	5
1.1. Scope	5
1.2. MRT Test Location.....	5
2. PRODUCT INFORMATION.....	6
2.1. Feature of Equipment under Test.....	6
2.2. Description of Available Antennas	6
3. RF Exposure Evaluation	8
3.1. Limits	8
3.2. Test Result of RF Exposure Evaluation	9
Appendix A - External Photograph	10
Appendix B - Internal Photograph	11

General Information

Applicant	TP-Link Corporation Limited
Applicant Address	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
Manufacturer	TP-Link Corporation Limited
Manufacturer Address	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
Test Device Serial No.	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

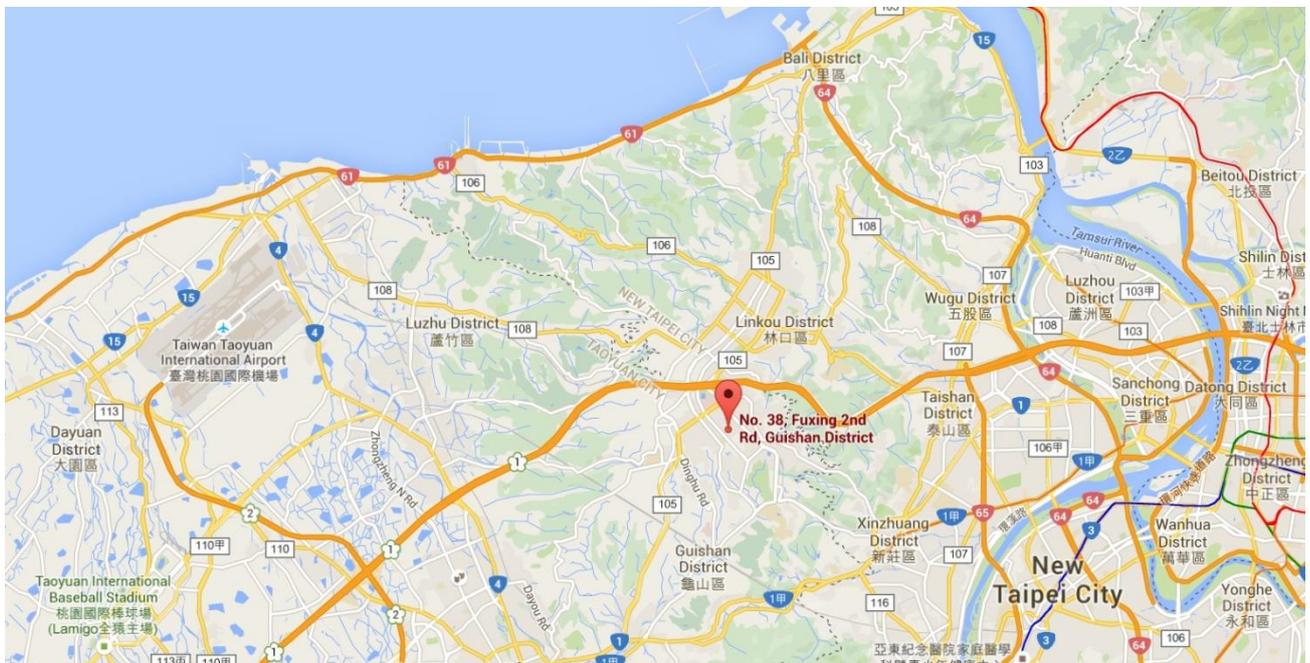

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	AXE5400 Whole Home Mesh Wi-Fi 6E System AXE5300 Whole Home Mesh Wi-Fi 6E System
Model No.:	Deco XE75, Deco XE5300
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac/ax
Antenna Information	Refer to Section 2.2
Power Type	AC/DC Adapter
Operating Environment	Indoor Use
Accessory	
AC/DC Adapter	Model: T120200-2B4 Input: 100-240V ~ 50/60Hz, 0.8A Output: 12V, 2.0A
Remark:	
1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

2.2. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	T _x Paths	Number of spatial streams	Max Antenna Gain (dBi)	Beamforming Directional Gain (dBi)	CDD Directional Gain (dBi)	
						For Power	For PSD
Dipole Antenna	2412 ~ 2462	2	1	2.00	5.01	2.00	5.01
	5150 ~ 5350	2	1	1.00	4.01	1.00	4.01
	5725 ~ 5850	2	1	1.00	4.01	1.00	4.01
	6105 ~ 7125	2	1	1.00	4.01	1.00	4.01
			2	1.00	4.01	1.00	4.01

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,

$$\text{Array Gain} = 10 \log (N_{ANT} / N_{SS}) \text{ dB} = 3.01;$$

- For power measurements on IEEE 802.11 devices,
 Array Gain = 0 dB for $N_{ANT} \leq 4$;
- 2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g. Directional gain = $G_{ANT} + \text{BF Gain}$. BF mode power setting will be less than or equal to CDD power setting.

3. RF Exposure Evaluation

3.1. Limits

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	f/1500	6
1500-100,000	--	--	1	30

f= Frequency in MHz

Calculation Formula: $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

r = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

3.2. Test Result of RF Exposure Evaluation

Product	AXE5400 Whole Home Mesh Wi-Fi 6E System
Test Item	RF Exposure Evaluation

Antenna Gain: Refer to clause 2.2.

Test Mode	Frequency Band (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Maximum EIRP (dBm)
802.11b/g/n/ax	2412 ~ 2462	27.88	5.01	32.89
802.11a/n/ac/ax	5180 ~ 5240	27.99	4.01	32.00
	5250 ~ 5250			
802.11ax	6115 ~ 7095	21.58	4.01	25.59

Test Mode	Frequency Band (MHz)	Maximum EIRP (dBm)	Compliance Distance (cm)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
802.11b/g/n/ax	2412 ~ 2462	32.89	20	0.3870	1
802.11a/n/ac/ax	5180 ~ 5240	32.00	20	0.3153	1
	5250 ~ 5250				
802.11ax	6115 ~ 7095	25.59	20	0.0721	1

CONCLUSION:

WLAN 2.4GHz, WLAN 5GHz and WLAN 6GHz can transmit simultaneously.

The max Power Density at R (20 cm) = $0.3870\text{mW/cm}^2 + 0.3153\text{mW/cm}^2 + 0.0721\text{mW/cm}^2 = 0.7744\text{mW/cm}^2 < 1\text{mW/cm}^2$.

So the compliance distance is 20cm for device installed without any other radio equipment.

_____ The End _____

Appendix A - External Photograph

Refer to "2109TW0010-External Photo" file.

Appendix B - Internal Photograph

Refer to "2109TW0010-Internal Photo" file.