

TEST REPORT

Report No.: BCTC2105423375-1E

Applicant: Benison Tech USA, Inc

Product Name: Nirad N100-I router High Performance Indoor
Single SIM 4G LTE Cloud Managed Enterprise
Router

Model/Type
reference: N100-I

Tested Date: 2021-05-12 to 2021-06-07

Issued Date: 2021-06-07

Shenzhen BCTC Testing Co., Ltd.



FCC ID:2AXO3N100

Product Name: Nirad N100-I router High Performance Indoor Single SIM 4G LTE Cloud Managed Enterprise Router

Trademark: Nirad

Model/Type reference: N100-I

Prepared For: Benison Tech USA, Inc

Address: 2225 East Bayshore Road Suite 200, Palo Alto, CA 94303 US

Manufacturer: Benison Tech USA, Inc

Address: 2225 East Bayshore Road Suite 200, Palo Alto, CA 94303 US

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2021-05-12

Sample tested Date: 2021-05-12 to 2021-06-07

Issue Date: 2021-06-07

Report No.: BCTC2105423375-1E

FCC Part15.247


Test Standards ANSI C63.10:2013

KDB 662911 D01 v02r01

558074 D01 15.247 Meas Guidance v05r02

Test Results PASS

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Contents

	Page
1 .VERSION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3.5.1TEST FACILITY	13
3.5.2 RADIATION TEST EQUIPMENT	13
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 TEST PROCEDURE	20
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP	21
4.2.5 EUT OPERATING CONDITIONS	22
4.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	23
4.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	24
4.2.8 TEST RESULTS	26
4.3 RADIATED BAND EMISSION MEASUREMENT	30
4.3.1 TEST REQUIREMENT:	30
4.3.2 TEST PROCEDURE	30
4.3.3 DEVIATION FROM TEST STANDARD	31
4.3.4 TEST SETUP	31
4.3.5 EUT OPERATING CONDITIONS	31

Table of Contents

	Page
5 . POWER SPECTRAL DENSITY TEST	34
5.1 APPLIED PROCEDURES / LIMIT	34
5.1.1 TEST PROCEDURE	34
5.1.2 DEVIATION FROM STANDARD	34
5.1.3 TEST SETUP	34
5.1.4 EUT OPERATION CONDITIONS	34
5.1.5 TEST RESULTS	35
6 . BANDWIDTH TEST	43
6.1 APPLIED PROCEDURES / LIMIT	43
6.1.1 TEST PROCEDURE	43
6.1.2 DEVIATION FROM STANDARD	43
6.1.3 TEST SETUP	43
6.1.4 EUT OPERATION CONDITIONS	43
6.1.5 TEST RESULTS	44
7 . PEAK OUTPUT POWER TEST	52
7.1 APPLIED PROCEDURES/LIMIT	52
7.1.1 TEST PROCEDURE	52
7.1.2 DEVIATION FROM STANDARD	52
7.1.3 TEST SETUP	52
7.1.4 EUT OPERATION CONDITIONS	52
7.1.5 TEST RESULTS	53
8 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	54
8.1 APPLICABLE STANDARD	54
8.2 TEST PROCEDURE	54
8.3 DEVIATION FROM STANDARD	54
8.4 TEST SETUP	54
8.5 EUT OPERATION CONDITIONS	54
9 . DUTY CYCLE OF TEST SIGNAL	63
9.1 STANDARD REQUIREMENT	63
9.2 FORMULA:	63
10 . ANTENNA REQUIREMENT	66
10.1 STANDARD REQUIREMENT	66
10.2 EUT ANTENNA	66

Table of Contents

	Page
11 . EUT PHOTOGRAPHS	67
12 . EUT TEST SETUP PHOTOGRAPHS	68
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1.VERSION

Report No.	Issue Date	Description	Approved
BCTC2105423375-1E	2021-06-07	Original	Valid


2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (d)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:


(1) "N/A" denotes test is not applicable in this Test Report

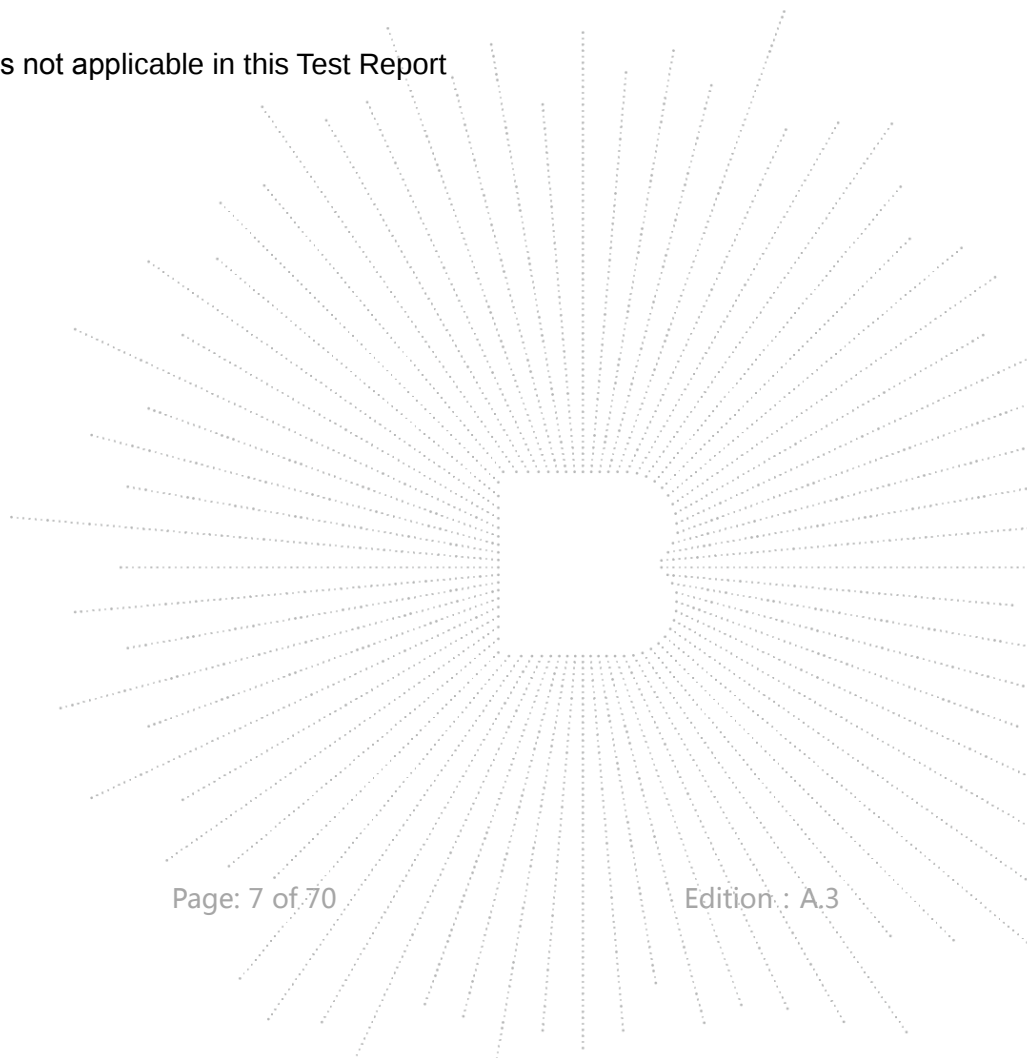

2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59°C

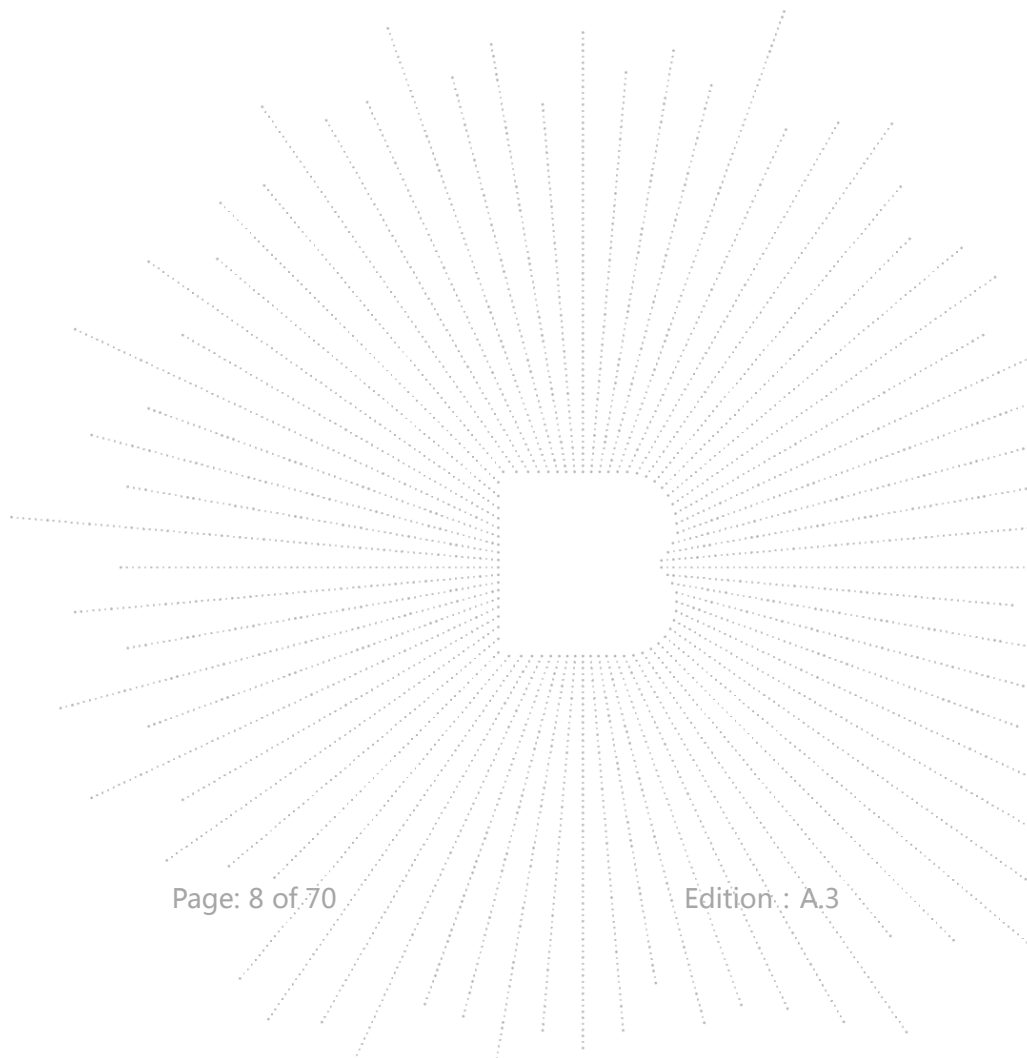

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Model/Type reference:	N100-I
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 300Mbps
Type of Modulation:	WIFI: OFDM/DSSS
Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
Antenna installation:	WIFI: External antenna*2
Antenna Gain:	WIFI: Antenna A:5dBi Antenna B:5dBi
Ratings:	DC 12V 2.0A Model No.:TAP25-120S200U1
Adapter	Input: AC100-240V~ 50/60Hz, 0.6A Output: DC 12V 2.0A

1.

Channel List for 802.11b/g/n(20)							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		
Channel List for 802.11n(40)							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

2

Table for External antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	External antenna	5	N/A
B	N/A	N/A	External antenna	5	N/A

EUT has two External antennas with Max gain GANT 5dBi on every antenna, CDD device with two spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1)For power spectral density(PSD) measurements,

Array Gain= $10\log(NANT/NSS)$ dB= $10\log(2/1)$ =3.01dB,

So the directional gain for PSD is 8.01dBi

2)For power measurements,

The Array gain=0 dB for $NANT \leq 4$,

So the directional gain for Power measurements is 5dBi

3.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Radiated Spurious Emission



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Device Type	Brand	Model	Series No.	Note
E-1	Nirad N100-I router High Performance Indoor Single SIM 4G LTE Cloud Managed Enterprise Router	Nirad	N100-I	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
--	--	--	--	--

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

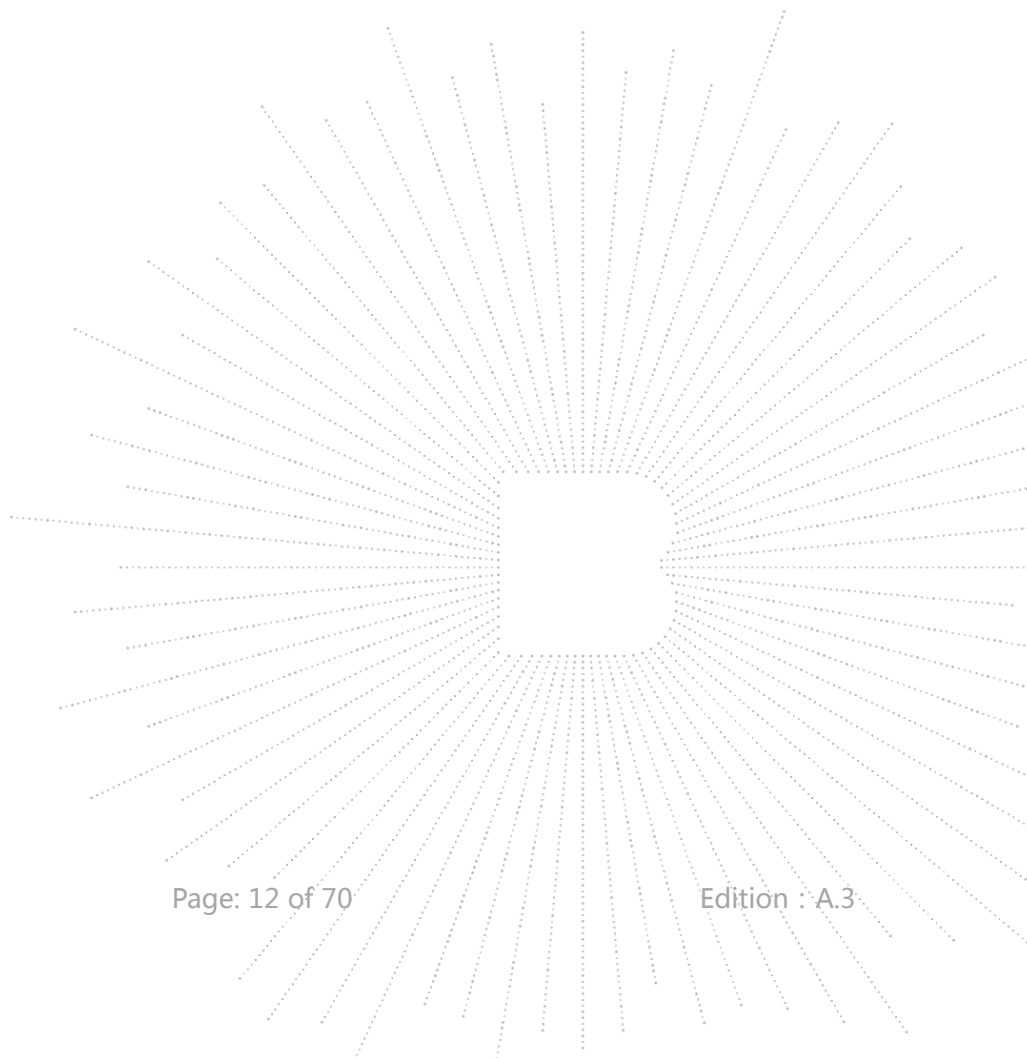

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

3.5.1 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

3.5.2 RADIATION TEST EQUIPMENT


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	May 28, 2021	May 27, 2022
2	Test Receiver (9kHz-7GHz)	R&S	ESRP	101154	May 28, 2021	May 27, 2022
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	Jun. 01, 2021	May 31, 2022
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	00822	Jun. 10, 2020	Jun. 09, 2021
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	May 28, 2021	May 27, 2022
7	Amplifier	SKET	LAPA_01G18G-45dB	\	May 28, 2021	May 27, 2022
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 28, 2021	May 27, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	Jun. 02, 2021	Jun. 01, 2022
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	May 28, 2021	May 27, 2022
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	May 28, 2021	May 27, 2022
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
13	Power Metter	Keysight	E4419B	\	May 28, 2021	May 27, 2022
14	Power Sensor (AV)	Keysight	E9 300A	\	May 28, 2021	May 27, 2022
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	May 28, 2021	May 27, 2022
16	Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	May 28, 2021	May 27, 2022
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
2	LISN	SCHWARZBEC K	NSLK8127	8127739	Jun. 13, 2020	Jun. 12, 2021
3	LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	May 28, 2021	May 27, 2022
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

RF conducted test

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Power Metter	Keysight	E4419B	\	May 28, 2021	May 27, 2022
2	Power Sensor (AV)	Keysight	E9 300A	\	May 28, 2021	May 27, 2022
3	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	May 28, 2021	May 27, 2022
4	Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	May 28, 2021	May 27, 2022

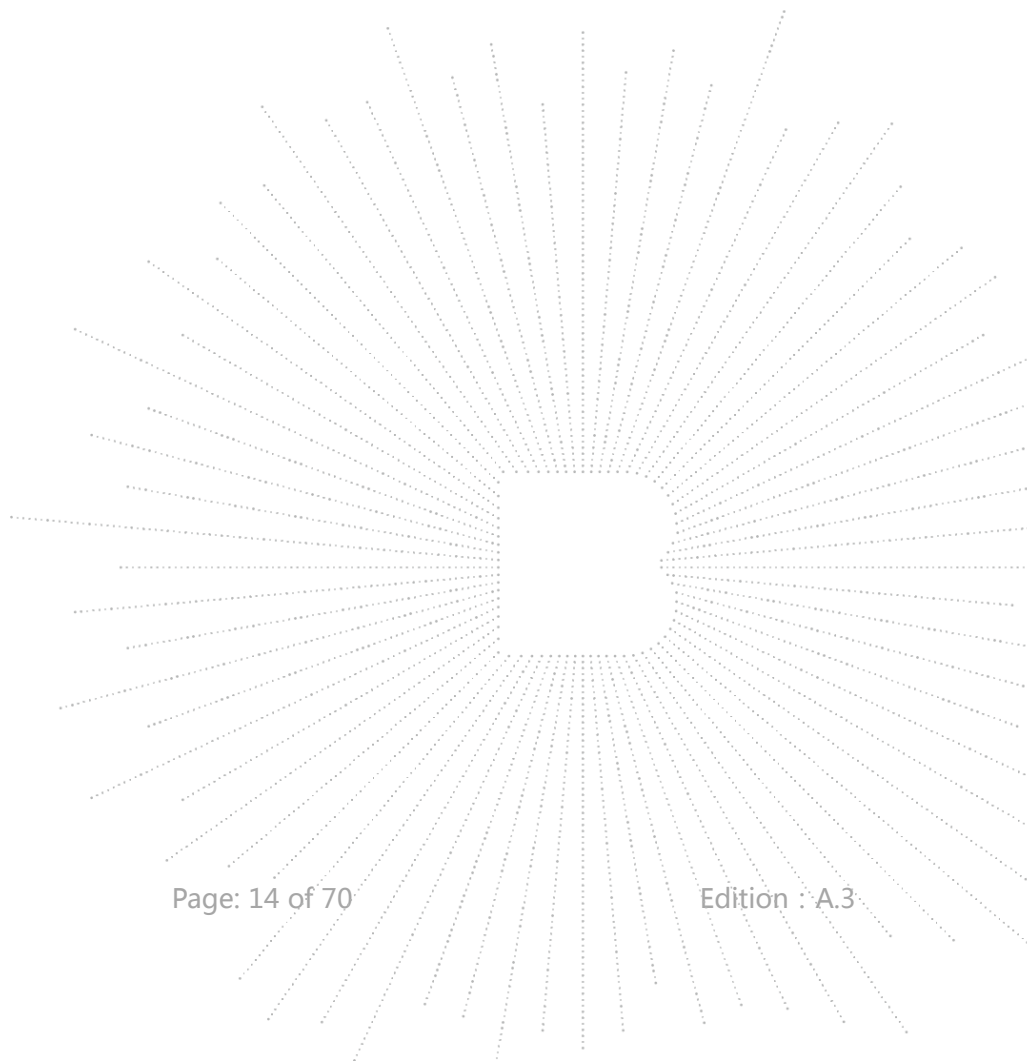

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

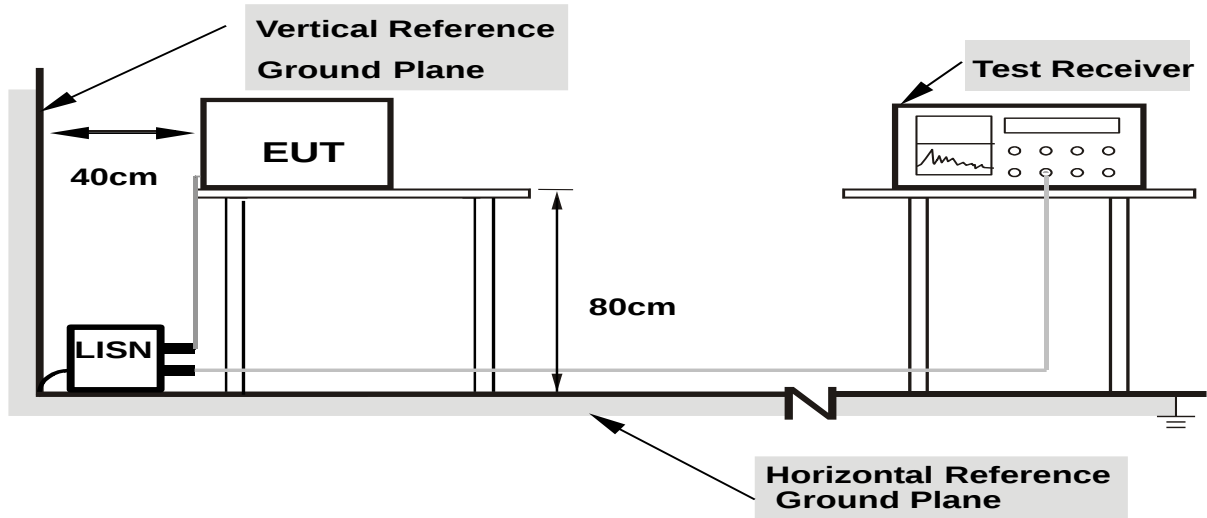

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

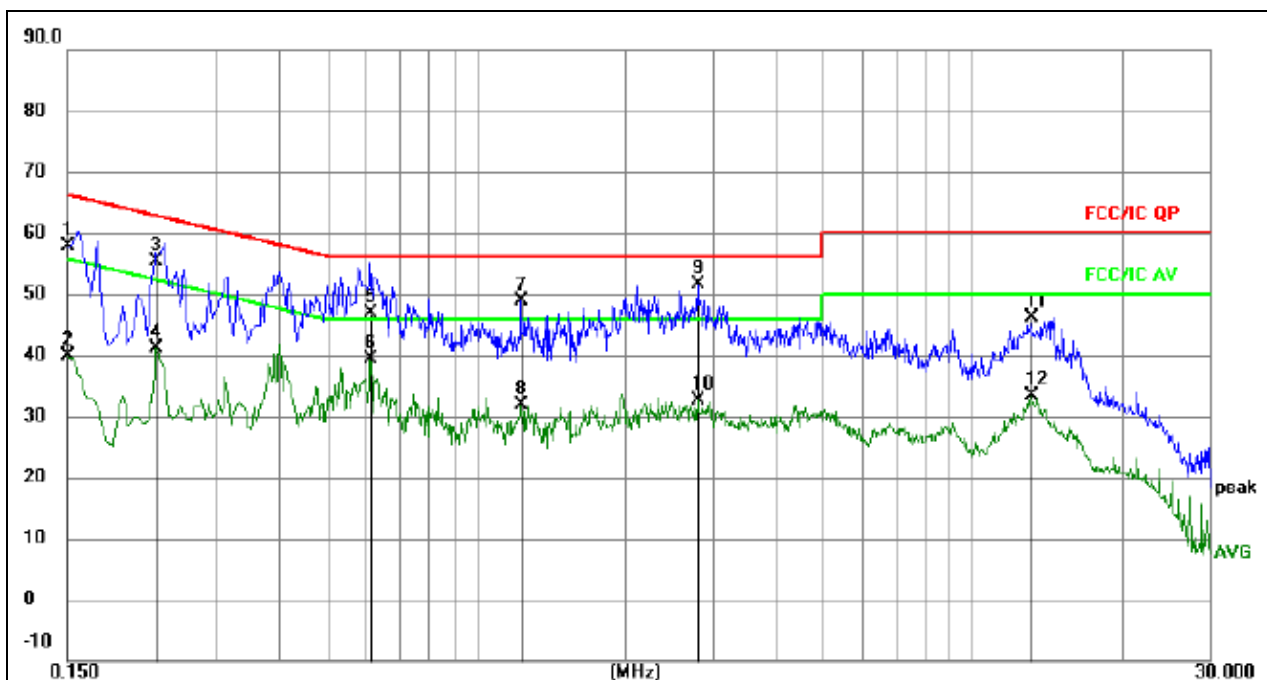


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	48.42	9.52	57.94	66.00	-8.06	QP
2		0.1500	30.36	9.52	39.88	56.00	-16.12	AVG
3		0.2265	45.90	9.49	55.39	62.58	-7.19	QP
4		0.2265	31.68	9.49	41.17	52.58	-11.41	AVG
5		0.6134	36.92	9.95	46.87	56.00	-9.13	QP
6		0.6134	29.39	9.95	39.34	46.00	-6.66	AVG
7		1.2345	39.31	9.57	48.88	56.00	-7.12	QP
8		1.2345	22.26	9.57	31.83	46.00	-14.17	AVG
9	*	2.7960	41.98	9.65	51.63	56.00	-4.37	QP
10		2.7960	22.86	9.65	32.51	46.00	-13.49	AVG
11		13.1235	36.46	9.70	46.16	60.00	-13.84	QP
12		13.1235	23.57	9.70	33.27	50.00	-16.73	AVG

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

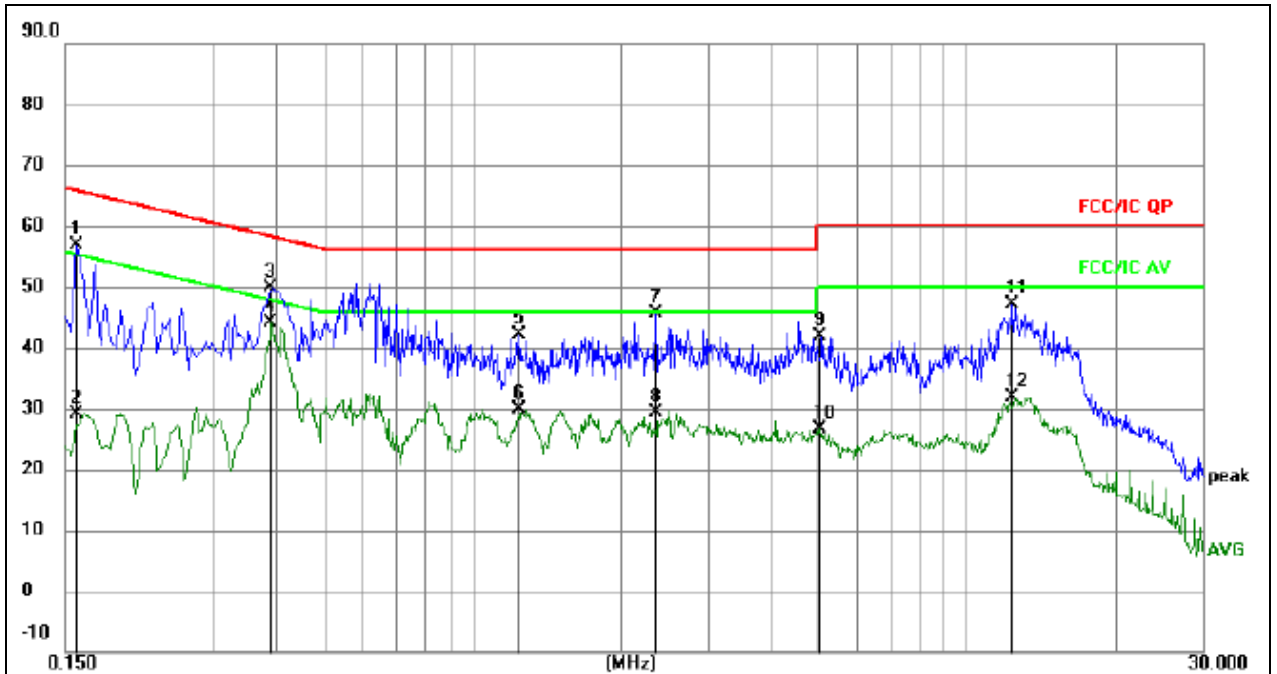

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1581	47.29	9.51	56.80	65.56	-8.76	QP
2		0.1581	19.55	9.51	29.06	55.56	-26.50	AVG
3		0.3913	40.38	9.51	49.89	58.04	-8.15	QP
4	*	0.3913	34.69	9.51	44.20	48.04	-3.84	AVG
5		1.2422	32.55	9.57	42.12	56.00	-13.88	QP
6		1.2422	20.38	9.57	29.95	46.00	-16.05	AVG
7		2.3459	35.97	9.61	45.58	56.00	-10.42	QP
8		2.3459	19.89	9.61	29.50	46.00	-16.50	AVG
9		5.0312	32.15	9.80	41.95	60.00	-18.05	QP
10		5.0312	16.86	9.80	26.66	50.00	-23.34	AVG
11		12.3836	37.43	9.69	47.12	60.00	-12.88	QP
12		12.3836	22.23	9.69	31.92	50.00	-18.08	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

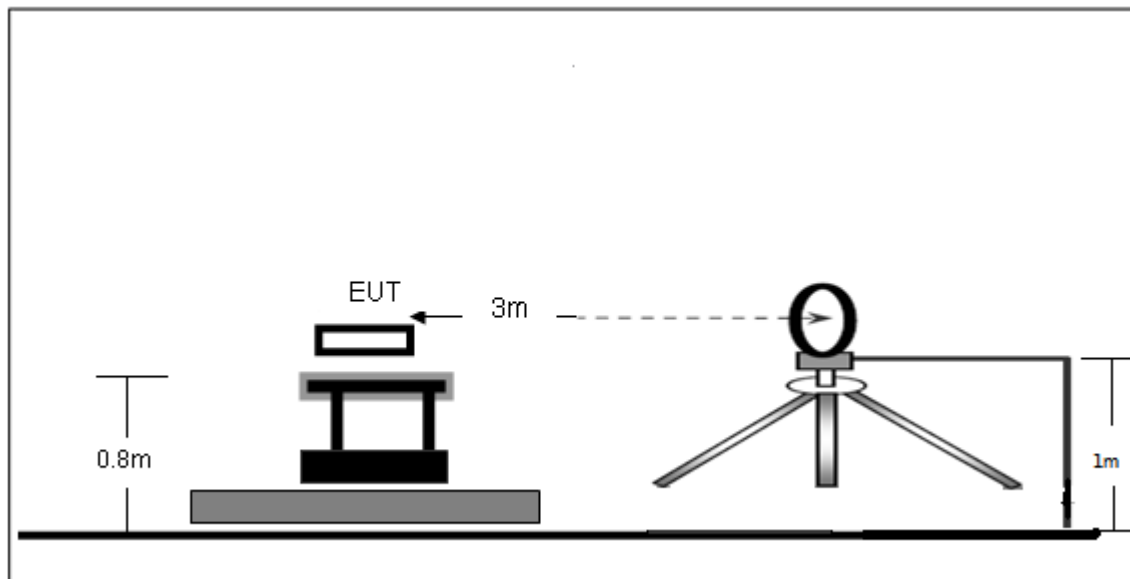

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

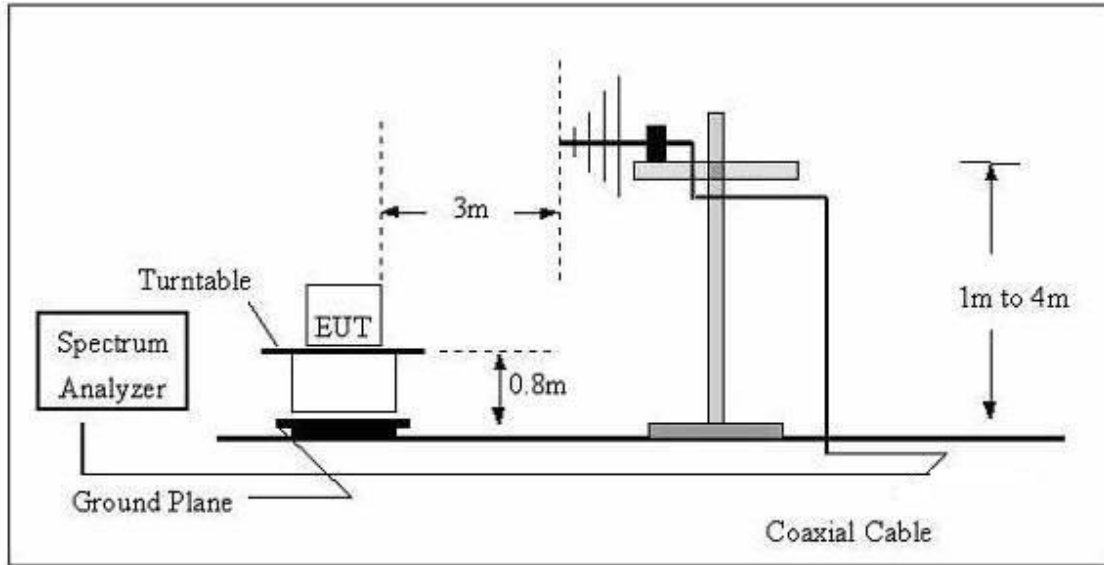

(C) Radiated Emission Test-Up Frequency Above 1GHz

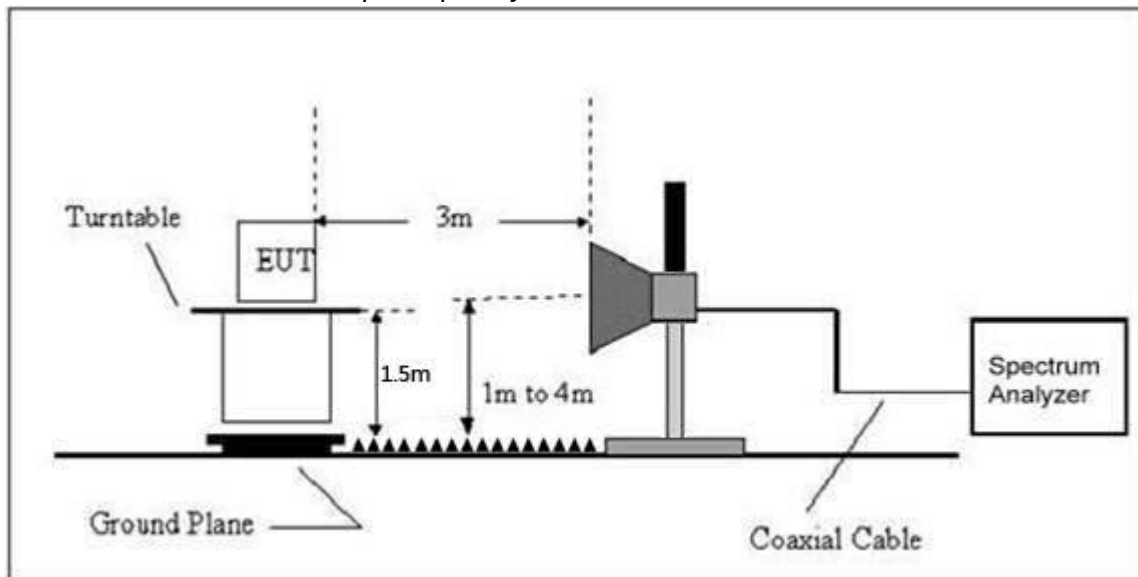

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	26 °C	Relative Humidity :	54%
Pressure:	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

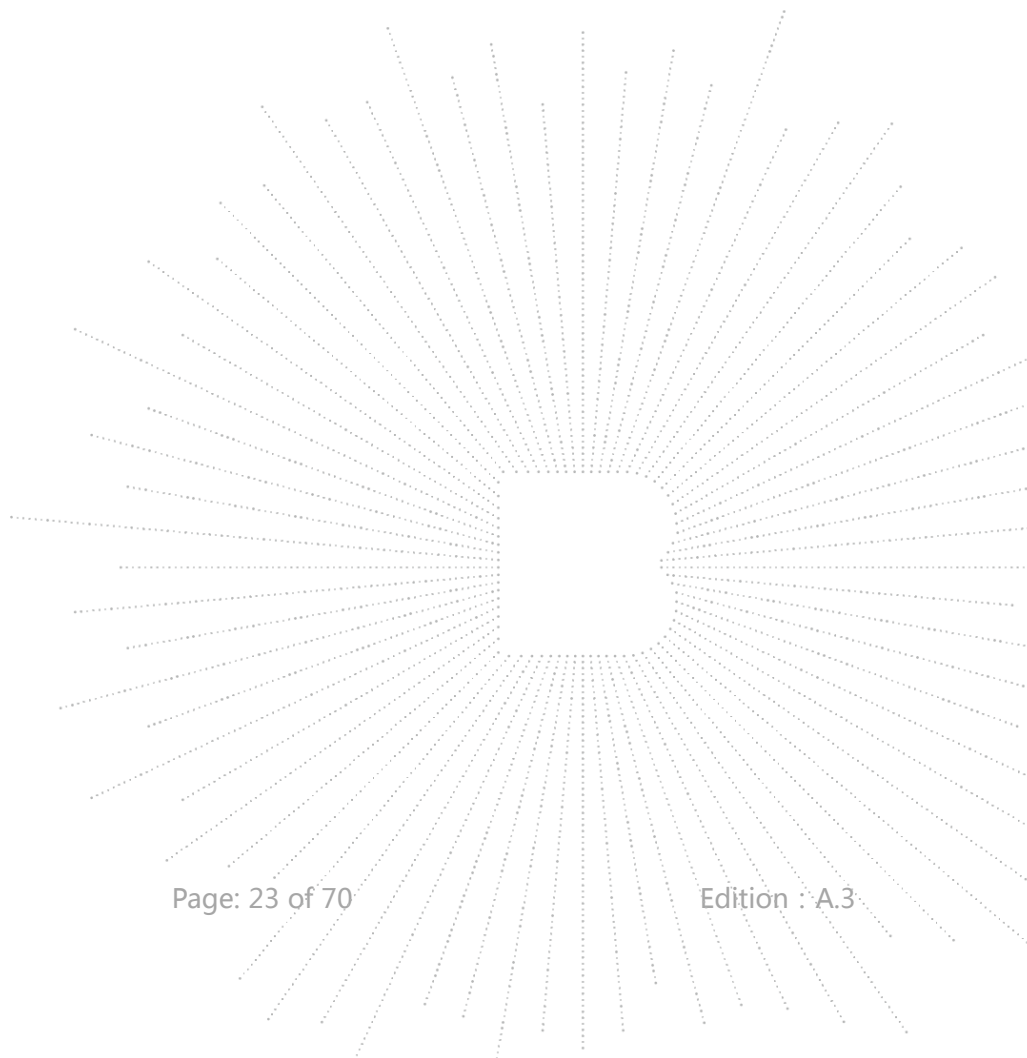

4.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

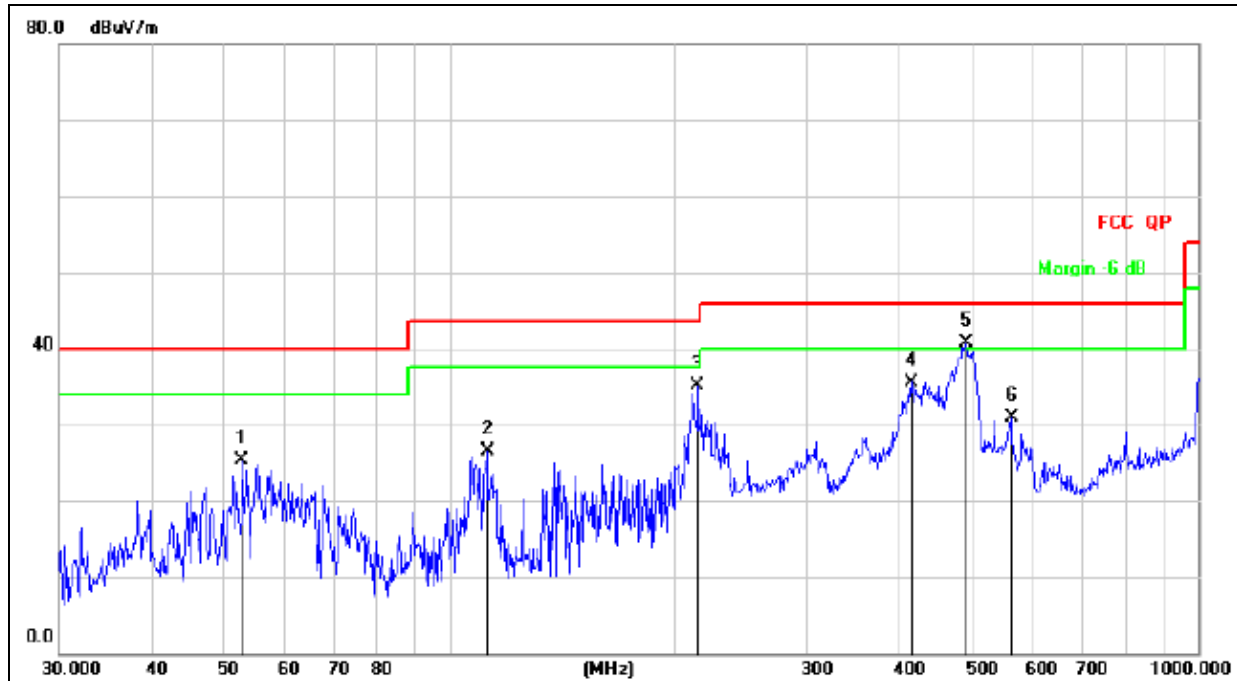


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	52.7600	39.62	-14.24	25.38	40.00	-14.62	QP
2	112.1305	42.78	-16.26	26.52	43.50	-16.98	QP
3	214.5143	49.98	-14.96	35.02	43.50	-8.48	QP
4	413.2706	45.00	-9.40	35.60	46.00	-10.40	QP
5 *	490.7447	48.53	-7.76	40.77	46.00	-5.23	QP
6	562.6624	36.80	-5.99	30.81	46.00	-15.19	QP

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

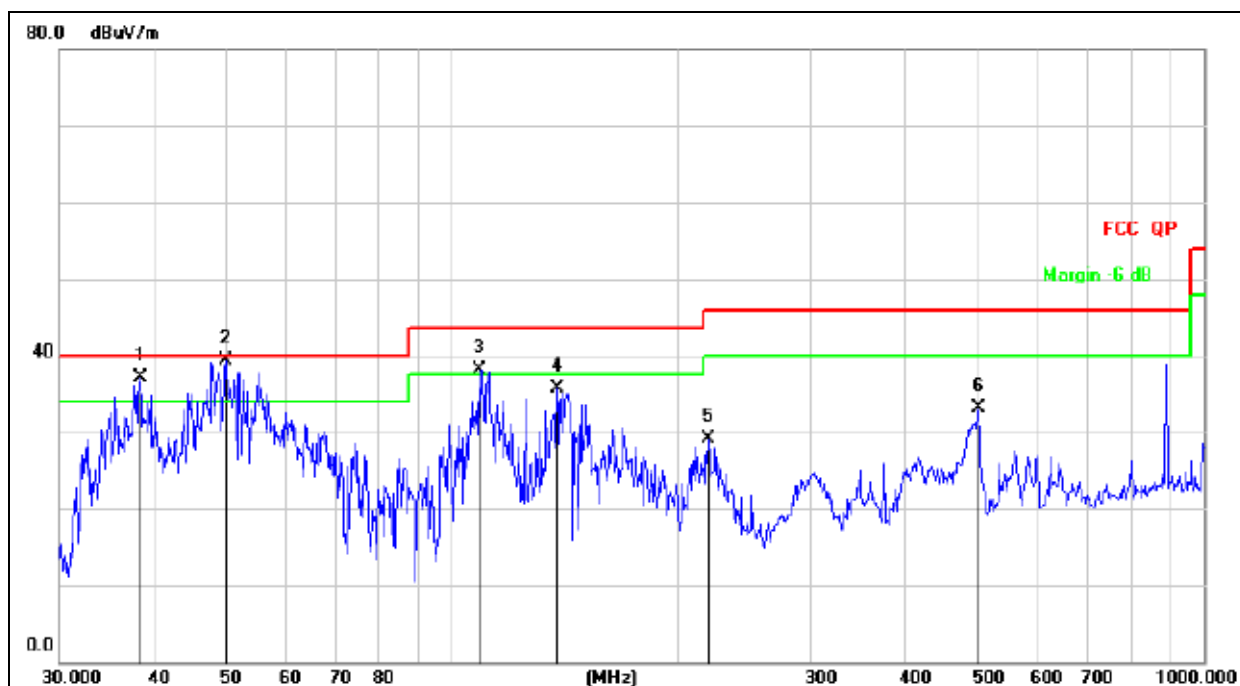

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	38.4809	52.15	-15.12	37.03	40.00	-2.97	QP
2	*	50.0566	53.44	-14.08	39.36	40.00	-0.64	QP
3	!	108.6470	54.21	-16.03	38.18	43.50	-5.32	QP
4		137.9028	53.66	-17.93	35.73	43.50	-7.77	QP
5		219.0753	43.99	-14.87	29.12	46.00	-16.88	QP
6		501.1790	40.67	-7.54	33.13	46.00	-12.87	QP

4.2.8 TEST RESULTS

Between 1GHz – 25GHz

802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.12	-0.43	52.69	74.00	-21.31	PK
V	4824.00	43.54	-0.43	43.11	54.00	-10.89	AV
V	7236.00	42.29	8.31	50.60	74.00	-23.40	PK
V	7236.00	31.68	8.31	39.99	54.00	-14.01	AV
H	4804.00	52.09	-0.43	51.66	74.00	-22.34	PK
H	4804.00	41.44	-0.43	41.01	54.00	-12.99	AV
H	7236.00	39.79	8.31	48.10	74.00	-25.90	PK
H	7236.00	31.52	8.31	39.83	54.00	-14.17	AV
Middle channel:2437MHz							
V	4874.00	49.73	-0.38	49.35	74.00	-24.65	PK
V	4874.00	42.56	-0.38	42.18	54.00	-11.82	AV
V	7311.00	40.55	8.83	49.38	74.00	-24.62	PK
V	7311.00	31.05	8.83	39.88	54.00	-14.12	AV
H	4874.00	47.81	-0.38	47.43	74.00	-26.57	PK
H	4874.00	38.58	-0.38	38.20	54.00	-15.80	AV
H	7311.00	37.94	8.83	46.77	74.00	-27.23	PK
H	7311.00	29.11	8.83	37.94	54.00	-16.06	AV
High channel:2462MHz							
V	4924.00	51.26	-0.32	50.94	74.00	-23.06	PK
V	4924.00	40.56	-0.32	40.24	54.00	-13.76	AV
V	7386.00	44.43	9.35	53.78	74.00	-20.22	PK
V	7386.00	35.38	9.35	44.73	54.00	-9.27	AV
H	4924.00	49.03	-0.32	48.71	74.00	-25.29	PK
H	4924.00	39.25	-0.32	38.93	54.00	-15.07	AV
H	7386.00	43.21	9.35	52.56	74.00	-21.44	PK
H	7386.00	34.57	9.35	43.92	54.00	-10.08	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. The Worst mode is Antenna A.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.28	-0.43	52.85	74.00	-21.15	PK
V	4824.00	44.56	-0.43	44.13	54.00	-9.87	AV
V	7236.00	43.70	8.31	52.01	74.00	-21.99	PK
V	7236.00	33.22	8.31	41.53	54.00	-12.47	AV
H	4804.00	48.89	-0.43	48.46	74.00	-25.54	PK
H	4804.00	38.88	-0.43	38.45	54.00	-15.55	AV
H	7236.00	42.32	8.31	50.63	74.00	-23.37	PK
H	7236.00	35.21	8.31	43.52	54.00	-10.48	AV
Middle channel:2437MHz							
V	4874.00	51.43	-0.38	51.05	74.00	-22.95	PK
V	4874.00	44.37	-0.38	43.99	54.00	-10.01	AV
V	7311.00	42.27	8.83	51.10	74.00	-22.90	PK
V	7311.00	32.64	8.83	41.47	54.00	-12.53	AV
H	4874.00	49.74	-0.38	49.36	74.00	-24.64	PK
H	4874.00	39.88	-0.38	39.50	54.00	-14.50	AV
H	7311.00	40.52	8.83	49.35	74.00	-24.65	PK
H	7311.00	33.39	8.83	42.22	54.00	-11.78	AV
High channel:2462MHz							
V	4924.00	53.24	-0.32	52.92	74.00	-21.08	PK
V	4924.00	45.12	-0.32	44.80	54.00	-9.20	AV
V	7386.00	44.52	9.35	53.87	74.00	-20.13	PK
V	7386.00	35.38	9.35	44.73	54.00	-9.27	AV
H	4924.00	51.38	-0.32	51.06	74.00	-22.94	PK
H	4924.00	41.37	-0.32	41.05	54.00	-12.95	AV
H	7386.00	41.55	9.35	50.90	74.00	-23.10	PK
H	7386.00	34.04	9.35	43.39	54.00	-10.61	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. The Worst mode is Antenna A.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.11	-0.43	52.68	74.00	-21.32	PK
V	4824.00	42.56	-0.43	42.13	54.00	-11.87	AV
V	7236.00	43.33	8.31	51.64	74.00	-22.36	PK
V	7236.00	33.51	8.31	41.82	54.00	-12.18	AV
H	4804.00	49.28	-0.43	48.85	74.00	-25.15	PK
H	4804.00	38.96	-0.43	38.53	54.00	-15.47	AV
H	7236.00	41.66	8.31	49.97	74.00	-24.03	PK
H	7236.00	34.29	8.31	42.60	54.00	-11.40	AV
Middle channel:2437MHz							
V	4874.00	50.70	-0.38	50.32	74.00	-23.68	PK
V	4874.00	43.23	-0.38	42.85	54.00	-11.15	AV
V	7311.00	40.45	8.83	49.28	74.00	-24.72	PK
V	7311.00	31.97	8.83	40.80	54.00	-13.20	AV
H	4874.00	46.09	-0.38	45.71	74.00	-28.29	PK
H	4874.00	35.49	-0.38	35.11	54.00	-18.89	AV
H	7311.00	38.52	8.83	47.35	74.00	-26.65	PK
H	7311.00	31.08	8.83	39.91	54.00	-14.09	AV
High channel:2462MHz							
V	4924.00	52.85	-0.32	52.53	74.00	-21.47	PK
V	4924.00	44.06	-0.32	43.74	54.00	-10.26	AV
V	7386.00	45.30	9.35	54.65	74.00	-19.35	PK
V	7386.00	35.15	9.35	44.50	54.00	-9.50	AV
H	4924.00	51.51	-0.32	51.19	74.00	-22.81	PK
H	4924.00	40.89	-0.32	40.57	54.00	-13.43	AV
H	7386.00	43.97	9.35	53.32	74.00	-20.68	PK
H	7386.00	35.76	9.35	45.11	54.00	-8.89	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. Test Mode is MIMO Mode.

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	54.82	-0.43	54.39	74.00	-19.61	PK
V	4844.00	45.96	-0.43	45.53	54.00	-8.47	AV
V	7266.00	46.30	8.31	54.61	74.00	-19.39	PK
V	7266.00	37.12	8.31	45.43	54.00	-8.57	AV
H	4844.00	50.40	-0.43	49.97	74.00	-24.03	PK
H	4844.00	39.96	-0.43	39.53	54.00	-14.47	AV
H	7266.00	43.76	8.31	52.07	74.00	-21.93	PK
H	7266.00	36.46	8.31	44.77	54.00	-9.23	AV
Middle channel:2437MHz							
V	4874.00	50.89	-0.38	50.51	74.00	-23.49	PK
V	4874.00	44.20	-0.38	43.82	54.00	-10.18	AV
V	7311.00	43.59	8.83	52.42	74.00	-21.58	PK
V	7311.00	34.72	8.83	43.55	54.00	-10.45	AV
H	4874.00	49.39	-0.38	49.01	74.00	-24.99	PK
H	4874.00	38.95	-0.38	38.57	54.00	-15.43	AV
H	7311.00	41.04	8.83	49.87	74.00	-24.13	PK
H	7311.00	33.31	8.83	42.14	54.00	-11.86	AV
High channel:2452MHz							
V	4904.00	52.68	-0.32	52.36	74.00	-21.64	PK
V	4904.00	41.82	-0.32	41.50	54.00	-12.50	AV
V	7356.00	44.02	9.35	53.37	74.00	-20.63	PK
V	7356.00	34.75	9.35	44.10	54.00	-9.90	AV
H	4904.00	51.59	-0.32	51.27	74.00	-22.73	PK
H	4904.00	42.01	-0.32	41.69	54.00	-12.31	AV
H	7356.00	41.27	9.35	50.62	74.00	-23.38	PK
H	7356.00	33.75	9.35	43.10	54.00	-10.90	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. Test Mode is MIMO Mode.

4.3 RADIATED BAND EMISSION MEASUREMENT

4.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

4.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.3.3 DEVIATION FROM TEST STANDARD

No deviation

4.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

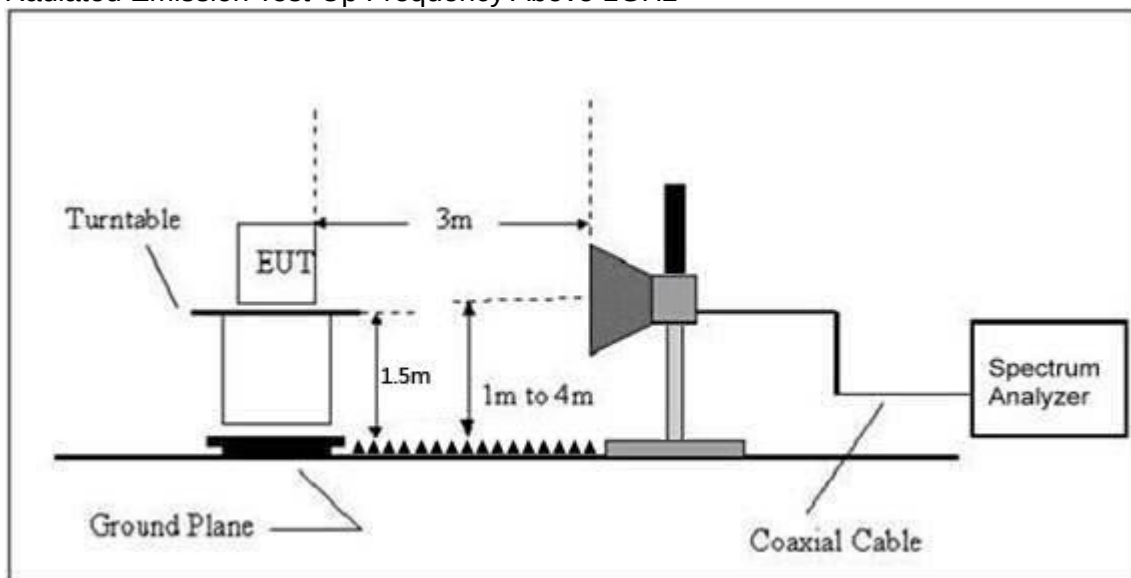

4.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Over (dBuV/ m)	Result
					PK	PK	AV	PK	
802.11b		Low Channel 2412MHz							
	H	2390.00	57.13	-6.70	50.43	74.00	54.00	-23.57	PASS
	H	2400.00	48.60	-6.71	41.89	74.00	54.00	-32.11	PASS
	V	2390.00	57.14	-6.70	50.44	74.00	54.00	-23.56	PASS
	V	2400.00	49.62	-6.71	42.91	74.00	54.00	-31.09	PASS
		High Channel 2462MHz							
	H	2483.50	57.36	-6.79	50.57	74.00	54.00	-23.43	PASS
	H	2485.00	49.79	-6.81	42.98	74.00	54.00	-31.02	PASS
	V	2483.50	55.20	-6.79	48.41	74.00	54.00	-25.59	PASS
	V	2485.00	46.37	-6.81	39.56	74.00	54.00	-34.44	PASS
802.11g		Low Channel 2412MHz							
	H	2390.00	57.22	-6.70	50.52	74.00	54.00	-23.48	PASS
	H	2400.00	49.21	-6.71	42.50	74.00	54.00	-31.5	PASS
	V	2390.00	56.96	-6.70	50.26	74.00	54.00	-23.74	PASS
	V	2400.00	48.29	-6.71	41.58	74.00	54.00	-32.42	PASS
		High Channel 2462MHz							
	H	2483.50	55.89	-6.79	49.10	74.00	54.00	-24.9	PASS
	H	2485.00	48.82	-6.81	42.01	74.00	54.00	-31.99	PASS
	V	2483.50	55.97	-6.79	49.18	74.00	54.00	-24.82	PASS
	V	2485.00	48.02	-6.81	41.21	74.00	54.00	-32.79	PASS
	Remark: 1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Over (dBuV/m)	Result
					PK	PK	AV	PK	
802.11 n20		Low Channel 2412MHz							
	H	2390.00	56.94	-6.70	50.24	74.00	54.00	-23.76	PASS
	H	2400.00	49.75	-6.71	43.04	74.00	54.00	-30.96	PASS
	V	2390.00	57.57	-6.70	50.87	74.00	54.00	-23.13	PASS
	V	2400.00	49.62	-6.71	42.91	74.00	54.00	-31.09	PASS
		High Channel 2462MHz							
	H	2483.50	56.34	-6.79	49.55	74.00	54.00	-24.45	PASS
	H	2500.00	48.49	-6.81	41.68	74.00	54.00	-32.32	PASS
	V	2483.50	55.99	-6.79	49.20	74.00	54.00	-24.8	PASS
	V	2500.00	48.36	-6.81	41.55	74.00	54.00	-32.45	PASS
802.11 n40		Low Channel 2422MHz							
	H	2390.00	56.52	-6.70	49.82	74.00	54.00	-24.18	PASS
	H	2400.00	49.18	-6.71	42.47	74.00	54.00	-31.53	PASS
	V	2390.00	55.53	-6.70	48.83	74.00	54.00	-25.17	PASS
	V	2400.00	47.10	-6.71	40.39	74.00	54.00	-33.61	PASS
		High Channel 2452MHz							
	H	2483.50	54.76	-6.79	47.97	74.00	54.00	-26.03	PASS
	H	2500.00	48.61	-6.81	41.80	74.00	54.00	-32.2	PASS
	V	2483.50	53.95	-6.79	47.16	74.00	54.00	-26.84	PASS
	V	2500.00	45.40	-6.81	38.59	74.00	54.00	-35.41	PASS
	Remark: 1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

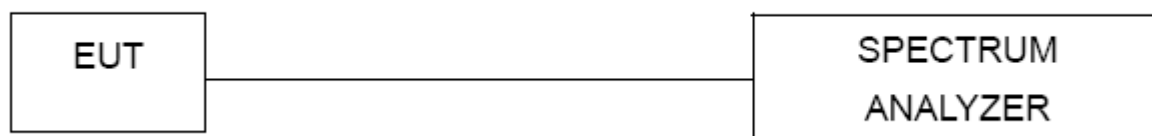

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.
 Note: Power Spectral Density(dBm)=Reading+Cable Loss

5.1.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX b Mode		

Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANT B	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	0.832	1.452	/	8	PASS
2437 MHz	0.629	1.584	/	8	PASS
2462 MHz	1.638	1.051	/	8	PASS

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

TX CH01



TX CH06



TX CH11




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX g Mode		


Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-14.310	-15.970	/	8	PASS
2437 MHz	-15.509	-15.890	/	8	PASS
2462 MHz	-15.341	-15.750	/	8	PASS

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


TX CH01

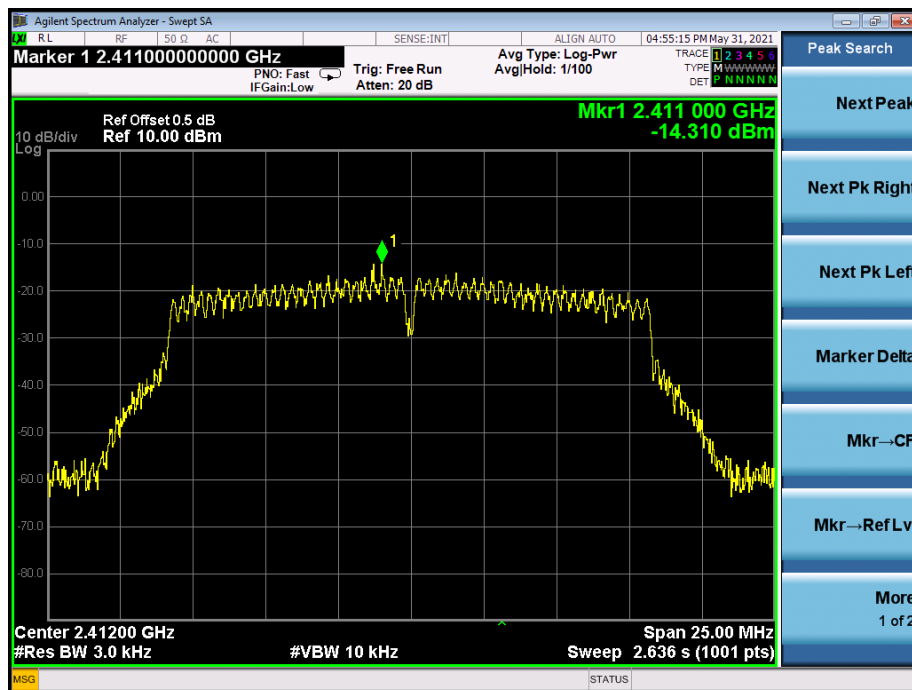

TX CH06

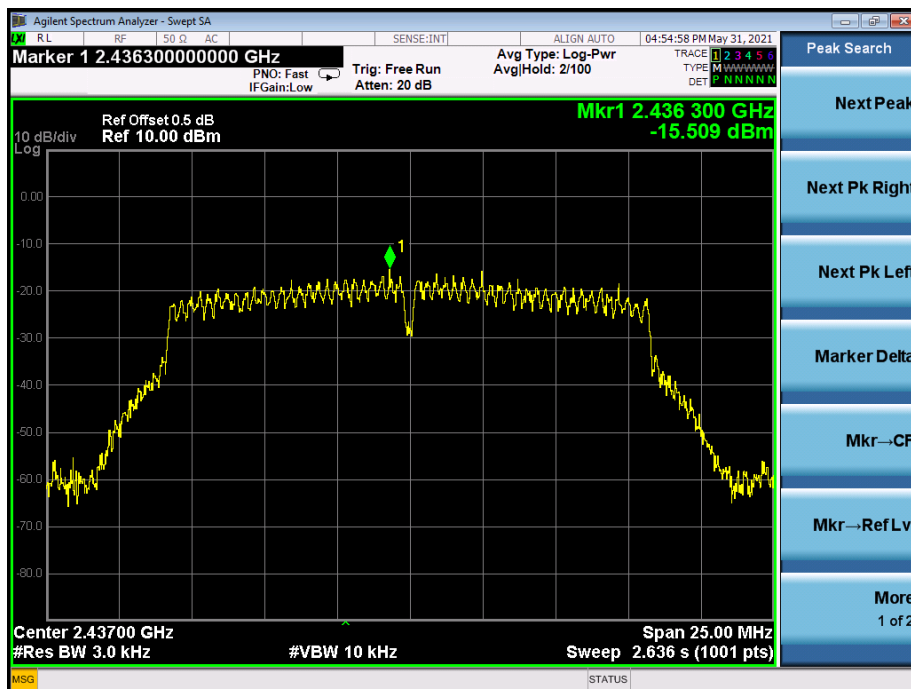

TX CH11

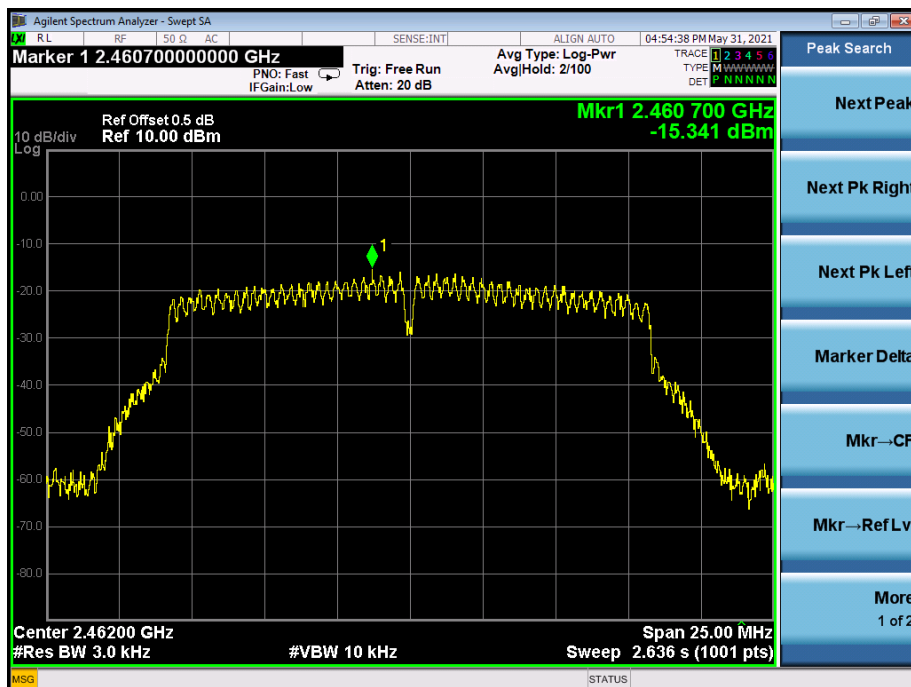


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX n Mode(20M)		


Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-16.908	-16.304	-13.585	5.99	PASS
2437 MHz	-17.473	-16.784	-14.105	5.99	PASS
2462 MHz	-16.759	-17.238	-13.982	5.99	PASS

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.


TX CH01

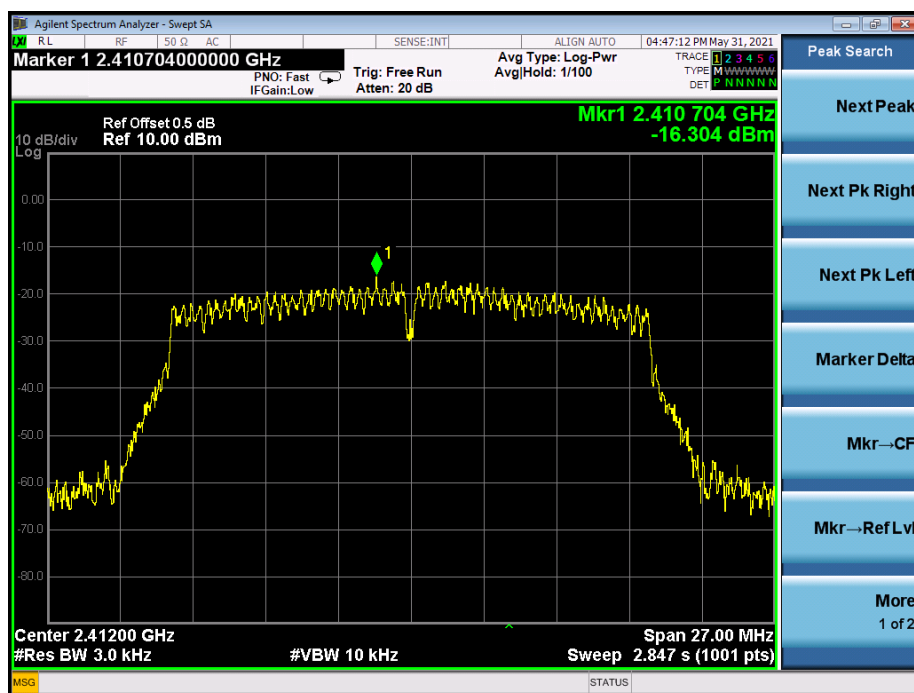

TX CH06

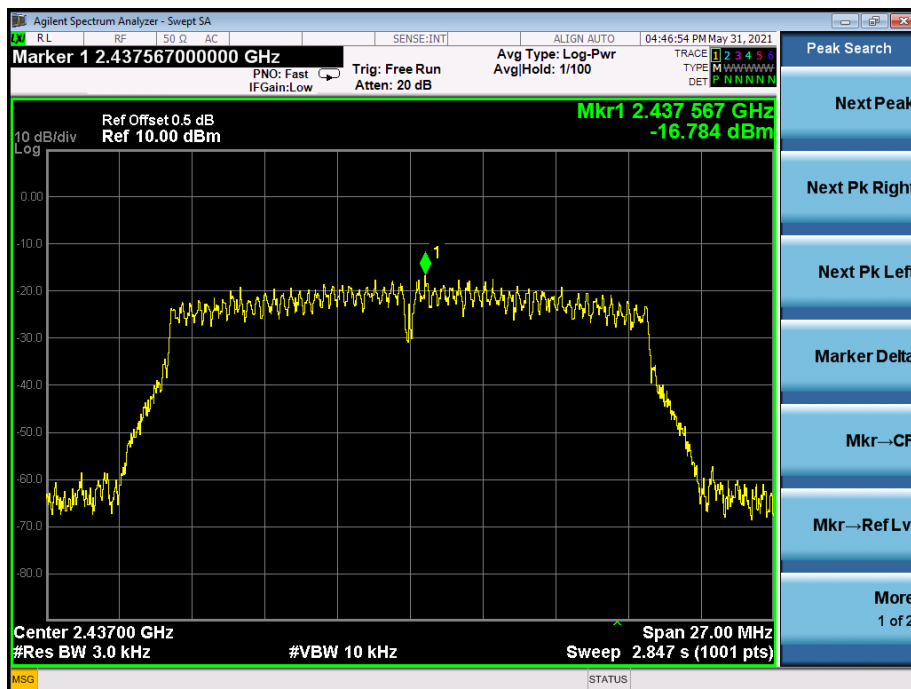

TX CH11

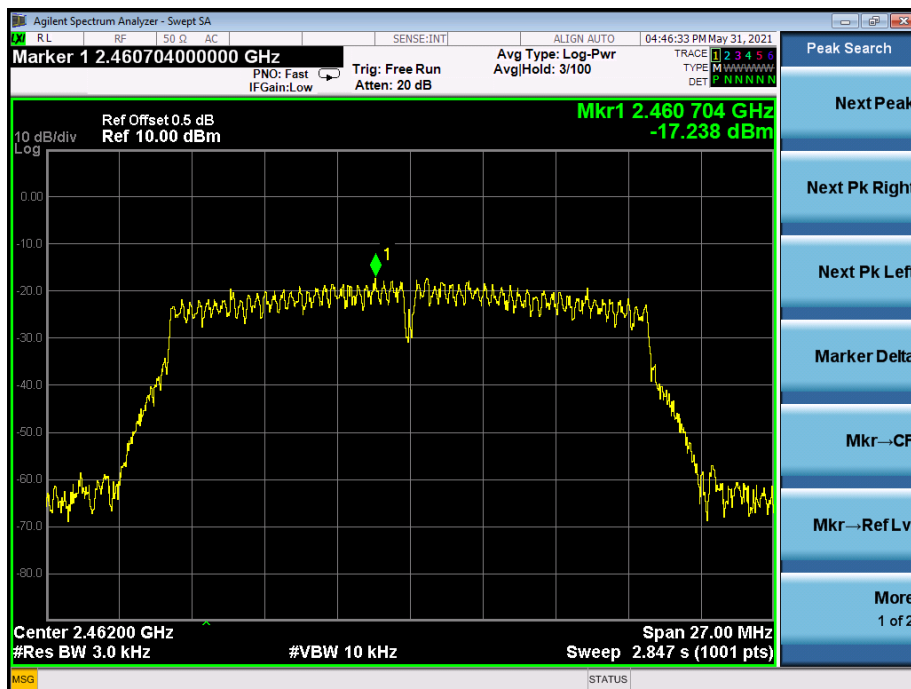


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX n Mode(40M)		


Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2422 MHz	-17.443	-15.365	-13.271	5.99	PASS
2437 MHz	-16.790	-17.448	-14.096	5.99	PASS
2452 MHz	-17.659	-17.095	-14.358	5.99	PASS

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.


TX CH03

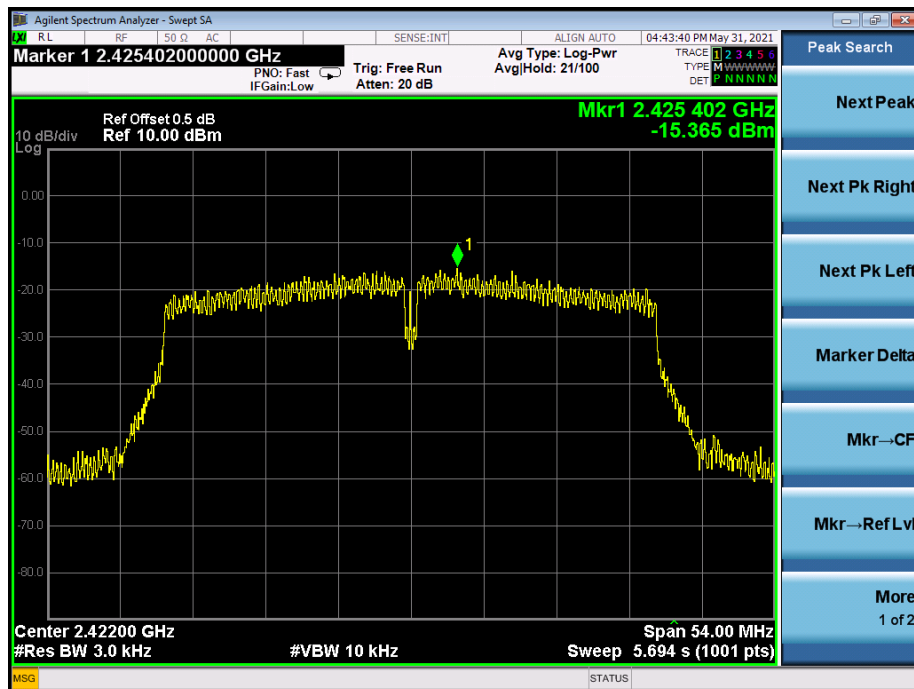

TX CH06

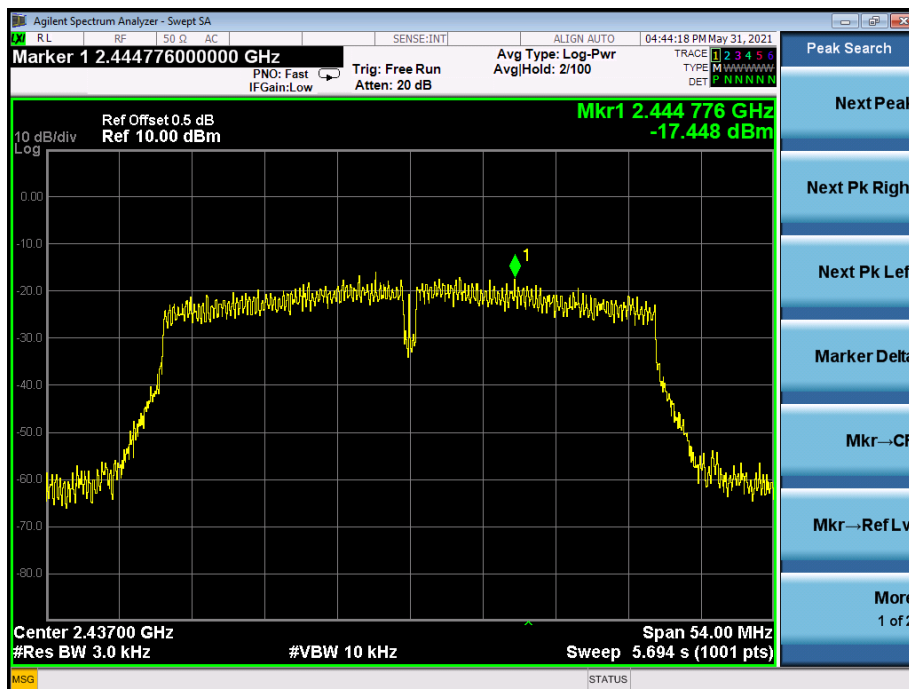

TX CH09

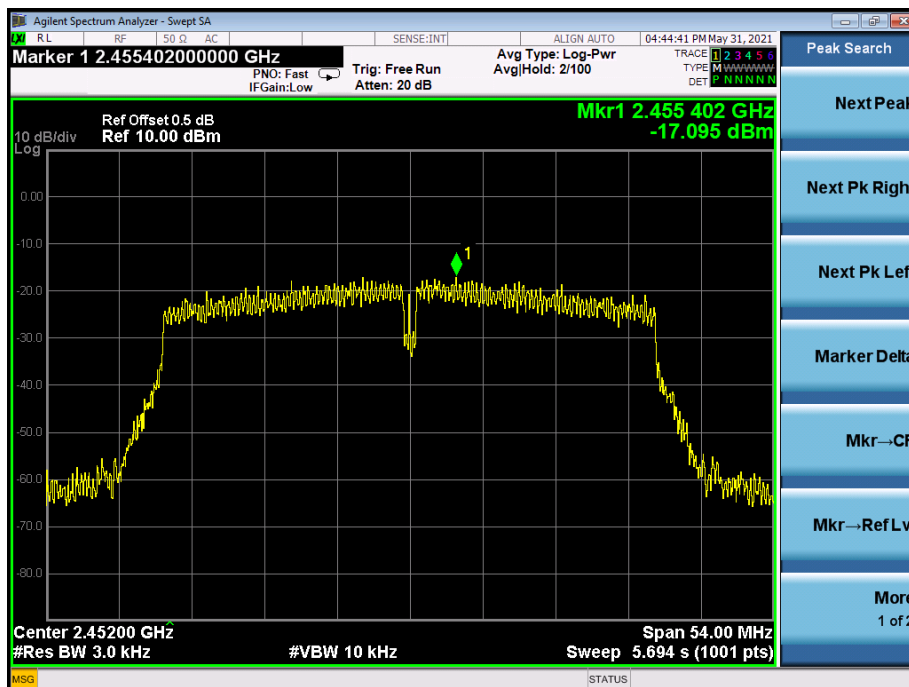

6. BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


6.1.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX b Mode		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2412	10.04	10.02	500	Pass
2437	9.59	9.59	500	Pass
2462	10.03	10.02	500	Pass

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


TX CH 01

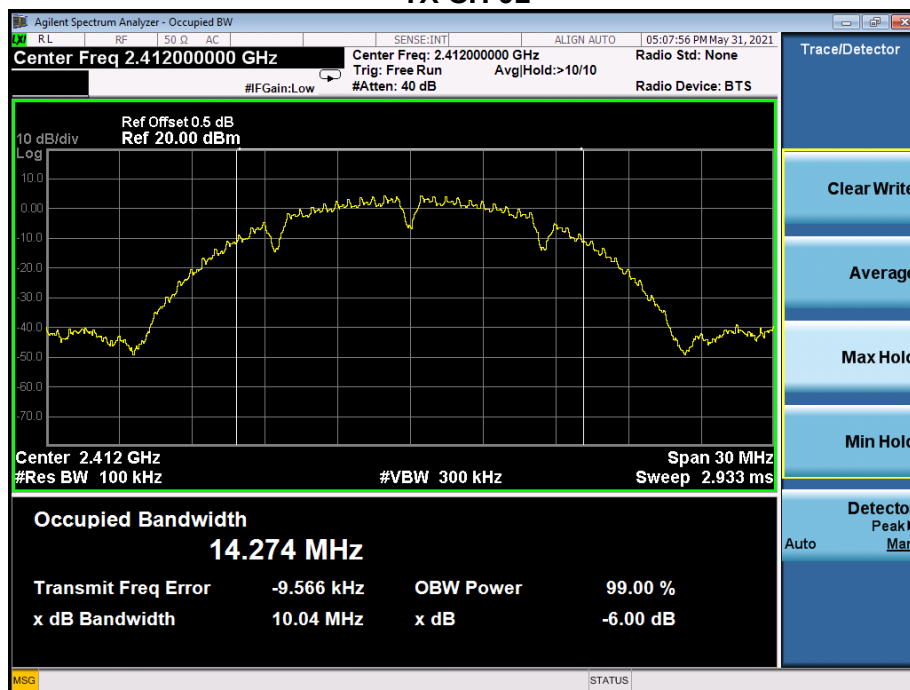

TX CH 06

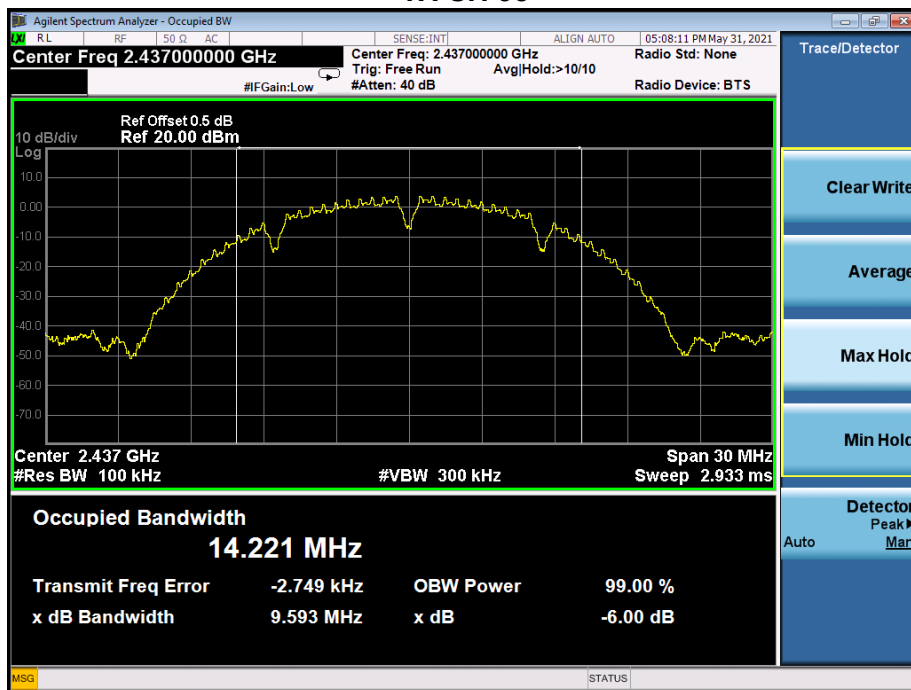

TX CH 11

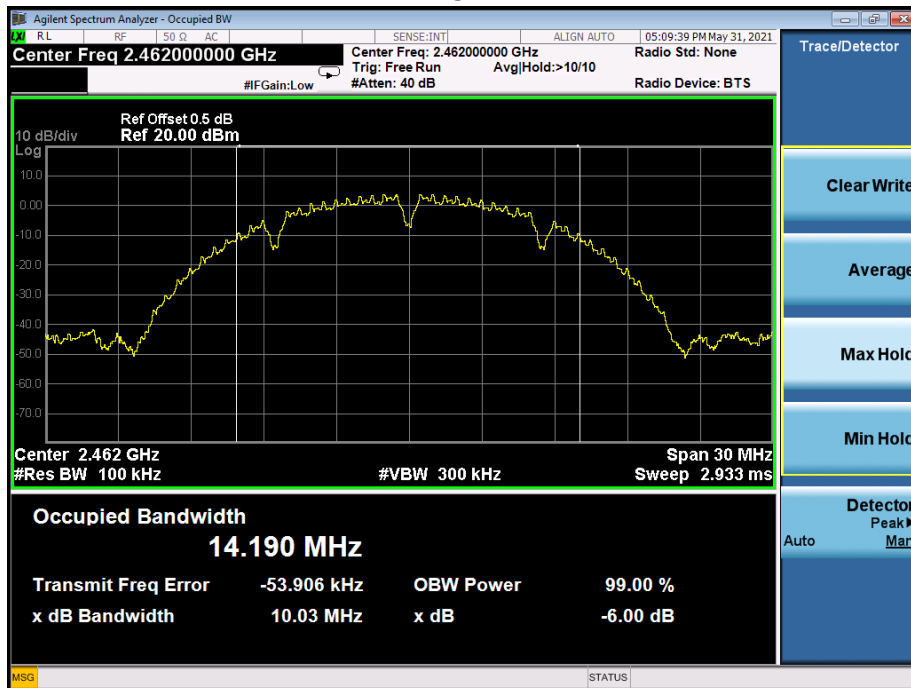


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX g Mode		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2412	15.15	15.11	500	Pass
2437	15.14	15.11	500	Pass
2462	15.13	15.14	500	Pass

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


TX CH 01

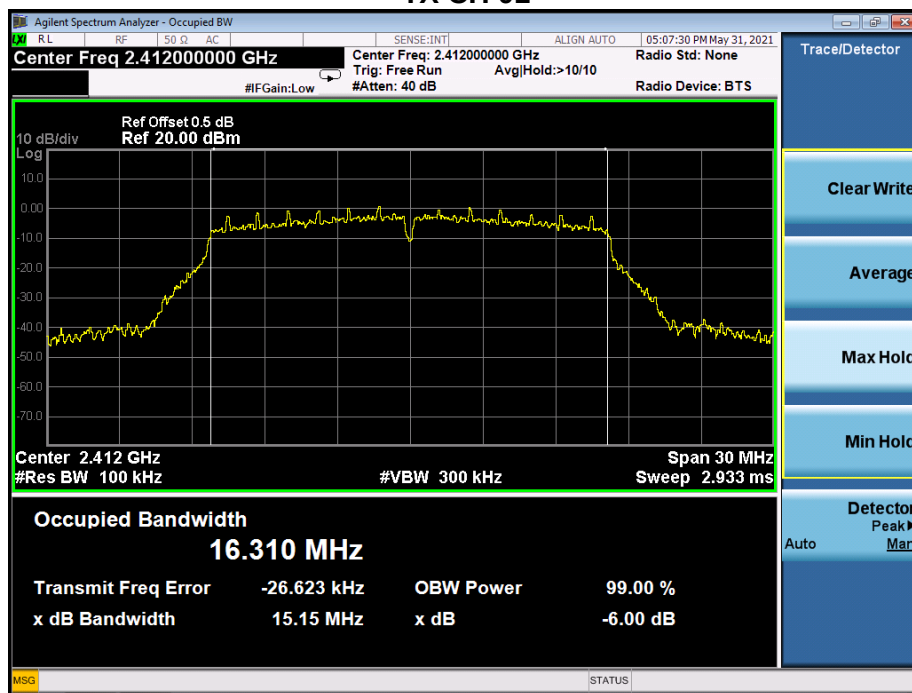

TX CH 06

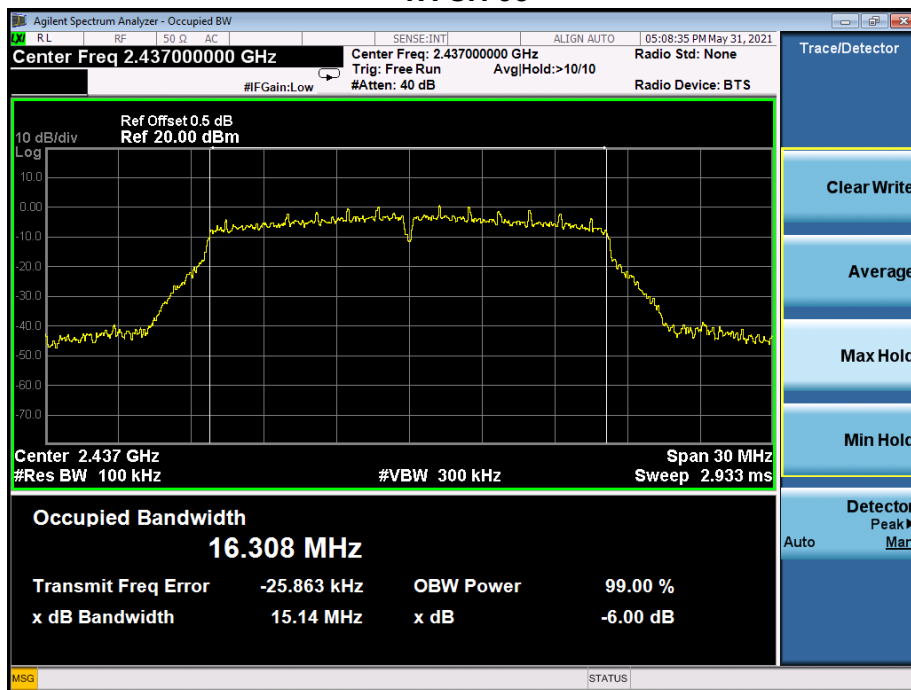


TX CH 11

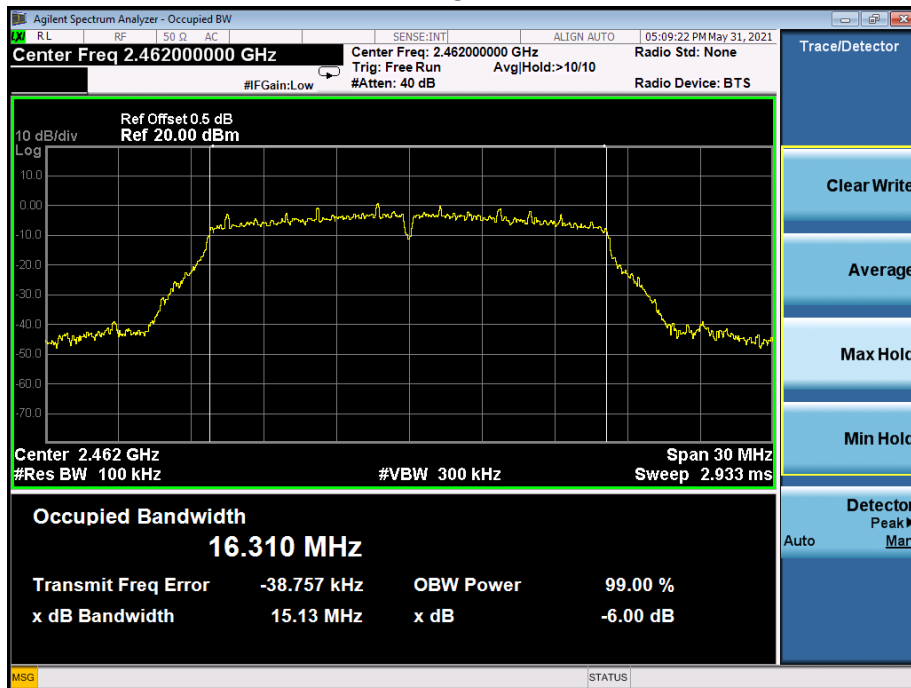


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX n Mode(20M)		

Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2412	15.11	15.11	500	Pass
2437	15.08	15.12	500	Pass
2462	15.13	13.13	500	Pass


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.

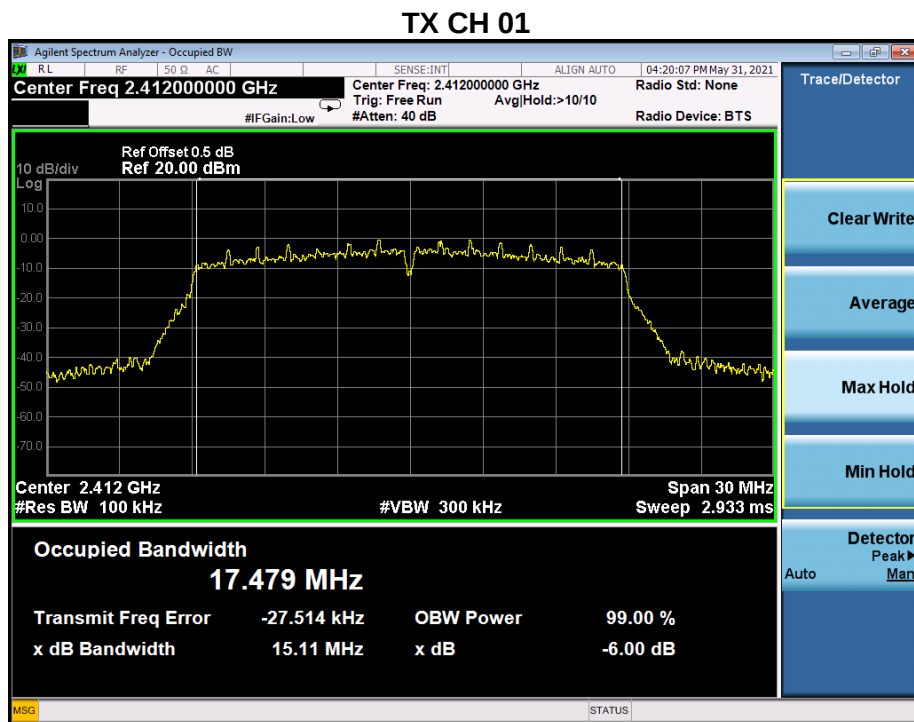

TX CH 06

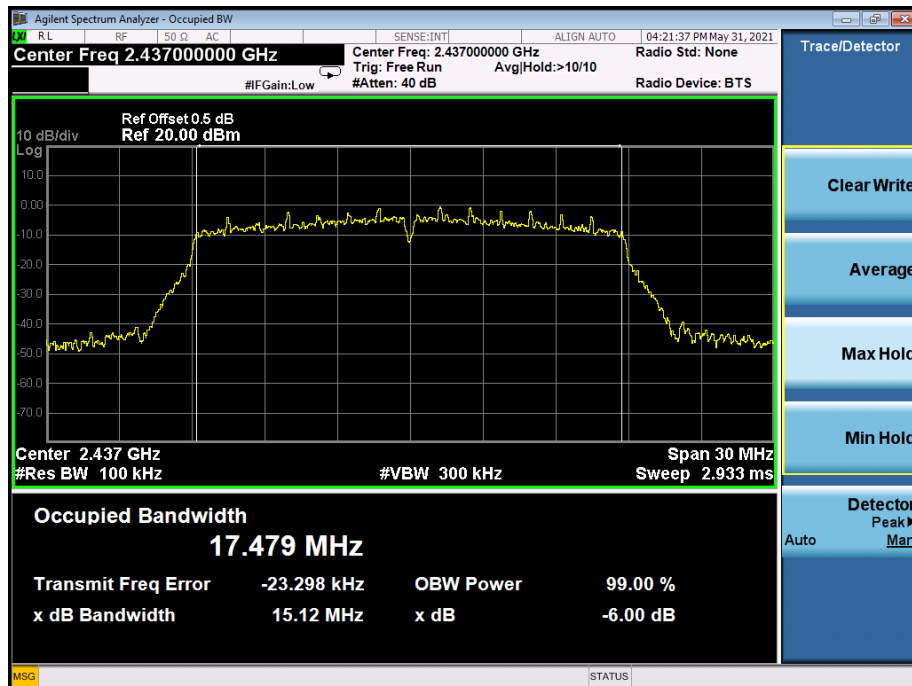

TX CH 11

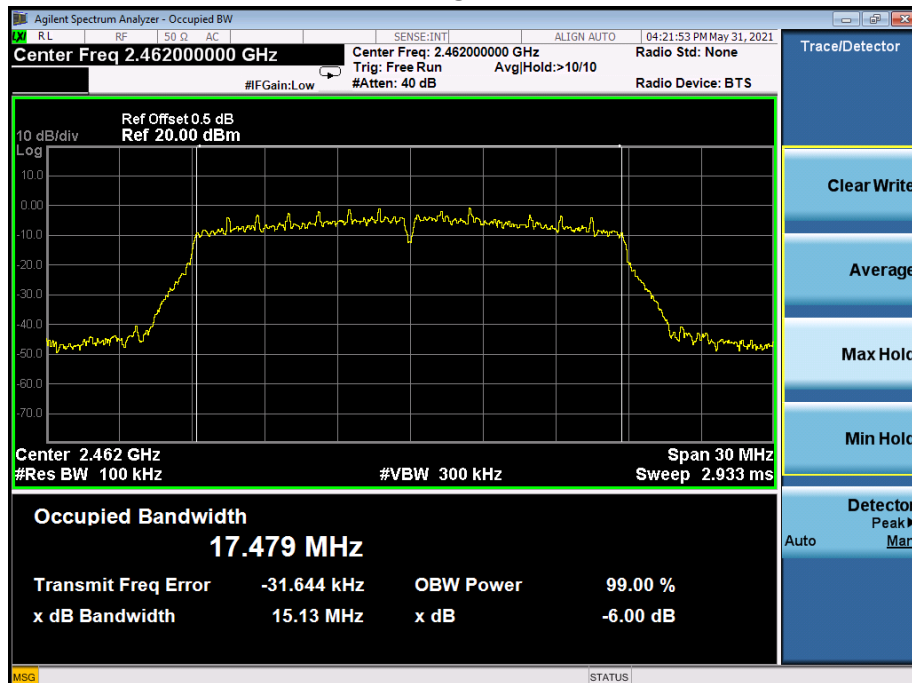


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX n Mode(40M)		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2422	35.13	35.13	500	Pass
2437	35.13	35.04	500	Pass
2452	35.12	35.13	500	Pass

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


TX CH 03

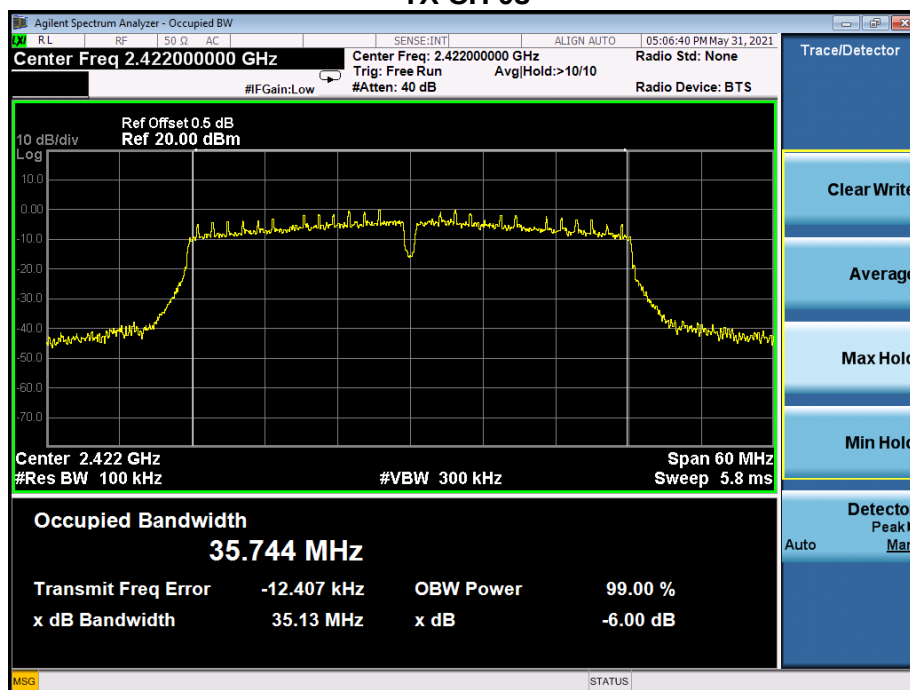

TX CH 06

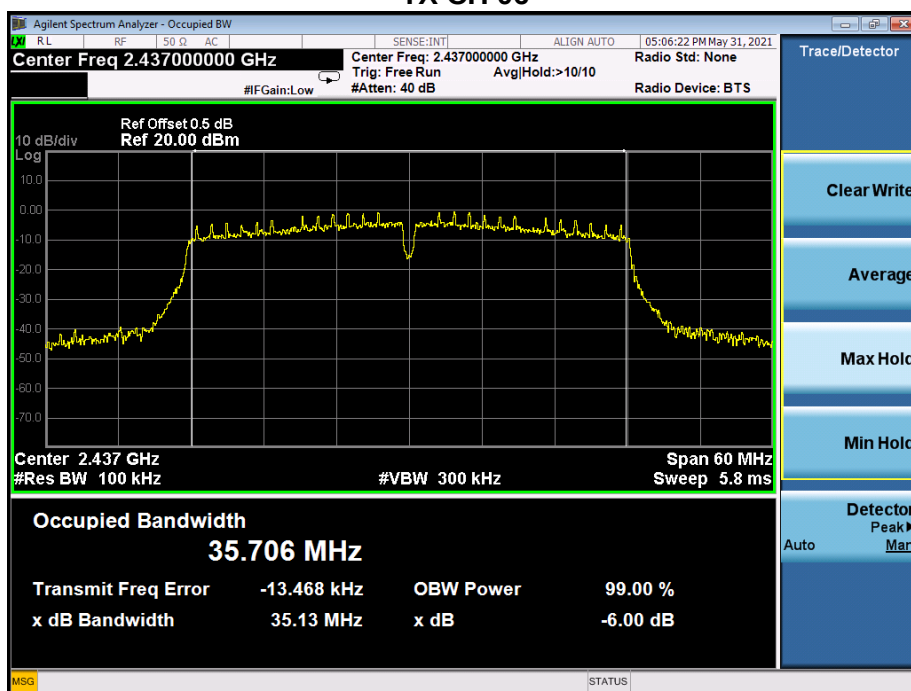

TX CH 09

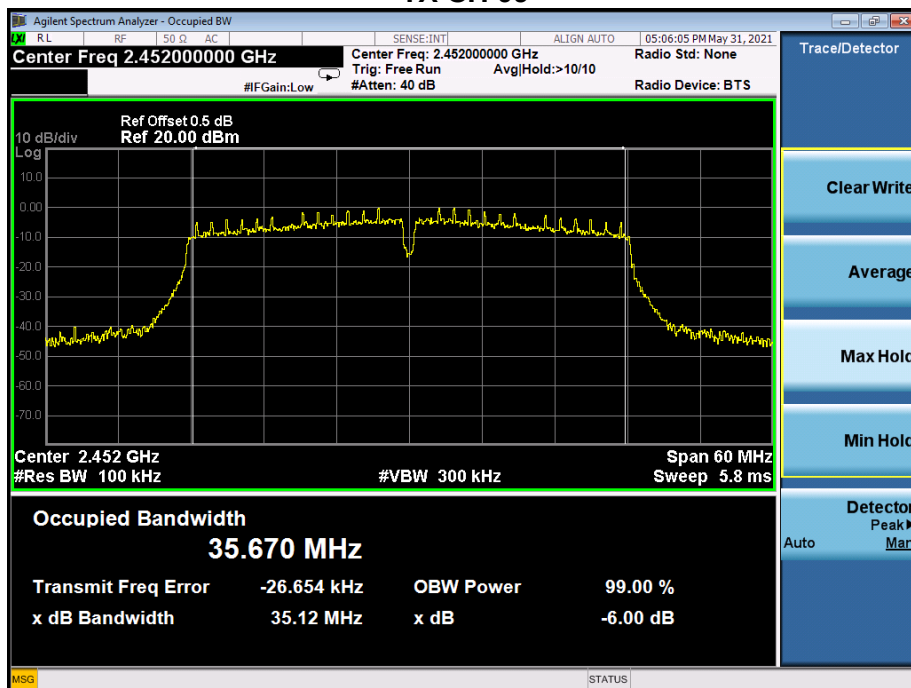

7. PEAK OUTPUT POWER TEST

7.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz

Note:Antenna A gain: 5Bi, Antenna B gain: 5dBi, The Array gain=0 dB for NANT≤4,
So the directional gain for Power measurements is 5dBi

Test Mode	Frequency	Maximum Conducted Output Power(PK) ANTA	Maximum Conducted Output Power(PK) ANTB	Total Power Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	(dBm)	(dBm)	dBm
802.11b	2412	15.782	15.368	/	30
	2437	16.005	15.152	/	30
	2462	15.441	15.630	/	30
802.11g	2412	15.508	14.982	/	30
	2437	14.695	14.656	/	30
	2462	14.698	14.317	/	30
802.11n20	2412	13.416	13.702	16.572	30
	2437	13.162	13.195	16.189	30
	2462	13.613	13.230	16.436	30
802.11n40	2422	12.841	14.071	16.510	30
	2437	12.636	13.492	16.095	30
	2452	12.746	13.198	15.988	30

8. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

8.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP




8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


8.6 TEST RESULTS

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


802.11b: Band Edge, Left Side

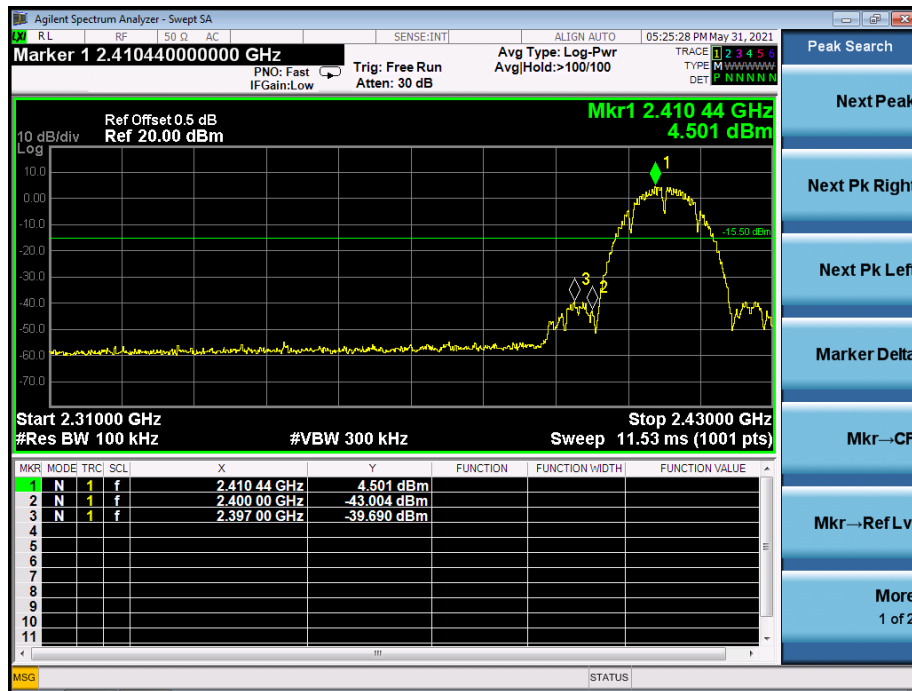

802.11b: Band Edge, Right Side

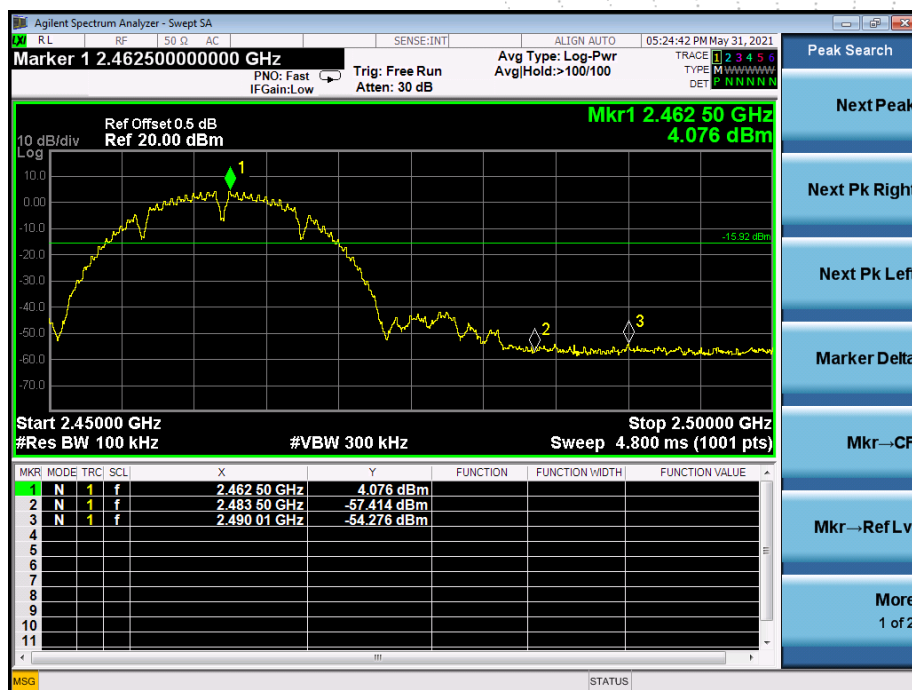


802.11g: Band Edge, Left Side

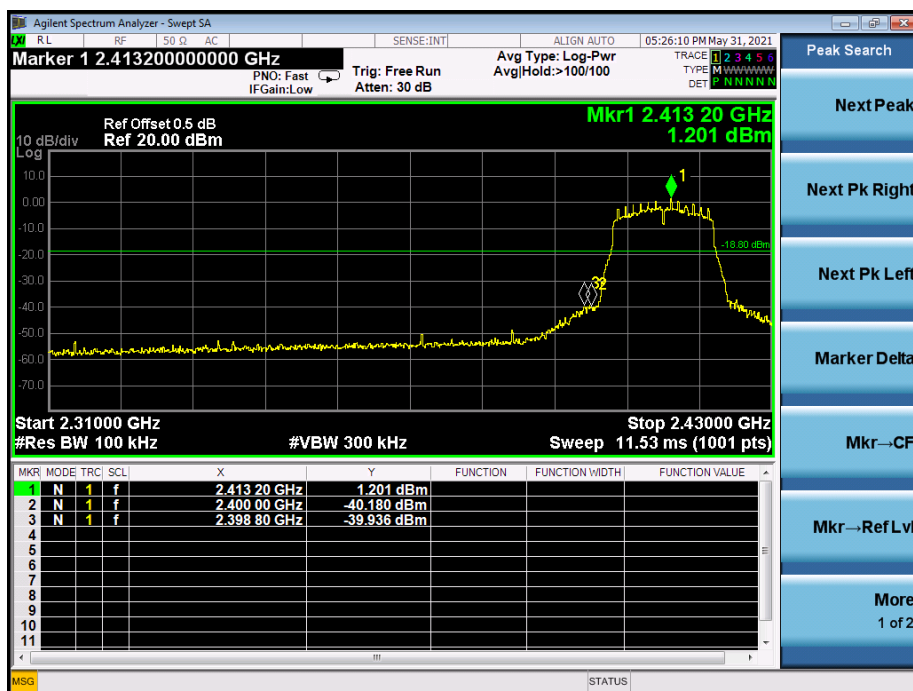

802.11g: Band Edge, Right Side




802.11n-HT20: Band Edge, Left Side

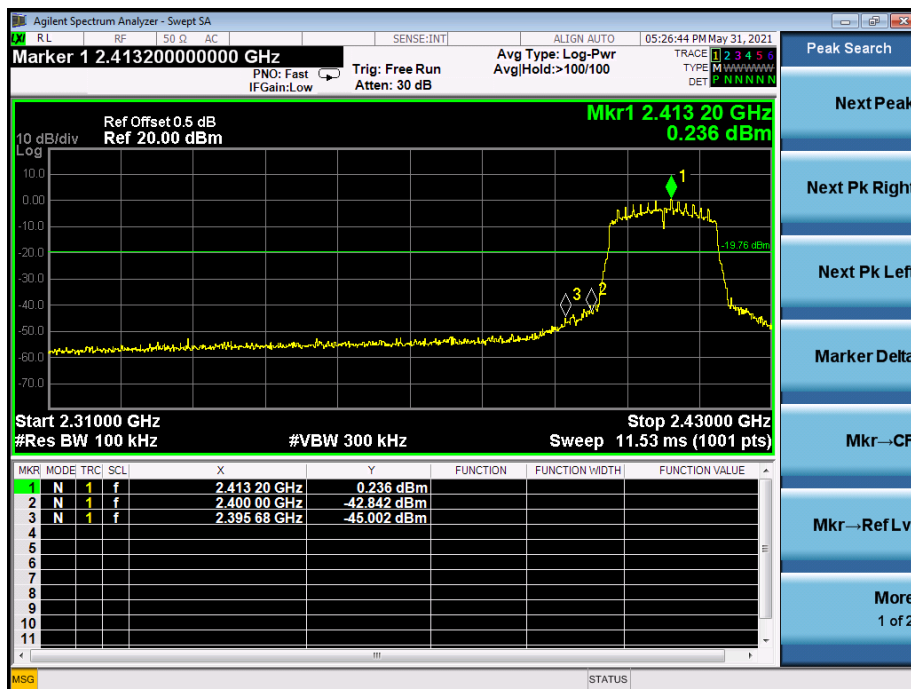


802.11n-HT20: Band Edge, Right Side



802.11n-HT40: Band Edge, Left Side

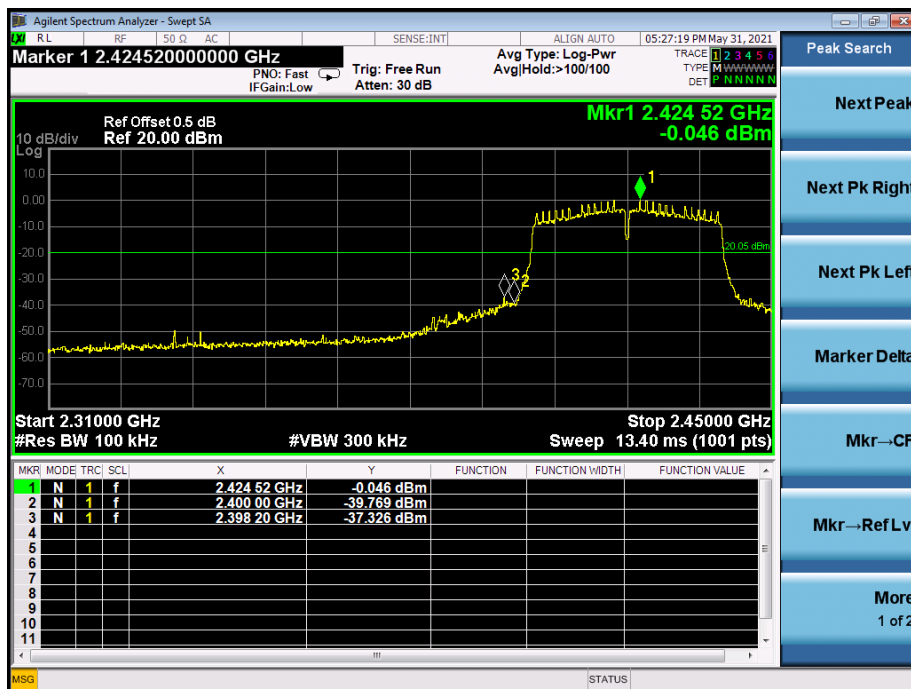

802.11n-HT40: Band Edge, Right Side

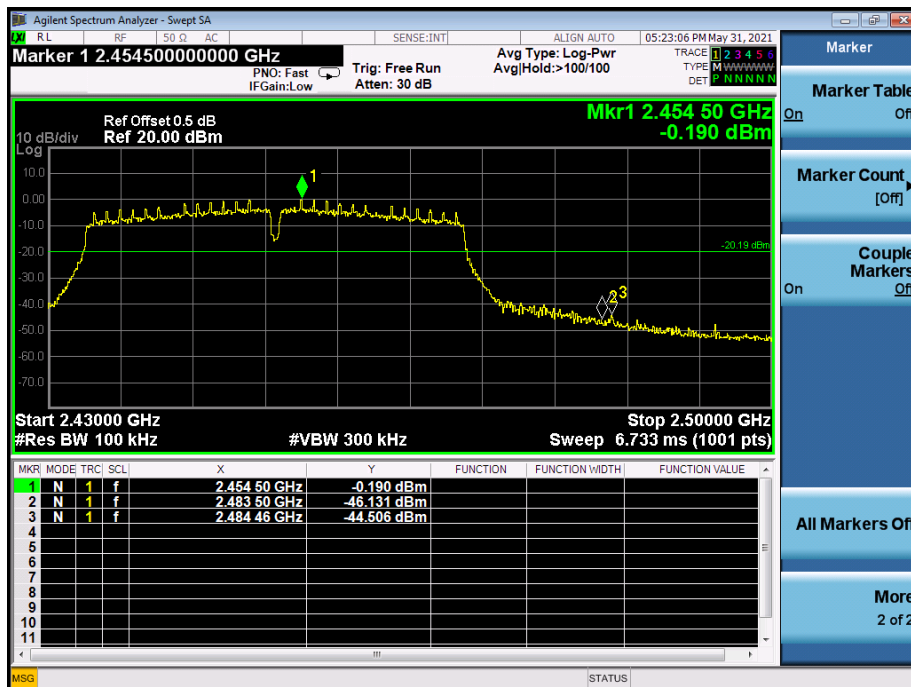


CONDUCTED EMISSION MEASUREMENT


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

802.11b


Low Channel 2412MHz

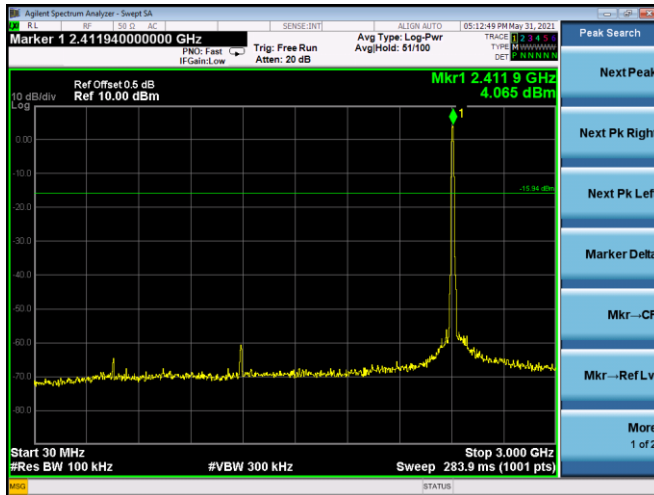

Middle Channel 2437MHz

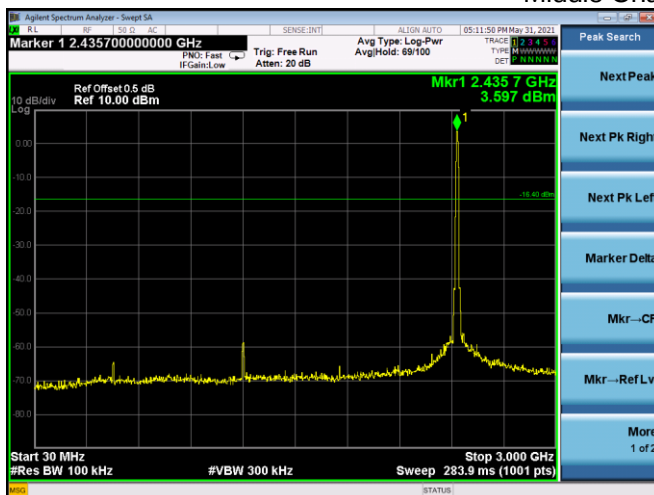


High Channel 2462MHz

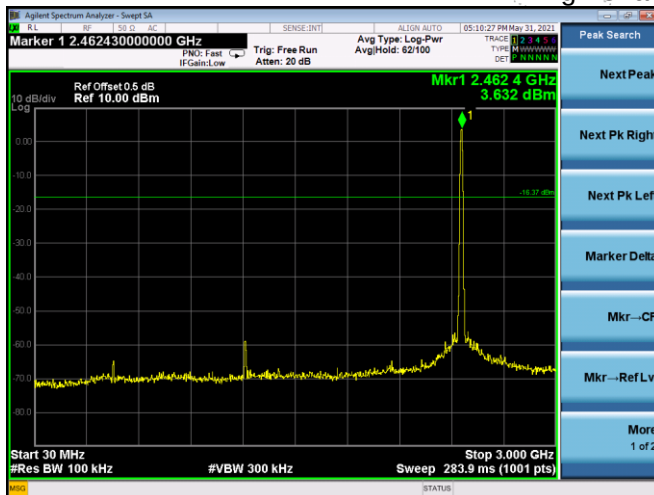


802.11g

Low Channel 2412MHz

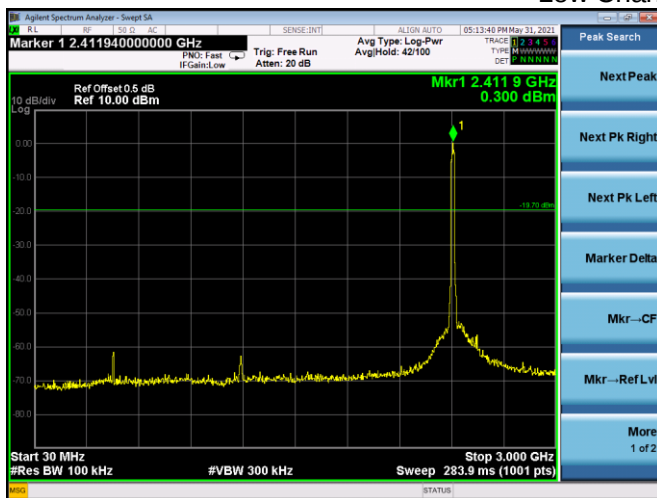

Middle Channel 2437MHz

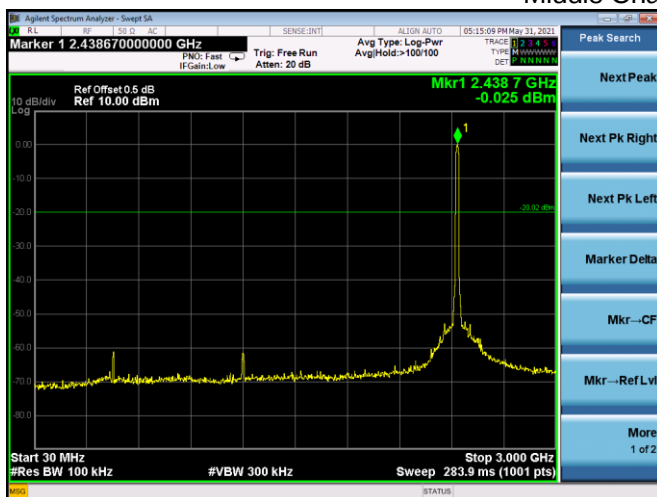

High Channel 2462MHz

