



FCC Part 15, Subpart B, Class B

CONVERGENT DESIGN

Video Recorder

Test Model: Koko

Prepared for : CONVERGENT DESIGN
Address : 4525 Northpark Dr.Colorado Springs, CO 80918 USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : August 17, 2023
Number of tested samples : 1
Sample No. : A08163022-1
Serial number : Prototype
Date of Test : August 17, 2023~ November 01, 2023
Date of Report : November 02, 2023





FCC Part 15, Subpart B, Class B
FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Report Reference No. : **LCSA08163022E**

Date Of Issue : November 02, 2023

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Testing Location/ Procedure... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □

Applicant's Name..... : **CONVERGENT DESIGN**

Address : 4525 Northpark Dr.Colorado Springs, CO 80918 USA

Test Specification

Standard..... : FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Test Report Form No...... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Video Recorder**

Trade Mark : OvIde

Test Model : Koko

Ratings : For EUT input: DC 12V 3A

Result : **Positive**

Compiled by:

Cindy Nie / File Administrator

Supervised by:

Baron Wen / Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC SDOC-- TEST REPORT****Test Report No. : LCSA08163022E**November 02, 2023

Date of issue

Test Model : Koko

EUT..... : Video Recorder

Applicant..... : CONVERGENT DESIGN

Address..... : 4525 Northpark Dr.Colorado Springs, CO 80918 USA

Telephone..... : /

Fax..... : /

Manufacturer..... : Ovde Maudet SLAddress..... : Eduard Maristany 396 08918 Badalona, Barcelona,
Spain

Telephone..... : /

Fax..... : /

Factory..... : Ovde Maudet SLAddress..... : Eduard Maristany 396 08918 Badalona, Barcelona,
Spain

Telephone..... : /

Fax..... : /

Test Result according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	November 02, 2023	Initial Issue	--





TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT)	7
2.3. Description of Test Facility	7
2.4. Statement of the Measurement Uncertainty	8
2.5. Measurement Uncertainty	8
3. TEST RESULTS	9
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT	9
3.2. Radiated emission Measurement	13
4. TEST SETUP PHOTOGRAPHS OF EUT	20
5. EXTERIOR PHOTOGRAPHS OF THE EUT	20
6. INTERIOR PHOTOGRAPHS OF THE EUT	20





1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

Test mode:		
Mode 1	Play Mode	Record
Mode 2	Rec Mode	Pre-scan
Note: Pre-Scan all mode, Thus record worse case mode result in this report.		





2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Video Recorder

Trade Mark : OvIde

Test Model : Koko

Power Supply : For EUT input: DC 12V 3A

Highest internal frequency (Fx) : Fx > 108 MHz

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5 GHz
$F_x > 1 \text{ GHz}$	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

2.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Ingle Technology Co., LTD	Switch-mode power supply	EMSA120150	EMSA120150-P5P-SZ	/
JET	Switch power supply	PSM11R-120	/	/
DELTA Electronic Inc.	AC/DC Adapter	DPS-65VB	IKFD1911131011	/
Blackmagic design	Mini Converter SDI Distribution	1244941	/	/
IOI	GENLOCK	FLARE 2KSDI	220B2808	/

2.3. Description of Test Facility

Site Description

EMC Lab. : NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.
Test Firm Registration Number: 254912.





2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (Ulab)	Expanded Uncertainty (Ucisp)
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.





3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	Farad	EZ	/	/	/
2	Artificial Mains	R&S	ENV216	101288	2023-06-09	2024-06-08
3	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2023-08-15	2024-08-14
4	EMI Test Receiver	R&S	ESR3	102312	2023-02-25	2024-02-24

3.1.2. Block Diagram of Test Setup

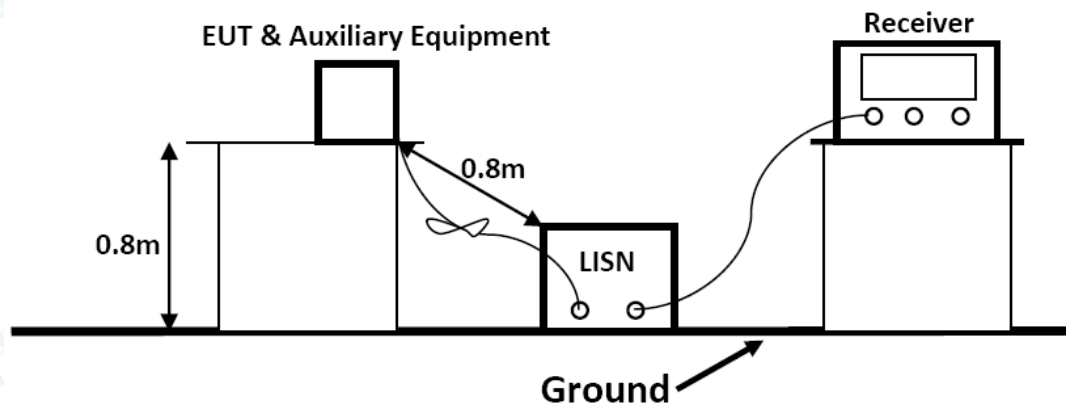

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB μ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section 3.1.2

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring Mode 1 and measure it.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated

3.1.7. Test Results


PASS.

The test result please refer to the next page.





Test Model	Koko	Test Mode	Mode 1
Environmental Conditions	23.5℃, 53.6% RH	Test Engineer	James PENG
Pol	Line	Test Voltage	AC 120V/60Hz

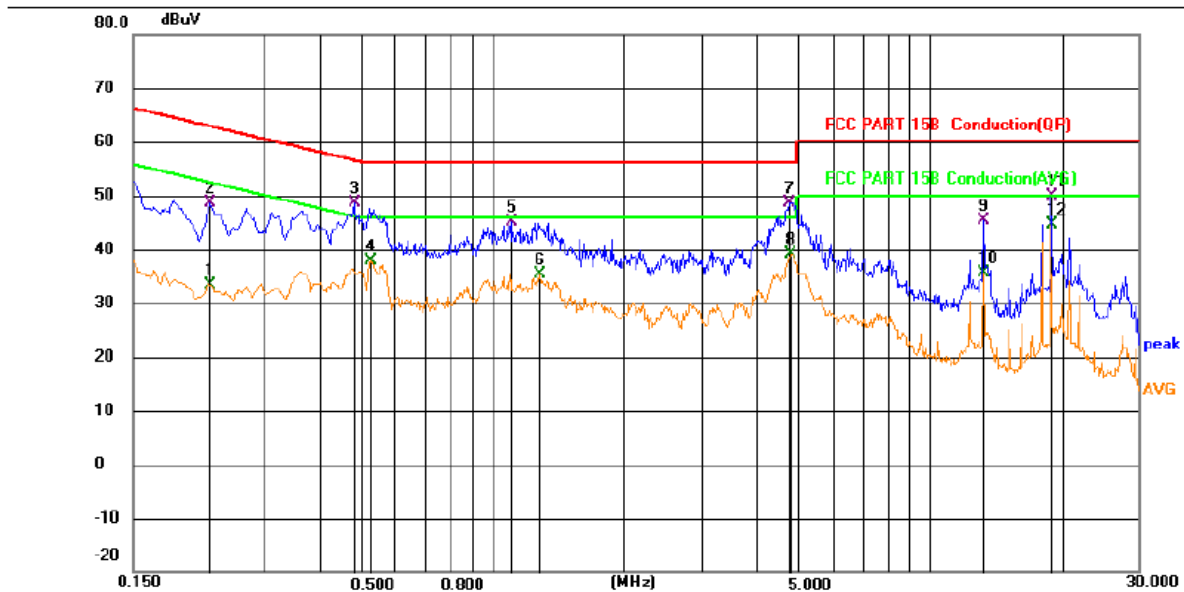

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2242	13.85	19.63	33.48	52.66	-19.18	AVG	
2		0.2265	29.04	19.63	48.67	62.58	-13.91	QP	
3		0.4828	29.08	19.64	48.72	56.29	-7.57	QP	
4		0.5280	18.28	19.65	37.93	46.00	-8.07	AVG	
5		1.1040	25.38	19.65	45.03	56.00	-10.97	QP	
6		1.2839	15.68	19.66	35.34	46.00	-10.66	AVG	
7		4.7490	29.04	19.70	48.74	56.00	-7.26	QP	
8		4.8166	19.44	19.70	39.14	46.00	-6.86	AVG	
9		13.3079	25.59	19.84	45.43	60.00	-14.57	QP	
10		13.3079	15.86	19.84	35.70	50.00	-14.30	AVG	
11		19.0138	29.59	20.19	49.78	60.00	-10.22	QP	
12	*	19.0138	24.33	20.19	44.52	50.00	-5.48	AVG	

Margin= Reading level + Correct factor – Limit

Correct Factor= Liss Factor+Cable Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	Koko	Test Mode	Mode 1
Environmental Conditions	23.5℃, 53.6% RH	Test Engineer	James PENG
Pol	Neutral	Test Voltage	AC 120V/60Hz

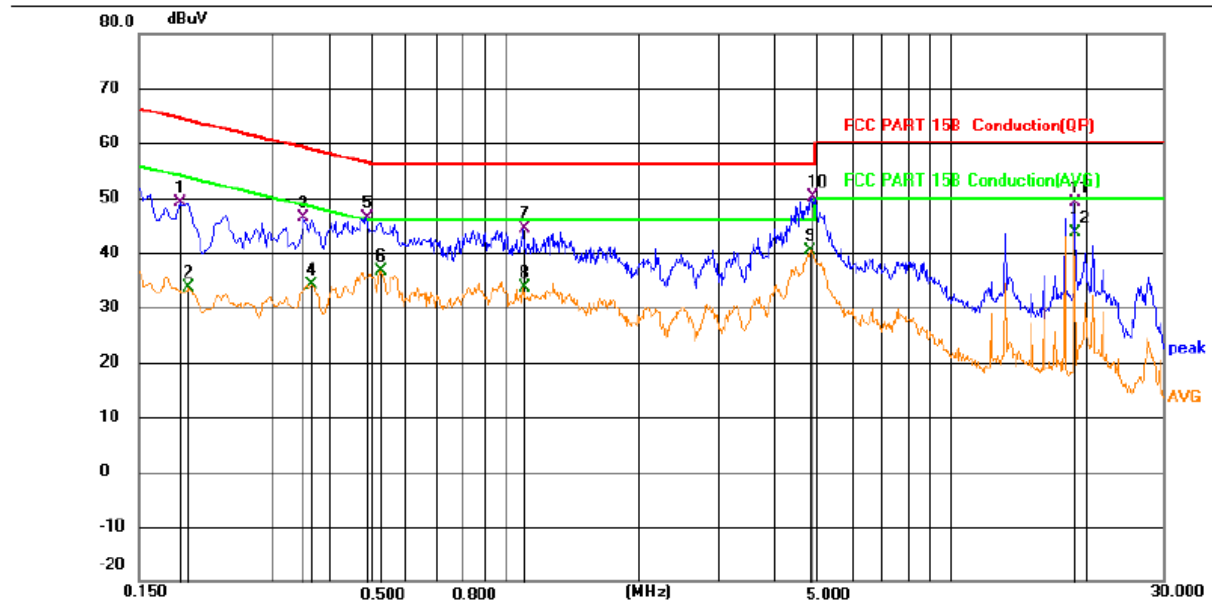

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1859	29.46	19.63	49.09	64.22	-15.13	QP	
2		0.1949	13.92	19.63	33.55	53.83	-20.28	AVG	
3		0.3526	26.76	19.63	46.39	58.90	-12.51	QP	
4		0.3659	14.59	19.63	34.22	48.59	-14.37	AVG	
5		0.4874	26.74	19.64	46.38	56.21	-9.83	QP	
6		0.5233	17.02	19.65	36.67	46.00	-9.33	AVG	
7		1.0993	24.72	19.65	44.37	56.00	-11.63	QP	
8		1.0993	13.94	19.65	33.59	46.00	-12.41	AVG	
9	*	4.8300	20.59	19.80	40.39	46.00	-5.61	AVG	
10		4.9200	30.23	19.80	50.03	56.00	-5.97	QP	
11		19.0184	28.99	20.19	49.18	60.00	-10.82	QP	
12		19.0184	23.43	20.19	43.62	50.00	-6.38	AVG	

Margin= Reading level + Correct factor – Limit

Correct Factor= Lisen Factor+Cable Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




3.2. Radiated emission Measurement

3.2.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	AUDIX	E3	/	/	/
2	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
3	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
4	EMI Test Receiver	R&S	ESR3	102311	2023-08-15	2024-08-14
5	Broadband Preamplifier	/	BP-01M18G	P190501	2023-06-09	2024-06-08
6	EMI Test Software	Farad	EZ	/	N/A	N/A
7	MXA Signal Analyzer	Agilent	N9020A	MY53290398	2023-06-09	2024-06-08
8	EMI Test Receiver	R&S	ESPI	101940	2023-08-15	2024-08-14

3.2.2. Block Diagram of Test Setup

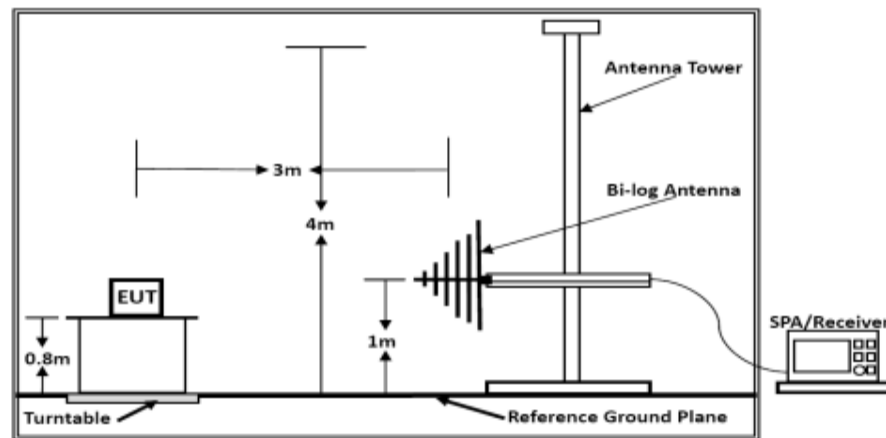

Below 1GHz

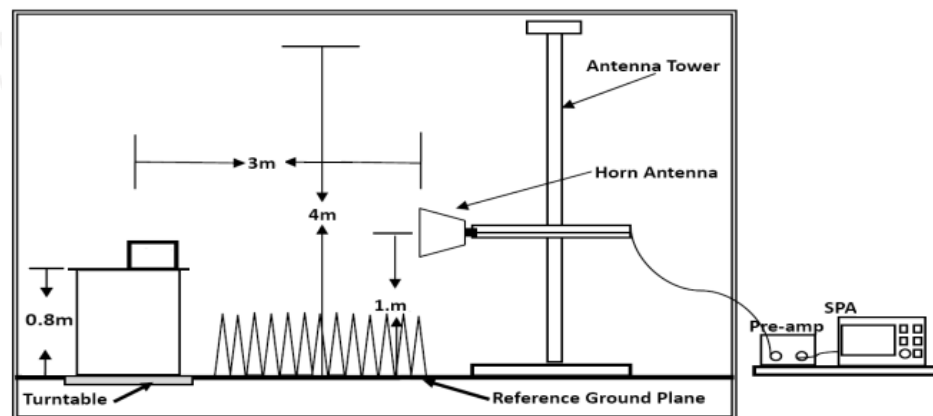

Above 1GHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54
Remark: (1) Emission level $(\text{dB})\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$ (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit ($\text{dB}\mu\text{V/m}$)	Average Limit ($\text{dB}\mu\text{V/m}$)
Above 1000	3	74	54
***Note: The lower limit applies at the transition frequency.			

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Mode 1 and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

3.2.7. Radiated Emission Noise Measurement Result

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver





Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

The frequency range from 30MHz to 1000MHz is checked.

3.2.8. Radiated Emission Noise Measurement Result


PASS.

The scanning waveforms please refer to the next page.





Test Model	Koko	Test Mode	Mode 1
Environmental Conditions	22.3°C, 53% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	James PENG	Test Voltage	AC 120V/60Hz

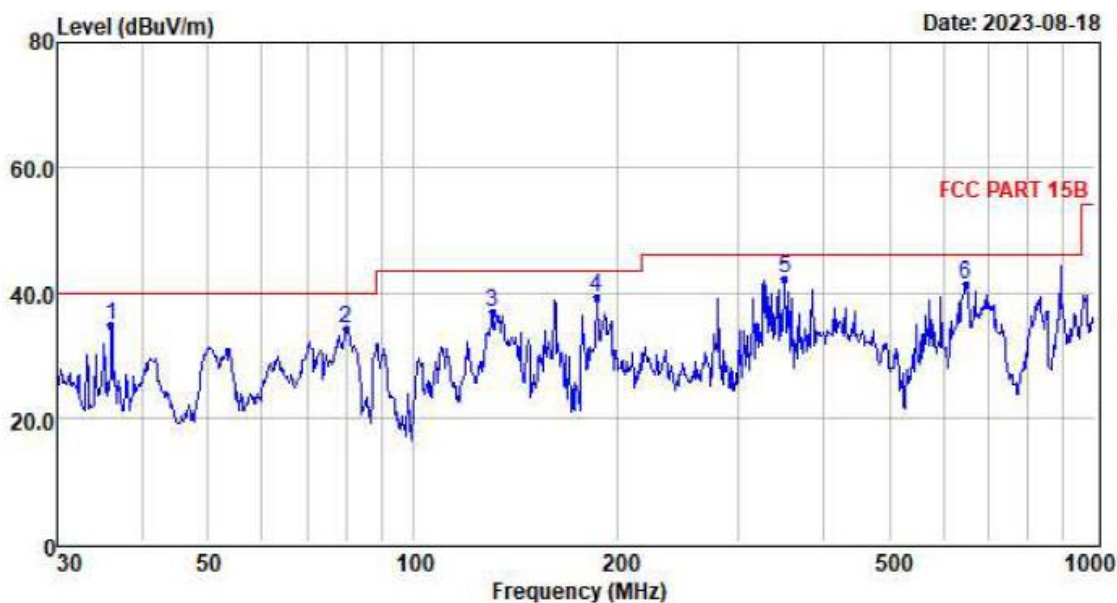

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	36.00	23.17	0.47	11.03	34.67	40.00	-5.33	QP
2	79.80	23.66	0.73	9.81	34.20	40.00	-5.80	QP
3	130.84	26.56	0.96	9.32	36.84	43.50	-6.66	QP
4	185.79	28.13	1.16	10.09	39.38	43.50	-4.12	QP
5	351.71	26.00	1.36	14.87	42.23	46.00	-3.77	QP
6	647.39	21.01	1.65	18.64	41.30	46.00	-4.70	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	Koko	Test Mode	Mode 1
Environmental Conditions	22.3°C, 53% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	James PENG	Test Voltage	AC 120V/60Hz

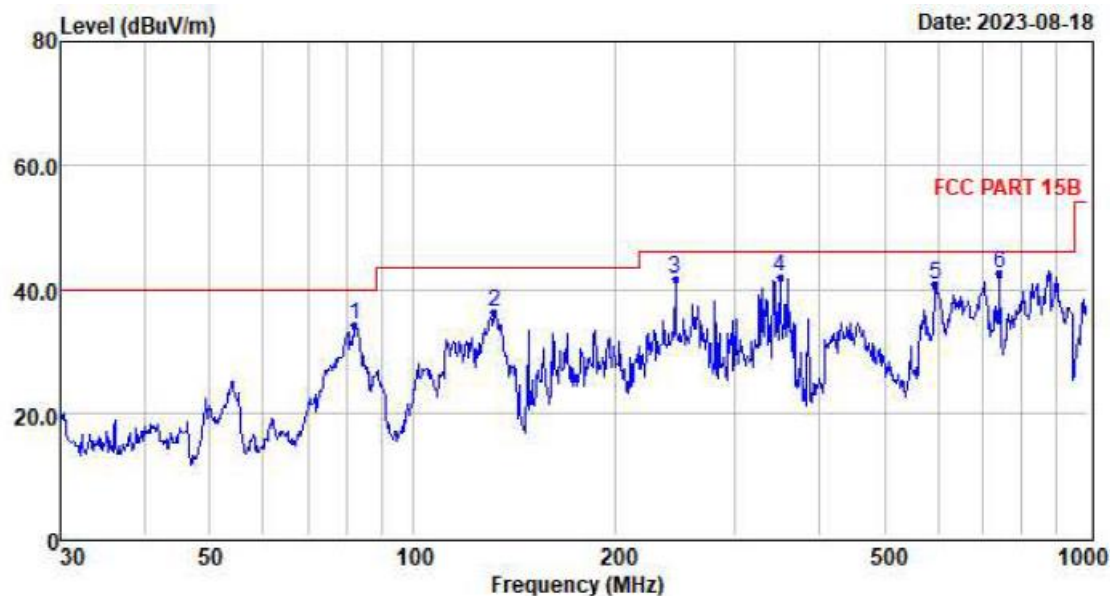

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	82.07	23.69	0.74	9.73	34.16	40.00	-5.84	QP
2	132.22	26.14	0.96	9.19	36.29	43.50	-7.21	QP
3	245.09	27.98	1.26	12.31	41.55	46.00	-4.45	QP
4	350.48	25.55	1.36	14.89	41.80	46.00	-4.20	QP
5	595.13	19.99	1.50	19.15	40.64	46.00	-5.36	QP
6	742.26	21.23	1.89	19.55	42.67	46.00	-3.33	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	Koko	Test Mode	Mode 1
Environmental Conditions	23.9°C, 52.0% RH	Detector Function	PEAK+AVG
Pol	Vertical	Distance	3m
Test Engineer	James PENG	Test Voltage	AC 120V/60Hz

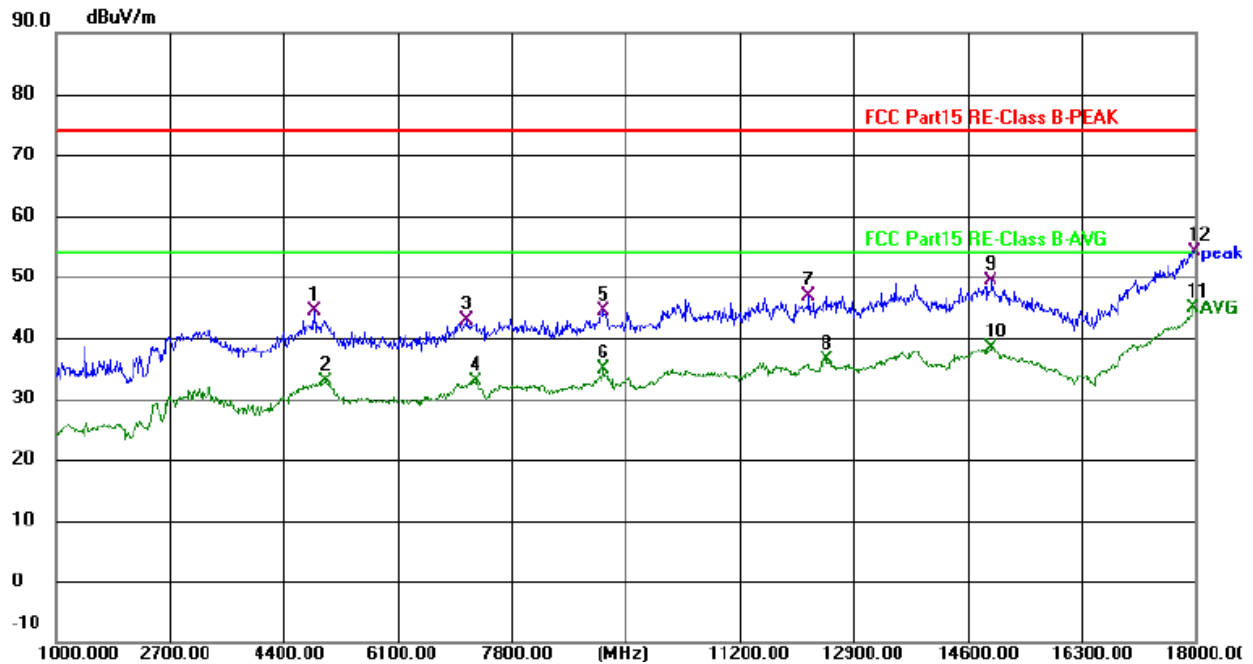

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	4859.000	49.21	-4.81	44.40	74.00	-29.60	PEAK	P	
2	5029.000	36.99	-4.07	32.92	54.00	-21.08	AVG	P	
3	7137.000	42.73	0.03	42.76	74.00	-31.24	PEAK	P	
4	7256.000	32.59	0.23	32.82	54.00	-21.18	AVG	P	
5	9160.000	42.19	2.15	44.34	74.00	-29.66	PEAK	P	
6	9177.000	32.70	2.18	34.88	54.00	-19.12	AVG	P	
7	12237.000	40.21	6.58	46.79	74.00	-27.21	PEAK	P	
8	12492.000	29.97	6.46	36.43	54.00	-17.57	AVG	P	
9	14957.000	39.34	9.96	49.30	74.00	-24.70	PEAK	P	
10	14957.000	28.52	9.96	38.48	54.00	-15.52	AVG	P	
11	17966.000	27.43	17.45	44.88	54.00	-9.12	AVG	P	
12	17983.000	36.61	17.55	54.16	74.00	-19.84	PEAK	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	Koko	Test Mode	Mode 1
Environmental Conditions	23.9°C, 52.0% RH	Detector Function	PEAK+AVG
Pol	Horizontal	Distance	3m
Test Engineer	James PENG	Test Voltage	AC 120V/60Hz

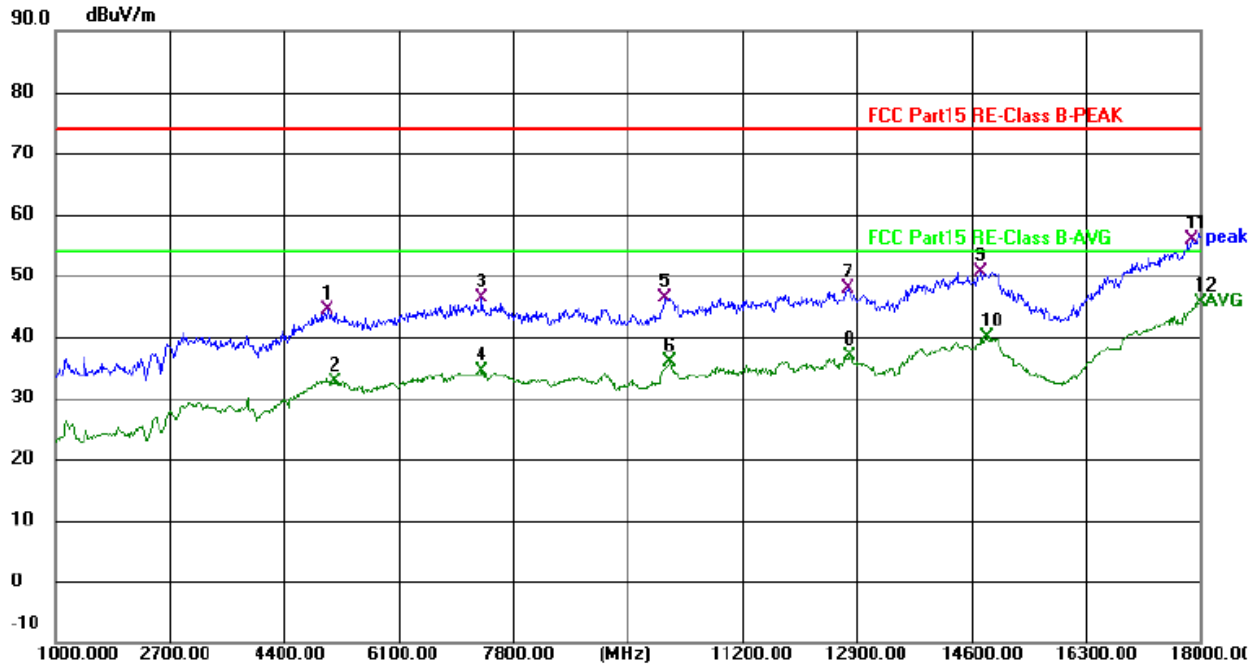

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	5046.000	48.39	-4.04	44.35	74.00	-29.65	PEAK	P	
2	5165.000	36.37	-3.82	32.55	54.00	-21.45	AVG	P	
3	7341.000	45.93	0.38	46.31	74.00	-27.69	PEAK	P	
4	7341.000	34.03	0.38	34.41	54.00	-19.59	AVG	P	
5	10061.000	42.73	3.66	46.39	74.00	-27.61	PEAK	P	
6	10129.000	32.02	3.78	35.80	54.00	-18.20	AVG	P	
7	12764.000	41.46	6.34	47.80	74.00	-26.20	PEAK	P	
8	12798.000	30.46	6.33	36.79	54.00	-17.21	AVG	P	
9	14753.000	40.94	9.80	50.74	74.00	-23.26	PEAK	P	
10	14838.000	30.08	9.87	39.95	54.00	-14.05	AVG	P	
11	17864.000	39.01	16.80	55.81	74.00	-18.19	PEAK	P	
12	18000.000	27.89	17.66	45.55	54.00	-8.45	AVG	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

5. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

6. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----

