

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	J011
客 戶 料 號: CUST P/N:	M35
泛 亞 料 號: FINE P/N:	FYJ011010
產 品 型 號: DESC:	FYJ0112024110102
日 期: DATE:	2024/11/01
版 本: Version:	A.0

CUSTOMER AUTHORIZED SIGNATURE/客户承认签核		

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY
Peng Tingyin	Wei Bingfu	Hu Wei

东莞市泛亚电子有限公司

Dongguan FANYA Electronics Co., LTD

地址: No.194, Science and Technology East Road, Liwu Village, Shiye Town,
Dongguan City

TEL: 0769-22490287 / 22452492

FAX: 0769-22499451

E-mail: fineelec@163.com

Dongguan FANYA Electronics Co., LTD


东莞市泛亚电子有限公司 TEL: 0769-22490287 FAX: 0769-22499451

FY-GZ001

Version Change History

Dongguan FANYA Electronics Co., LTD

SPECIFICATION

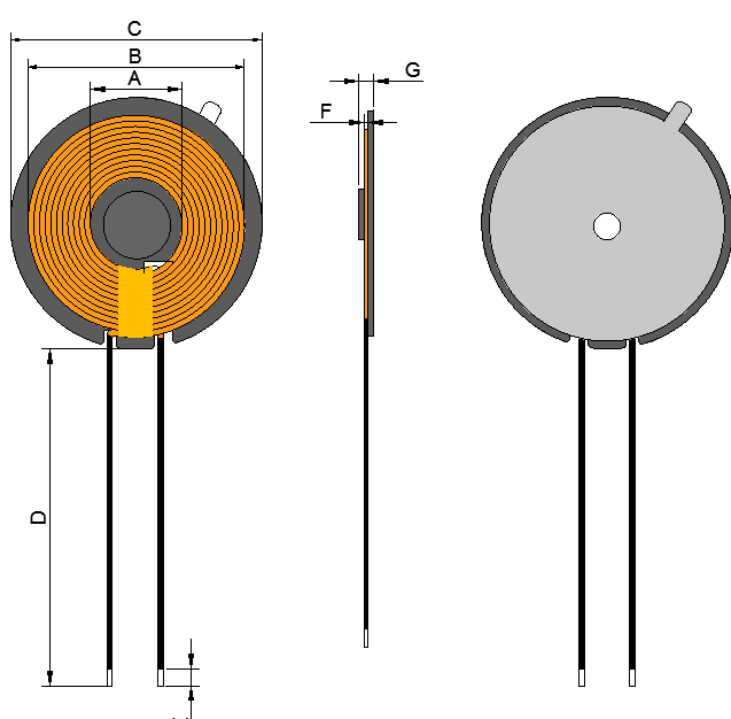
产 品 型 号: DESC	FYJ0112024110102	版本 Rev: A.0	客 户 CUST:		J011
			泛亚料号 Fine P/N:		FYJ011010
			客 户 料 号 CUST P/N:		M35
一、尺寸 DIMENSION:(mm)					
			A	21.8±0.5	
			B	39.5±1	
			C	43.5±0.5	
			D	68±2	
			E	2-4	
			F	0.75±0.2	
			G	2.3 Max (不含离型纸)	
			Note:		
			1. The leads cross out, and 8mm high-temperature tape is applied;		
			2. The coil is pasted with a magnetic upside down, the magnetic sheet size ϕ 43.5*5.3*1mm with holes and L-shaped slots; a small magnetic sheet is pasted in middle, the small magnetic sheet size ϕ 18*0.75mm;		
			3. The back of the magnetic sheet is pasted with a common double-sided with a hand-tear position ϕ 42*6*0.08mm; the back of the small magnetic sheet is pasted with a common double-sided with a hand-tear position ϕ 15*0.08mm;		
			4. The leads are covered with a black heat-shrink tubing with a diameter ϕ 1.0 and a length of 65mm ± 2;		
二、原理图 SCHEMATIC DIAGRAM:					
					
三、绕线参数 Winding Specification:					
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	Litz0.08*65p	11Ts	CCW
四、电气特性 ELECTRICAL CHARACTERISTICS:					
温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	8.5uH ± 5%	100KHz/1.0V	TH2810
2	DCR	S-F	68m Ω ± 10%	25℃	TH2810
拟制/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE		批准/日期 APPROVED BY
彭霆茵 2024/11/21			韦炳福 2024/11/21		

SPECIFICATION

產品型號: DESC	FYJ0112024110102	版本 Rev: A.0	客戶 CUST:	J011
			泛亚料号 Fine P/N:	FYJ011010
			客户料号 CUST P/N:	M35

五、包装 PACKONG:

5.1 包装图片 Packing pictures:

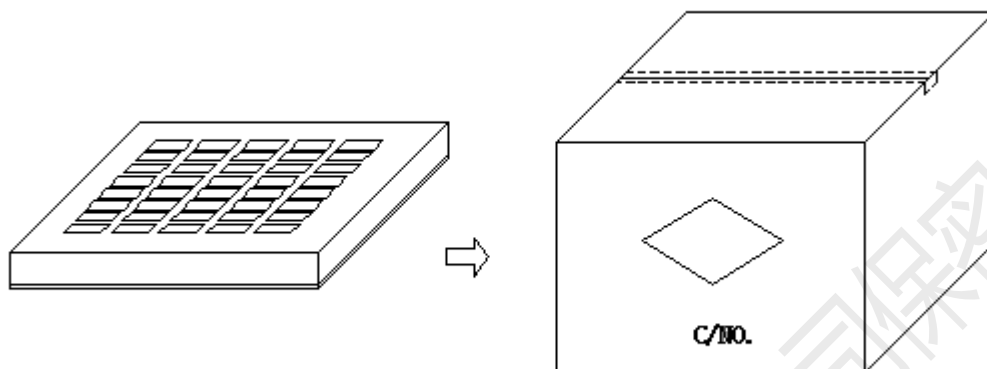

5.2 包装数量及规格 Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	200 Pcs	370*265*55mm
箱 Big Carton	1000 Pcs	420*270*310mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准,如有特要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE	批准/日期 APPROVED BY
彭霆茵 2024/11/21	韦炳福 2024/11/21	胡伟 2024/11/21

SPECIFICATION

產品型號: DESC	FYJ0112024110102	版本 Rev: A.0	客戶 CUST:	J011
			泛亞料号 Fine P/N:	FYJ011010
			客戶料号 CUST P/N:	M35

六、材料清单 Material list:

序号 number	材料名称 Material name	品名描述 Description	制造商 Manufacturer
1	Wire	Litz0.08*65P	
2	Lead-free solder bar	Lead-free solder bar	
3	Floppy disk	Φ 43.5*5.3*1mm punched hole with L double slot mouth	
4	Small magnetic piece	Φ 18*0.75mm	
5	Double-sided adhesive backing	Φ 42*6*0.08mm with hand tear position ordinary double-sided adhesive backing	
6	Double-sided adhesive film	Φ 15*0.08mm	
7	Double-sided adhesive backing	8mm	
8	Glue	8536	
9	Black heat shrink tubing	Φ 1.0	

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE	批准/日期 APPROVED BY
彭霆茵 2024/11/21	韦炳福 2024/11/21	胡伟 2024/11/21