

cetecom
advanced

TEST REPORT

Test report no.: 1-9305-25-07-02_TR1-R02



Testing laboratory

cetecom advanced GmbH

Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>
e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

Pepperl+Fuchs SE

Lilienthalstraße 200
68307 Mannheim / GERMANY

Phone: +49 621 776-0

Contact: Nils Bleshoy

e-mail: nbleshoy@de.pepperl-fuchs.com

Manufacturer

Pepperl+Fuchs SE

Lilienthalstraße 200
68307 Mannheim / GERMANY

Test standard/s	
FCC - Title 47 CFR Part 15	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 11	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 5 incl. Amendment 1 & 2	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus


For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	RFID Reader for IO-Link
Model name:	IQT1-18GM-IO-V1
FCC ID:	2AXZAIQT118GMIOB
ISED certification number:	7037A-IQT118GMIOB
Frequency:	13.56 MHz
Technology tested:	RFID
Antenna:	Integrated inductive coil antenna
Power supply:	18 V to 30 V DC by external power supply
Temperature range:	-25°C to +70°C


This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



Christoph Schneider
Lab Manager
Radio Labs

Test performed:



Tobias Wittenmeier
Testing Manager
Radio Labs

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment	6
6	Test item	6
6.1	General description	6
6.2	Additional information	6
7	Sequence of testing	7
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	7
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	8
8	Description of the test setup	9
8.1	Shielded semi anechoic chamber	10
8.2	Shielded fully anechoic chamber	12
8.3	AC conducted	13
8.4	RF measurements normal and extreme conditions	14
9	Measurement uncertainty	15
10	Summary of measurement results	16
11	Additional comments	16
12	Measurement results	17
12.1	Occupied bandwidth	17
12.2	Field strength of the fundamental	19
12.3	Field strength of the harmonics and spurious	20
12.4	Conducted limits	24
12.5	Frequency error	27
13	Observations	28
14	Glossary	29
15	Document history	30

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-9305-25-07-02_TR1-R01 and dated 2025-05-21.

2.2 Application details

Date of receipt of order:	2025-02-18
Date of receipt of test item:	2025-04-09
Start of test:*	2025-04-09
End of test:*	2025-04-14
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 11	25.06.2024	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 5 incl. Amendment 1 & 2	February 2021	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus


Guidance	Version	Description
ANSI C63.4a-2017	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2020	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

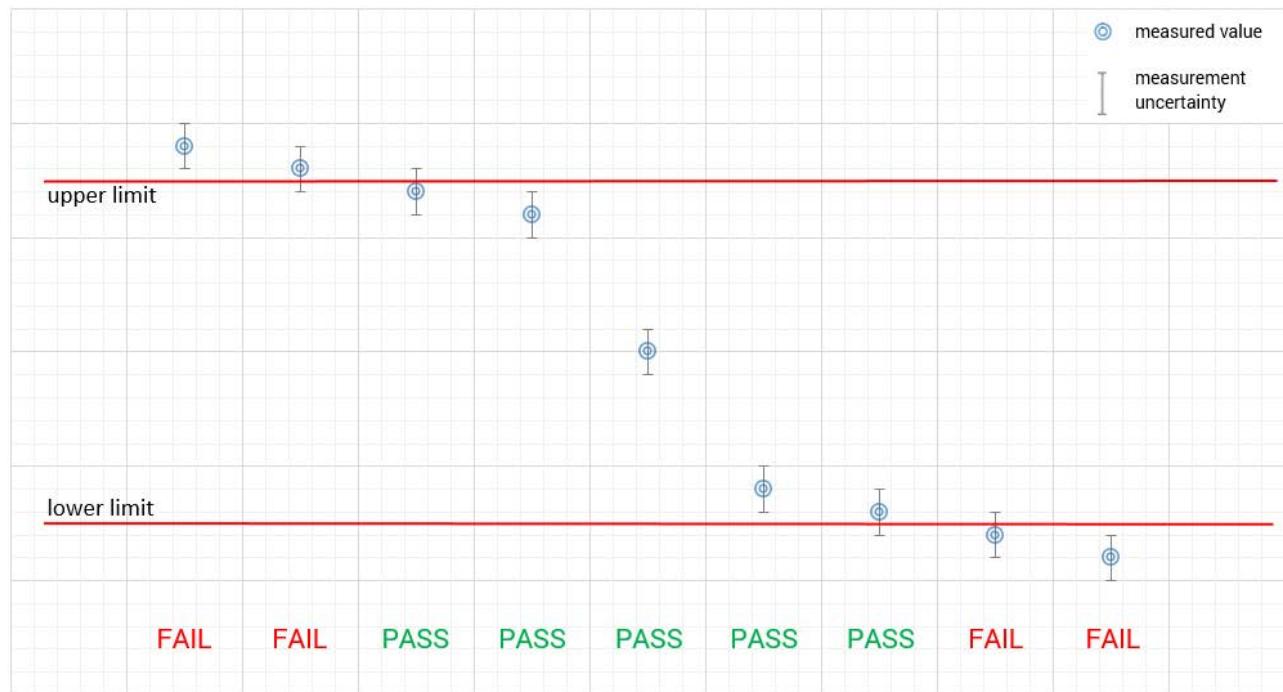

5 Test environment

Temperature	: T _{nom} T _{max} T _{min}	+22 °C during room temperature tests +70 °C during high temperature tests -25 °C during low temperature tests
Relative humidity content	:	55 %
Barometric pressure	:	1021 hpa
Power supply	: V _{nom} V _{max} V _{min}	24.0 V DC by external power supply 30 V 18 V

6 Test item

6.1 General description

Kind of test item	: RFID Reader for IO-Link
Model name	: IQT1-18GM-IO-V1
HMN	: -/
PMN	: IQT1-18GM-IO-V1
HVIN	: IQT118GMIOB
FVIN	: 18-33278
S/N serial number	: 40000179100304
Hardware status	: #299927
Software status	: 18-33298 (IO-Link)
Firmware status	: 18-33278 (RFID)
Frequency band	: 13.553 to 13.567 MHz
Type of radio transmission	: Modulated carrier
Use of frequency spectrum	: Modulated carrier
Type of modulation	: ASK
Number of channels	: 1
Antenna	: Integrated inductive coil antenna
Power supply	: 18 V to 30 V DC by external power supply
Temperature range	: -25°C to +70°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-9305_25-07-01_TR1-A101-R01

1-9305_25-07-01_TR1-A102-R01

1-9305_25-07-01_TR1-A103-R01

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k/cal	calibration / calibrated	EK	limited calibration
Ne/cnn	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
Ev/chk	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress
cpu	check prior usage		

8.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

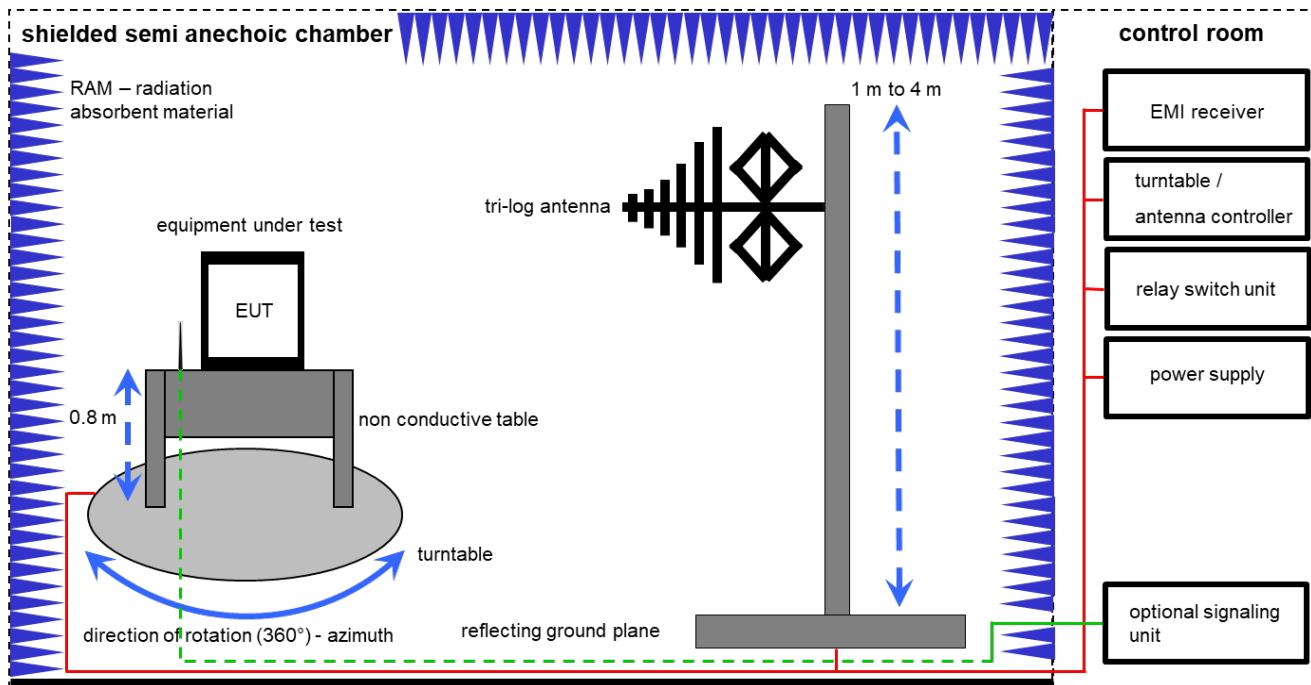

Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$\text{FS [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} (35.69 \mu\text{V/m})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	Switch-Unit 3488A	Hewlett Packard	2719A14505	50160	cpu	-/-	-/-
2	A	Power Supply	Power Supply 6032A	Hewlett Packard	2920A04466	50161	cnn	-/-	-/-
3	A	Antenna Tower	Antenna Tower 2175	ETS-Lindgren GmbH / Taufkirchen	64762	50279	cnn	-/-	-/-
4	A	Positioning Controller	Positioning Controller 2090	ETS-Lindgren GmbH / Taufkirchen	64672	50280	cnn	-/-	-/-
5	A	TRILOG Broadband Antenna	TRILOG Broadband Antenna VULB9163	Schwarzbeck Mess-Elektronik OHG / Schönau	1029	50403	cal	25.09.2023	30.09.2025
6	A	EMI Test Receiver	EMI Test Receiver ESR3	Rohde & Schwarz Messgerätebau GmbH / Memmingen	102587	50417	cal	05.12.2024	05.12.2025

8.2 Shielded fully anechoic chamber

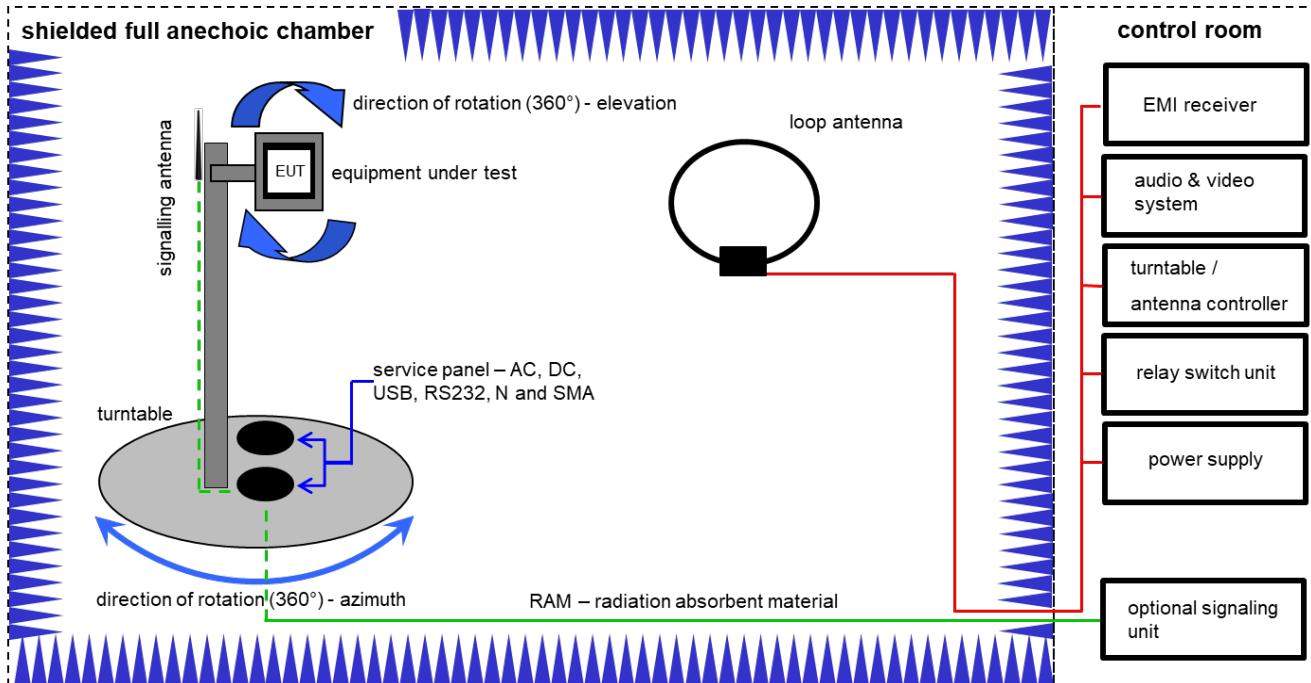

Measurement distance: loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS [\text{dB}\mu\text{V}/\text{m}] = 40.0 [\text{dB}\mu\text{V}/\text{m}] + (-35.8) [\text{dB}] + 32.9 [\text{dB}/\text{m}] = 37.1 [\text{dB}\mu\text{V}/\text{m}] (71.61 \mu\text{V}/\text{m})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Broadband Amplifier 0.5-18 GHz	Broadband Amplifier 0.5-18 GHz CBLU5184540	MEC Import: CERNEX	22049	40373	cpu	-/-	-/-
2	A	4U RF Switch Platform	4U RF Switch Platform L4491A	Agilent Technologies Deutschland GmbH / Böblingen	MY50000037	40375	cnn	-/-	-/-
3	A	NEXIO EMV-Software	NEXIO EMV-Software BAT EMC V2022.0.32.0	MEC Import: Nexion		40383	cnn	-/-	-/-
4	A	Power Supply	Power Supply HMP2020	Rohde & Schwarz Messgerätebau GmbH / Memmingen	120579	40408	cal	02.05.2023	31.05.2025
5	A	Active Loop Antenna	Active Loop Antenna 6502	EMCO Elektronik GmbH / Gilching	8905-2342	50179	cal	19.07.2023	31.07.2025
6	A	EMI Test Receiver	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100037	50254	cal	10.12.2024	10.12.2025
7	A	Anechoic chamber	Anechoic chamber FAC 3/5m	MEC Import: MWB / TDK	87400/02	40349	cpu	-/-	-/-
8	A	Switch / Control Unit	Switch / Control Unit 3488A	Hewlett Packard	*	40350	cnn	-/-	-/-

8.3 AC conducted

AC conducted

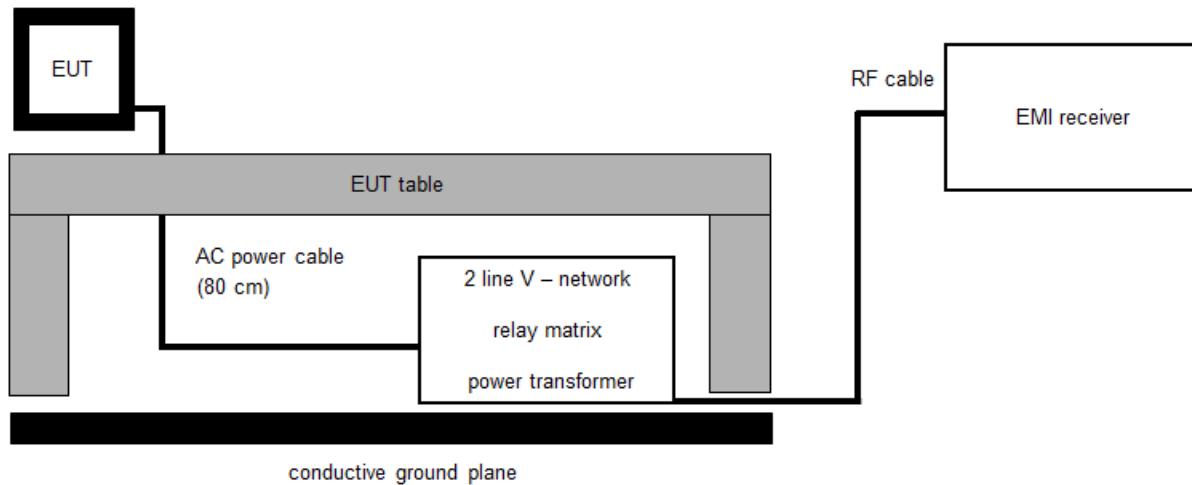

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:


$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	Rohde & Schwarz	892475/017	300002209	vIKI!	12.12.2023	31.12.2025
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
4	A	PC	TecLine	F+W	-/-	300003532	ne	-/-	-/-
5	A	Analyzer-Impedance-System	AIS16/1	Spitzenberger + Spies GmbH & Co. KG	U02076 07/0 1023	400001751	k	19.10.2023	31.10.2025
6	A	EMI Test Receiver 3.6 GHz	ESR3	Rohde & Schwarz	102981	300006318	k	03.12.2024	31.12.2025

8.4 RF measurements normal and extreme conditions

Conducted measurements normal & extreme conditions

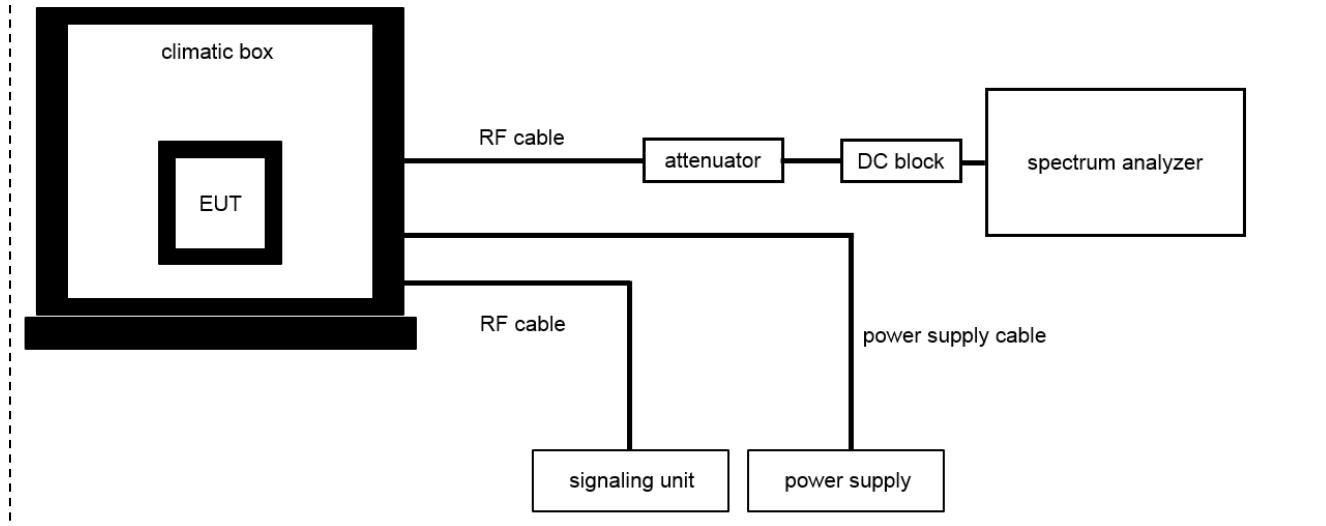

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

$$\text{OP [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} (58.88 \text{ mW})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A,B	Signal analyzer	FSV30	Rohde & Schwarz	104365	300005923	k	10.12.2024	31.12.2025
2	A,B	Loop Antenna	Loop Antenna	MEC Import: ZEG TS Steinfurt		40841	cpu	-/-	-/-
3	A,B	RF Cable BNC	RF Cable BNC RG58	Huber & Suhner GmbH / Unterhaching		40842	cpu	-/-	-/-
4	A,B	Power Supply	Power Supply HMP2020	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101961	40846	cal	05.12.2024	05.12.2026
5	B	Temperature Test Chamber	Temperature Test Chamber VT 4011	Vötsch Industrietechnik GmbH, a schunk company / Balingen- Frommern	585662306000 10	50404	calchk	11.07.2024	11.07.2026

9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Occupied bandwidth	± used RBW
Field strength of the fundamental	± 3 dB
Field strength of the harmonics and spurious	± 3 dB
Receiver spurious emissions and cabinet radiations	± 3 dB
Conducted limits	± 2.6 dB

10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210 Issue 11 RSS Gen Issue 5	See table!	2025-05-23	-/-

Test specification clause	Test case	Temperature conditions	Power source conditions	C	NC	NA	NP	Remark
RSS Gen Issue 5	Occupied bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.225 (a) RSS 210 Issue 11	Field strength of the fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.209 § 15.225 (b-d) RSS Gen Issue 5	Field strength of the harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107 §15.207	Conducted limits	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.225 (a) RSS 210 Issue 11	Frequency tolerance	Normal & extreme conditions	Normal & extreme conditions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Note:

C Compliant
 NC Not compliant
 NA Not applicable
 NP Not performed

11 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

12 Measurement results

12.1 Occupied bandwidth

Measurement:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Measurement performed according to ANSI C63.10, chapter 6.9.3, "Occupied bandwidth—power bandwidth (99%) measurement procedure"


Measurement parameters	
Detector:	Peak
Resolution bandwidth:	1 % – 5 % of the occupied bandwidth
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Analyser function:	99 % power function
Used equipment:	See chapter 8.4A
Measurement uncertainty:	See chapter 9

Limit:

IC
for RSP-100 test report coversheet only

Result:

99% emission bandwidth
28.85 kHz

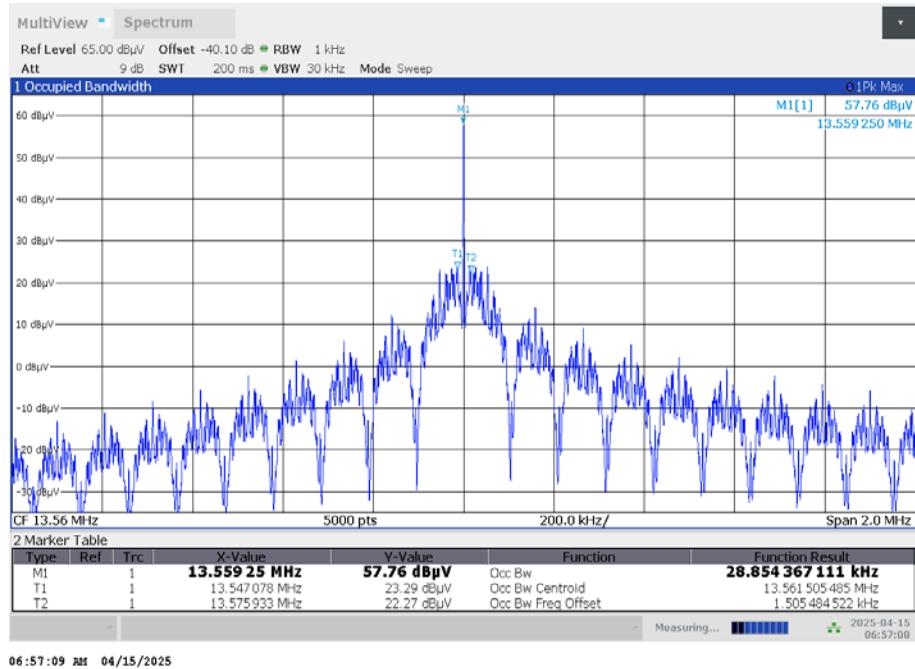Plot:**Plot 1: 99 % emission bandwidth**

12.2 Field strength of the fundamental

Measurement:

The maximum detected field strength for the carrier signal. Measurement performed according to ANSI C63.10 chapter 6.4

Measurement parameters	
Detector:	Quasi Peak
Resolution bandwidth:	9 kHz
Video bandwidth:	$\geq 3x$ RBW
Trace mode:	Max hold
Used equipment:	See chapter 8.2A
Measurement uncertainty:	See chapter 9

Limit:

FCC & IC		
Frequency / MHz	Field strength / (μ V/m)	Measurement distance / m
13.553 to 13.567	15,848 (84 dB μ V/m)	30

Recalculation:

According to ANSI C63.10		
Frequency	Formula	Correction value
13.56 MHz	$FS_{limit} = FS_{max} - 40 \log \left(\frac{d_{nearfield}}{d_{measure}} \right) - 20 \log \left(\frac{d_{limit}}{d_{nearfield}} \right)$ <p> FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m FS_{max} is the measured field strength, expressed in dBμV/m $d_{nearfield}$ is the $\lambda/2\pi$ distance $d_{measure}$ is the distance of the measurement point from EUT d_{limit} is the reference limit distance </p>	-21.4 dB from 3m to 30m

Result:

Field strength of the fundamental		
Frequency	13.56 MHz	
Distance	@ 3 m	@ 30 m
Measured / calculated value	57.5 dB μ V/m	36.1 dB μ V/m

12.3 Field strength of the harmonics and spurious

Measurement:

The maximum detected field strength for the harmonics and spurious. Measurement performed according to ANSI C63.10, chapter 6.4 and 6.5

Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz 150 kHz < F < 30 MHz: 9 kHz 30 MHz < F < 1 GHz: 120 kHz
Video bandwidth:	F < 150 kHz: 1 kHz 150 kHz < F < 30 MHz: 100 kHz 30 MHz < F < 1 GHz: 300 kHz
Trace mode:	Max hold
Used equipment:	See chapter 8.1A & 8.2A & 8.4A
Measurement uncertainty:	See chapter 9



Limit:


FCC		
Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/(F/kHz)	300
0.490 – 1.705	24000/(F/kHz)	30
1.705 – 30	30 (29.5 dB μ V/m)	30
30 – 88	100 (40 dB μ V/m)	3
88 – 216	150 (43.5 dB μ V/m)	3
216 – 960	200 (46 dB μ V/m)	3

IC		
Frequency (MHz)	Field strength (μ A/m)	Measurement distance (m)
0.009 – 0.490	6.37/F (F in kHz)	300
0.490 – 1.705	63.7/F (F in kHz)	30
1.705 – 30	0.08 (-22 dB μ A/m)	30


Result:

No emissions between 9 kHz and 30 MHz detected. For emissions between 30 MHz and 1 GHz see result table below the plot.

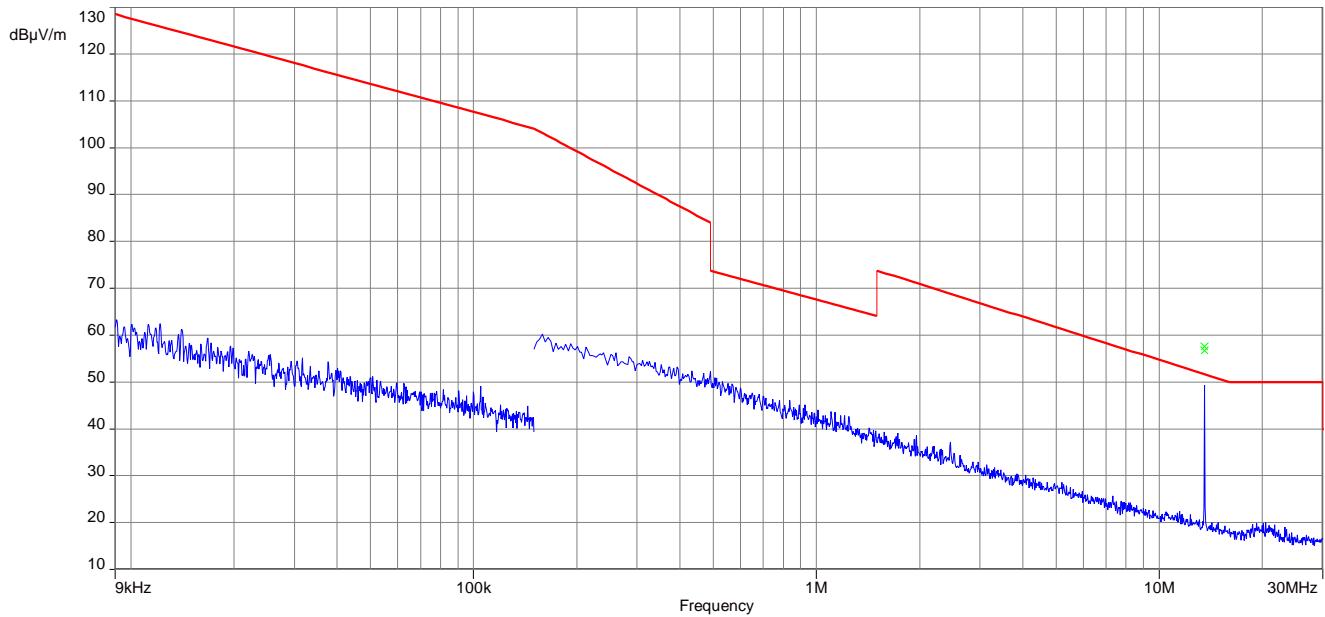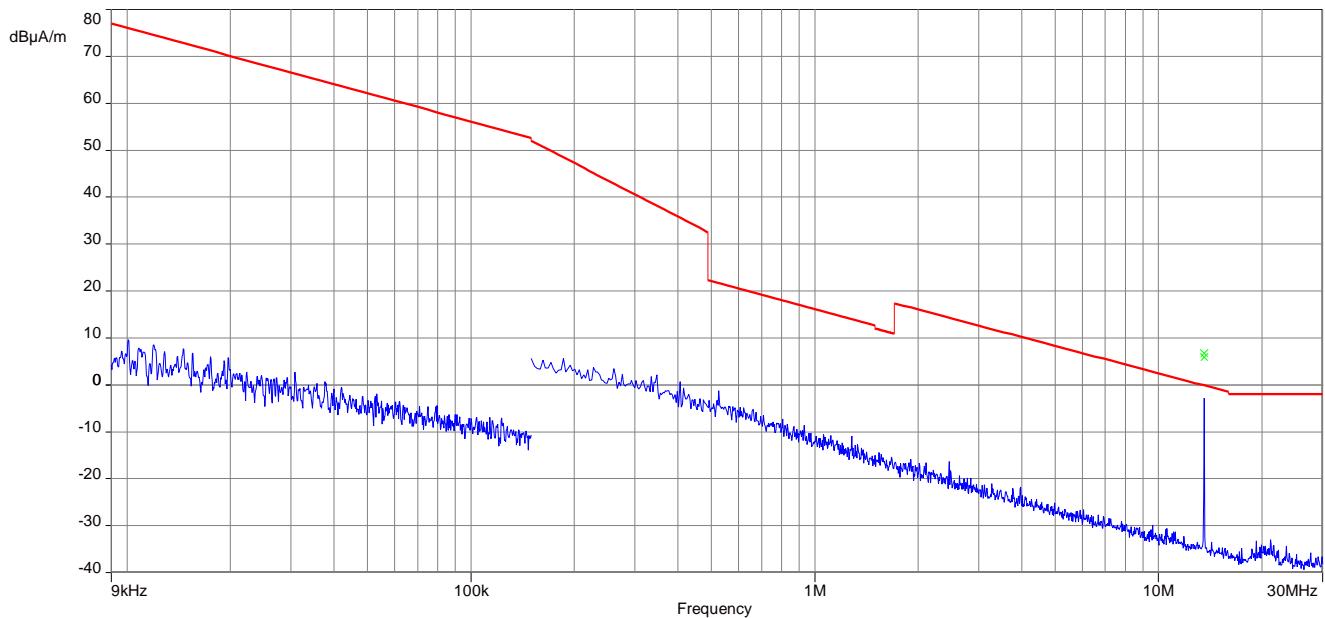Plots:**Plot 1: 9 kHz – 30 MHz, magnetic emissions FCC****Plot 2: 9 kHz – 30 MHz, magnetic emissions IC**

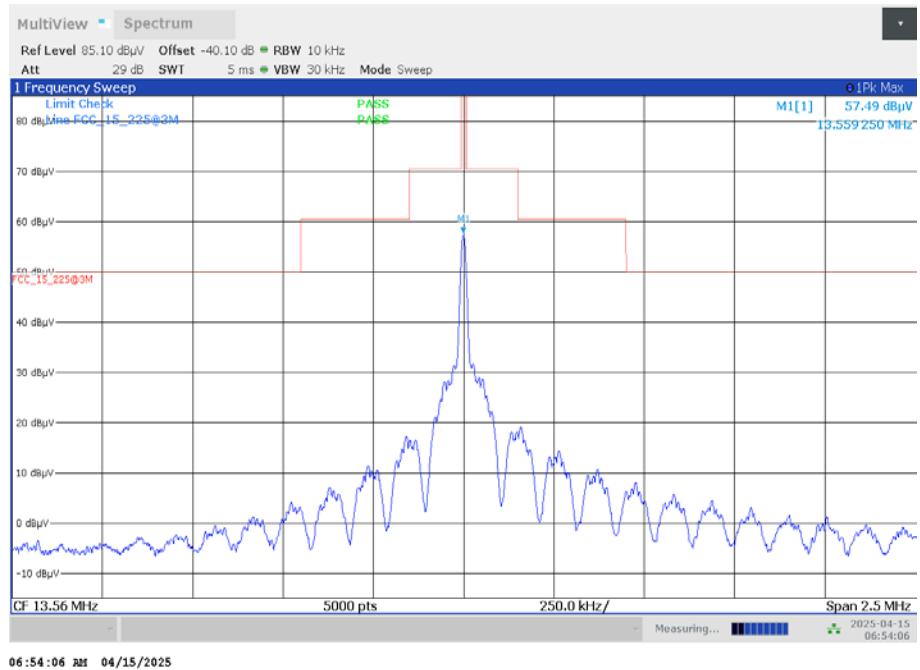Plot 3: Spectrum mask (the limits are recalculated according to the ANSI C63.10-2013 sub clause 6.4)

Plot 4: 30 MHz – 1 GHz, vertical and horizontal polarisation

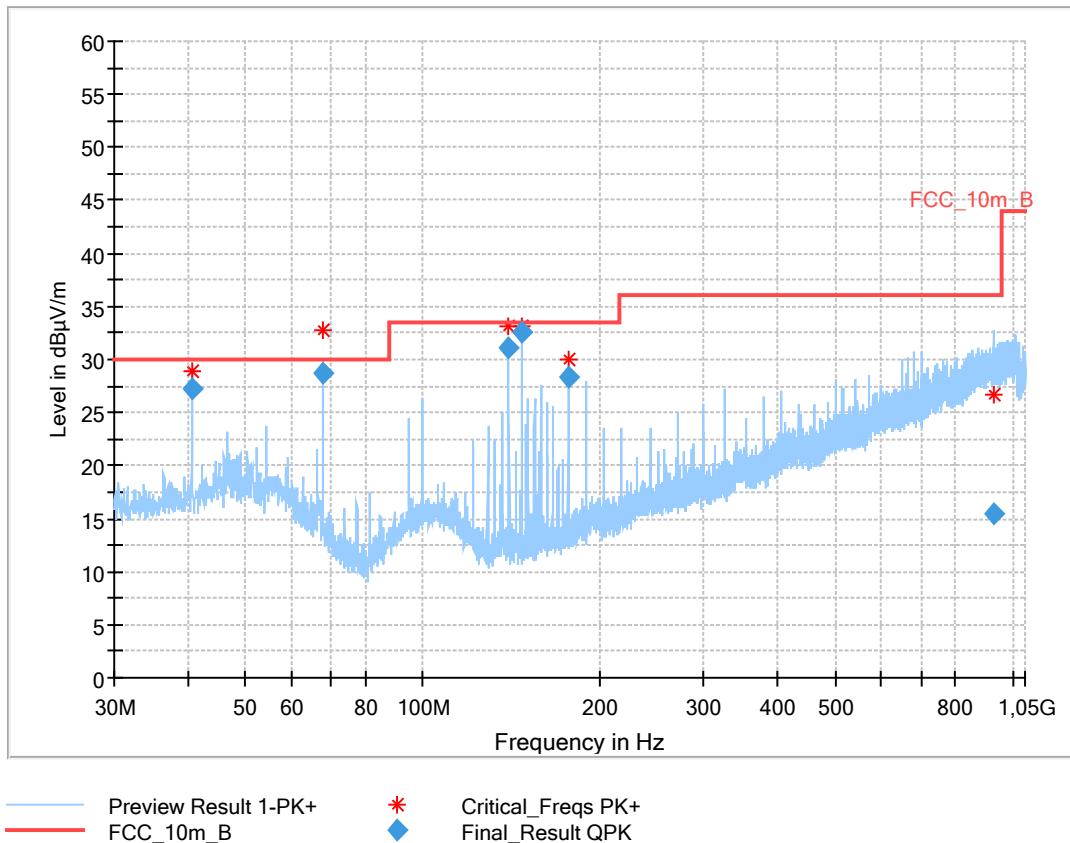

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.671	27.20	30.0	2.8	1000	120.0	103.0	V	252	14
67.796	28.77	30.0	1.2	1000	120.0	339.0	V	156	11
140.083	31.02	33.5	2.5	1000	120.0	104.0	V	33	10
147.456	32.54	33.5	1.0	1000	120.0	101.0	V	236	10
176.289	28.29	33.5	5.2	1000	120.0	101.0	V	300	11
930.417	15.54	36.0	20.5	1000	120.0	300.0	H	105	25

12.4 Conducted limits

Measurement:

Measurement of the conducted spurious emissions for an intentional radiator that is designed to be connected to the public utility (AC) power line. Measurement performed according to ANSI C63.10, chapter 6.2


Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Trace mode:	Max hold
Used equipment:	See chapter 8.3A
Measurement uncertainty:	See chapter 9

Limit:


FCC & IC		
Frequency / MHz	Quasi-peak / (dB μ V)	Average / (dB μ V)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

Result:

See result table below the plots.

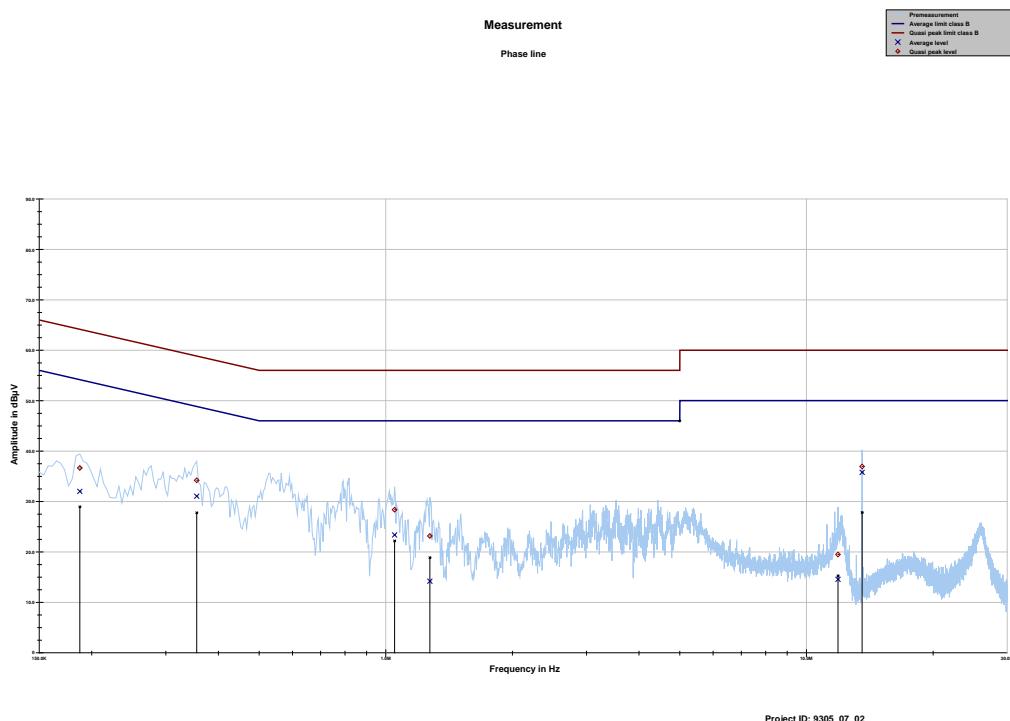Plots:
Plot 1: 150 kHz to 30 MHz, phase line

Final_Result

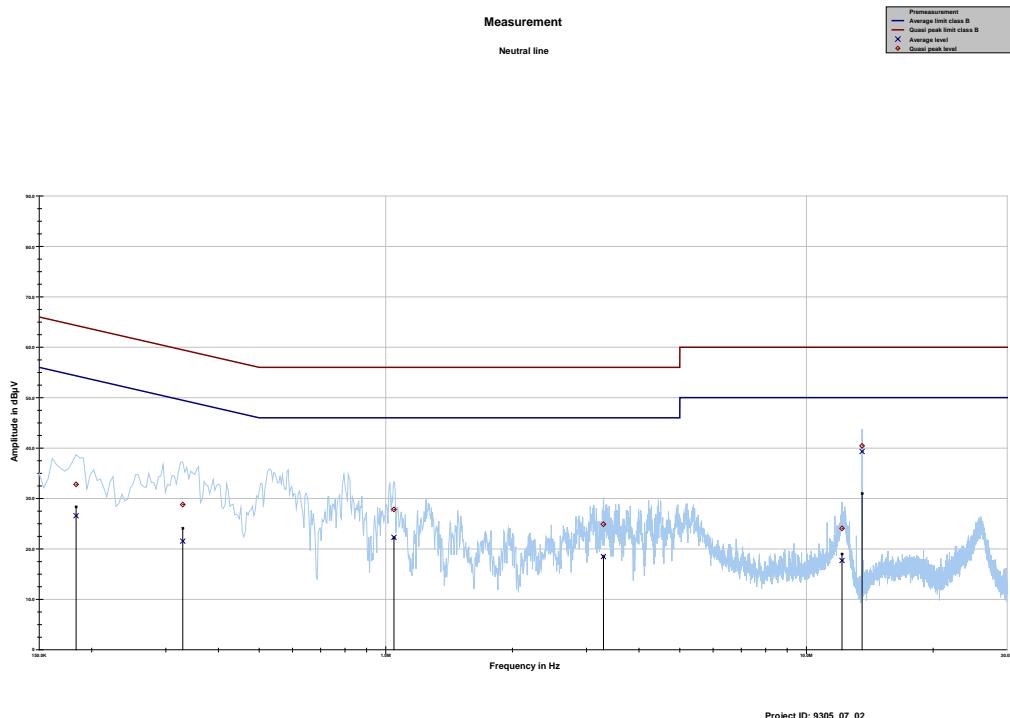Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.187312	36.66	27.49	64.155	32.00	22.94	54.934
0.355219	34.19	24.64	58.840	31.05	19.09	50.137
1.049231	28.37	27.63	56.000	23.37	22.63	46.000
1.273106	23.15	32.85	56.000	14.19	31.81	46.000
11.884781	19.49	40.51	60.000	14.55	35.45	50.000
13.560113	36.93	23.07	60.000	35.78	14.22	50.000

Plot 2: 150 kHz to 30 MHz, neutral line

Final_Result

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dB μ V	dB	dB μ V	dB μ V	dB	dB μ V
0.183581	32.79	31.53	64.322	26.58	28.46	55.041
0.329100	28.79	30.68	59.474	21.54	29.35	50.883
1.045500	27.82	28.18	56.000	22.29	23.71	46.000
3.291713	24.89	31.11	56.000	18.48	27.52	46.000
12.149700	24.07	35.93	60.000	17.70	32.30	50.000
13.560113	40.44	19.56	60.000	39.31	10.69	50.000

12.5 Frequency error

Measurement:

The maximum detected field strength for the spurious. Measurement performed according to ANSI C63.10, chapter 6.8

Measurement parameters	
Detector:	Peak detector
Resolution bandwidth:	10 Hz / 100 Hz
Video bandwidth:	> RBW
Trace mode:	Max hold
Used equipment:	See chapter 8.4B
Measurement uncertainty:	See chapter 9

Limit:

FCC & IC
The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. (± 1.356 kHz)
Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm)

Result: Temperature variation

Frequency tolerance			
Measured frequency	Frequency error (kHz)	Conditions	Result
13.560211	+0.211	-25 °C & 100% voltage*	compliant
13.560217	+0.217	-20 °C & 100% voltage	compliant
13.560212	+0.212	-10 °C & 100% voltage	compliant
13.560187	+0.187	0 °C & 100% voltage	compliant
13.560152	+0.152	+10 °C & 100% voltage	compliant
13.560078	+0.078	+30 °C & 100% voltage	compliant
13.560053	+0.053	+40 °C & 100% voltage	compliant
13.560048	+0.048	+50 °C & 100% voltage	compliant
13.560082	+0.082	+60 °C & 100% voltage*	compliant
13.560130	+0.130	+70 °C & 100% voltage*	compliant

*Extended temperature range acc. customer declaration.

Result: Voltage variation

Frequency tolerance			
Measured frequency	Frequency error (kHz)	Conditions	Result
13.560113	+0.113	+20 °C & 85% voltage	compliant
13.560113	+0.113	+20 °C & 100% voltage	compliant
13.560113	+0.113	+20 °C & 115% voltage	compliant

13 Observations

No observations except those reported with the single test cases have been made.

14 Glossary

AVG	Average
C	Compliant
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz
CAC	Channel availability check
CW	Clean wave
DC	Duty cycle
DFS	Dynamic frequency selection
DSSS	Dynamic sequence spread spectrum
DUT	Device under test
EN	European Standard
ETSI	European Telecommunications Standards Institute
EMC	Electromagnetic Compatibility
EUT	Equipment under test
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
FHSS	Frequency hopping spread spectrum
FVIN	Firmware version identification number
GNSS	Global Navigation Satellite System
GUE	GNSS User Equipment
HMN	Host marketing name
HVIN	Hardware version identification number
HW	Hardware
IC	Industry Canada
Inv. No.	Inventory number
MC	Modulated carrier
NA	Not applicable
NC	Not compliant
NOP	Non occupancy period
NP	Not performed
OBW	Occupied bandwidth
OC	Operating channel
OCW	Operating channel bandwidth
OFDM	Orthogonal frequency division multiplexing
OOB	Out of band
OP	Occupancy period
PER	Packet error rate
PMN	Product marketing name
PP	Positive peak
QP	Quasi peak
RLAN	Radio local area network
S/N or SN	Serial number
SW	Software
UUT	Unit under test
WLAN	Wireless local area network

15 Document history

Version	Applied changes	Date of release
R01	Initial release	2025-05-21
R02	PMN changed	2025-05-23

END OF TEST REPORT