

FCC TEST REPORT

FCC ID: 2AY3HAJAZZAJ139PRO

Report No. : SSP24010141-1E

Prepared For : Shenzhen Ajazz Tongchuang Electronic Technology Co., Ltd.

Product Name : game mouse

Model Name : AJAZZ AJ139 PRO

FCC Rule : FCC Part 15.249

Date of Issue : 2024-02-20

Prepared By : Shenzhen CCUT Quality Technology Co., Ltd.



Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.: +86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Shenzhen Ajazz Tongchuang Electronic Technology Co., Ltd. 2104-1, Block A, CIMC Low Orbit Satellite Internet of Things Industrial Park, Dongkeng Community, Fenghuang Street, Guangming District, Shenzhen,	
Address of Applicant.....:	Guangdong, China	
Manufacturer:	Shenzhen Ajazz Tongchuang Electronic Technology Co., Ltd. 2104-1, Block A, CIMC Low Orbit Satellite Internet of Things Industrial Park, Dongkeng Community, Fenghuang Street, Guangming District, Shenzhen,	
Address of Manufacturer.....:	Guangdong, China	
Product Name:	game mouse	
Brand Name:	AJAZZ	
Main Model:	AJAZZ AJ139 PRO	
Series Models:	-	
Test Standard:	FCC Part 15 Subpart C ANSI C63.10-2013	
Date of Test:	2024-01-20 to 2024-01-24	
Test Result:	PASS	
Tested Engineer	<u>Colin Chen</u>	(Colin Chen)
Project Manager:	<u>Lieber Ouyang</u>	(Lieber Ouyang)
Authorized Signatory:	<u>Lahm Peng</u>	(Lahm Peng)

Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.

CONTENTS

1. General Information.....5

 1.1 Product Information5

 1.2 Test Setup Information.....6

 1.3 Compliance Standards.....7

 1.4 Test Facilities.....7

 1.5 List of Measurement Instruments8

 1.6 Measurement Uncertainty8

2. Summary of Test Results9

3. Antenna Requirement10

 3.1 Standard and Limit.....10

 3.2 Test Result.....10

4. Conducted Emissions11

 4.1 Standard and Limit.....11

 4.2 Test Procedure.....11

 4.3 Test Data and Results12

5. Radiated Emissions15

 5.1 Standard and Limit.....15

 5.2 Test Procedure.....15

 5.3 Test Data and Results17

6. Out of Band Emissions.....22

 6.1 Standard and Limit.....22

 6.2 Test Procedure.....22

 6.3 Test Data and Results22

7. Occupied Bandwidth27

 7.1 Standard and Limit.....27

 7.2 Test Procedure.....27

 7.3 Test Data and Results27

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2024-02-20	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	game mouse
Trade Name:	AJAZZ
Main Model:	AJAZZ AJ139 PRO
Series Models:	-
Rated Voltage:	DC 3.7V by Battery, USB 5V Charging
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

Wireless Specification	
Wireless Standard:	2.4GHz RF
Operating Frequency:	2405 ~ 2475 MHz
Max. Field Strength:	77.83dBuV/m
Quantity of Channel:	16
Modulation:	GFSK
Antenna Gain:	2.24dBi
Type of Antenna:	PCB Antenna
Type of Device:	<input checked="" type="checkbox"/> Portable Device <input type="checkbox"/> Mobile Device <input type="checkbox"/> Modular Device

1.2 Test Setup Information

List of Test Modes		
Test Mode	Description	Remark
TM1	Lowest Channel	2405MHz
TM2	Middle Channel	2441MHz
TM3	Highest Channel	2475MHz
TM4	Charging	USB Charging

List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
Type-C Cable	50	Unshielded	Without Ferrite

List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Adapter	Huawei	HW-100225C00	HC78E2H6A23645

List of Channels							
No. of Channel	Frequency MHz	No. of Channel	Frequency MHz	No. of Channel	Frequency MHz	No. of Channel	Frequency MHz
01	2405	05	2422	09	2441	13	2463
02	2408	06	2426	10	2445	14	2466
03	2414	07	2436	11	2453	15	2471
04	2419	08	2439	12	2459	16	2475

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2023-10-21	2024-10-20
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2023-07-31	2024-07-30
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2023-07-31	2024-07-30
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40-N	101692	2023-07-31	2024-07-30
Amplifier	SCHWARZBECK	BBV 9743B	00251	2023-07-31	2024-07-30
Amplifier	HUABO	YXL0518-2.5-45	--	2023-07-31	2024-07-30
Amplifier	COM-MW	DLAN-18G-4G-02	10229104	2023-07-31	2024-07-30
Loop Antenna	DAZE	ZN30900C	21104	2023-08-07	2024-08-06
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2023-08-07	2024-08-06
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2023-08-07	2024-08-06
Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2023-08-07	2024-08-06
Conducted RF Testing					
RF Test System	MWRFTest	MW100-RFCB	220418SQS-37	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2023-07-31	2024-07-30

1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209, 15.249(a)&(d)	Radiated Emissions	Passed
FCC Part 15.249(d)	Out of Band Emissions	Passed
FCC Part 15.215(c)	Occupied Bandwidth	Passed
<p>Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable</p>		

3. Antenna Requirement

3.1 Standard and Limit

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an PCB antenna, fulfill the requirement of this section.

4. Conducted Emissions

4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz
 Note 2: The lower limit applies at the band edges

4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

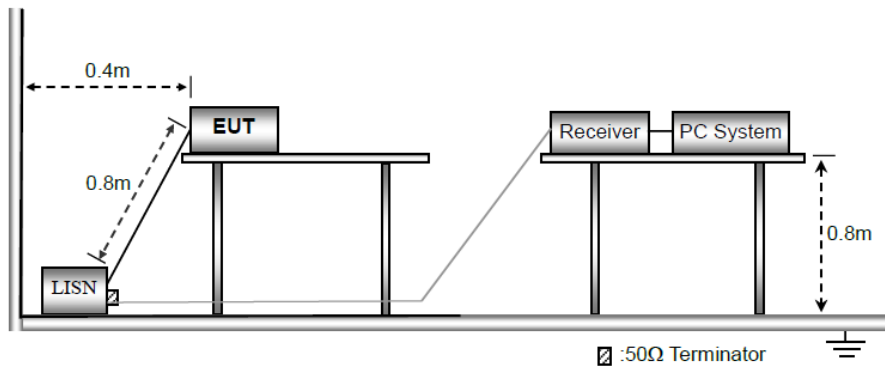

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.


g) For the actual test configuration, please refer to the related Item - photographs of the test setup.

4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as below:

Remark: $\text{Level} = \text{Reading} + \text{Factor}$, $\text{Margin} = \text{Level} - \text{Limit}$


Test Plots and Data of Conducted Emissions	
Tested Mode:	TM4
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

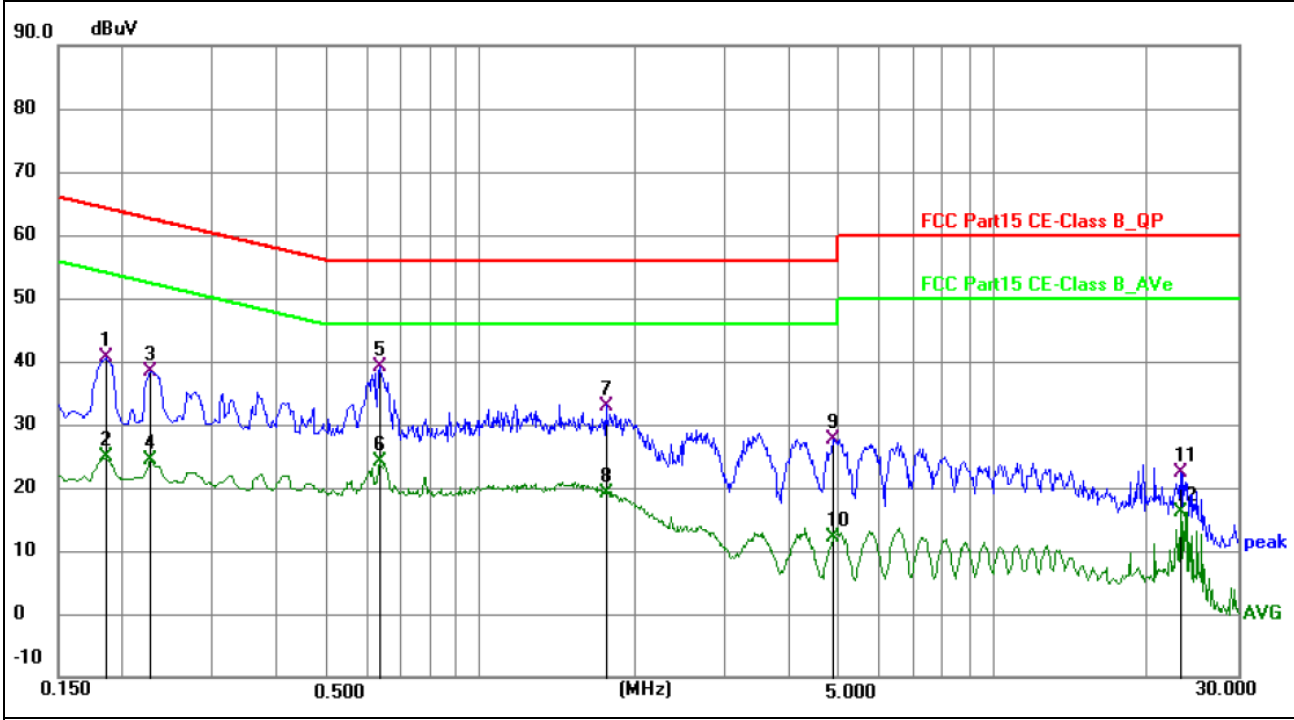

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	31.23	9.39	40.62	64.21	-23.59	QP	P	
2	0.1860	15.44	9.39	24.83	54.21	-29.38	AVG	P	
3	0.2265	28.85	9.63	38.48	62.58	-24.10	QP	P	
4	0.2265	14.77	9.63	24.40	52.58	-28.18	AVG	P	
5 *	0.6360	29.34	9.67	39.01	56.00	-16.99	QP	P	
6	0.6360	14.46	9.67	24.13	46.00	-21.87	AVG	P	
7	1.7564	22.96	10.04	33.00	56.00	-23.00	QP	P	
8	1.7564	9.09	10.04	19.13	46.00	-26.87	AVG	P	
9	4.8570	17.38	10.21	27.59	56.00	-28.41	QP	P	
10	4.8570	1.80	10.21	12.01	46.00	-33.99	AVG	P	
11	23.1990	11.90	10.42	22.32	60.00	-37.68	QP	P	
12	23.1990	5.74	10.42	16.16	50.00	-33.84	AVG	P	

Test Plots and Data of Conducted Emissions

Tested Mode:	TM4
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

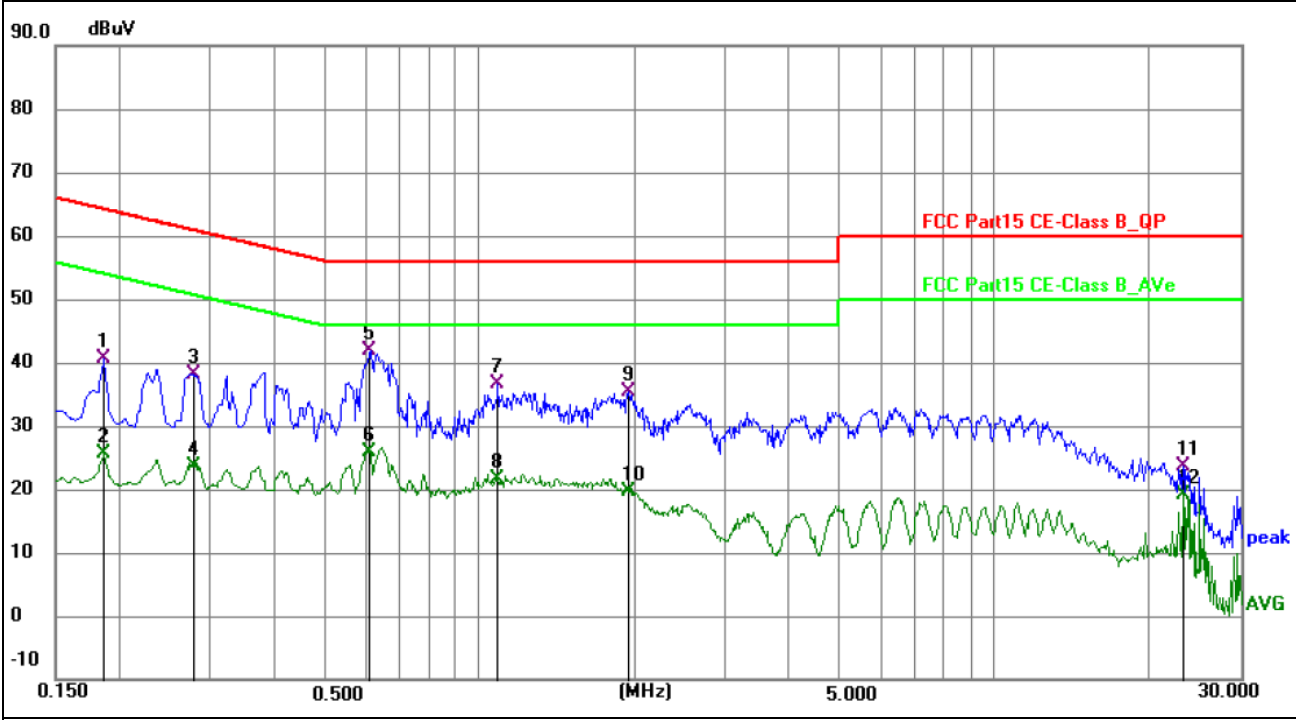

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	31.57	9.01	40.58	64.21	-23.63	QP	P	
2	0.1860	16.56	9.01	25.57	54.21	-28.64	AVG	P	
3	0.2760	28.42	9.66	38.08	60.94	-22.86	QP	P	
4	0.2760	14.00	9.66	23.66	50.94	-27.28	AVG	P	
5 *	0.6134	32.04	9.94	41.98	56.00	-14.02	QP	P	
6	0.6134	15.87	9.94	25.81	46.00	-20.19	AVG	P	
7	1.0859	26.58	9.99	36.57	56.00	-19.43	QP	P	
8	1.0859	11.68	9.99	21.67	46.00	-24.33	AVG	P	
9	1.9410	25.44	10.05	35.49	56.00	-20.51	QP	P	
10	1.9410	9.61	10.05	19.66	46.00	-26.34	AVG	P	
11	23.1990	13.26	10.38	23.64	60.00	-36.36	QP	P	
12	23.1990	8.66	10.38	19.04	50.00	-30.96	AVG	P	

5. Radiated Emissions

5.1 Standard and Limit

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

According to §15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:

Frequency of emission (MHz)	Radiated emissions (3m)
	Quasi-peak (dBuV/m)
30-88	40
88-216	43.5
216-960	46
Above 960	54


Note: The more stringent limit applies at transition frequencies.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

5.2 Test Procedure


Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

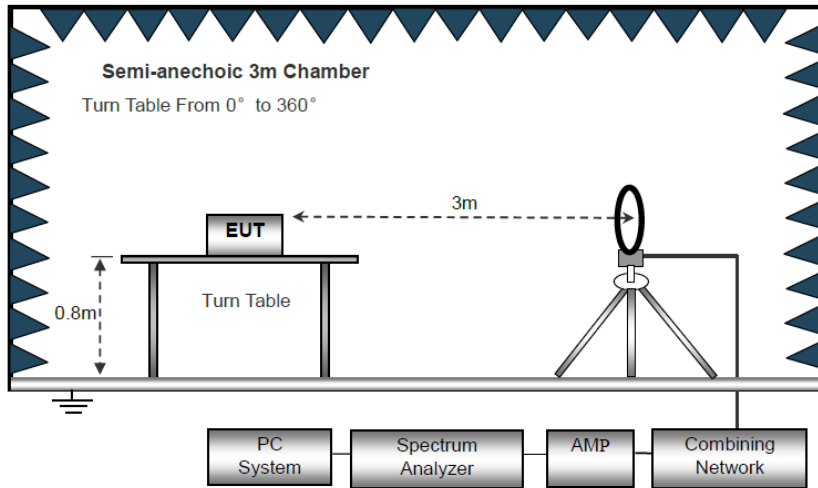

Block Diagram of Radiated Emission Below 30MHz

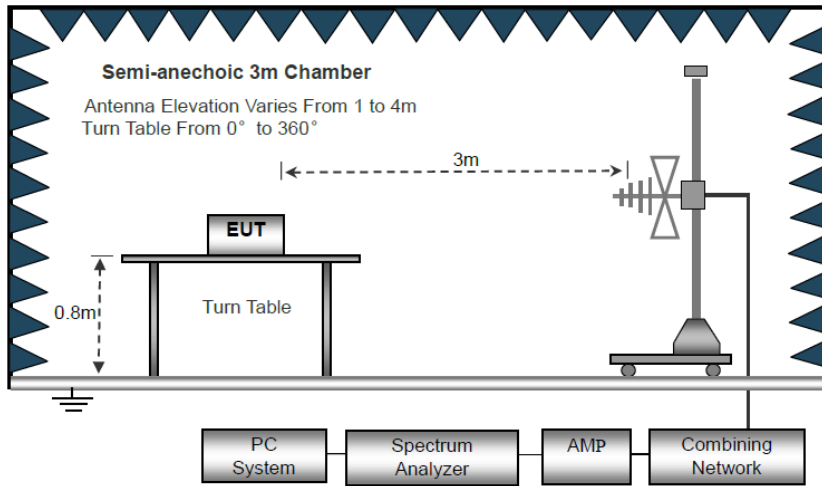

Block Diagram of Radiated Emission From 30MHz to 1GHz

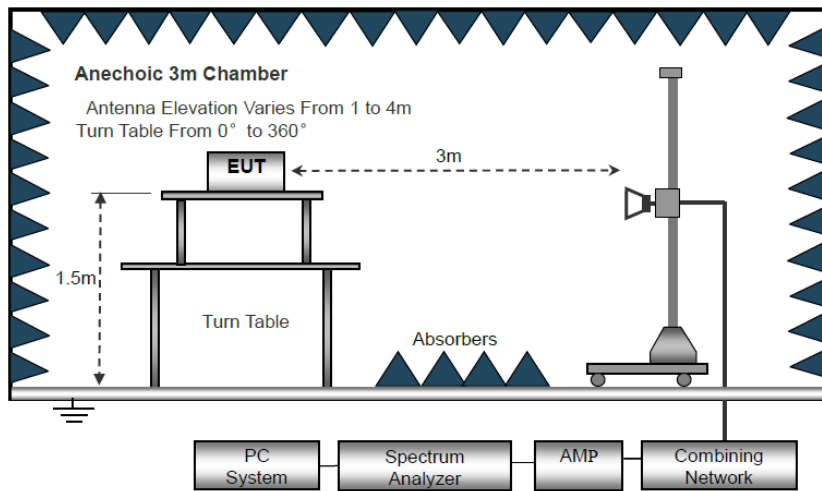

Block Diagram of Radiated Emission Above 1GHz

- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, 10kHz for $f < 30\text{MHz}$
VBW \geq RBW, Sweep = auto
Detector function = peak
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.

5.3 Test Data and Results


Based on all tested data, the EUT complied with the FCC Part 15.249 standard limit for a wireless device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Note: For 9kHz-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Radiated Emission Test Data (30MHz to 1GHz)


Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Remark:	

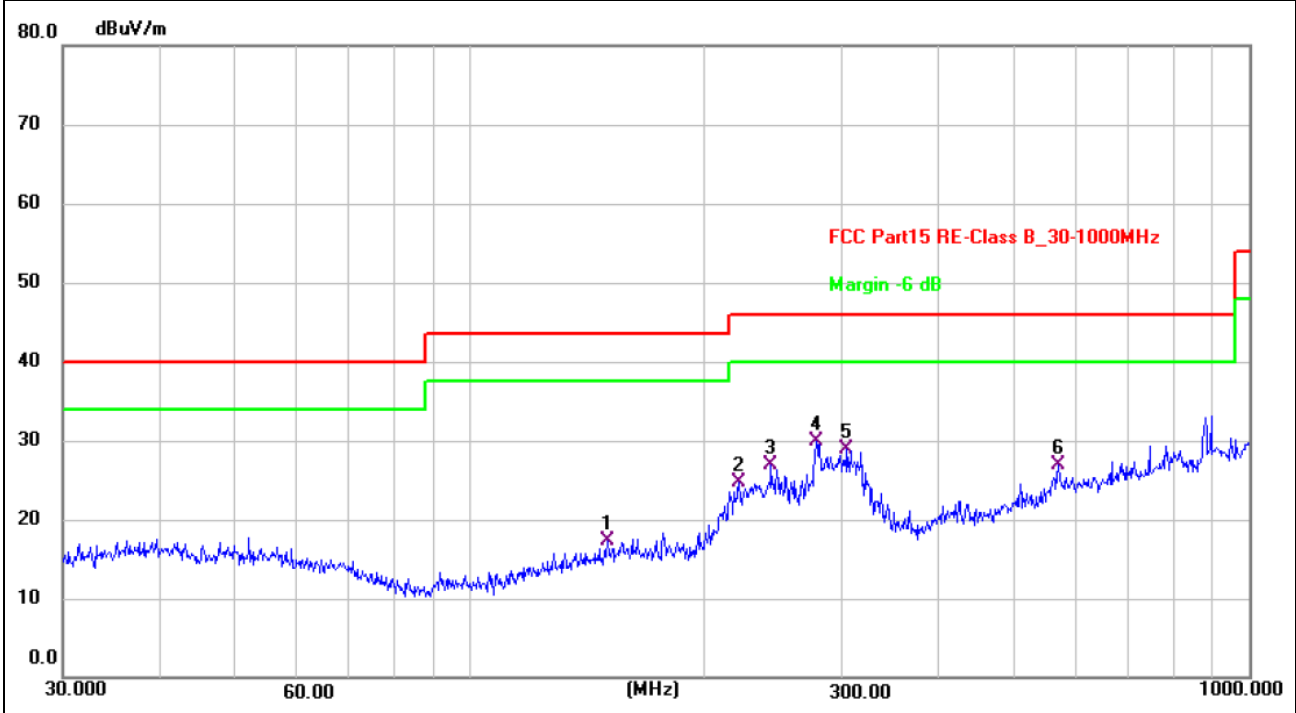

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	150.0108	26.03	-8.73	17.30	43.50	-26.20	QP	100	350	P	
2	221.3921	35.94	-11.21	24.73	46.00	-21.27	QP	100	299	P	
3	243.3772	36.89	-9.91	26.98	46.00	-19.02	QP	100	299	P	
4 *	278.0668	38.76	-8.92	29.84	46.00	-16.16	QP	100	268	P	
5	304.6099	37.19	-8.28	28.91	46.00	-17.09	QP	100	310	P	
6	568.6127	29.08	-2.19	26.89	46.00	-19.11	QP	100	184	P	

Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode:	TM1
Test Antenna Polarization:	Vertical
Remark:	

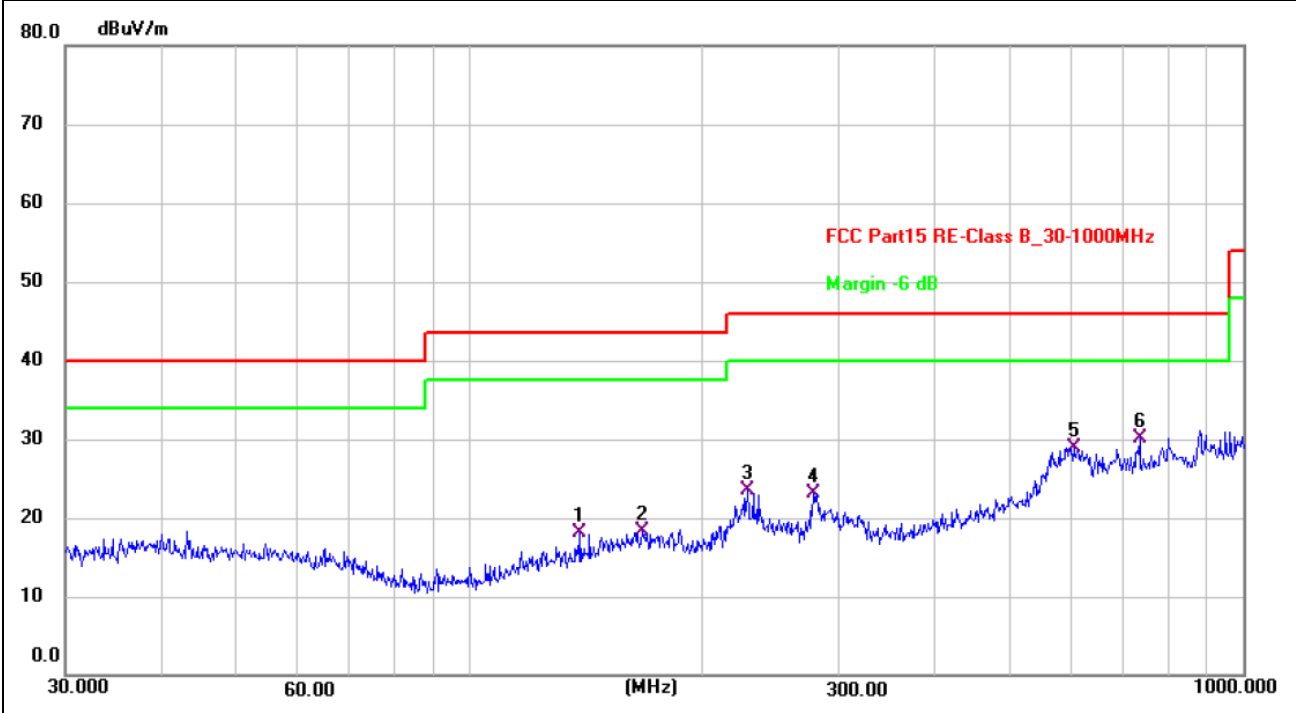

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	138.8735	27.47	-9.43	18.04	43.50	-25.46	QP	100	286	P	
2	167.2368	27.82	-9.48	18.34	43.50	-25.16	QP	100	286	P	
3	228.4904	34.16	-10.73	23.43	46.00	-22.57	QP	100	5	P	
4	278.0668	32.08	-8.92	23.16	46.00	-22.84	QP	100	52	P	
5	603.5392	29.94	-0.98	28.96	46.00	-17.04	QP	100	148	P	
6 *	734.4913	29.25	0.78	30.03	46.00	-15.97	QP	100	307	P	

Radiated Emission Test Data (Above 1GHz)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Lowest Channel (2405MHz)							
2405	98.72	-20.89	77.83	114	-36.17	H	PK
2405	61.44	-20.89	40.55	94	-53.45	H	AV
4810	77.95	-14.72	63.23	74	-10.77	H	PK
4810	60.32	-14.72	45.6	54	-8.4	H	AV
7215	62.42	-8.41	54.01	74	-19.99	H	PK
7215	45.9	-8.41	37.49	54	-16.51	H	AV
2405	87.53	-20.89	66.64	114	-47.36	V	PK
2405	52.21	-20.89	31.32	94	-62.68	V	AV
4810	79.95	-14.64	65.31	74	-8.69	V	PK
4810	61.83	-14.64	47.19	54	-6.81	V	AV
7215	64.24	-8.28	55.96	74	-18.04	V	PK
7215	45.4	-8.28	37.12	54	-16.88	V	AV
Middle Channel (2441MHz)							
2441	95.32	-20.64	74.67	114	-39.33	H	PK
2441	59.33	-20.64	38.69	94	-55.31	H	AV
4880	79.95	-14.64	65.31	74	-8.69	H	PK
4882	61.83	-14.64	47.19	54	-6.81	H	AV
7323	64.24	-8.28	55.96	74	-18.04	H	PK
7323	45.4	-8.28	37.12	54	-16.88	H	AV
2441	85.52	-20.64	64.88	114	-49.12	V	PK
2441	50.33	-29.69	20.64	94	-73.36	V	AV
4880	73.01	-14.64	58.37	74	-15.63	V	PK
4882	60.68	-14.64	46.04	54	-7.96	V	AV
7323	63.74	-8.28	55.46	74	-18.54	V	PK
7323	47.06	-8.28	38.78	54	-15.22	V	AV

Radiated Emission Test Data (Above 1GHz)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Highest Channel (2475MHz)							
2475	93.79	-20.55	73.24	114	-40.76	H	PK
2475	57.94	-20.55	37.39	94	-56.61	H	AV
4950	76.08	-14.53	61.55	74	-12.45	H	PK
4950	62.56	-14.53	48.03	54	-5.97	H	AV
7425	62.79	-8.13	54.66	74	-19.34	H	PK
7425	46.79	-8.13	38.66	54	-66.97	H	AV
2475	77.56	-20.55	57.01	114	-56.99	V	PK
2475	47.58	-20.55	27.03	94	-66.97	V	AV
4950	76.96	-14.53	62.43	74	-11.57	V	PK
4950	58.26	-14.53	43.73	54	-10.27	V	AV
7425	63.69	-8.13	55.56	74	-18.44	V	PK
7425	48.38	-8.13	40.25	54	-13.75	V	AV

Note 1: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.


6. Out of Band Emissions

6.1 Standard and Limit

According to §15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

6.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

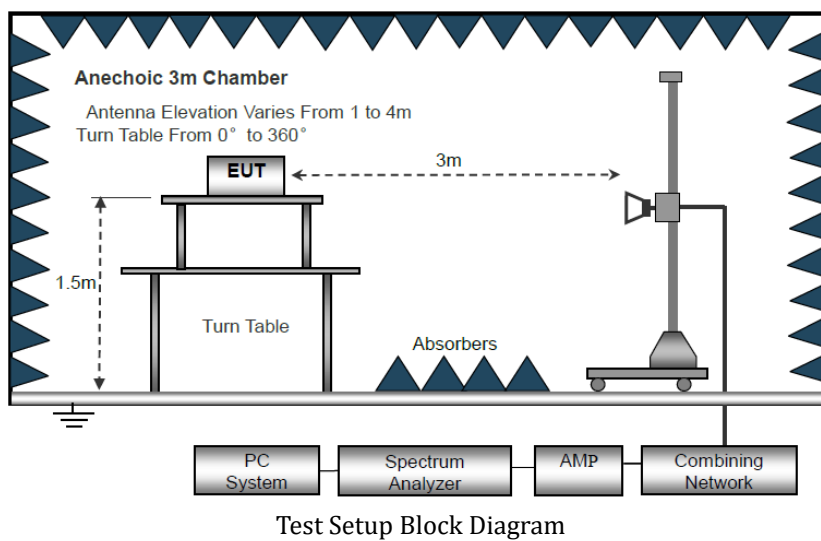

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.


6.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.249 standard limit, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit


Test Mode	Frequency	Limit	Result
	MHz	dBuV/dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	>50 dBc	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

Test Plots and Data of Out of Band Emissions	
Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Test Band-edge:	Lowest band-edge
Remark:	

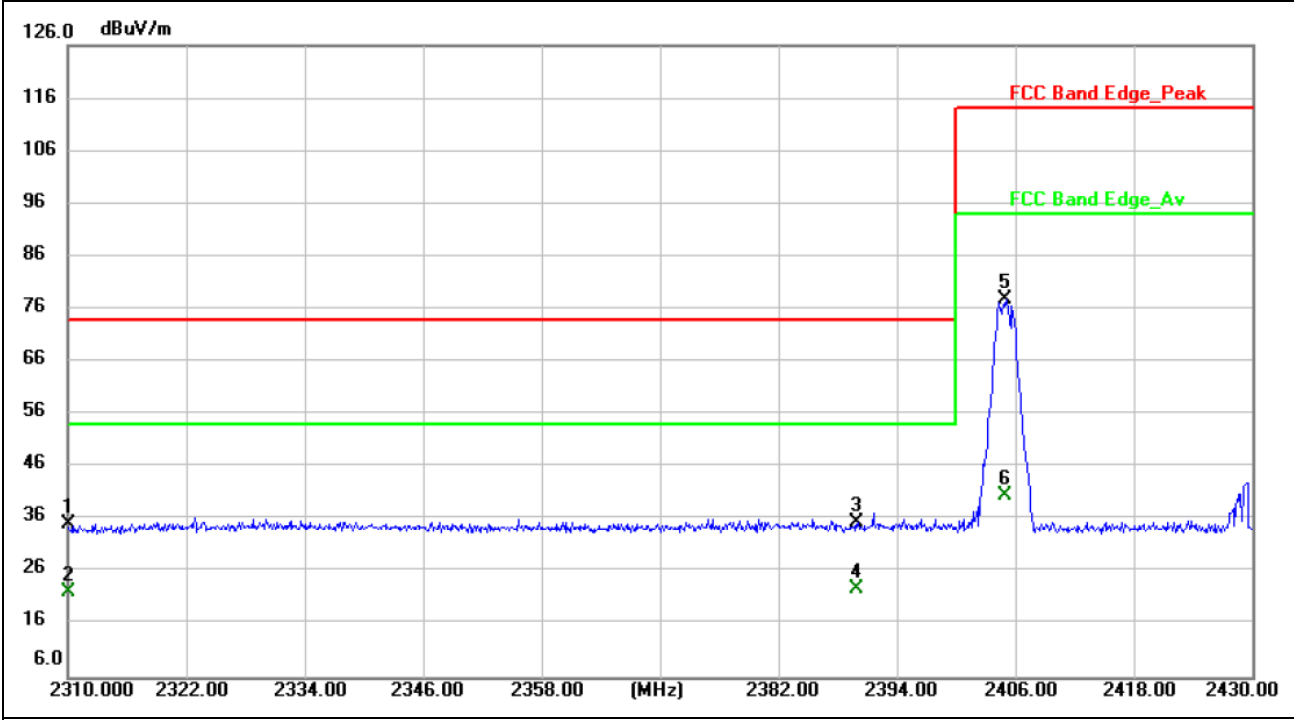


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	56.74	-21.34	35.40	74.00	-38.60	peak	150	221	P	
2	2310.000	43.63	-21.34	22.29	54.00	-31.71	AVG	150	221	P	
3	2390.000	56.39	-20.96	35.43	74.00	-38.57	peak	150	306	P	
4 *	2390.000	43.76	-20.96	22.80	54.00	-31.20	AVG	150	306	P	
5	2405.000	98.72	-20.89	77.83	114.00	-36.17	peak	150	285	P	
6	2405.000	61.44	-20.89	40.55	94.00	-53.45	AVG	150	285	P	

Test Plots and Data of Out of Band Emissions	
Tested Mode:	TM1
Test Antenna Polarization:	Vertical
Test Band-edge:	Lowest band-edge
Remark:	

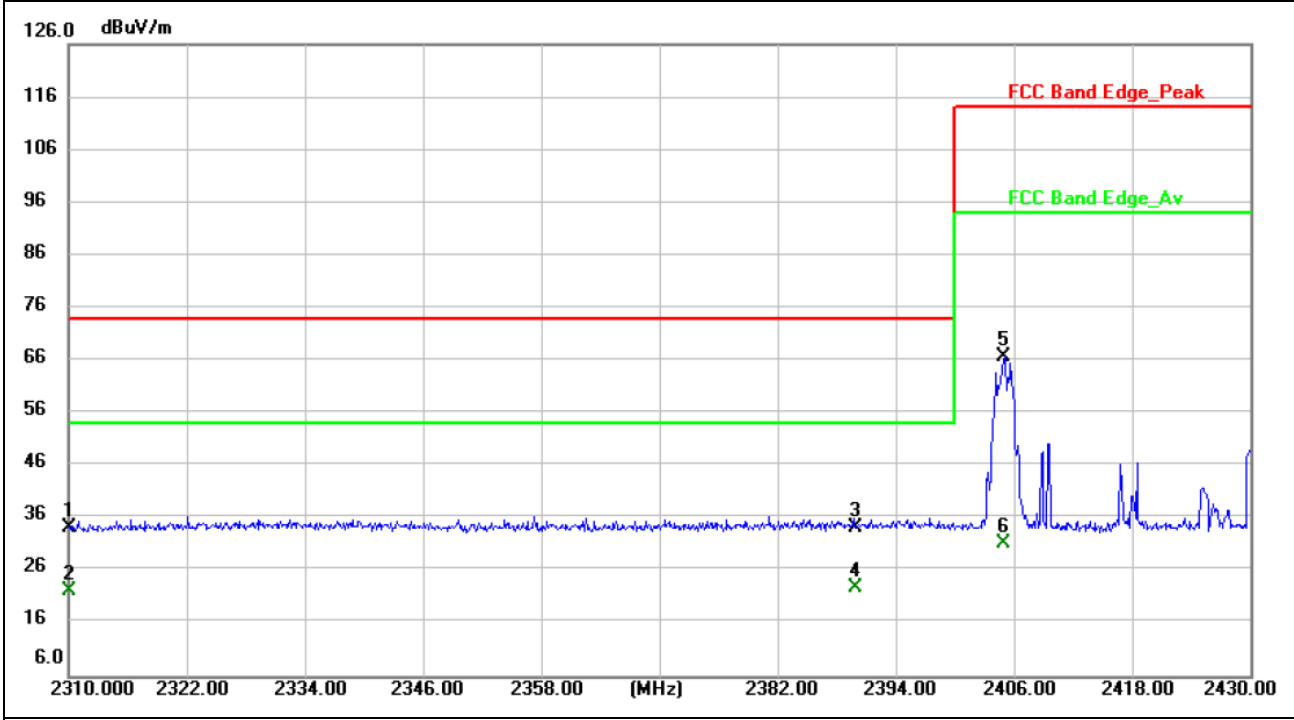


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	55.75	-21.34	34.41	74.00	-39.59	peak	150	146	P	
2	2310.000	43.65	-21.34	22.31	54.00	-31.69	AVG	150	146	P	
3	2390.000	55.34	-20.96	34.38	74.00	-39.62	peak	150	317	P	
4 *	2390.000	43.78	-20.96	22.82	54.00	-31.18	AVG	150	316	P	
5	2405.000	87.53	-20.89	66.64	114.00	-47.36	peak	150	328	P	
6	2405.000	52.21	-20.89	31.32	94.00	-62.68	AVG	150	328	P	

Test Plots and Data of Out of Band Emissions	
Tested Mode:	TM3
Test Antenna Polarization:	Horizontal
Test Band-edge:	Highest band-edge
Remark:	

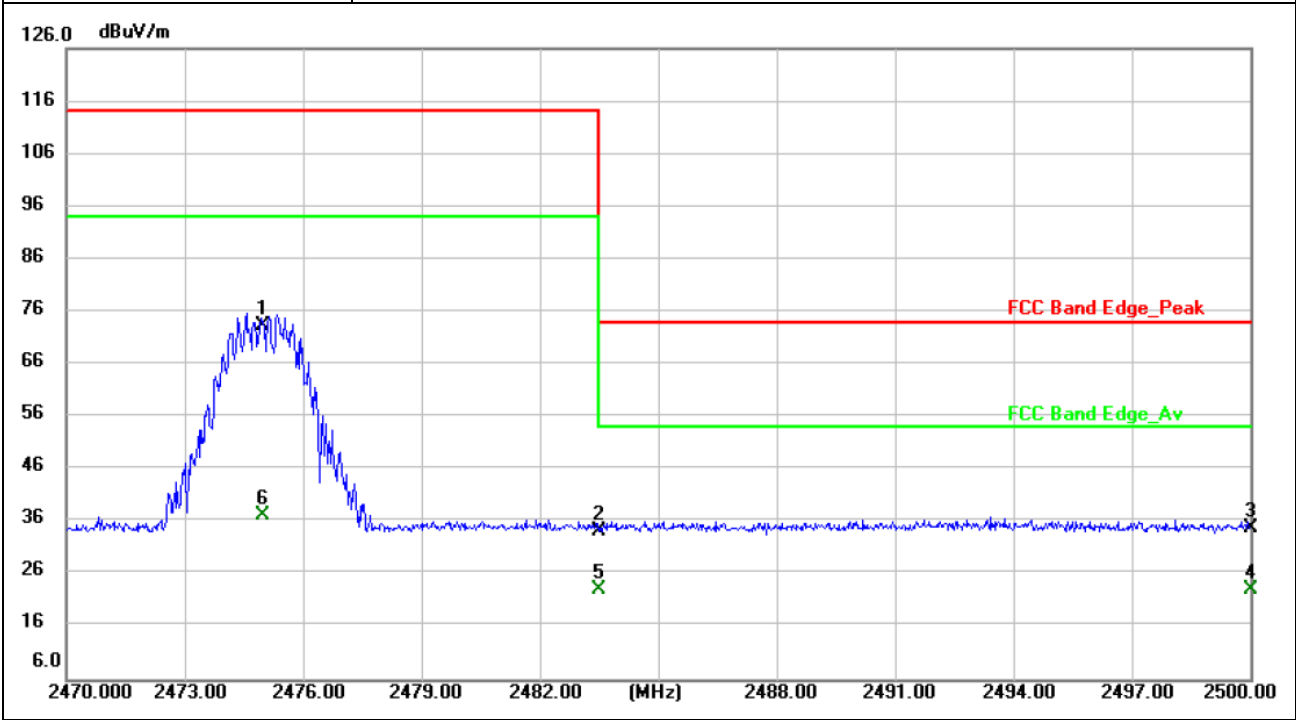

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2475.000	93.79	-20.55	73.24	114.00	-40.76	peak	150	266	P	
2	2483.500	54.94	-20.51	34.43	74.00	-39.57	peak	150	191	P	
3	2500.000	55.41	-20.43	34.98	74.00	-39.02	peak	150	93	P	
4	2500.000	43.54	-20.43	23.11	54.00	-30.89	AVG	150	93	P	
5 *	2483.500	43.74	-20.51	23.23	54.00	-30.77	AVG	150	191	P	
6	2475.000	57.94	-20.55	37.39	94.00	-56.61	AVG	150	266	P	

Test Plots and Data of Out of Band Emissions	
Tested Mode:	TM3
Test Antenna Polarization:	Vertical
Test Band-edge:	Highest band-edge
Remark:	

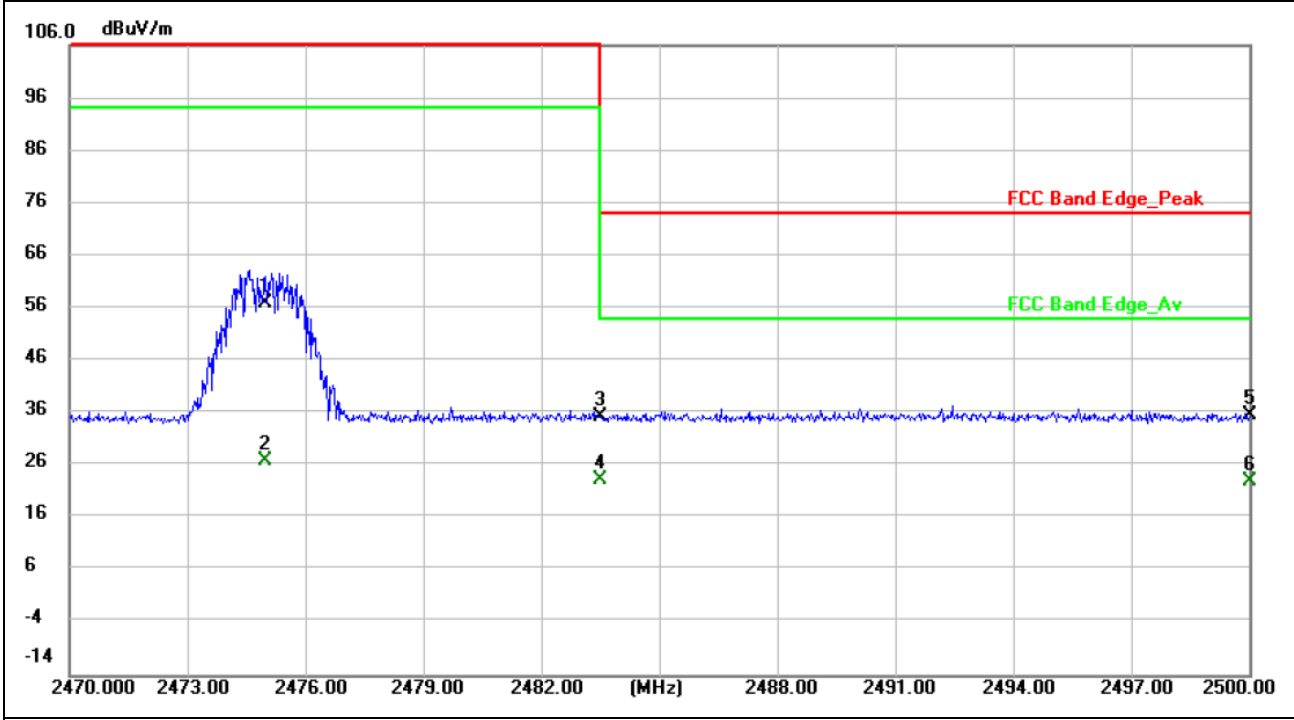

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2475.000	77.56	-20.55	57.01	114.00	-56.99	peak	150	94	P	
2	2475.000	47.58	-20.55	27.03	94.00	-66.97	AVG	150	94	P	
3	2483.500	55.80	-20.51	35.29	74.00	-38.71	peak	150	348	P	
4 *	2483.500	43.77	-20.51	23.26	54.00	-30.74	AVG	150	348	P	
5	2500.000	56.13	-20.43	35.70	74.00	-38.30	peak	150	327	P	
6	2500.000	43.57	-20.43	23.14	54.00	-30.86	AVG	150	327	P	

7. Occupied Bandwidth

7.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 2MHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.




Test Setup Block Diagram

7.3 Test Data and Results


Test Channel	Test Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Lowest Channel	2405MHz	1.510	1.769
Middle Channel	2441MHz	1.462	1.747
Highest Channel	2475MHz	2.351	1.794

Test Plots of Occupied Bandwidth


2405MHz

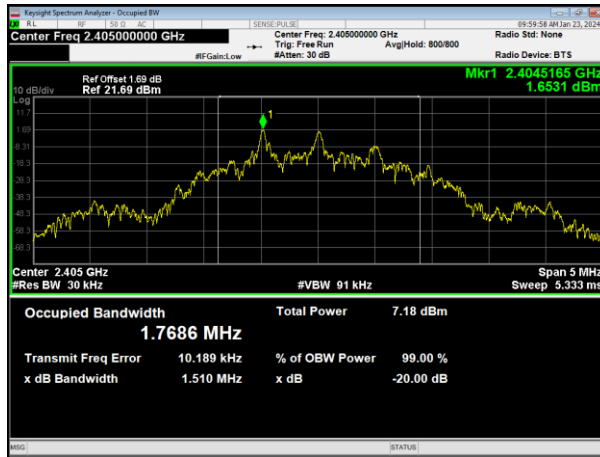

2441MHz

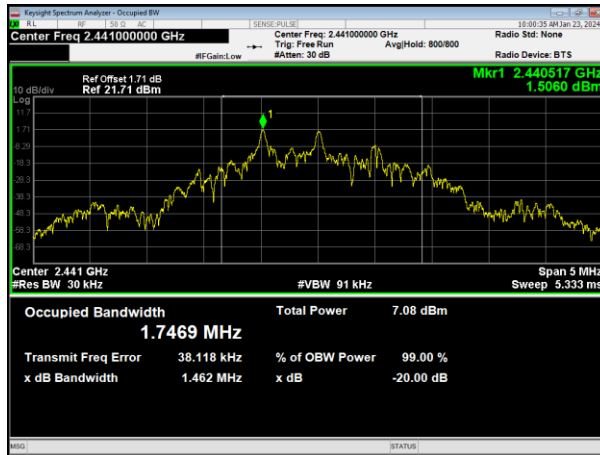

2475MHz

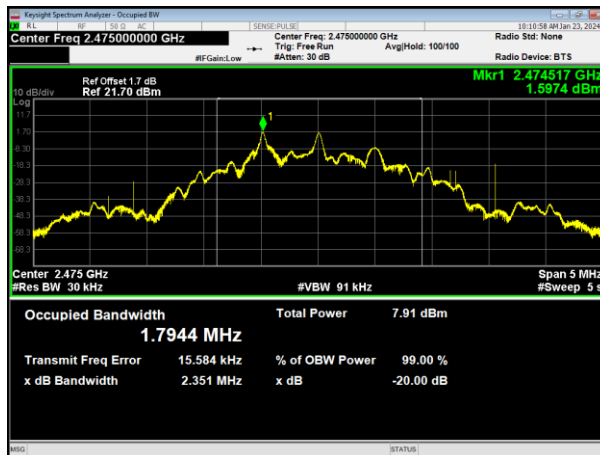

***** END OF REPORT *****