



**FCC PART 15 SUBPART C
CERTIFICATION TEST REPORT**

For

LED Lamp

**MODEL NUMBER: MK-020011002122,
MK-020011002116, MK-020011002117**

FCC ID: 2AY5GMK020011002122

REPORT NUMBER: 4789738938.2-9

ISSUE DATE: Mar 10, 2021

Prepared for

**Zhejiang MEKA Electric Co.,Ltd
NO.8 Canghai Road,Lihai Town,Binhai New City,Shaoxing,zhejiang Province**

Prepared by

**UL-CCIC COMPANY LIMITED
No. 2, Chengwan Road, Suzhou Industrial Park, People's Republic of China
Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

10-EM-F0878 – Issue 2.0

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Revision History

Rev.	Issue Date	Revisions	Revised By
--	03/10/2021	Initial Issue	--



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6 dB Bandwidth	FCC 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC 15.207	Pass
7	Antenna Requirement	FCC 15.203	Pass

Remark:

1) The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C, when <Accuracy Method> decision rule is applied.



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY.....	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	8
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	8
5. EQUIPMENT UNDER TEST.....	9
5.1. <i>DESCRIPTION OF EUT.....</i>	9
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	9
5.3. <i>CHANNEL LIST.....</i>	9
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	10
5.5. <i>THE WORSE CASE CONFIGURATIONS.....</i>	10
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	10
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	11
6. MEASURING INSTRUMENT AND SOFTWARE USED.....	12
7. MEASUREMENT METHODS.....	14
8. ANTENNA PORT TEST RESULTS.....	15
8.1. <i>ON TIME AND DUTY CYCLE.....</i>	15
8.2. <i>6 dB DTS BANDWIDTH.....</i>	18
8.2.1. 802.11b MODE.....	19
8.2.2. 802.11g MODE.....	21
8.2.3. 802.11n HT20 MODE.....	23
8.3. <i>PEAK CONDUCTED OUTPUT POWER.....</i>	25
8.3.1. 802.11b MODE.....	26
8.3.2. 802.11g MODE.....	26
8.3.3. 802.11n HT20 MODE.....	26
8.4. <i>POWER SPECTRAL DENSITY.....</i>	27
8.4.1. 802.11b MODE.....	28
8.4.2. 802.11g MODE.....	30
8.4.3. 802.11n HT20 MODE.....	32
8.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....</i>	34
8.5.1. 802.11b MODE.....	35
8.5.2. 802.11g MODE.....	39
8.5.3. 802.11n HT20 MODE.....	43
9. RADIATED TEST RESULTS.....	46



9.1. <i>RESTRICTED BANDEdge</i>	52
9.2. <i>SPURIOUS EMISSIONS (30-1GHz)</i>	64
9.3. <i>SPURIOUS EMISSIONS (1GHz-18GHz)</i>	70
9.4. <i>SPURIOUS EMISSIONS BELOW 30M</i>	88
10. AC POWER LINE CONDUCTED EMISSIONS	89
11. ANTENNA REQUIREMENTS	92



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Zhejiang MEKA Electric Co.,Ltd
Address: NO.8 Canghai Road,Lihai Town,Binhai New City,Shaoxing,zhejiang Province

Manufacturer Information

Company Name: Zhejiang MEKA Electric Co.,Ltd
Address: NO.8 Canghai Road,Lihai Town,Binhai New City,Shaoxing,zhejiang Province

EUT Description

EUT Name: LED Lamp
Model: MK-020011002122, MK-020011002116, MK-020011002117
Model Difference: Only the model name, appearance, size and power are different, the others are the same
Brand Name: MKOPTO
Sample Status: Normal
Sample ID: N/A
Sample Received Date: Feb 25, 2021
Date of Tested: Feb 25, 2021 ~ Mar 10, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15 Subpart C	PASS

Prepared By:

Jason Yang

Jason Yang
Engineer
Authorized By:

Chris Zhong

Chris Zhong
Laboratory Manager

Reviewed By:

Tom Tang

Tom Tang
Associate Project Engineer



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15 ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4338.01) Shenzhen STS Test Services Co., Ltd. has been assessed and proved to be in compliance with A2LA.</p> <p>CNAS (Registration No.: L7649) Shenzhen STS Test Services Co., Ltd. has been assessed and proved to be in compliance with CNAS.</p> <p>FCC (FCC Designation No.: 625569) Shenzhen STS Test Services Co., Ltd. has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>IC(Company No.: 12108A) Shenzhen STS Test Services Co., Ltd. has been registered and fully described in a report filed with Industry Canada. The Company Number is 12108A.</p>
---------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note: All tests measurement facilities used to collect the measurement data are located at A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.7\text{dB}$
2	Unwanted Emissions, conducted	$\pm 3.0\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.7\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.4\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.1\text{dB}$
6	All emissions, radiated >6G	$\pm 5.5\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.8\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.8\text{dB}$



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	LED Lamp
EUT Description	The EUT is a LED Lamp.
Model	MK-020011002122
Radio Technology	IEEE802.11b/g/n HT20
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)
Power Supply	Input: AC 110-130V 60Hz
Hardware Version	1.0.3
Software Version	2.9.12

5.2. MAXIMUM OUTPUT POWER

Frequency Range (MHz)	Number of Transmit Chains (NTX)	IEE Std. 802.11	Frequency (MHz)	Channel Number	Max PK Conducted Power (dBm)
2400-2483.5	1	IEEE 802.11b	2412-2462	1-11[11]	16.39
2400-2483.5	1	IEEE 802.11g	2412-2462	1-11[11]	22.64
2400-2483.5	1	IEEE 802.11nHT20	2412-2462	1-11[11]	21.46

5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency(M Hz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2425	8	2447	N/A	N/A



5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz

5.5. THE WORSE CASE CONFIGURATIONS

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 09
802.11b	1	Default	Default	Default	N/A		
802.11g	1	Default	Default	Default			
802.11n HT20	1	Default	Default	Default			
802.11n HT40	1	N/A			Default	Default	Default

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2412-2462	PCB Antenna	1

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	LENOVO	ThinkPad E470	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(cm)	Remarks
1	USB Cable	N/A	N/A	150cm	N/A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	N/A	N/A	N/A	N/A

TEST SETUP

The EUT can work in engineering mode with firmware QRCT from QUALCOMM through a Laptop.

SETUP DIAGRAM FOR TESTS

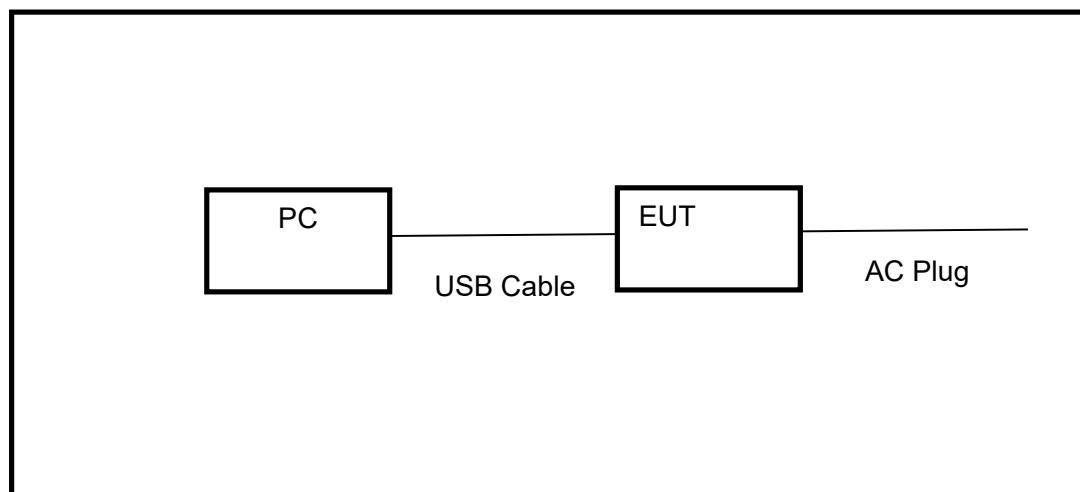



6. MEASURING INSTRUMENT AND SOFTWARE USED

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
Signal Analyzer	R&S	FSV 40-N	101823	2020.10.10	2021.10.09
Active loop Antenna	ZHINAN	ZN30900C	16035	2019.07.11	2021.07.10
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2019.10.15	2021.10.14
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2020.10.12	2021.10.11
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2020.10.12	2021.10.11
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2020.10.10	2021.10.09
Temperature & Humidity	HH660	Mieo	N/A	2020.10.12	2021.10.11
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Band Reject Filter (2.4-2.5GHz)	COM-MW	ZBSF-2400-2500	N/A	2020.10.12	2021.10.11
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
LISN	R&S	ENV216	101242	2020.10.12	2021.10.11
LISN	EMCO	3810/2NM	23625	2020.10.12	2021.10.11
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			



RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Power Sensor	Keysight	U2021XA	MY55520005	2020.10.10	2021.10.09
			MY55520006	2020.10.10	2021.10.09
			MY56120038	2020.10.10	2021.10.09
			MY56280002	2020.10.10	2021.10.09
Signal Analyzer	Agilent	N9020A	MY51110105	2020.03.05	2021.03.04
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
MIMO Power measurement test Set	Keysight	U2021XA	MY55520005	2020.10.10	2021.10.09
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			



7. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6 dB Bandwidth	558074 D01 15.247 Meas Guidance v05r02	8.2
2	Peak Output Power	558074 D01 15.247 Meas Guidance v05r02	8.1.3
3	Power Spectral Density	558074 D01 15.247 Meas Guidance v05r02	8.4
4	Out-of-band emissions in non-restricted bands	558074 D01 15.247 Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	558074 D01 15.247 Meas Guidance v05r02	8.6
6	Band-edge	558074 D01 15.247 Meas Guidance v05r02	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

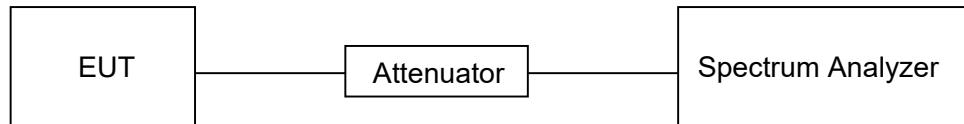

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS



Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/B Minimum VBW (KHz)
11b	100.000	100.000	0.0100	100.00	0.00	0.01
11g	1.404	1.405	0.9993	99.93	0.01	0.71
11n20	1.312	1.317	0.9962	99.62	0.03	0.76


Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle(Linear)

Where: B is On Time

Duty Cycle > 98%, set the final test VBW = 10KHz (VBW ≤ RBW/100)

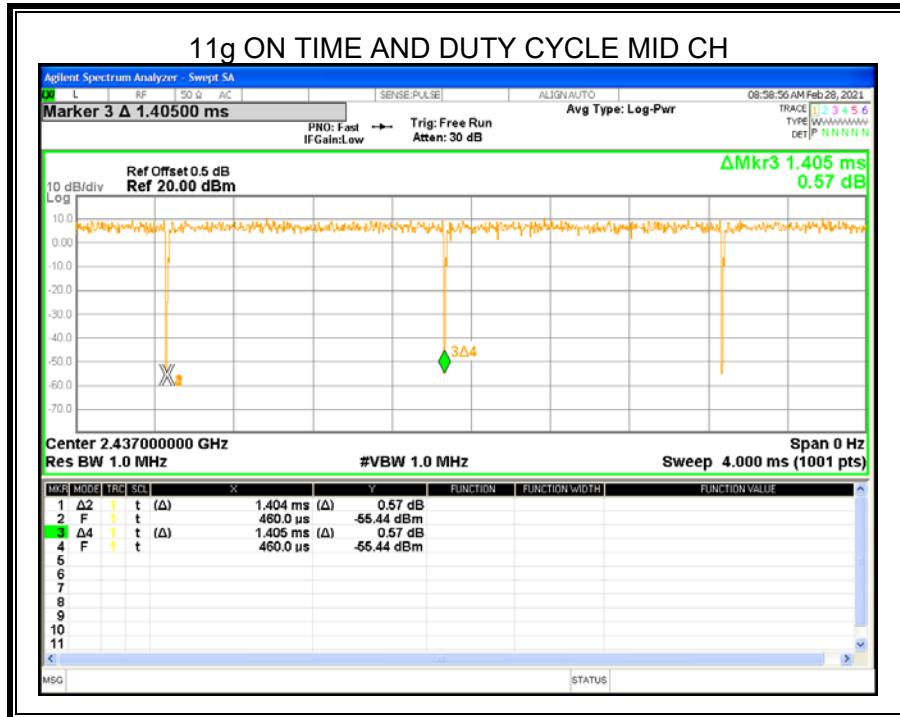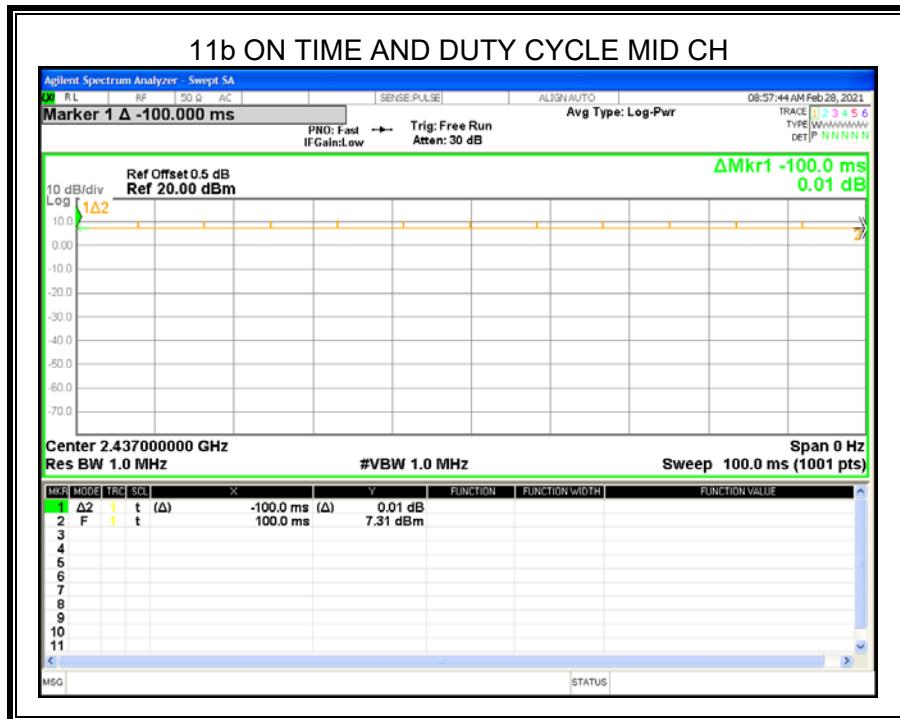

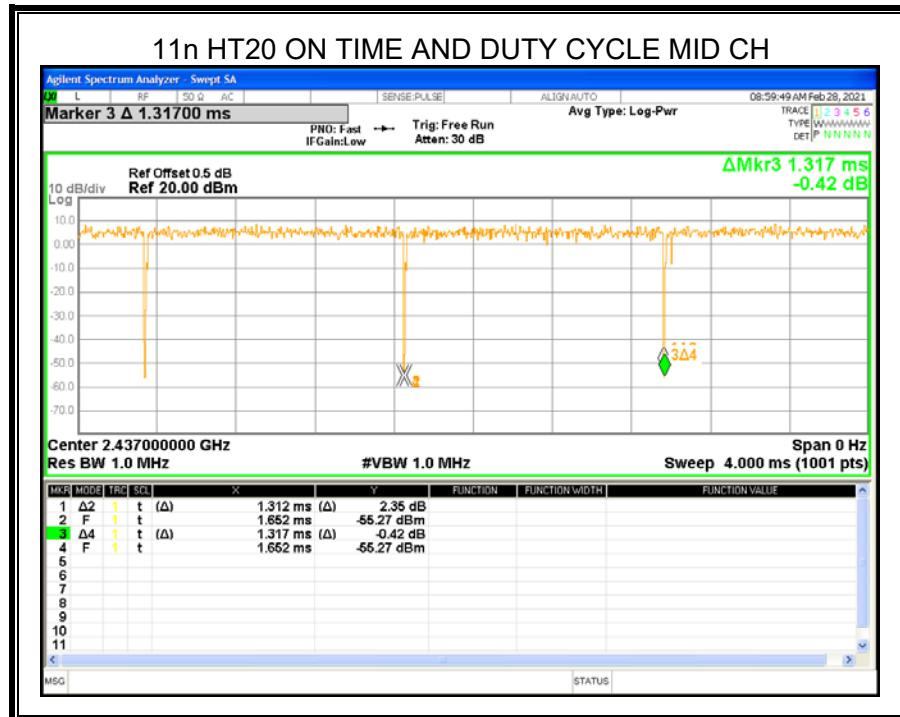

8.2. 6 dB DTS BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)	6 dB Bandwidth	>= 500KHz	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth :100K
VBW	For 6dB Bandwidth : $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

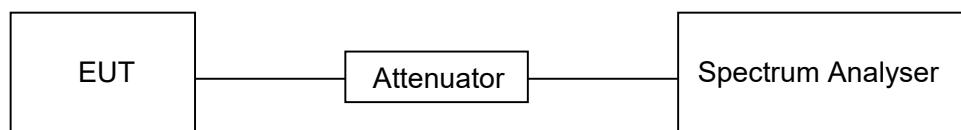


TEST ENVIRONMENT



Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

8.2.1. 802.11b MODE


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
CH01	2412	9.540	≥500KHz	Pass
CH06	2437	9.069	≥500KHz	Pass
CH11	2462	9.547	≥500KHz	Pass


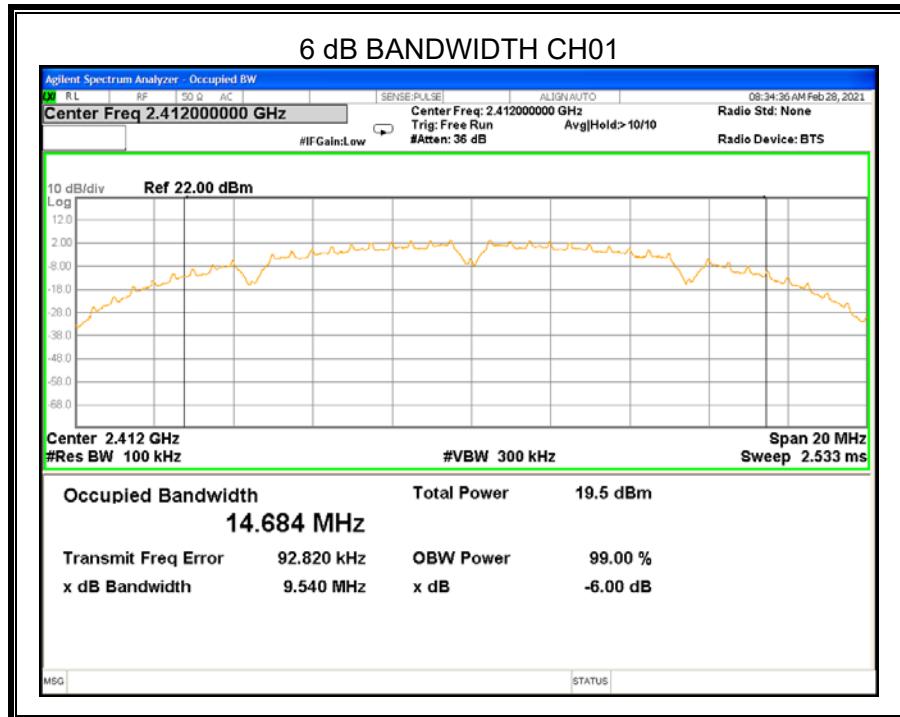


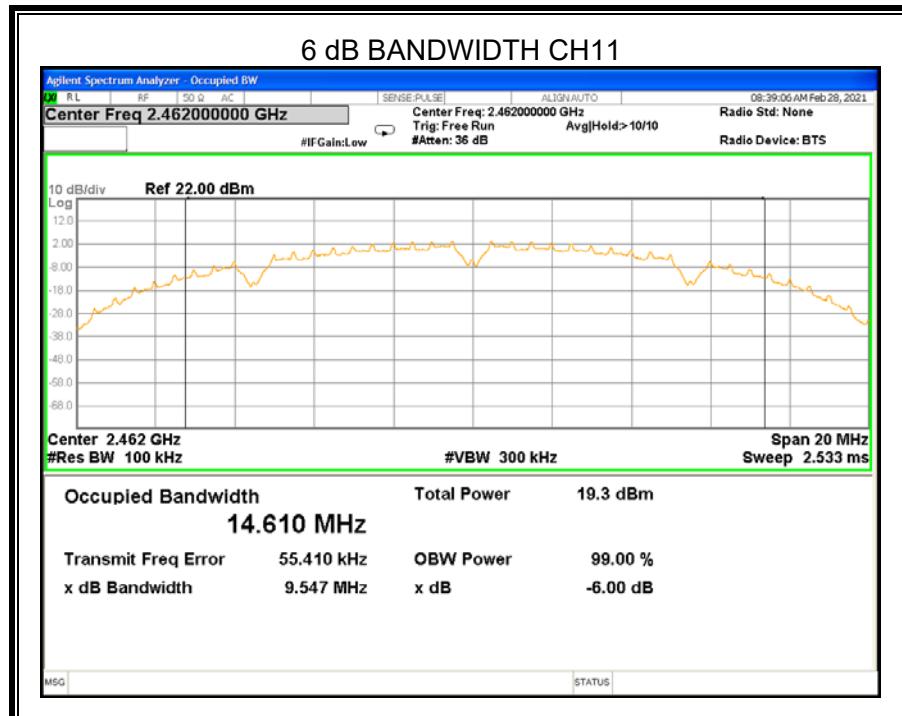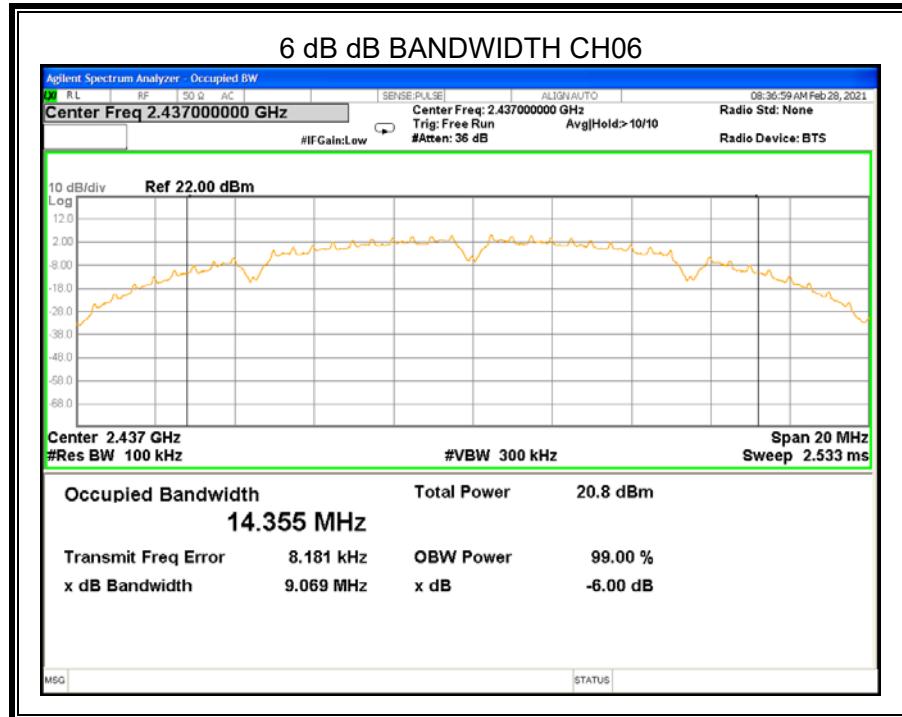

8.2.2. 802.11g MODE


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
CH01	2412	12.56	≥500KHz	Pass
CH06	2437	12.57	≥500KHz	Pass
CH11	2462	12.55	≥500KHz	Pass


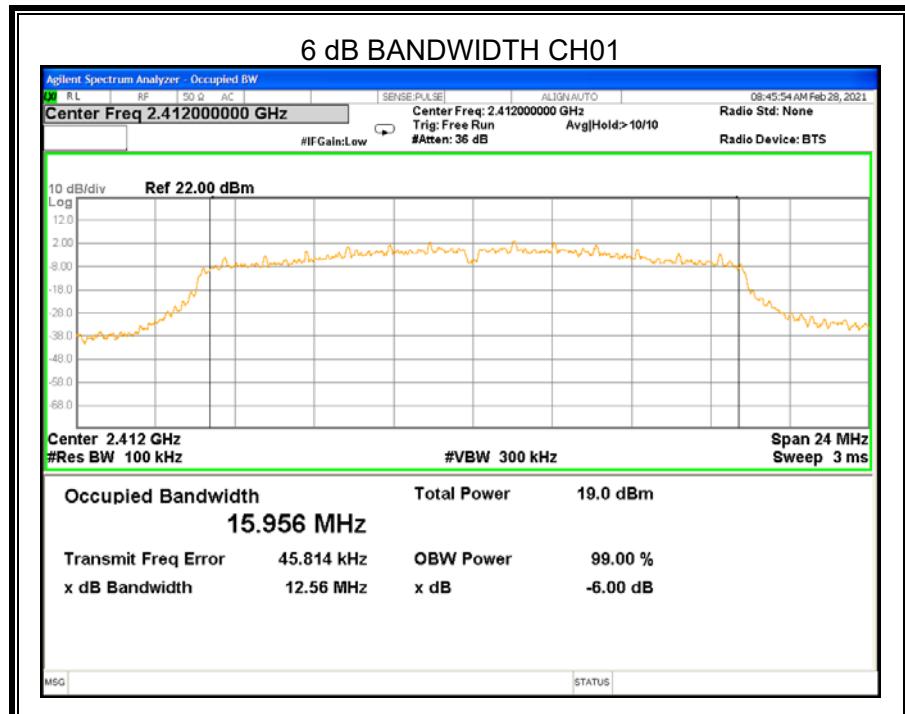


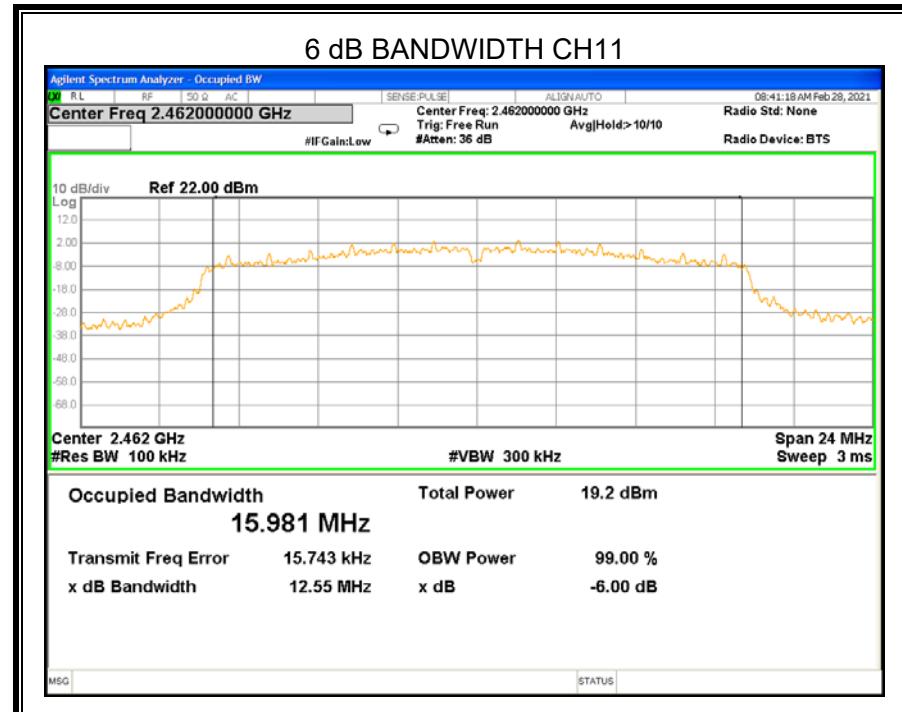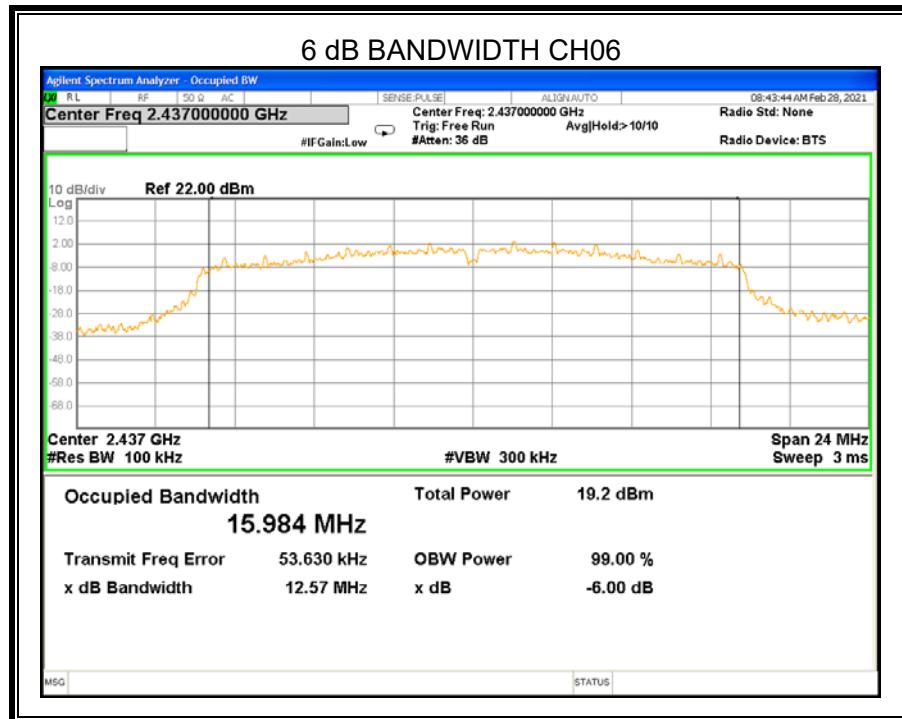

8.2.3. 802.11n HT20 MODE

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
CH01	2412	12.56	≥500KHz	Pass
CH06	2437	12.56	≥500KHz	Pass
CH11	2462	12.54	≥500KHz	Pass

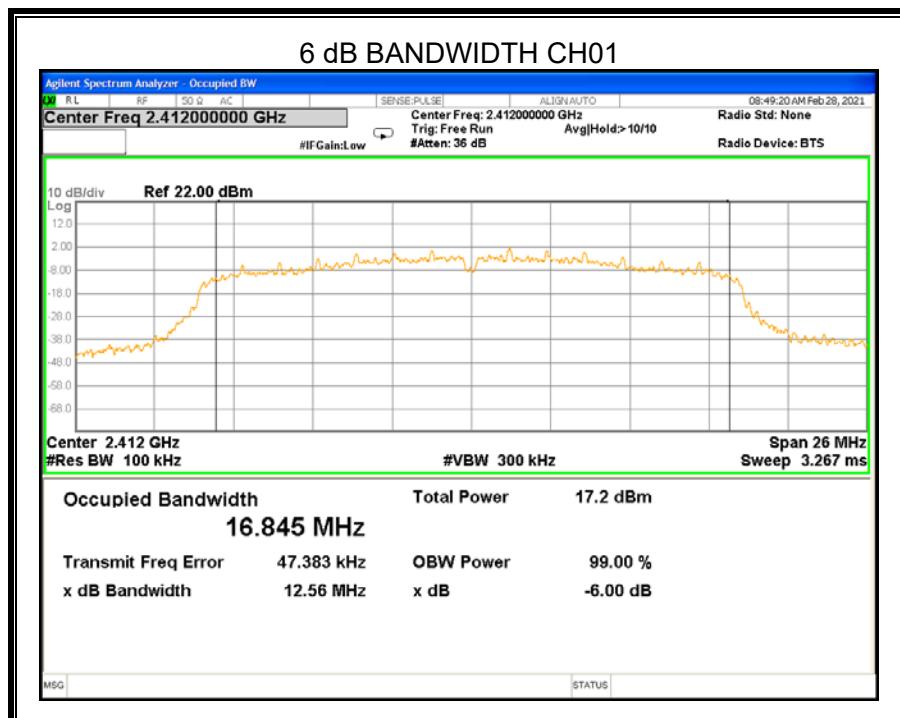

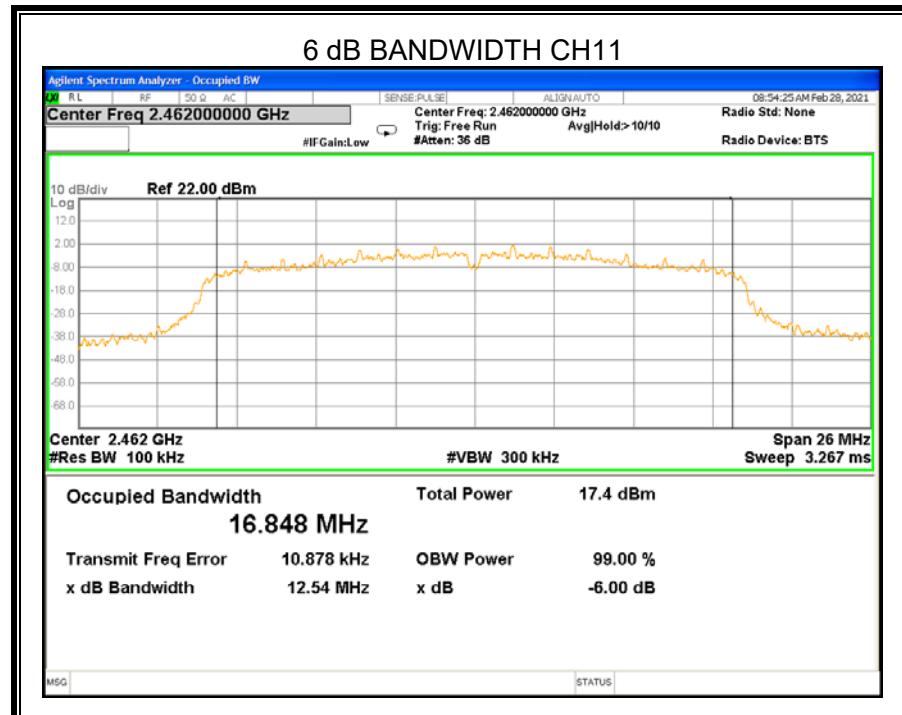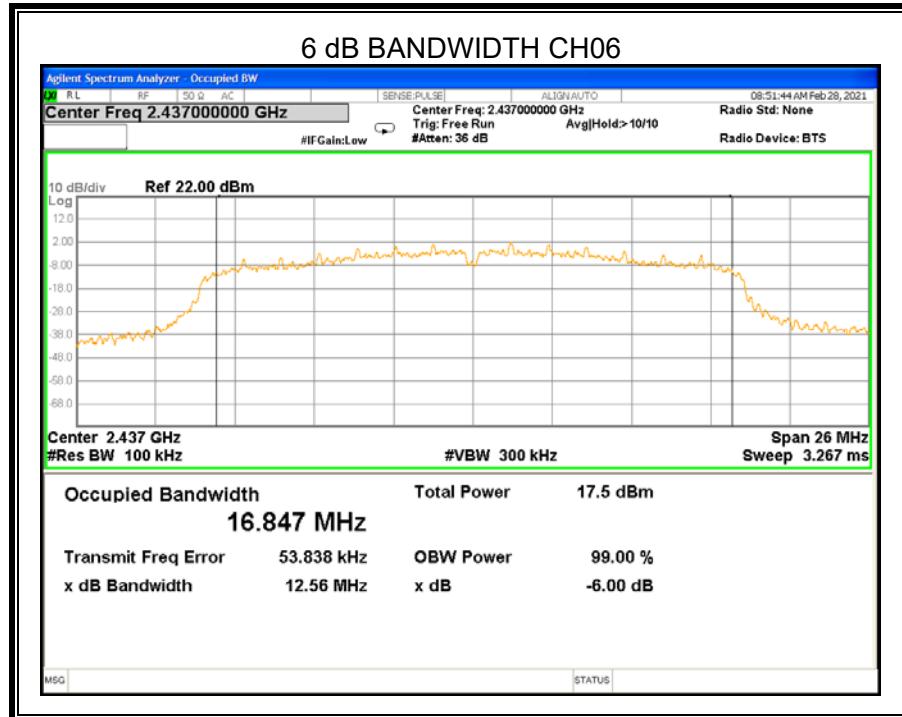

8.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure peak power each channel.

TEST SETUP

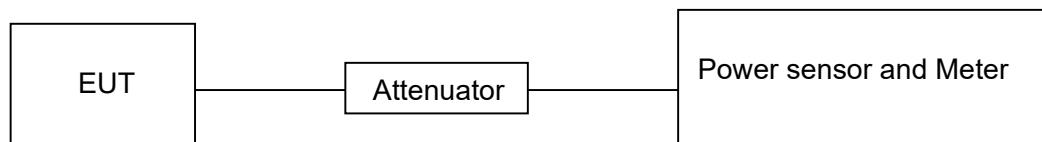

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz



RESULTS

8.3.1. 802.11b MODE

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	16.31	30
CH06	2437	16.39	30
CH11	2462	16.03	30

8.3.2. 802.11g MODE

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	22.64	30
CH06	2437	22.59	30
CH11	2462	21.76	30

8.3.3. 802.11n HT20 MODE

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	21.27	30
CH06	2437	21.46	30
CH11	2462	20.65	30

8.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	3 kHz ≤ RBW 100 ≤ kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

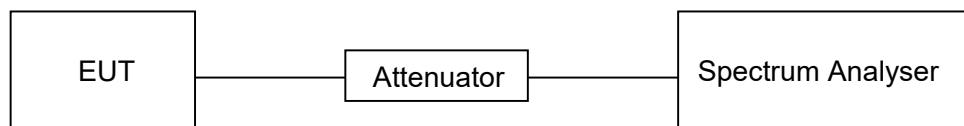


TEST ENVIRONMENT



Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

8.4.1. 802.11b MODE


Test Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
CH01	2412	-9.911	≤8	PASS
CH06	2437	-9.324	≤8	PASS
CH11	2462	-9.813	≤8	PASS


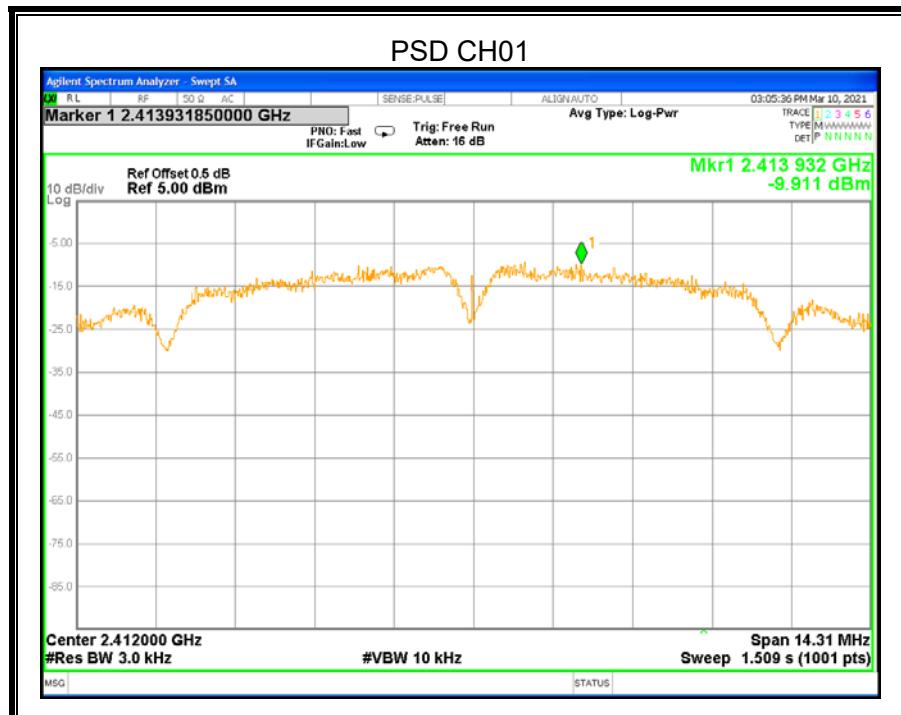


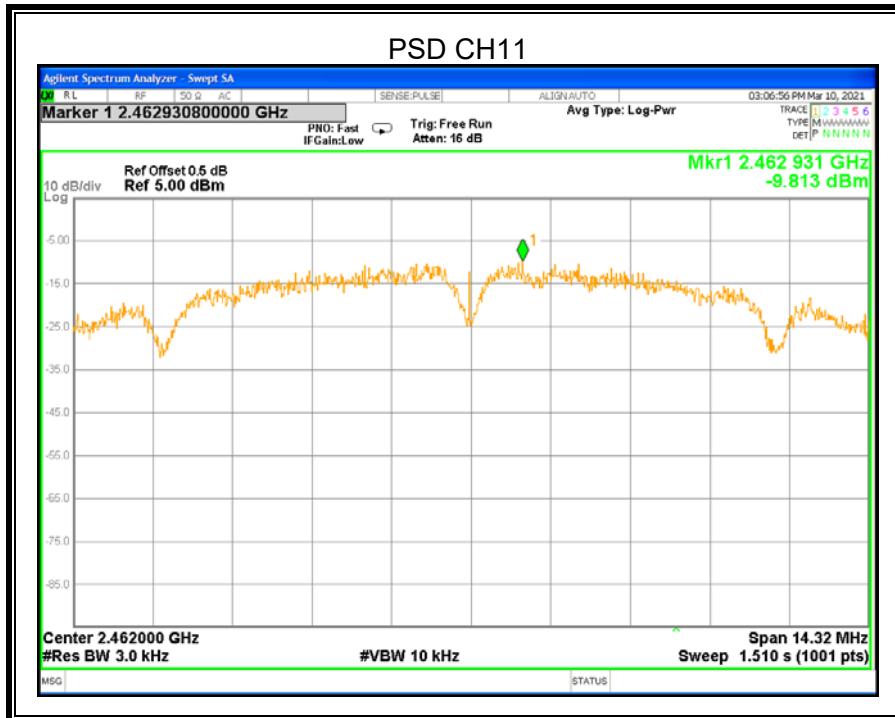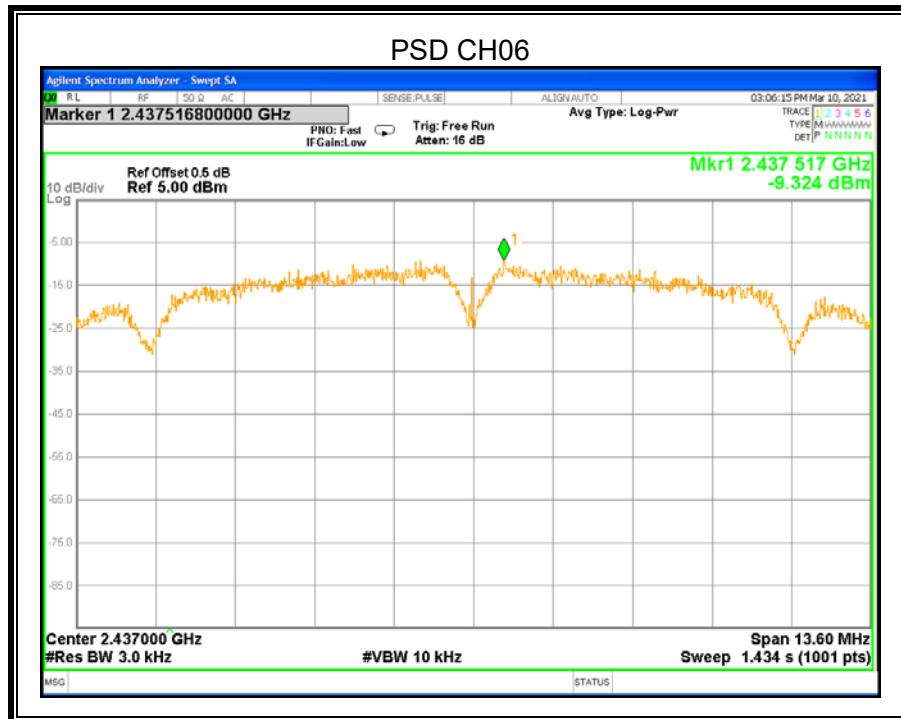

8.4.2. 802.11g MODE


Test Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
CH01	2412	-11.651	≤8	PASS
CH06	2437	-11.938	≤8	PASS
CH11	2462	-11.544	≤8	PASS


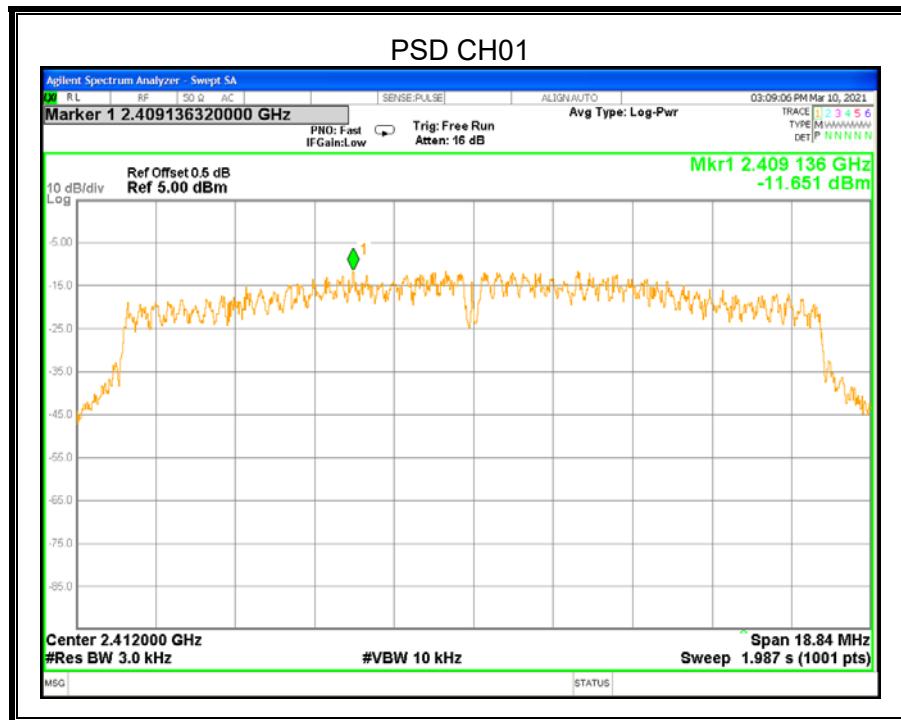


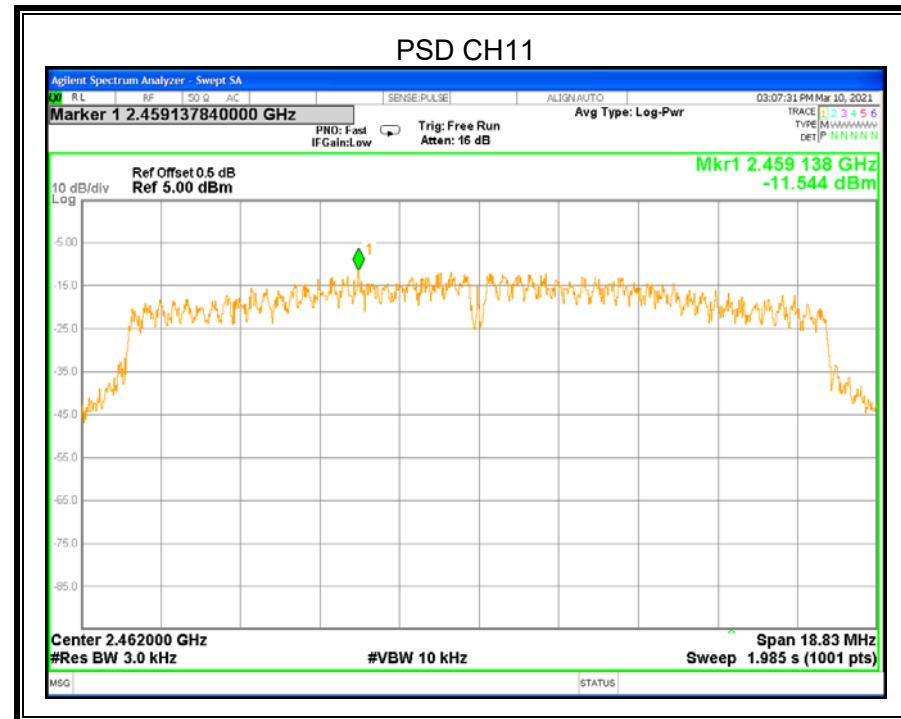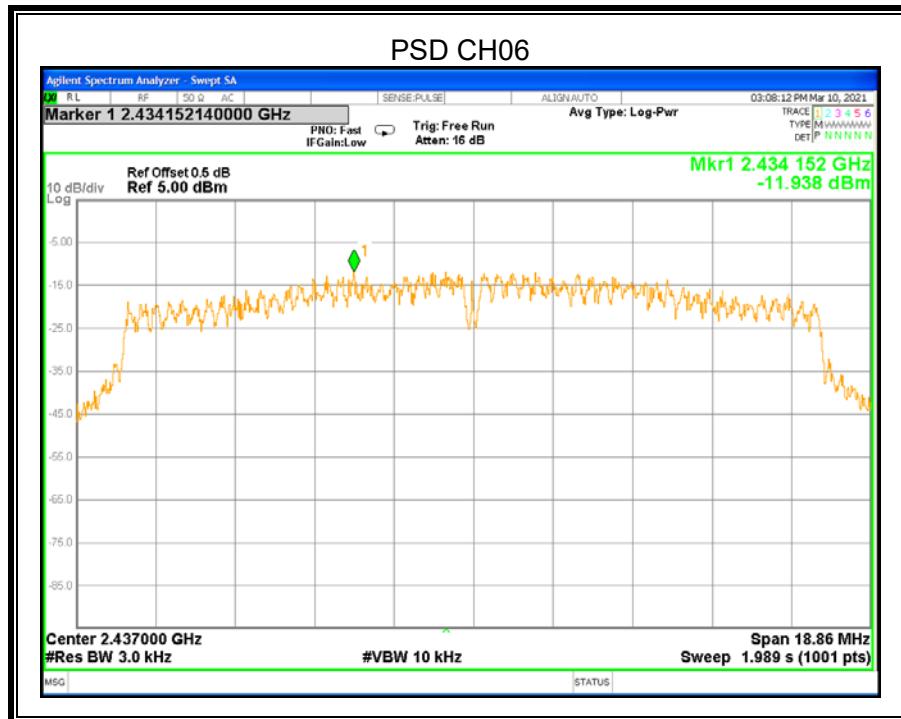

8.4.3. 802.11n HT20 MODE

Test Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
CH01	2412	-12.815	≤8	PASS
CH06	2437	-12.290	≤8	PASS
CH11	2462	-12.500	≤8	PASS

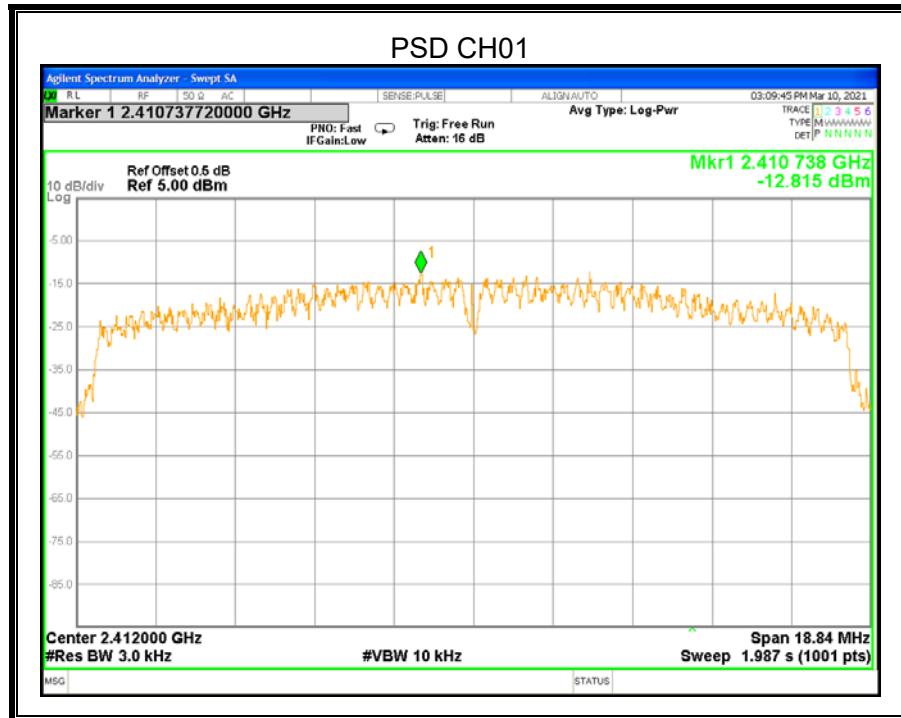

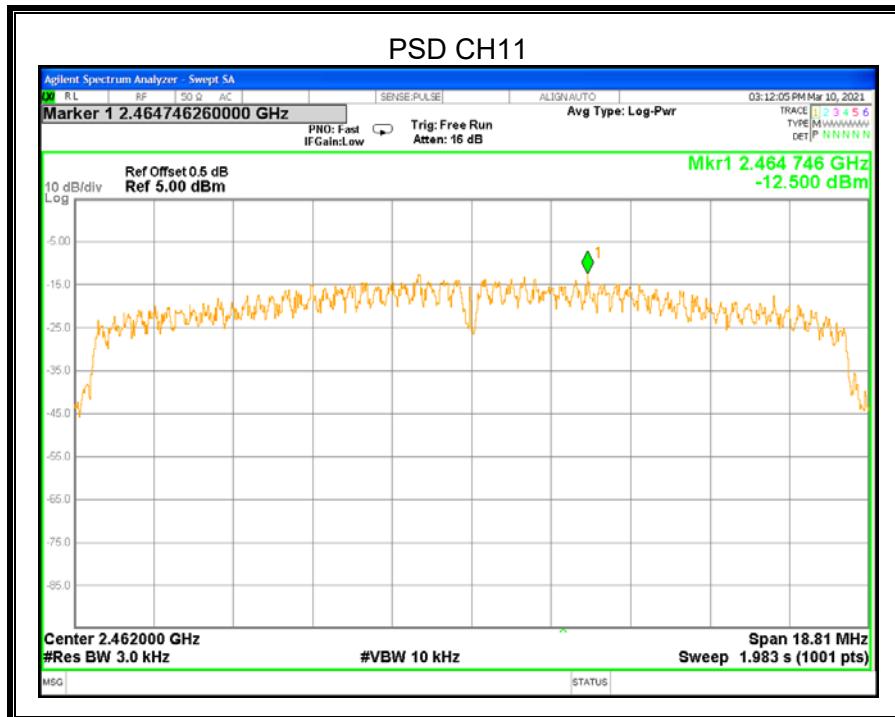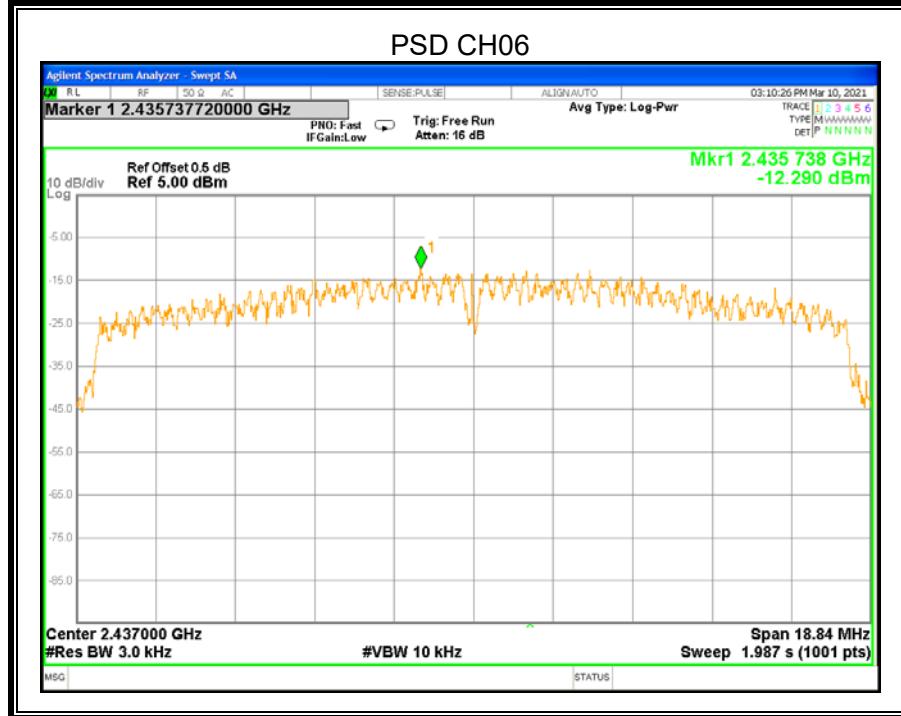

8.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

TEST SETUP

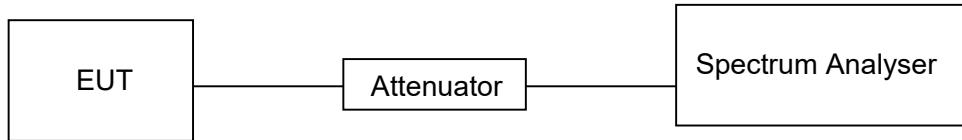




TEST ENVIRONMENT



Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz


RESULTS

8.5.1. 802.11b MODE

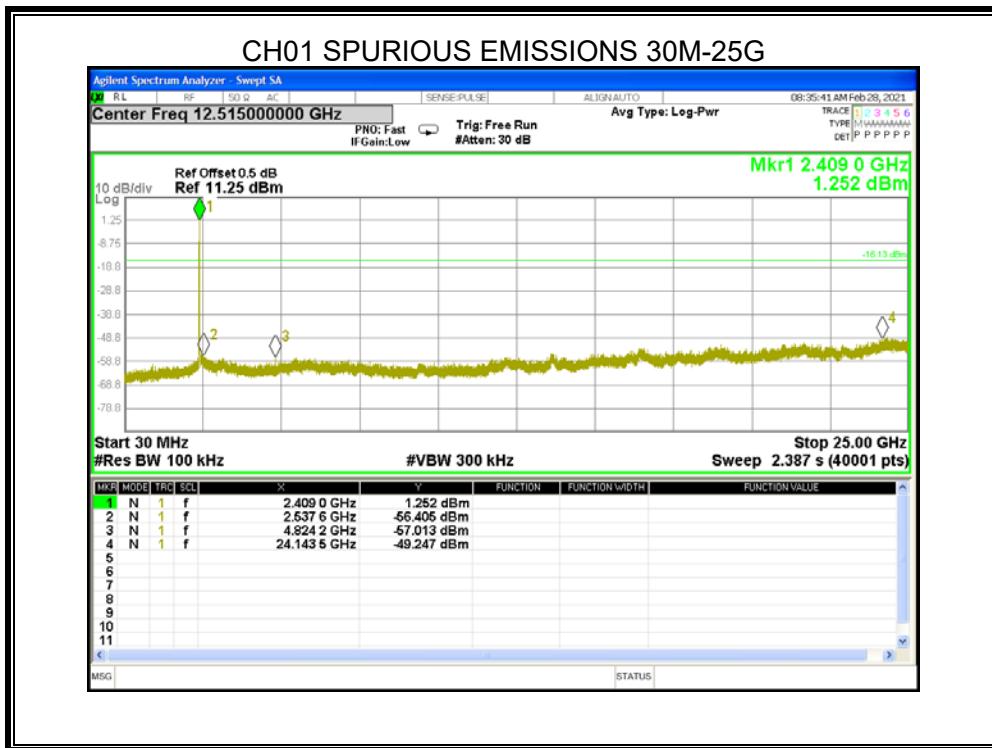


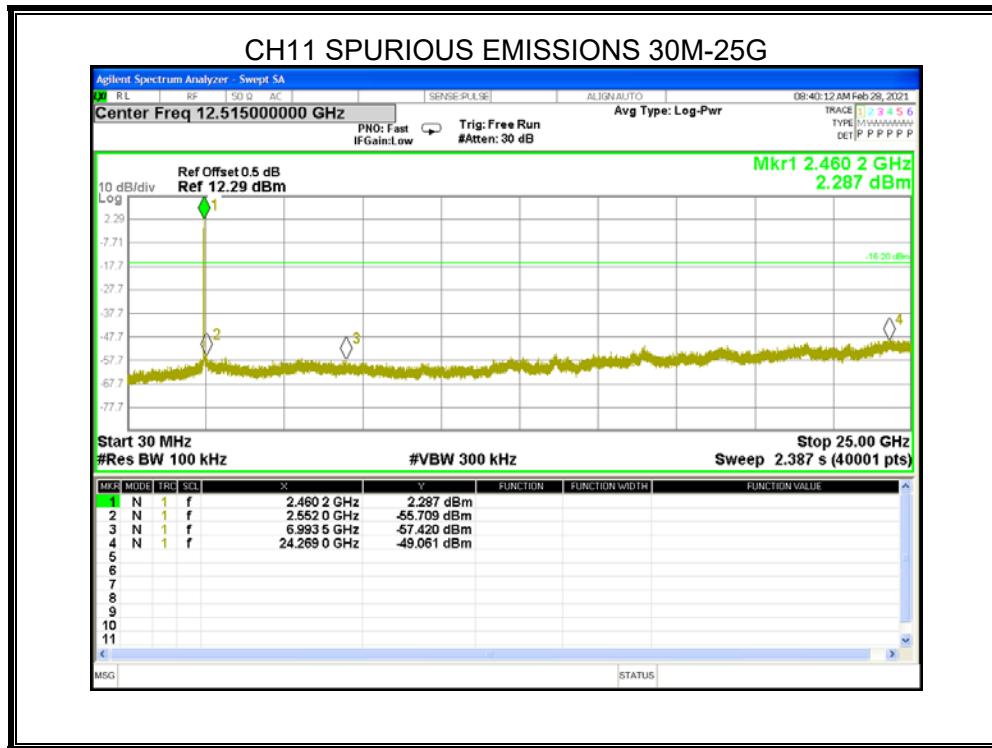
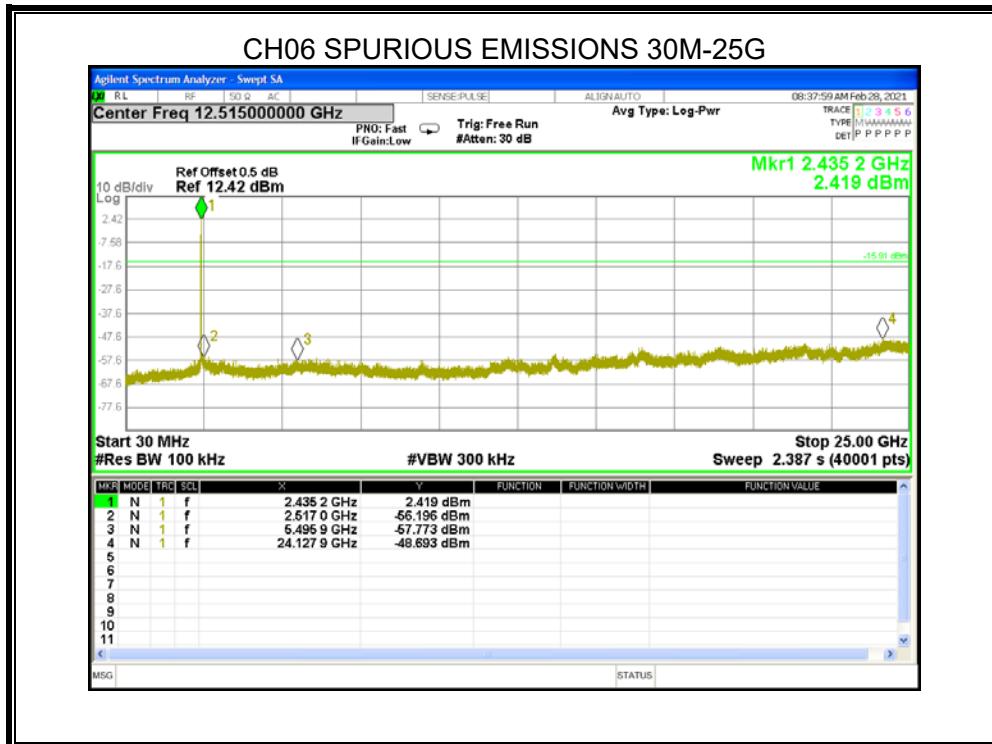


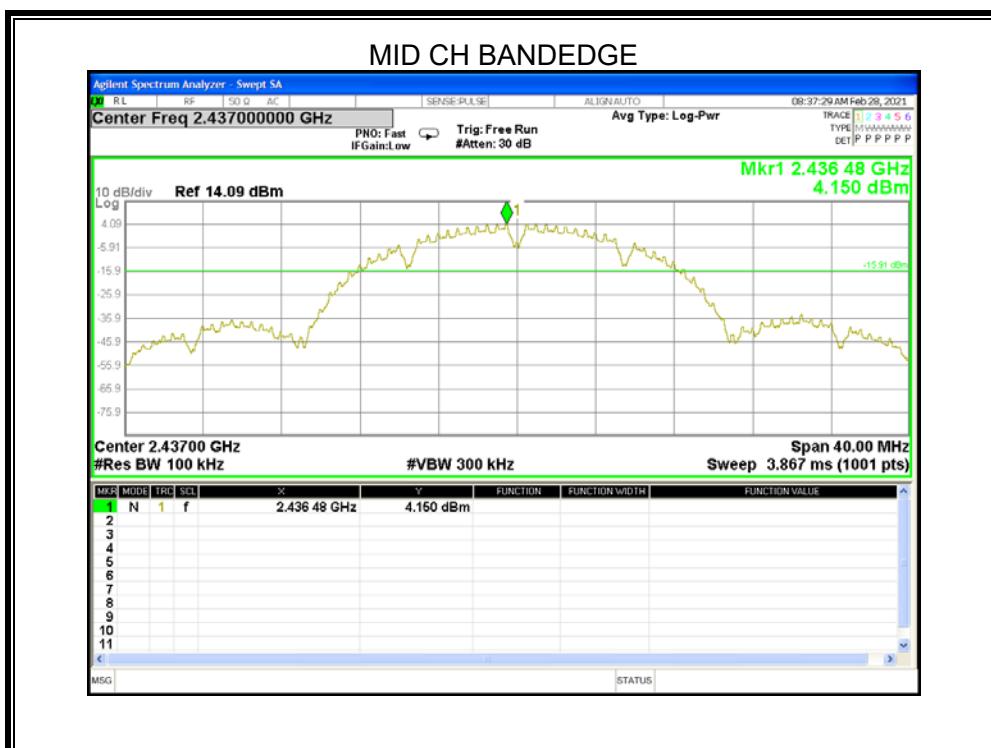
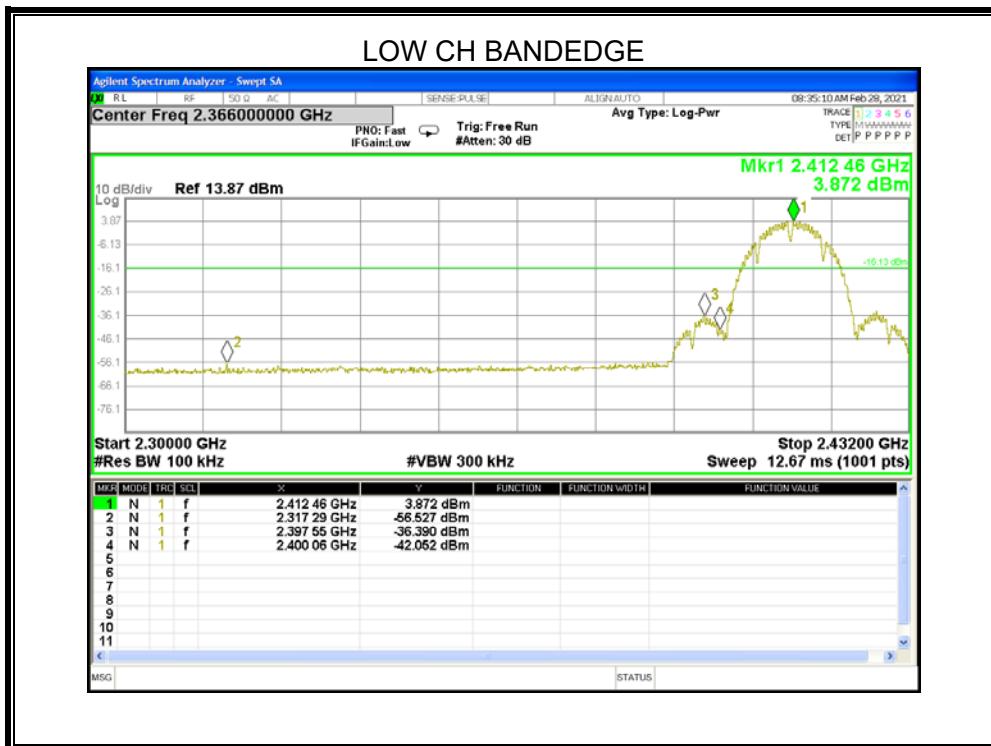


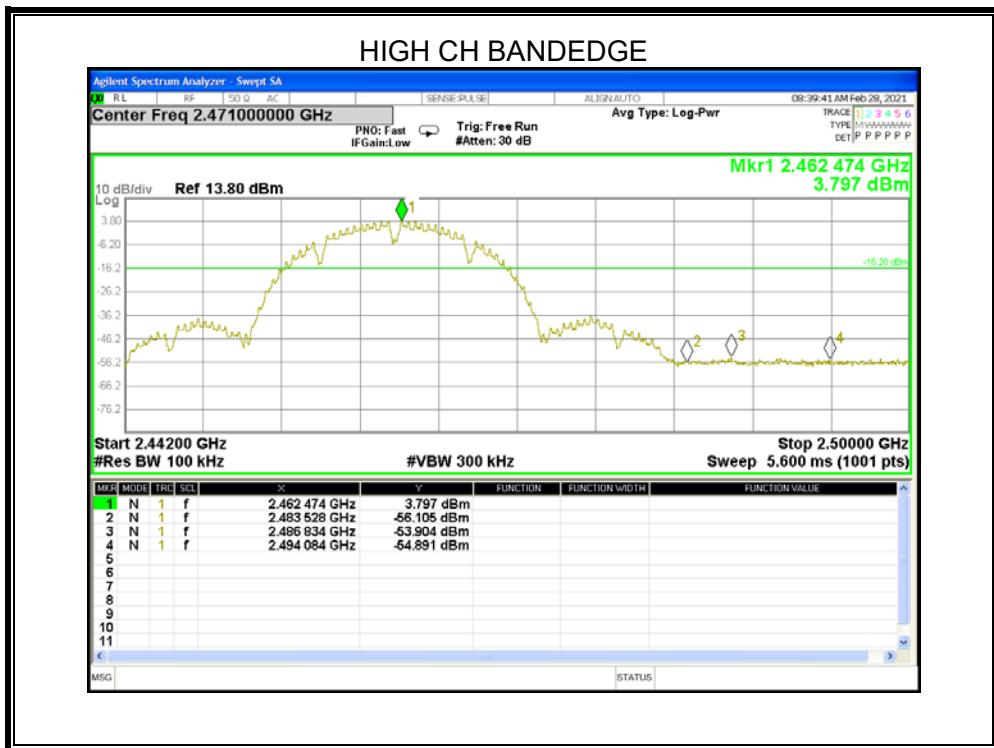


8.5.2. 802.11g MODE


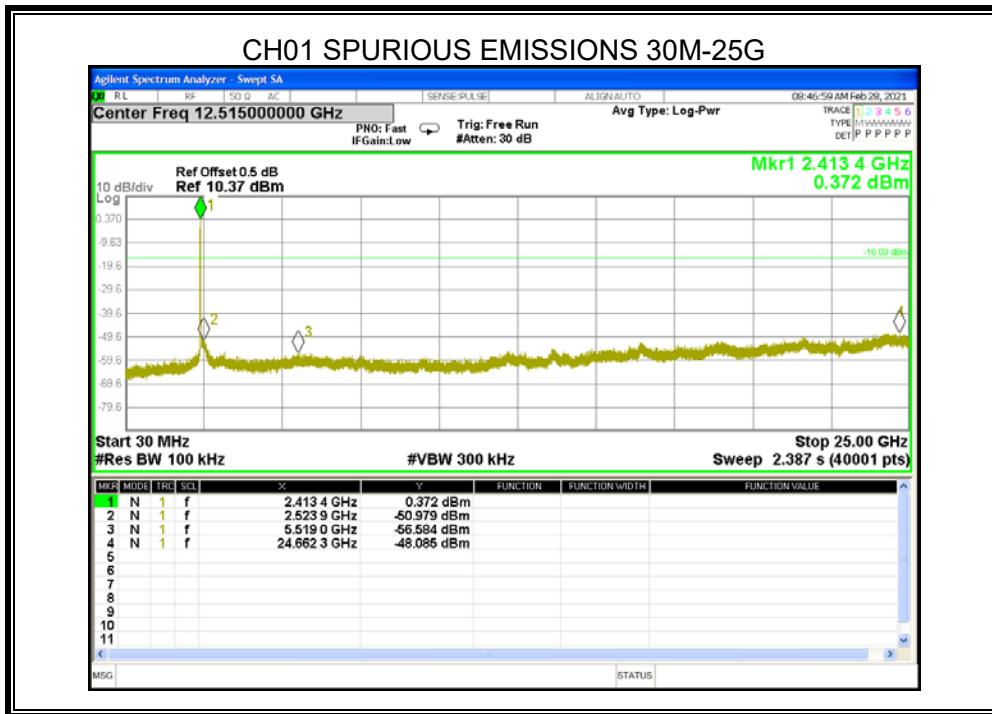


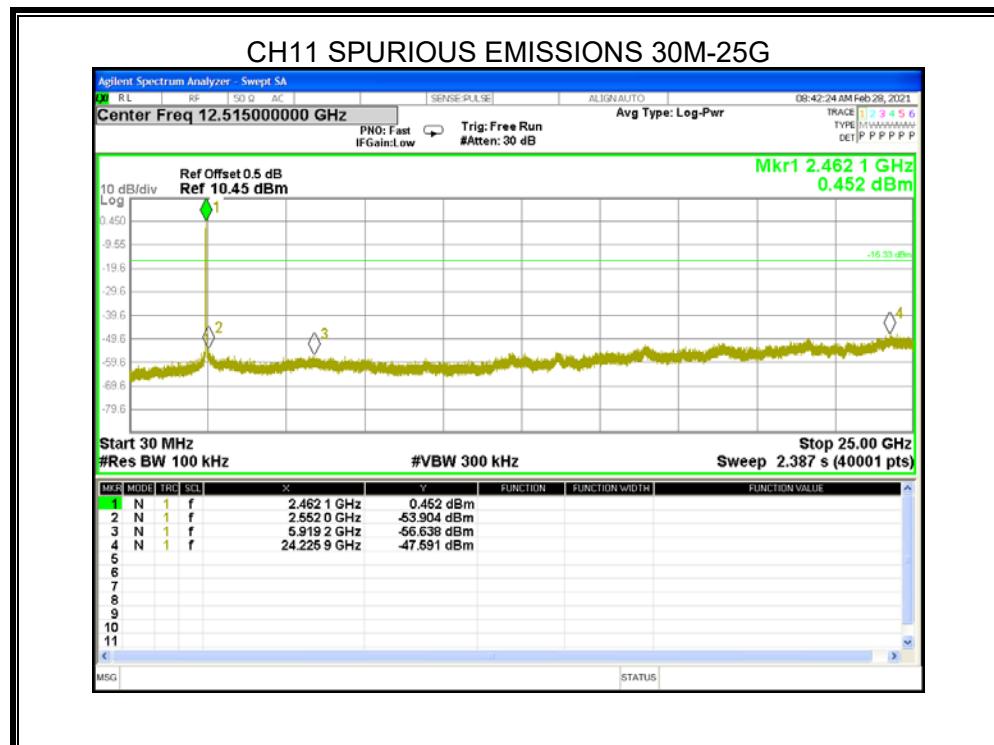
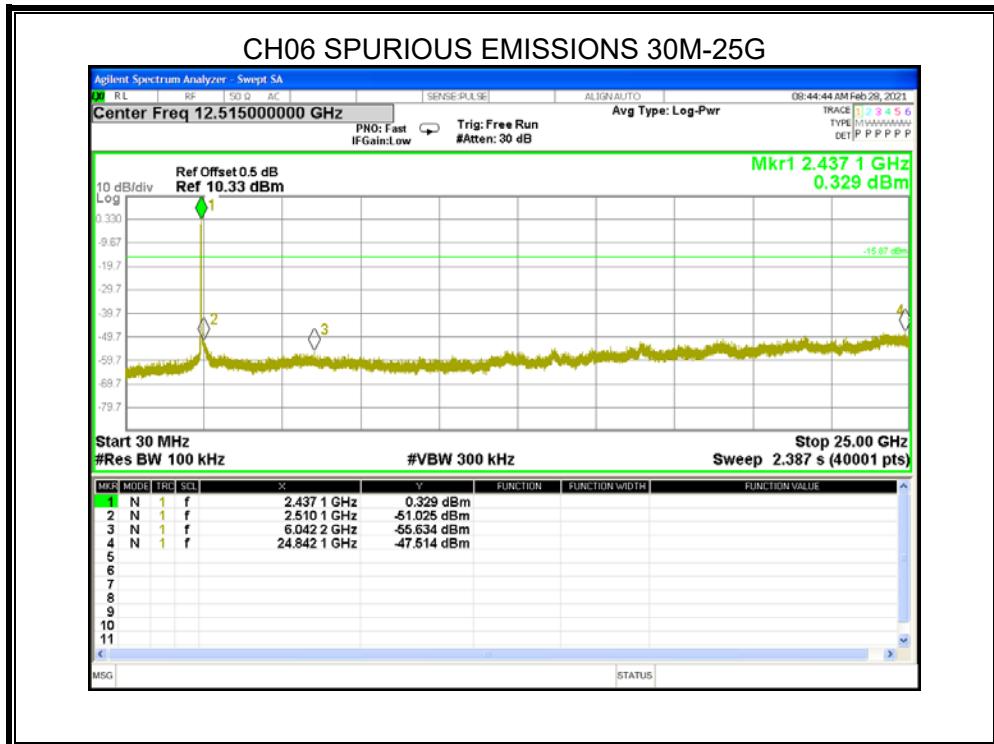


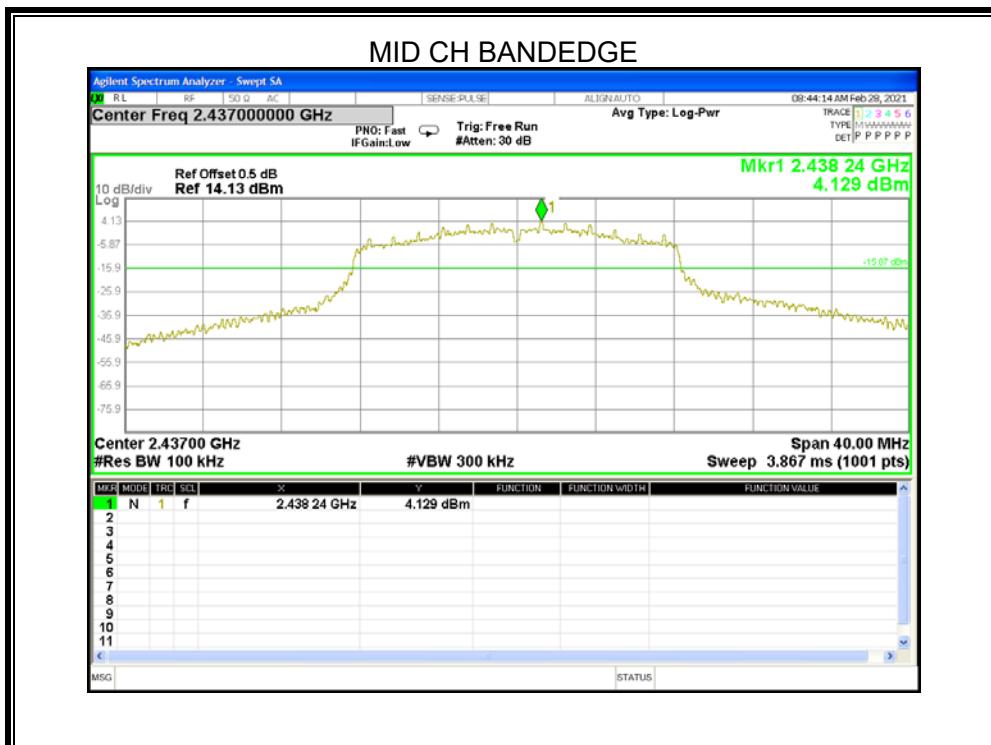
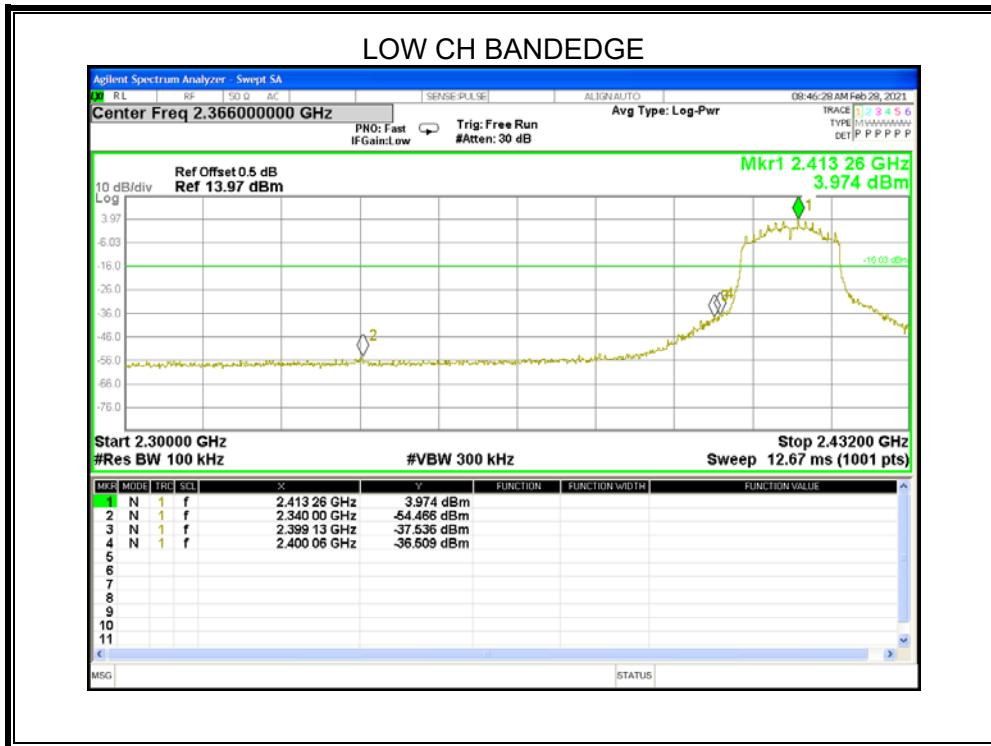


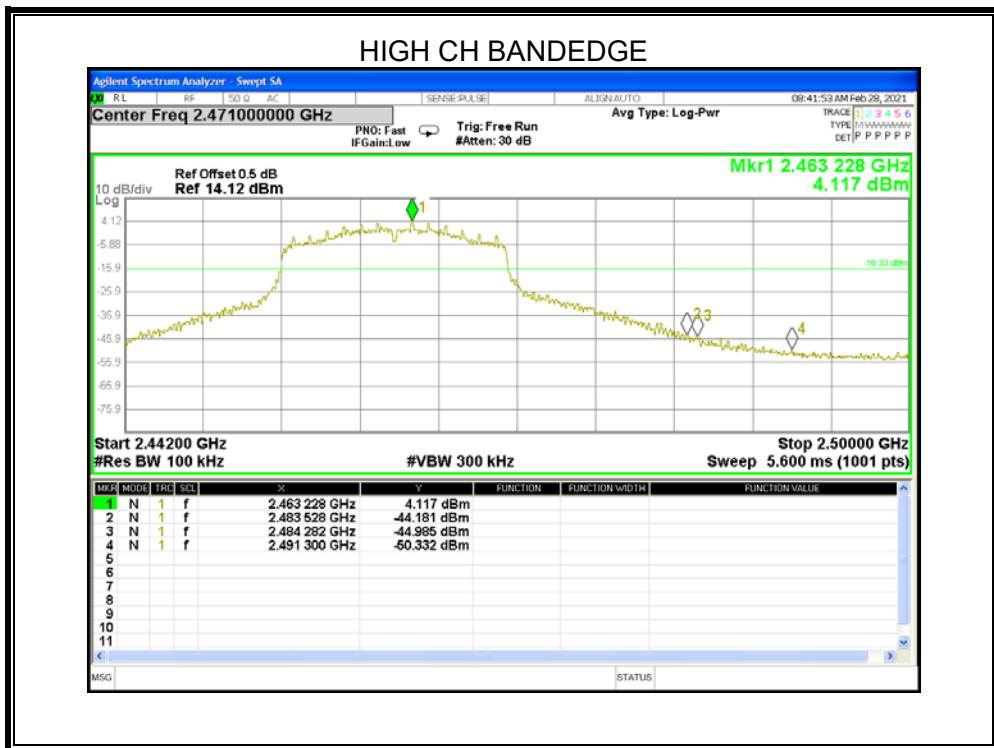

8.5.3. 802.11n HT20 MODE

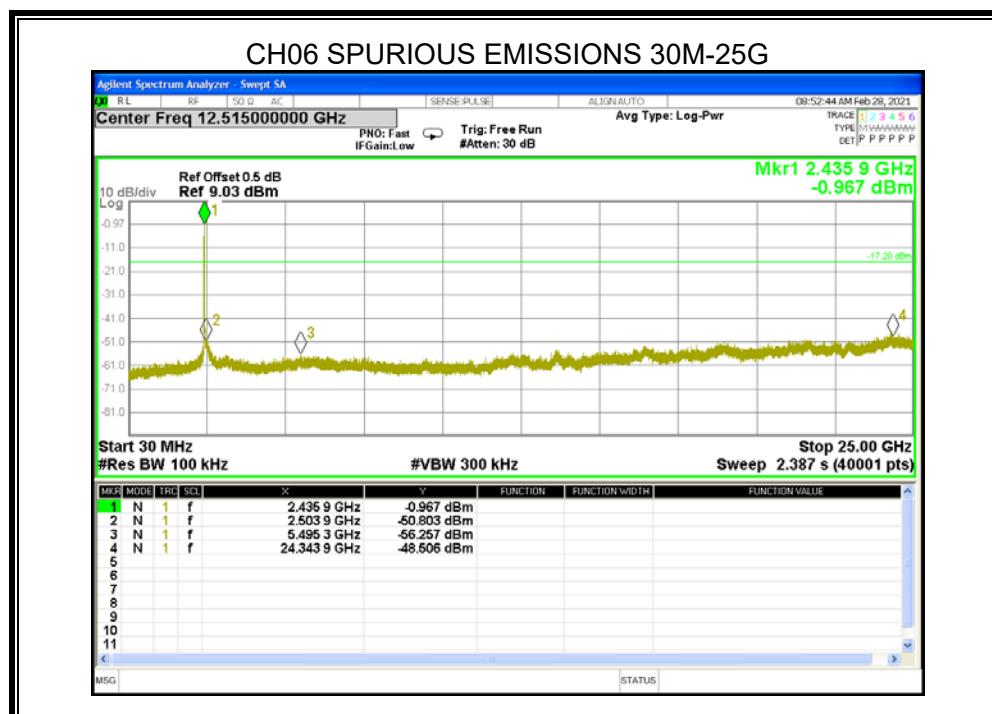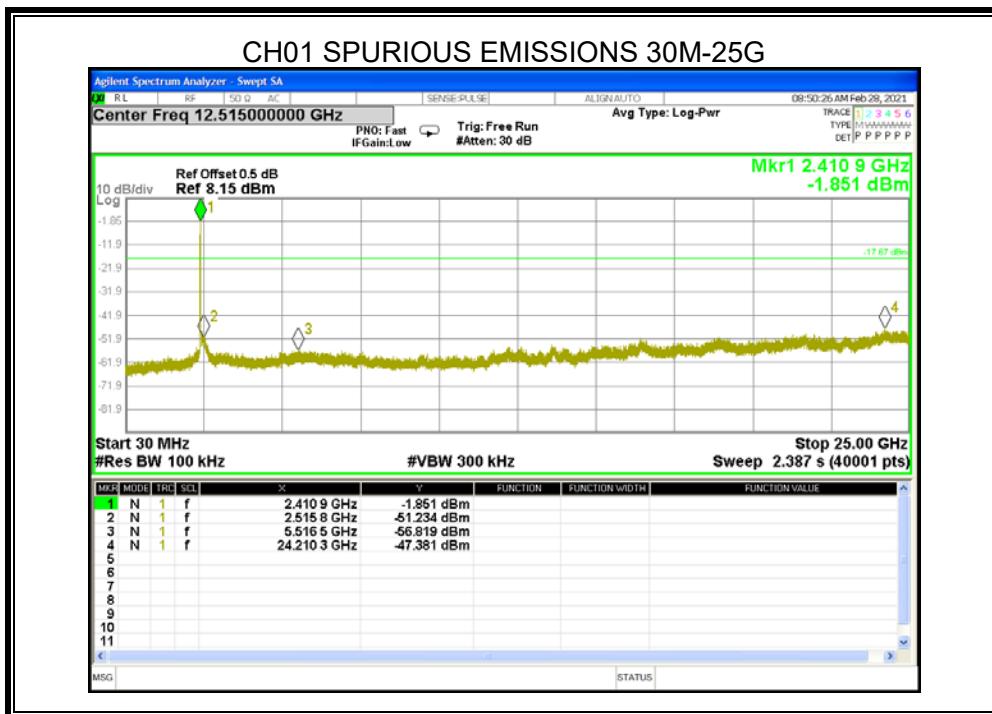

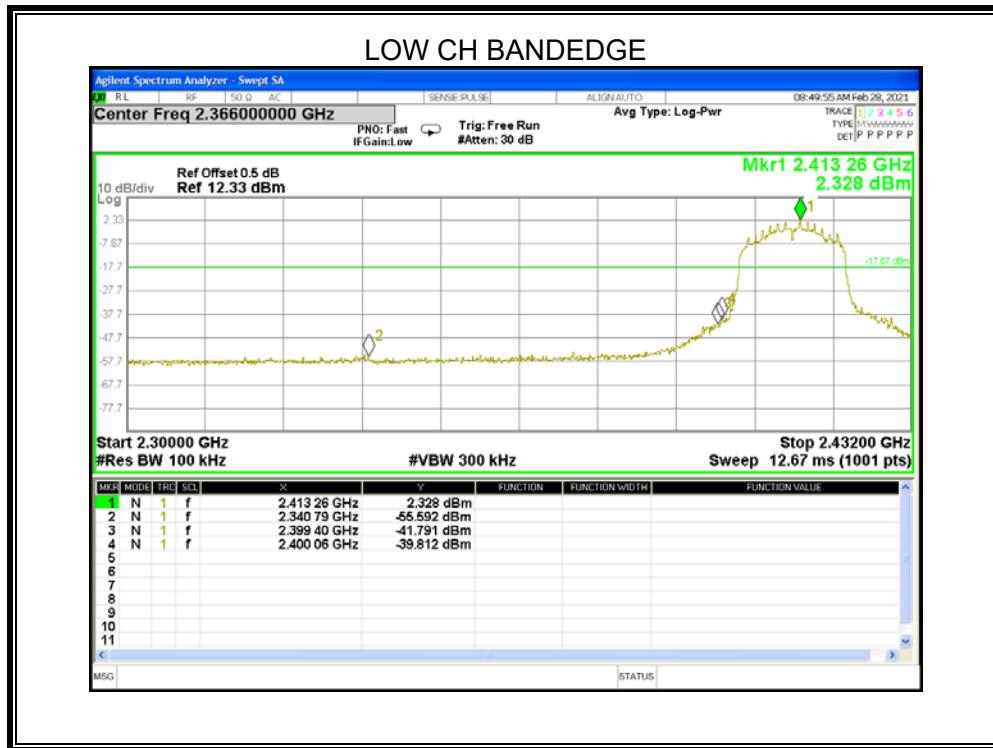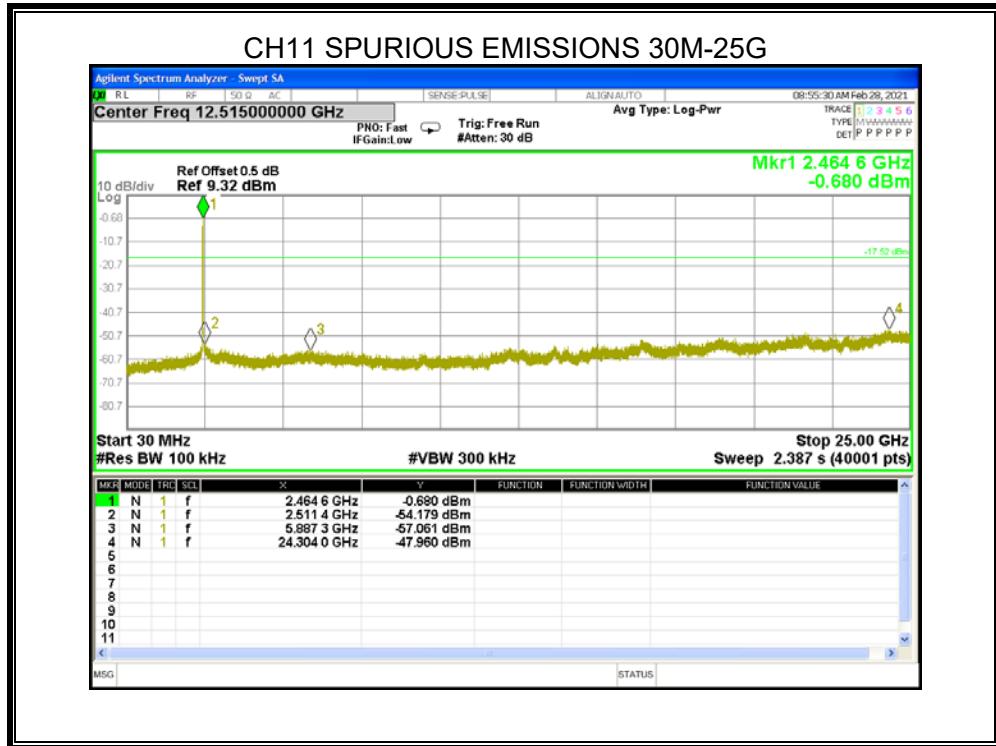

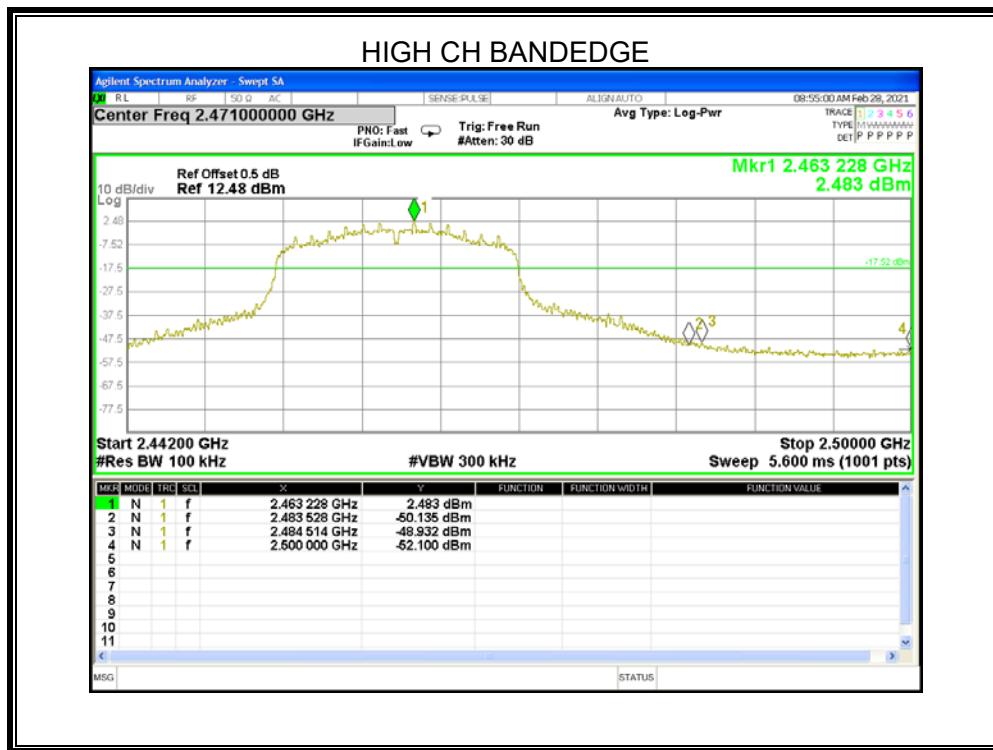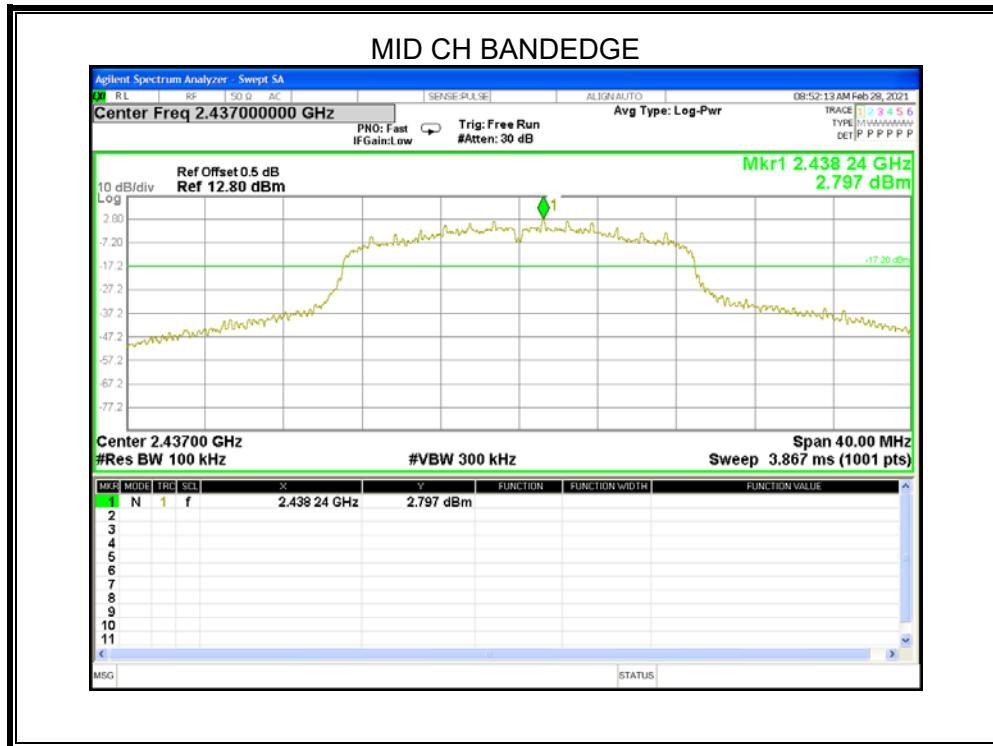

9. RADIATED TEST RESULTS

LIMITS

Please refer to FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

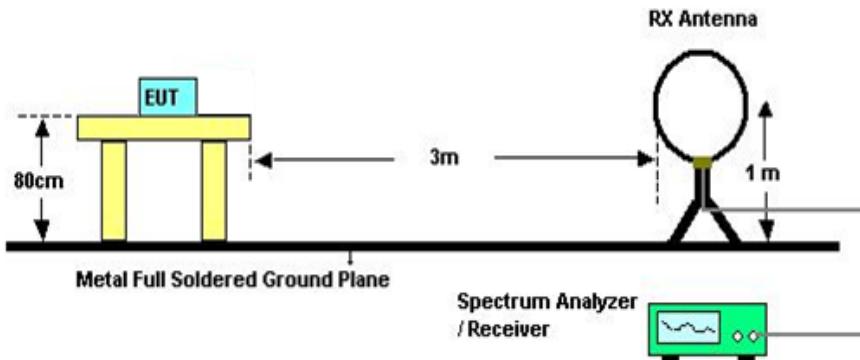


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Note: Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G

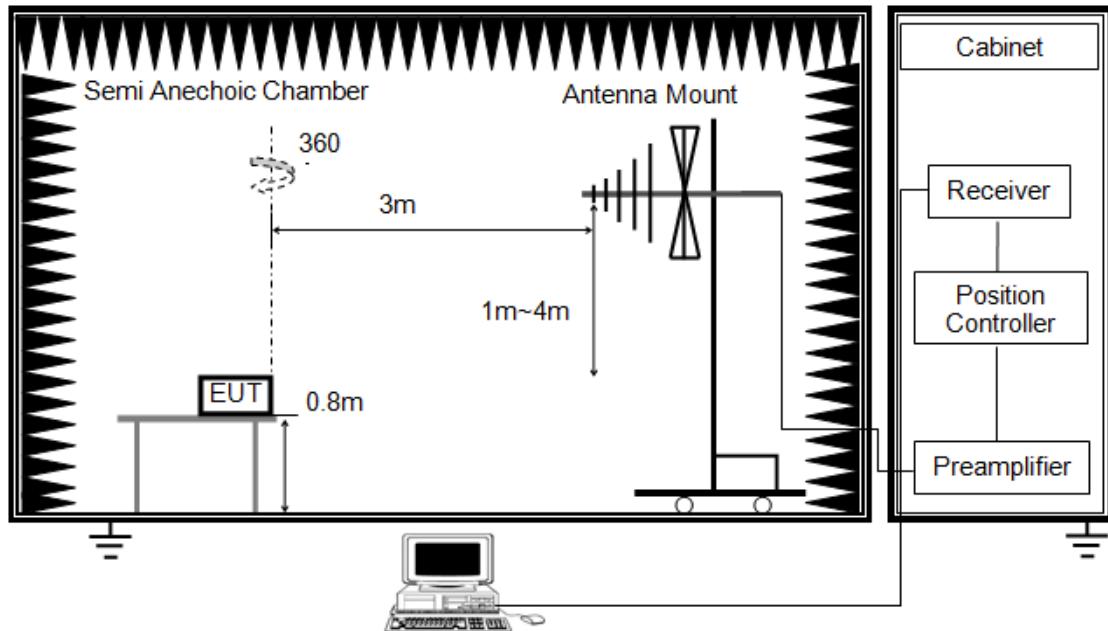


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

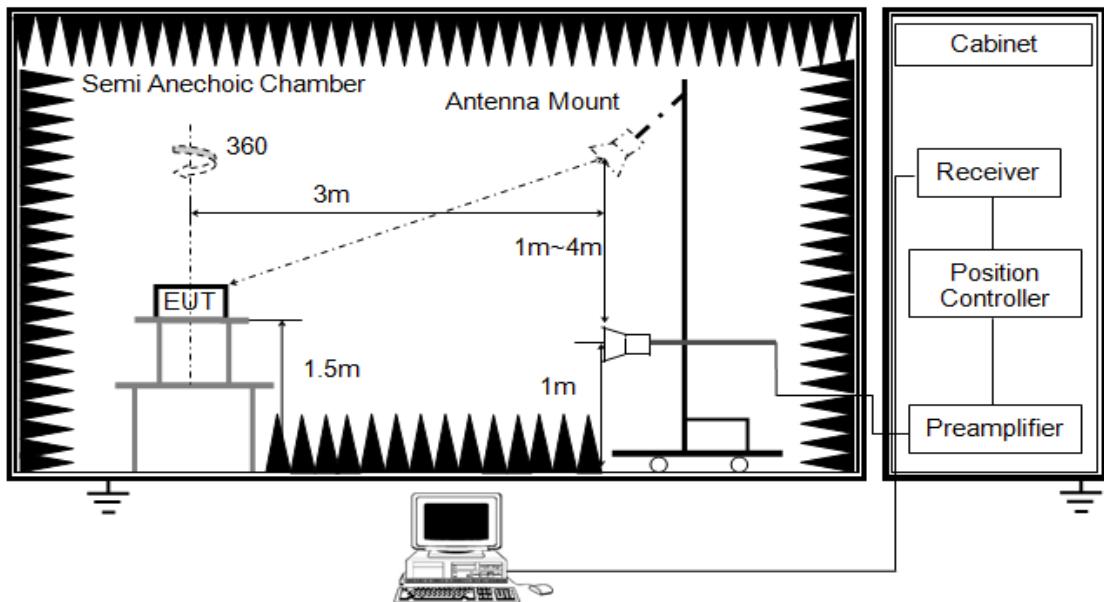


The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 10KHz video bandwidth with peak detector for average measurements.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

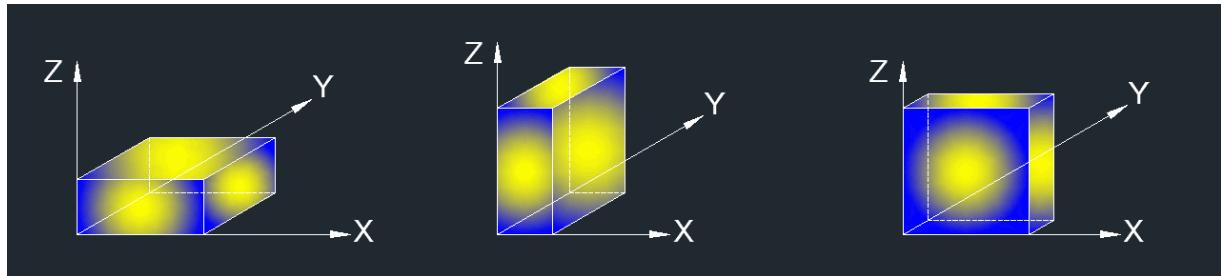

8. The EUT as shown in Figure 1 is the worst mode, the report only show the worst mode data.


TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

9.1. RESTRICTED BANDEDGE


802.11 b mode

RESTRICTED BANDEDGE (01 CHANNEL, HORIZONTAL)

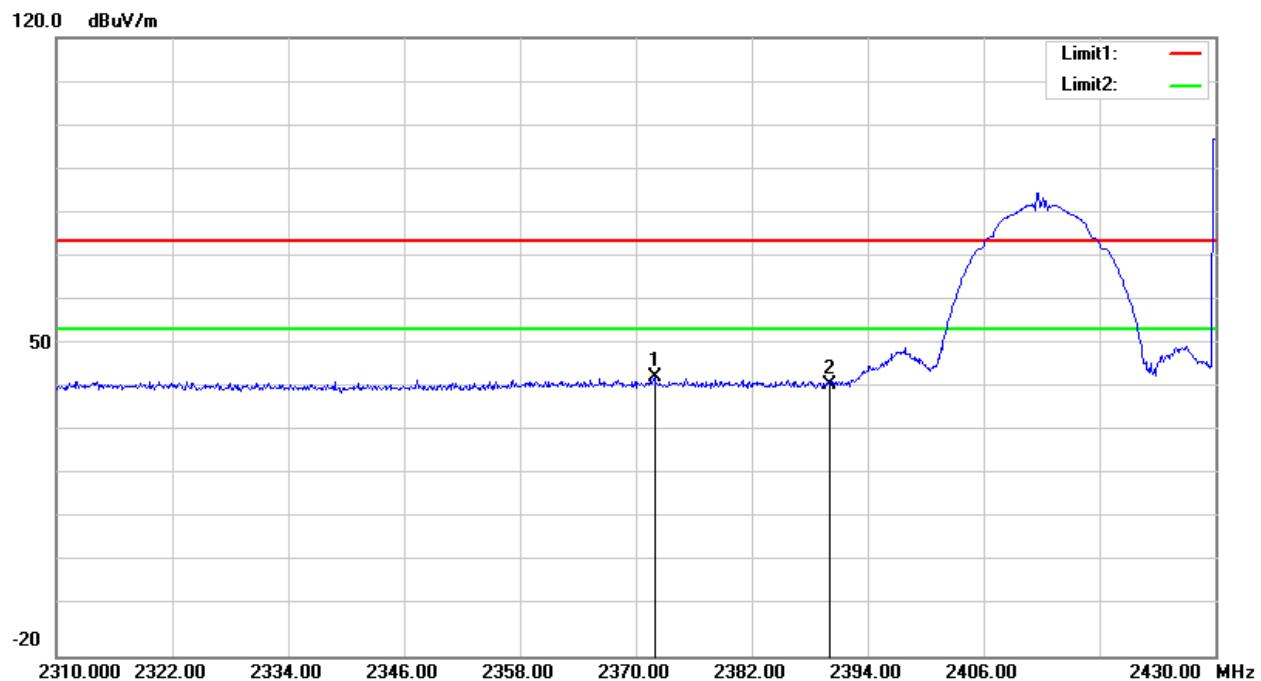


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.920	39.01	4.06	43.07	74.00	-30.93	peak
2	2390.000	37.22	4.34	41.56	74.00	-32.44	peak

Note: Measurement = Reading Level + Correct Factor.

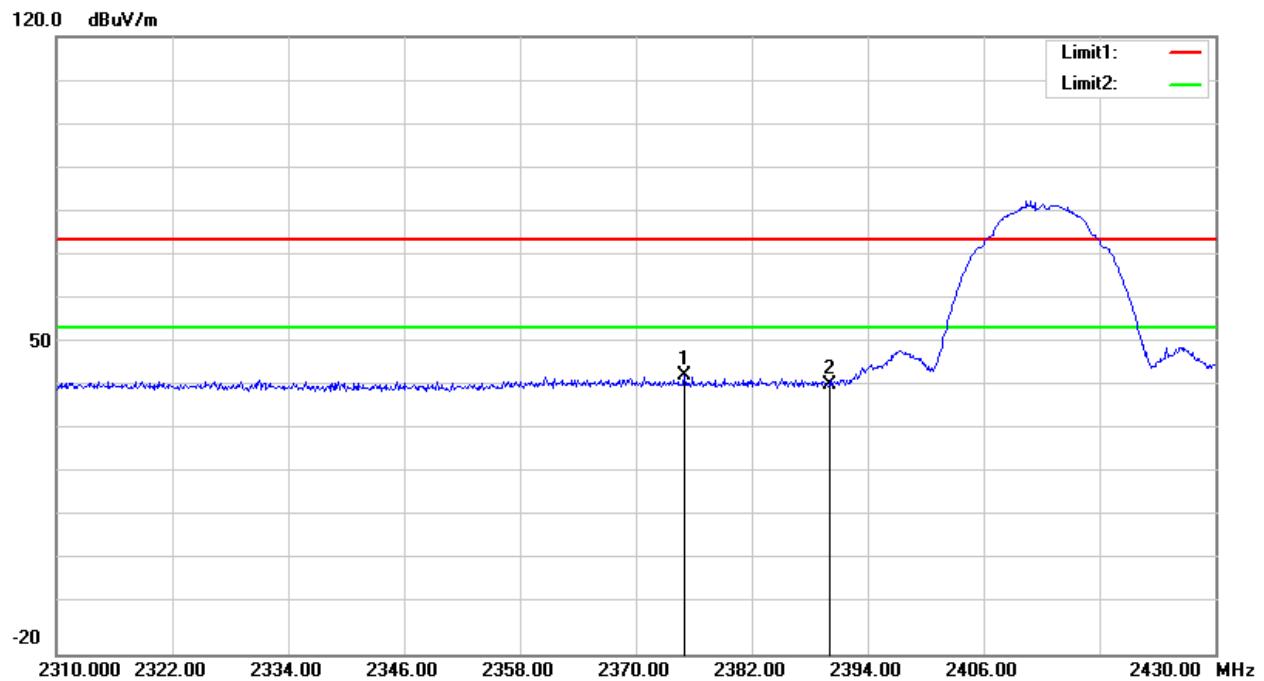RESTRICTED BANDEDGE (01 CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2375.040	38.96	4.12	43.08	74.00	-30.92	peak
2	2390.000	36.70	4.34	41.04	74.00	-32.96	peak

Note: Measurement = Reading Level + Correct Factor.

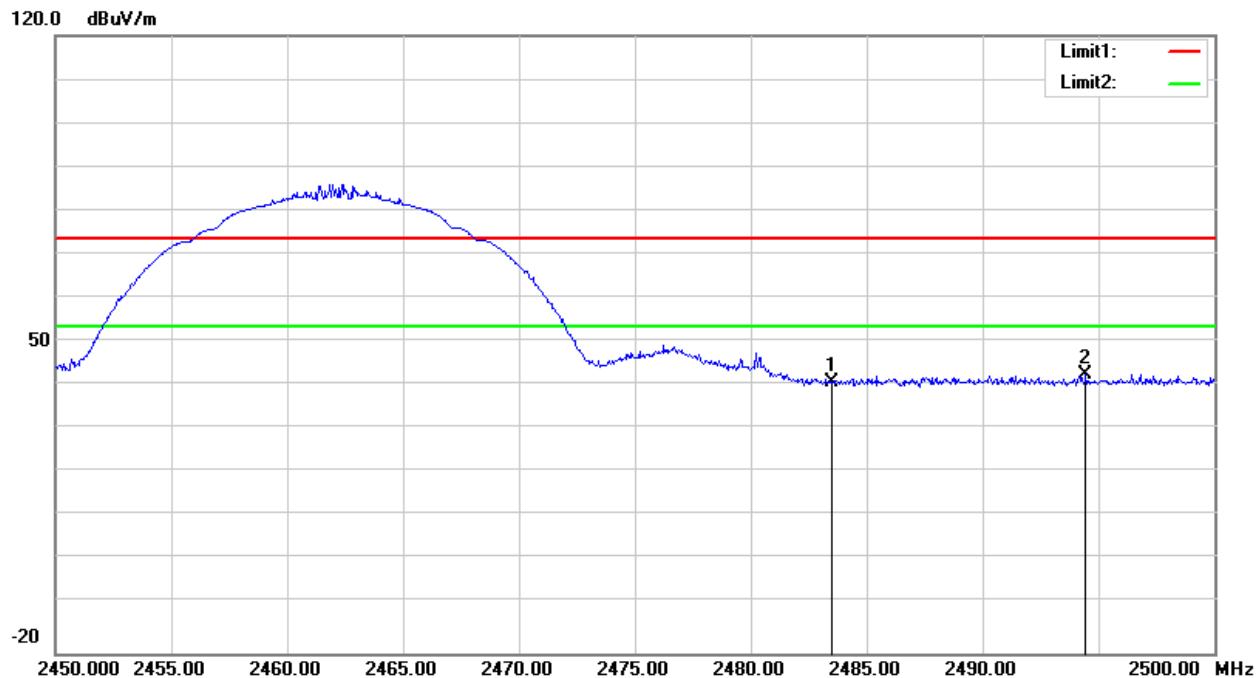RESTRICTED BANDEDGE (11 CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.99	4.60	41.59	74.00	-32.41	peak
2	2494.450	38.63	4.63	43.26	74.00	-30.74	peak


Note: Measurement = Reading Level + Correct Factor.

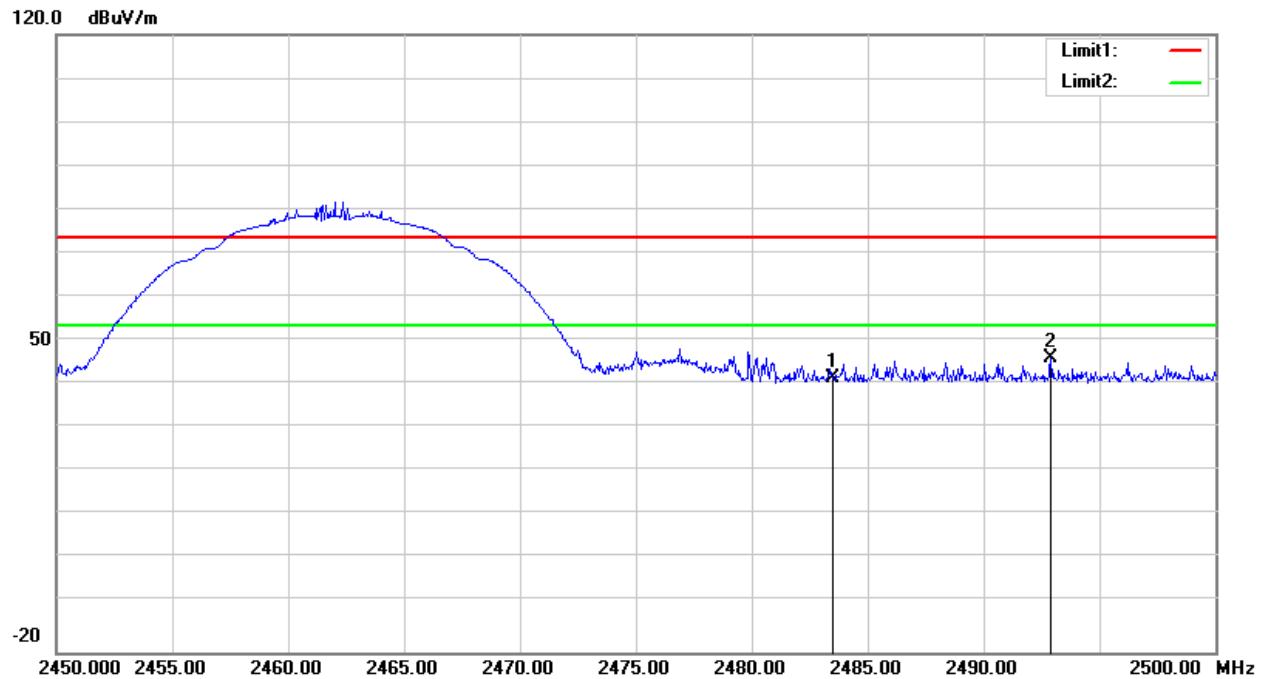RESTRICTED BANDEDGE (11 CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2483.500	37.36	4.60	41.96	74.00	-32.04	peak
2	2492.900	41.91	4.64	46.55	74.00	-27.45	peak


Note: Measurement = Reading Level + Correct Factor.

802.11 g mode

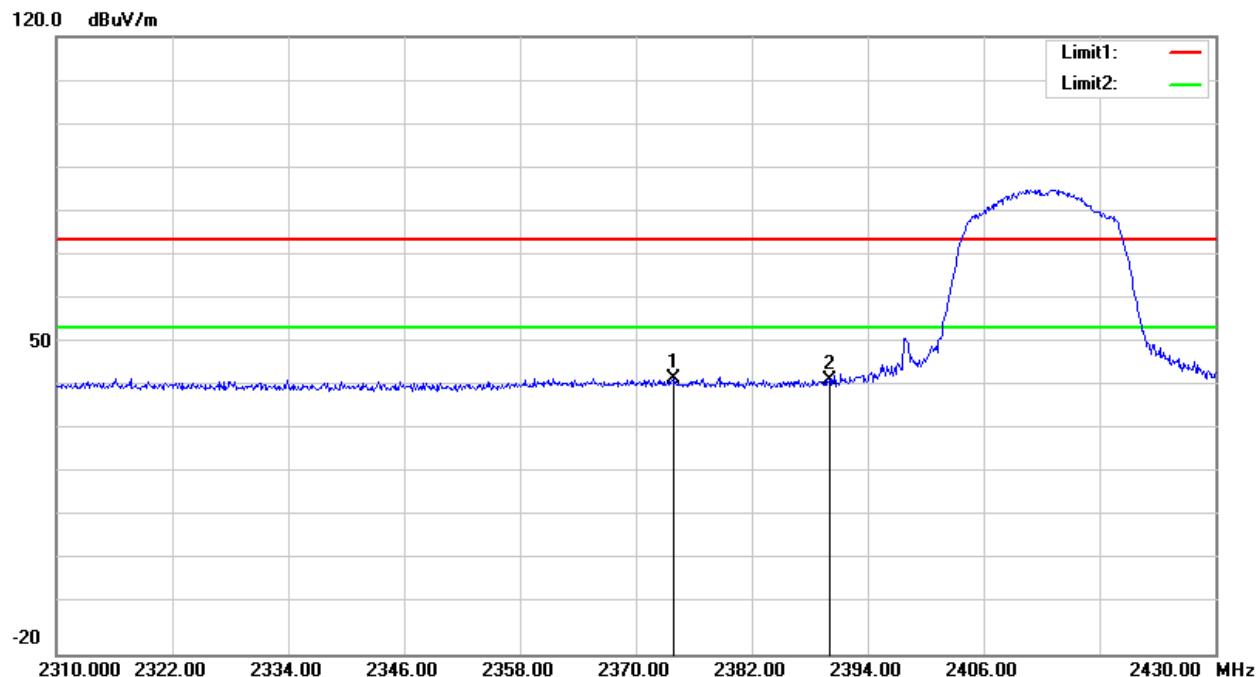RESTRICTED BANDEDGE (01 CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.840	38.34	4.10	42.44	74.00	-31.56	peak
2	2390.000	37.89	4.34	42.23	74.00	-31.77	peak

Note: Measurement = Reading Level + Correct Factor.

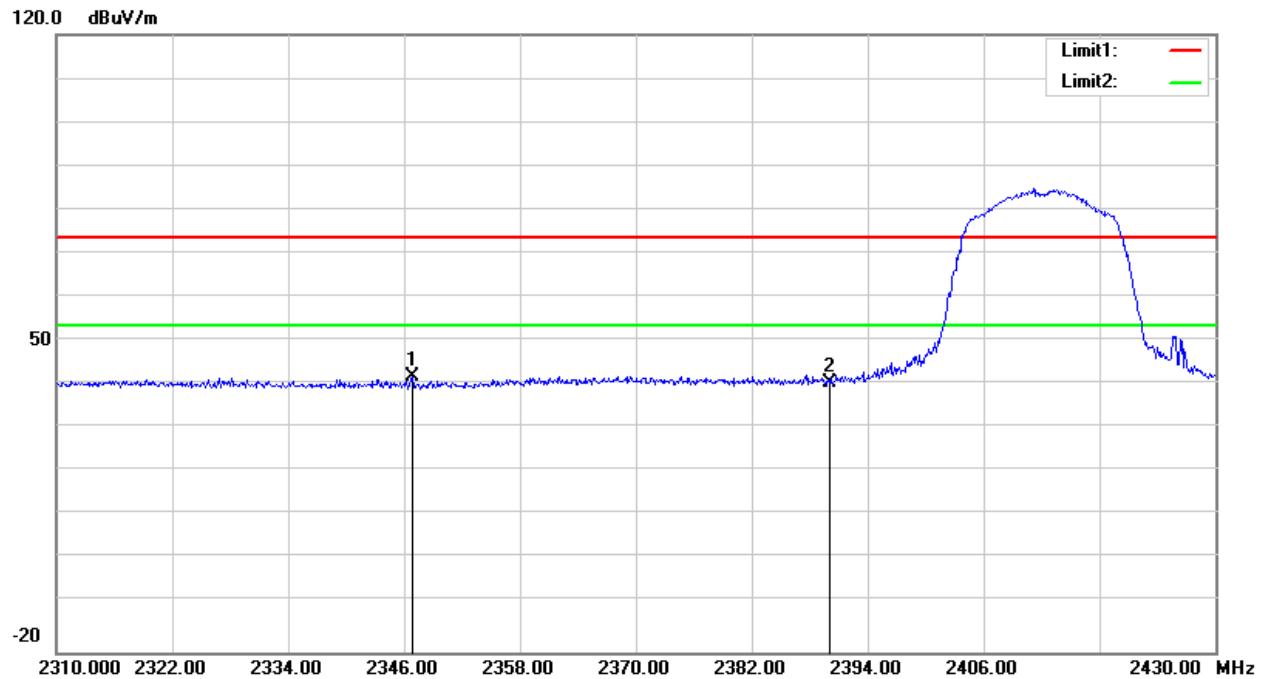RESTRICTED BANDEDGE (01 CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2346.840	38.75	3.72	42.47	74.00	-31.53	peak
2	2390.000	36.80	4.34	41.14	74.00	-32.86	peak

Note: Measurement = Reading Level + Correct Factor.

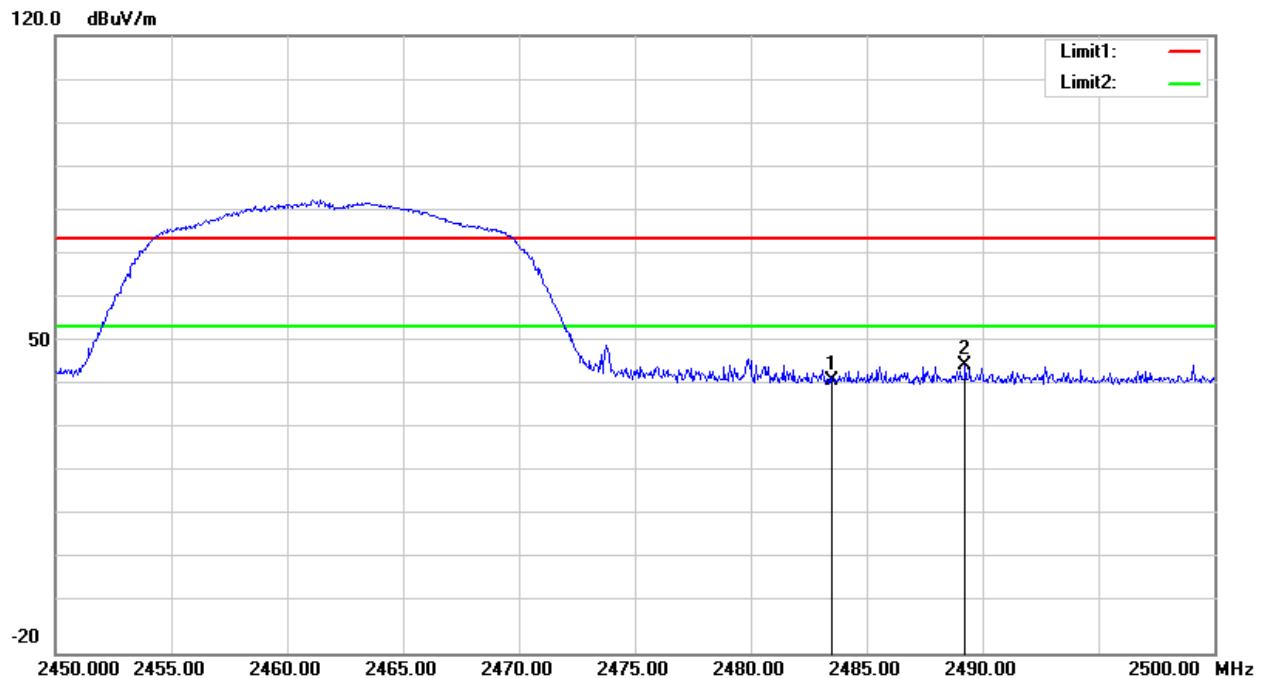RESTRICTED BANDEDGE (11 CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.08	4.60	41.68	74.00	-32.32	peak
2	2489.250	40.67	4.62	45.29	74.00	-28.71	peak


Note: Measurement = Reading Level + Correct Factor.

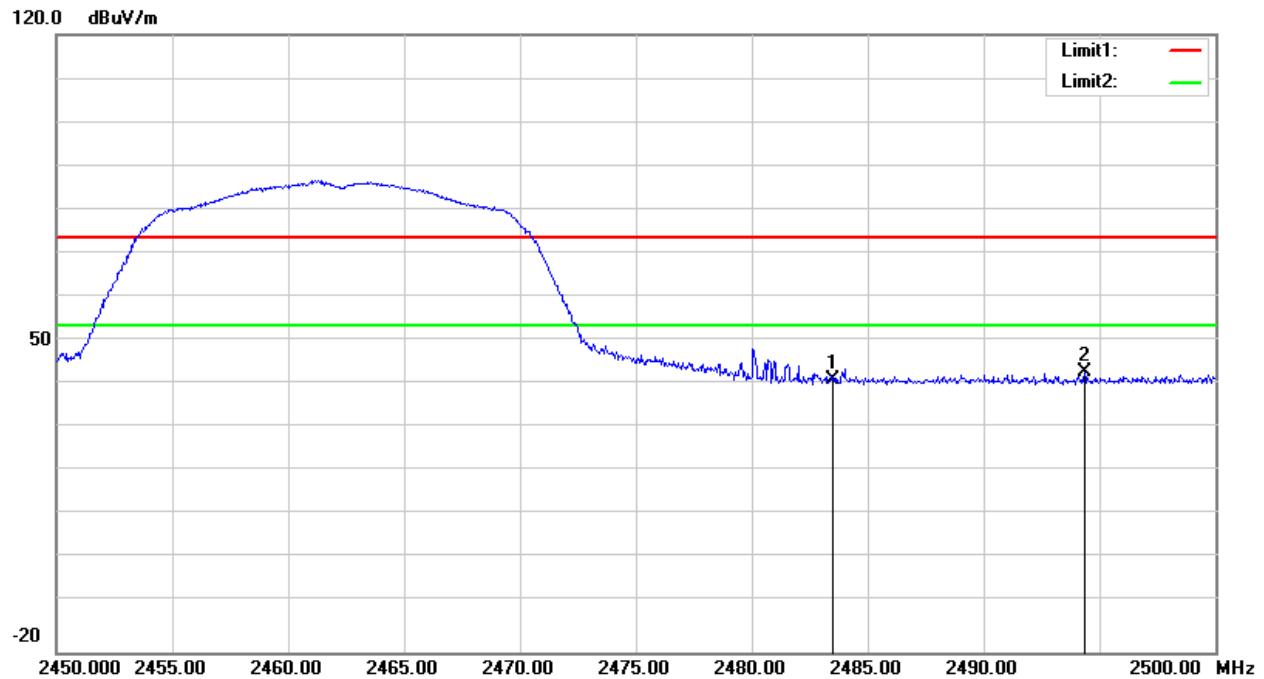RESTRICTED BANDEDGE (11 CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2483.500	37.18	4.60	41.78	74.00	-32.22	peak
2	2494.350	39.03	4.63	43.66	74.00	-30.34	peak


Note: Measurement = Reading Level + Correct Factor.

802.11 n20 mode

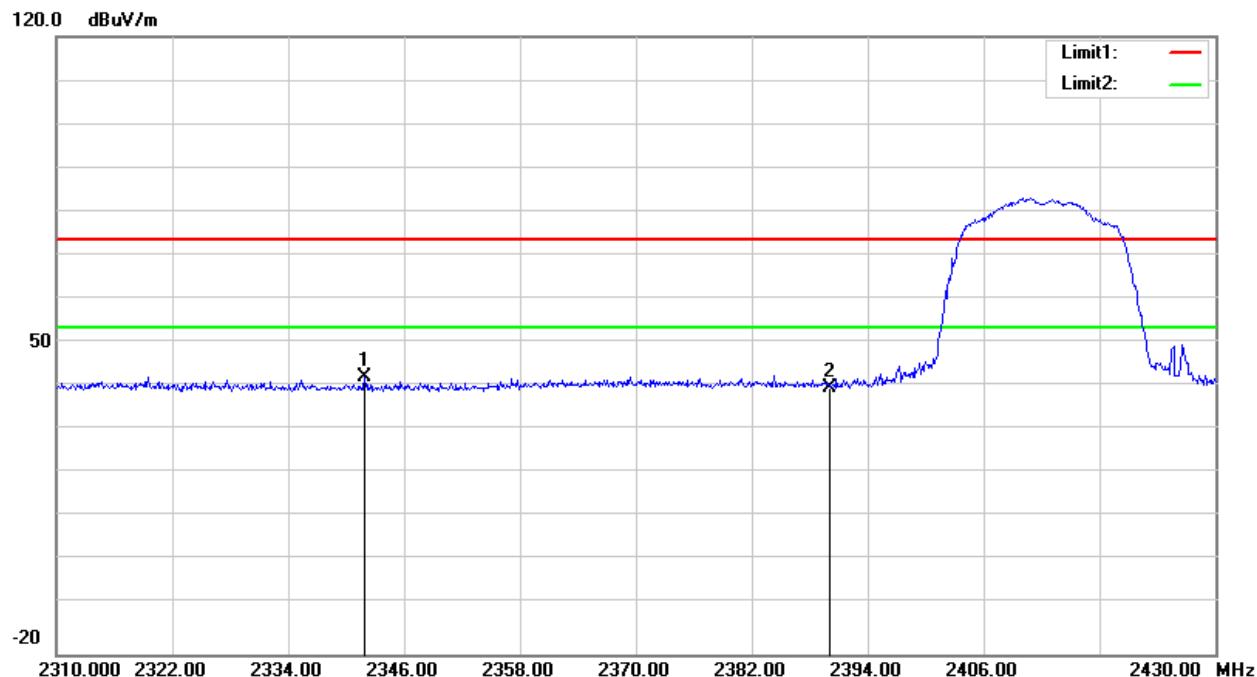RESTRICTED BANDEDGE (01 CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2341.920	39.16	3.69	42.85	74.00	-31.15	peak
2	2390.000	36.21	4.34	40.55	74.00	-33.45	peak

Note: Measurement = Reading Level + Correct Factor.

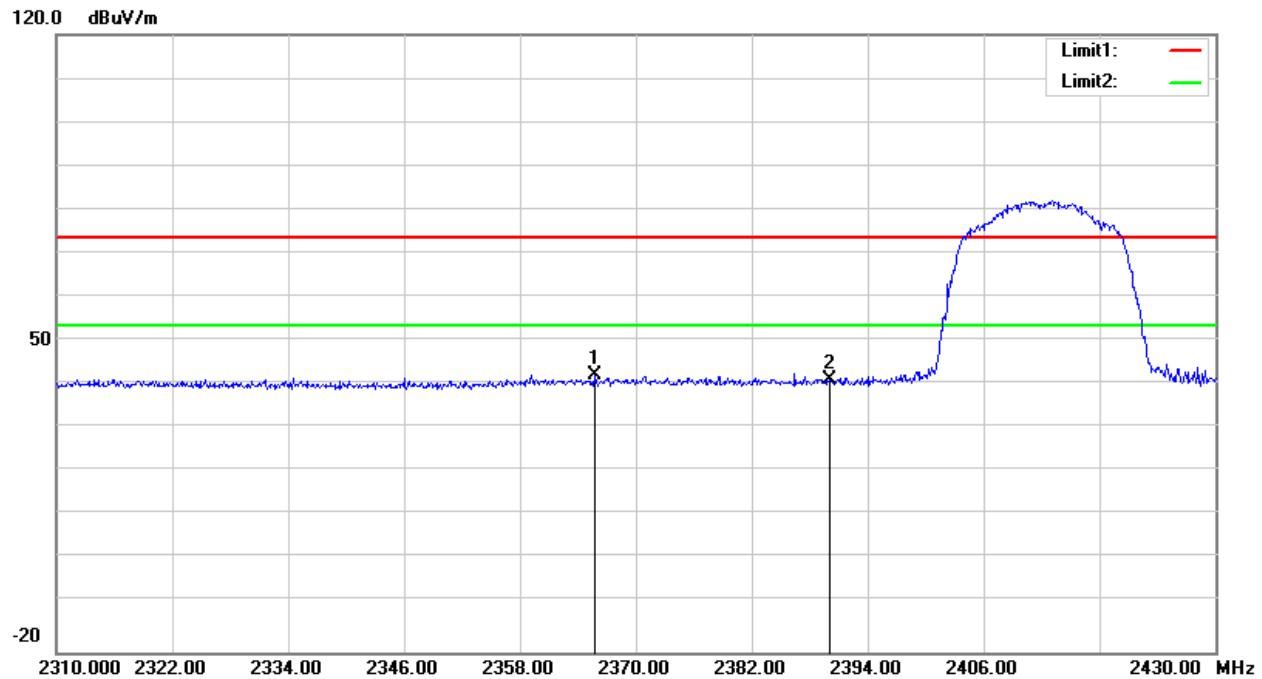RESTRICTED BANDEDGE (01 CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2365.680	38.82	3.97	42.79	74.00	-31.21	peak
2	2390.000	37.29	4.34	41.63	74.00	-32.37	peak

Note: Measurement = Reading Level + Correct Factor.

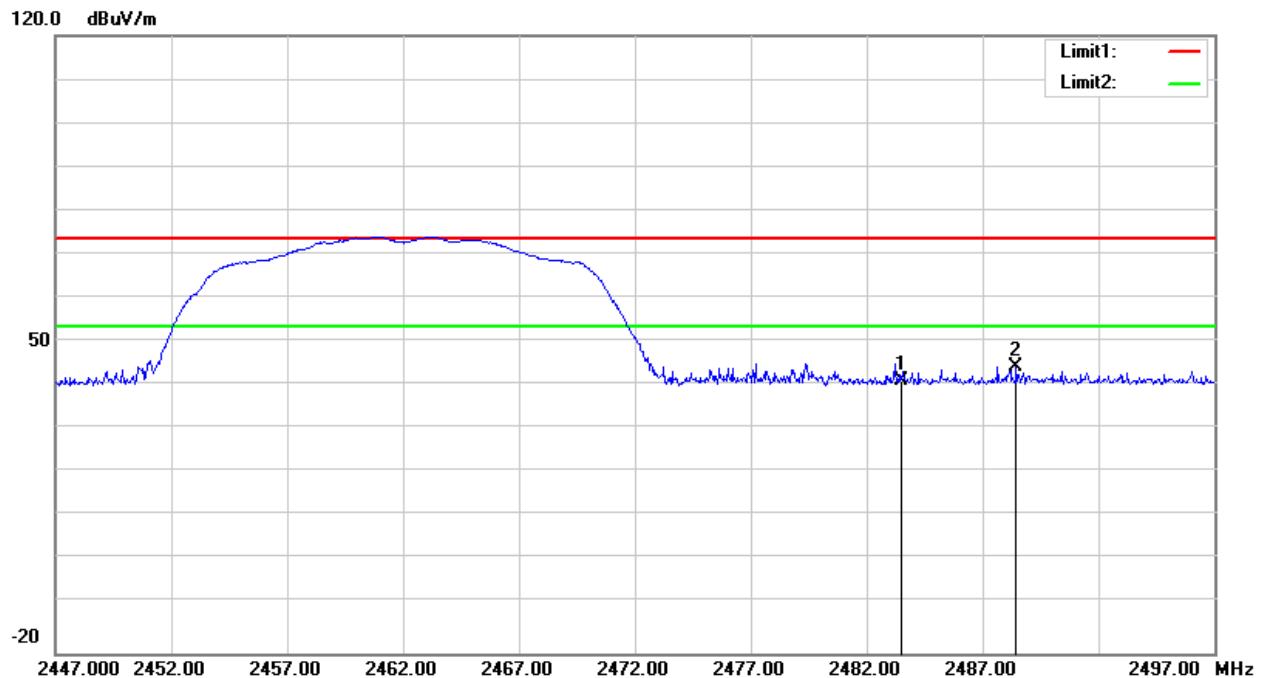RESTRICTED BANDEDGE (11 CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.35	4.60	41.95	74.00	-32.05	peak
2	2488.450	40.45	4.62	45.07	74.00	-28.93	peak

Note: Measurement = Reading Level + Correct Factor.

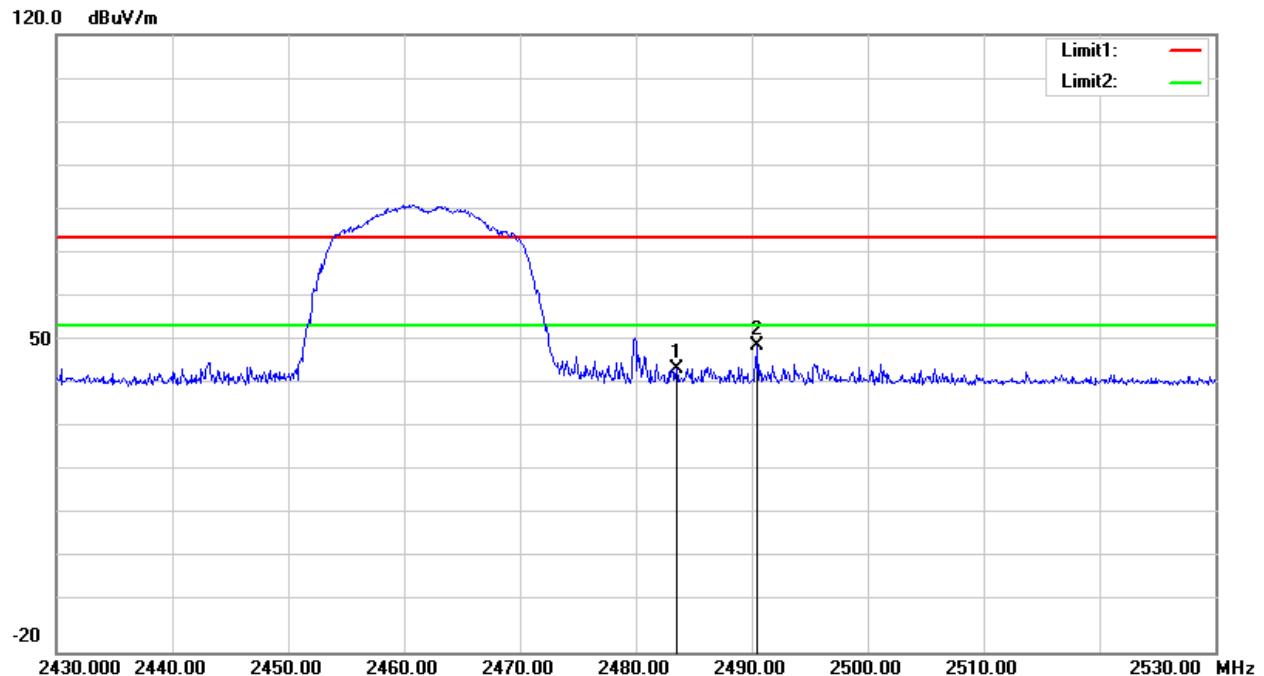RESTRICTED BANDEDGE (11 CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2483.500	39.58	4.60	44.18	74.00	-29.82	peak
2	2490.500	44.84	4.63	49.47	74.00	-24.53	peak


Note: Measurement = Reading Level + Correct Factor.

9.2. SPURIOUS EMISSIONS (30-1GHz)

Note: All the channels had been tested, but only the worst data recorded in the report.


802.11 b mode

HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

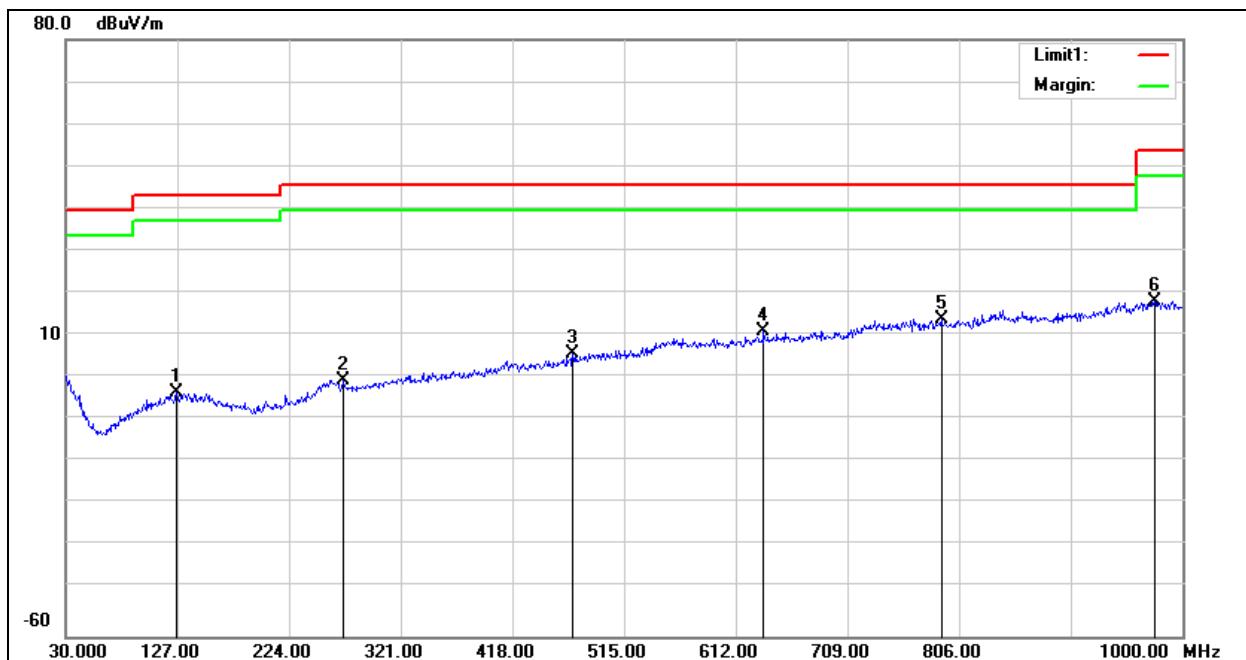

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	126.0300	15.58	-18.22	-2.64	43.50	-46.14	QP
2	271.5300	15.45	-15.37	0.08	46.00	-45.92	QP
3	470.3800	15.24	-8.99	6.25	46.00	-39.75	QP
4	636.2500	16.37	-4.92	11.45	46.00	-34.55	QP
5	790.4800	16.49	-1.97	14.52	46.00	-31.48	QP
6	975.7500	16.30	2.38	18.68	54.00	-35.32	QP


Note: Measurement = Reading Level + Correct Factor.

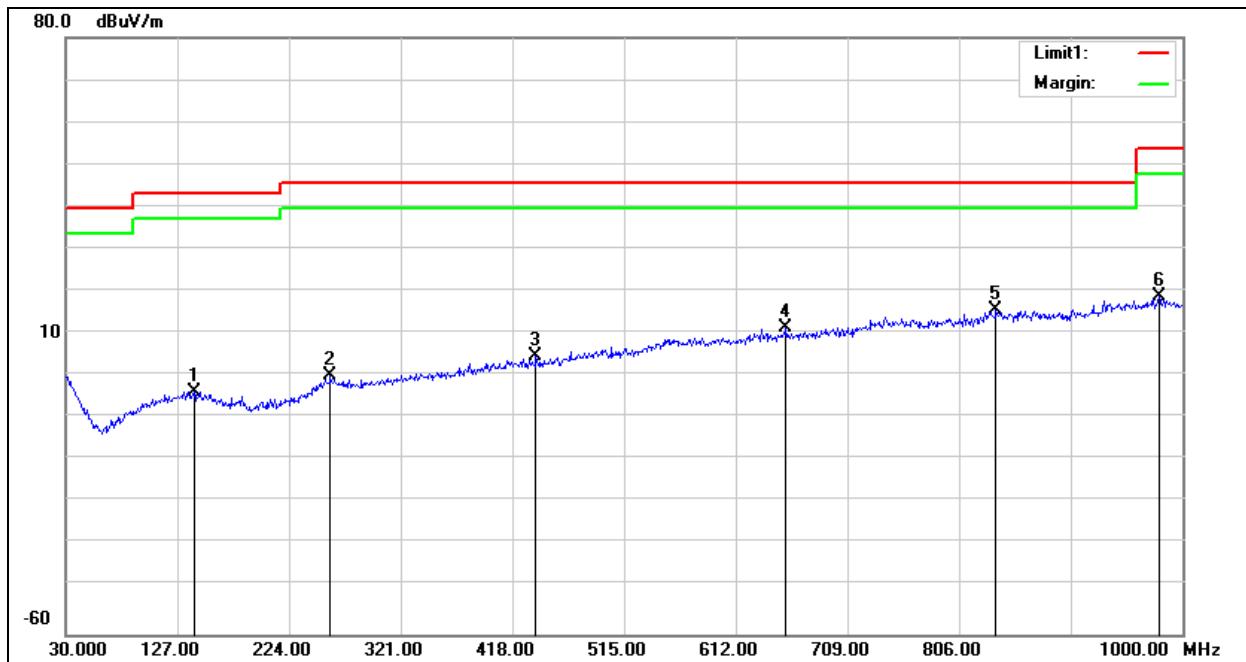HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	141.5500	15.01	-18.11	-3.10	43.50	-46.60	QP
2	259.8900	15.56	-14.79	0.77	46.00	-45.23	QP
3	438.3700	15.54	-10.10	5.44	46.00	-40.56	QP
4	655.6500	16.75	-4.85	11.90	46.00	-34.10	QP
5	838.0100	16.51	-0.42	16.09	46.00	-29.91	QP
6	979.6300	16.60	2.65	19.25	54.00	-34.75	QP


Note: Measurement = Reading Level + Correct Factor.

802.11 g mode

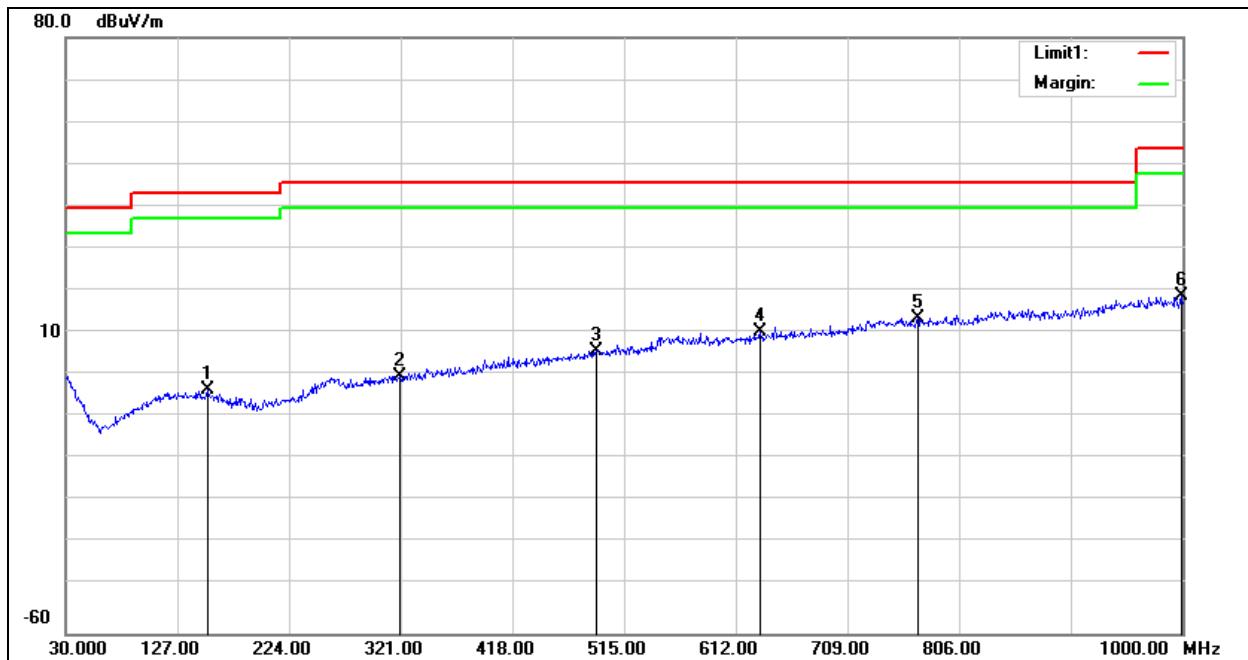HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	153.1900	15.67	-18.58	-2.91	43.50	-46.41	QP
2	320.0300	14.46	-14.00	0.46	46.00	-45.54	QP
3	490.7500	14.39	-8.20	6.19	46.00	-39.81	QP
4	633.3400	15.75	-4.98	10.77	46.00	-35.23	QP
5	770.1100	16.50	-2.33	14.17	46.00	-31.83	QP
6	999.0300	17.17	2.04	19.21	54.00	-34.79	QP


Note: Measurement = Reading Level + Correct Factor.

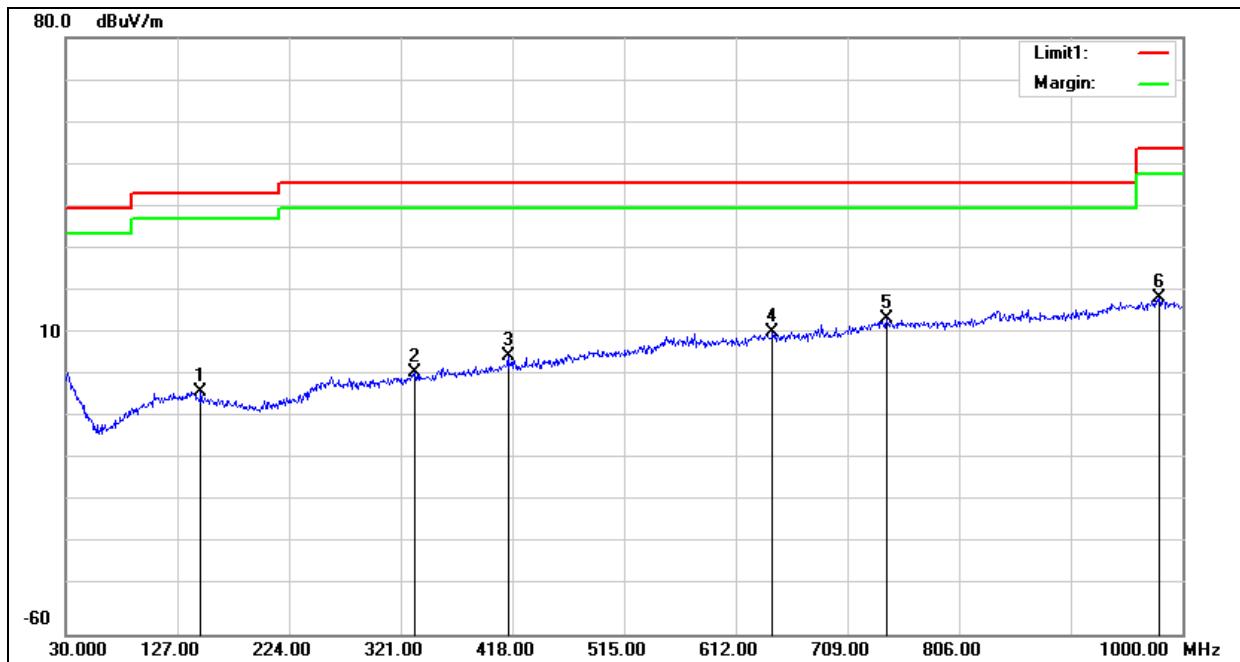HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.3700	15.20	-18.42	-3.22	43.50	-46.72	QP
2	333.6100	14.94	-13.59	1.35	46.00	-44.65	QP
3	414.1200	15.62	-10.37	5.25	46.00	-40.75	QP
4	644.0100	15.61	-4.87	10.74	46.00	-35.26	QP
5	742.9500	16.25	-2.13	14.12	46.00	-31.88	QP
6	979.6300	16.40	2.65	19.05	54.00	-34.95	QP


Note: Measurement = Reading Level + Correct Factor.

802.11 n20 mode

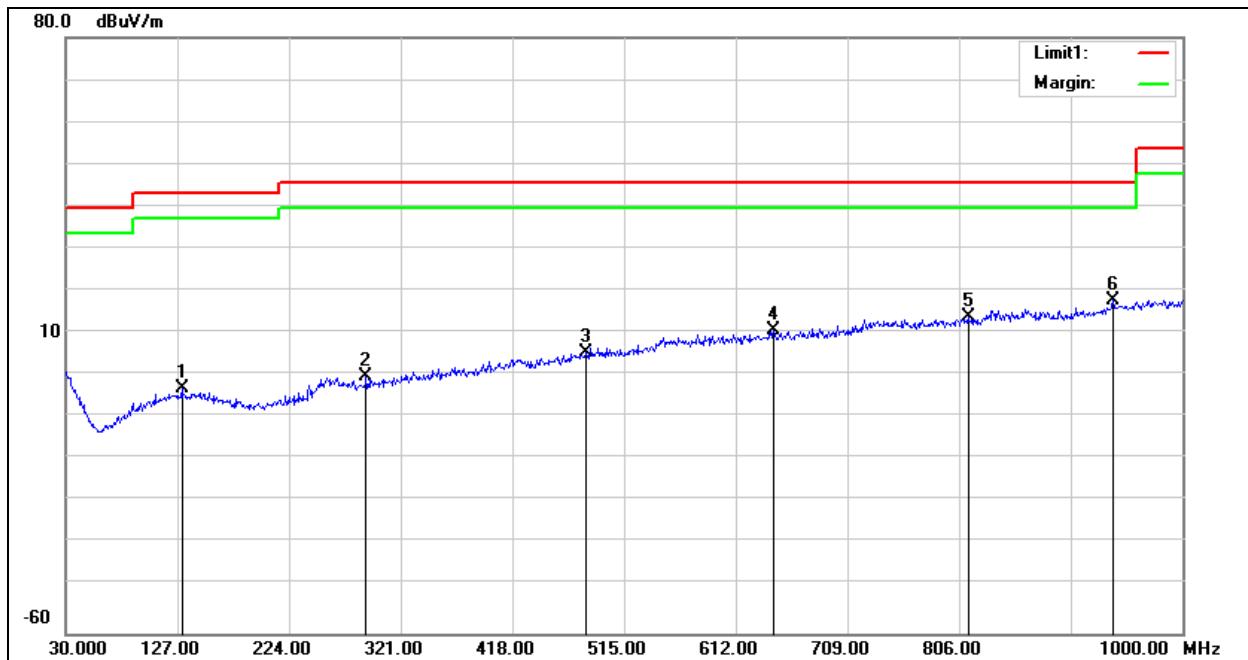HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	130.8800	15.67	-18.23	-2.56	43.50	-46.06	QP
2	290.9300	15.43	-15.12	0.31	46.00	-45.69	QP
3	482.0200	14.54	-8.57	5.97	46.00	-40.03	QP
4	644.9800	16.06	-4.87	11.19	46.00	-34.81	QP
5	813.7600	16.27	-1.98	14.29	46.00	-31.71	QP
6	939.8600	16.96	1.37	18.33	46.00	-27.67	QP

Note: Measurement = Reading Level + Correct Factor.

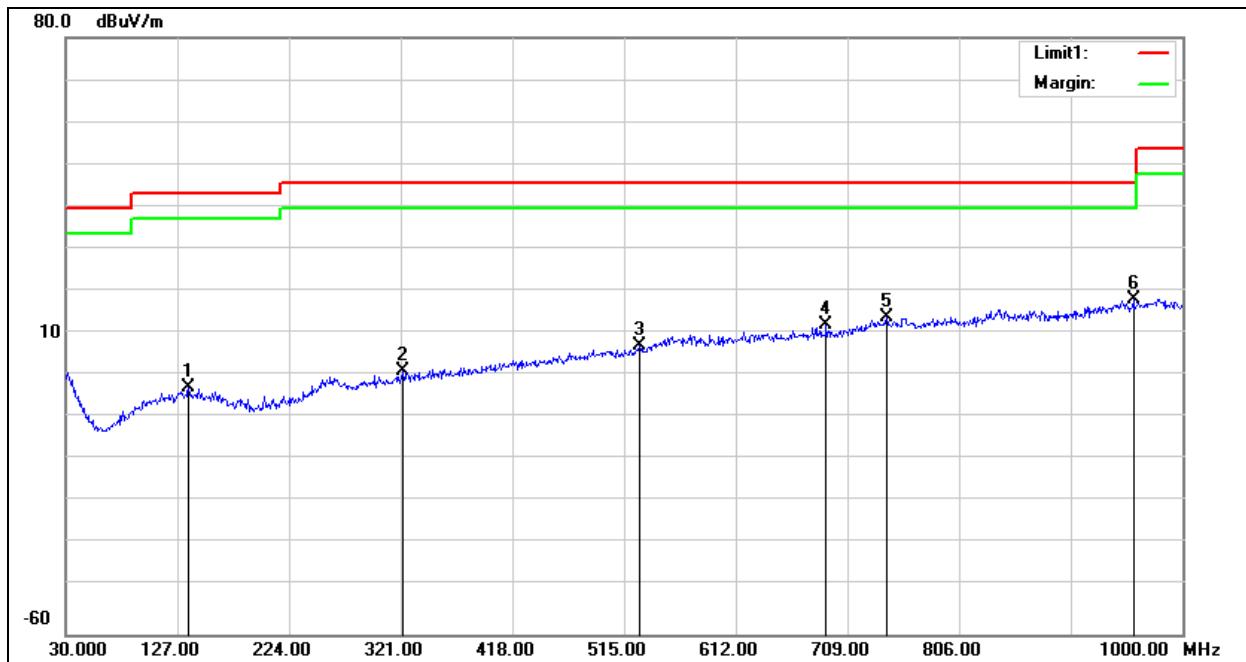HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	136.7000	16.02	-18.07	-2.05	43.50	-45.55	QP
2	322.9400	15.71	-13.91	1.80	46.00	-44.20	QP
3	528.5800	15.34	-7.51	7.83	46.00	-38.17	QP
4	690.5700	16.86	-4.33	12.53	46.00	-33.47	QP
5	742.9500	16.54	-2.13	14.41	46.00	-31.59	QP
6	957.3200	16.92	1.72	18.64	46.00	-27.36	QP

Note: Measurement = Reading Level + Correct Factor.

9.3. SPURIOUS EMISSIONS (1GHz-18GHz)

802.11 b mode


HARMONICS AND SPURIOUS EMISSIONS (01 CHANNEL, HORIZONTAL)

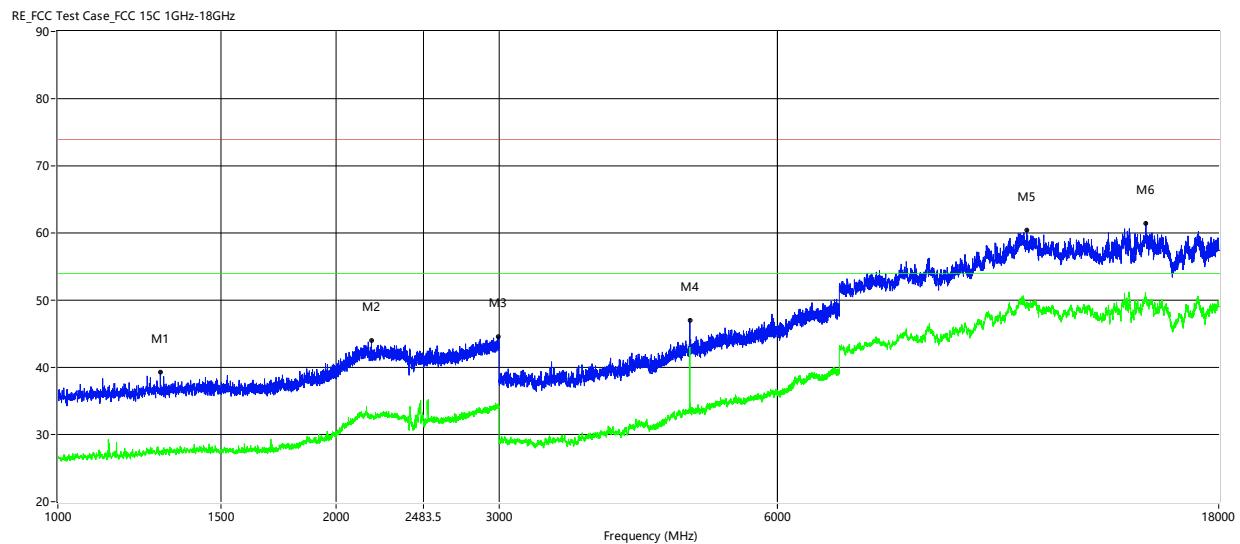

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1290.500	39.30	27.32	-0.93	74.0	54.0	-26.68	Horizontal	Pass
2183.500	44.04	32.72	4.28	74.0	54.0	-21.28	Horizontal	Pass
2997.000	44.56	34.42	6.10	74.0	54.0	-19.58	Horizontal	Pass
4824.000	46.95	42.97	-6.84	74.0	54.0	-11.03	Horizontal	Pass
11163.500	60.36	49.35	9.63	74.0	54.0	-4.65	Horizontal	Pass
15016.250	61.49	50.01	10.38	74.0	54.0	-3.99	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

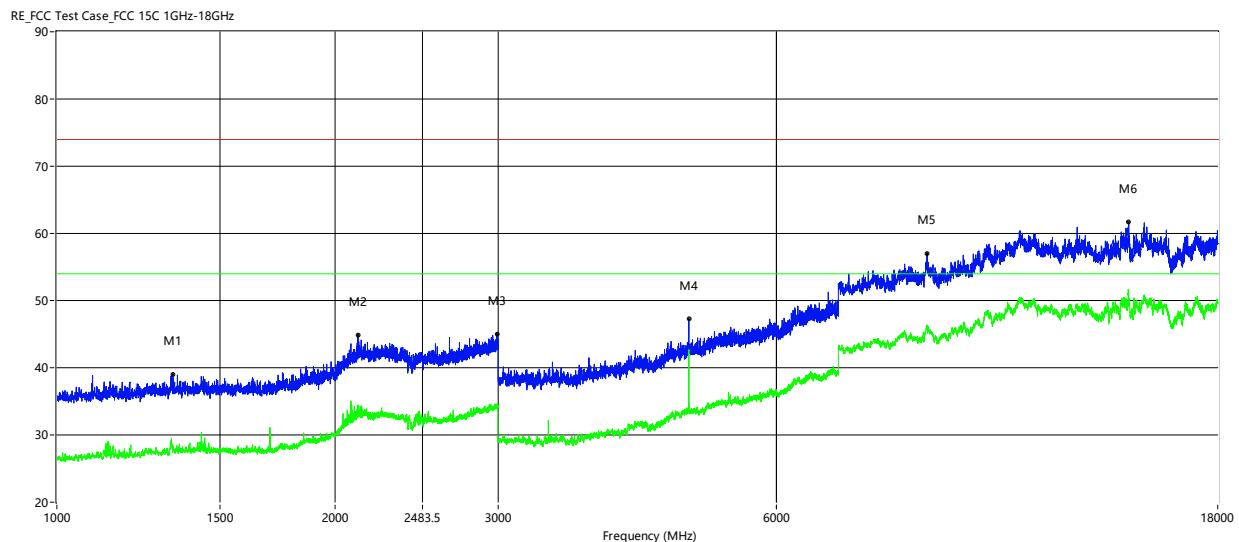HARMONICS AND SPURIOUS EMISSIONS (01 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1334.500	39.02	27.78	-0.84	74.0	54.0	-26.22	Vertical	Pass
2116.500	44.90	33.41	4.07	74.0	54.0	-20.59	Vertical	Pass
2991.500	45.04	34.25	6.07	74.0	54.0	-19.75	Vertical	Pass
4824.000	47.26	42.69	-6.84	74.0	54.0	-11.31	Vertical	Pass
8729.750	57.06	46.34	5.07	74.0	54.0	-7.66	Vertical	Pass
14422.250	61.66	50.75	11.16	74.0	54.0	-3.25	Vertical	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

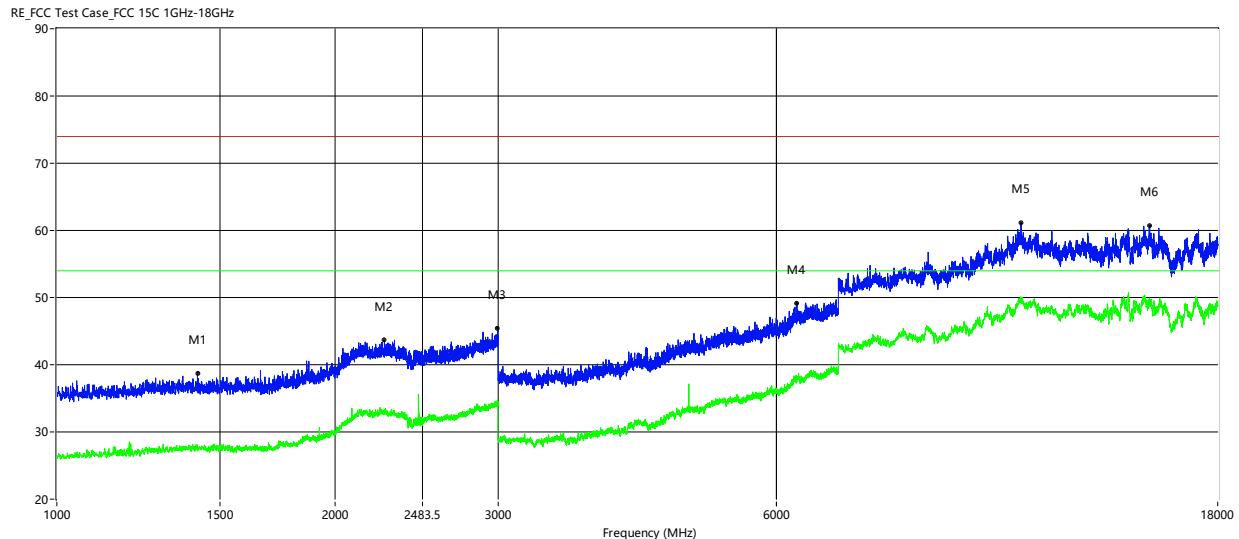HARMONICS AND SPURIOUS EMISSIONS (06 CHANNEL, HORIZONTAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1419.000	38.72	27.98	-0.63	74.0	54.0	-26.02	Horizontal	Pass
2260.500	43.67	32.80	4.63	74.0	54.0	-21.20	Horizontal	Pass
2996.500	45.39	34.27	6.09	74.0	54.0	-19.73	Horizontal	Pass
6314.000	49.16	37.94	-1.45	74.0	54.0	-16.06	Horizontal	Pass
11031.500	61.19	49.87	10.05	74.0	54.0	-4.13	Horizontal	Pass
15195.000	60.71	49.77	11.01	74.0	54.0	-4.23	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

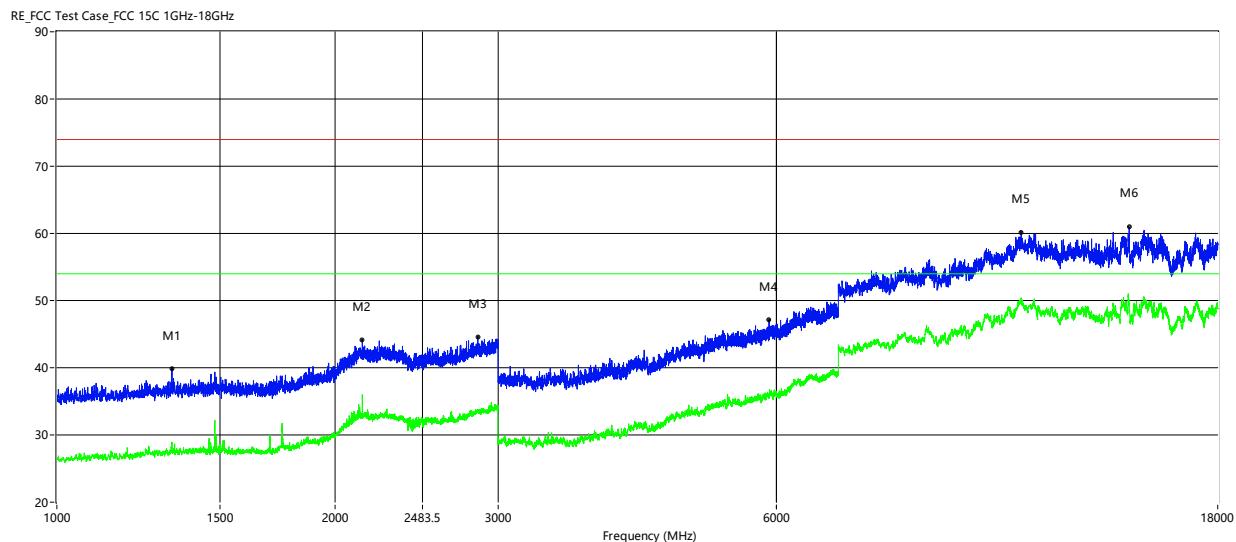HARMONICS AND SPURIOUS EMISSIONS (06 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1331.500	39.92	28.95	-0.85	74.0	54.0	-25.05	Vertical	Pass
2139.500	44.20	36.01	4.46	74.0	54.0	-17.99	Vertical	Pass
2852.500	44.62	33.58	5.61	74.0	54.0	-20.42	Vertical	Pass
5891.000	47.20	35.94	-3.29	74.0	54.0	-18.06	Vertical	Pass
11037.000	60.18	50.05	10.02	74.0	54.0	-3.95	Vertical	Pass
14438.750	60.94	49.64	10.97	74.0	54.0	-4.36	Vertical	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

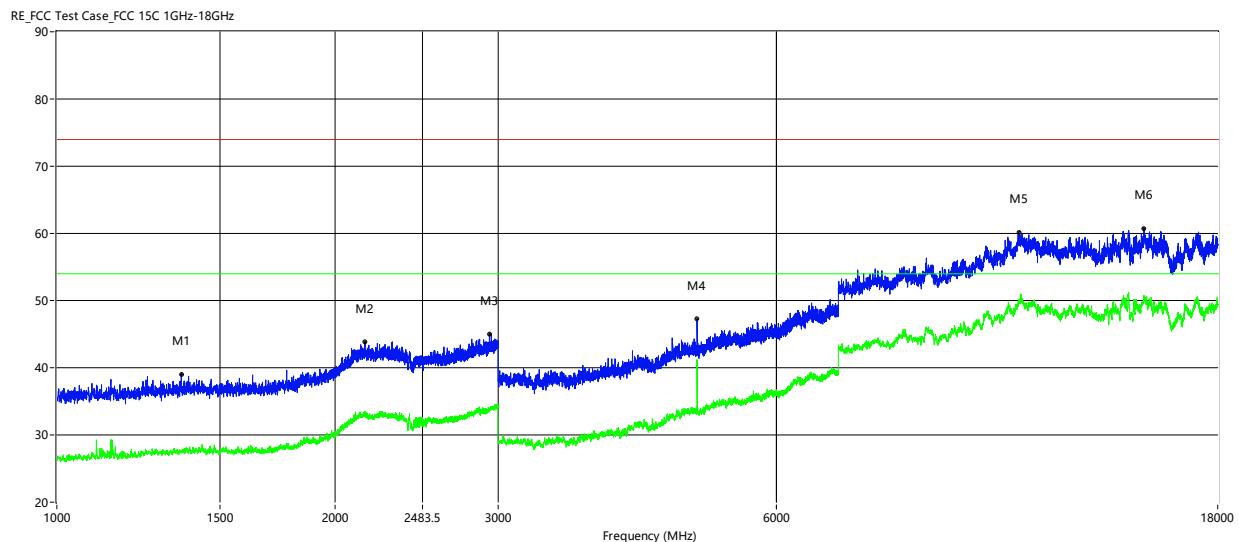HARMONICS AND SPURIOUS EMISSIONS (11 CHANNEL, HORIZONTAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1363.000	39.01	27.77	-0.76	74.0	54.0	-26.23	Horizontal	Pass
2153.500	43.86	33.11	4.60	74.0	54.0	-20.89	Horizontal	Pass
2936.000	44.98	33.93	5.82	74.0	54.0	-20.07	Horizontal	Pass
4924.000	47.22	41.23	-6.39	74.0	54.0	-12.77	Horizontal	Pass
10971.000	60.14	49.93	10.00	74.0	54.0	-4.07	Horizontal	Pass
14969.500	60.73	50.42	10.24	74.0	54.0	-3.58	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

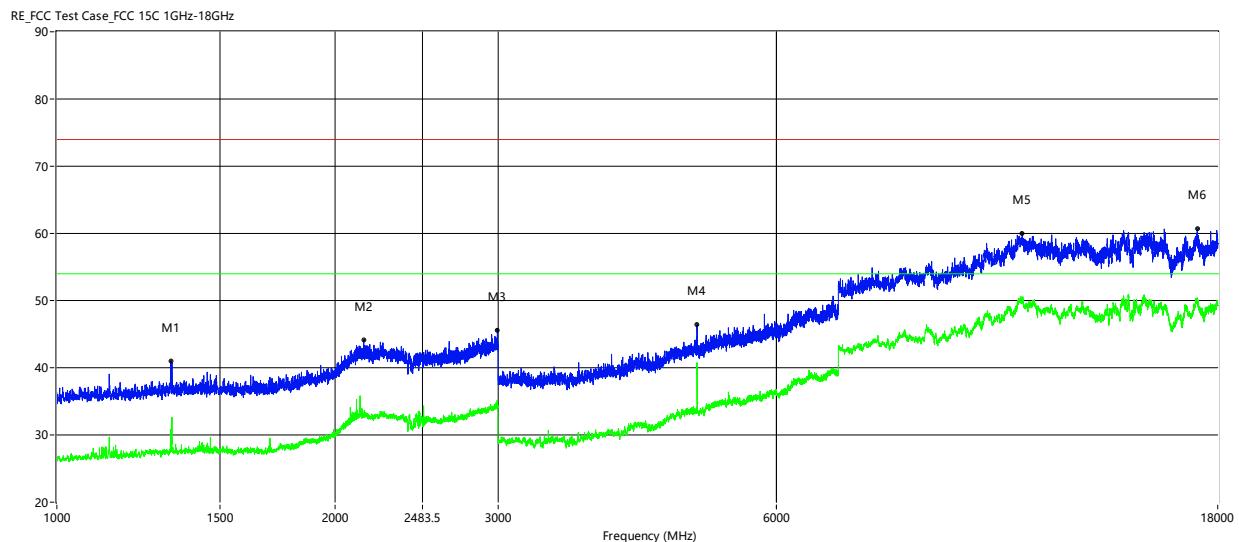HARMONICS AND SPURIOUS EMISSIONS (11 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1327.500	40.94	30.86	-0.86	74.0	54.0	-23.14	Vertical	Pass
2147.000	44.13	33.10	4.58	74.0	54.0	-20.90	Vertical	Pass
2994.500	45.51	34.20	6.09	74.0	54.0	-19.80	Vertical	Pass
4924.000	46.41	40.77	-6.39	74.0	54.0	-13.23	Vertical	Pass
11064.500	59.97	49.82	9.87	74.0	54.0	-4.18	Vertical	Pass
17106.250	60.68	50.42	10.45	74.0	54.0	-3.58	Vertical	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

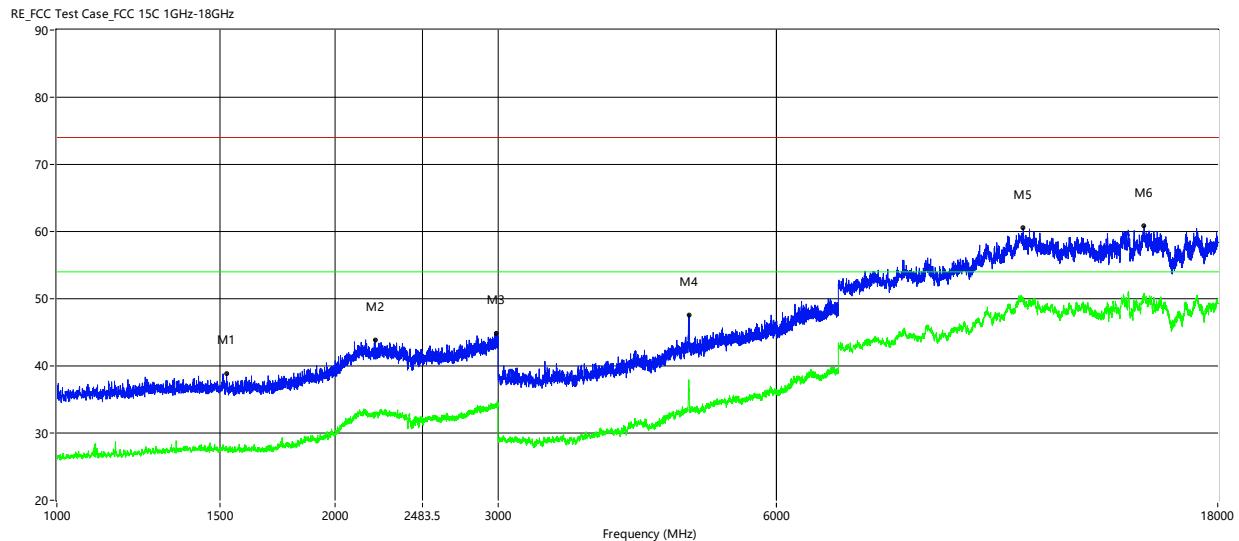802.11 g mode**HARMONICS AND SPURIOUS EMISSIONS (01 CHANNEL, HORIZONTAL)**

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1526.000	38.82	28.03	-0.59	74.0	54.0	-25.97	Horizontal	Pass
2208.000	43.91	33.04	4.19	74.0	54.0	-20.96	Horizontal	Pass
2984.000	44.84	34.12	6.04	74.0	54.0	-19.88	Horizontal	Pass
4827.000	47.52	36.70	-6.82	74.0	54.0	-17.30	Horizontal	Pass
11092.000	60.52	49.69	9.72	74.0	54.0	-4.31	Horizontal	Pass
14986.000	60.84	50.83	10.33	74.0	54.0	-3.17	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

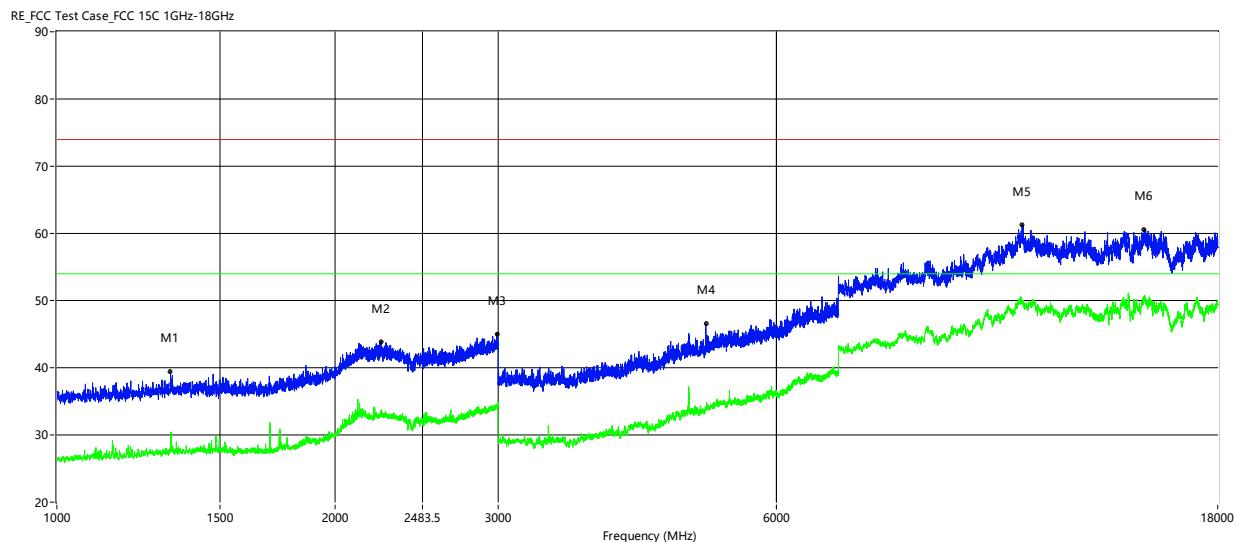HARMONICS AND SPURIOUS EMISSIONS (01 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1327.000	39.38	28.65	-0.86	74.0	54.0	-25.35	Vertical	Pass
2243.500	43.93	33.74	4.57	74.0	54.0	-20.26	Vertical	Pass
2991.500	45.06	34.01	6.07	74.0	54.0	-19.99	Vertical	Pass
5033.000	46.54	33.74	-6.10	74.0	54.0	-20.26	Vertical	Pass
11059.000	61.27	49.72	9.90	74.0	54.0	-4.28	Vertical	Pass
14988.750	60.60	50.74	10.34	74.0	54.0	-3.26	Vertical	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

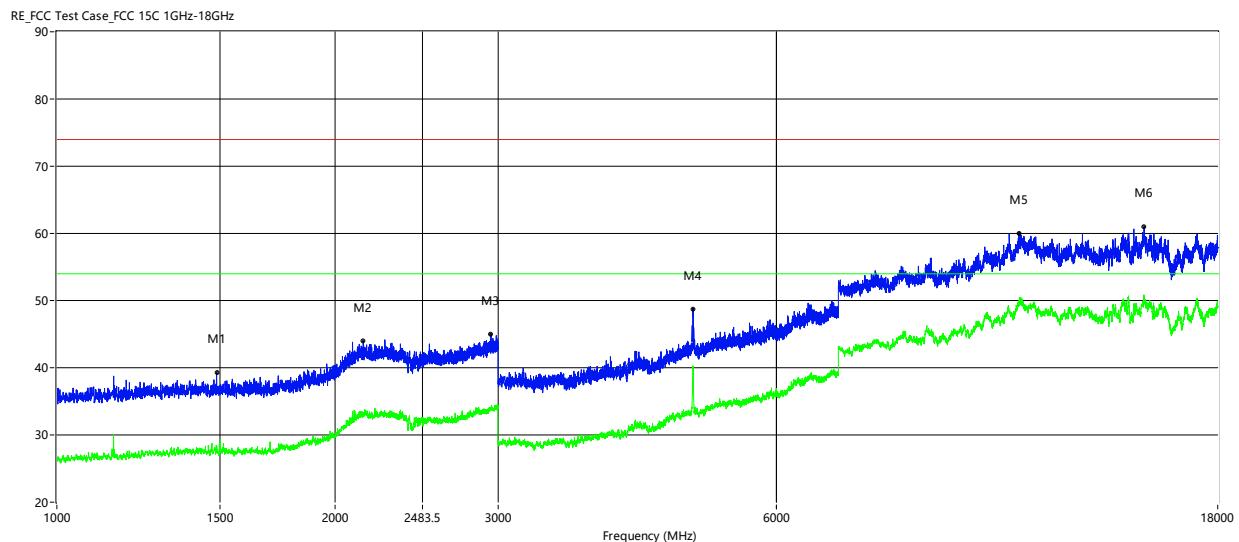HARMONICS AND SPURIOUS EMISSIONS (06 CHANNEL, HORIZONTAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1488.500	39.22	28.01	-0.57	74.0	54.0	-25.99	Horizontal	Pass
2144.000	43.95	33.32	4.53	74.0	54.0	-20.68	Horizontal	Pass
2947.000	45.02	33.79	5.88	74.0	54.0	-20.21	Horizontal	Pass
4875.000	48.66	38.14	-6.54	74.0	54.0	-15.86	Horizontal	Pass
10976.500	60.01	49.75	10.04	74.0	54.0	-4.25	Horizontal	Pass
14988.750	60.97	50.00	10.34	74.0	54.0	-4.00	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

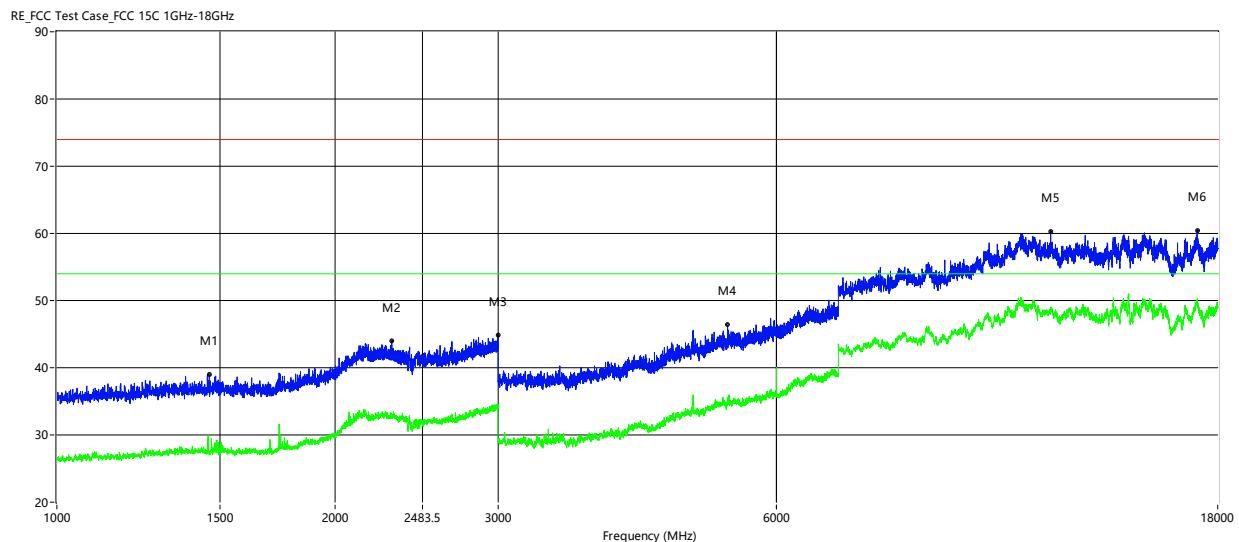HARMONICS AND SPURIOUS EMISSIONS (06 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1461.500	38.94	27.22	-0.58	74.0	54.0	-26.78	Vertical	Pass
2302.000	43.99	33.14	4.57	74.0	54.0	-20.86	Vertical	Pass
3000.000	44.84	34.07	6.11	74.0	54.0	-19.93	Vertical	Pass
5313.000	46.37	35.03	-4.98	74.0	54.0	-18.97	Vertical	Pass
11875.750	60.29	49.01	8.91	74.0	54.0	-4.99	Vertical	Pass
17106.250	60.45	50.15	10.45	74.0	54.0	-3.85	Vertical	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

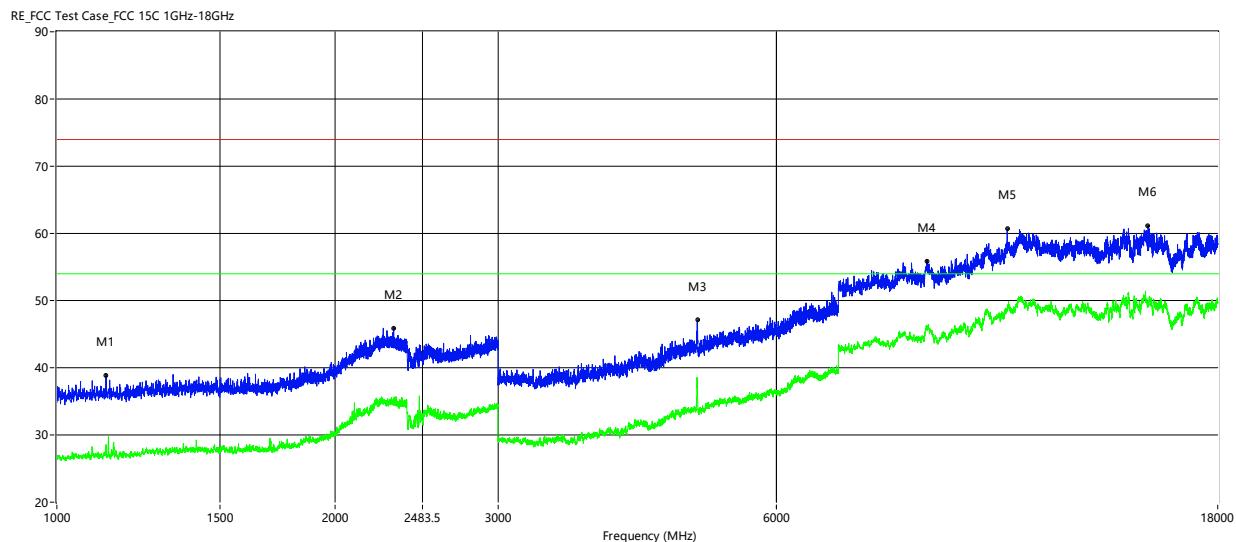HARMONICS AND SPURIOUS EMISSIONS (11 CHANNEL, HORIZONTAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1302.000	40.37	28.65	-0.93	74.0	54.0	-25.35	Horizontal	Pass
2217.000	43.87	33.59	4.28	74.0	54.0	-20.41	Horizontal	Pass
2936.500	44.68	33.76	5.82	74.0	54.0	-20.24	Horizontal	Pass
4926.000	47.23	36.62	-6.39	74.0	54.0	-17.38	Horizontal	Pass
11023.250	60.38	49.84	10.09	74.0	54.0	-4.16	Horizontal	Pass
14983.250	60.55	50.38	10.31	74.0	54.0	-3.62	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

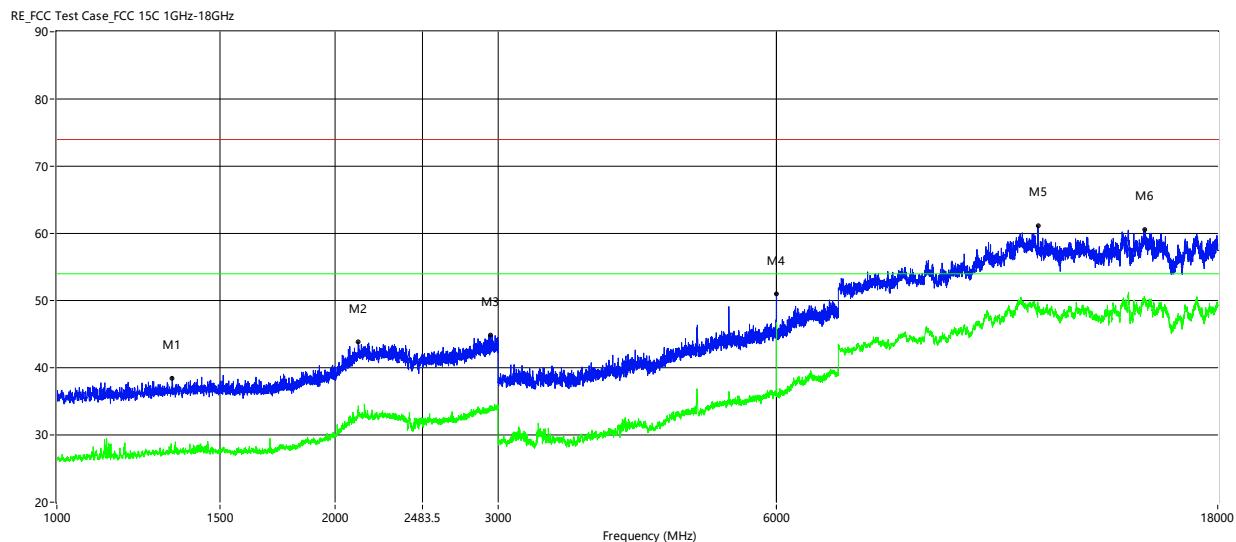HARMONICS AND SPURIOUS EMISSIONS (11 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1332.500	38.42	27.60	-0.84	74.0	54.0	-26.40	Vertical	Pass
2117.500	43.80	33.84	4.09	74.0	54.0	-20.16	Vertical	Pass
2942.000	44.86	33.67	5.85	74.0	54.0	-20.33	Vertical	Pass
6000.000	51.04	46.75	-3.03	74.0	54.0	-7.25	Vertical	Pass
11507.250	61.15	49.08	9.96	74.0	54.0	-4.92	Vertical	Pass
14994.250	60.59	50.68	10.37	74.0	54.0	-3.32	Vertical	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

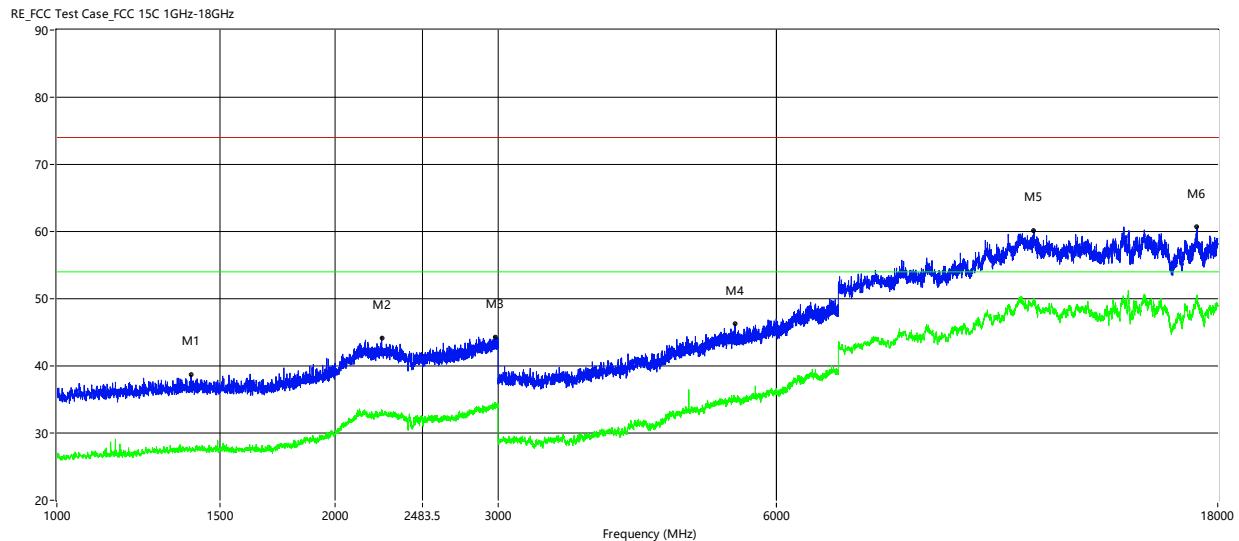802.11 n20 mode**HARMONICS AND SPURIOUS EMISSIONS (01 CHANNEL, HORIZONTAL)**

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1396.500	38.65	27.35	-0.67	74.0	54.0	-26.65	Horizontal	Pass
2245.000	44.17	33.47	4.59	74.0	54.0	-20.53	Horizontal	Pass
2979.000	44.28	34.22	6.02	74.0	54.0	-19.78	Horizontal	Pass
5413.000	46.24	35.20	-4.79	74.0	54.0	-18.80	Horizontal	Pass
11391.750	60.17	49.94	9.73	74.0	54.0	-4.06	Horizontal	Pass
17089.750	60.72	50.04	10.41	74.0	54.0	-3.96	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

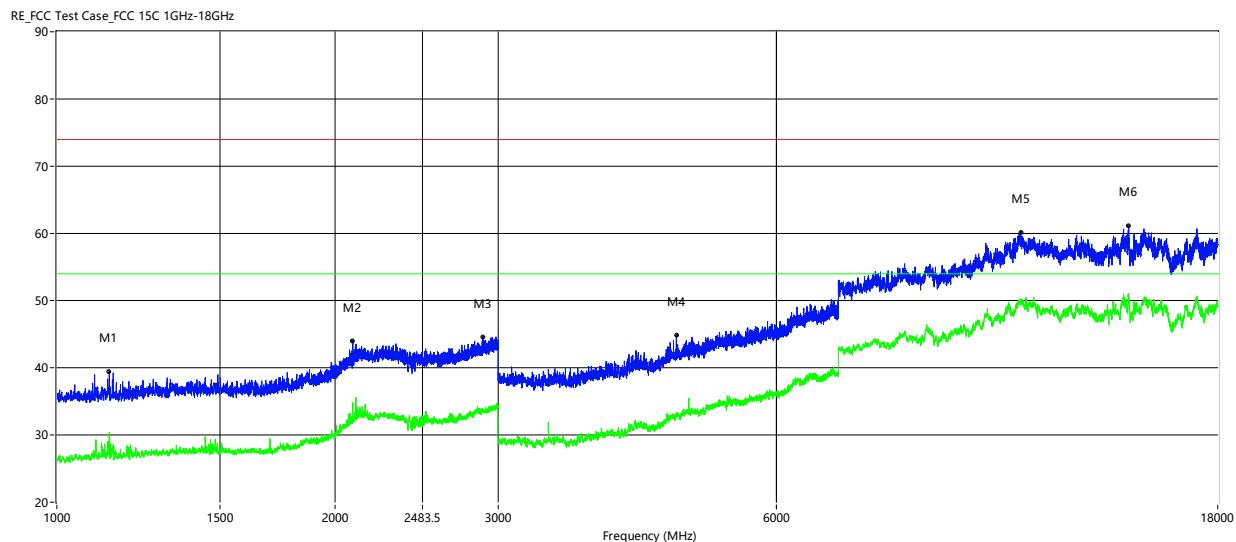HARMONICS AND SPURIOUS EMISSIONS (01 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1139.000	39.42	30.39	-1.41	74.0	54.0	-23.61	Vertical	Pass
2089.500	44.05	34.83	3.59	74.0	54.0	-19.17	Vertical	Pass
2888.500	44.60	33.58	5.61	74.0	54.0	-20.42	Vertical	Pass
4676.000	44.80	32.96	-7.46	74.0	54.0	-21.04	Vertical	Pass
11020.500	60.21	49.56	10.11	74.0	54.0	-4.44	Vertical	Pass
14422.250	61.11	50.95	11.16	74.0	54.0	-3.05	Vertical	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

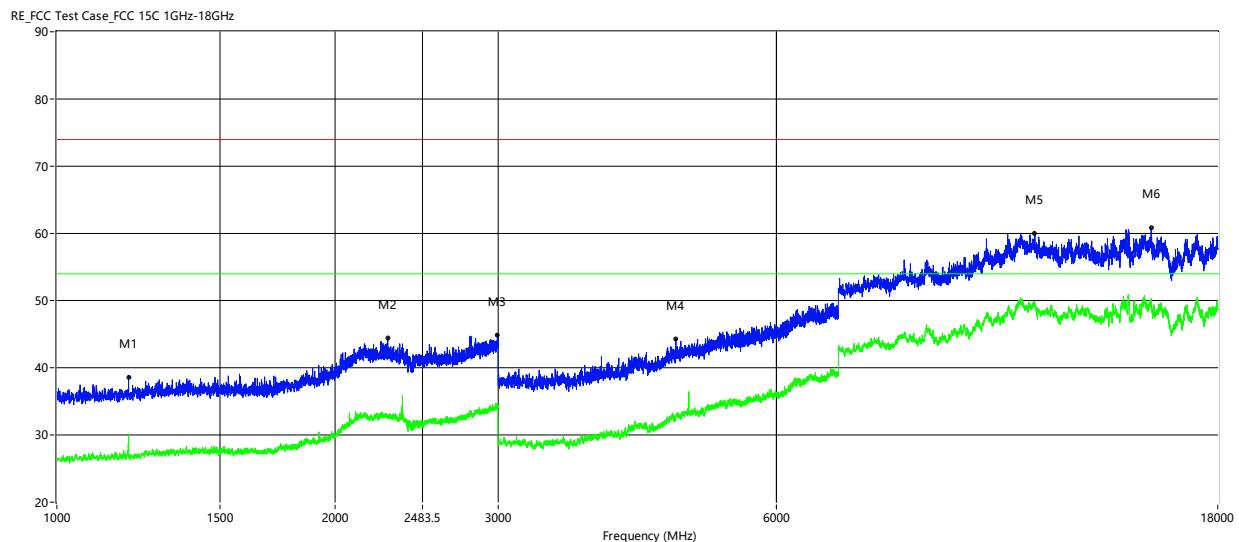HARMONICS AND SPURIOUS EMISSIONS (06 CHANNEL, HORIZONTAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1195.500	38.53	30.01	-1.23	74.0	54.0	-23.99	Horizontal	Pass
2279.500	44.43	32.91	4.60	74.0	54.0	-21.09	Horizontal	Pass
2994.500	44.91	33.98	6.09	74.0	54.0	-20.02	Horizontal	Pass
4670.000	44.35	32.82	-7.47	74.0	54.0	-21.18	Horizontal	Pass
11419.250	59.98	49.40	9.78	74.0	54.0	-4.60	Horizontal	Pass
15252.750	60.79	50.30	10.48	74.0	54.0	-3.70	Horizontal	Pass

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

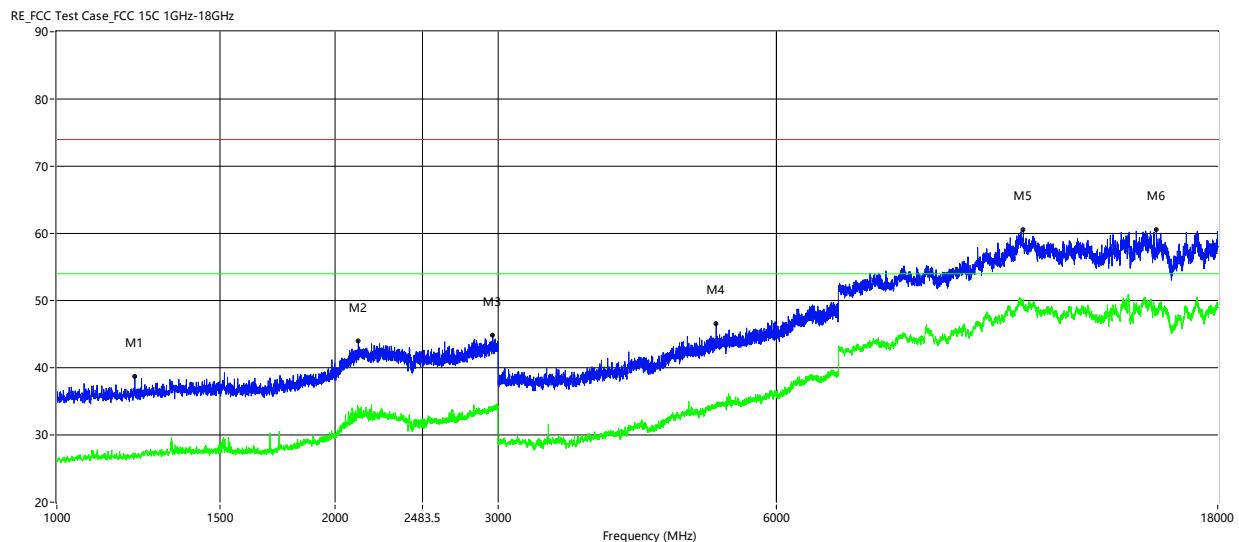HARMONICS AND SPURIOUS EMISSIONS (06 CHANNEL, VERTICAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1214.000	38.72	27.03	-1.13	74.0	54.0	-26.97	Vertical	Pass
2118.000	43.99	33.25	4.09	74.0	54.0	-20.75	Vertical	Pass
2961.000	44.89	33.72	5.94	74.0	54.0	-20.28	Vertical	Pass
5163.000	46.61	34.31	-5.12	74.0	54.0	-19.69	Vertical	Pass
11094.750	60.63	50.21	9.71	74.0	54.0	-3.79	Vertical	Pass
15456.250	60.63	48.66	10.78	74.0	54.0	-5.34	Vertical	Pass

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

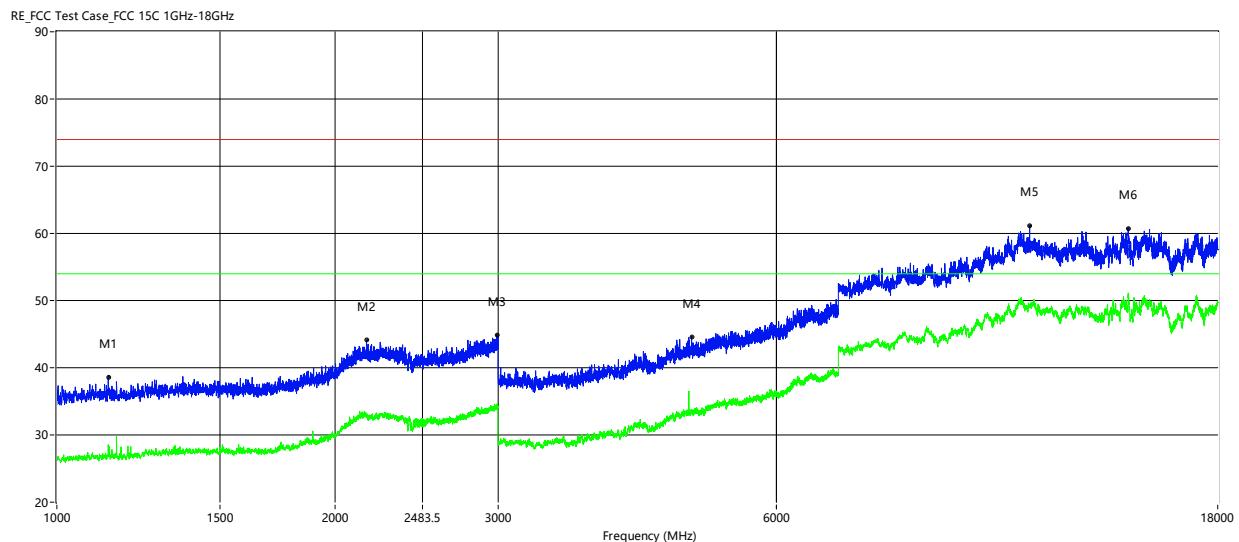
HARMONICS AND SPURIOUS EMISSIONS (11 CHANNEL, HORIZONTAL)

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1136.500	38.53	28.55	-1.41	74.0	54.0	-25.45	Horizontal	Pass
2161.500	44.13	32.80	4.51	74.0	54.0	-21.20	Horizontal	Pass
2990.000	44.84	34.21	6.07	74.0	54.0	-19.79	Horizontal	Pass
4857.000	44.60	33.68	-6.64	74.0	54.0	-20.32	Horizontal	Pass
11270.750	61.16	49.39	9.55	74.0	54.0	-4.61	Horizontal	Pass
14403.000	60.74	50.86	11.39	74.0	54.0	-3.14	Horizontal	Pass

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.

HARMONICS AND SPURIOUS EMISSIONS (11 CHANNEL, VERTICAL)

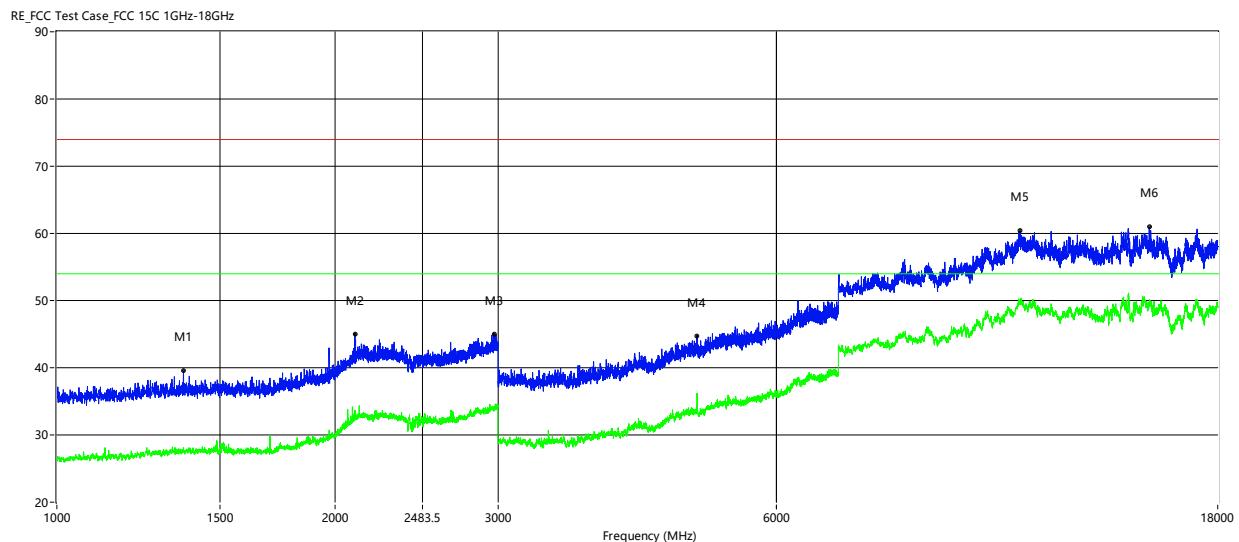

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1370.500	39.56	28.14	-0.74	74.0	54.0	-25.86	Vertical	Pass
2100.500	45.02	33.63	3.80	74.0	54.0	-20.37	Vertical	Pass
2970.500	45.06	34.04	5.98	74.0	54.0	-19.96	Vertical	Pass
4923.000	44.78	34.04	-6.39	74.0	54.0	-19.96	Vertical	Pass
11004.000	60.37	49.94	10.20	74.0	54.0	-4.06	Vertical	Pass
15178.500	60.95	49.73	10.88	74.0	54.0	-4.27	Vertical	Pass

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier + BRF Factor.
2. Margin = Limit - Emission Level
3. Tests were performed in three frequency range 1GHz~3GHz, 3GHz~13GHz, 13GHz~18GHz.
4. Above 18GHz emissions are mainly from the environment noise, not show in report.



9.4. SPURIOUS EMISSIONS BELOW 30M

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuv) + distance extrapolation factor.


10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

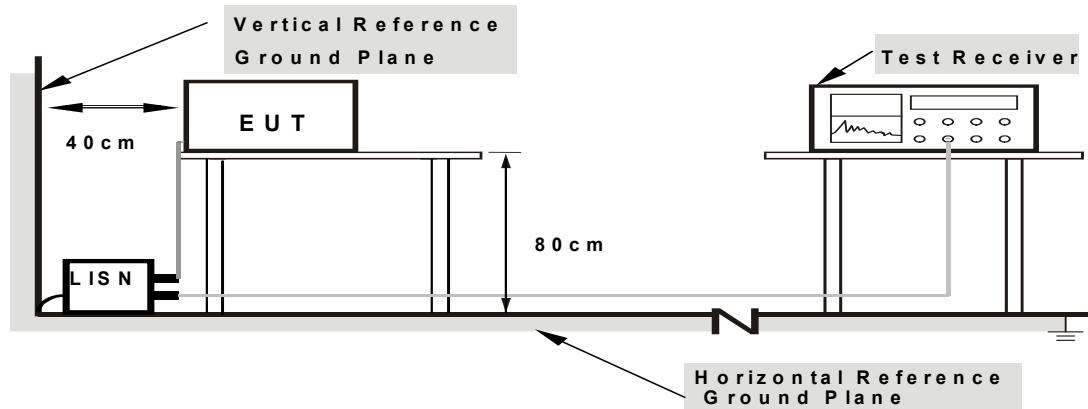


Note:
1. Support units were connected to second LISN.
2. Both of LISNs (A.M.N) are 80 cm from EUT and at least 80 cm from other units and other metal planes

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT


Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

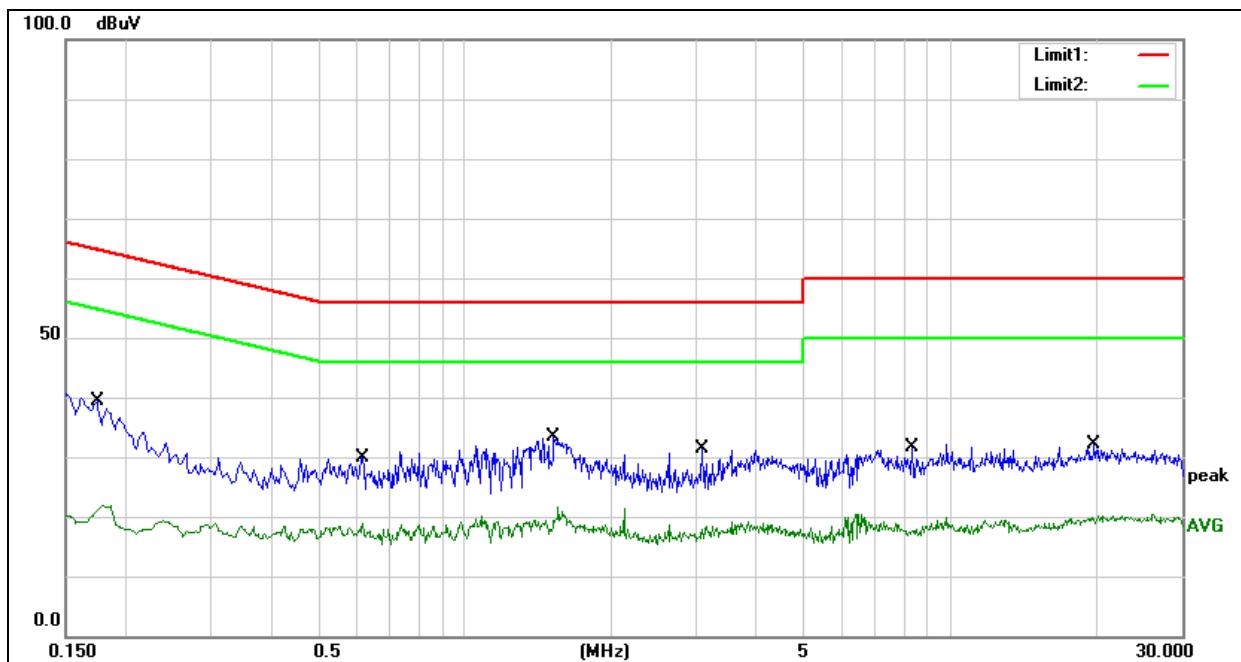TEST RESULTS
Neutral N RESULTS


No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1740	19.09	20.33	39.42	64.77	-25.35	QP
2	0.1740	1.35	20.33	21.68	54.77	-33.09	AVG
3	0.6140	9.50	20.43	29.93	56.00	-26.07	QP
4	0.6140	-1.44	20.43	18.99	46.00	-27.01	AVG
5	1.5260	13.12	20.30	33.42	56.00	-22.58	QP
6	1.5260	-0.94	20.30	19.36	46.00	-26.64	AVG
7	3.0820	11.06	20.35	31.41	56.00	-24.59	QP
8	3.0820	-2.28	20.35	18.07	46.00	-27.93	AVG
9	8.3380	10.84	20.86	31.70	60.00	-28.30	QP
10	8.3380	-3.27	20.86	17.59	50.00	-32.41	AVG
11	19.7780	9.21	22.85	32.06	60.00	-27.94	QP
12	19.7780	-3.06	22.85	19.79	50.00	-30.21	AVG

Note:

1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

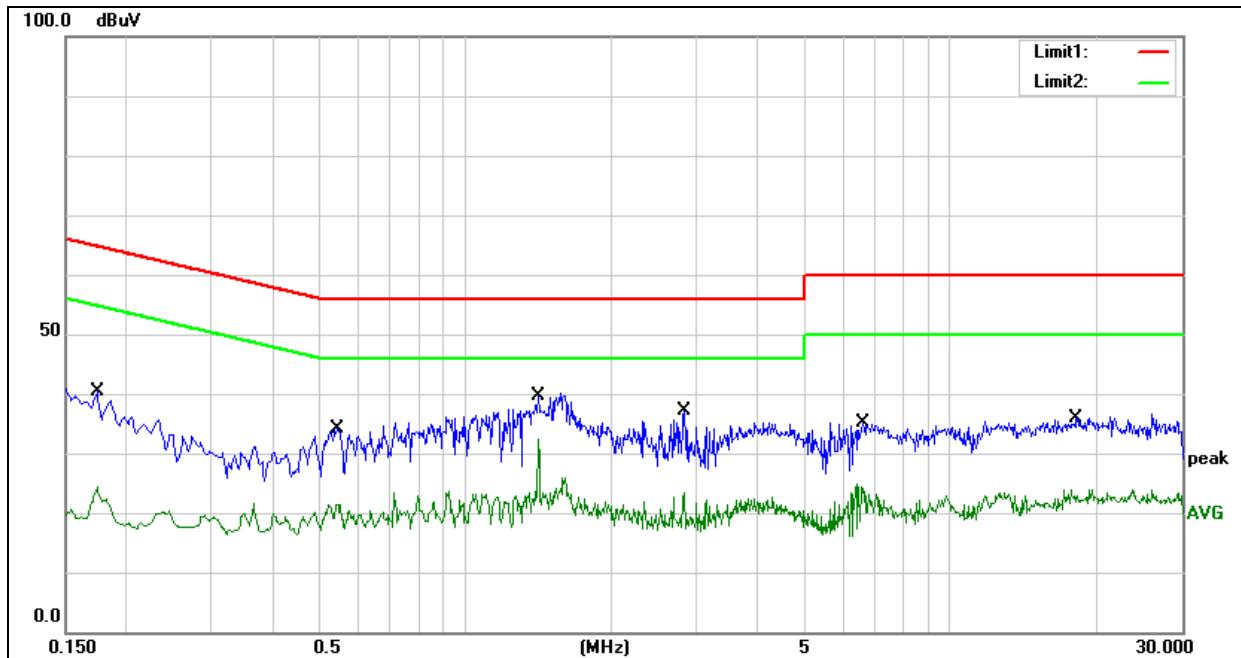LINE L RESULTS

No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1740	19.93	20.33	40.26	64.77	-24.51	QP
2	0.1740	3.94	20.33	24.27	54.77	-30.50	AVG
3	0.5460	13.52	20.50	34.02	56.00	-21.98	QP
4	0.5460	0.99	20.50	21.49	46.00	-24.51	AVG
5	1.4180	19.31	20.30	39.61	56.00	-16.39	QP
6	1.4180	12.16	20.30	32.46	46.00	-13.54	AVG
7	2.8260	16.80	20.34	37.14	56.00	-18.86	QP
8	2.8260	3.08	20.34	23.42	46.00	-22.58	AVG
9	6.5940	14.63	20.56	35.19	60.00	-24.81	QP
10	6.5940	3.90	20.56	24.46	50.00	-25.54	AVG
11	18.1420	13.46	22.47	35.93	60.00	-24.07	QP
12	18.1420	0.66	22.47	23.13	50.00	-26.87	AVG

Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



11. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA CONNECTOR

EUT has a PCB Antenna without antenna connector.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.



Test photos

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

END OF REPORT