



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

Test Report

Report No. : CQASZ20210400020EX-01

Applicant: Shenzhen Ranboda Technology Co., Ltd
Address of Applicant: Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China

Manufacturer: Shenzhen Ranboda Technology Co., Ltd
Address of Manufacturer: Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China

Equipment Under Test (EUT):

Product: Android player

All Model No.: truDigital x3

Test Model No.: truDigital x3

Brand Name: /

FCC ID: 2AY9T-TRUDX3

Standards: 47 CFR FCC Part 15 Subpart C 15.247

Date of Test: Mar. 22, 2021 – Apr. 16, 2021

Date of Issue: Apr. 16, 2021

Test Result : PASS

Tested By:

Jun Li

(Jun Li)

Reviewed By:

Ares Liu

(Ares Liu)

Approved By:

Sheek Luo

(Sheek Luo)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210400020EX-01	Rev.01	Initial report	Apr. 16, 2021

Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

Contents

	Page
VERSION.....	2
TEST SUMMARY.....	3
CONTENTS.....	4
GENERAL INFORMATION.....	5
CLIENT INFORMATION.....	5
GENERAL DESCRIPTION OF EUT.....	5
TEST ENVIRONMENT.....	6
DESCRIPTION OF SUPPORT UNITS.....	7
TEST LOCATION.....	7
TEST FACILITY.....	7
STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	8
DEVIATION FROM STANDARDS.....	8
ABNORMALITIES FROM STANDARD CONDITIONS.....	8
OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
EQUIPMENT LIST.....	9
TEST RESULTS AND MEASUREMENT DATA.....	10
ANTENNA REQUIREMENT.....	10
CONDUCTED EMISSIONS.....	11
CONDUCTED PEAK & AVERAGE OUTPUT POWER.....	14
6dB OCCUPY BANDWIDTH.....	15
POWER SPECTRAL DENSITY.....	20
BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	26
RF CONDUCTED SPURIOUS EMISSIONS.....	30
RADIATED SPURIOUS EMISSIONS.....	44
<i>Radiated emission below 1GHz.....</i>	<i>47</i>
<i>Transmitter emission above 1GHz.....</i>	<i>49</i>
RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	54
PHOTOGRAPHS - EUT TEST SETUP.....	60
RADIATED EMISSION.....	60
PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	62

General Information

Client Information

Applicant:	Shenzhen Ranboda Technology Co., Ltd
Address of Applicant:	Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Ranboda Technology Co., Ltd
Address of Manufacturer:	Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China

General Description of EUT

Product Name:	Android player
Test Model No.:	truDigital x3
Trade Mark:	/
Hardware Version:	V1.1
Software Version:	V1.0
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(H40): 2422MHz~2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM IEEE for 802.11n(HT20): OFDM IEEE for 802.11n(HT40): OFDM
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location
Antenna Type	Glue stick antenna
Antenna Gain	0dBi
Power Supply:	DC 5V from adapter
Adapter Information:	AC/DC ADAPTER MODEL: 05020002 INPUT:110-240V AC 50/60Hz 0.5A OUTPUT: DC 5V 2A

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note: Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

Test Environment

Operating Environment:	
Conduction emission	
Temperature:	23 °C
Humidity:	51 % RH
Atmospheric Pressure:	992mbar
Radiated Emission (Normal Conditions)	
Temperature:	25.1 °C~25.5 °C
Humidity:	51 % RH~55 % RH
Atmospheric Pressure:	992mbar
RF item test (RF test room Normal Conditions)	
Temperature:	26 °C~27.3 °C
Humidity:	58 % RH~59 % RH
Atmospheric Pressure:	992mbar
Transmitting mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

Note: In the process of transmitting of EUT, the duty cycle >98%.

Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	certification
AC/DC ADAPTER	/	MODEL: 05020002 INPUT:110-240V 50/60Hz 0.5A OUTPUT: DC 5V 2A	Provide by applicant	SDOC
/	/	/	/	/

Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Deviation from Standards

None.

Abnormalities from Standard Conditions

None.

Other Information Requested by the Customer

None.

Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/9/22	2021/9/21
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/24	2021/10/23
Spectrum analyzer	keysight	N9020A	CQA-105	2020/10/24	2021/10/23
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2020/9/22	2021/9/21
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2020/9/22	2021/9/21
Horn Antenna	R&S	HF906	CQA-012	2020/9/22	2021/9/21
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/9/22	2021/9/21
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/9/22	2021/9/21
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/9/22	2021/9/21
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/22	2021/9/21
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/22	2021/9/21
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2020/9/22	2021/9/21
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2020/9/22	2021/9/21
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/22	2021/9/21
EMI Test Receiver	R&S	ESPI3	CQA-013	2020/9/22	2021/9/21
LISN	R&S	ENV216	CQA-003	2021/11/1	2021/10/30
Coaxial cable	CQA	N/A	CQA-C009	2020/9/22	2021/9/21

Test results and Measurement Data

Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Antenna 
The antenna is Glue stick antenna. The best case gain of the antenna is 0dBi.	

Conducted Emissions

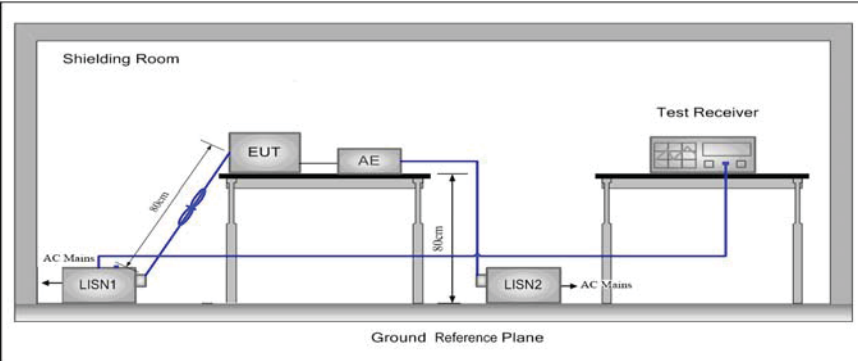
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.		

Final Test Mode:	All wifi modes of 5.2G/5.8G were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below
Test Voltage:	AC110V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

80.0 dBuV

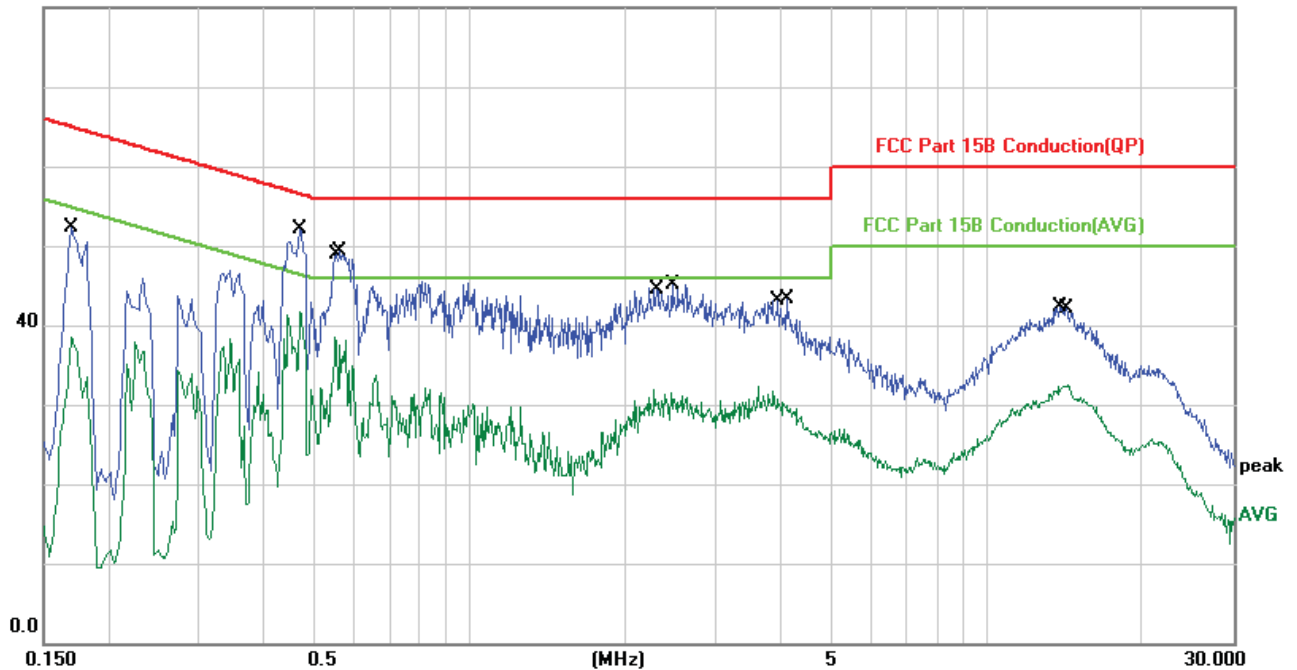


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	52.41	-0.13	52.28	64.96	-12.68	QP	
2		0.1700	38.54	-0.13	38.41	54.96	-16.55	AVG	
3	*	0.4700	52.15	-0.02	52.13	56.51	-4.38	QP	
4		0.4700	41.79	-0.02	41.77	46.51	-4.74	AVG	
5		0.5500	38.57	-0.04	38.53	46.00	-7.47	AVG	
6		0.5620	49.26	-0.04	49.22	56.00	-6.78	QP	
7		2.2780	32.13	-0.25	31.88	46.00	-14.12	AVG	
8		2.4620	45.33	-0.20	45.13	56.00	-10.87	QP	
9		3.9580	30.99	-0.20	30.79	46.00	-15.21	AVG	
10		4.0939	43.41	-0.20	43.21	56.00	-12.79	QP	
11		13.9060	42.46	-0.19	42.27	60.00	-17.73	QP	
12		14.2900	32.65	-0.20	32.45	50.00	-17.55	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

80.0 dBuV

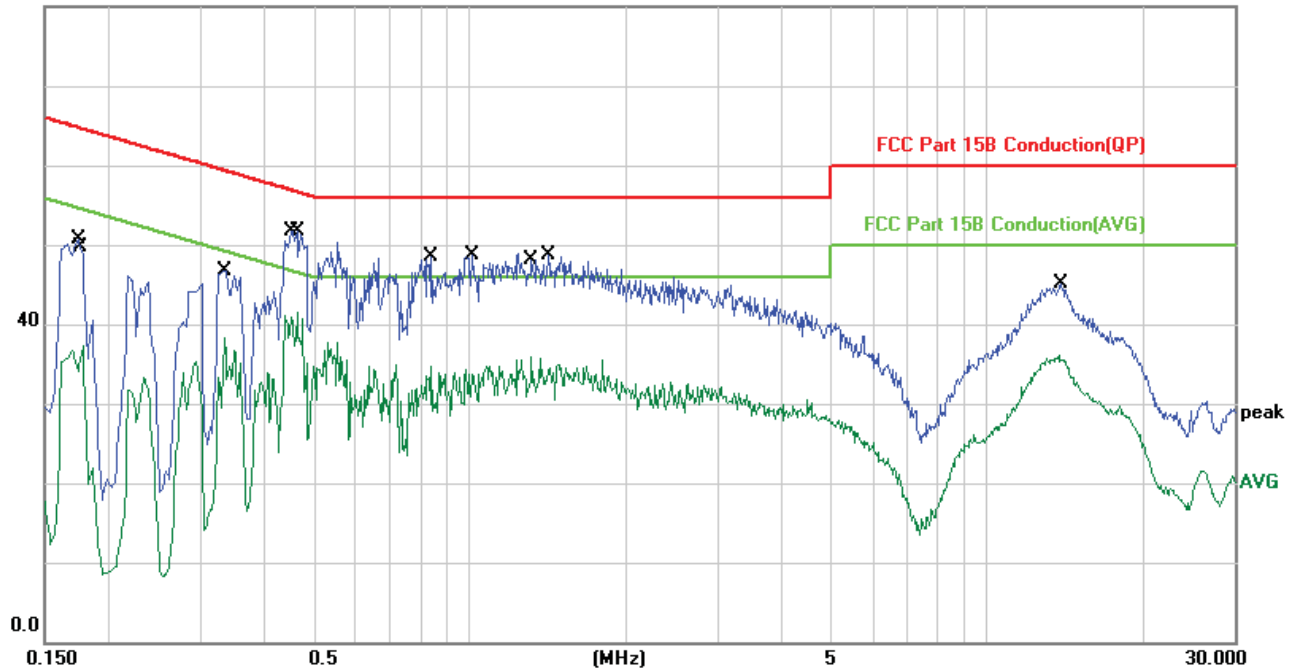


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1740	50.86	-0.13	50.73	64.76	-14.03	QP	
2		0.1780	37.34	-0.13	37.21	54.57	-17.36	AVG	
3		0.3339	46.79	-0.02	46.77	59.35	-12.58	QP	
4		0.3339	38.24	-0.02	38.22	49.35	-11.13	AVG	
5		0.4500	51.73	-0.02	51.71	56.87	-5.16	QP	
6	*	0.4620	41.58	-0.02	41.56	46.66	-5.10	AVG	
7		0.8420	34.77	-0.08	34.69	46.00	-11.31	AVG	
8		1.0060	48.79	-0.12	48.67	56.00	-7.33	QP	
9		1.3140	36.03	-0.17	35.86	46.00	-10.14	AVG	
10		1.4180	48.80	-0.18	48.62	56.00	-7.38	QP	
11		13.7300	36.35	-0.18	36.17	50.00	-13.83	AVG	
12		13.9020	45.31	-0.18	45.13	60.00	-14.87	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

WIFI (2.4G)

Type	Test channel	Peak Output Power (dBm)	AVG Output Power (dBm)	Limit (dBm)	Result
802.11b	Lowest	15.013	11.39	30.00	Pass
	Middle	16.338	13.84		
	Highest	16.464	12.68		
802.11g	Lowest	11.934	9.14	30.00	Pass
	Middle	12.948	9.47		
	Highest	13.881	11.49		
802.11n(HT20)	Lowest	10.812	8.46	30.00	Pass
	Middle	11.134	8.88		
	Highest	12.00	8.75		
802.11n(HT40)	Lowest	10.282	7.37	30.00	Pass
	Middle	10.687	8.67		
	Highest	11.311	9.19		

6dB Occupy Bandwidth



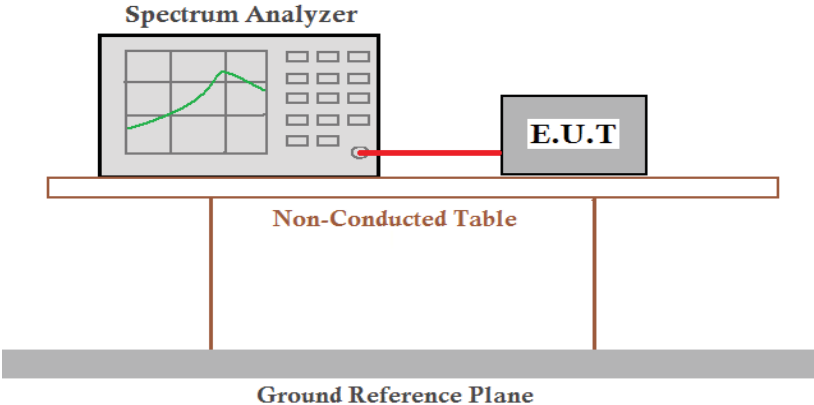
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass




Measurement Data




Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	Lowest	9.092	≥500	Pass
	Middle	9.090		
	Highest	9.108		
802.11g	Lowest	12.58	≥500	Pass
	Middle	11.29		
	Highest	12.55		
802.11n(HT20)	Lowes	7.284	≥500	Pass
	Middle	12.60		
	Highest	10.09		
802.11n(HT40)	Lowest	27.57	≥500	Pass
	Middle	31.35		
	Highest	31.38		

Test plot as follows:

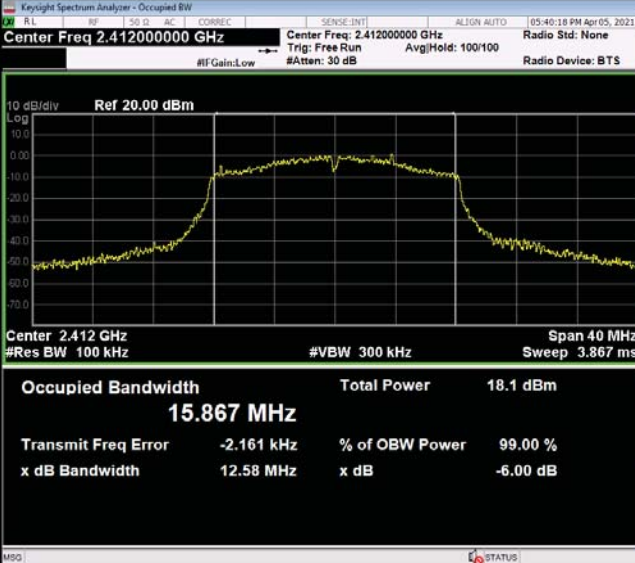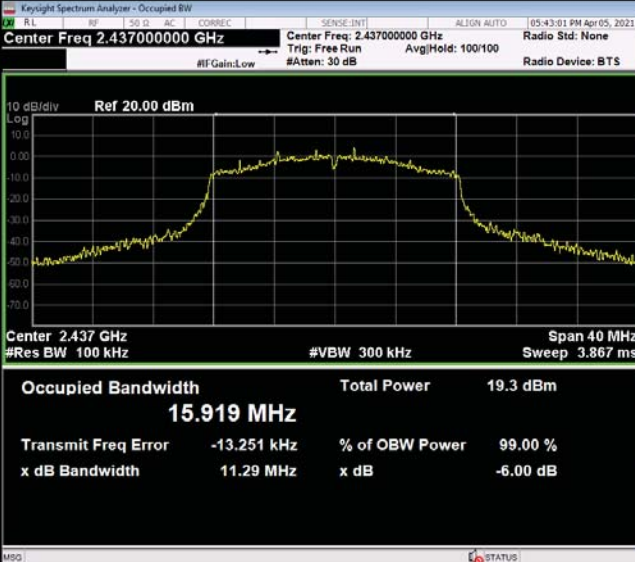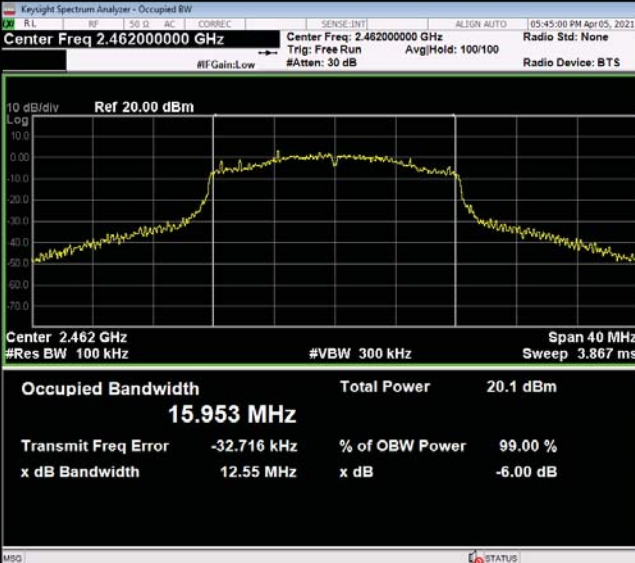


11G/LCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 15.867 MHz Total Power 18.1 dBm Transmit Freq Error -2.161 kHz % of OBW Power 99.00 % x dB Bandwidth 12.58 MHz x dB -6.00 dB Frequency Center Freq 2.412000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz Auto MSG STATUS
11G/MCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 15.919 MHz Total Power 19.3 dBm Transmit Freq Error -13.251 kHz % of OBW Power 99.00 % x dB Bandwidth 11.29 MHz x dB -6.00 dB Frequency Center Freq 2.437000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz Auto MSG STATUS
11G/HCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 15.953 MHz Total Power 20.1 dBm Transmit Freq Error -32.716 kHz % of OBW Power 99.00 % x dB Bandwidth 12.55 MHz x dB -6.00 dB Frequency Center Freq 2.462000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz Auto MSG STATUS

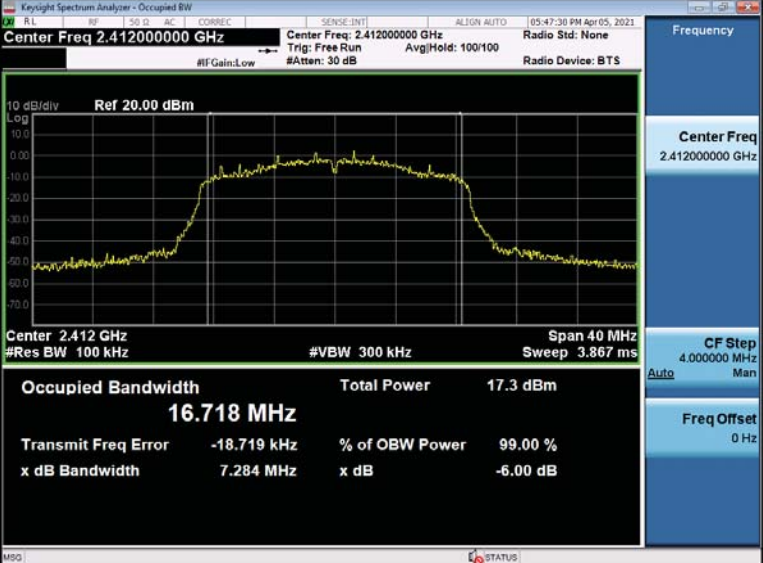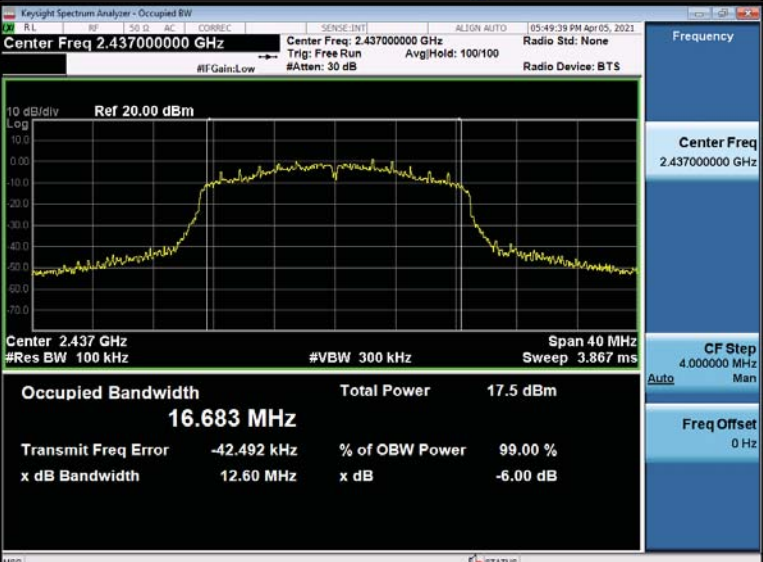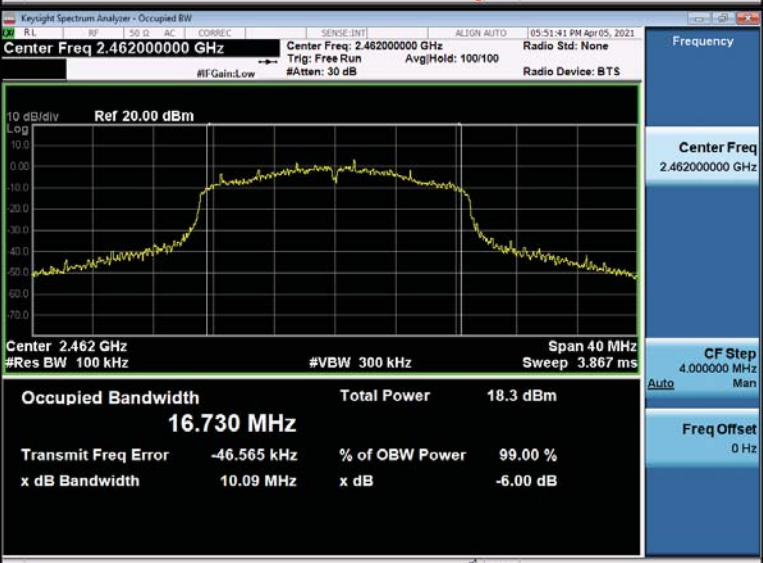11N20/LCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.718 MHz Total Power 17.3 dBm Transmit Freq Error -18.719 kHz % of OBW Power 99.00 % x dB Bandwidth 7.284 MHz x dB -6.00 dB Frequency Center Freq 2.412000000 GHz CF Step 4.000000 MHz Man Auto Freq Offset 0 Hz
11N20/MCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.683 MHz Total Power 17.5 dBm Transmit Freq Error -42.492 kHz % of OBW Power 99.00 % x dB Bandwidth 12.60 MHz x dB -6.00 dB Frequency Center Freq 2.437000000 GHz CF Step 4.000000 MHz Man Auto Freq Offset 0 Hz
11N20/HCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.730 MHz Total Power 18.3 dBm Transmit Freq Error -46.565 kHz % of OBW Power 99.00 % x dB Bandwidth 10.09 MHz x dB -6.00 dB Frequency Center Freq 2.462000000 GHz CF Step 4.000000 MHz Man Auto Freq Offset 0 Hz

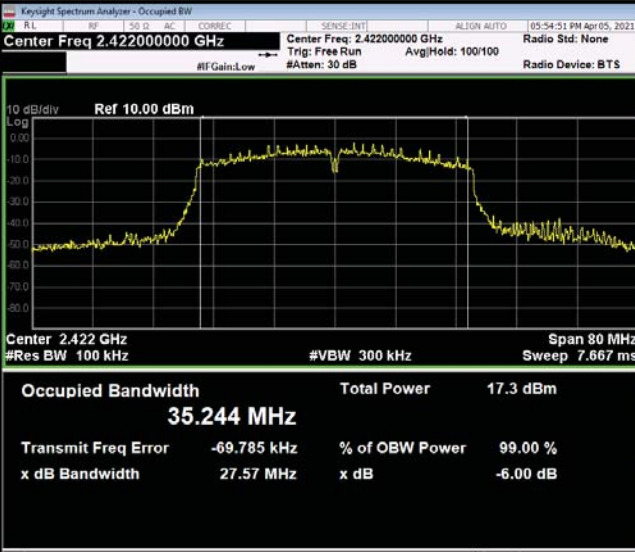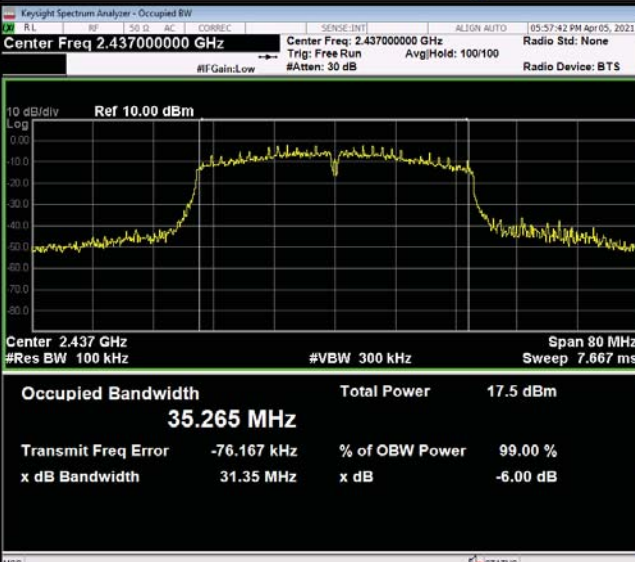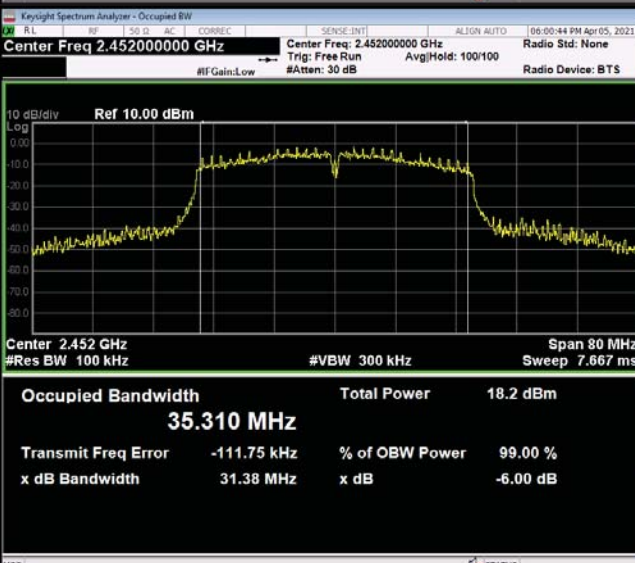11N40/LCH	 Center Freq 2.422000000 GHz Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 35.244 MHz Total Power 17.3 dBm Transmit Freq Error -69.785 kHz % of OBW Power 99.00 % x dB Bandwidth 27.57 MHz x dB -6.00 dB
11N40/MCH	 Center Freq 2.437000000 GHz Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 35.265 MHz Total Power 17.5 dBm Transmit Freq Error -76.167 kHz % of OBW Power 99.00 % x dB Bandwidth 31.35 MHz x dB -6.00 dB
11N40/HCH	 Center Freq 2.452000000 GHz Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 35.310 MHz Total Power 18.2 dBm Transmit Freq Error -111.75 kHz % of OBW Power 99.00 % x dB Bandwidth 31.38 MHz x dB -6.00 dB


Power Spectral Density



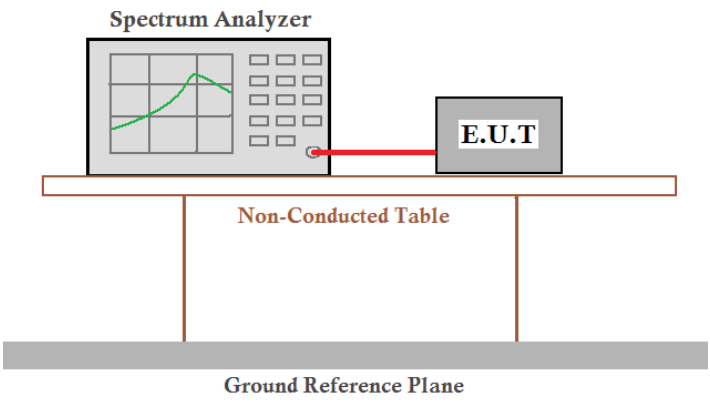
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass



Measurement Data


Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.1b	Lowes	-6.948	8	Pass
	Middle	-6.396		
	Highest	-5.703		
802.11g	Lowest	-11.830	8	Pass
	Middle	-11.217		
	Highest	-10.603		
802.11n(HT20)	Lowest	-12.199	8	Pass
	Middle	-12.516		
	Highest	-11.010		
802.11n(HT40)	Lowest	-11.760	8	Pass
	Middle	-12.305		
	Highest	-12.535		

Test plot as follows:

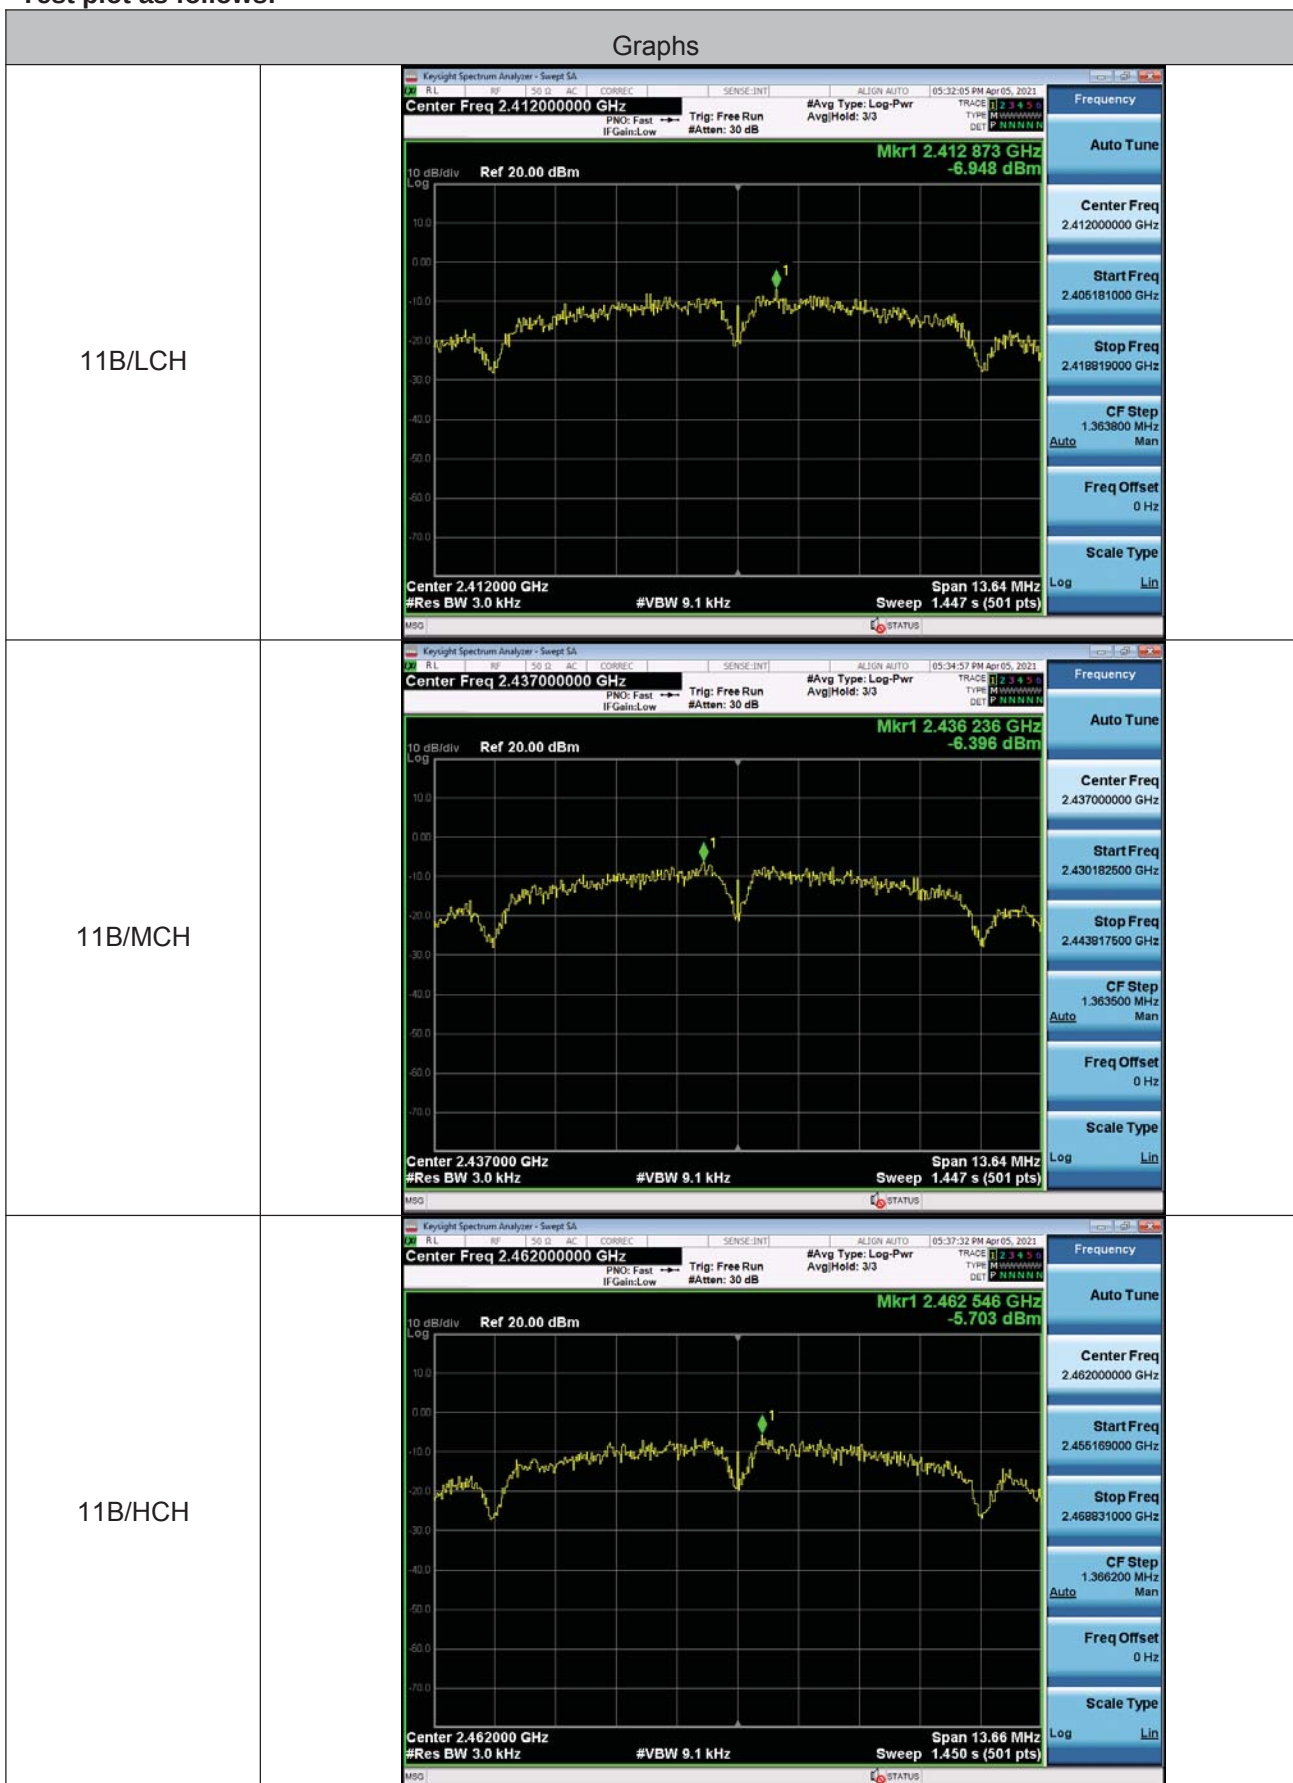


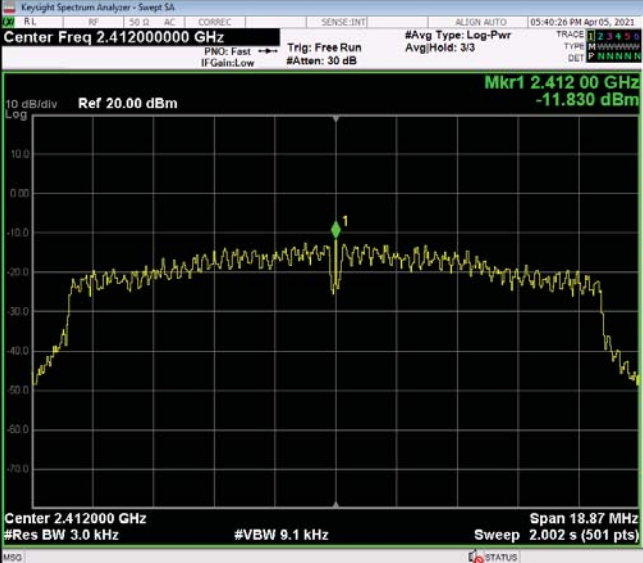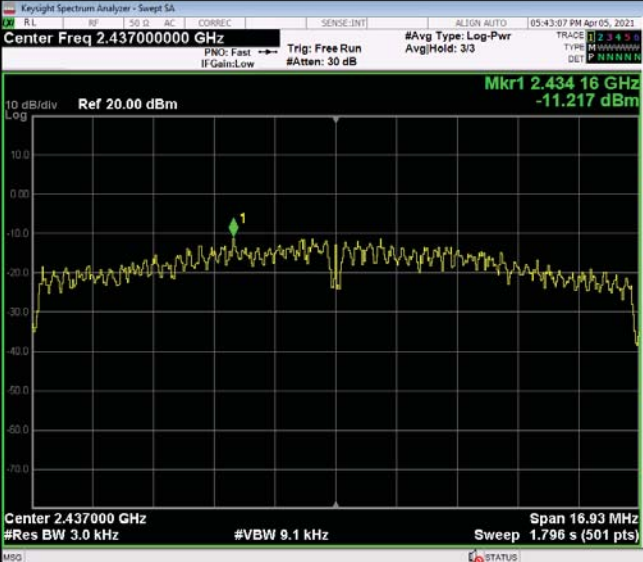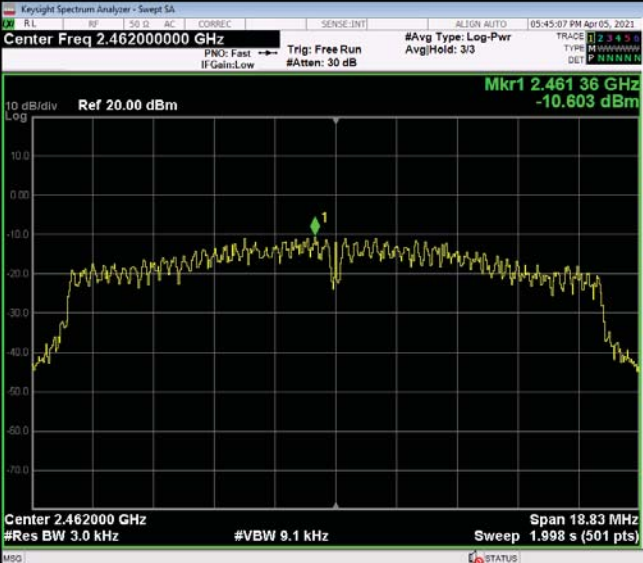11G/LCH	 KeySight Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref 20.00 dBm Mkr1 2.412 00 GHz -11.830 dBm Center 2.412000 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 18.87 MHz Sweep 2.002 s (501 pts)	Frequency Auto Tune Center Freq 2.41200000 GHz Start Freq 2.402566500 GHz Stop Freq 2.421433500 GHz CF Step 1.896700 MHz Man Freq Offset 0 Hz Scale Type Log Lin
11G/MCH	 KeySight Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref 20.00 dBm Mkr1 2.434 16 GHz -11.217 dBm Center 2.437000 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 16.93 MHz Sweep 1.796 s (501 pts)	Frequency Auto Tune Center Freq 2.43700000 GHz Start Freq 2.428534750 GHz Stop Freq 2.445465250 GHz CF Step 1.693050 MHz Man Freq Offset 0 Hz Scale Type Log Lin
11G/HCH	 KeySight Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref 20.00 dBm Mkr1 2.461 36 GHz -10.603 dBm Center 2.462000 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 18.83 MHz Sweep 1.998 s (501 pts)	Frequency Auto Tune Center Freq 2.46200000 GHz Start Freq 2.452565250 GHz Stop Freq 2.471414750 GHz CF Step 1.882950 MHz Man Freq Offset 0 Hz Scale Type Log Lin

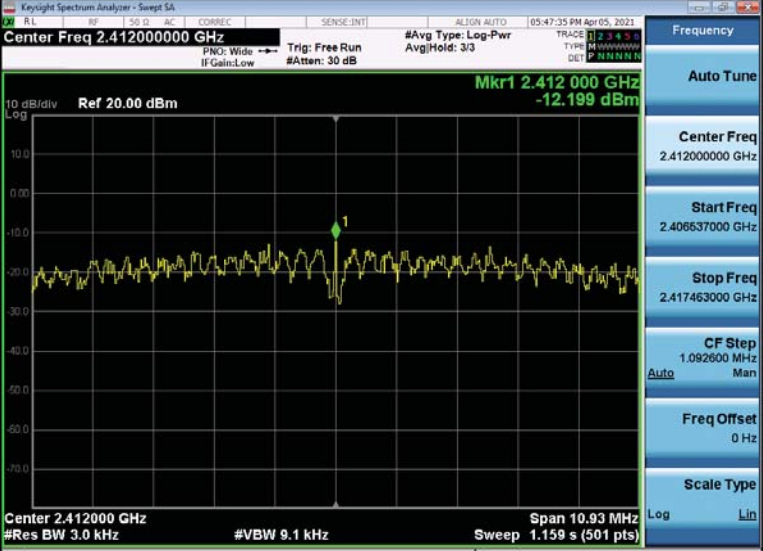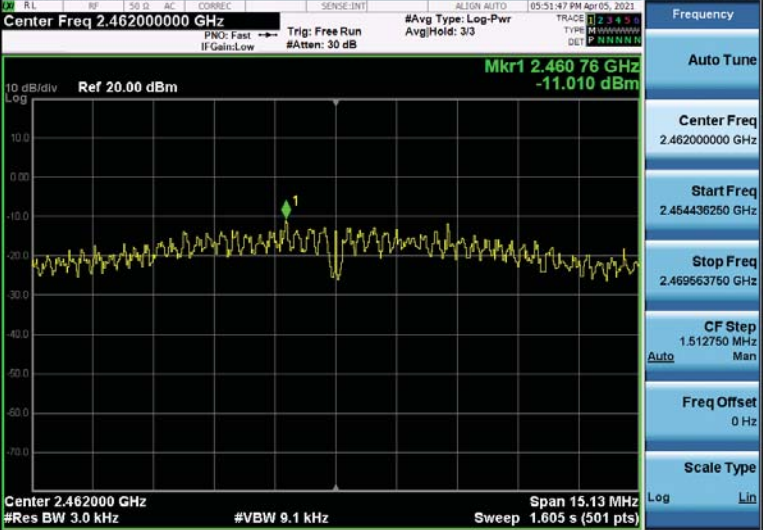11N20/LCH	
11N20/MCH	
11N20/HCH	

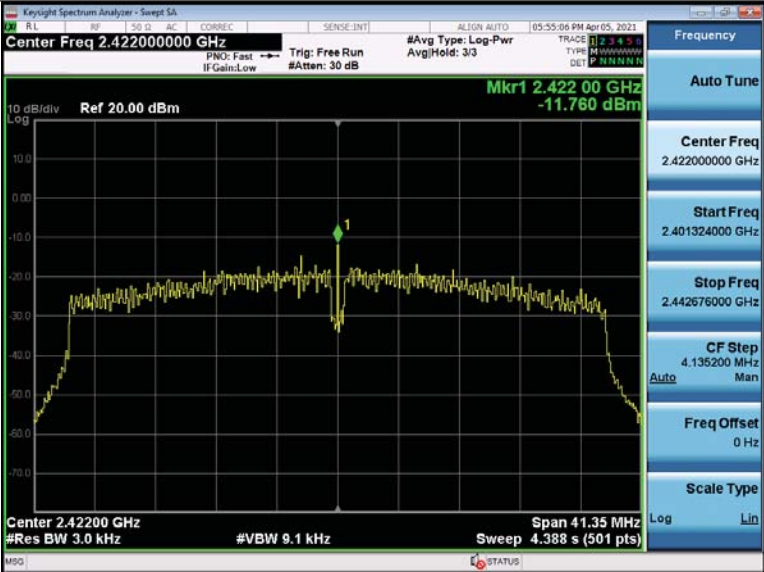11N40/LCH	 KeySight Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Mkr1 2.422 00 GHz -11.760 dBm Ref 20.00 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 41.35 MHz Sweep 4.388 s (501 pts) Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.401324000 GHz Stop Freq 2.442676000 GHz CF Step 4.135200 MHz Freq Offset 0 Hz Scale Type Log
11N40/MCH	 KeySight Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Mkr1 2.437 00 GHz -12.305 dBm Ref 20.00 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 47.02 MHz Sweep 4.989 s (501 pts) Frequency Auto Tune Center Freq 2.43700000 GHz Start Freq 2.413489000 GHz Stop Freq 2.460511000 GHz CF Step 4.702200 MHz Freq Offset 0 Hz Scale Type Log
11N40/HCH	 KeySight Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Mkr1 2.452 00 GHz -12.535 dBm Ref 20.00 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 47.06 MHz Sweep 4.994 s (501 pts) Frequency Auto Tune Center Freq 2.45200000 GHz Start Freq 2.428468000 GHz Stop Freq 2.475532000 GHz CF Step 4.706400 MHz Freq Offset 0 Hz Scale Type Log

Band-edge for RF Conducted Emissions

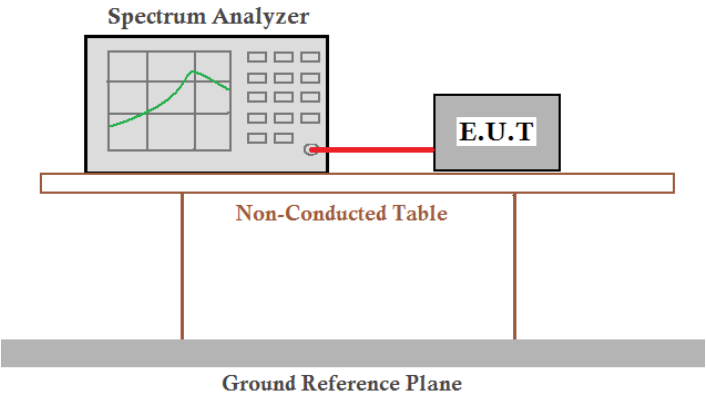Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test plot as follows:




11G/LCH	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.376000000 GHz Ref 20.00 dBm Mkr2 2.400 000 GHz -42.141 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.44200 GHz Sweep 12.67 ms (2001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-52.436 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-42.141 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.413 290 GHz</td><td>3.205 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.376000000 GHz Start Freq 2.310000000 GHz Stop Freq 2.442000000 GHz CF Step 13.200000 MHz Freq Offset 0 Hz Scale Type Log	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.390 000 GHz	-52.436 dBm				2	N	1	f	2.400 000 GHz	-42.141 dBm				4	N	1	f	2.413 290 GHz	3.205 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.390 000 GHz	-52.436 dBm																																
2	N	1	f	2.400 000 GHz	-42.141 dBm																																
4	N	1	f	2.413 290 GHz	3.205 dBm																																
11G/HCH	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.466000000 GHz Ref 20.00 dBm Mkr2 2.500 000 GHz -53.615 dBm Start 2.43200 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.533 ms (2001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-59.410 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-53.615 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.459 472 GHz</td><td>3.072 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.466000000 GHz Start Freq 2.432000000 GHz Stop Freq 2.500000000 GHz CF Step 6.800000 MHz Freq Offset 0 Hz Scale Type Log	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 500 GHz	-59.410 dBm				2	N	1	f	2.500 000 GHz	-53.615 dBm				4	N	1	f	2.459 472 GHz	3.072 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.483 500 GHz	-59.410 dBm																																
2	N	1	f	2.500 000 GHz	-53.615 dBm																																
4	N	1	f	2.459 472 GHz	3.072 dBm																																
11N20/LCH	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.376000000 GHz Ref 20.00 dBm Mkr2 2.400 000 GHz -44.660 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.44200 GHz Sweep 12.67 ms (2001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-52.414 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-44.660 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.409 528 GHz</td><td>0.621 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.376000000 GHz Start Freq 2.310000000 GHz Stop Freq 2.442000000 GHz CF Step 13.200000 MHz Freq Offset 0 Hz Scale Type Log	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.390 000 GHz	-52.414 dBm				2	N	1	f	2.400 000 GHz	-44.660 dBm				4	N	1	f	2.409 528 GHz	0.621 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.390 000 GHz	-52.414 dBm																																
2	N	1	f	2.400 000 GHz	-44.660 dBm																																
4	N	1	f	2.409 528 GHz	0.621 dBm																																

11N20/HCH	Keylight Spectrum Analyzer - Swept SA Center Freq 2.466000000 GHz Ref 20.00 dBm Mkr2 2.500 000 GHz -52.425 dBm Start 2.43200 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.533 ms (2001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-52.654 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-52.425 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.460 730 GHz</td><td>2.897 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.466000000 GHz Start Freq 2.432000000 GHz Stop Freq 2.500000000 GHz CF Step 6.800000 MHz Freq Offset 0 Hz Scale Type Log	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 500 GHz	-52.654 dBm				2	N	1	f	2.500 000 GHz	-52.425 dBm				4	N	1	f	2.460 730 GHz	2.897 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.483 500 GHz	-52.654 dBm																																
2	N	1	f	2.500 000 GHz	-52.425 dBm																																
4	N	1	f	2.460 730 GHz	2.897 dBm																																
11N40/LCH	Keylight Spectrum Analyzer - Swept SA Center Freq 2.396000000 GHz Ref 20.00 dBm Mkr2 2.400 000 GHz -43.972 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48200 GHz Sweep 16.53 ms (2001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-50.298 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-43.972 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.416 984 GHz</td><td>-2.587 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.396000000 GHz Start Freq 2.310000000 GHz Stop Freq 2.482000000 GHz CF Step 17.200000 MHz Freq Offset 0 Hz Scale Type Log	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.390 000 GHz	-50.298 dBm				2	N	1	f	2.400 000 GHz	-43.972 dBm				4	N	1	f	2.416 984 GHz	-2.587 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.390 000 GHz	-50.298 dBm																																
2	N	1	f	2.400 000 GHz	-43.972 dBm																																
4	N	1	f	2.416 984 GHz	-2.587 dBm																																
11N40/HCH	Keylight Spectrum Analyzer - Swept SA Center Freq 2.446000000 GHz Ref 20.00 dBm Mkr2 2.500 000 GHz -54.315 dBm Start 2.39200 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 10.40 ms (2001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-45.361 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-54.315 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.449 510 GHz</td><td>-1.442 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.446000000 GHz Start Freq 2.392000000 GHz Stop Freq 2.500000000 GHz CF Step 10.800000 MHz Freq Offset 0 Hz Scale Type Log	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 500 GHz	-45.361 dBm				2	N	1	f	2.500 000 GHz	-54.315 dBm				4	N	1	f	2.449 510 GHz	-1.442 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.483 500 GHz	-45.361 dBm																																
2	N	1	f	2.500 000 GHz	-54.315 dBm																																
4	N	1	f	2.449 510 GHz	-1.442 dBm																																



RF Conducted Spurious Emissions

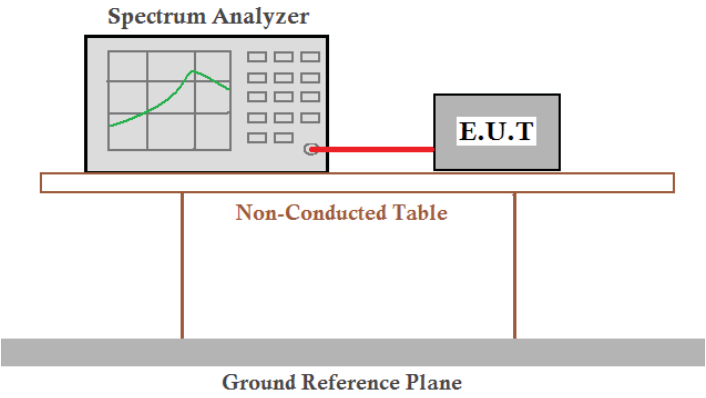Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass




Test plot as follows:

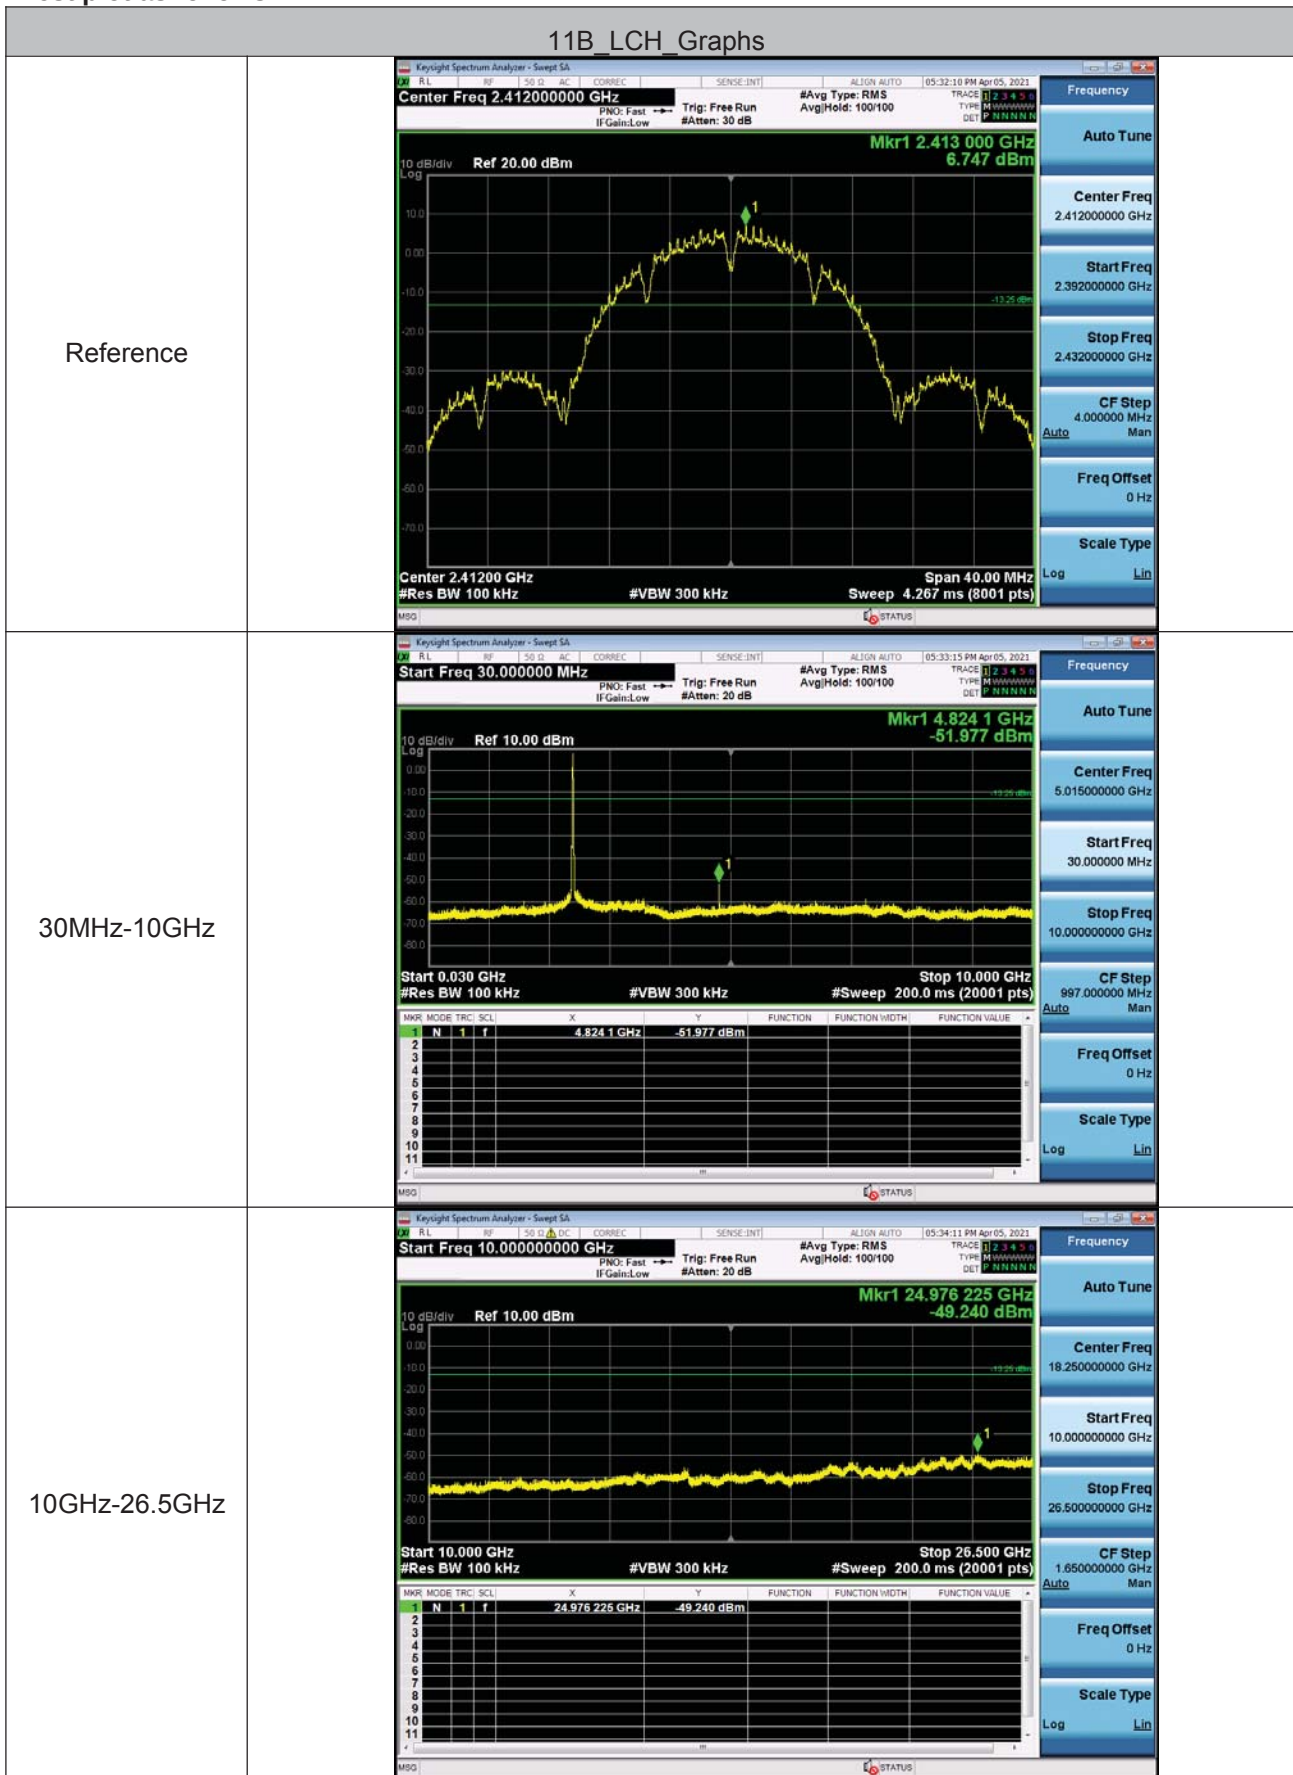

11B_MCH_Graphs

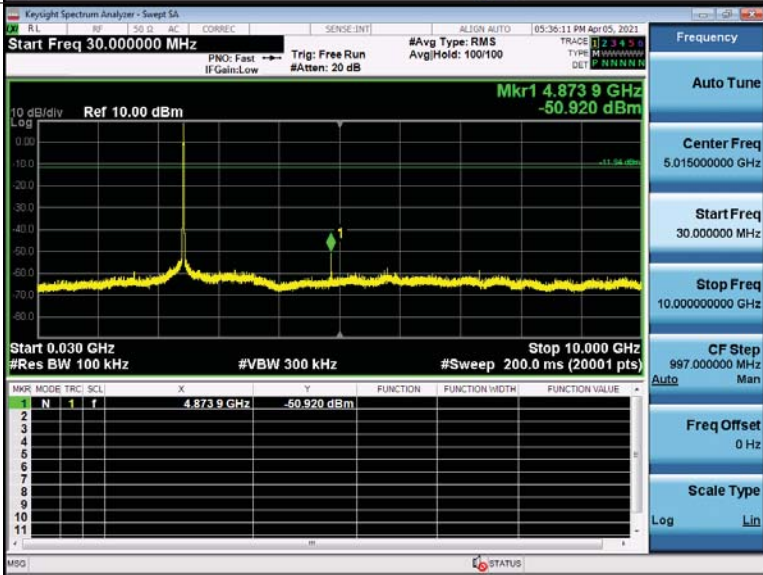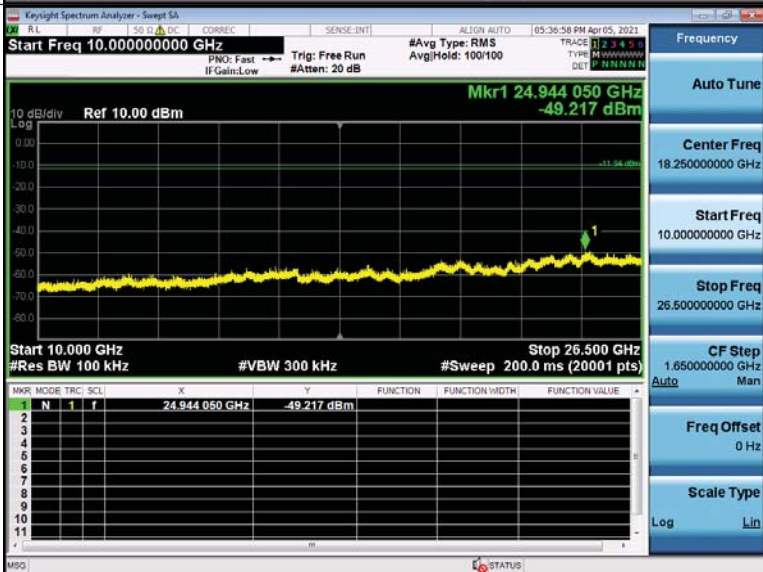
Reference	 Keylight Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref 20.00 dBm Mkr1 2.437 510 GHz 8.055 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Span 40.00 MHz Sweep 4.267 ms (8001 pts)
30MHz-10GHz	 Keylight Spectrum Analyzer - Swept SA Start Freq 30.000000 MHz Ref 10.00 dBm Mkr1 4.873 9 GHz -50.920 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Stop 10.000 GHz #Sweep 200.0 ms (20001 pts)
10GHz-26.5GHz	 Keylight Spectrum Analyzer - Swept SA Start Freq 10.00000000 GHz Ref 10.00 dBm Mkr1 24.944 050 GHz -49.217 dBm Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 26.500 GHz #Sweep 200.0 ms (20001 pts)

11B_HCH_Graphs

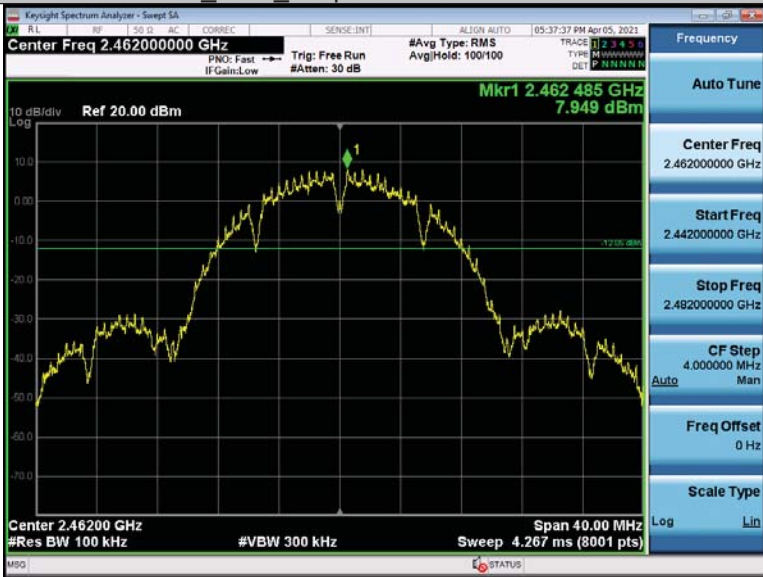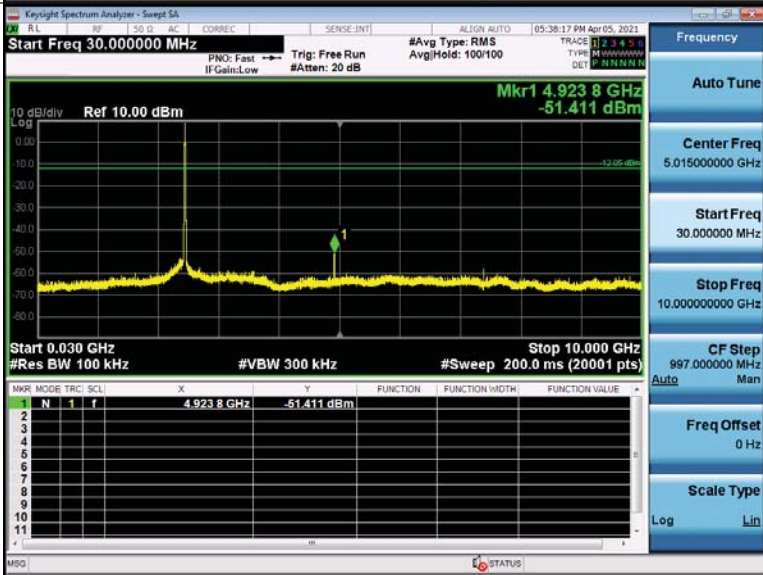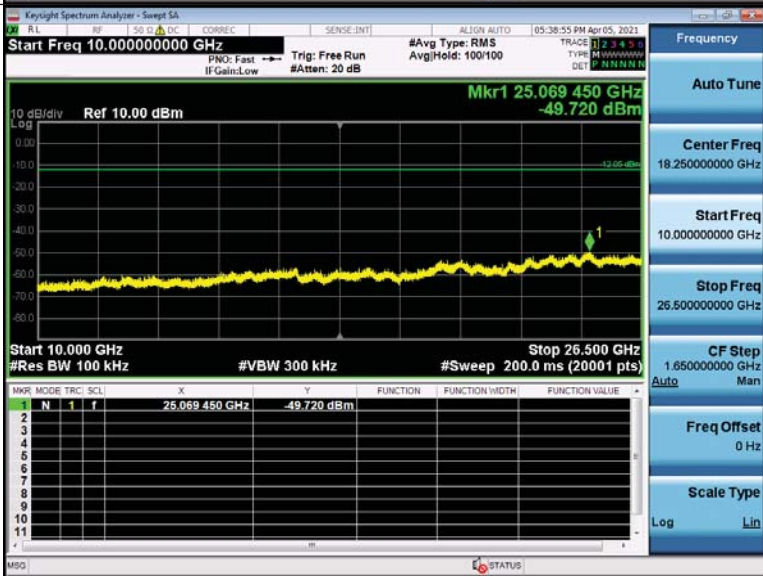
Reference	 Keylight Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref 20.00 dBm Mkr1 2.462 485 GHz 7.949 dBm Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Span 40.00 MHz Sweep 4.267 ms (8001 pts)
30MHz-10GHz	 Keylight Spectrum Analyzer - Swept SA Start Freq 30.000000 MHz Ref 10.00 dBm Mkr1 4.923 8 GHz -51.411 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Stop 10.000 GHz #Sweep 200.0 ms (20001 pts)
10GHz-26.5GHz	 Keylight Spectrum Analyzer - Swept SA Start Freq 10.00000000 GHz Ref 10.00 dBm Mkr1 25.069 450 GHz -49.720 dBm Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 26.500 GHz #Sweep 200.0 ms (20001 pts)

11G_LCH_Graphs


Reference

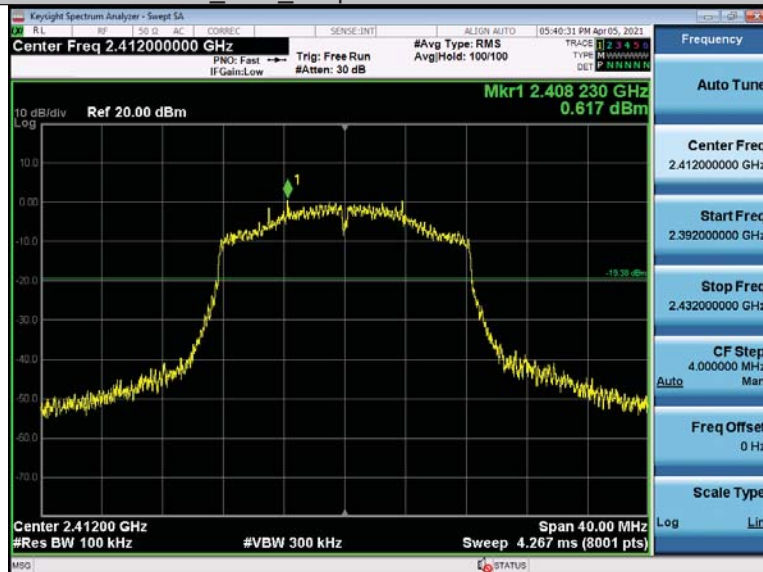

30MHz-10GHz

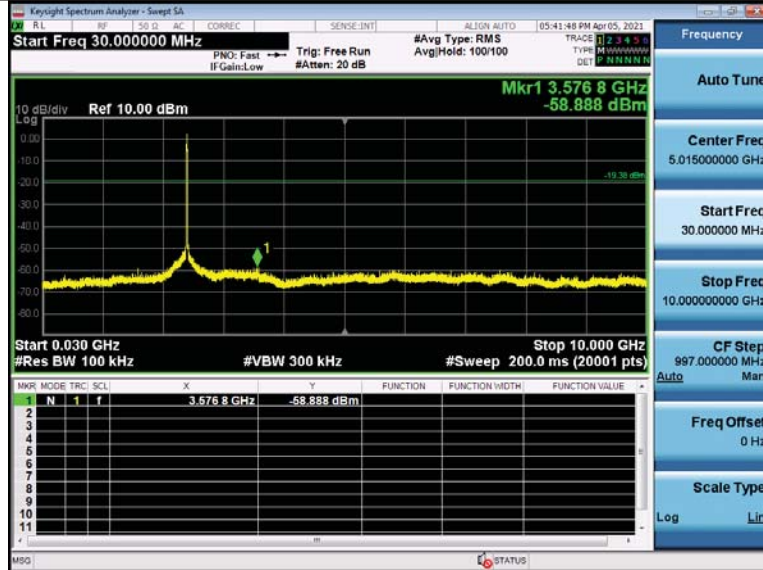

10GHz-26.5GHz

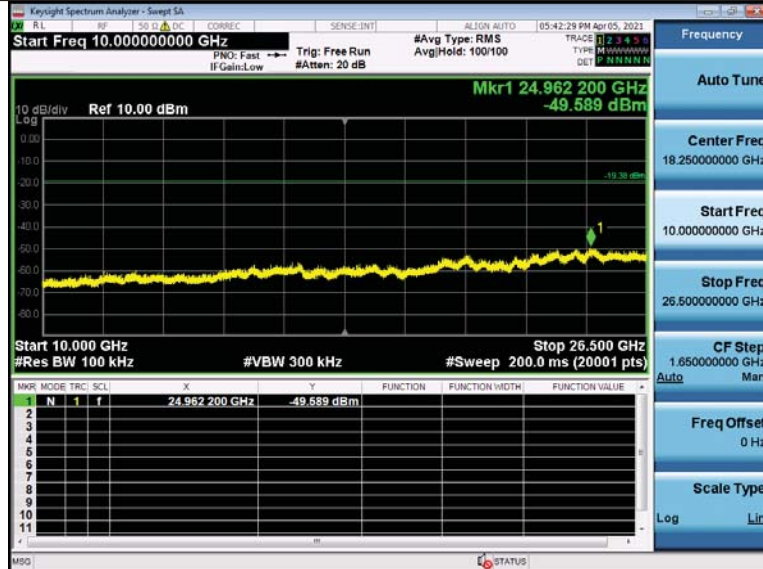


11G_MCH_Graphs


Reference



30MHz-10GHz

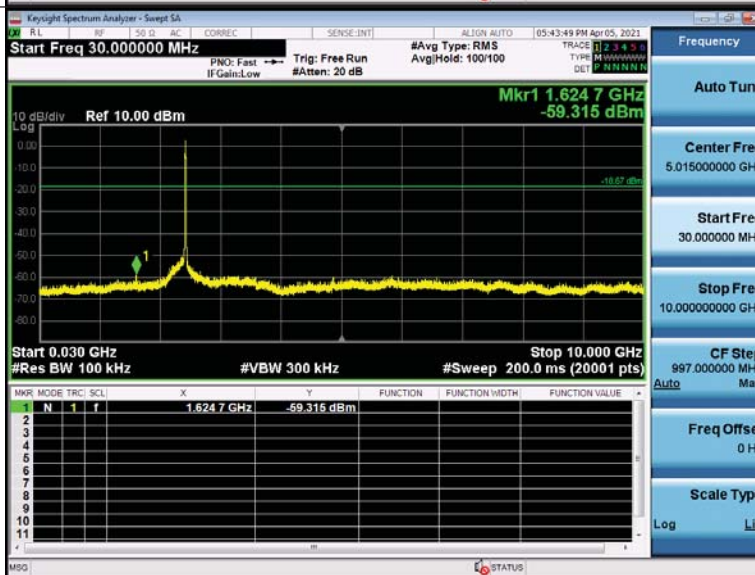

10GHz-26.5GHz

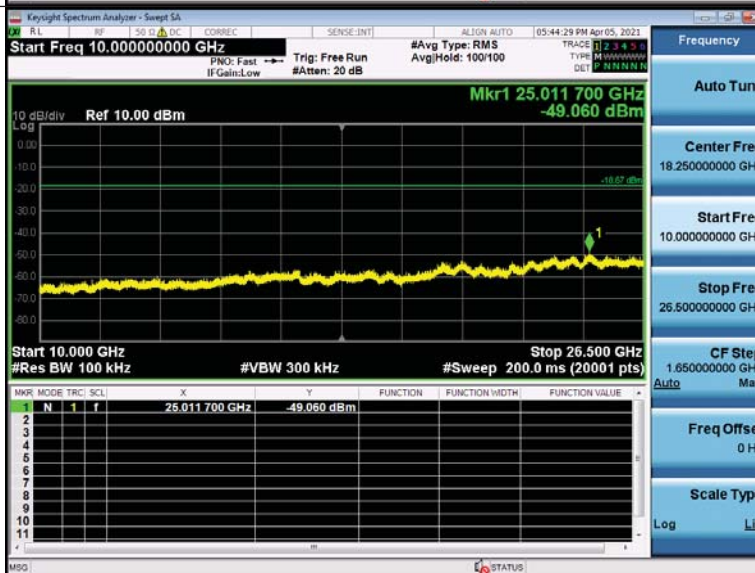


11G_HCH_Graphs


Reference



30MHz-10GHz

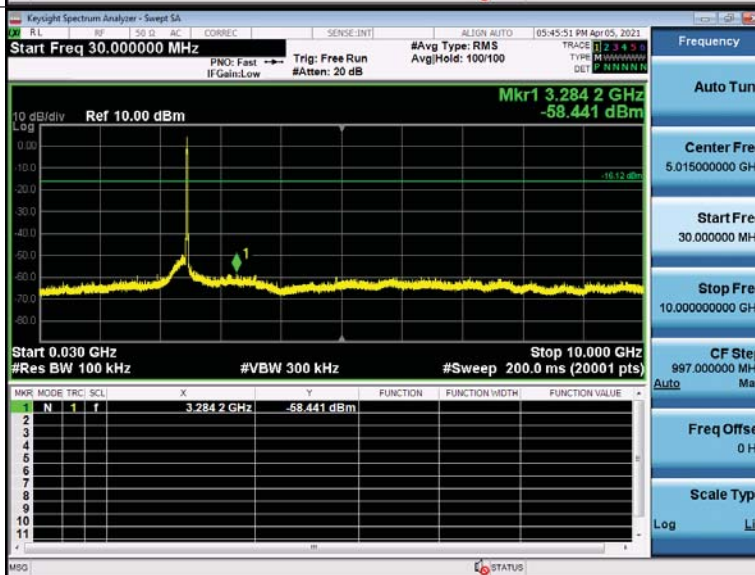

10GHz-26.5GHz

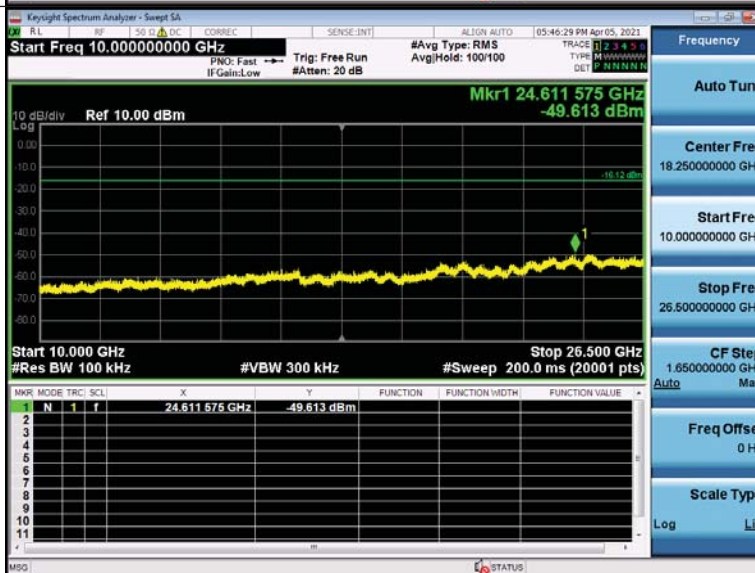


11N20_LCH_Graphs


Reference



30MHz-10GHz

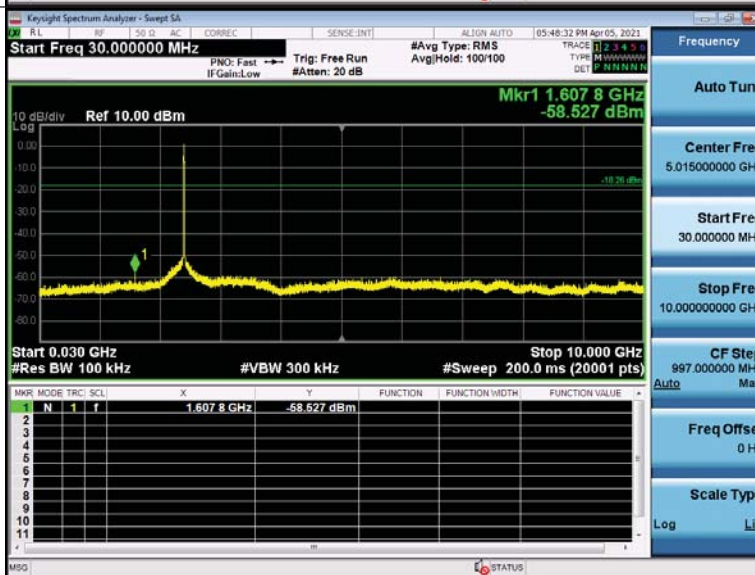

10GHz-26.5GHz

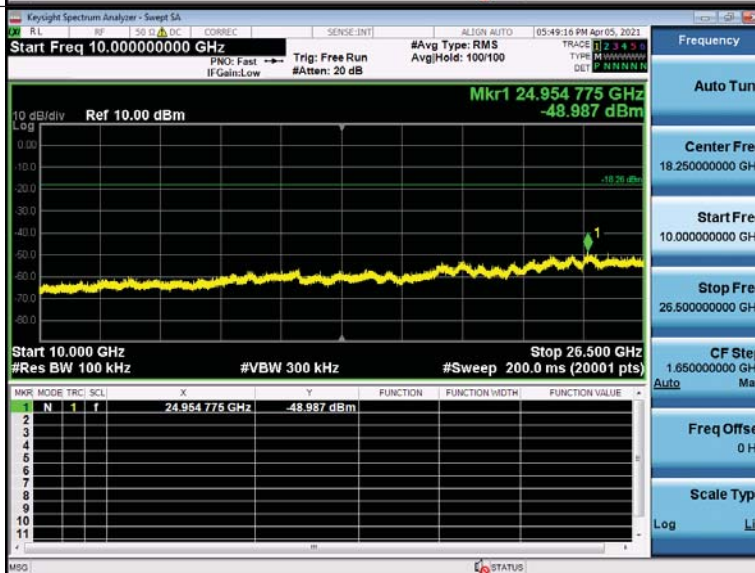


11N20_MCH_Graphs


Reference



30MHz-10GHz

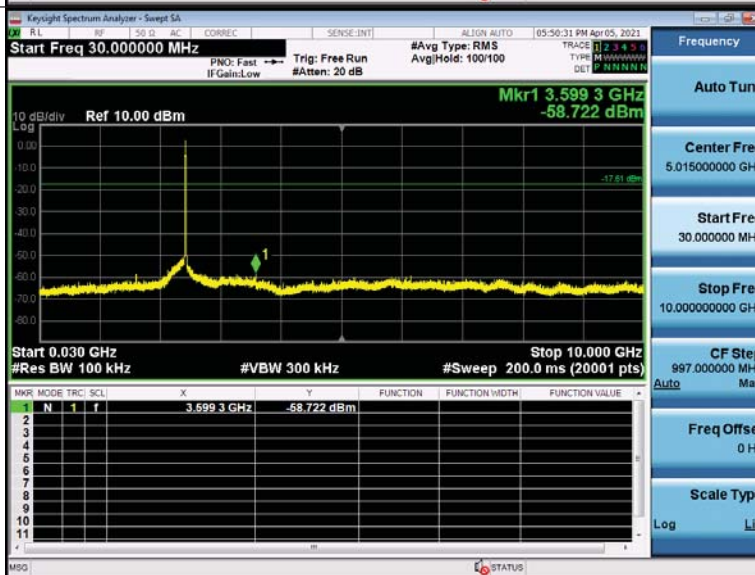

10GHz-26.5GHz

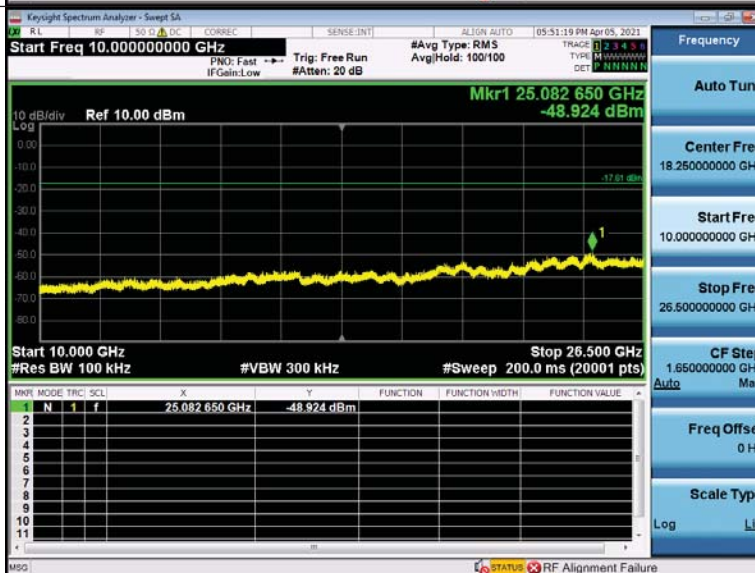


11N20_HCH_Graphs


Reference



30MHz-10GHz

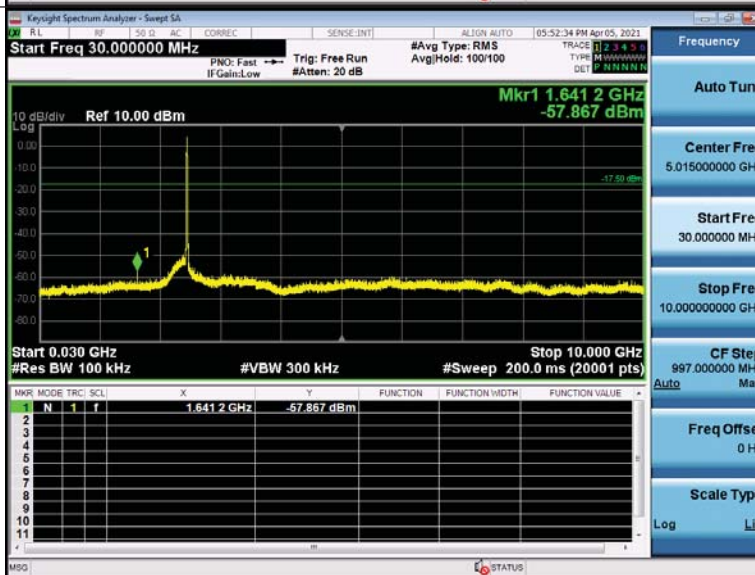

10GHz-26.5GHz

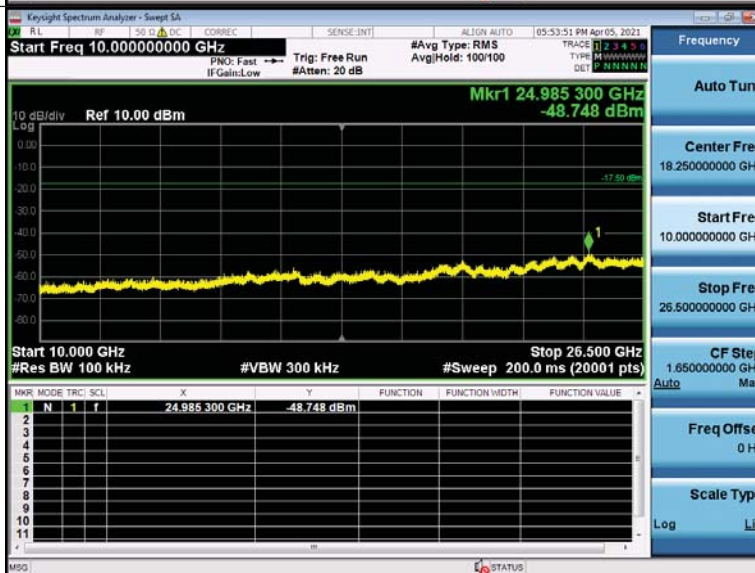


11N40_LCH_Graphs


Reference



30MHz-10GHz

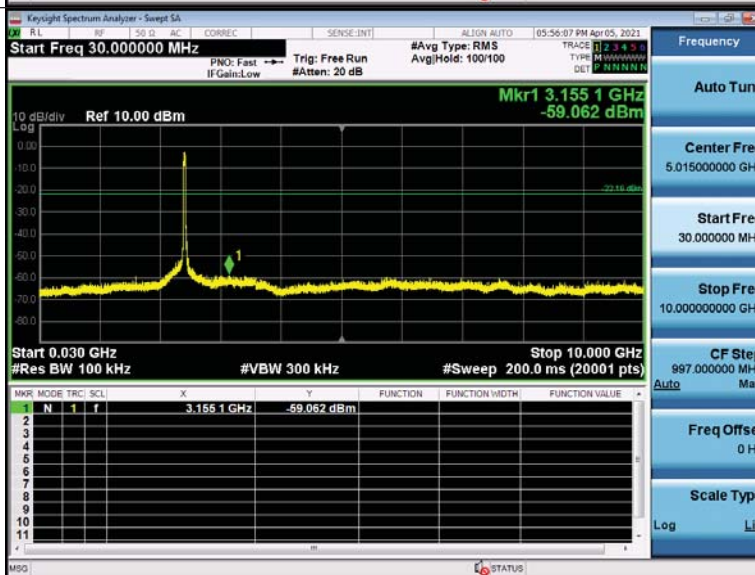


10GHz-26.5GHz

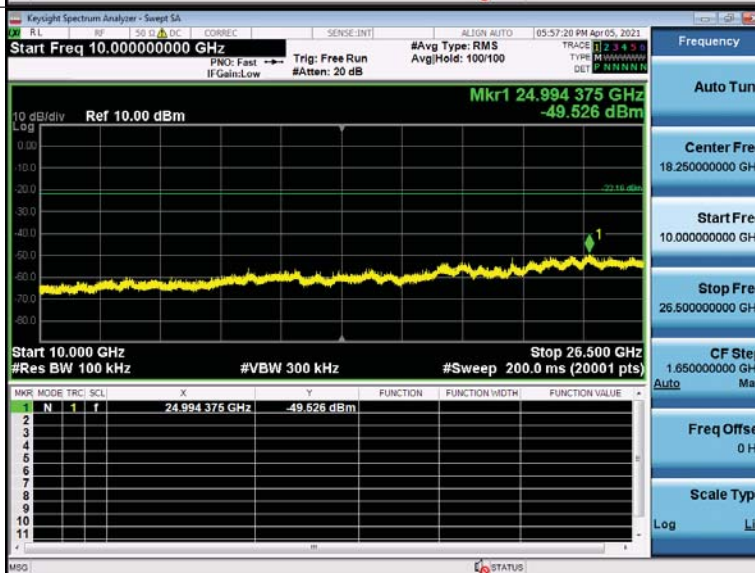


11N40_MCH_Graphs


Reference

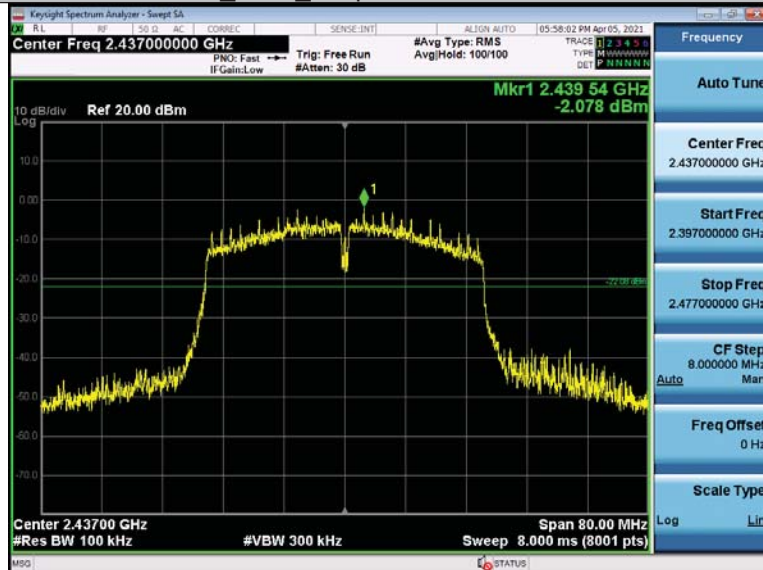

30MHz-10GHz

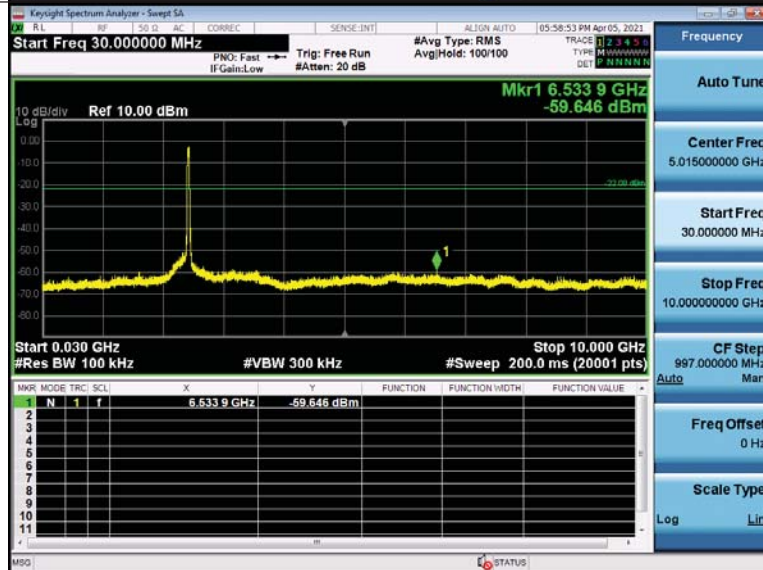

10GHz-26.5GHz

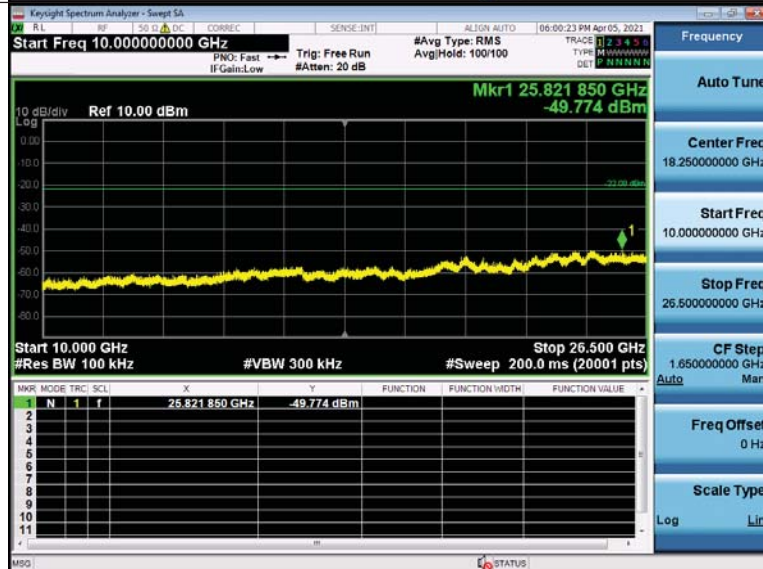

Page:42 of 67

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

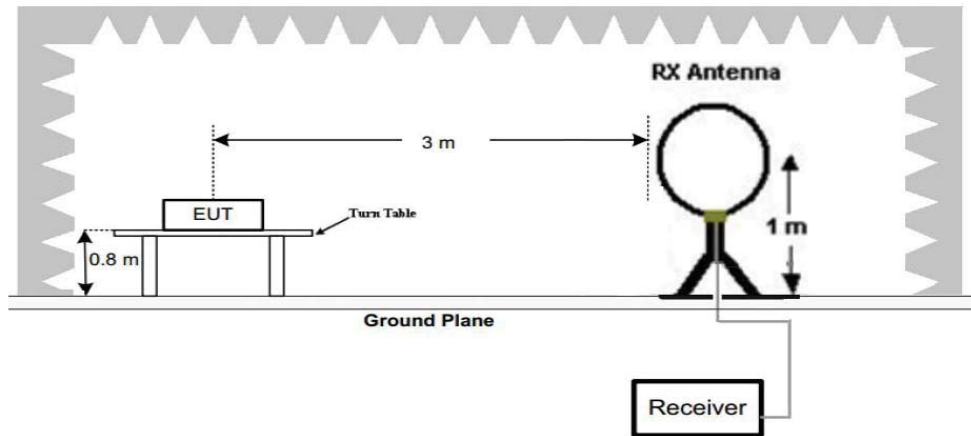


Figure 1. Below 30MHz

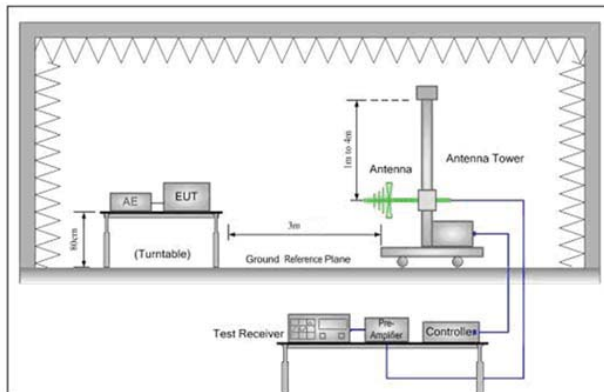


Figure 2. 30MHz to 1GHz

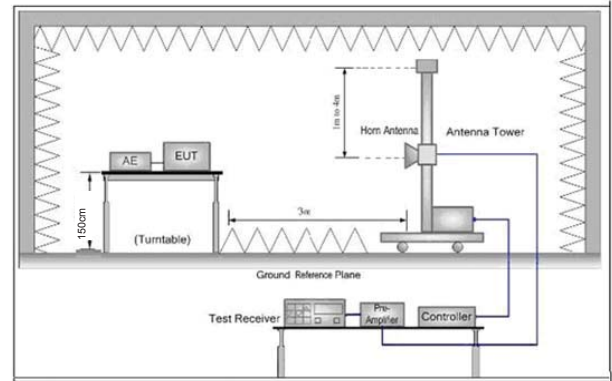


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode,
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.
Test Results:	Pass

Radiated emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical

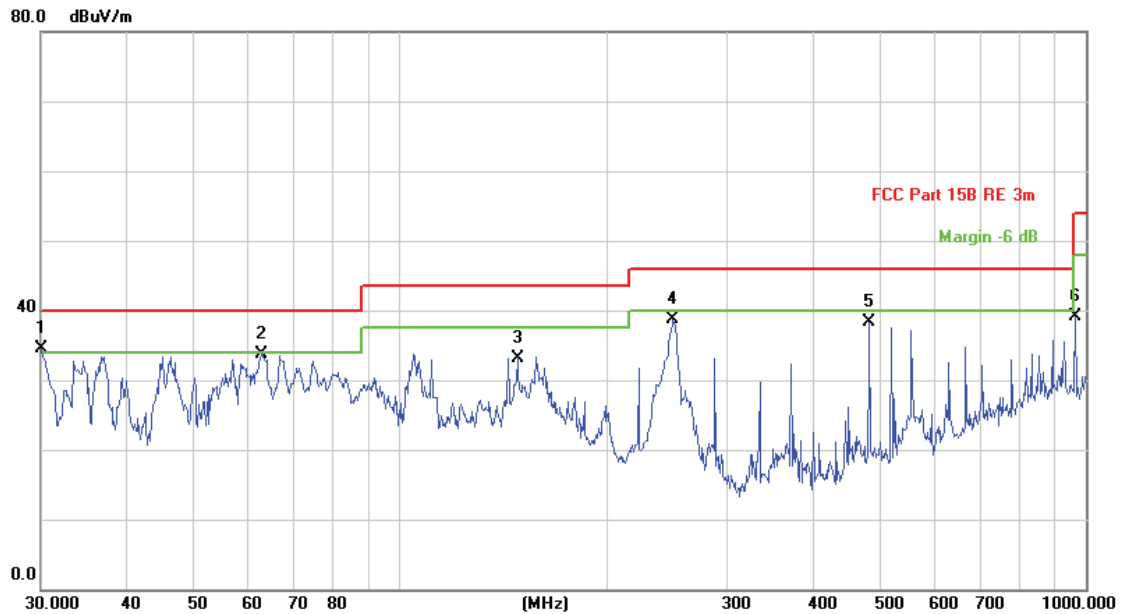

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	30.0000	41.95	-7.51	34.44	40.00	-5.56	QP		
2		62.8708	50.95	-17.15	33.80	40.00	-6.20	QP		
3		148.4410	46.56	-13.36	33.20	43.50	-10.30	QP		
4		250.3010	54.14	-15.46	38.68	46.00	-7.32	QP		
5		483.9094	42.91	-4.62	38.29	46.00	-7.71	QP		
6		965.5421	32.39	6.64	39.03	54.00	-14.97	QP		

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		30.1054	34.30	-7.66	26.64	40.00	-13.36	QP			
2		46.3402	44.16	-15.77	28.39	40.00	-11.61	QP			
3		70.8315	44.08	-17.59	26.49	40.00	-13.51	QP			
4	*	143.8295	44.69	-14.52	30.17	43.50	-13.33	QP			
5		250.3012	52.05	-15.46	36.59	46.00	-9.41	QP			
6		830.4002	29.26	6.09	35.35	46.00	-10.65	QP			

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	54.68	-4.26	50.42	74	-23.58	PK	H
4824.000	39.45	-4.26	35.19	54	-18.81	AV	H
7236.000	50.28	1.18	51.46	74	-22.54	PK	H
7236.000	36.62	1.18	37.80	54	-16.20	AV	H
4824.000	55.59	-4.26	51.33	74	-22.67	PK	V
4824.000	39.50	-4.26	35.24	54	-18.76	AV	V
7236.000	50.31	1.18	51.49	74	-22.51	PK	V
7236.000	35.38	1.18	36.56	54	-17.44	AV	V

Test mode:		802.11b(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	53.57	-4.12	49.45	74	-24.55	PK	H
4874.000	40.56	-4.12	36.44	54	-17.56	AV	H
7311.000	52.03	1.46	53.49	74	-20.51	PK	H
7311.000	34.30	1.46	35.76	54	-18.24	AV	H
4874.000	55.61	-4.12	51.49	74	-22.51	PK	V
4874.000	39.79	-4.12	35.67	54	-18.33	AV	V
7311.000	50.69	1.46	52.15	74	-21.85	PK	V
7311.000	37.00	1.46	38.46	54	-15.54	AV	V

Test mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	54.30	-4.03	50.27	74	-23.73	PK	H
4924.000	39.56	-4.03	35.53	54	-18.47	AV	H
7386.000	52.53	1.66	54.19	74	-19.81	PK	H
7386.000	34.72	1.66	36.38	54	-17.62	AV	H
4924.000	54.43	-4.03	50.40	74	-23.60	PK	V
4924.000	39.80	-4.03	35.77	54	-18.23	AV	V
7386.000	50.29	1.66	51.95	74	-22.05	PK	V
7386.000	35.16	1.66	36.82	54	-17.18	AV	V

Test mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	54.13	-4.26	49.87	74	-24.13	PK	H
4824.000	38.98	-4.26	34.72	54	-19.28	AV	H
7236.000	50.53	1.18	51.71	74	-22.29	PK	H
7236.000	34.91	1.18	36.09	54	-17.91	AV	H
4824.000	55.68	-4.26	51.42	74	-22.58	PK	V
4824.000	39.08	-4.26	34.82	54	-19.18	AV	V
7236.000	50.66	1.18	51.84	74	-22.16	PK	V
7236.000	36.69	1.18	37.87	54	-16.13	AV	V

Test mode:		802.11g(6Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	56.08	-4.12	51.96	74	-22.04	PK	H
4874.000	39.53	-4.12	35.41	54	-18.59	AV	H
7311.000	50.24	1.46	51.70	74	-22.30	PK	H
7311.000	36.76	1.46	38.22	54	-15.78	AV	H
4874.000	56.43	-4.12	52.31	74	-21.69	PK	V
4874.000	39.81	-4.12	35.69	54	-18.31	AV	V
7311.000	49.93	1.46	51.39	74	-22.61	PK	V
7311.000	35.82	1.46	37.28	54	-16.72	AV	V

Test mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	56.44	-4.03	52.41	74	-21.59	PK	H
4924.000	39.61	-4.03	35.58	54	-18.42	AV	H
7386.000	52.40	1.66	54.06	74	-19.94	PK	H
7386.000	34.99	1.66	36.65	54	-17.35	AV	H
4924.000	54.35	-4.03	50.32	74	-23.68	PK	V
4924.000	40.49	-4.03	36.46	54	-17.54	AV	V
7386.000	51.95	1.66	53.61	74	-20.39	PK	V
7386.000	34.95	1.66	36.61	54	-17.39	AV	V

Test mode:		802.11n(6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	53.69	-4.26	49.43	74	-24.57	PK	H
4824.000	38.97	-4.26	34.71	54	-19.29	AV	H
7236.000	50.14	1.18	51.32	74	-22.68	PK	H
7236.000	36.37	1.18	37.55	54	-16.45	AV	H
4824.000	54.45	-4.26	50.19	74	-23.81	PK	V
4824.000	39.98	-4.26	35.72	54	-18.28	AV	V
7236.000	51.13	1.18	52.31	74	-21.69	PK	V
7236.000	36.79	1.18	37.97	54	-16.03	AV	V

Test mode:		802.11n(6.5Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	55.71	-4.12	51.59	74	-22.41	PK	H
4874.000	40.27	-4.12	36.15	54	-17.85	AV	H
7311.000	51.96	1.46	53.42	74	-20.58	PK	H
7311.000	36.12	1.46	37.58	54	-16.42	AV	H
4874.000	56.20	-4.12	52.08	74	-21.92	PK	V
4874.000	39.22	-4.12	35.10	54	-18.90	AV	V
7311.000	50.95	1.46	52.41	74	-21.59	PK	V
7311.000	36.77	1.46	38.23	54	-15.77	AV	V

Test mode:		802.11n(6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	56.00	-4.03	51.97	74	-22.03	PK	H
4924.000	40.12	-4.03	36.09	54	-17.91	AV	H
7386.000	50.62	1.66	52.28	74	-21.72	PK	H
7386.000	37.07	1.66	38.73	54	-15.27	AV	H
4924.000	56.24	-4.03	52.21	74	-21.79	PK	V
4924.000	38.37	-4.03	34.34	54	-19.66	AV	V
7386.000	51.84	1.66	53.50	74	-20.50	PK	V
7386.000	35.02	1.66	36.68	54	-17.32	AV	V

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4844.000	55.80	-4.2	51.60	74	-22.40	PK	H
4844.000	39.65	-4.2	35.45	54	-18.55	AV	H
7266.000	50.21	1.18	51.39	74	-22.61	PK	H
7266.000	35.52	1.18	36.70	54	-17.30	AV	H
4844.000	54.37	-4.2	50.17	74	-23.83	PK	V
4844.000	39.78	-4.2	35.58	54	-18.42	AV	V
7266.000	50.37	1.18	51.55	74	-22.45	PK	V
7266.000	36.93	1.18	38.11	54	-15.89	AV	V

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	56.24	-4.12	52.12	74	-21.88	PK	H
4874.000	39.09	-4.12	34.97	54	-19.03	AV	H
7311.000	52.34	1.46	53.80	74	-20.20	PK	H
7311.000	36.85	1.46	38.31	54	-15.69	AV	H
4874.000	54.60	-4.12	50.48	74	-23.52	PK	V
4874.000	38.42	-4.12	34.30	54	-19.70	AV	V
7311.000	50.41	1.46	51.87	74	-22.13	PK	V
7311.000	37.07	1.46	38.53	54	-15.47	AV	V

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4904.000	53.64	-4.03	49.61	74	-24.39	PK	H
4904.000	39.53	-4.03	35.50	54	-18.50	AV	H
7356.000	50.35	1.66	52.01	74	-21.99	PK	H
7356.000	34.84	1.66	36.50	54	-17.50	AV	H
4904.000	56.09	-4.03	52.06	74	-21.94	PK	V
4904.000	40.44	-4.03	36.41	54	-17.59	AV	V
7356.000	51.72	1.66	53.38	74	-20.62	PK	V
7356.000	36.64	1.66	38.30	54	-15.70	AV	V

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

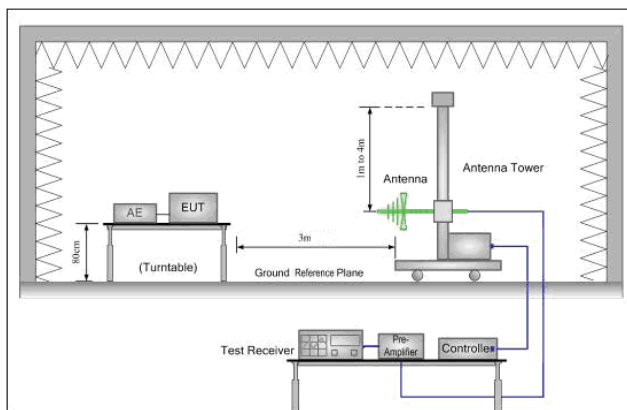


Figure 1. 30MHz to 1GHz

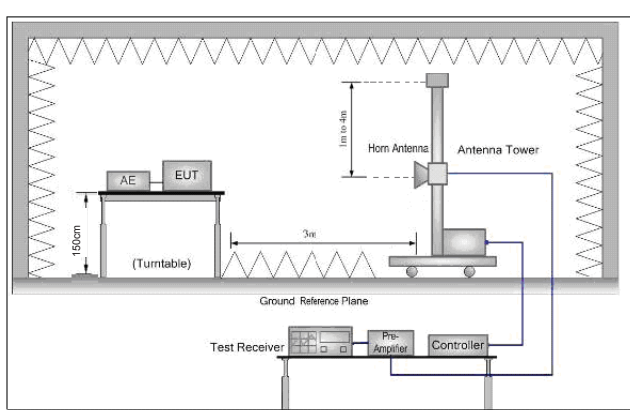


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	59.07	-9.2	49.87	74	-24.13	PK	H
2390.000	44.94	-9.2	35.74	54	-18.26	AV	H
2400.000	61.40	-9.39	52.01	74	-21.99	PK	H
2400.000	41.98	-9.39	32.59	54	-21.41	AV	H
2390.000	58.82	-9.2	49.62	74	-24.38	PK	V
2390.000	43.59	-9.2	34.39	54	-19.61	AV	V
2400.000	59.35	-9.39	49.96	74	-24.04	PK	V
2400.000	40.79	-9.39	31.40	54	-22.60	AV	V

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	59.60	-9.29	50.31	74	-23.69	PK	H
2483.500	44.25	-9.29	34.96	54	-19.04	AV	H
2483.500	59.32	-9.29	50.03	74	-23.97	PK	V
2483.500	41.05	-9.29	31.76	54	-22.24	AV	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	59.26	-9.2	50.06	74	-23.94	PK	H
2390.000	43.12	-9.2	33.92	54	-20.08	AV	H
2400.000	60.59	-9.39	51.20	74	-22.80	PK	H
2400.000	40.36	-9.39	30.97	54	-23.03	AV	H
2390.000	59.57	-9.2	50.37	74	-23.63	PK	V
2390.000	42.54	-9.2	33.34	54	-20.66	AV	V
2400.000	60.61	-9.39	51.22	74	-22.78	PK	V
2400.000	42.80	-9.39	33.41	54	-20.59	AV	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	60.14	-9.29	50.85	74	-23.15	PK	H
2483.500	44.10	-9.29	34.81	54	-19.19	AV	H
2483.500	61.49	-9.29	52.20	74	-21.80	PK	V
2483.500	41.09	-9.29	31.80	54	-22.20	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	59.80	-9.2	50.60	74	-23.40	PK	H
2390.000	44.28	-9.2	35.08	54	-18.92	AV	H
2400.000	61.39	-9.39	52.00	74	-22.00	PK	H
2400.000	43.05	-9.39	33.66	54	-20.34	AV	H
2390.000	60.60	-9.2	51.40	74	-22.60	PK	V
2390.000	43.72	-9.2	34.52	54	-19.48	AV	V
2400.000	60.10	-9.39	50.71	74	-23.29	PK	V
2400.000	42.74	-9.39	33.35	54	-20.65	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	58.85	-9.29	49.56	74	-24.44	PK	H
2483.500	42.76	-9.29	33.47	54	-20.53	AV	H
2483.500	61.34	-9.29	52.05	74	-21.95	PK	V
2483.500	41.21	-9.29	31.92	54	-22.08	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	58.93	-9.2	49.73	74	-24.27	PK	H
2390.000	44.45	-9.2	35.25	54	-18.75	AV	H
2400.000	59.73	-9.39	50.34	74	-23.66	PK	H
2400.000	40.43	-9.39	31.04	54	-22.96	AV	H
2390.000	60.43	-9.2	51.23	74	-22.77	PK	V
2390.000	42.93	-9.2	33.73	54	-20.27	AV	V
2400.000	60.04	-9.39	50.65	74	-23.35	PK	V
2400.000	42.24	-9.39	32.85	54	-21.15	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	61.07	-9.29	51.78	74	-22.22	PK	H
2483.500	43.01	-9.29	33.72	54	-20.28	AV	H
2483.500	59.86	-9.29	50.57	74	-23.43	PK	V
2483.500	43.06	-9.29	33.77	54	-20.23	AV	V

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


Photographs - EUT Test Setup

Radiated Emission


9kHz~30MHz:



30MHz~1GHz:

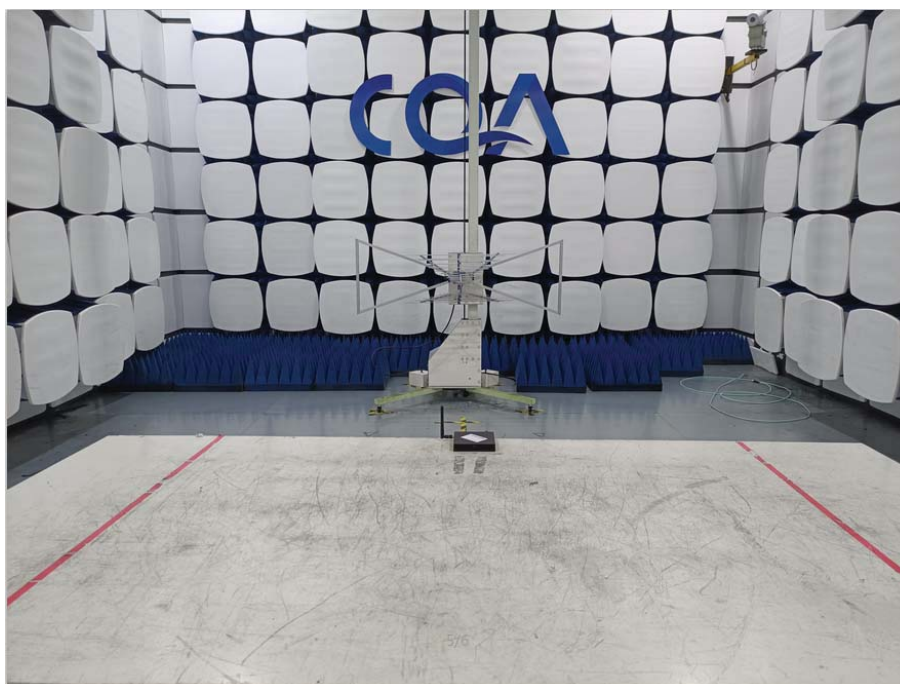

Above 1GHz:

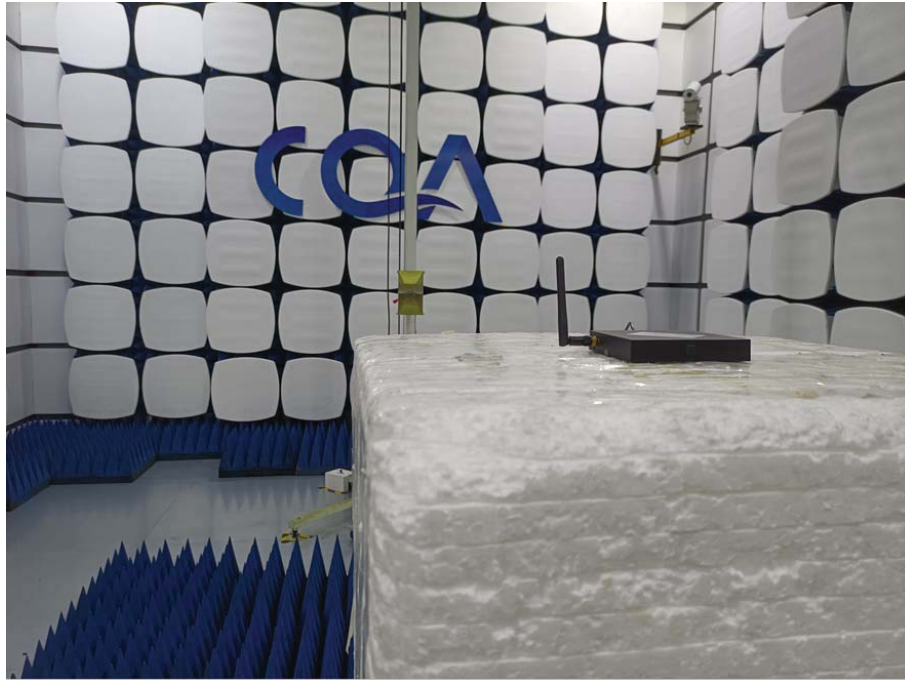



Conducted Emissions Test Setup





Photographs - EUT Constructional Details



External Photos


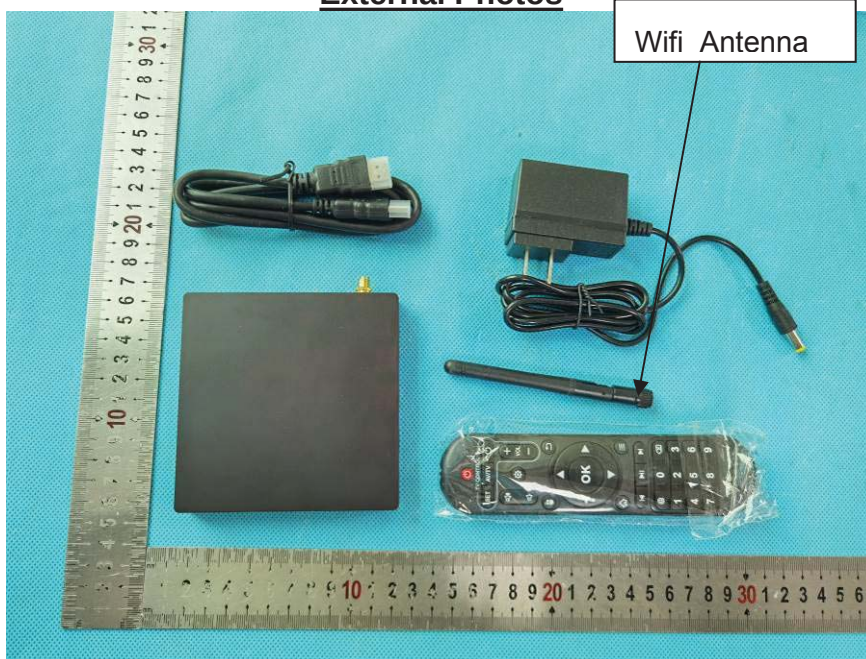


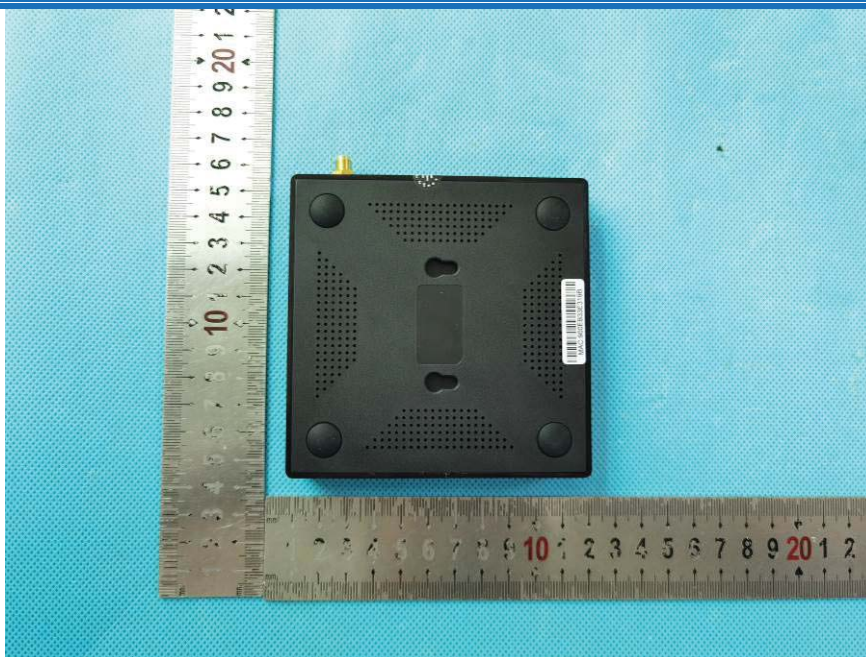


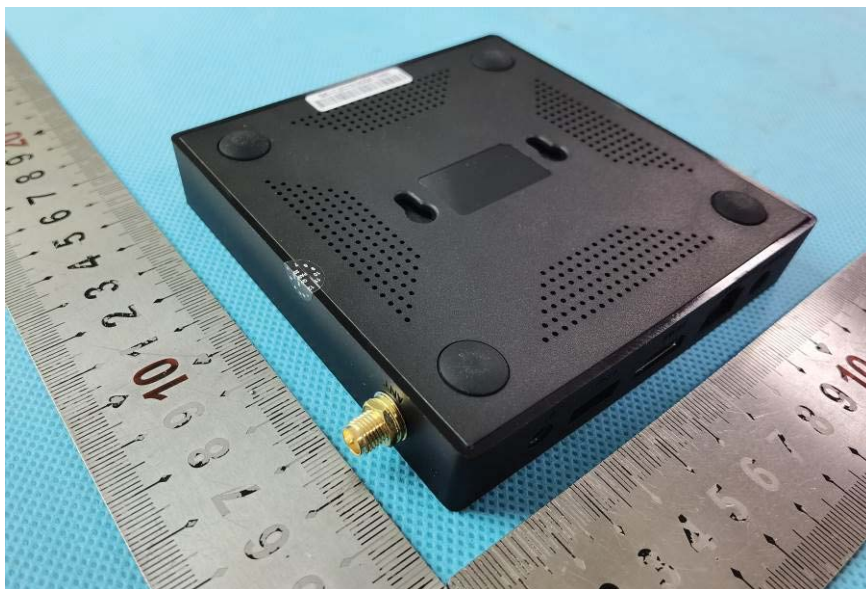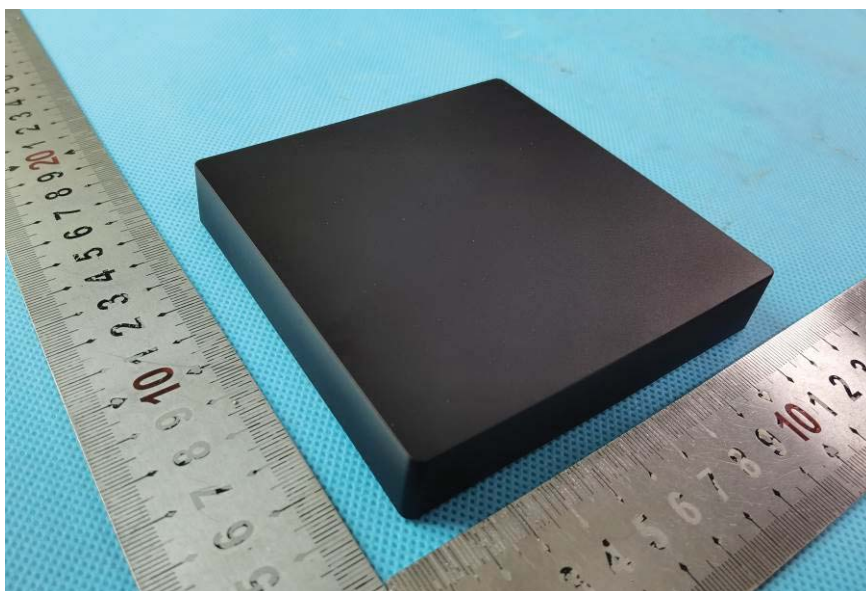

Internal photos

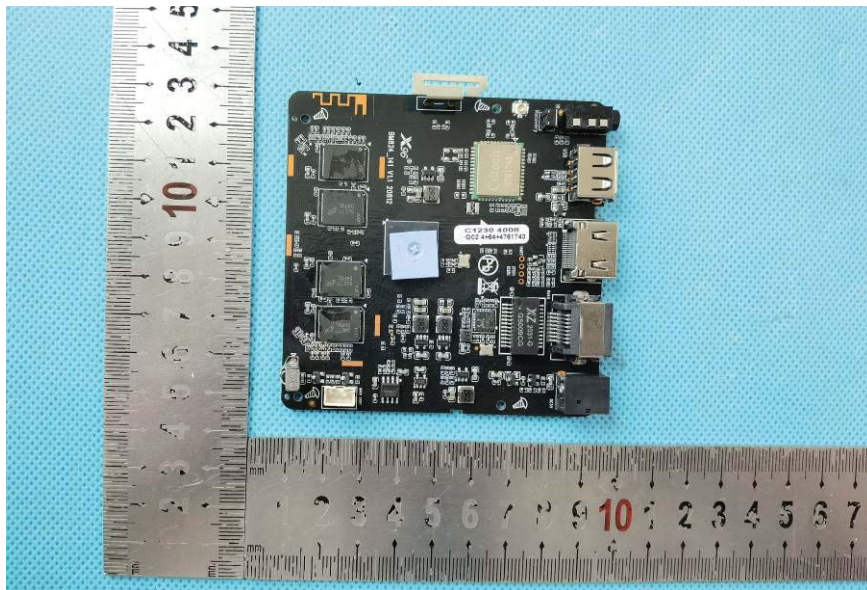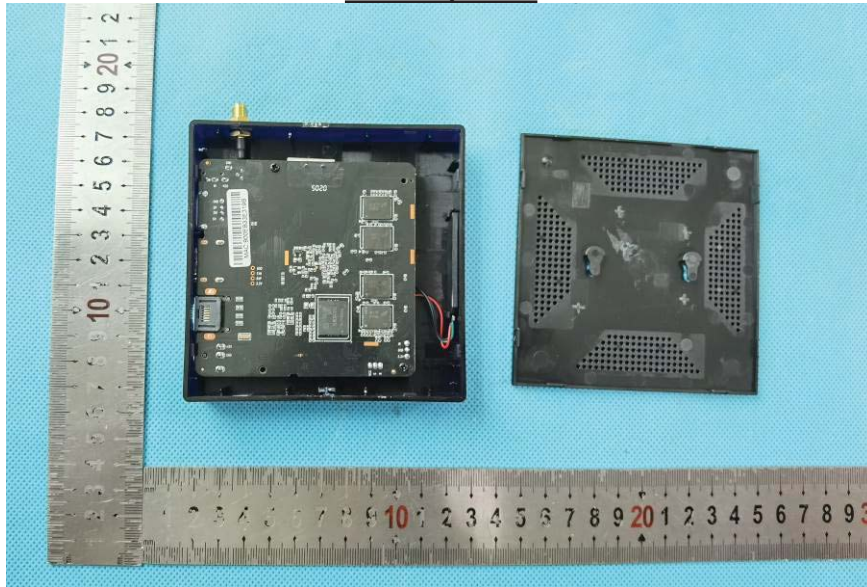

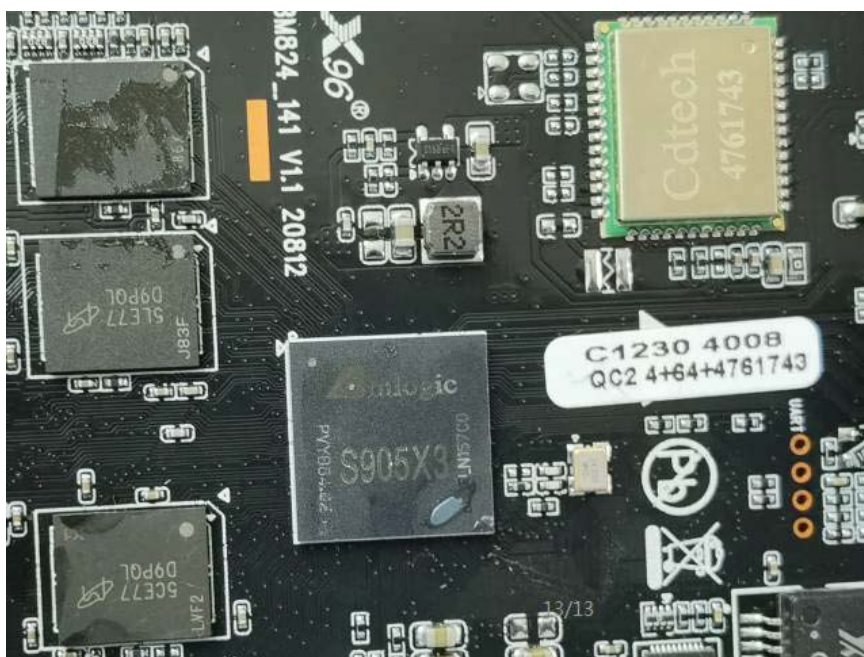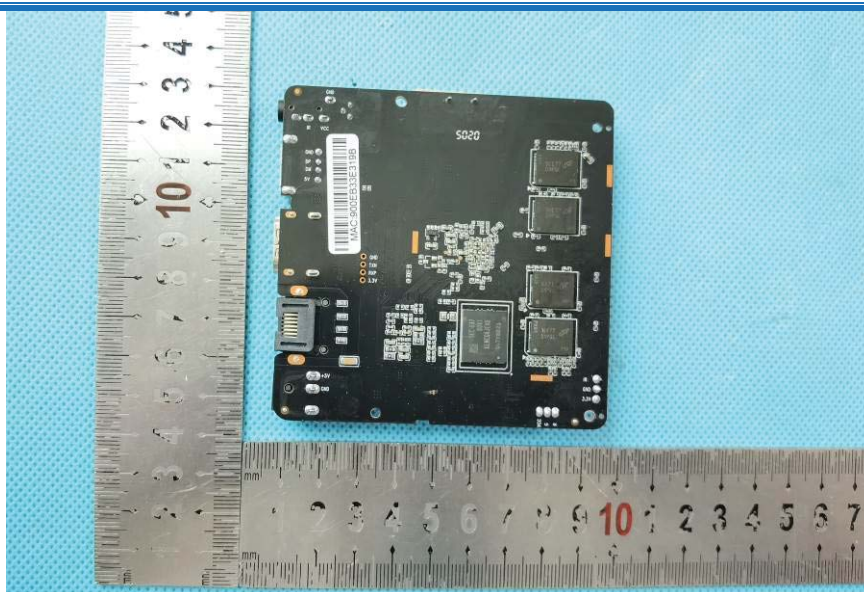

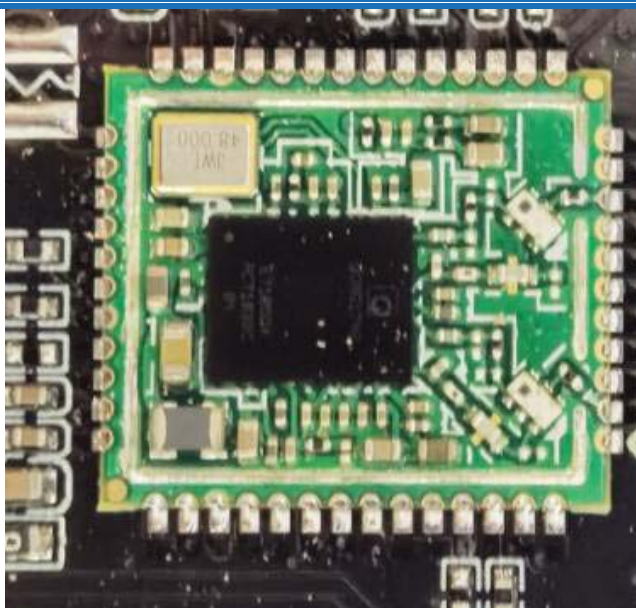

THE END