

TEST REPORT

Product Name : Exos Cinema System
Model Number : See Page 5 for details
FCC ID : 2AYB7696AI7200N

Prepared for : SOLAR BRIGHT INDUSTRIAL LIMITED
Address : RM 807 8/F SHING YIP IND. BLDG., 19-21 SHING YIP
STREET, KWUN TONG, KL., HONG KONG.

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2506050057W00202R
Date(s) of Tests : June 5, 2025 to July 28, 2025
Date of Issue : July 30, 2025

TABLE OF CONTENTS

1 EUT TECHNICAL DESCRIPTION	6
2 SUMMARY OF TEST RESULT	7
3 TEST METHODOLOGY	8
3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.2 MEASUREMENT EQUIPMENT USED	8
3.3 DESCRIPTION OF TEST MODES	9
4 FACILITIES AND ACCREDITATIONS	10
4.1 FACILITIES	10
4.2 EQUIPMENT	10
5 TEST SYSTEM UNCERTAINTY	11
6 SETUP OF EQUIPMENT UNDER TEST	12
6.1 RADIO FREQUENCY TEST SETUP 1	12
6.2 RADIO FREQUENCY TEST SETUP 2	12
6.3 CONDUCTED EMISSION TEST SETUP	15
6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	16
6.5 SUPPORT EQUIPMENT	16
7 TEST REQUIREMENTS	17
7.1 MINIMUM (6DB) OCCUPIED BANDWIDTH	17
7.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER	24
7.3 MAXIMUM POWER SPECTRAL DENSITY	32
7.4 UNWANTED SPURIOUS EMISSIONS	39
7.5 RADIATED EMISSION	64
7.6 CONDUCTED EMISSION TEST	77
7.7 ANTENNA APPLICATION	80

Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2506050057W00202R	/	Original Report

TEST RESULT CERTIFICATION

Applicant : SOLAR BRIGHT INDUSTRIAL LIMITED
 Address : RM 807 8/F SHING YIP IND. BLDG., 19-21 SHING YIP STREET, KWUN TONG, KL., HONG KONG.
 Manufacturer : SOLAR BRIGHT INDUSTRIAL LIMITED
 Address : RM 807 8/F SHING YIP IND. BLDG., 19-21 SHING YIP STREET, KWUN TONG, KL., HONG KONG.
 EUT : Exos Cinema System
 Model Name : See Page 5 for details
 Trademark : AIWA, REGENT, MODERN

Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15 , Subpart C	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the above table standards requirement.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : June 5, 2025 to July 28, 2025

Prepared by : 
Una Yu/Editor

Reviewer : 
Joe Xia/Supervisor

Approved & Authorized Signer : 
Lisa Wang/Manager 

Declaration on model difference

Production name	Trade mark	Model no.
Exos Cinema System	AIWA, REGENT, MODERN	RG261, MD261, AI7200N-BLK, AI7200N-BLK-STK, AI7200N-BLK-STK-2, AI7200N-TL, AI7200N-TL-STK, AI7200N-TL-STK-2, AI7200N-NVY, AI7200N-NVY-STK, AI7200N-NVY-STK-2, AI7200N-RG, AI7200N-RG-STK, AI7200N-RG-STK-2, AI7200N-GRY, AI7200N-GRY-STK, AI7200N-GRY-STK-2, AI7200N-BUR, AI7200N-BUR-STK, AI7200N-BUR-STK-2, AI7200N-RED, AI7200N-RED-STK, AI7200N-RED-STK-2, AI7200N-WHT, AI7200N-WHT-STK, AI7200N-WHT-STK-2, AI7200N-MT, AI7200N-MT-STK, AI7200N-MT-STK-2, AI7200N-EGRN, AI7200N-EGRN-STK, AI7200N-EGRN-STK-2, AI7200N-DNVY, AI7200N-DNVY-STK, AI7200N-DNVY-STK-2, AI7200N-FGRN, AI7200N-FGRN-STK, AI7200N-FGRN-STK-2, AI7200N-BGE, AI7200N-BGE-STK, AI7200N-BGE-STK-2, AI7200N-TRD, AI7200N-TRD-STK, AI7200N-TRD-STK-2, AI7200N-MCHA, AI7200N-MCHA-STK, AI7200N-MCHA-STK-2, AI7200N-XX, AI7200N-XX-STK, AI7200N-XX-STK-2, (XX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXX, AI7200N-XXX-STK, AI7200N-XXX-STK-2, (XXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXXX, AI7200N-XXXX-STK, AI7200N-XXXX-STK-2, (XXXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XX-STK, AI7200N-XX-STK-2, (XX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXX-STK, AI7200N-XXX-STK-2, (XXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXXX-STK, AI7200N-XXXX-STK-2, (XXXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-PERI, AI7200N-PERI-STK, AI7200N-PERI-STK-2, AI7200N-XX-T37, AI7200N-XX-T37-2 (XX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXX-T37, AI7200N-XXX-T37-2(XXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXXX-T37, AI7200N-XXXX-T37-2(XXXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XX-T37, AI7200N-XX-T37-2(XX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXX-T37, AI7200N-XXX-T37-2(XXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXXX-T37, AI7200N-XXXX-T37-2(XXXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XX-T37, AI7200N-XX-T37-2(XX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXX-T37, AI7200N-XXX-T37-2(XXX denote 0-9, A-Z or N/A to represent variances in cosmetic), AI7200N-XXXX-T37, AI7200N-XXXX-T37-2(XXXX denote 0-9, A-Z or N/A to represent variances in cosmetic)
Note: N/A		

1 EUT TECHNICAL DESCRIPTION

Product Name:	Exos Cinema System
Model Number:	See Page 5 for details (Note: All models are identical in circuitry and electrical, mechanical and physical construction; the difference are color and model number for trading purpose. Mode RG261 was Chosen final test.)
IEEE 802.11 WLAN Mode Supported:	802.11b 802.11g 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth)
Modulation:	DSSS, OFDM
Operating Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11b/g/n(HT40)
Number of Channels:	11 channels for 802.11b/g/n(HT20) 7 Channels for 802.11n(HT40)
Antenna Type:	FPC Antenna
Antenna Gain:	Ant1: 2.98dBi, (Note: The antenna information is provided by the customers, which will have a certain impact on the test results.)
Power supply:	DC 14V from adapter
Adapter:	MODEL:JDA1403000WUS INPUT:100-240V~50/60Hz 1.25 A OUTPUT:14.0V/3.0A
Test Voltage:	AC 120V/60Hz
Temperature Range:	0°C ~ +45°C

Note: for more details, please refer to the user's manual of the EUT.

2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1: The results of this report do not take into account the uncertainty. NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID:2AYB7696AI7200N** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

3.2 MEASUREMENT EQUIPMENT USED

For Conducted Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2025/5/9	1Year
AMN	Rohde & Schwarz	ENV216	101161	2025/5/9	1Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	Bonn	BLMA 011001N	2213967A	2024/10/18	1Year
EMI Test Receiver	Rohde & Schwarz	ESR7	102551	2024/10/18	1Year
Bilog Antenna	Schwarzbeck	VULB9163	9163142	2024/7/8	2Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1198	2025/5/13	2Year
Pre-Amplifier	Bonn	BLMA 0118-5G	2213967B-01	2024/10/18	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2025/5/9	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2025/5/13	2Year
Pre-Amplifier	Lunar EM	LNA18G26-40	J1012131010 001	2025/5/9	1Year
Pre-Amplifier	Lunar EM	LNA26G40-40	J1013131028 001	2025/5/9	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2025/5/13	2Year
Wideband Radio Communication Tester	R&S	CMW500	171168	2024/9/18	1Year
Coaxial Cable	TIMES	NmNm-7-C1570 2	N/A	2025/5/9	1Year
Coaxial Cable	TIMES	HF290-NMSM-6.5M	N/A	2025/5/9	1Year

For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	2024/9/18	1Year
Frequency Extender	R&S	CMW-Z800A	100430	2024/9/18	1Year
Spectrum Analyzer	R&S	FSV3044	101289	2024/12/17	1Year
Analog Signal Generator	R&S	SMB100A	183237	2024/9/18	1Year
Vector Signal Generator	R&S	SMM100A	101808	2024/9/18	1Year
RF Control Unit(Power Meter)	Tonscend	JS0806-2	22C8060567	2024/9/18	1Year
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2025/5/10	1 Year
DC Power Supply	KEYSIGHT	E3642A	MY53030016	2024/9/18	1 Year

3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channels list for 802.11b/g/n(HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442	12	2467
3	2422	8	2447	13	2472
4	2427	9	2452		
5	2432	10	2457		

Frequency and Channels list for 802.11n(HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442	10	2457
5	2432	8	2447	11	2462

Test Frequency and Channels for 802.11b/g/n(HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442	13	2472

Test Frequency and channels for 802.11n(HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442	11	2462

Multi-antenna correlation:

<input type="checkbox"/>	Transmit Signals are Correlated Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
<input type="checkbox"/>	All Transmit Signals are Completely Uncorrelated Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

Site Description

EMC Lab. : **Accredited by CNAS**

The Certificate Registration Number is L2291

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK (SHENZHEN) CO., LTD.

Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

4.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	$\pm 0.5 \text{ }^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%.

6 SETUP OF EQUIPMENT UNDER TEST

6.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Measurements shall be taken, using the following steps, at a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment (see RSS-Gen for applicable versions of ANSI and CISPR standards).

(1) Line the ground plane with absorbers between the transmitter and the receive antenna to minimize reflections. The absorbers used should have a minimum-rated attenuation of 20 dB through the measurement frequency range of interest. The absorbers shall be positioned to replicate the layout used when compliance with the applicable acceptability criterion was achieved, as set forth in the aforementioned standards on site validation.

(2) Set the height of the receive antenna to 1.5 m. The receive antenna must be one that was designed and fabricated to operate over the entire frequency range of interest, for example, an appropriate standard gain horn.

(3) The distance between the receive antenna and the radiating source shall be sufficient in order to ensure far-field conditions.

(4) Mount the transmitter at a height of 1.5 m.

(5) Configure the device under test (DUT) to produce the maximum power spectral density as measured while assessing compliance with Section 6.2.2 (i.e. channel frequency, modulation type and data rate). If the DUT is equipped with a detachable antenna and the antenna is intended for remote installation (i.e.

tower-mounted), the DUT may be substituted with a suitable signal generator. The level and frequency settings on the generator shall be set so as to reproduce the maximum power spectral density, measured within a 1 MHz bandwidth, obtained while assessing compliance to Section 6.2.2.

(6) Position the transmitter or the radiating antenna so that elevation pattern measurements can be taken.

(7) Find the 0° reference point in the horizontal plane.

(8) Care should be taken when positioning the receive antenna to avoid cross-polarization. Antennas of known mounting polarization should be assessed with the receive antenna oriented in the same polarity. If the polarization of the transmit antenna is unknown or the transmit antenna can be mounted in either polarization, e.i.r.p. measurements should be performed to find which mounting polarity provides the highest e.i.r.p. value. Testing shall be carried out with the receive antenna and the DUT mounted in each polarity.

(9) The emission shall be centred on the display of the spectrum analyzer with the following settings:

i. If the power spectral density of the DUT was assessed with a peak detector and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

ii. If the power spectral density of the DUT was assessed using a sample detector with power averaging and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a sample detector, configured to produce 100 power averages and set with a resolution bandwidth, as well as a video bandwidth of 1 MHz.

iii. If the antenna can be detached from the DUT, a continuous wave (CW) signal equal to that of the power spectral density measurement may be used, the spectrum analyzer shall be set to peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

(10) Rotate the turntable 360° recording the field strength at each step. Throughout the main beam of the antenna, the step size shall be kept to a maximum of 1°.

Once outside the main beam of the antenna, the maximum step size shall be as follows, when compared to the requirements of Section 6.2.2:

i. Between 0° and 8°, maximum step size of 2°;

ii. Between 8° and 40°, maximum step size of 4°;

iii. Between 40° and 45°, maximum step size of 1°;

iv. Between 45° and 90°, maximum step size of 5°.

Once the mask reaches 90°, the mask will be inverted and the step size will follow in the same manner as above.

For the purpose of this procedure, the main beam of the antenna is defined as the 3 dB beamwidth.

(11) Convert the measured field strength values in terms of e.i.r.p. density (dBW/1 MHz) using the following equation:

$$\text{e.i.r.p density(dBW/MHz)} = 10\log((E^*r)^2/30)$$

E = field strength in V/m

r = measurement distance in metres

(12) Plot the results against the emission mask with reference to the horizontal plane.


(13) Using the plot, the 0° can be rotated to determine the worst-case installation tilt angle.

(14) Testing shall be performed using the highest gain antenna for every antenna type, if applicable.


(15) Antenna type(s), antenna model number(s), and worst-case tilt angle(s) necessary to remain compliant with the elevation mask requirement set forth in Section 6.2.2(3) of RSS-247 shall be clearly indicated in the user manual.

The following figure is an example of a polar elevation mask measured using the Method 1 reference to dB μ V/m at 3 m.


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

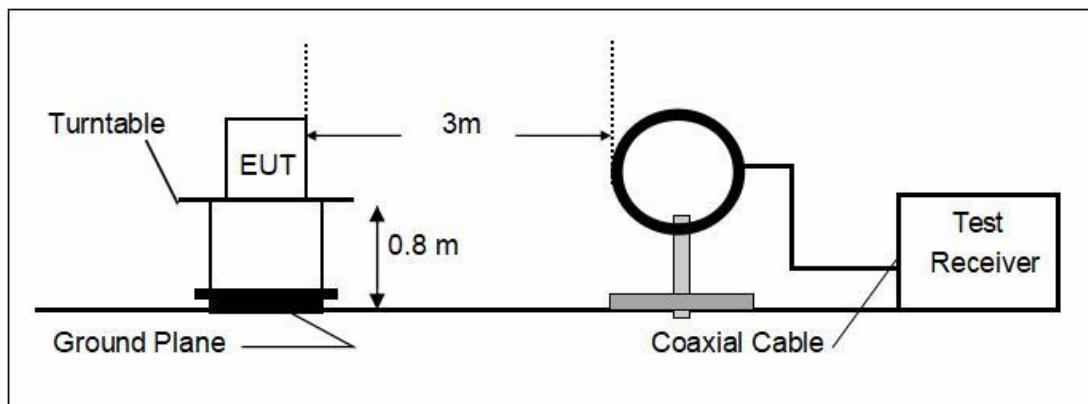

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

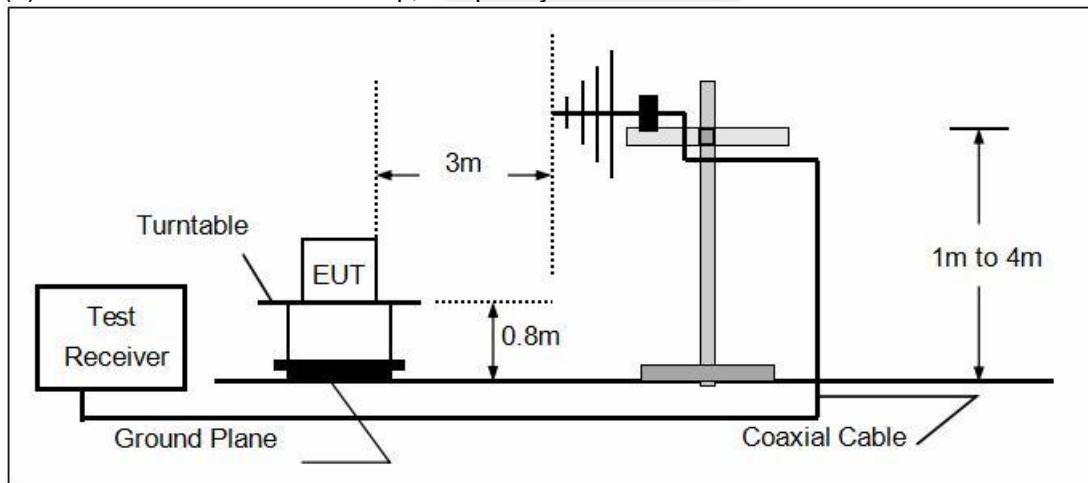

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

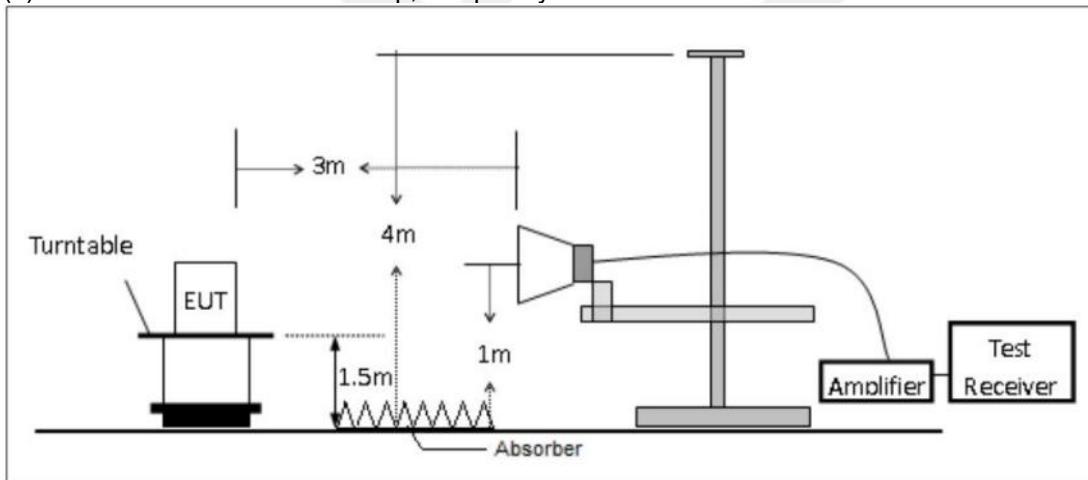


6.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

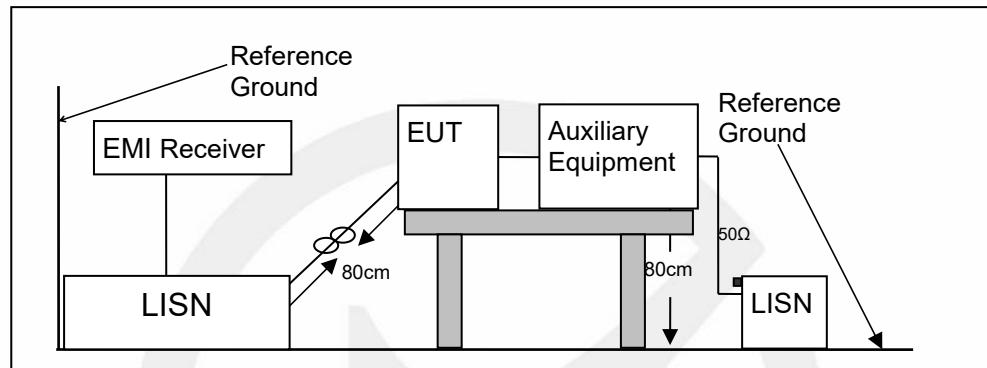

6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

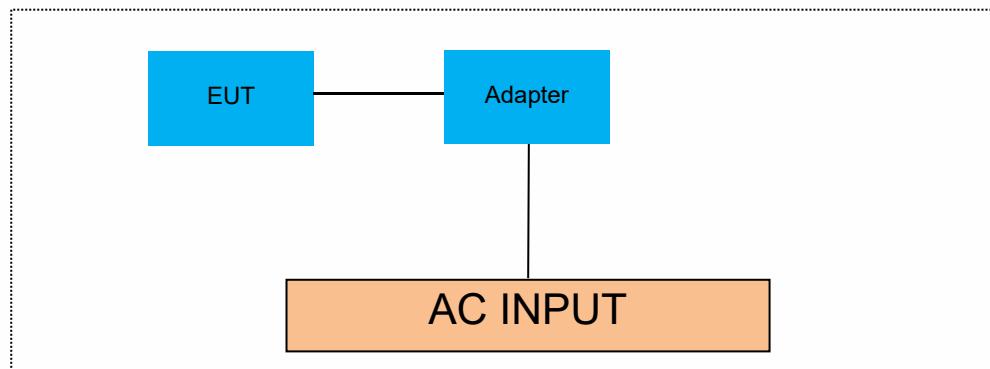

6.5 SUPPORT EQUIPMENT

N/A :

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7 TEST REQUIREMENTS

7.1 MINIMUM (6DB) OCCUPIED BANDWIDTH

7.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

7.1.4 Test Procedure

The EUT was operating in WIFI mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW.

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.


7.1.5 Test Results


Temperature : 25°C
Humidity : 45 %


ATM Pressure: 1011 mbar
Test Engineer: GJ


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.76	2407.08	2416.84	0.5	PASS
11B	Ant1	2437	9.76	2432.08	2441.84	0.5	PASS
11B	Ant1	2462	9.76	2457.08	2466.84	0.5	PASS
11G	Ant1	2412	13.60	2406.56	2420.16	0.5	PASS
11G	Ant1	2437	12.04	2430.96	2443.00	0.5	PASS
11G	Ant1	2462	1.36	2461.28	2462.64	0.5	PASS
11N20SISO	Ant1	2412	11.36	2406.92	2418.28	0.5	PASS
11N20SISO	Ant1	2437	1.88	2436.36	2438.24	0.5	PASS
11N20SISO	Ant1	2462	11.36	2406.92	2418.28	0.5	PASS
11N40SISO	Ant1	2422	31.36	2408.80	2440.16	0.5	PASS
11N40SISO	Ant1	2437	35.92	2419.24	2455.16	0.5	PASS
11N40SISO	Ant1	2452	31.12	2434.40	2465.52	0.5	PASS

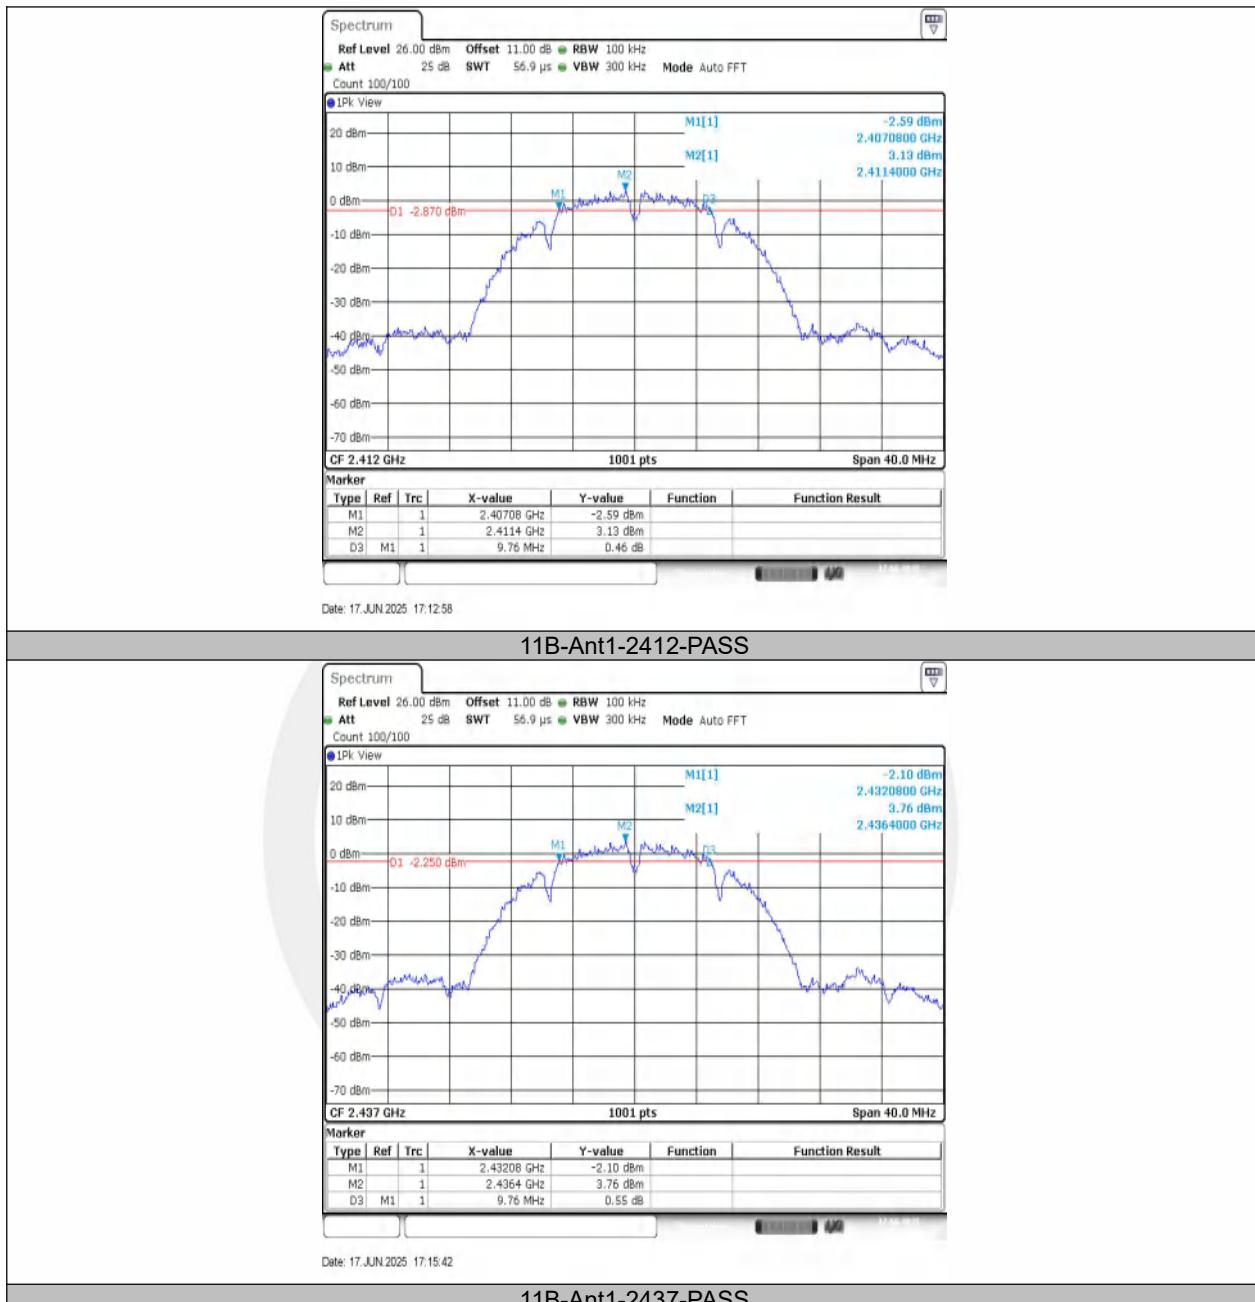


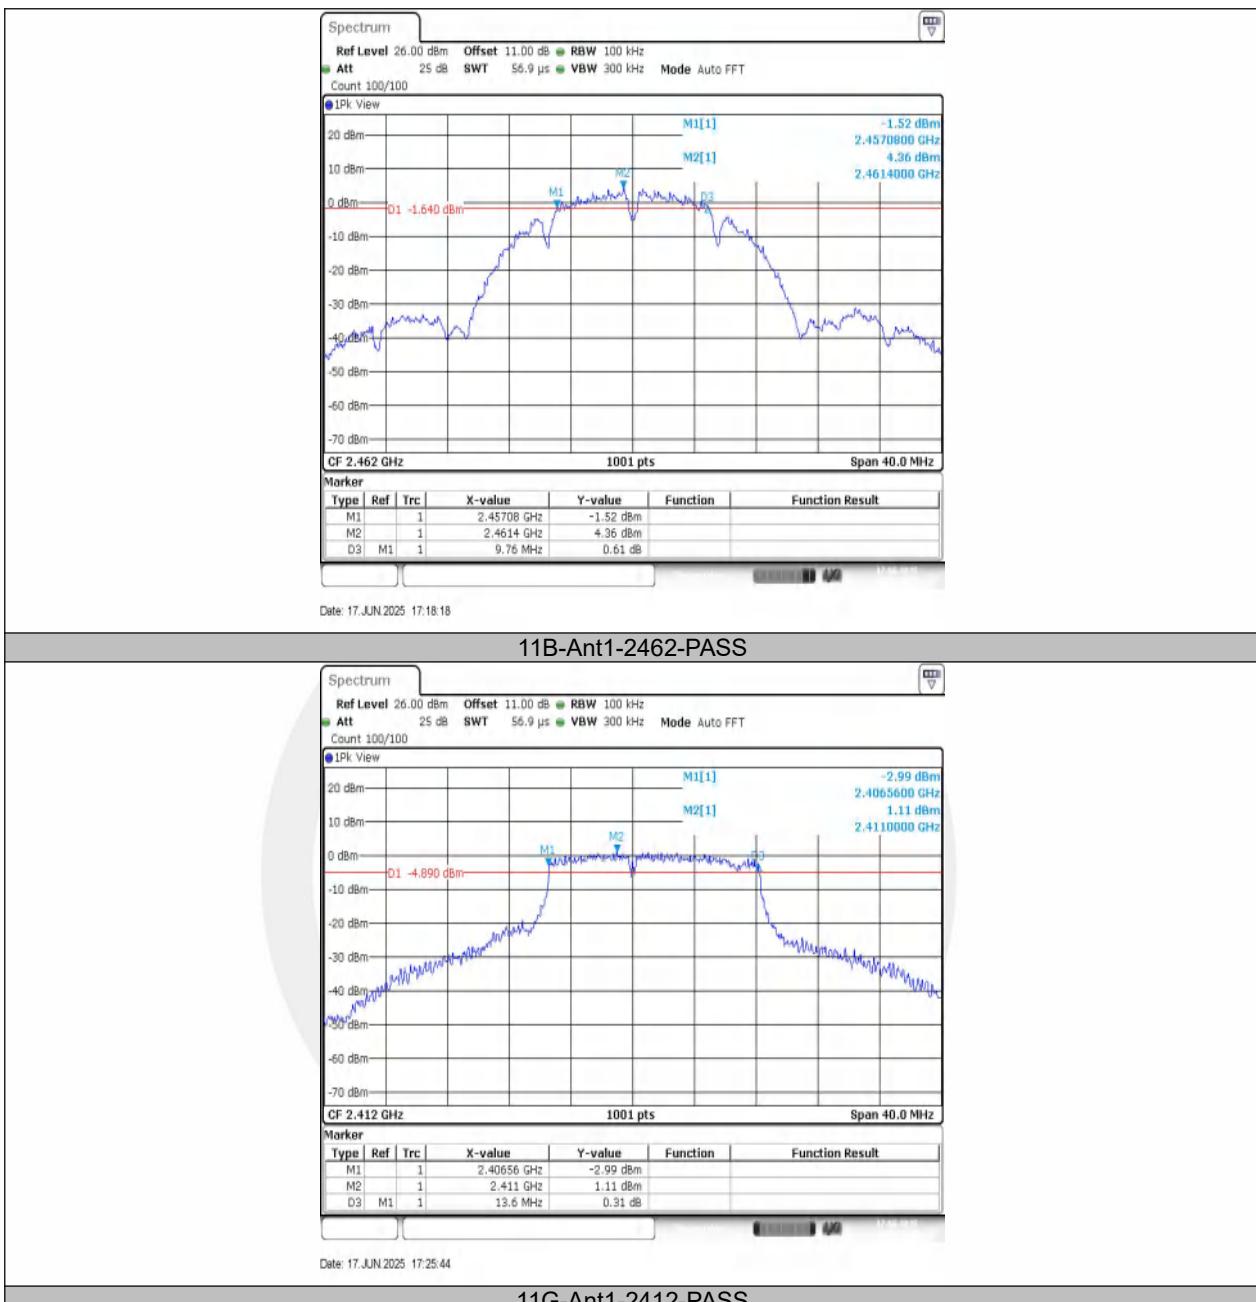

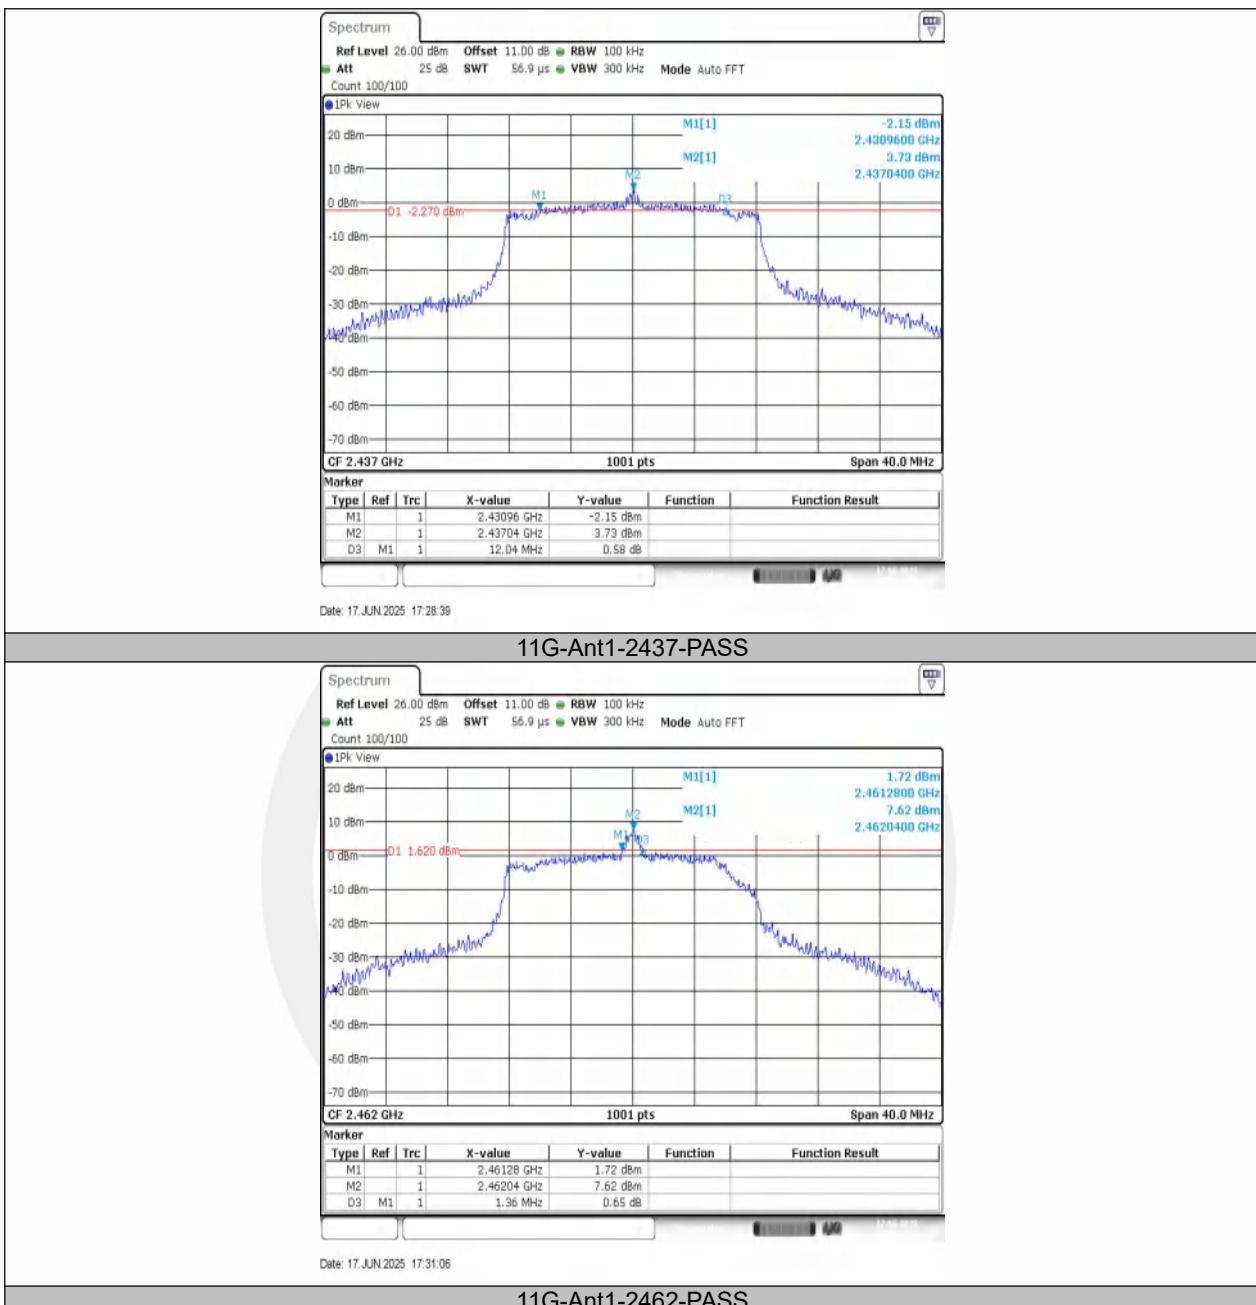

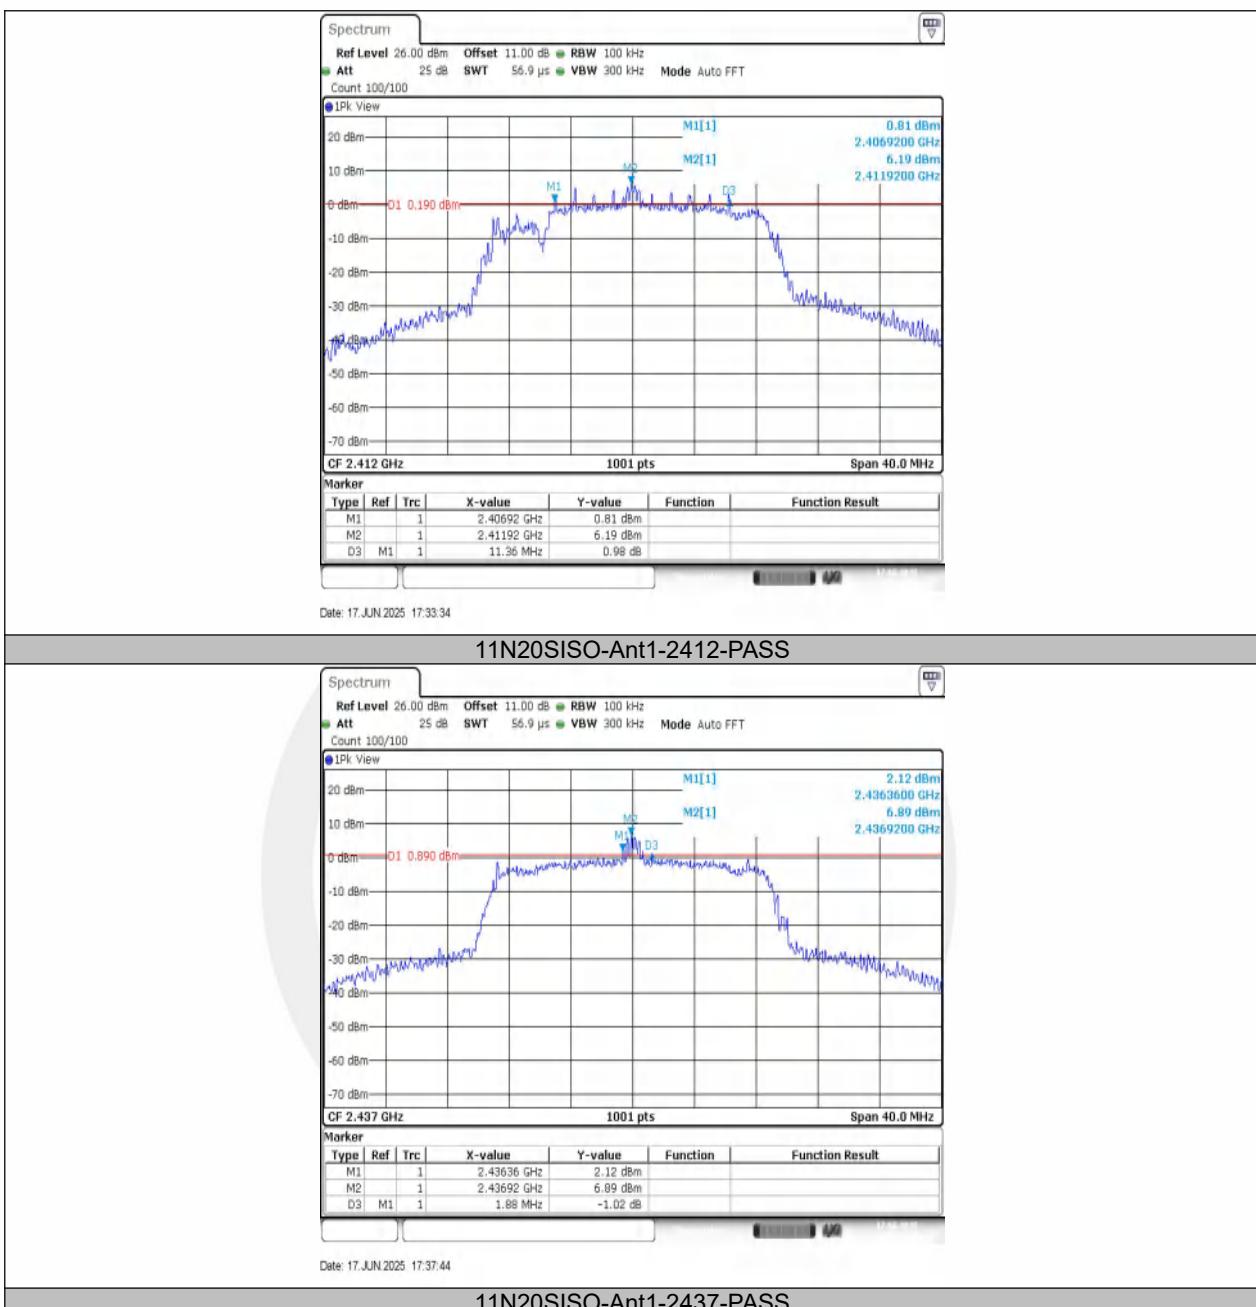

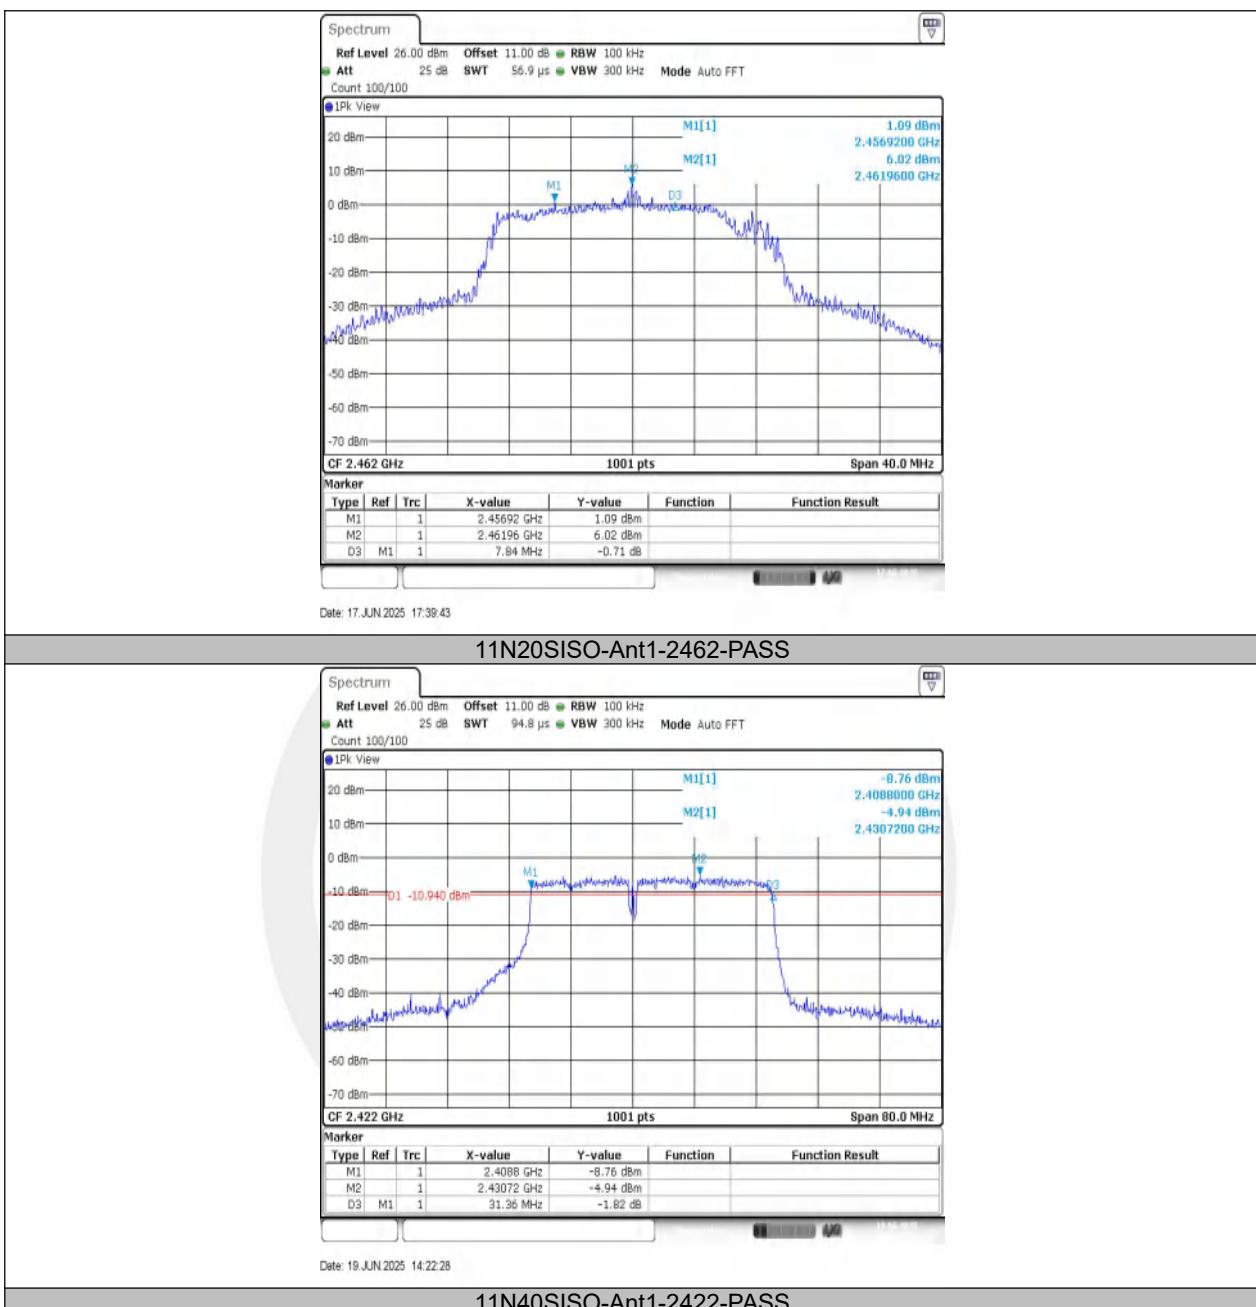

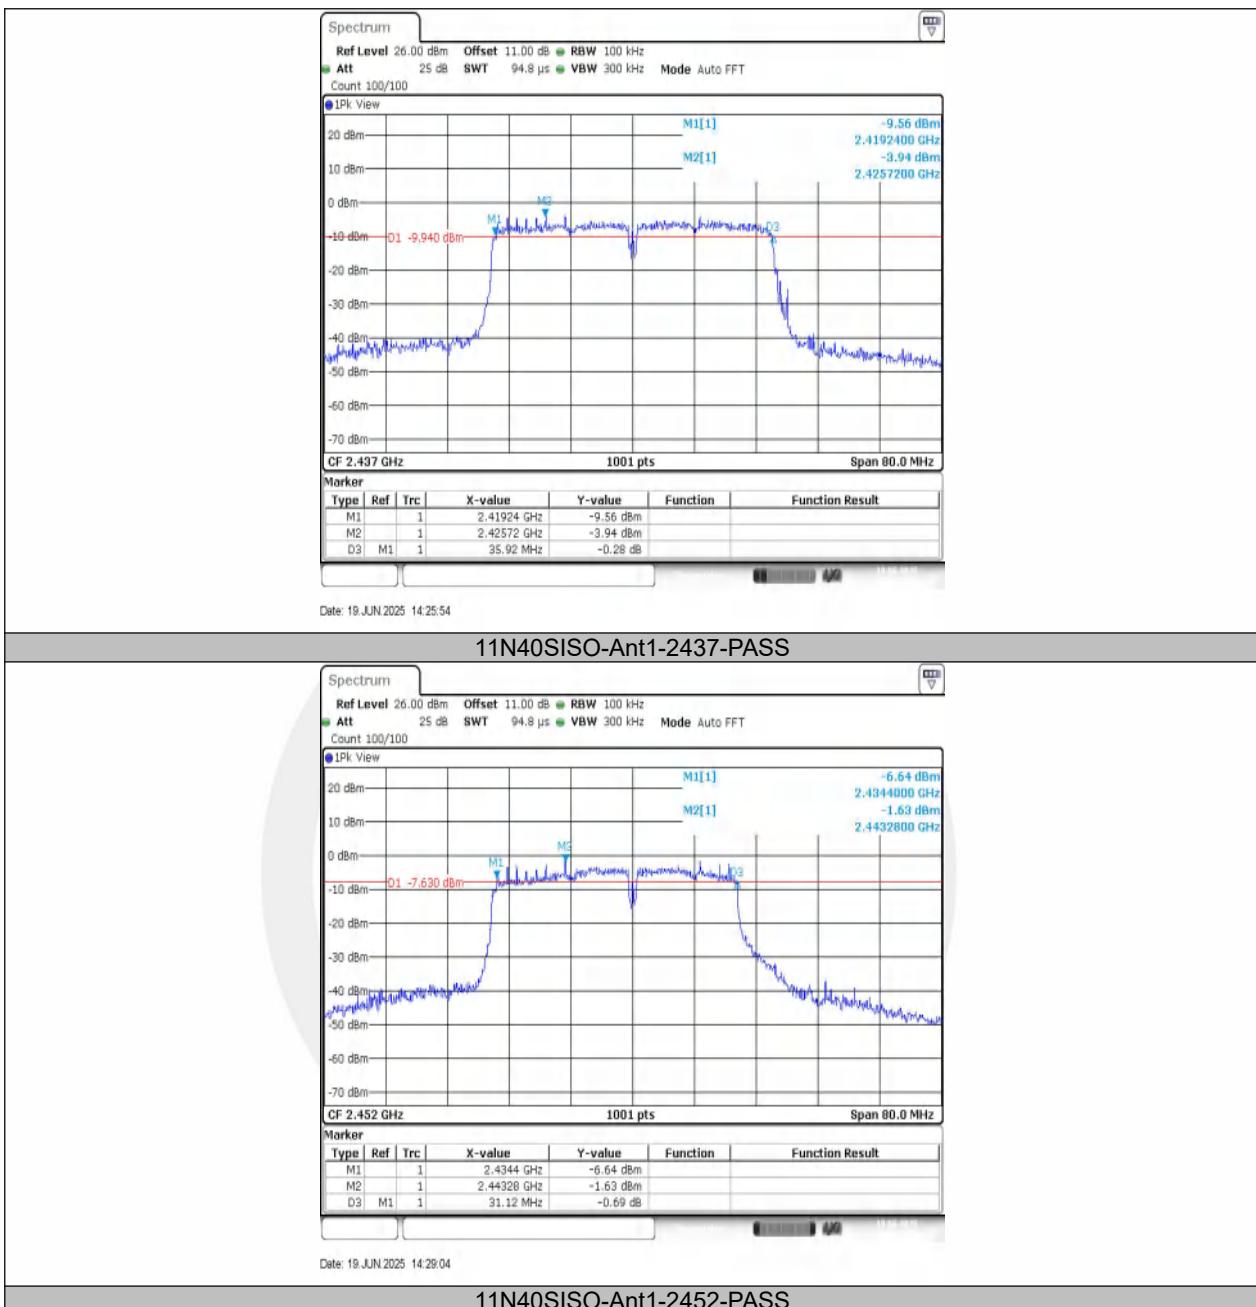

7.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.2.1 Applicable Standard

According to FCC Part15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.2.2 Conformance Limit

The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup.

7.2.4 Test Procedure

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

■ According to FCC Part 15.247(b)(4):


Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6).


7.2.5 Test Results


Temperature :	25°C	ATM Pressure:	1011 mbar
Humidity :	45 %	Test Engineer:	GJ


Test Mode	Antenna	Frequency [MHz]	Duty Cycle [%]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	100.00	13.86	≤30.00	2.98	16.84	≤36.00	PASS
11B	Ant1	2437	100.00	14.43	≤30.00	2.98	17.41	≤36.00	PASS
11B	Ant1	2462	100.00	15.01	≤30.00	2.98	17.99	≤36.00	PASS
11G	Ant1	2412	100.00	13.88	≤30.00	2.98	16.86	≤36.00	PASS
11G	Ant1	2437	100.00	13.72	≤30.00	2.98	16.70	≤36.00	PASS
11G	Ant1	2462	100.00	14.02	≤30.00	2.98	17.00	≤36.00	PASS
11N20SISO	Ant1	2412	100.00	13.72	≤30.00	2.98	16.70	≤36.00	PASS
11N20SISO	Ant1	2437	100.00	13.59	≤30.00	2.98	16.57	≤36.00	PASS
11N20SISO	Ant1	2462	100.00	13.83	≤30.00	2.98	16.81	≤36.00	PASS
11N40SISO	Ant1	2422	100.00	10.94	≤30.00	2.98	13.92	≤36.00	PASS
11N40SISO	Ant1	2437	100.00	11.75	≤30.00	2.98	14.73	≤36.00	PASS
11N40SISO	Ant1	2452	100.00	12.77	≤30.00	2.98	15.75	≤36.00	PASS

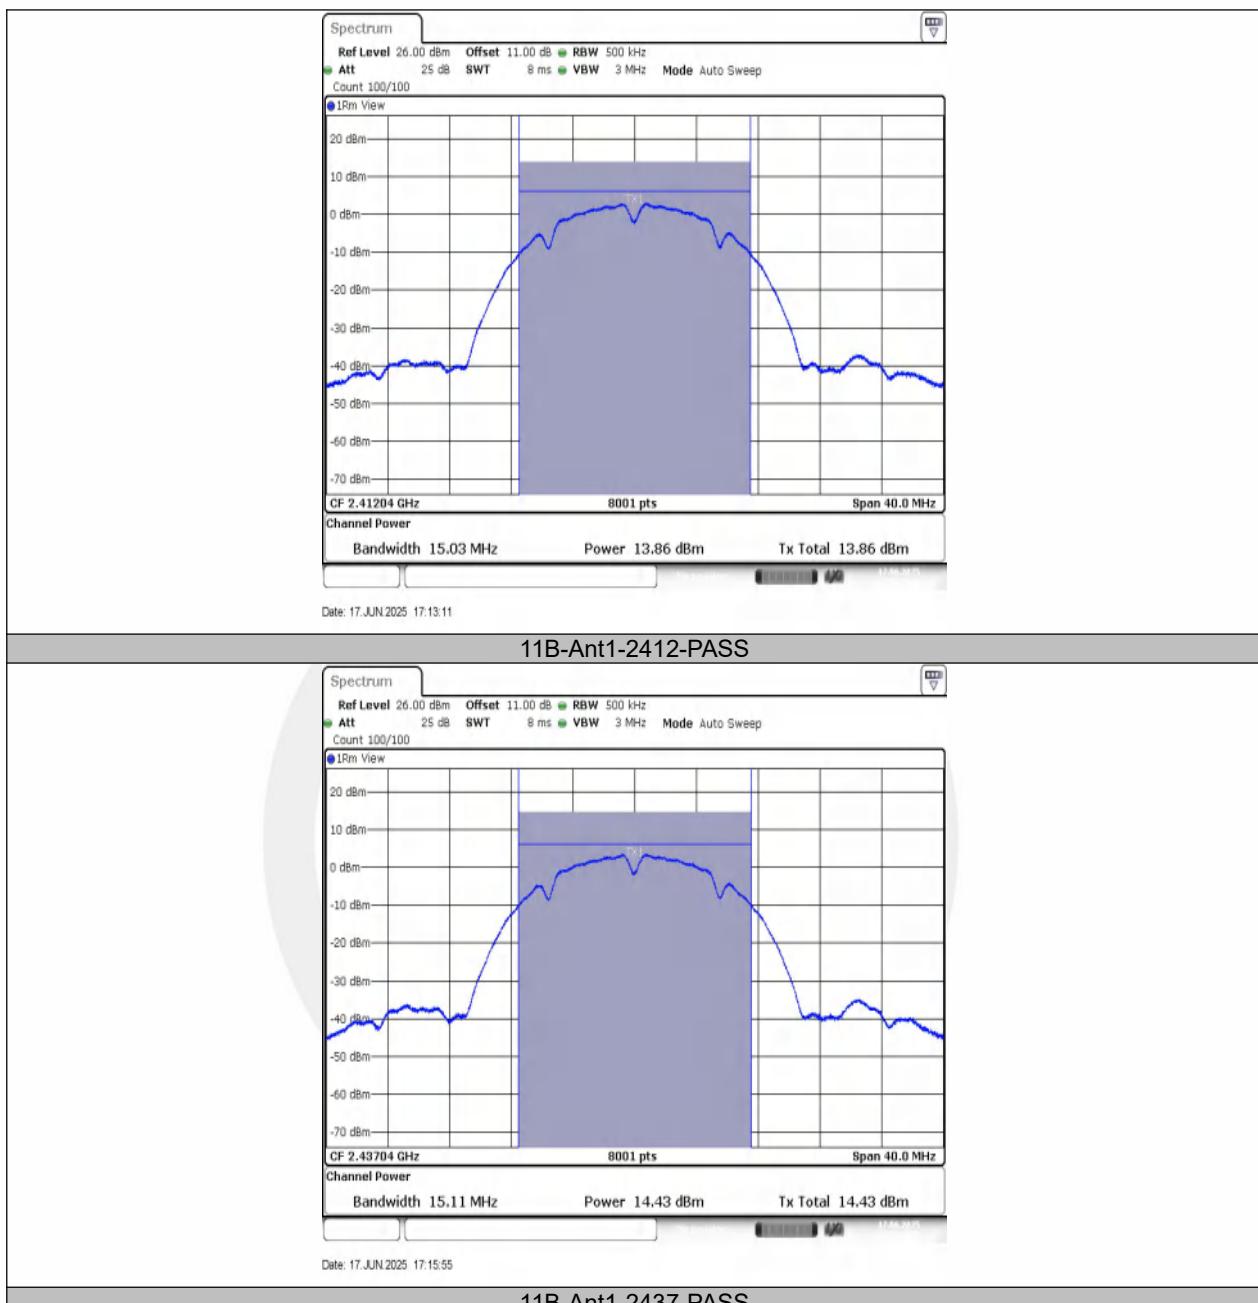


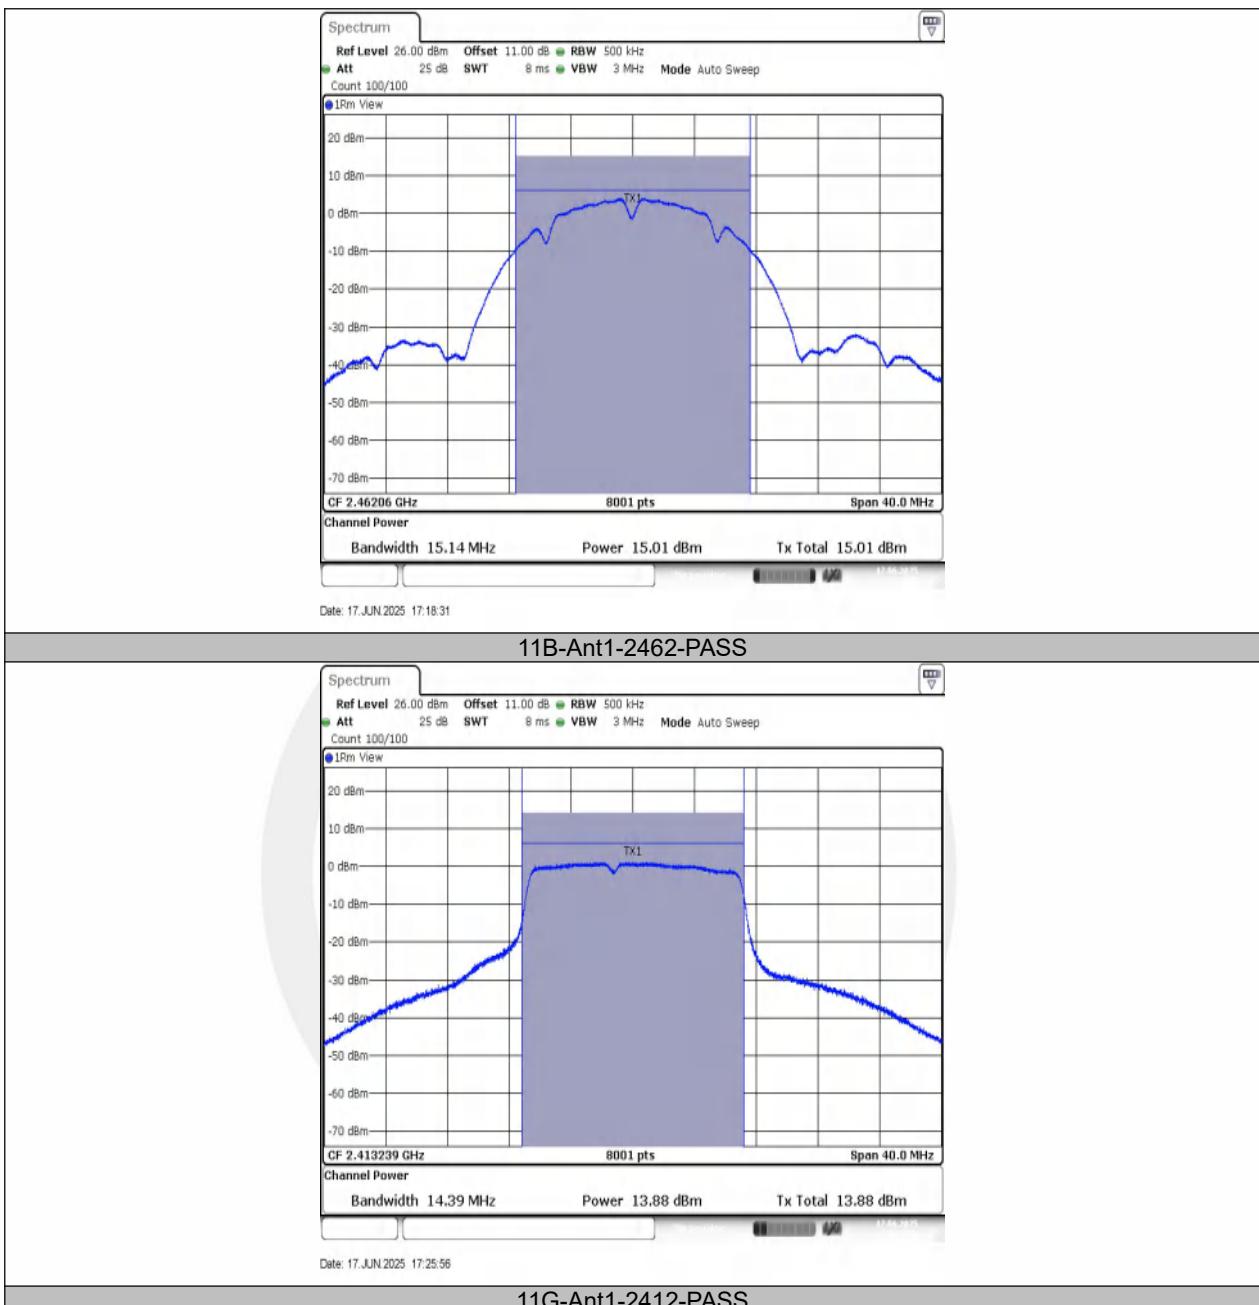

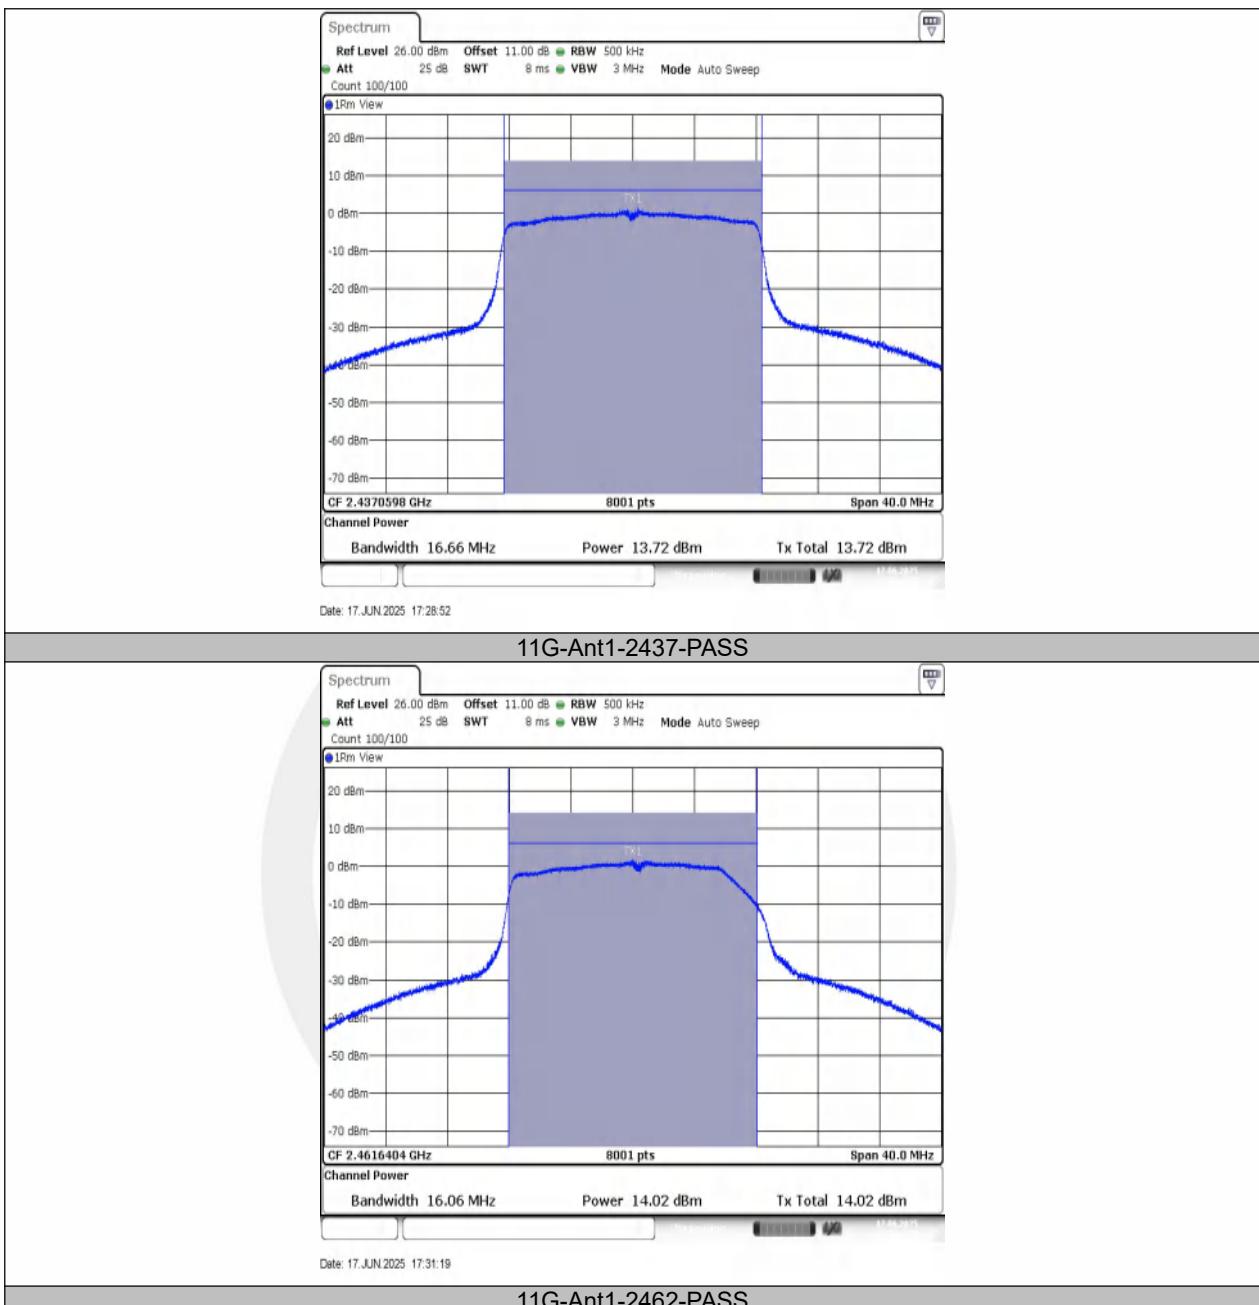

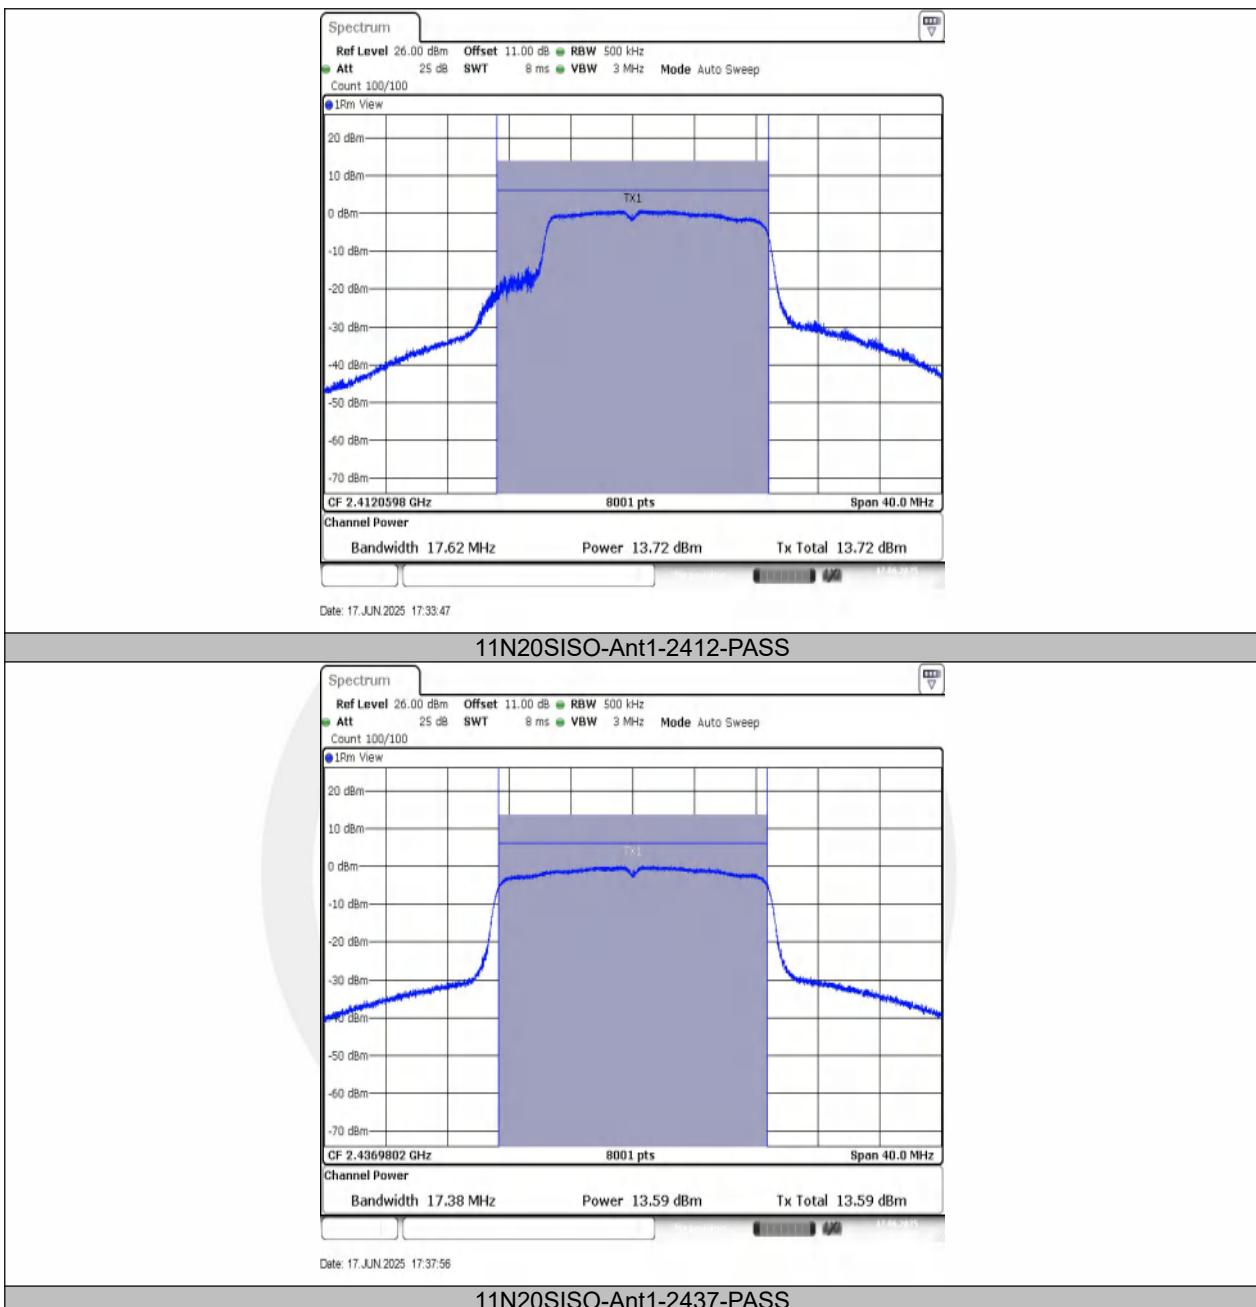

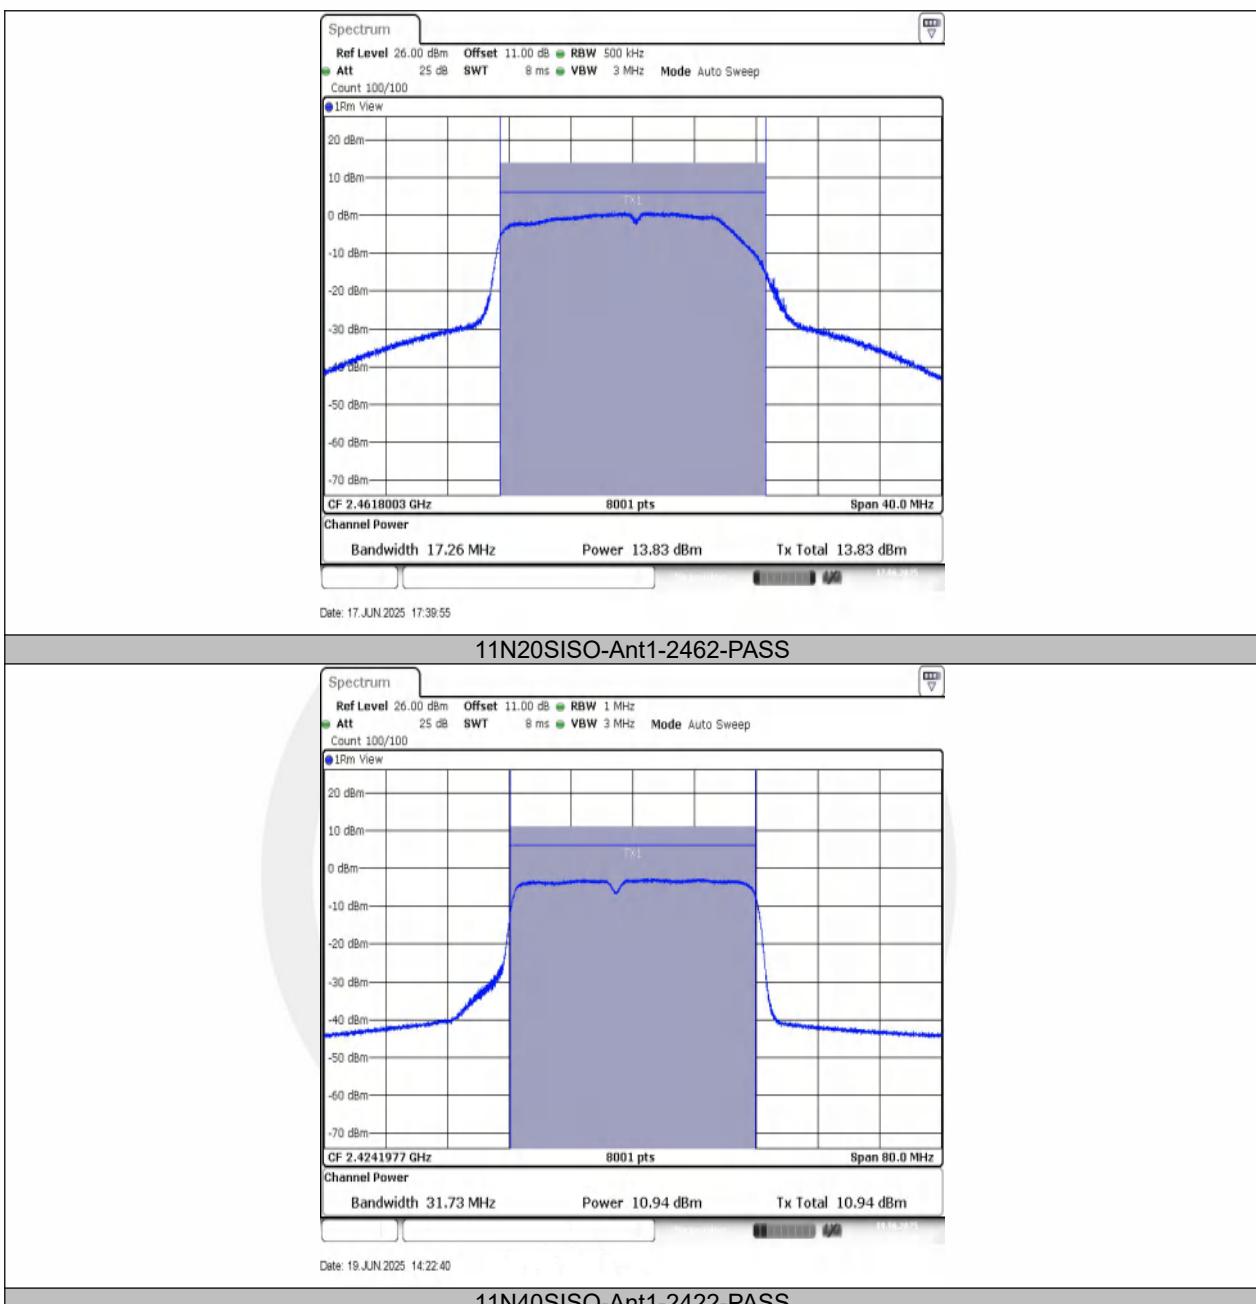

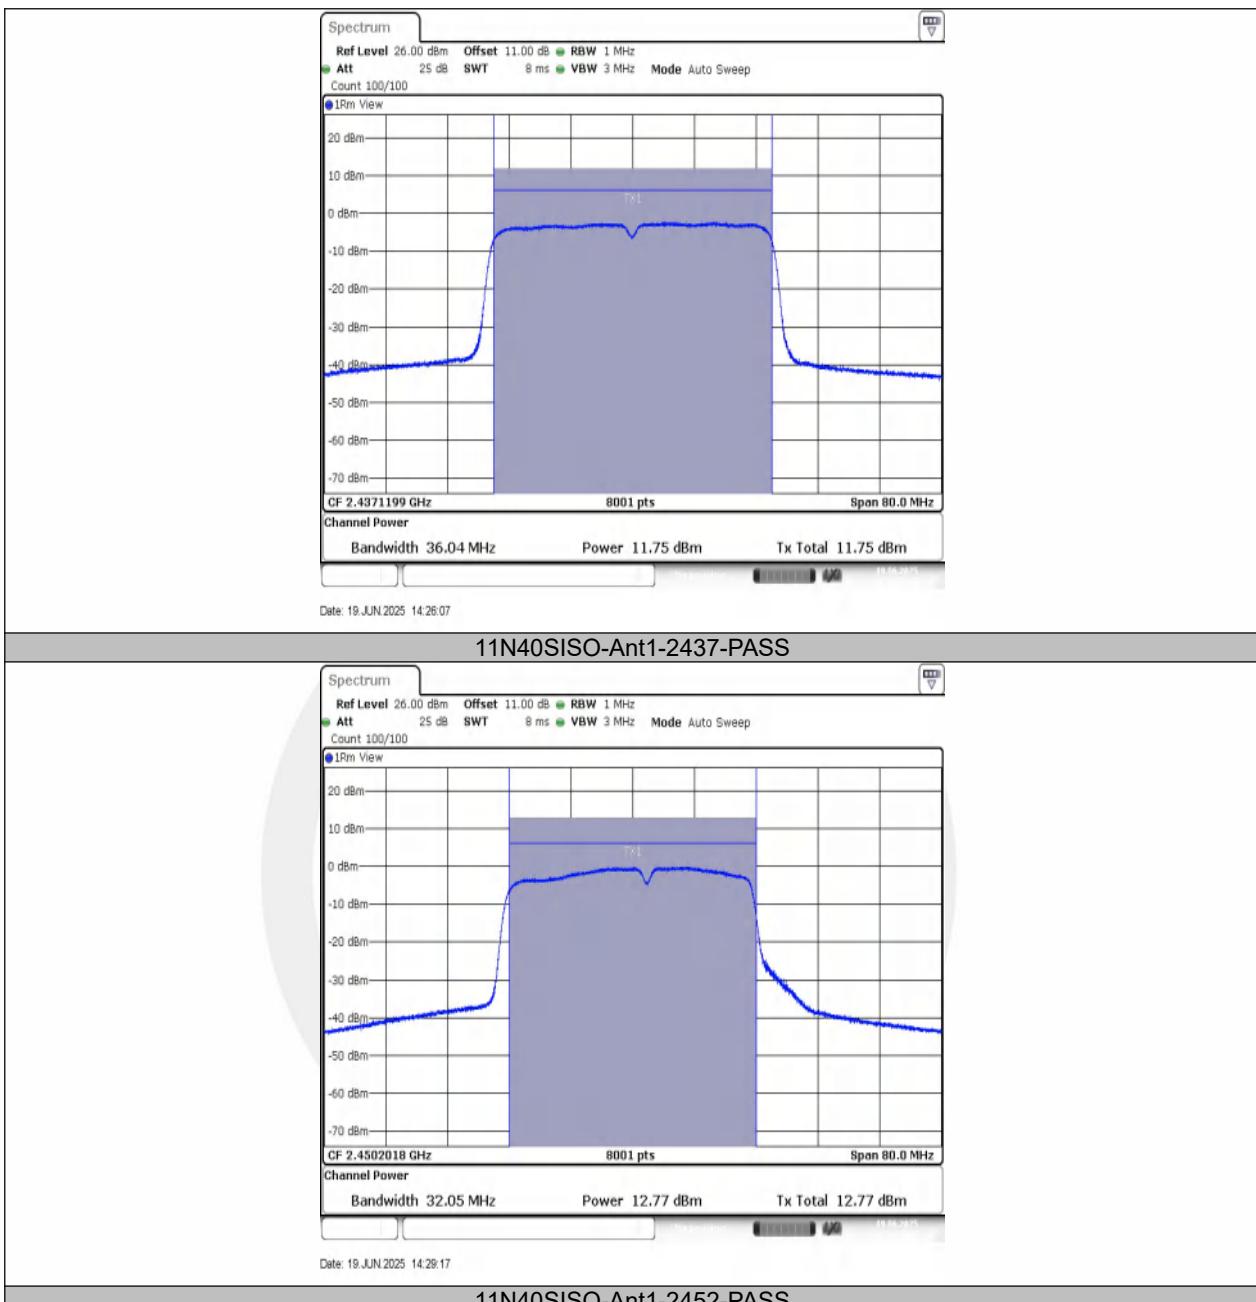

7.3 MAXIMUM POWER SPECTRAL DENSITY

7.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

7.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

7.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer.

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz.

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level within the RBW.


7.3.5 Test Results


Temperature : 25°C
 Humidity : 45 %


ATM Pressure: 1011 mbar
 Test Engineer: GJ


TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-8.51	≤8.00	PASS
11B	Ant1	2437	-7.94	≤8.00	PASS
11B	Ant1	2462	-7.38	≤8.00	PASS
11G	Ant1	2412	-9.86	≤8.00	PASS
11G	Ant1	2437	-9.79	≤8.00	PASS
11G	Ant1	2462	-9.42	≤8.00	PASS
11N20SISO	Ant1	2412	-10.04	≤8.00	PASS
11N20SISO	Ant1	2437	-11.19	≤8.00	PASS
11N20SISO	Ant1	2462	-10.12	≤8.00	PASS
11N40SISO	Ant1	2422	-11.64	≤8.00	PASS
11N40SISO	Ant1	2437	-11.46	≤8.00	PASS
11N40SISO	Ant1	2452	-11.46	≤8.00	PASS

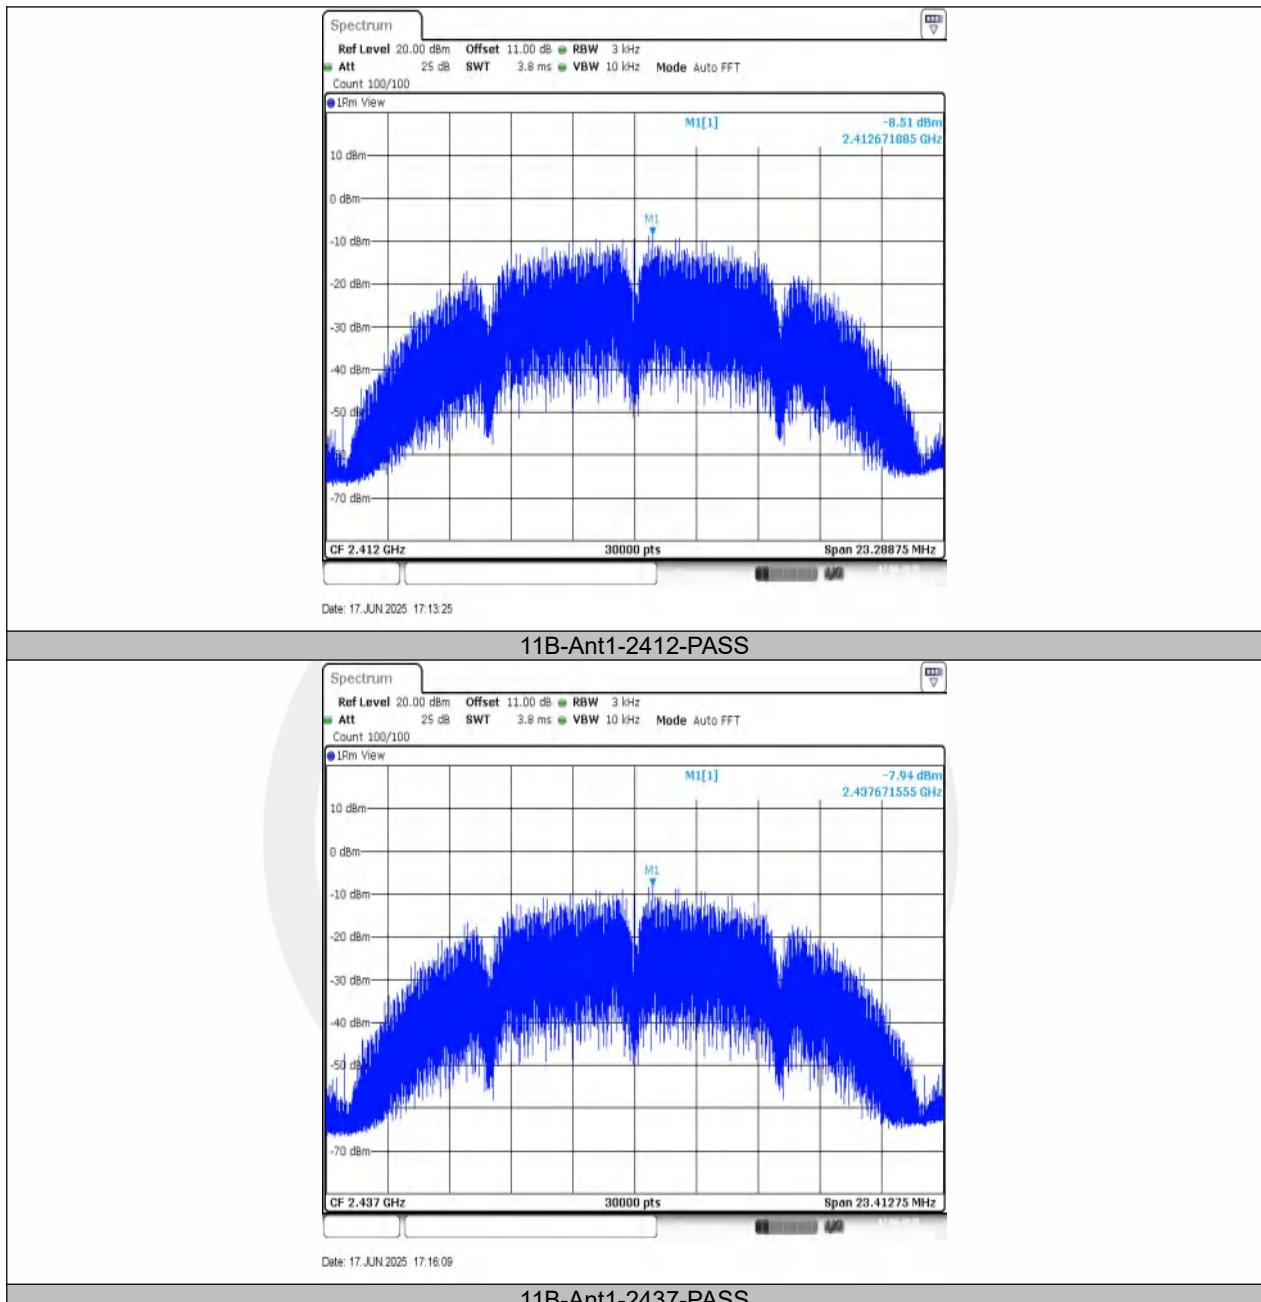


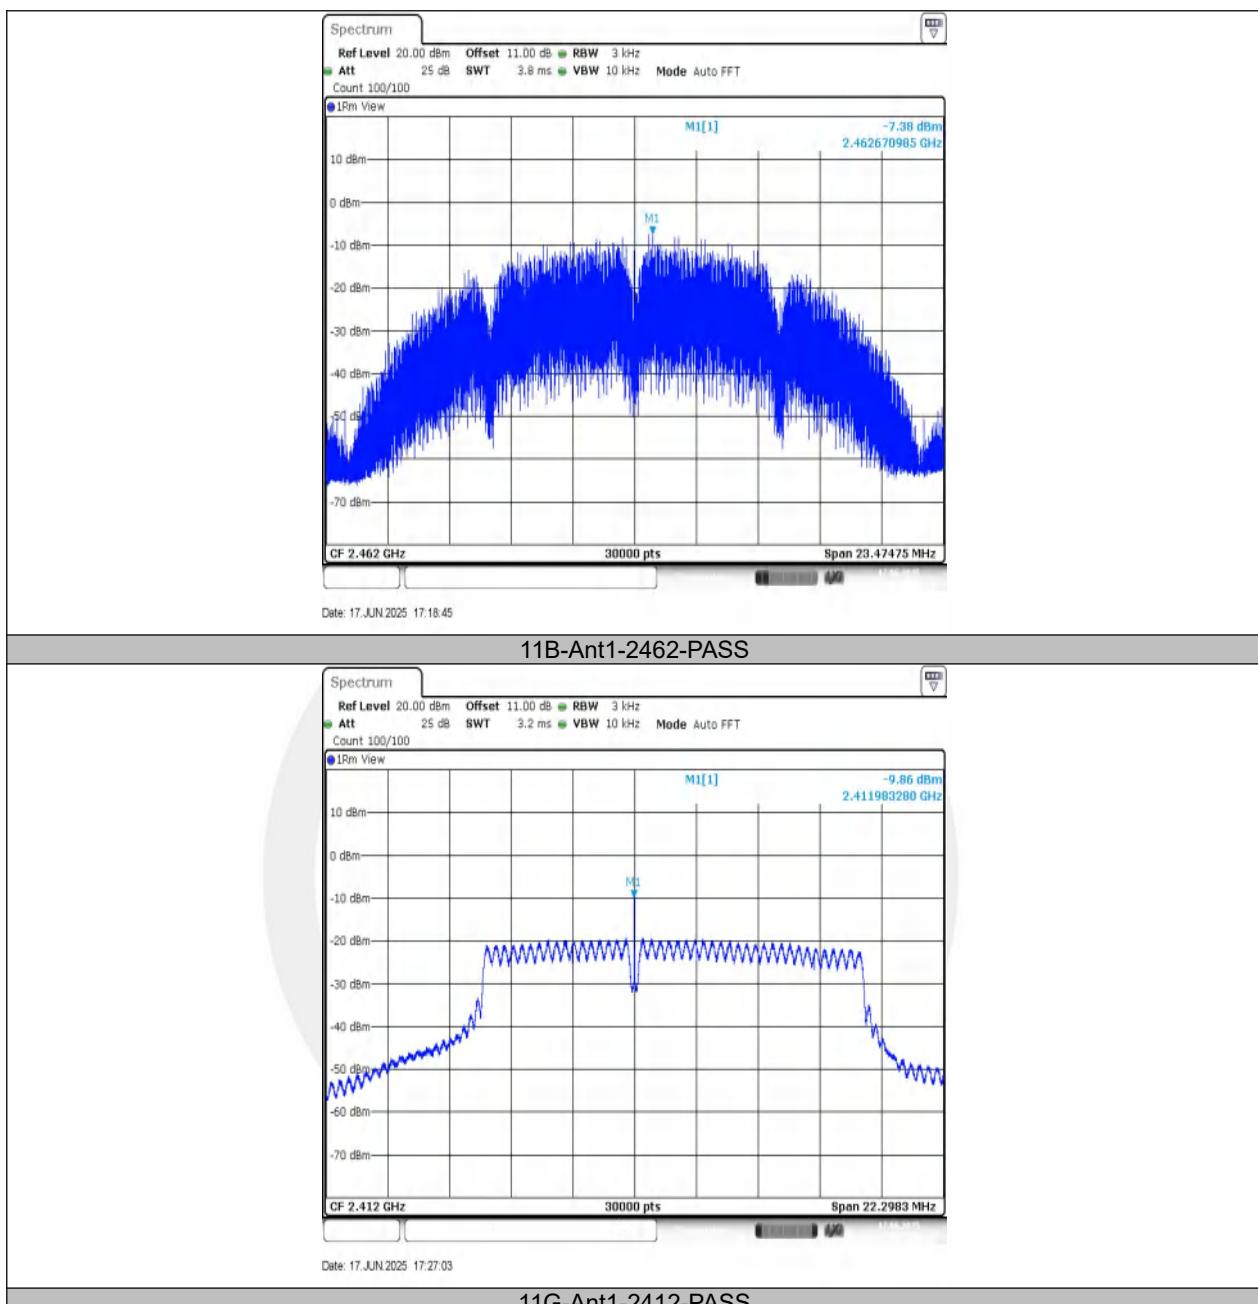

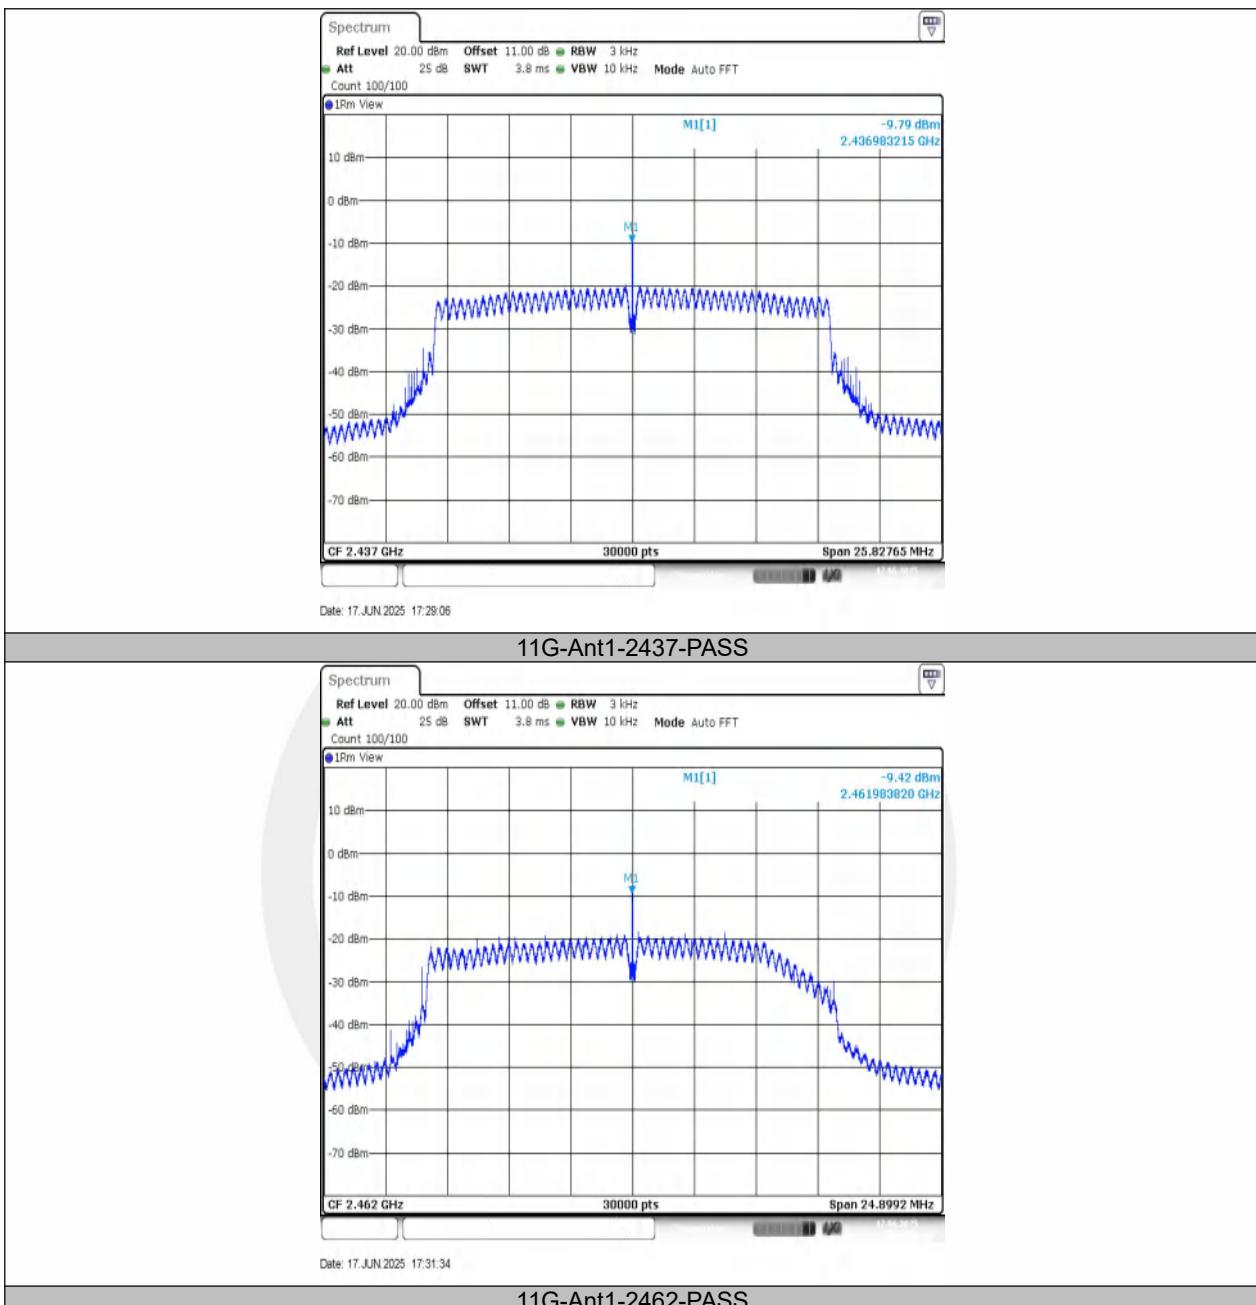

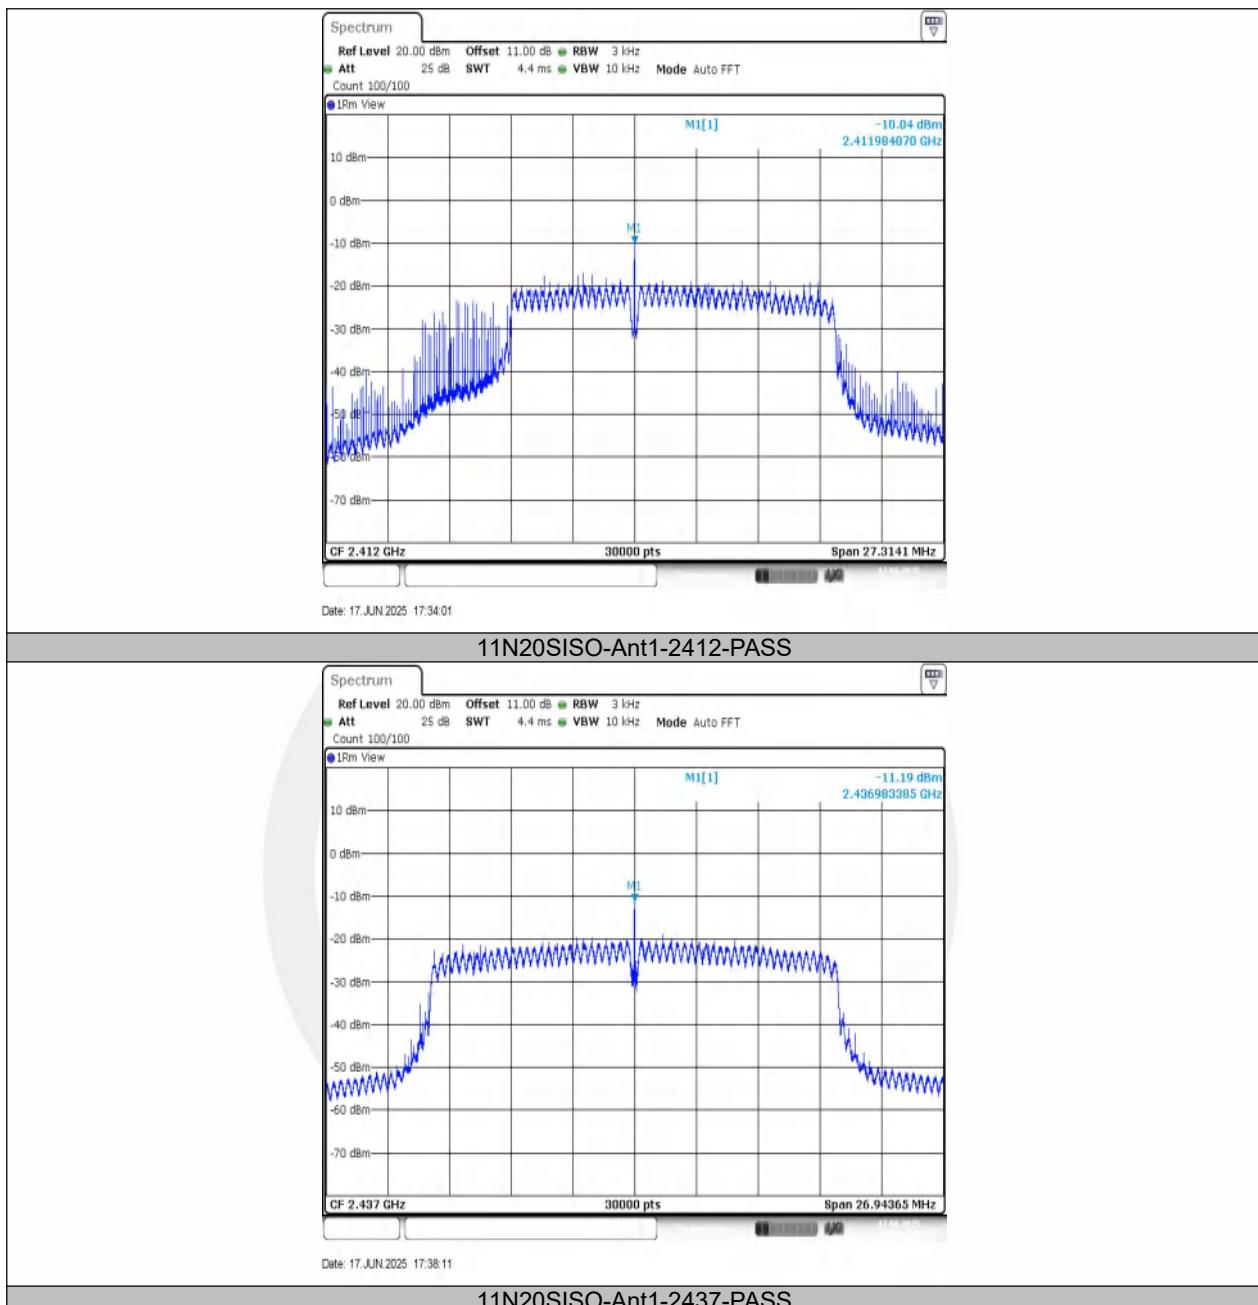

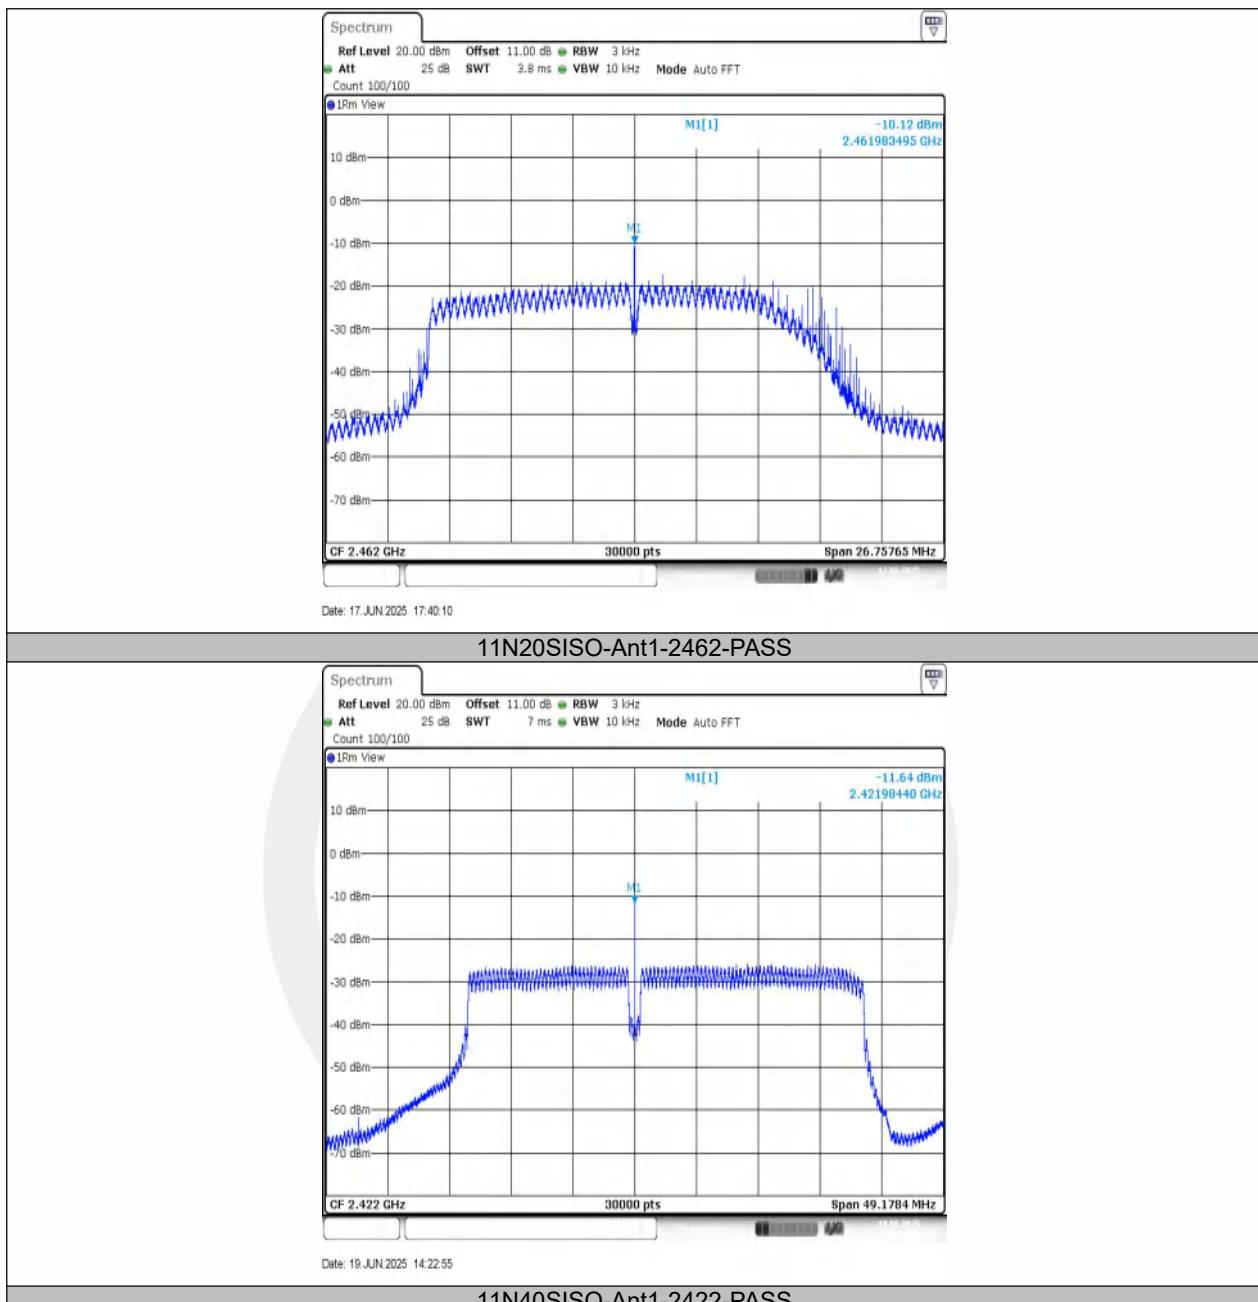

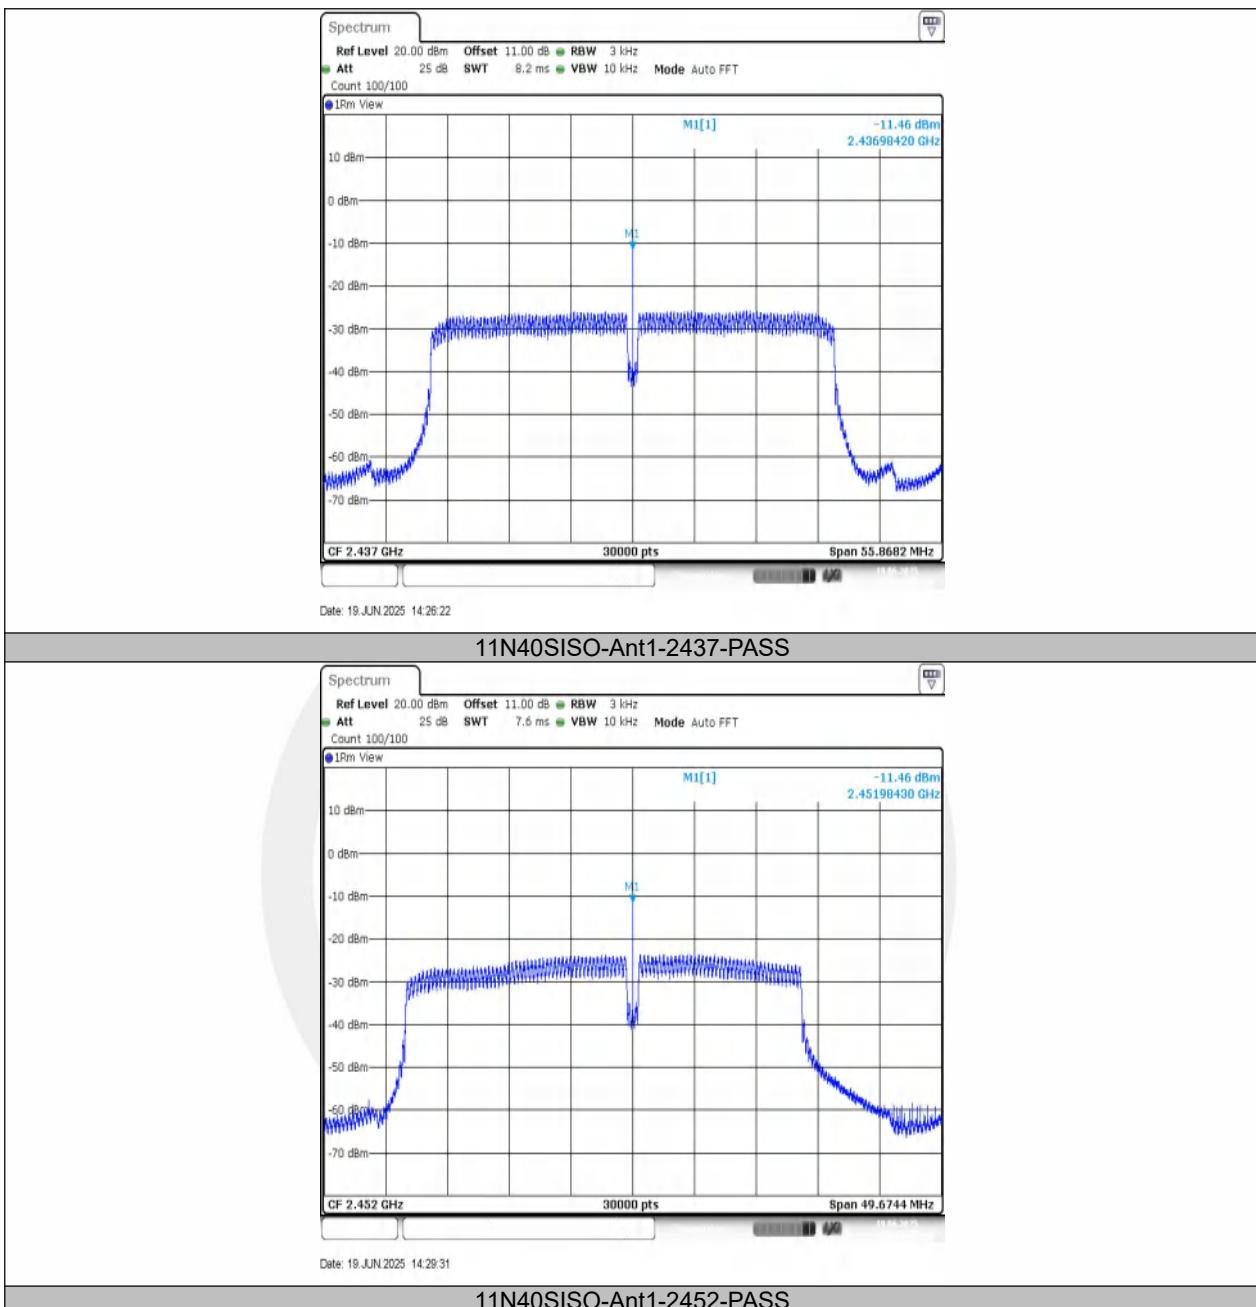

7.4 UNWANTED SPURIOUS EMISSIONS

7.4.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

7.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer.

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to \geq 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW \geq 3 x RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

7.4.5 Test Results

Temperature :

25°C

ATM Pressure:

1011 mbar

Humidity :

45 %


Test Engineer:


GJ


All modulation modes were tested, and the worst data is shown in the table below:


Band edge measurements

TestMode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	3.17	-37.99	≤-26.83	PASS
11B	Ant1	High	2462	4.28	-44.27	≤-25.72	PASS
11G	Ant1	Low	2412	3.21	-31.12	≤-16.79	PASS
11G	Ant1	High	2462	6.21	-42.71	≤-23.79	PASS
11N20SISO	Ant1	Low	2412	2.17	-23.42	≤-17.83	PASS
11N20SISO	Ant1	High	2462	2.40	-35.07	≤-27.6	PASS
11N40SISO	Ant1	Low	2422	-3.92	-41.9	≤-33.92	PASS
11N40SISO	Ant1	High	2452	-0.85	-41.72	≤-30.85	PASS

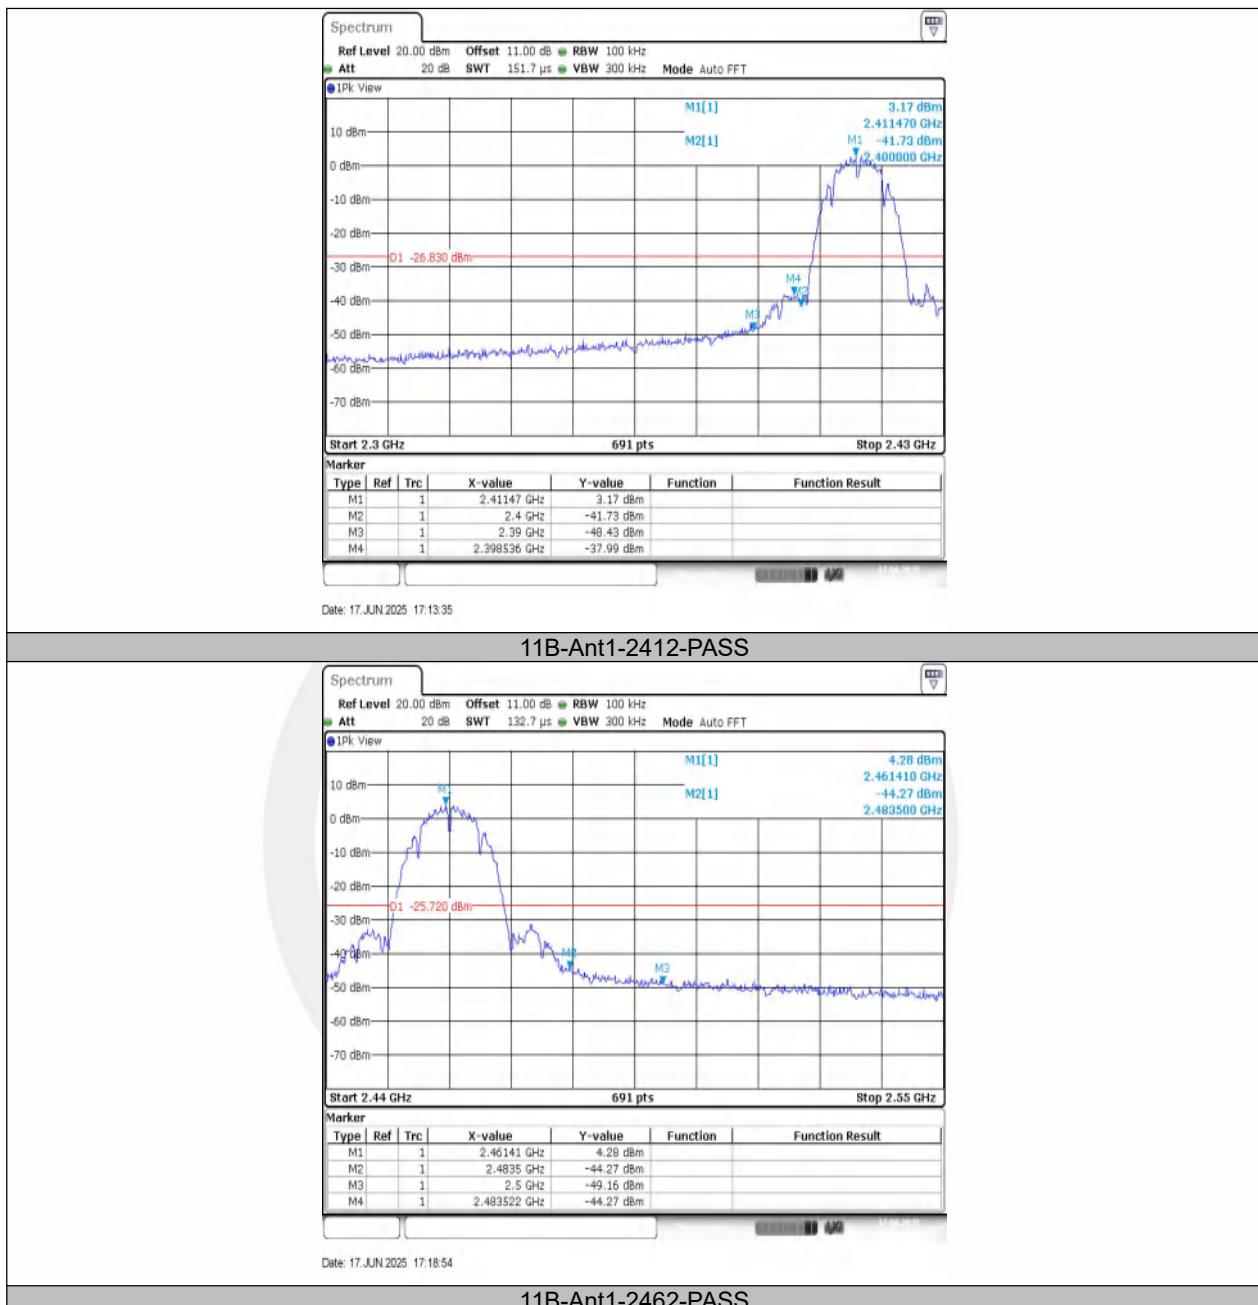

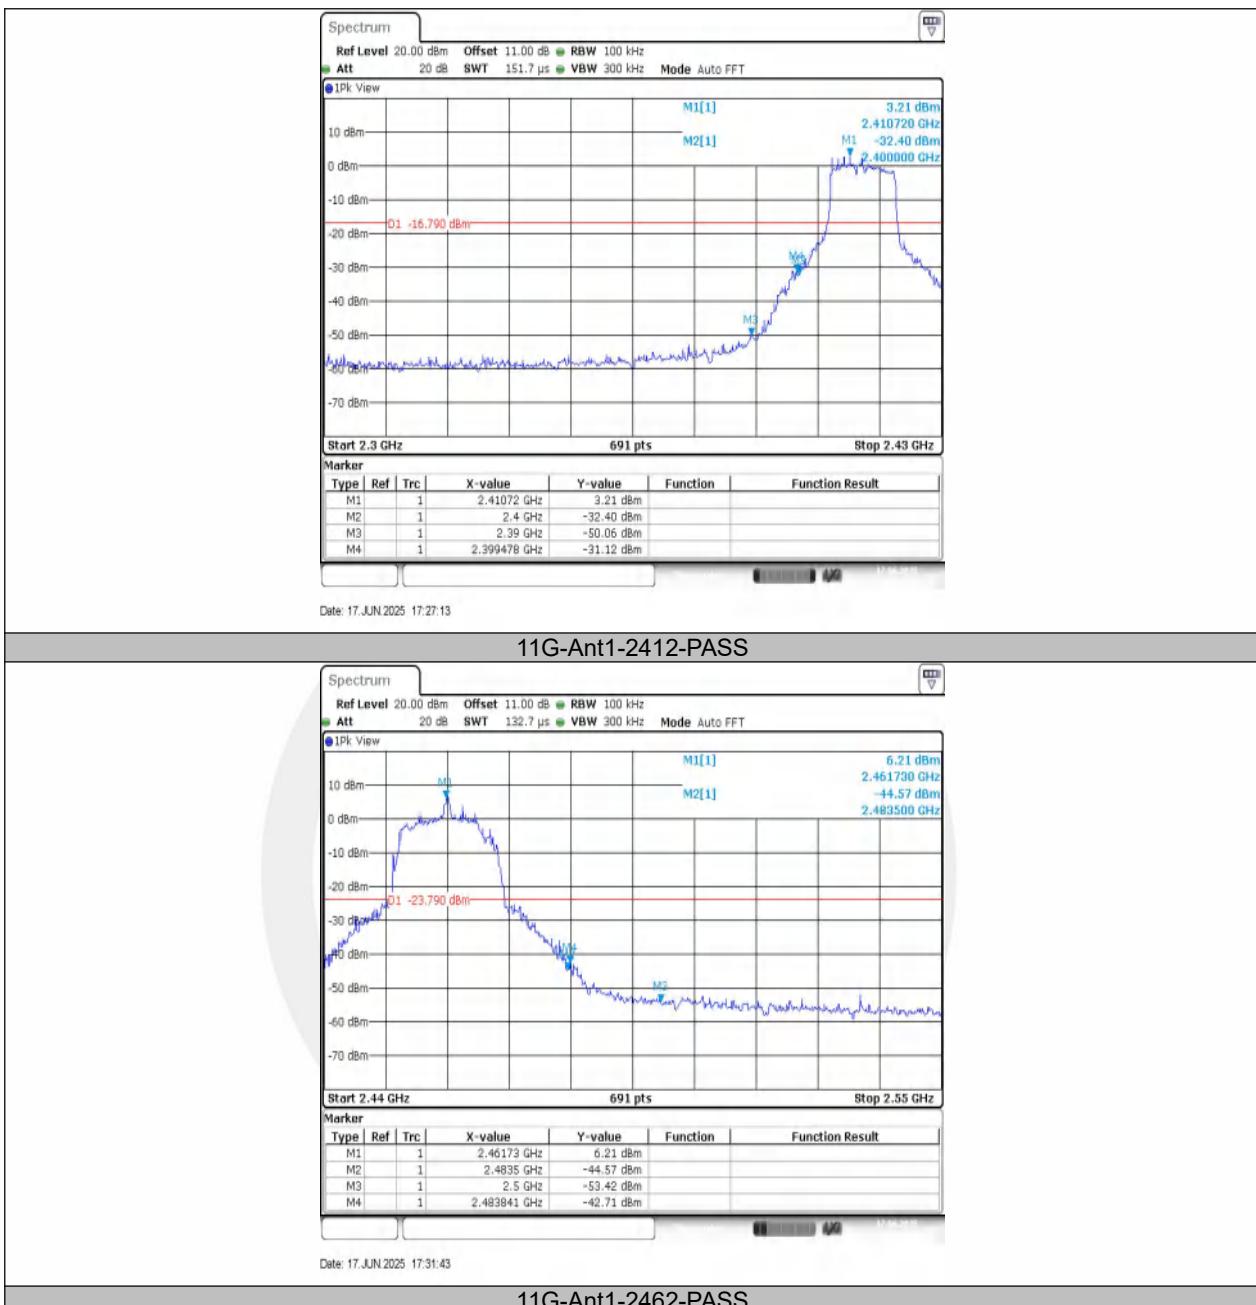


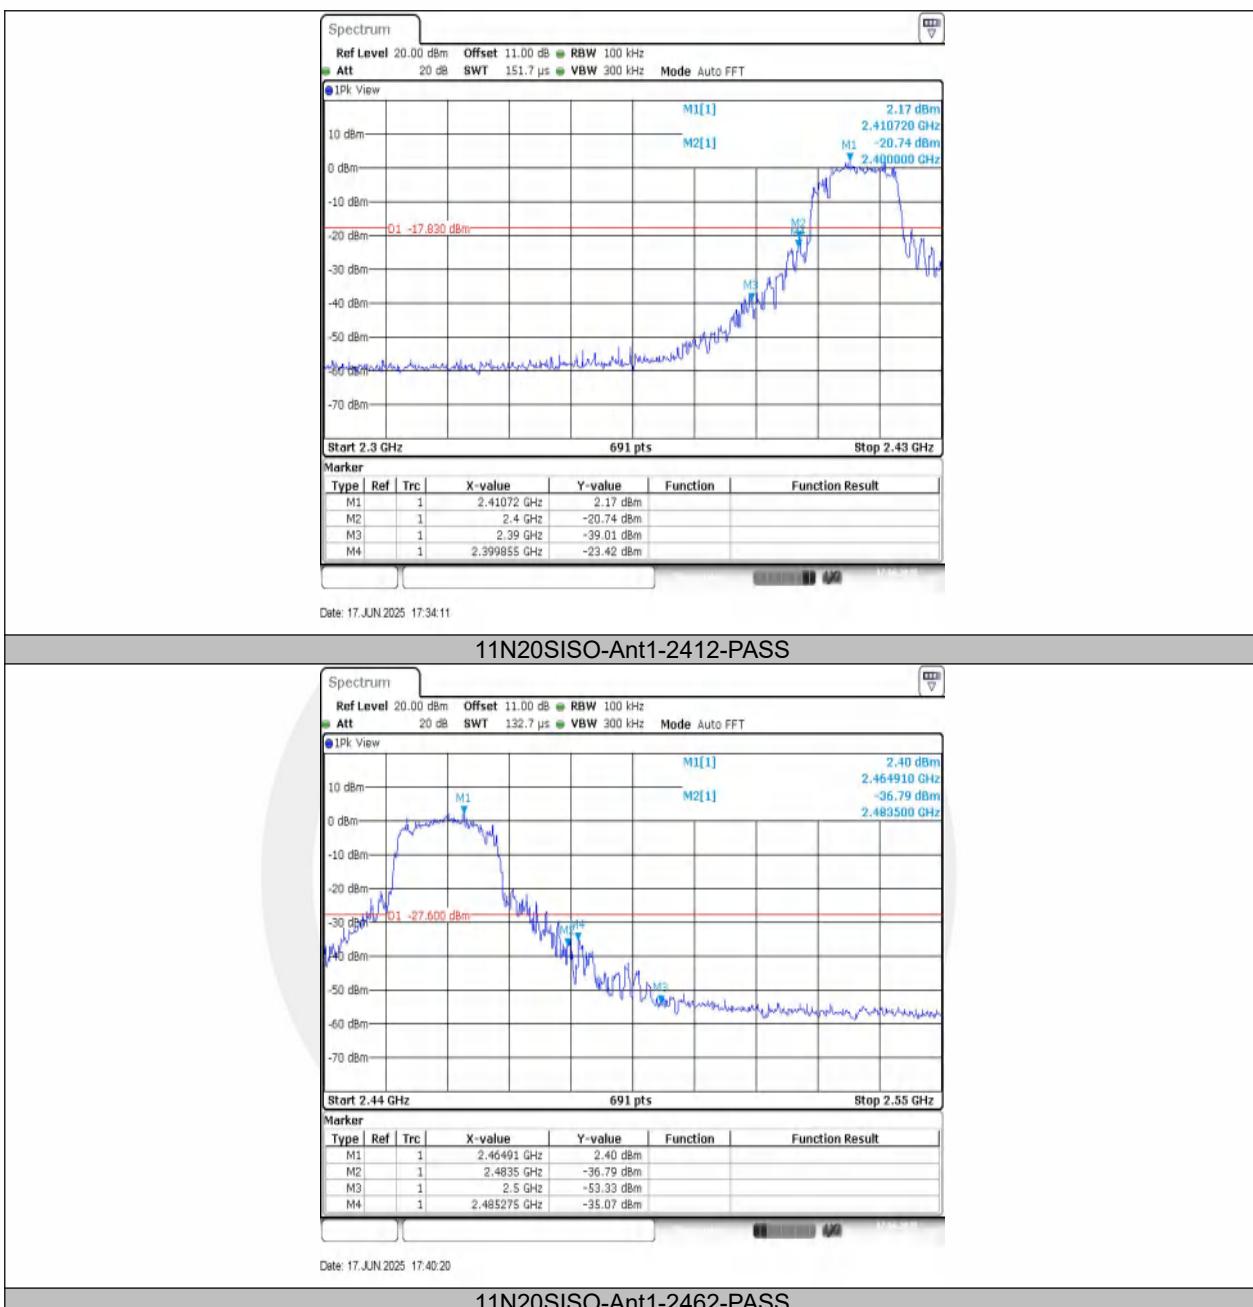


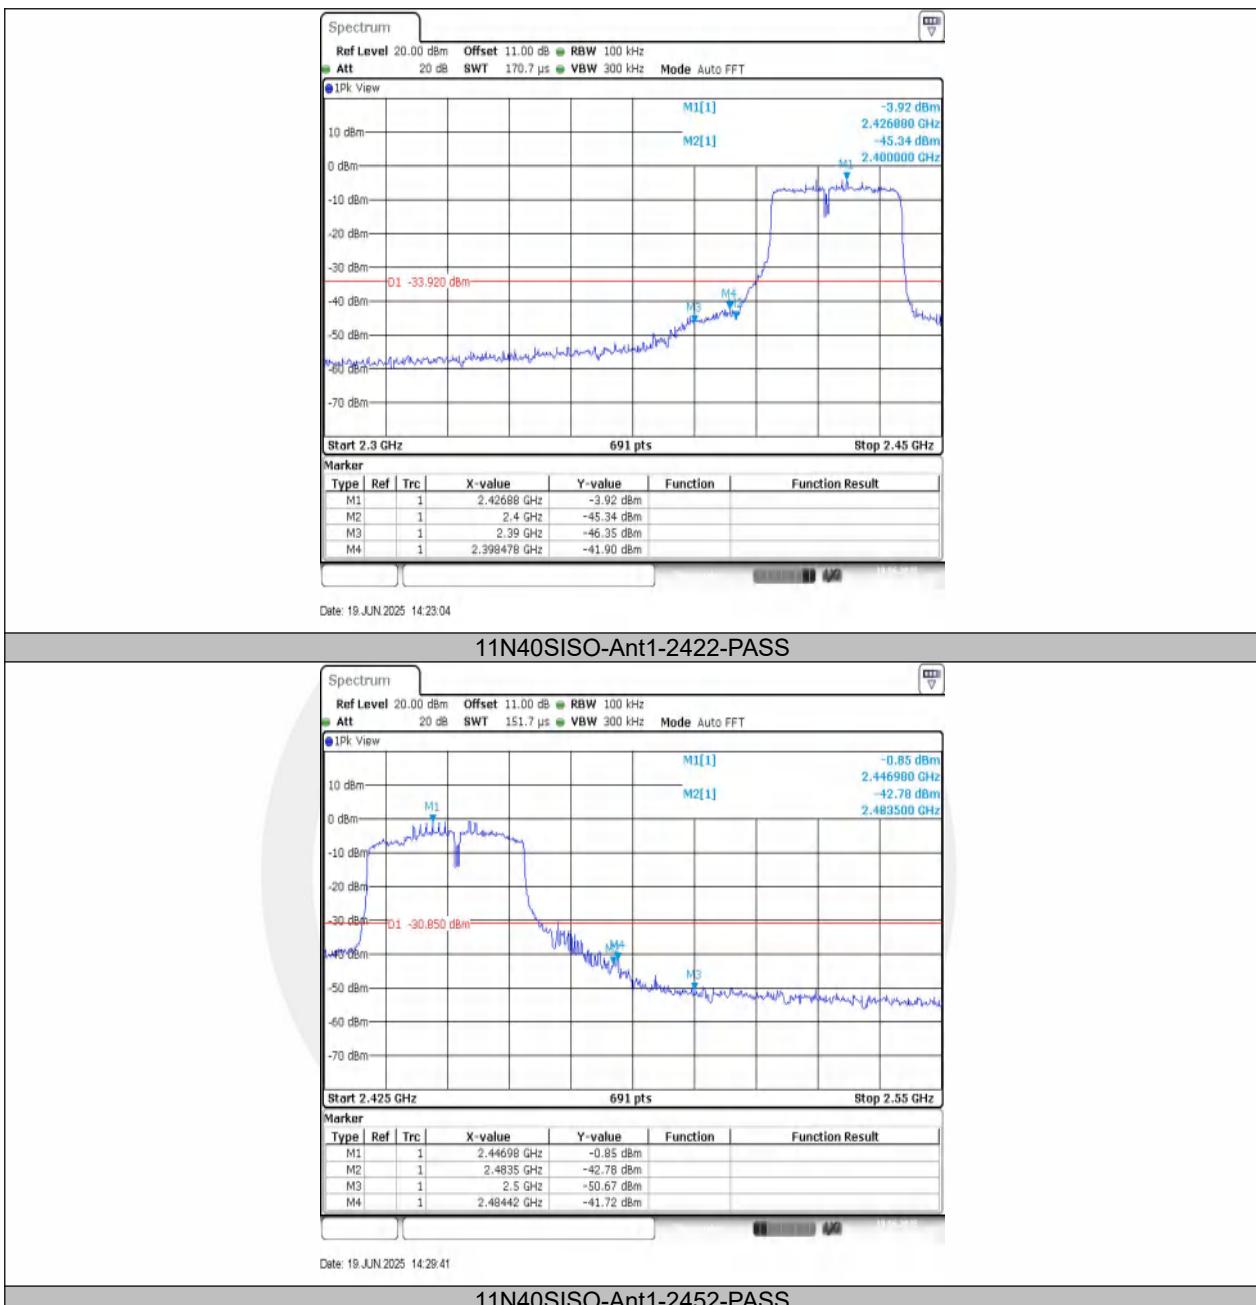



Emission level measurement


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	2.72	2.72	---	PASS
11B	Ant1	2412	30~1000	2.72	-64.31	≤-27.28	PASS
11B	Ant1	2412	1000~26500	2.72	-50.19	≤-27.28	PASS
11B	Ant1	2437	0~Reference	3.44	3.44	---	PASS
11B	Ant1	2437	30~1000	3.44	-64.41	≤-26.56	PASS
11B	Ant1	2437	1000~26500	3.44	-50.76	≤-26.56	PASS
11G	Ant1	2412	30~1000	0.71	-65.09	≤-29.29	PASS
11G	Ant1	2412	1000~26500	0.71	-53.06	≤-29.29	PASS
11G	Ant1	2437	0~Reference	6.30	6.30	---	PASS
11G	Ant1	2462	1000~26500	6.47	-52.21	≤-23.53	PASS
11N20SISO	Ant1	2412	0~Reference	1.68	1.68	---	PASS
11N20SISO	Ant1	2412	30~1000	1.68	-63.81	≤-28.32	PASS
11N20SISO	Ant1	2412	1000~26500	1.68	-52.61	≤-28.32	PASS
11N20SISO	Ant1	2437	0~Reference	5.52	5.52	---	PASS
11N20SISO	Ant1	2437	30~1000	5.52	-63.98	≤-24.48	PASS
11N20SISO	Ant1	2437	1000~26500	5.52	-53.38	≤-24.48	PASS
11N20SISO	Ant1	2462	0~Reference	2.75	2.75	---	PASS
11N20SISO	Ant1	2462	30~1000	2.75	-64.42	≤-27.25	PASS
11B	Ant1	2462	0~Reference	3.80	3.80	---	PASS
11B	Ant1	2462	30~1000	3.80	-64.9	≤-26.2	PASS
11B	Ant1	2462	1000~26500	3.80	-46.96	≤-26.2	PASS
11G	Ant1	2412	0~Reference	0.71	0.71	---	PASS
11G	Ant1	2437	30~1000	6.30	-64.51	≤-23.7	PASS
11G	Ant1	2437	1000~26500	6.30	-53.1	≤-23.7	PASS
11G	Ant1	2462	0~Reference	6.47	6.47	---	PASS
11G	Ant1	2462	30~1000	6.47	-63.88	≤-23.53	PASS
11N20SISO	Ant1	2462	1000~26500	2.75	-52.39	≤-27.25	PASS
11N40SISO	Ant1	2422	0~Reference	7.01	7.01	---	PASS
11N40SISO	Ant1	2422	30~1000	7.01	-65.04	≤-22.99	PASS
11N40SISO	Ant1	2422	1000~26500	7.01	-51.67	≤-22.99	PASS
11N40SISO	Ant1	2437	0~Reference	-3.71	-3.71	---	PASS
11N40SISO	Ant1	2437	30~1000	-3.71	-64.29	≤-33.71	PASS
11N40SISO	Ant1	2437	1000~26500	-3.71	-52.42	≤-33.71	PASS
11N40SISO	Ant1	2452	0~Reference	-0.38	-0.38	---	PASS
11N40SISO	Ant1	2452	30~1000	-0.38	-63.92	≤-30.38	PASS
11N40SISO	Ant1	2452	1000~26500	-0.38	-52.25	≤-30.38	PASS

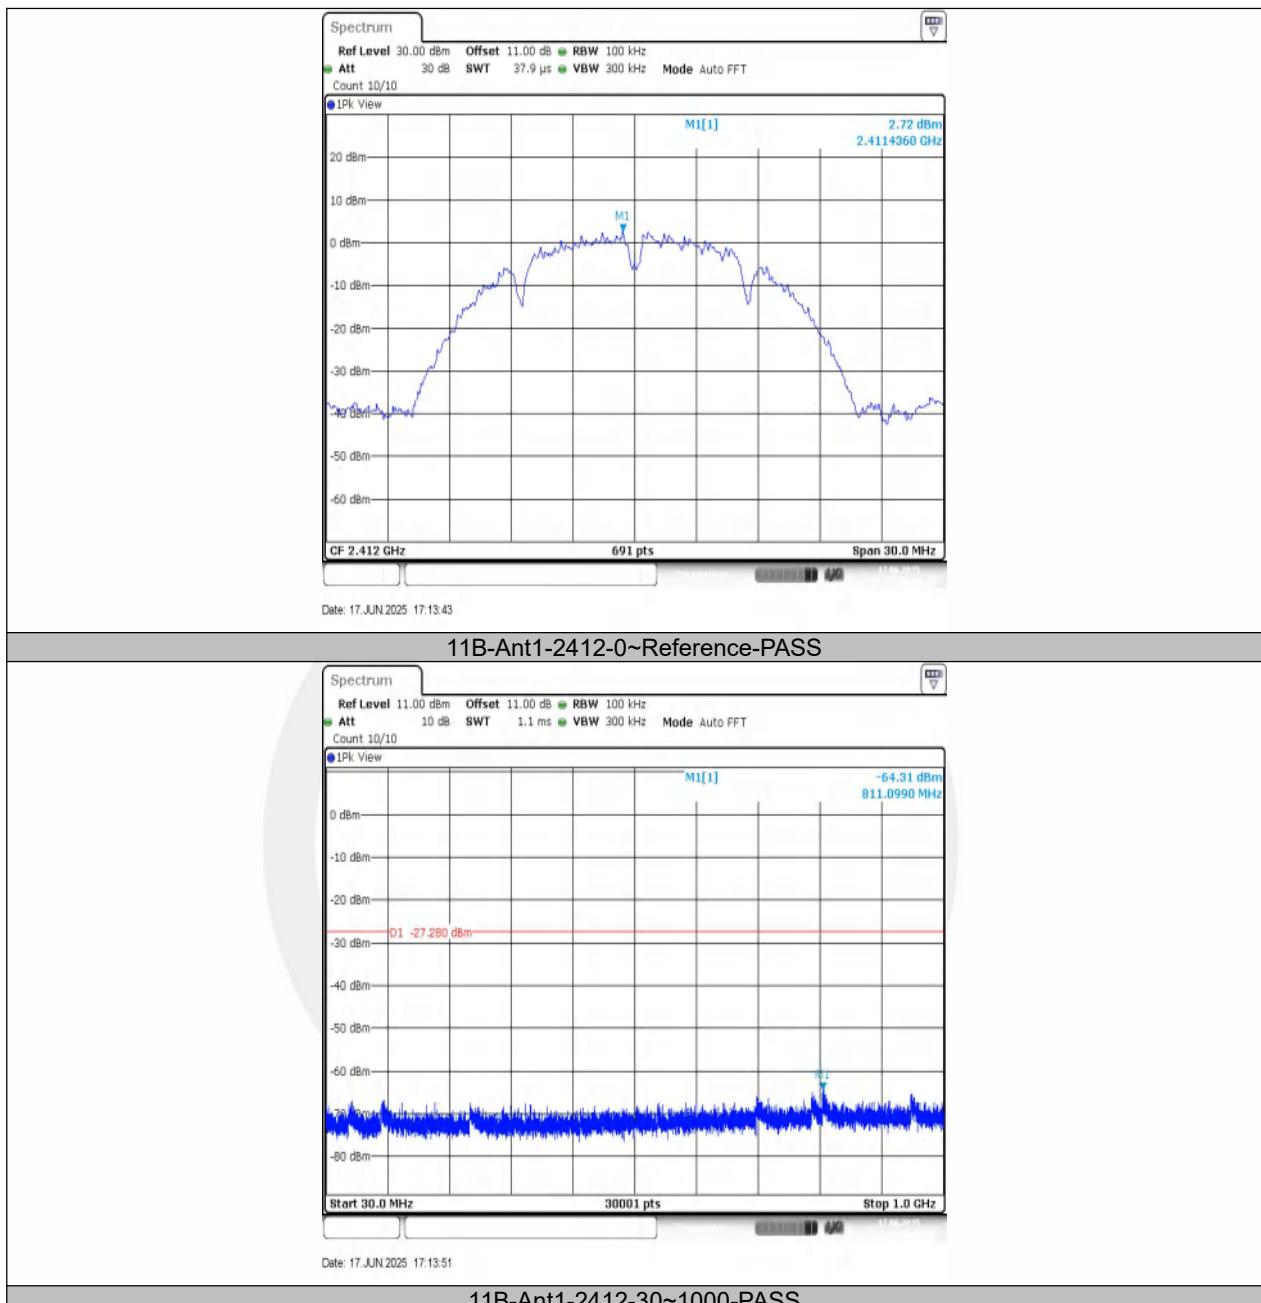


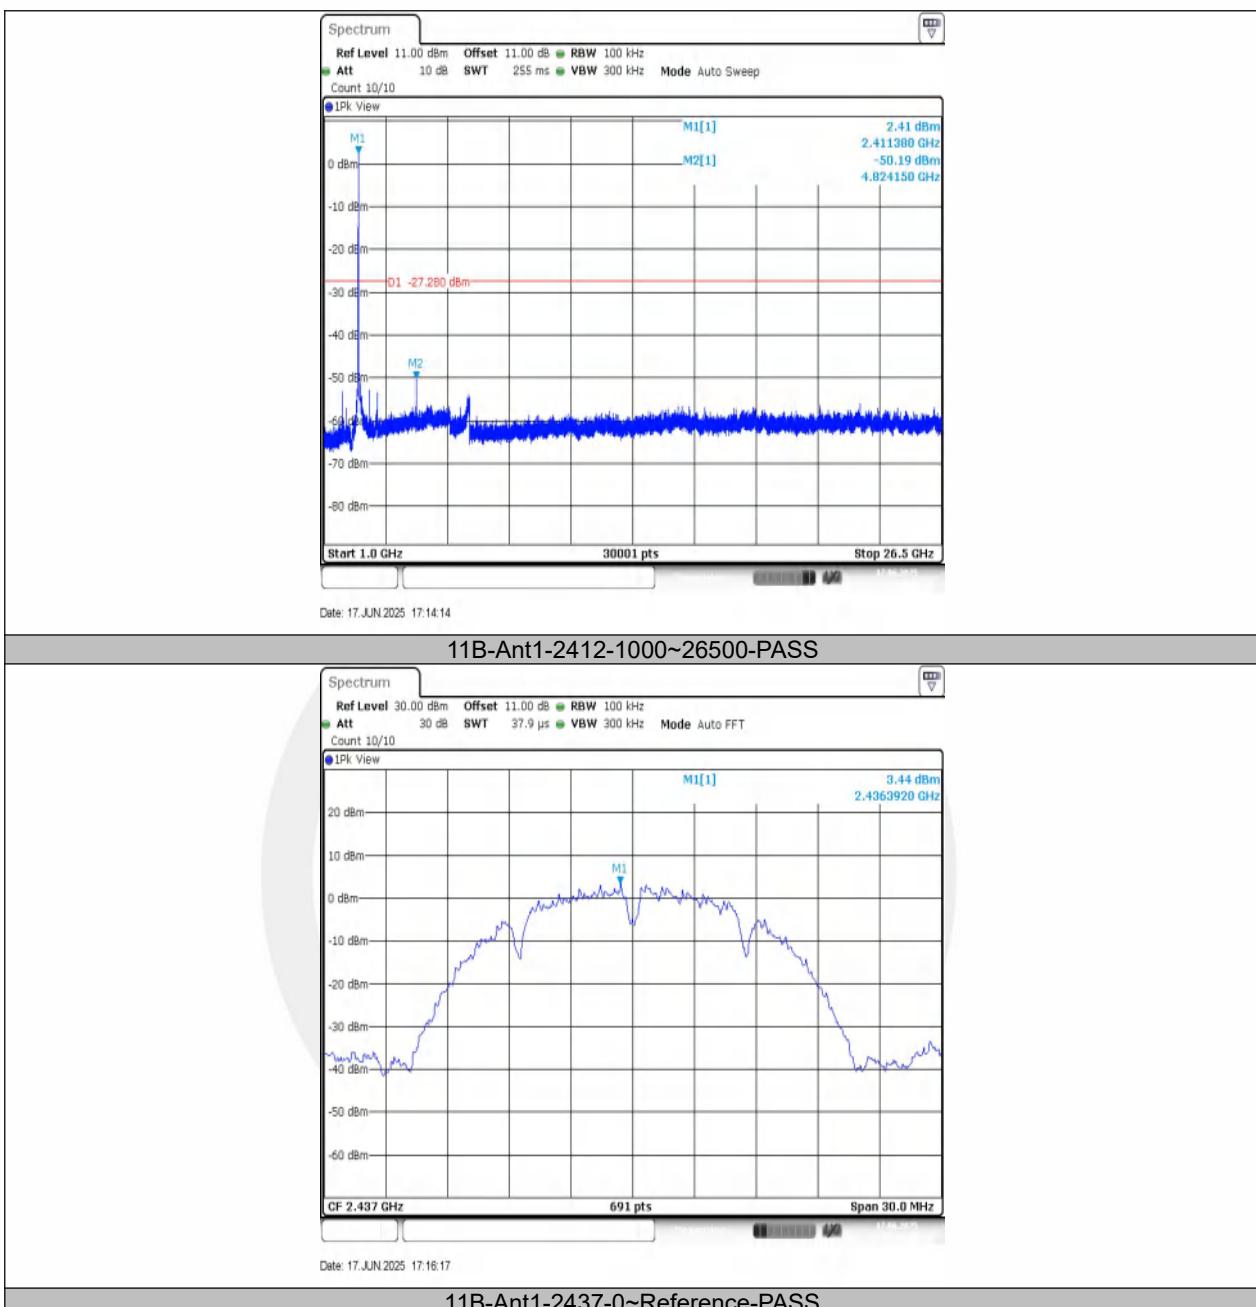


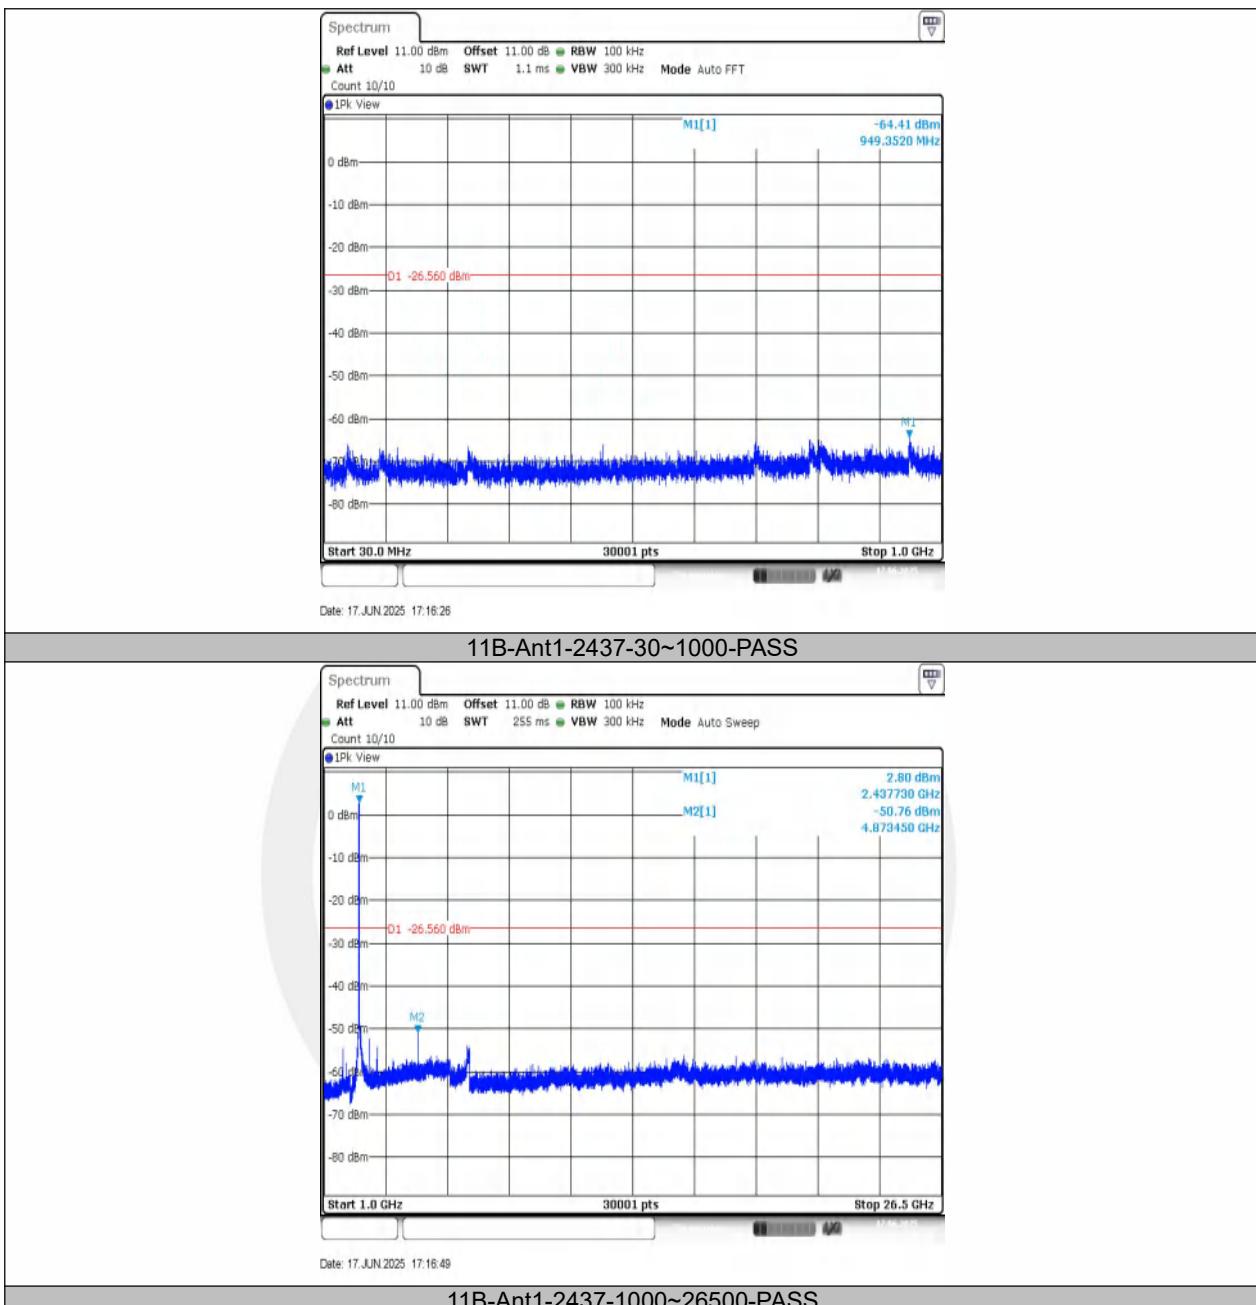


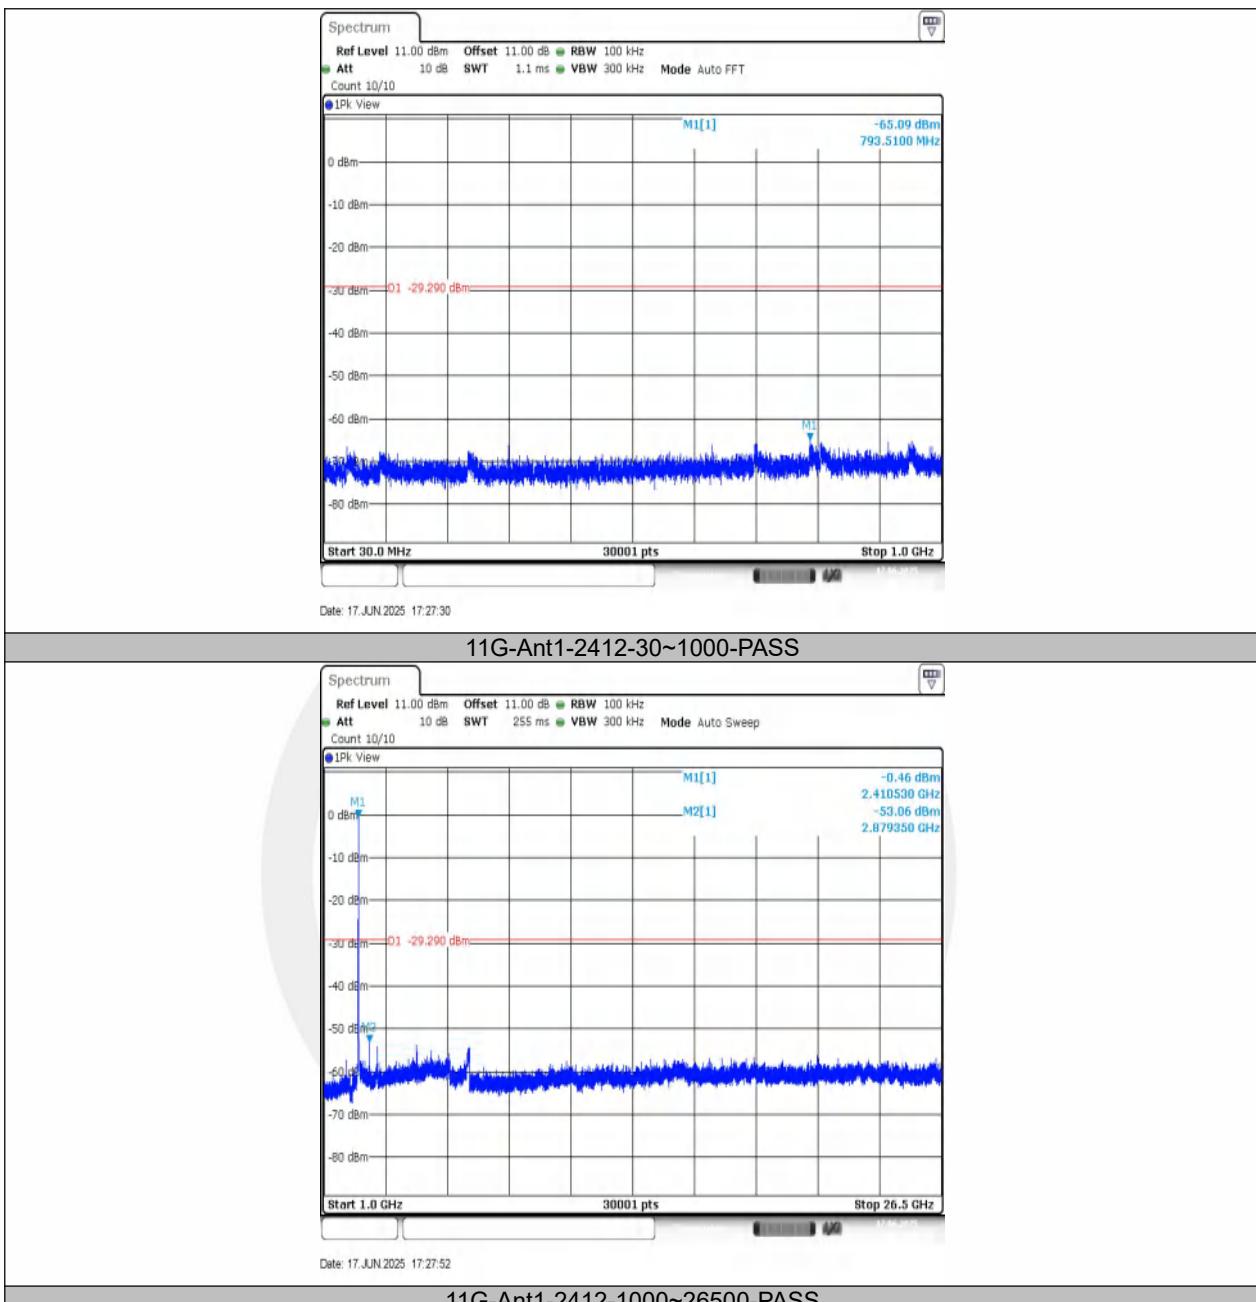


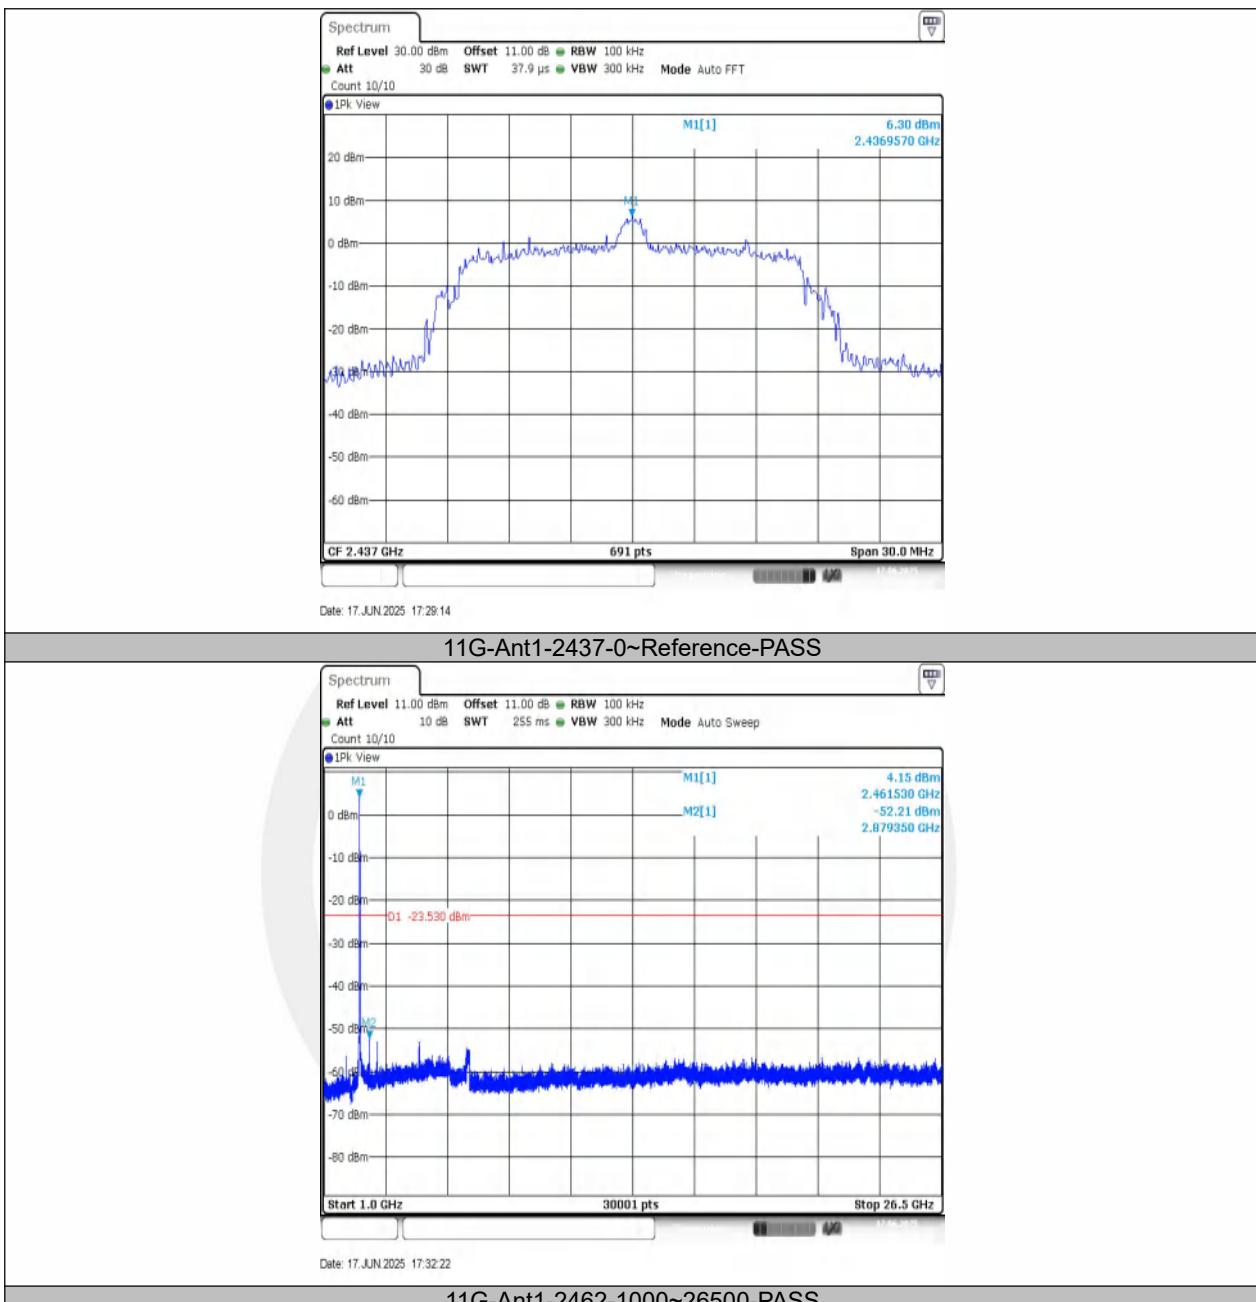


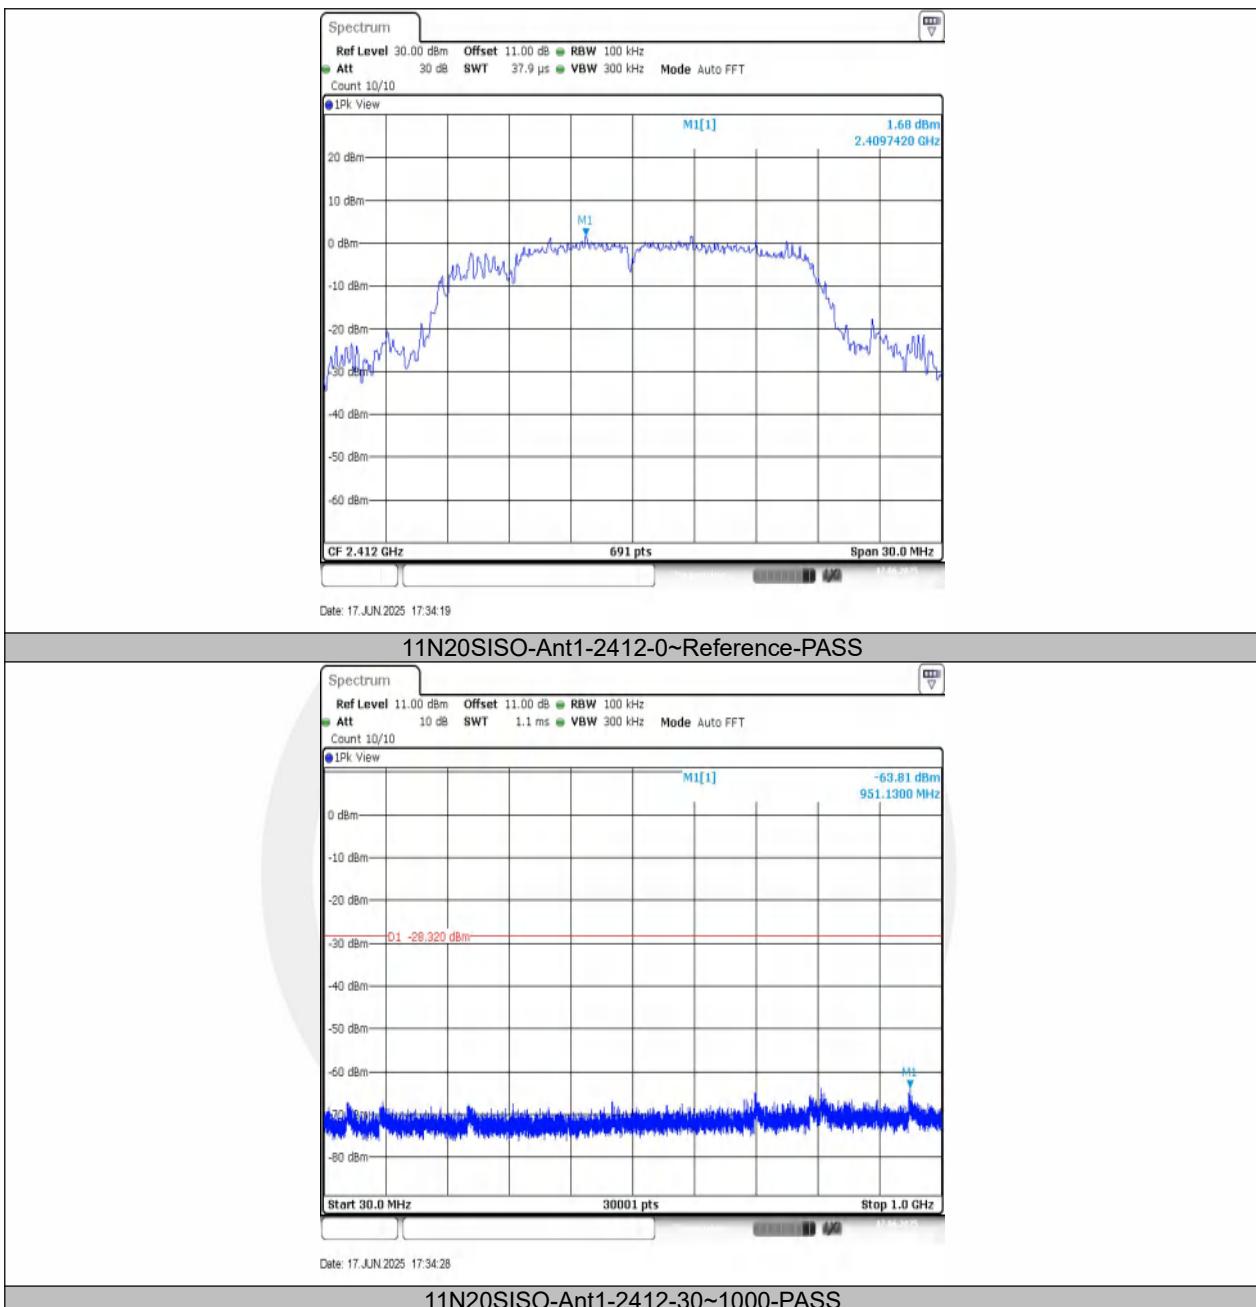


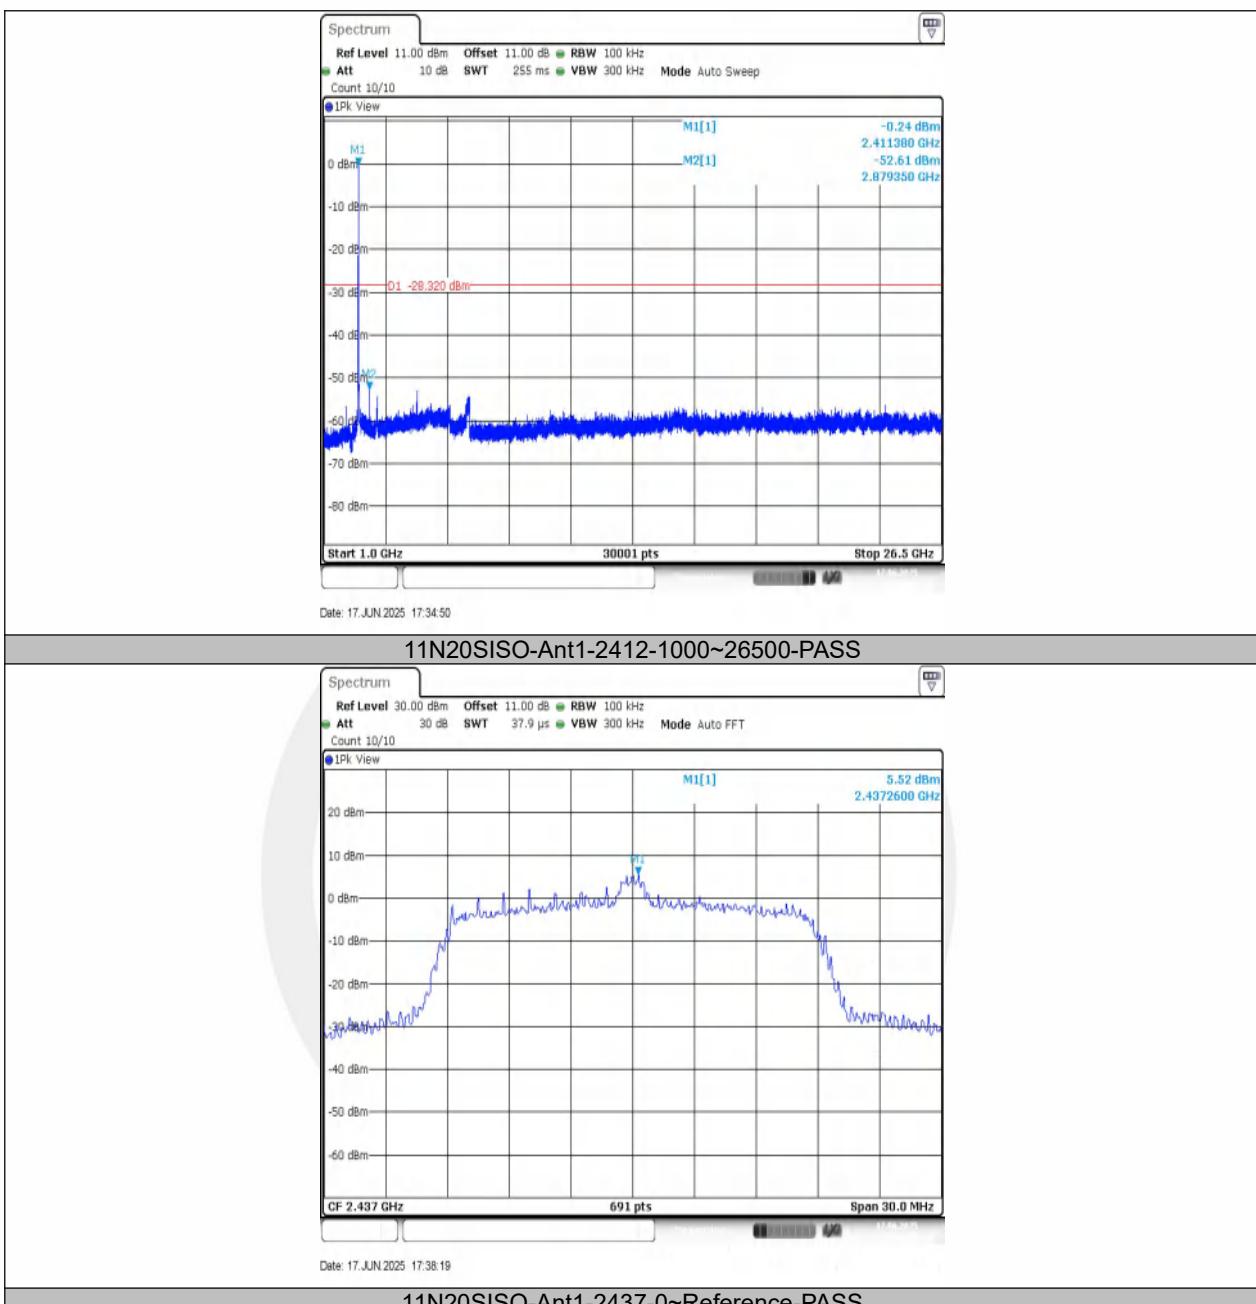


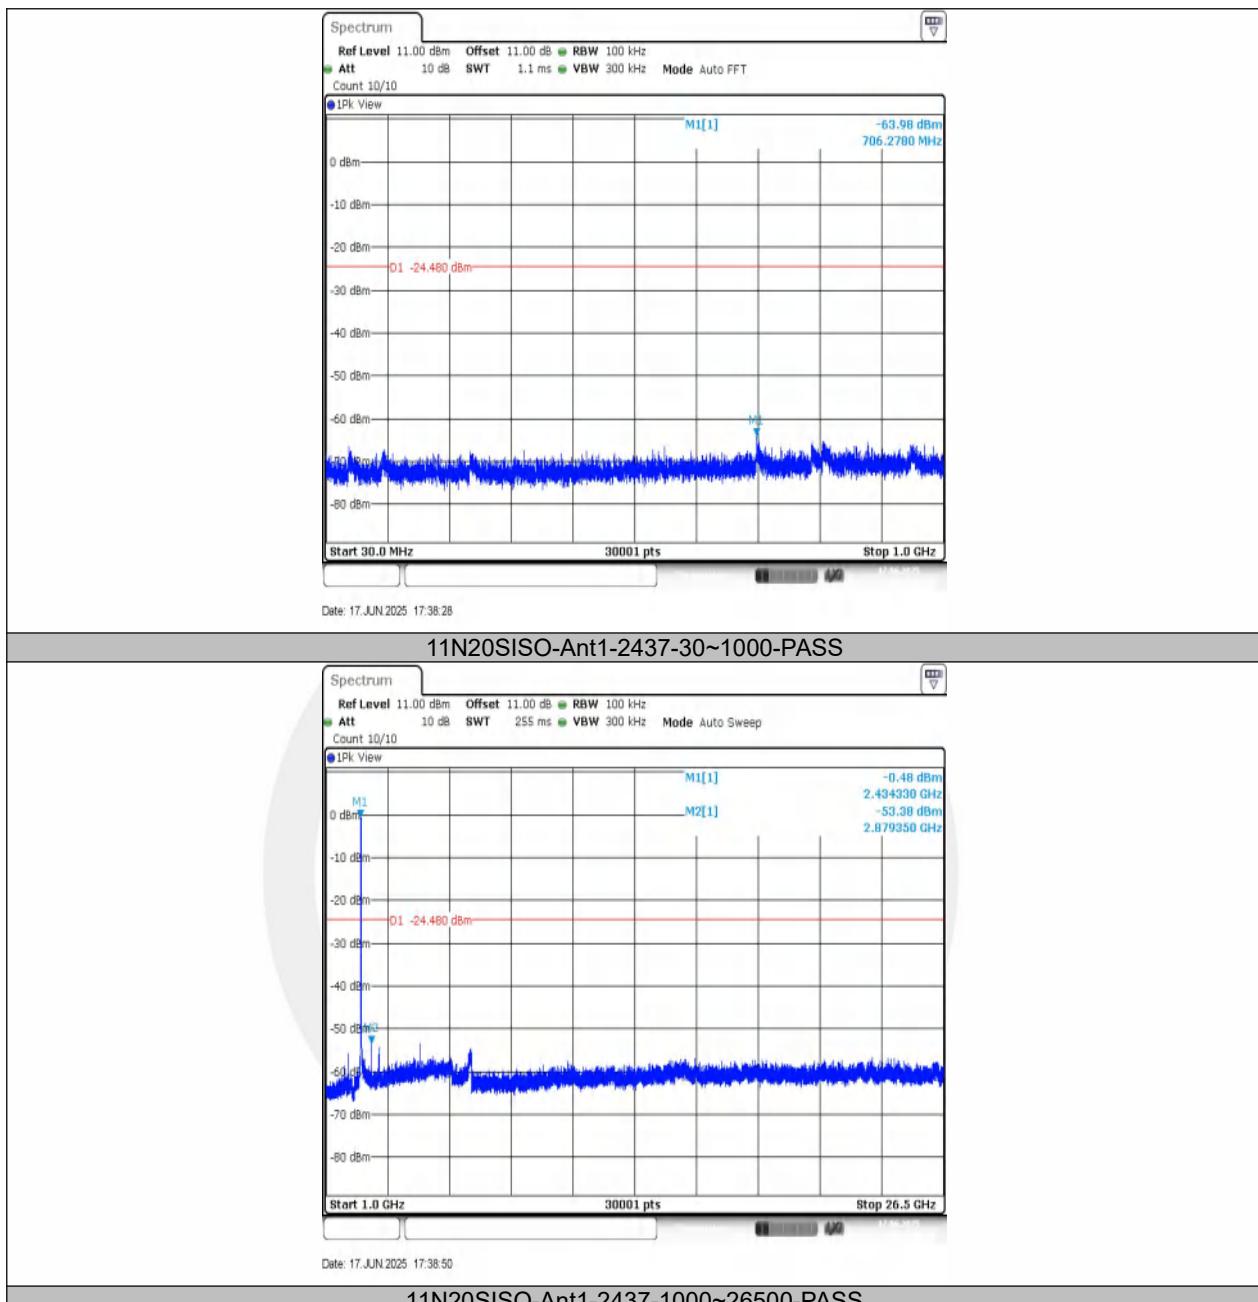


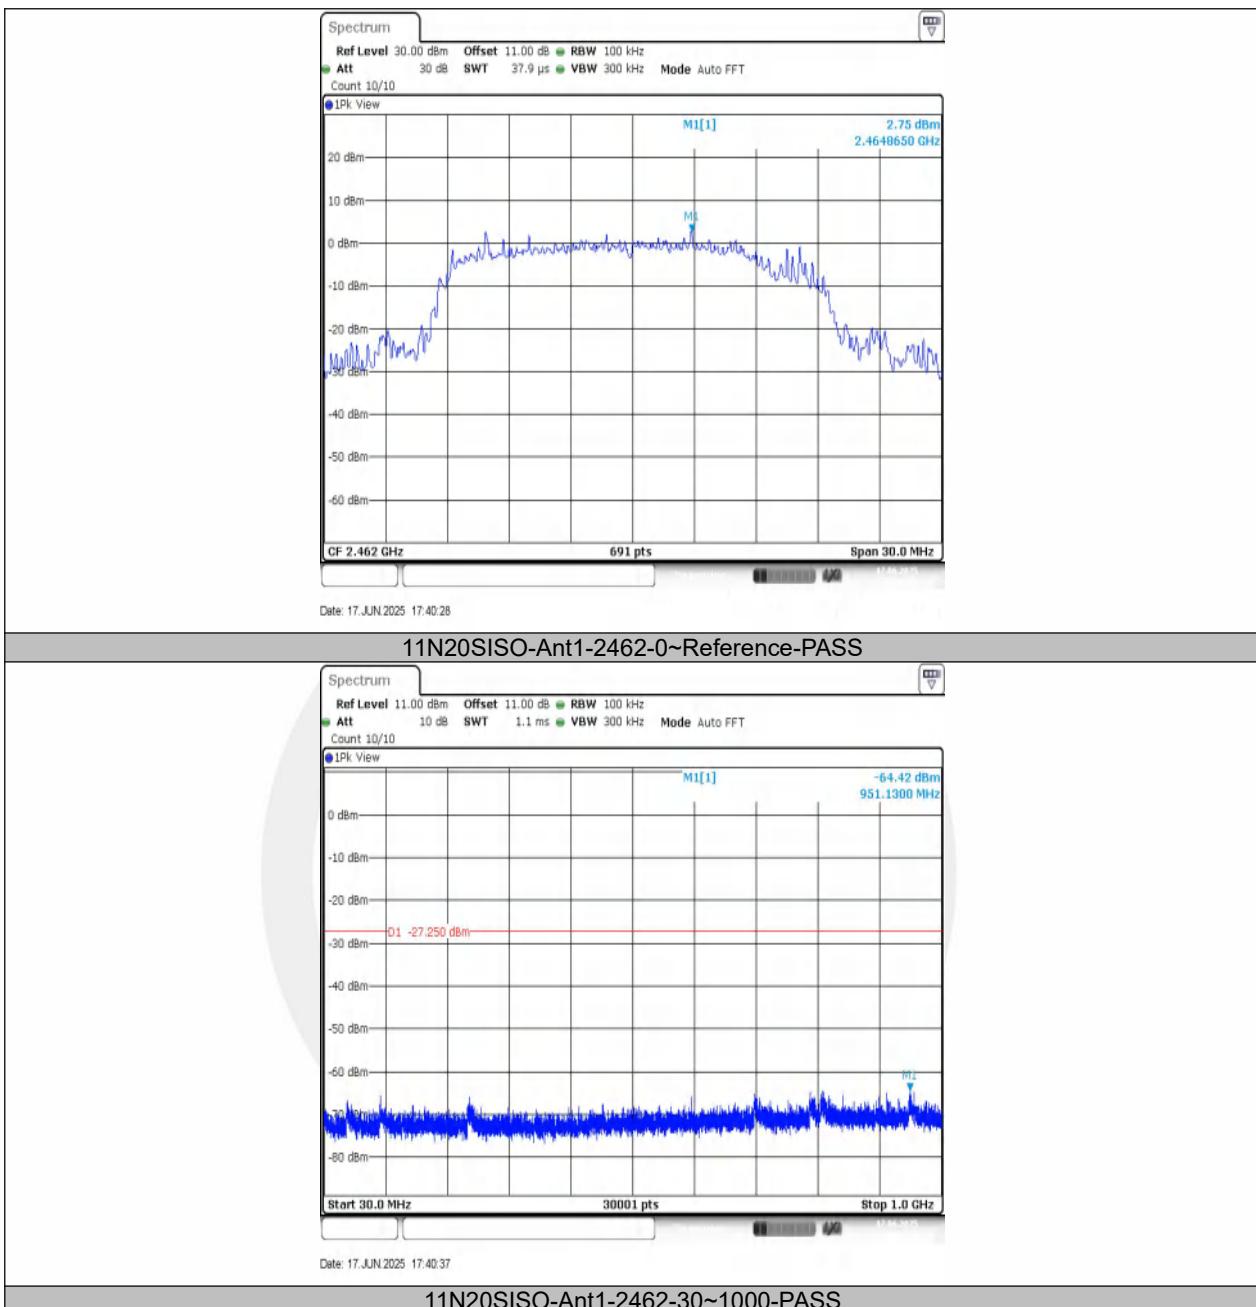


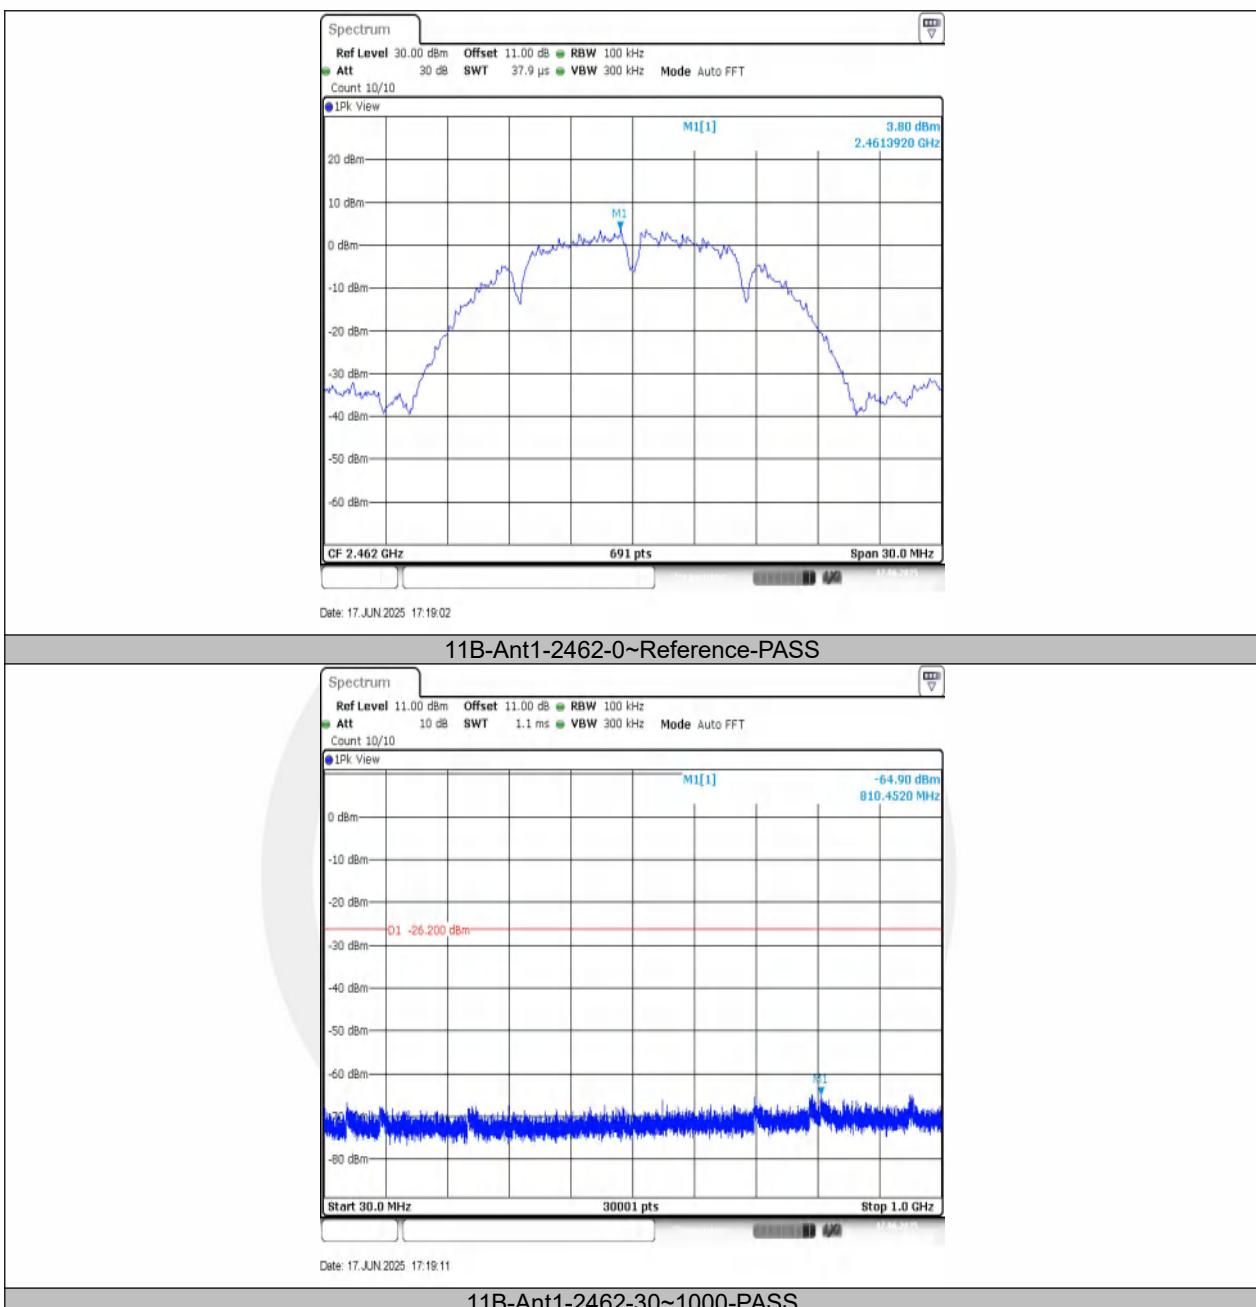


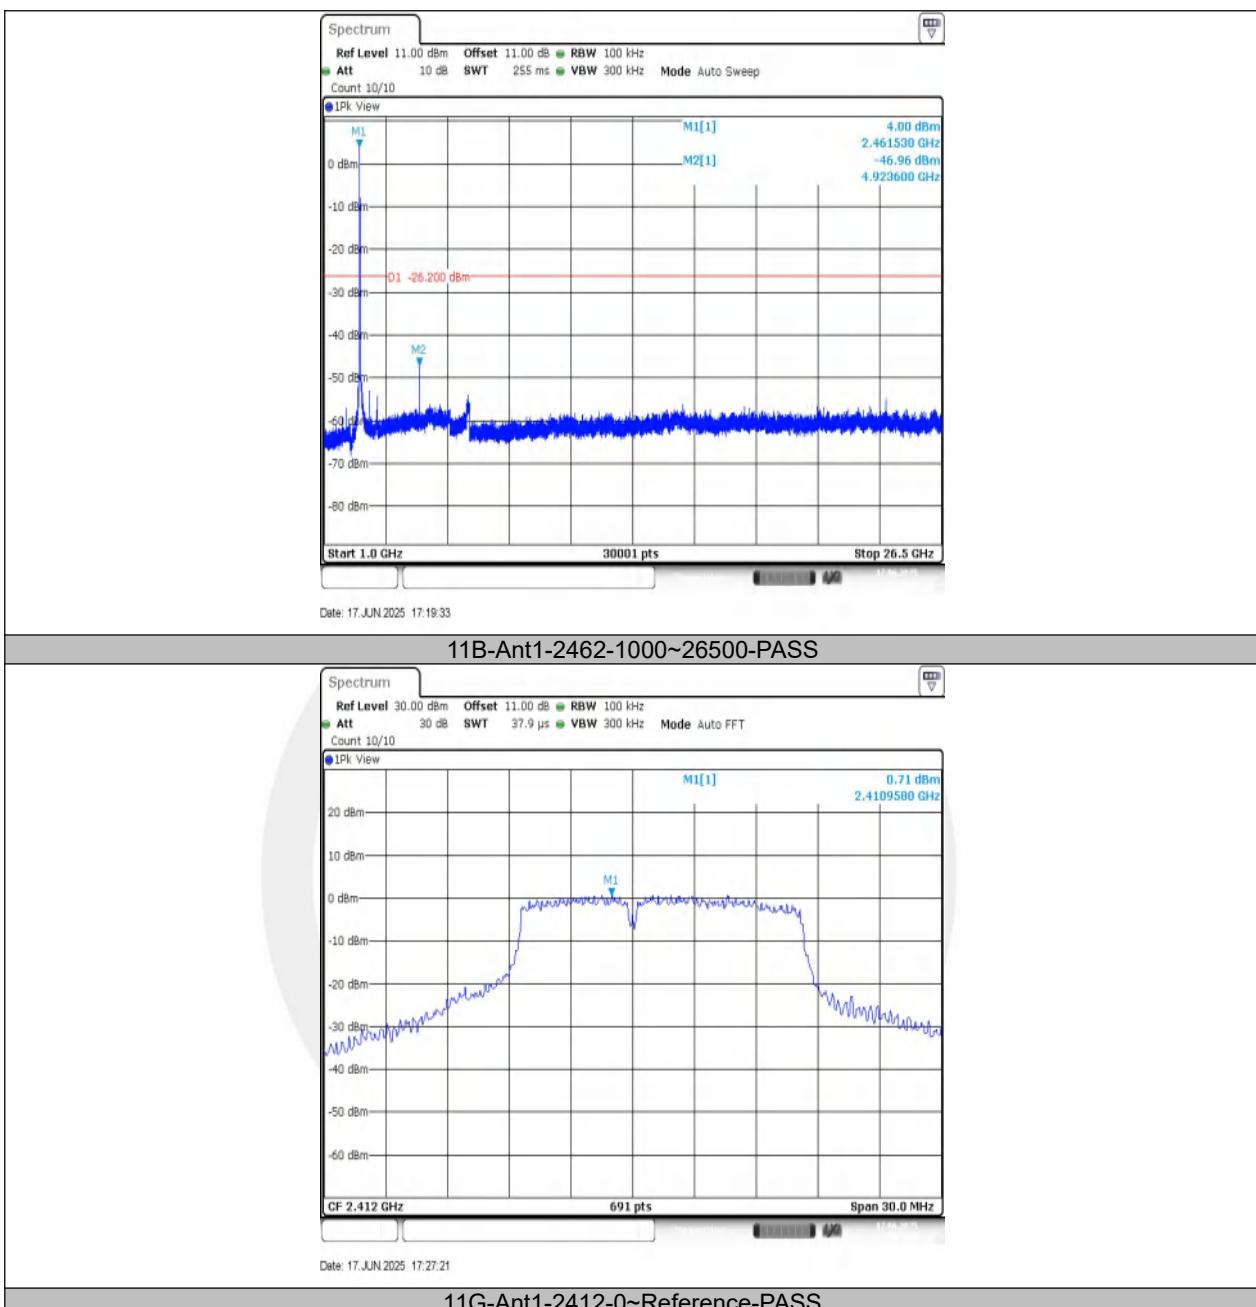


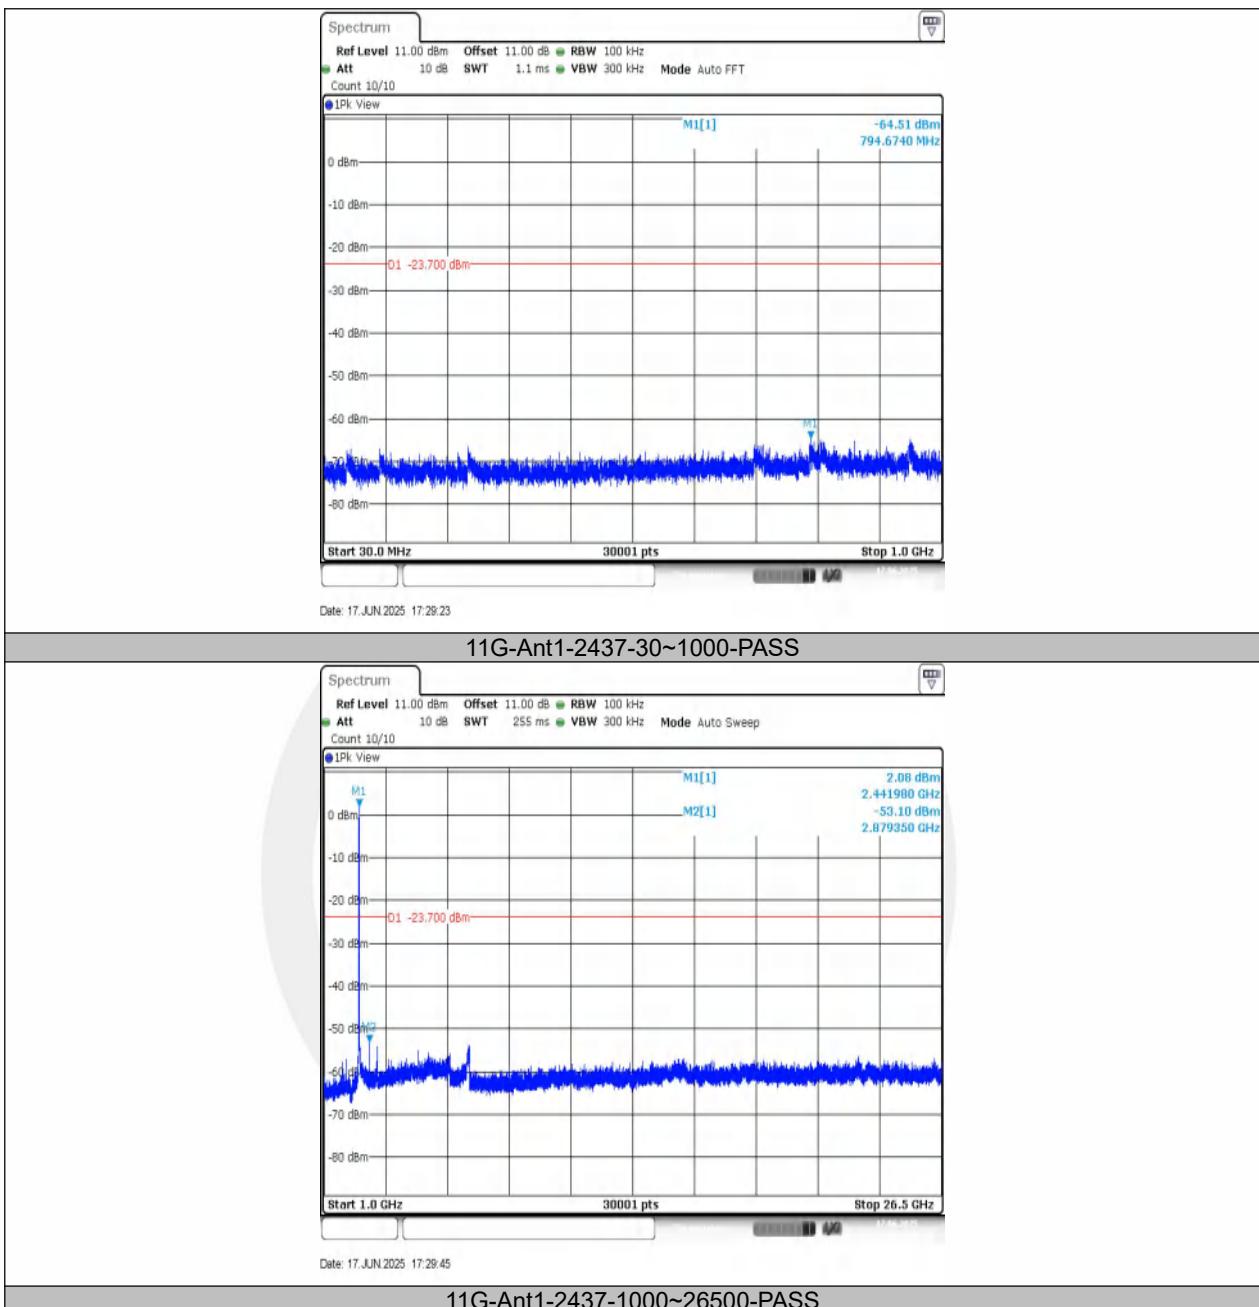


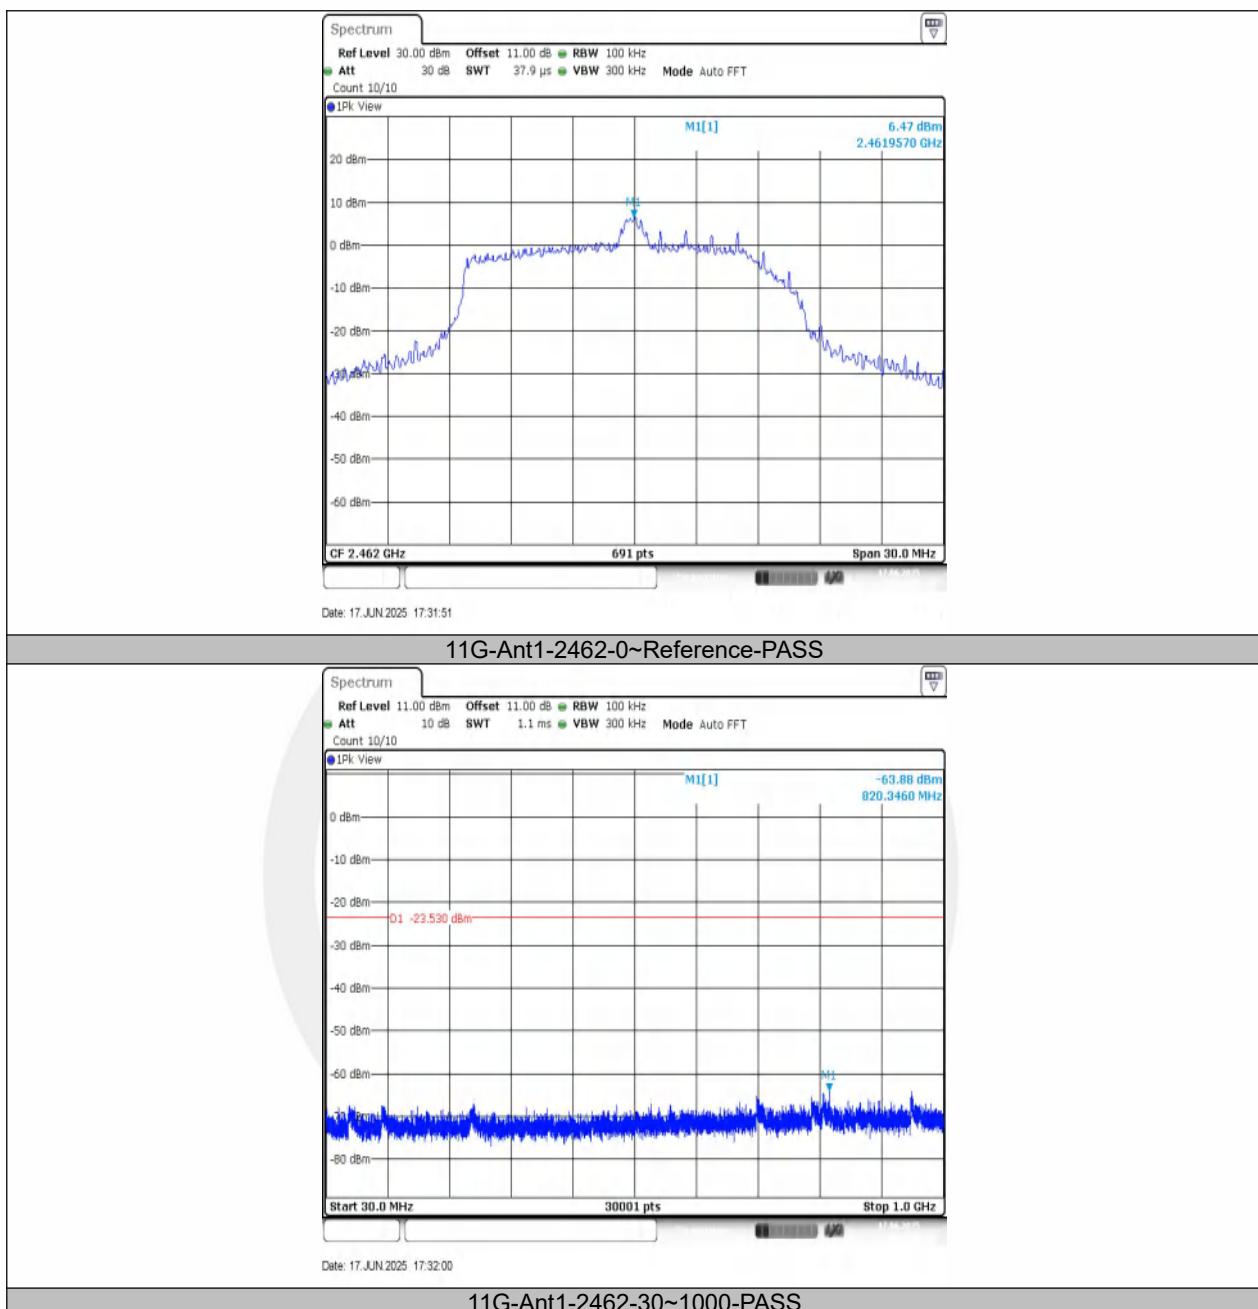


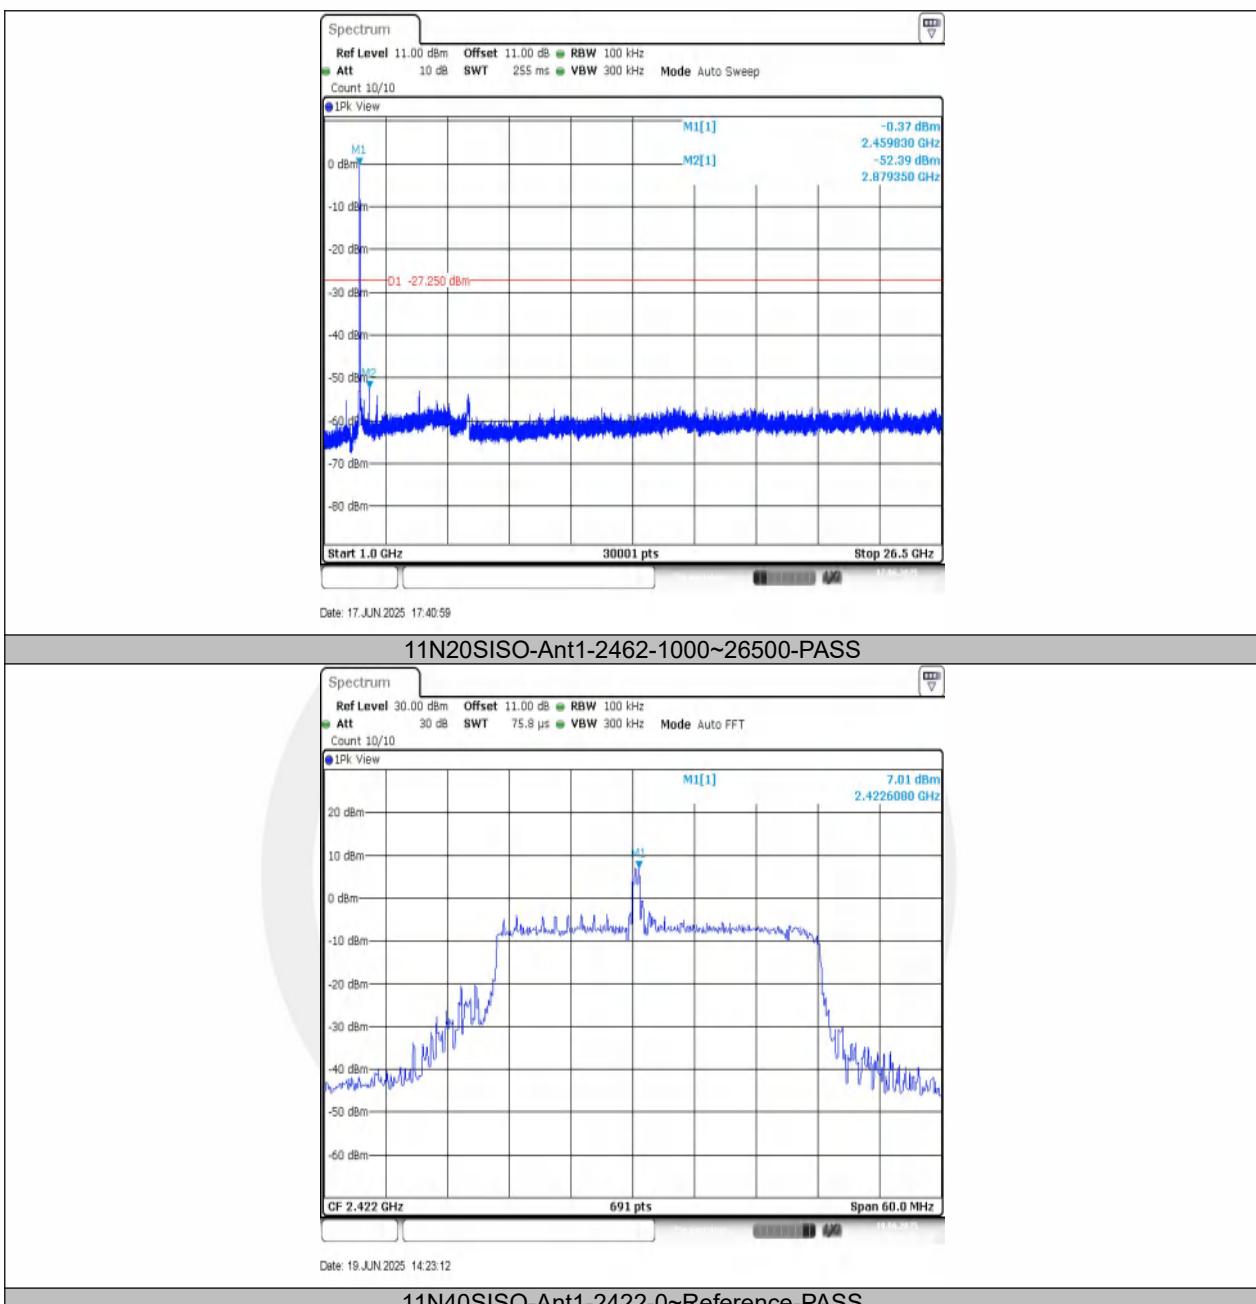

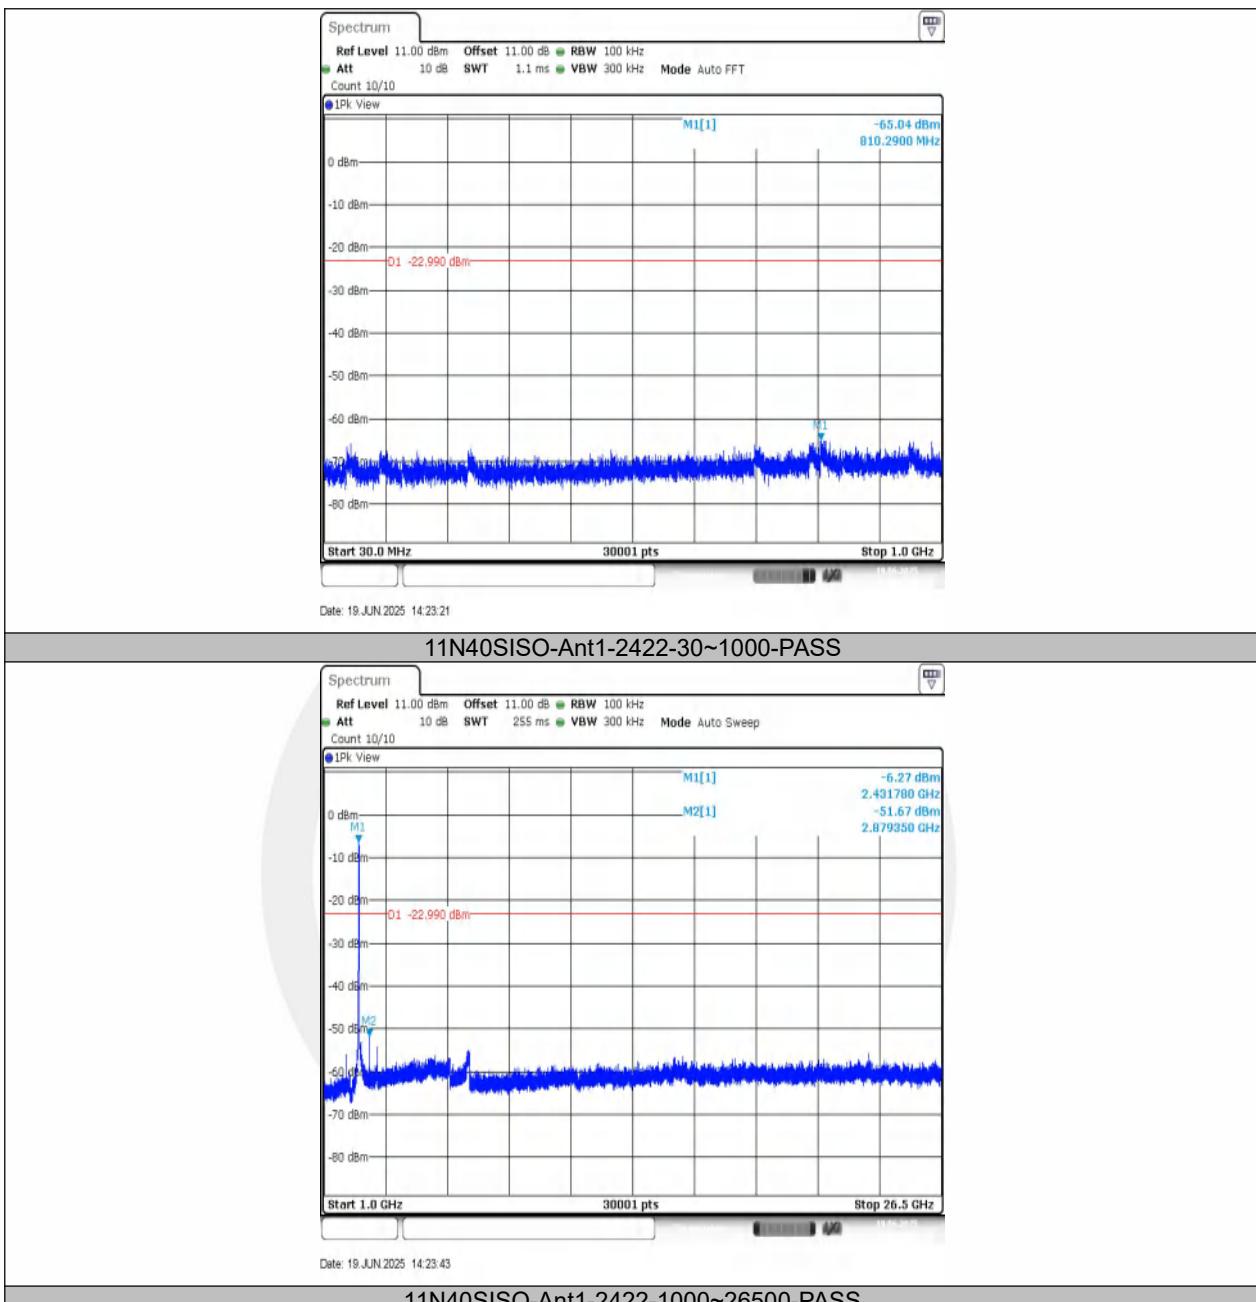

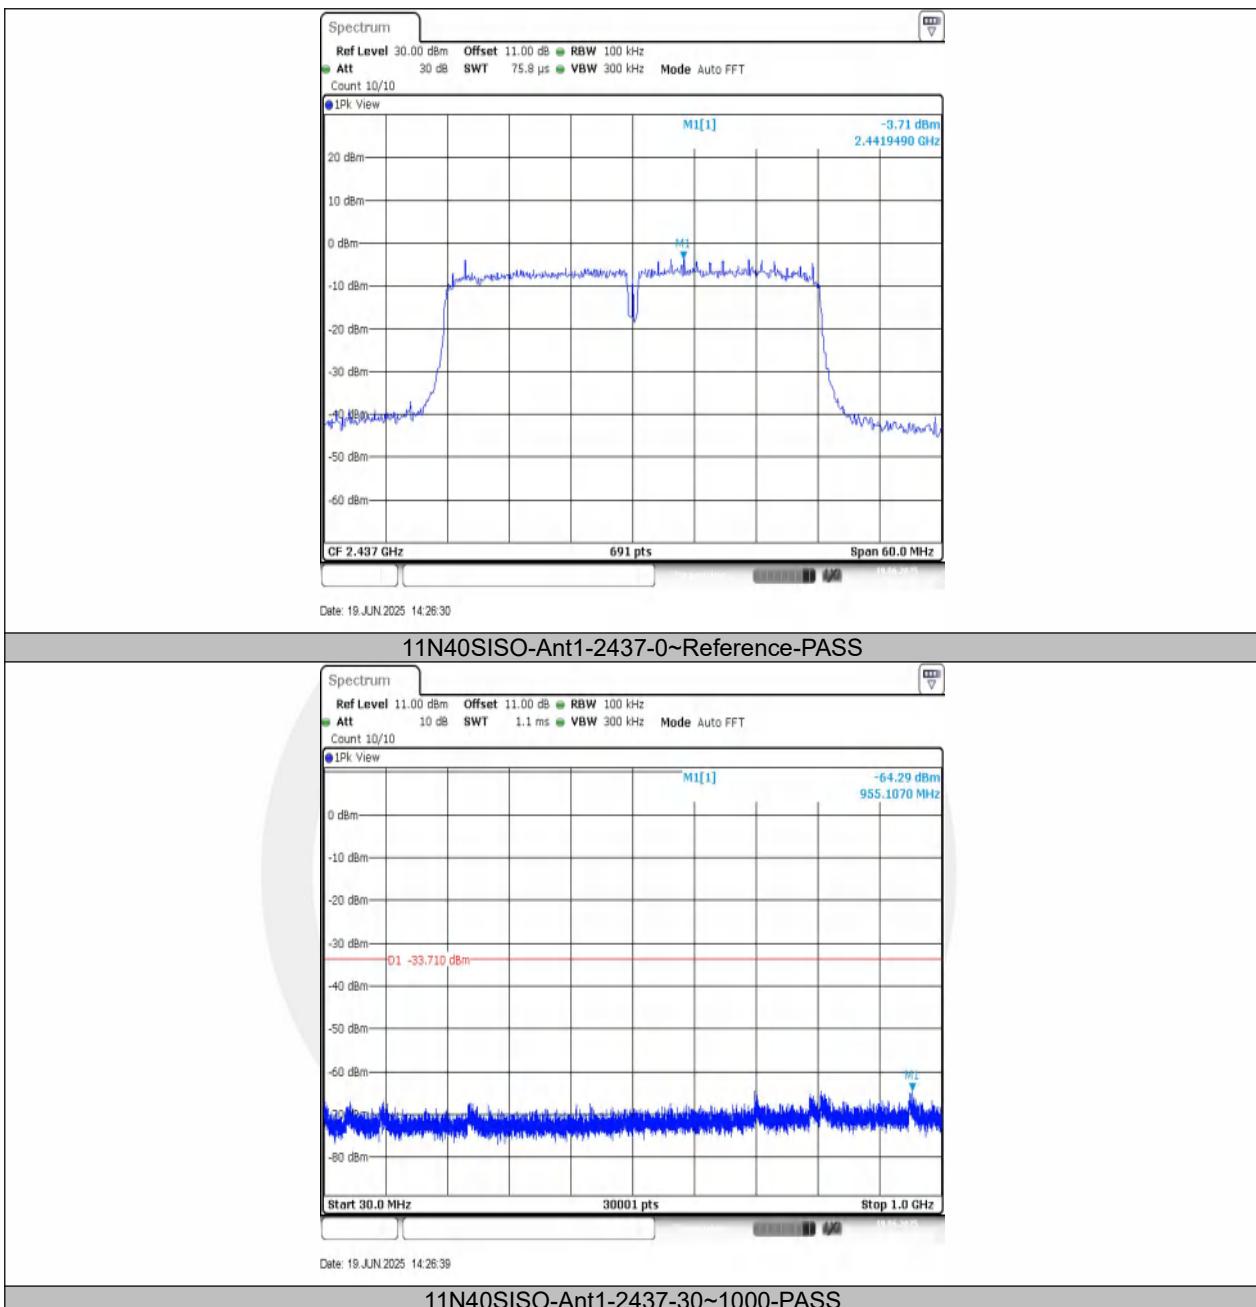

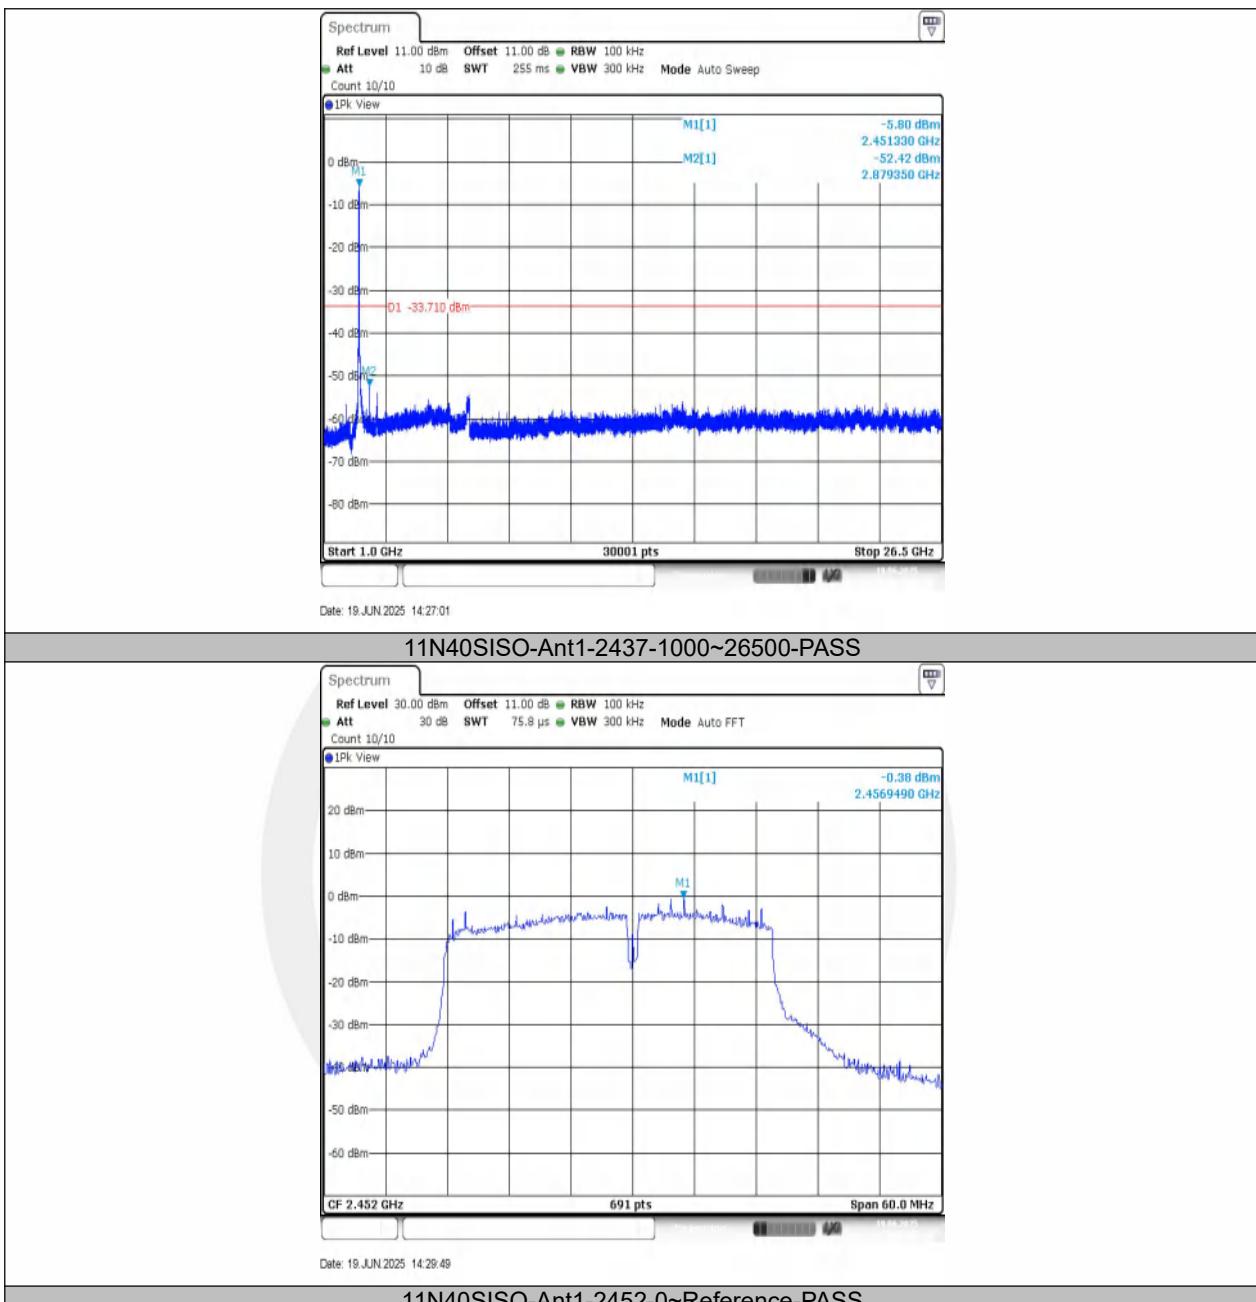

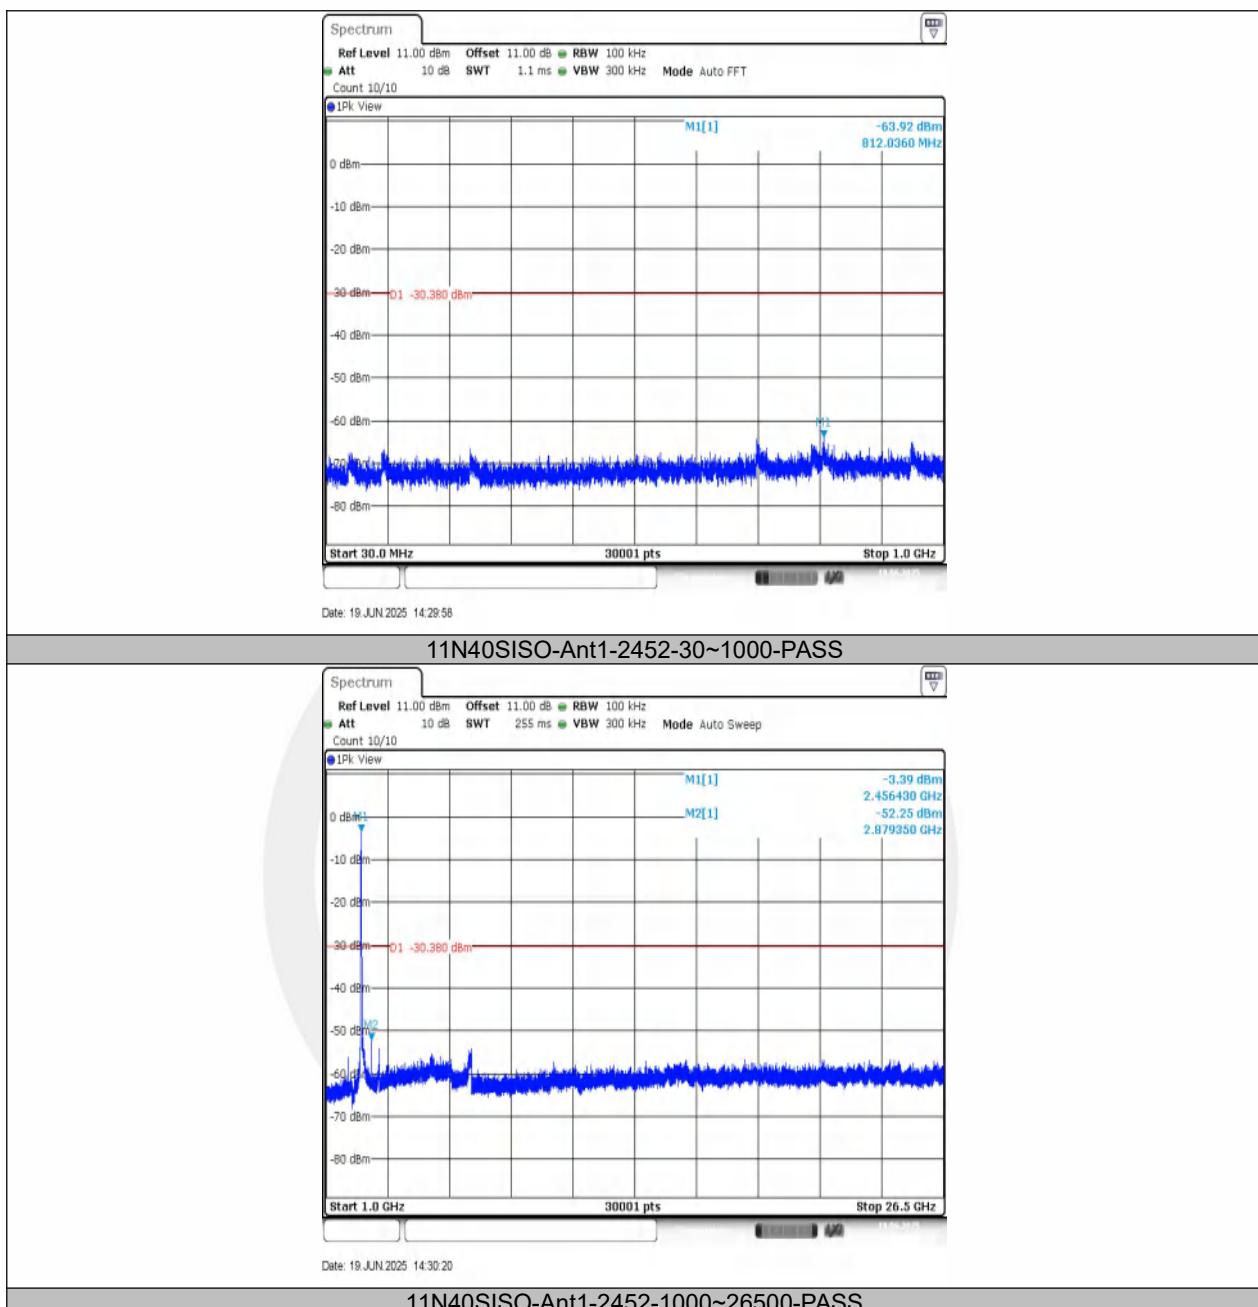

7.5 RADIATED EMISSION

7.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02.

7.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205 the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table.

Restricted Frequency(MHz)	Field Strength (μ V/m)	Field Strength ($\text{dB}\mu$ V/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (μ V/m)	300
0.490-1.705	24000/F(KHz)	20 log (μ V/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

7.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2.

7.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 1 MHz.

VBW \geq RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 100 kHz.

VBW \geq RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 9kHz.

VBW \geq RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 200Hz.

VBW \geq RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

7.5.5 Test Results

Temperature :

25°C

ATM Pressure:

1011 mbar

Humidity :

45 %

Test Engineer:

HZB

All of the configurations or modes are tested, the data of the worst case is recorded as below.

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature: 28.1°C Test By: CZF
 Humidity: 43%
 Test mode: 802.11b

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All the antenna(Antenna 1)and modes(802.11b/g/n)have been tested and the worst(Antenna 1,802.11b) result recorded was report as below:

Test mode: 802.11B Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
8334.37	V	57.85	74.00	16.15	peak
11521.8	V	63.37	74.00	10.63	peak
17000.6	V	67.39	74.00	6.61	peak
8334.375	V	39.96	54.00	14.04	AVG
11521.87	V	44.67	54.00	9.33	AVG
17000.62	V	47.83	54.00	6.17	AVG
4822.5	H	48.25	74.00	25.75	peak
9885	H	62.00	74.00	12.00	peak
14551.8	H	67.75	74.00	6.25	peak
4823.729	H	42.20	54.00	11.80	AVG
9885	H	42.46	54.00	11.54	AVG
14551.87	H	45.89	54.00	8.11	AVG

Test mode: 802.11 B Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
4873.12	V	48.00	74.00	26.00	peak
9888.75	V	61.97	74.00	12.03	peak
17004.3	V	67.37	74.00	6.63	peak
4873.804	V	39.71	54.00	14.29	AVG
9888.75	V	42.56	54.00	11.44	AVG
17004.37	V	47.74	54.00	6.26	AVG
4873.12	H	48.47	74.00	25.53	peak
9915	H	61.70	74.00	12.30	peak
16685.6	H	66.77	74.00	7.23	peak
4873.944	H	41.14	54.00	12.86	AVG
9915	H	43.04	54.00	10.96	AVG
16685.62	H	46.37	54.00	7.63	AVG

Test mode:	802.11 B	Frequency:	Channel 11: 2472MHz		
------------	----------	------------	---------------------	--	--

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
4923.75	V	49.19	74.00	24.81	peak
9931.87	V	61.98	74.00	12.02	peak
14563.1	V	66.10	74.00	7.90	peak
4923.79	V	42.37	54.00	11.63	AVG
9931.875	V	42.63	54.00	11.37	AVG
14563.12	V	46.79	54.00	7.21	AVG
4923.75	H	50.91	74.00	23.09	peak
9900	H	62.18	74.00	11.82	peak
14546.2	H	66.46	74.00	7.54	peak
4920.773	H	40.48	54.00	13.52	AVG
9900	H	42.91	54.00	11.09	AVG
14546.25	H	46.04	54.00	7.96	AVG

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1) and modes(802.11b/g/n) have been tested and the worst(Antenna 1,802.11n(HT20)) result recorded was report as below:

Test mode: 802.11n(HT20) Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2389.30	V	65.83	74.00	8.17	peak
2389.30	V	44.39	54.00	9.61	AVG
2388.93	H	67.94	74.00	6.06	peak
2388.93	H	43.85	54.00	10.15	AVG

Test mode: 802.11n(HT20) Frequency: Channel 11: 2462MHz





Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2483.95	V	64.83	74.00	9.17	peak
2483.96	V	48.04	54.00	5.96	AVG
2483.59	H	62.77	74.00	11.23	peak
2483.61	H	46.02	54.00	7.98	AVG

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant_F + Cab_L - Preamp


(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

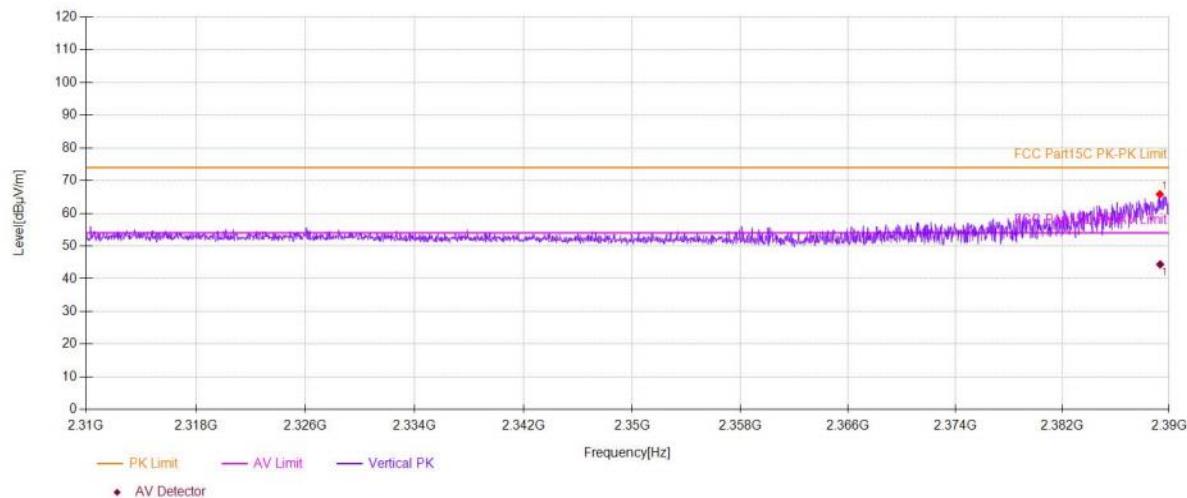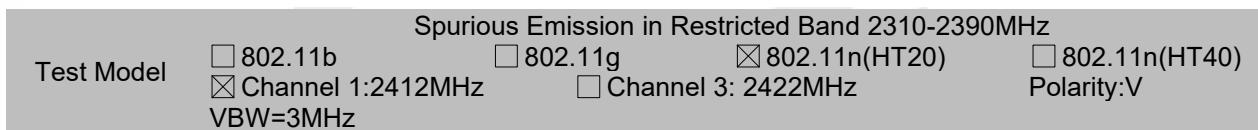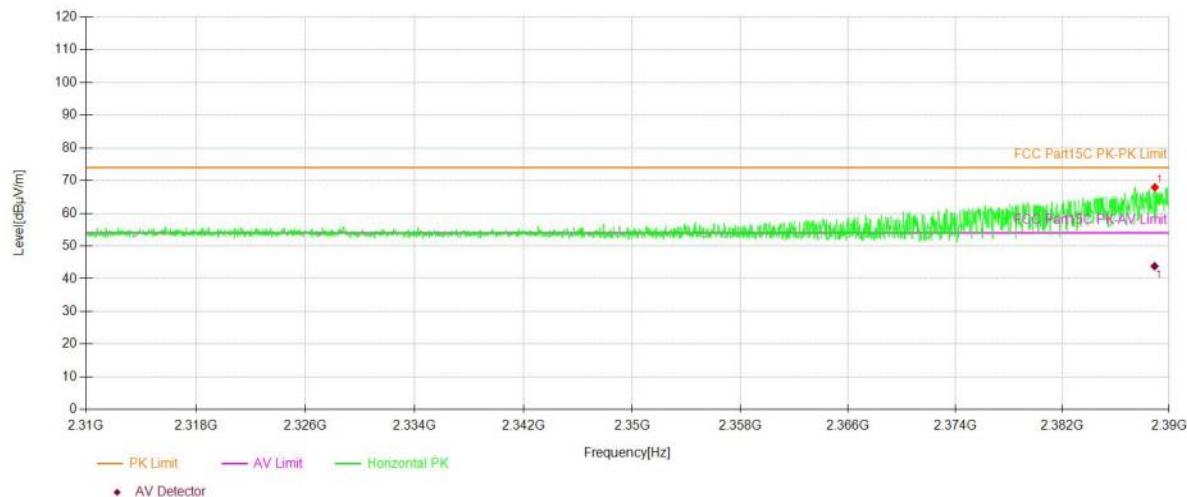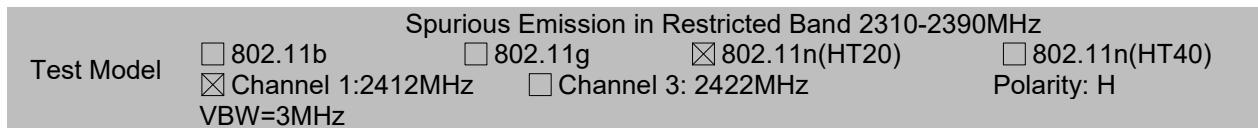

Test Model Spurious Emission in Restricted Band 2483.5-2500MHz
 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: H
 VBW=3MHz

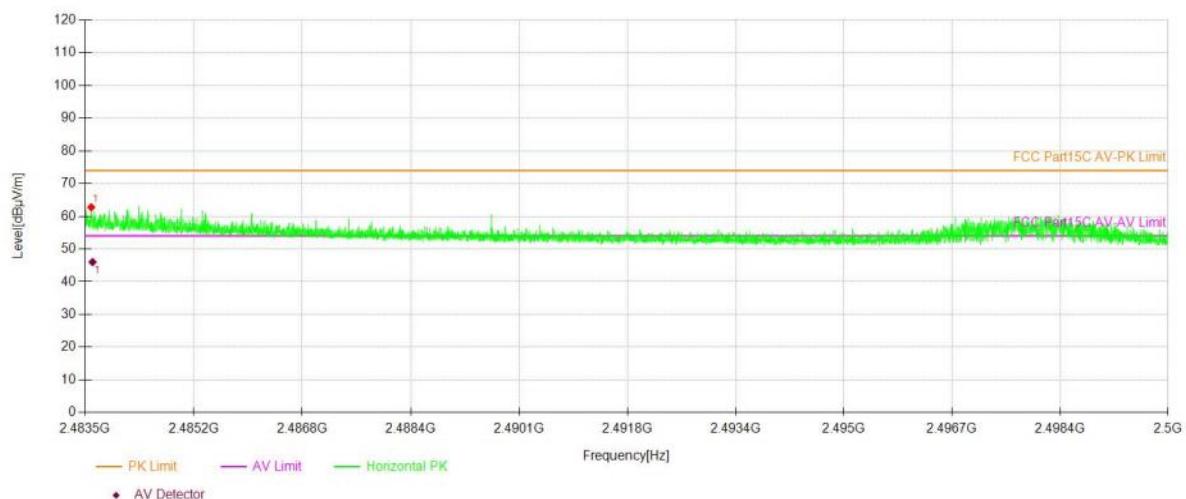


Test Model Spurious Emission in Restricted Band 2483.5-2500MHz
 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: V
 VBW=3MHz

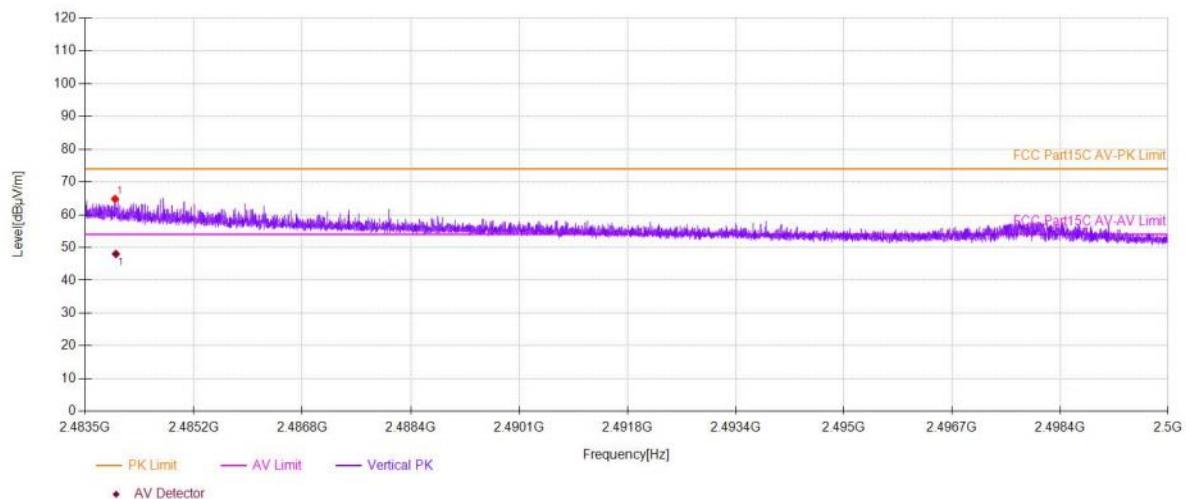

■ Spurious Emission below 1GHz (30MHz to 1GHz)


Test mode: 802.11B Frequency: Channel 1: 2412MHz

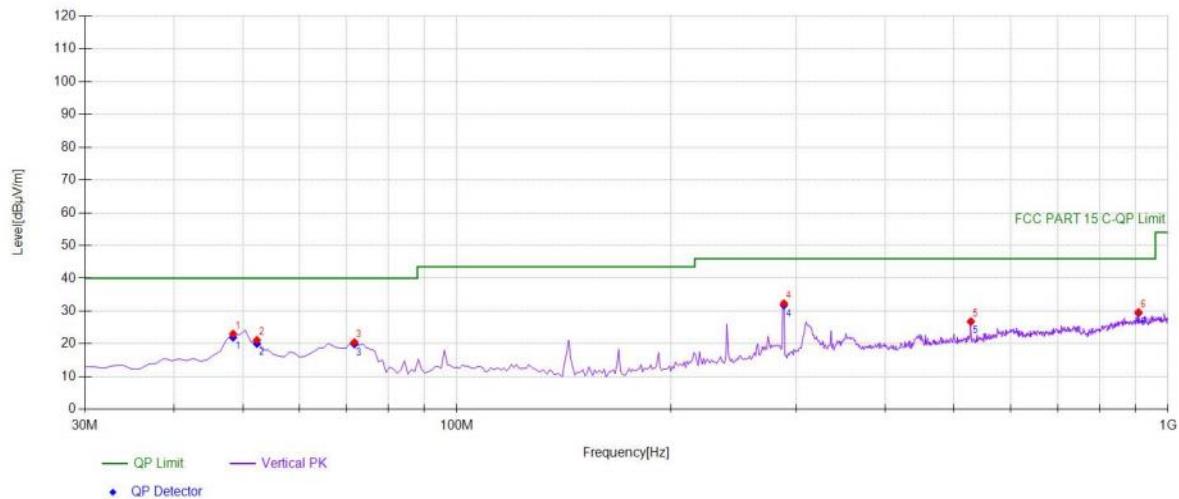
Suspected Data List

NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Detector	Limit [dB μ V/m]	Margin [dB]	Polarity
1	48.4484	39.31	-16.24	23.07	PK	40.00	16.93	Vertical
2	52.3323	37.52	-16.34	21.18	PK	40.00	18.82	Vertical
3	71.7518	39.53	-19.03	20.50	PK	40.00	19.50	Vertical
4	288.278	46.79	-14.44	32.35	PK	46.00	13.65	Vertical
5	528.108	36.12	-9.31	26.81	PK	46.00	19.19	Vertical
6	908.728	32.43	-2.75	29.68	PK	46.00	16.32	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]
1	48.4484	-16.24	21.96	40.00	18.04
2	52.3323	-16.34	20.07	40.00	19.93
3	71.7518	-19.03	19.92	40.00	20.08
4	288.2783	-14.44	31.77	46.00	14.23
5	528.1081	-9.31	26.77	46.00	19.23
6	908.7287	-2.75	29.40	46.00	16.60

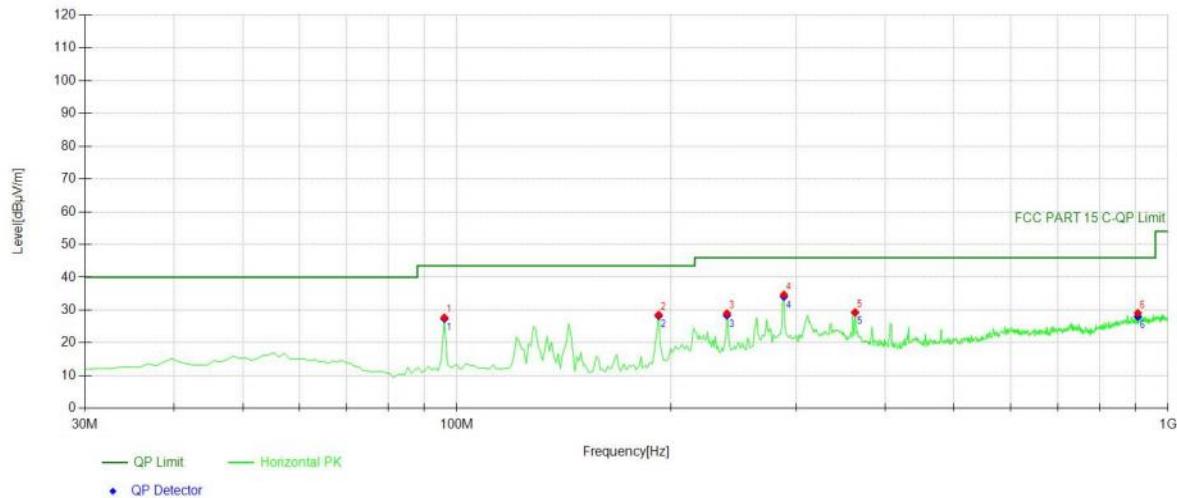

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	96.026	45.55	-17.83	27.72	PK	43.50	15.78	Horizontal
2	192.152	46.55	-17.98	28.57	PK	43.50	14.93	Horizontal
3	239.729	44.76	-15.76	29.00	PK	46.00	17.00	Horizontal
4	288.278	49.16	-14.44	34.72	PK	46.00	11.28	Horizontal
5	363.043	41.53	-12.20	29.33	PK	46.00	16.67	Horizontal
6	906.786	31.88	-2.80	29.08	PK	46.00	16.92	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	96.026	-17.83	27.35	43.50	16.15
2	192.1522	-17.98	28.20	43.50	15.30
3	239.7297	-15.76	28.38	46.00	17.62
4	288.2783	-14.44	34.10	46.00	11.90
5	363.043	-12.20	29.25	46.00	16.75
6	906.7868	-2.80	28.04	46.00	17.96


Test mode: 802.11B Frequency: Channel 6: 2437MHz

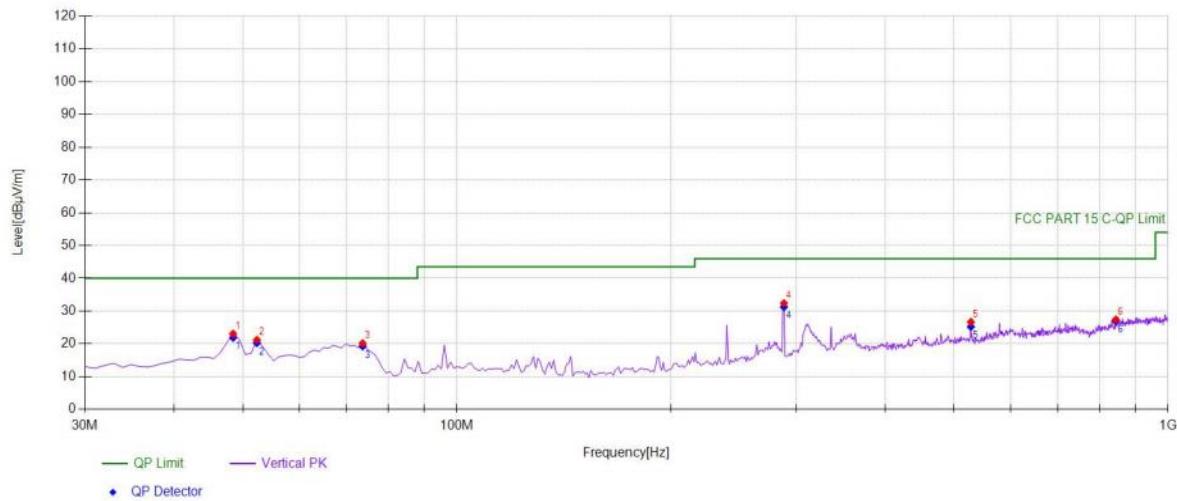
Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.4484	39.31	-16.24	23.07	PK	40.00	16.93	Vertical
2	52.3323	37.54	-16.34	21.20	PK	40.00	18.80	Vertical
3	73.6937	39.51	-19.33	20.18	PK	40.00	19.82	Vertical
4	288.278	46.85	-14.44	32.41	PK	46.00	13.59	Vertical
5	528.108	35.99	-9.31	26.68	PK	46.00	19.32	Vertical
6	844.644	31.54	-4.12	27.42	PK	46.00	18.58	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	48.4484	-16.24	21.91	40.00	18.09
2	52.3323	-16.34	20.29	40.00	19.71
3	73.6937	-19.33	19.27	40.00	20.73
4	288.2783	-14.44	31.25	46.00	14.75
5	528.1081	-9.31	25.23	46.00	20.77
6	844.6446	-4.12	26.93	46.00	19.07

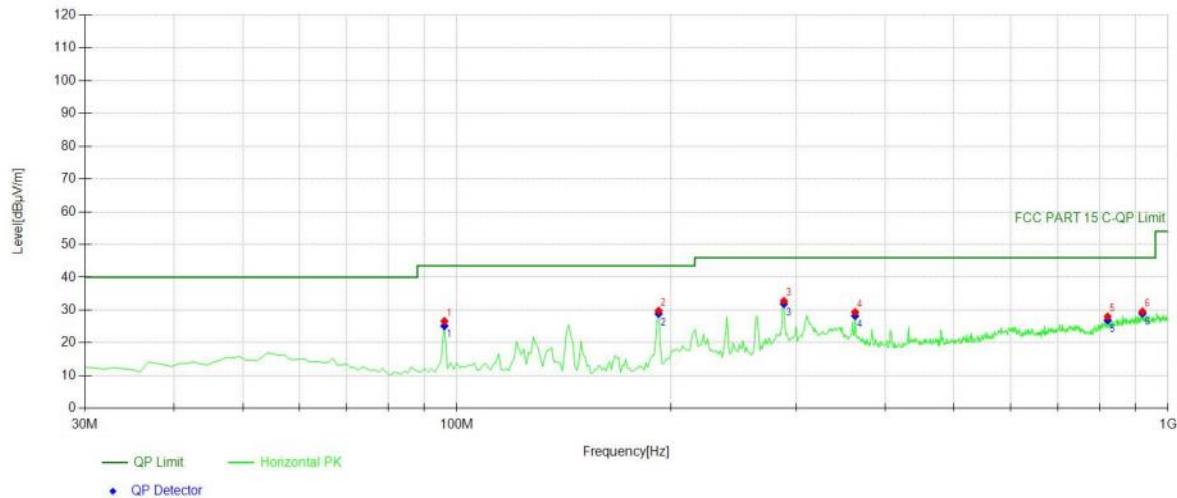

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	96.026	44.45	-17.83	26.62	PK	43.50	16.88	Horizontal
2	192.152	47.78	-17.98	29.80	PK	43.50	13.70	Horizontal
3	288.278	47.22	-14.44	32.78	PK	46.00	13.22	Horizontal
4	363.043	41.58	-12.20	29.38	PK	46.00	16.62	Horizontal
5	822.312	32.72	-4.68	28.04	PK	46.00	17.96	Horizontal
6	920.380	32.12	-2.58	29.54	PK	46.00	16.46	Horizontal

Final Data List


NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	96.026	-17.83	25.16	43.50	18.34
2	192.1522	-17.98	28.88	43.50	14.62
3	288.2783	-14.44	31.86	46.00	14.14
4	363.043	-12.20	28.21	46.00	17.79
5	822.3123	-4.68	26.87	46.00	19.13
6	920.3804	-2.58	28.91	46.00	17.09

Test mode: 802.11B Frequency: Channel 11: 2462MHz

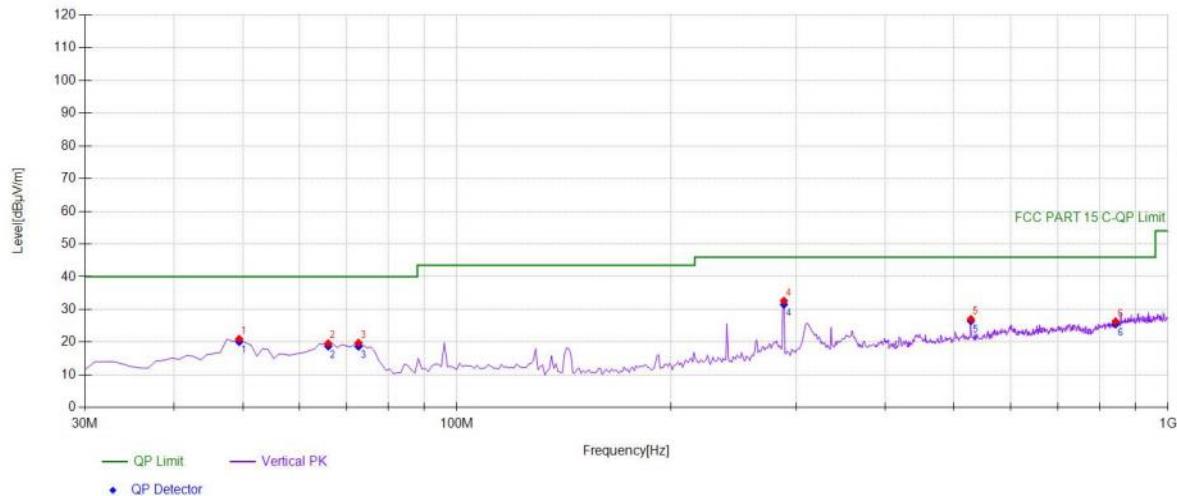

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	37.09	-16.10	20.99	PK	40.00	19.01	Vertical
2	65.9259	37.85	-18.21	19.64	PK	40.00	20.36	Vertical
3	72.7227	39.00	-19.19	19.81	PK	40.00	20.19	Vertical
4	288.278	47.08	-14.44	32.64	PK	46.00	13.36	Vertical
5	528.108	36.35	-9.31	27.04	PK	46.00	18.96	Vertical
6	843.673	30.50	-4.17	26.33	PK	46.00	19.67	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	20.11	40.00	19.89
2	65.9259	-18.21	18.76	40.00	21.24
3	72.7227	-19.19	18.69	40.00	21.31
4	288.2783	-14.44	31.52	46.00	14.48
5	528.1081	-9.31	26.45	46.00	19.55
6	843.6737	-4.17	25.50	46.00	20.50

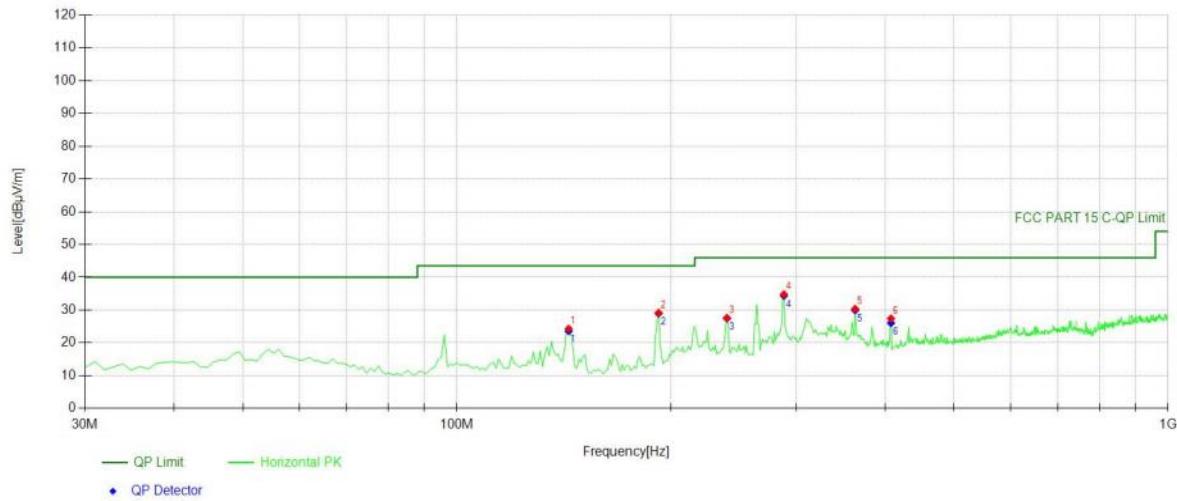

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	143.603	44.02	-19.71	24.31	PK	43.50	19.19	Horizontal
2	192.152	47.12	-17.98	29.14	PK	43.50	14.36	Horizontal
3	239.729	43.39	-15.76	27.63	PK	46.00	18.37	Horizontal
4	288.278	49.25	-14.44	34.81	PK	46.00	11.19	Horizontal
5	363.043	42.58	-12.20	30.38	PK	46.00	15.62	Horizontal
6	407.707	38.92	-11.48	27.44	PK	46.00	18.56	Horizontal

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	143.6036	-19.71	23.60	43.50	19.90
2	192.1522	-17.98	28.97	43.50	14.53
3	239.7297	-15.76	27.46	46.00	18.54
4	288.2783	-14.44	34.39	46.00	11.61
5	363.043	-12.20	29.96	46.00	16.04
6	407.7077	-11.48	26.06	46.00	19.94

7.6 CONDUCTED EMISSION TEST

7.6.1 Applicable Standard

According to IC RSS-Gen 8.8

7.6.2 Conformance Limit

FCC Part 15, Subpart B, Class B

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup 3.

7.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.


Repeat above procedures until all frequency measured were complete.

7.6.5 Test Results

Pass

Temperature : 26°C
Humidity : 44%

ATM Pressure: 1011 mbar
Test Engineer: Zhuowen Sheng

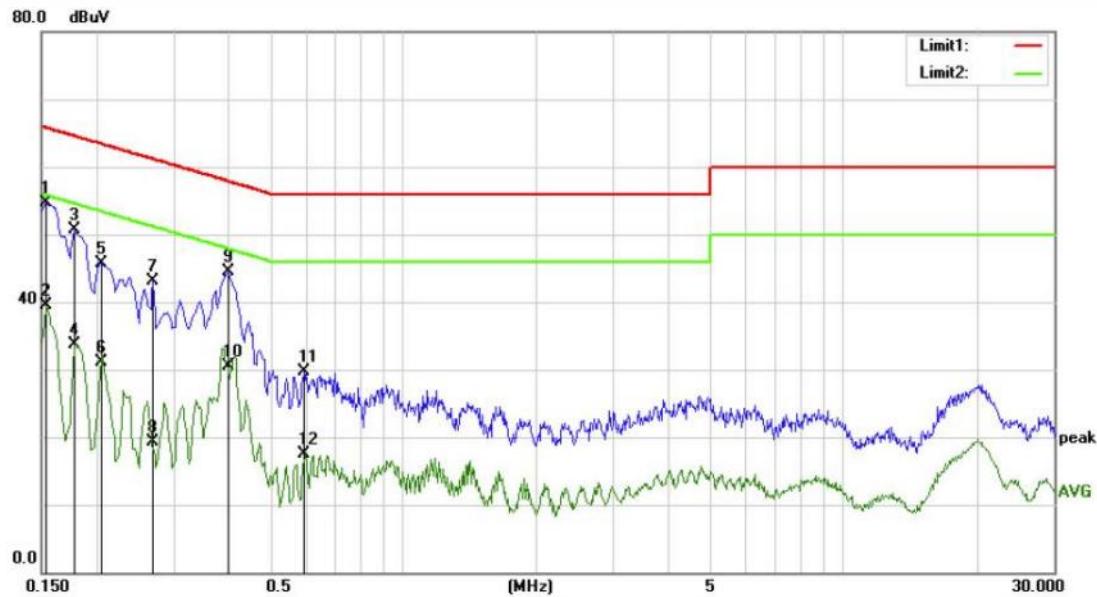

Site Conduction 2#

 Phase: **N**

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 44 %

Mode: WiFi

Note:

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			dBuV	dB	dBuV	dB			
1	*	0.1540	44.01	10.69	54.70	65.78	-11.08	QP	
2		0.1540	28.78	10.69	39.47	55.78	-16.31	AVG	
3		0.1780	40.12	10.67	50.79	64.58	-13.79	QP	
4		0.1780	23.10	10.67	33.77	54.58	-20.81	AVG	
5		0.2060	35.14	10.66	45.80	63.37	-17.57	QP	
6		0.2060	20.44	10.66	31.10	53.37	-22.27	AVG	
7		0.2700	32.41	10.69	43.10	61.12	-18.02	QP	
8		0.2700	8.64	10.69	19.33	51.12	-31.79	AVG	
9		0.3980	33.73	10.72	44.45	57.90	-13.45	QP	
10		0.3980	19.83	10.72	30.55	47.90	-17.35	AVG	
11		0.5940	18.87	10.74	29.61	56.00	-26.39	QP	
12		0.5940	6.67	10.74	17.41	46.00	-28.59	AVG	

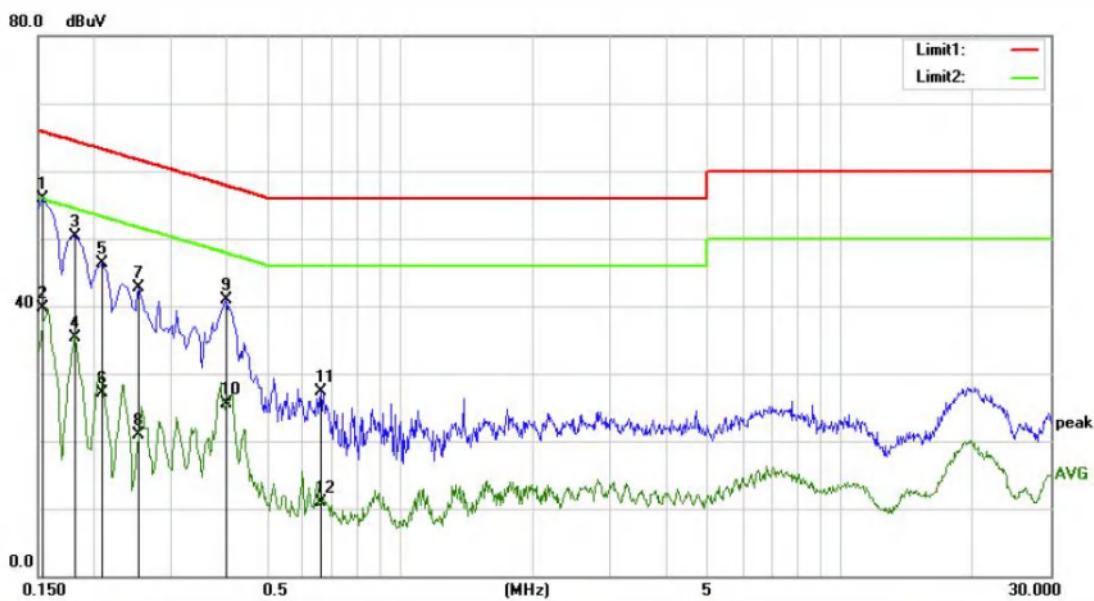

Site Conduction 2#

Phase: L1

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 44 %

Mode: WiFi

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1	*	0.1540	45.24	10.69	55.93	65.78	-9.85		QP
2		0.1540	29.05	10.69	39.74	55.78	-16.04		AVG
3		0.1820	39.65	10.67	50.32	64.39	-14.07		QP
4		0.1820	24.59	10.67	35.26	54.39	-19.13		AVG
5		0.2100	35.57	10.66	46.23	63.21	-16.98		QP
6		0.2100	16.49	10.66	27.15	53.21	-26.06		AVG
7		0.2540	31.94	10.69	42.63	61.63	-19.00		QP
8		0.2540	10.23	10.69	20.92	51.63	-30.71		AVG
9		0.4020	30.26	10.72	40.98	57.81	-16.83		QP
10		0.4020	14.79	10.72	25.51	47.81	-22.30		AVG
11		0.6580	16.58	10.74	27.32	56.00	-28.68		QP
12		0.6580	0.11	10.74	10.85	46.00	-35.15		AVG

7.7 ANTENNA APPLICATION

7.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

7.7.2 Result

PASS.

Note: Antenna use a permanently attached antenna which is not replaceable.
 Not using a standard antenna jack or electrical connector for antenna replacement
 The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document\Internal Photos to show the antenna connector.

--- End of Report ---

声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。
1. This report is invalid without the signature of the authorized approver and "special seal for testing".
2. 未经许可本报告不得部分复制。
2. This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。
6. Objections shall be raised within 20 days from the date receiving the report.