

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT**FCC PART 15.247****Report Reference No.**.....: **GTS20231018011-1-86****FCC ID**.....: **2AYD5-I23I01**

Compiled by


(position+printed name+signature) .: File administrators Peter Xiao

Supervised by

(position+printed name+signature) .: Test Engineer Evan Ouyang

Approved by

(position+printed name+signature) .: Manager Jason Hu

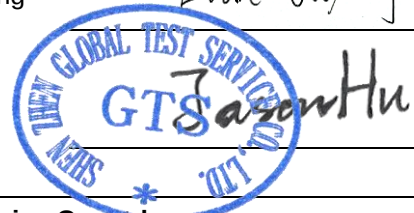

Date of issue: Jan. 29, 2024

Representative Laboratory Name.: **Shenzhen Global Test Service Co.,Ltd.**

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China

Applicant's name.....: **Imin Technology Pte Ltd**

Address: 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Test specificationStandard: **FCC Part 15.247**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description

Trade Mark



Manufacturer: Imin Technology Pte Ltd

Model/Type reference: I23I01

Listed Models: I23I02, I23I03, I23I01-01, I23I01-02, I23I01-03

Modulation Type.....: GFSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version: N/A

Software Version.....: N/A

Rating: DC 24V/2.5A by adapter

Result: **PASS**

TEST REPORT

Test Report No. :	GTS20231018011-1-86	Jan. 29, 2024
		Date of issue

Equipment under Test : POS Device

Model /Type : I23I01

Listed model : I23I02, I23I03, I23I01-01, I23I01-02, I23I01-03

Applicant : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Manufacturer : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	6
2.4. Short description of the Equipment under Test (EUT)	6
2.5. EUT operation mode	7
2.6. Block Diagram of Test Setup	7
2.7. EUT Exercise Software	7
2.8. Special Accessories	8
2.9. External I/O Cable	8
2.10. Related Submittal(s) / Grant (s)	8
2.11. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	9
3.5. Test Description	10
3.6. Equipments Used during the Test.....	11
4. TEST CONDITIONS AND RESULTS	12
4.1. AC Power Conducted Emission	12
4.2. Radiated Emission	22
4.3. Maximum Peak Output Power	35
4.4. Power Spectral Density	36
4.5. 99% and 6dB Bandwidth	37
4.6. Conducted Spurious Emissions and Band Edge Compliance of RF Emission.....	38
4.7. Antenna Requirement	40
5. TEST SETUP PHOTOS OF THE EUT	41
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	41

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Dec. 09, 2023
Testing commenced on	:	Dec. 09, 2023
Testing concluded on	:	Jan. 28, 2024

2.2. Product Description

Product Name:	POS Device
Trade Mark:	
Model/Type reference:	I23I01
List Model:	I23I02, I23I03, I23I01-01, I23I01-02, I23I01-03
Model Declaration	PCB board, structure and internal of these model(s) are the same, Only the model name different, So no additional models were tested. All modes are available in three versions, Different sizes of display and interface board are used. The transmitter part of the variants are identical and the Different sizes of display and interface board have no influence on the RF characteristics of the device which is proofed by performing EMC tests on the variants.
Power supply:	DC 24V/2.5A by adapter
Hardware Version	N/A
Software Version	N/A
Sample ID	GTS20231018011-1-S0001-5# & GTS20231018011-1-S0001-6#
Bluetooth	
Frequency Range	2402MHz ~ 2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
2.4GWLAN	
WLAN Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11ax HE20:2412-2462MHz
WLAN Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM,256QAM,64QAM,16QAM, QPSK,BPSK)
Channel number:	11 Channel for IEEE 802.11b/g/n/ax (HT20)
Channel separation:	5MHz
WIFI(5.2G/5.3G/5.7G/5.8G Band)	
WLAN Operation frequency	5180-5240MHz/ 5260MHz to 5320MHz/ 5500MHz to 5700MHz/ 5745MHz to 5825MHz
WLAN Modulation Type	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)

	IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT80: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE80: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel number:	4 Channels for 20MHz bandwidth(5180-5240MHz) 4 Channels for 20MHz bandwidth(5260-5320MHz) 11 Channels for 20MHz bandwidth(5500-5700MHz) 5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5270~5310MHz) 5 Channels for 40MHz bandwidth(5510-5670MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5210MHz) 1 channels for 80MHz bandwidth(5290MHz) 2 Channels for 80MHz bandwidth(5530-5610MHz) 1 channels for 80MHz bandwidth(5775MHz)
Antenna Description	Three Internal antenna respectively. WLAN support 2*2MIMO technology. ANT0 used for WIFI TX/RX, 2.00 dBi(Max.) for 2.4G Band and 2.00dBi(Max.) for 5G Band ANT1 used for WIFI TX/RX, 2.00 dBi(Max.) for 2.4G Band and 2.00dBi (Max.) for 5G Band ANT2 used for BT TX/RX, 2.00 dBi(Max.) for 2.4G Band
Remark:The EUT has 3 versions; Version A: 27 "display Version B: 21 "display Version C: 16 "display	

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☒ 24 V DC
		☐ Other (specified in blank below)	

DC 24.0V

2.4. Short description of the Equipment under Test (EUT)

This is a POS Device.

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 40 channels provided to the EUT. Channel 00/19/39 was selected to test.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
(BLE)	2402	1
	2440	1
	2480	1
For Conducted Emission		
Test Mode		TX Mode
For Radiated Emission		
Test Mode		TX Mode

Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
--	--	--	--
--	--	--	--
18	2438	38	2478
19	2440	39	2480


The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position. AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case(AC 120V/60Hz).

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, which was determined to be BT LE mode (MCH).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be BT LE mode(MCH).

2.6. Block Diagram of Test Setup

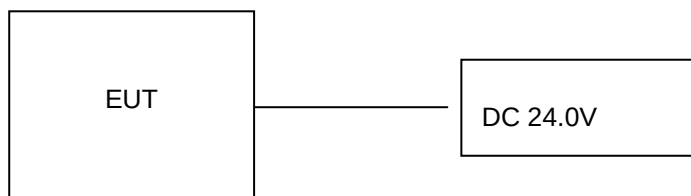

2.7. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (adb model) provided by application.

2.8. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
Jiangsu Chenyang Electron Co.,Ltd.	Adapter	CYSE65-240250	--	SDOC
Shenzhen SOY Technology Co.,Ltd.	Adapter	SOY-2400250-332-A	--	SDOC
SHENZHEN HONOR ELECTRONIC CO.,LTD.	Adapter	ADS-65HI-19A-1 24060F	--	SDOC
LENOVO	PC	DESKYOP-EUIVCNR	--	SDOC
LENOVO	Keyboard	T460S	--	SDOC
LENOVO	Mouse	Howard	--	SDOC
SONY	Earphone	MDR-XB550AP	--	SDOC
aigo	USB flash disk	U330	--	SDOC
N/A	TF Card	N/A	--	SDOC
N/A	Electronic Scale	N/A	--	SDOC
N/A	Cashbox	N/A	--	SDOC

Note: The PC, Keyboard, Mouse, Earphone, USB flash disk, TF Card, Electronic Scale and Cashbox is only used for auxiliary testing.

2.9. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	Non-Shielded, 1.0m
USB Port	6	N/A
LAN Port	1	Non-Shielded, 1.0m
Type-C Port	2	Non-Shielded, 1.0m
TF Cart	1	N/A
RJ11 Port	1	Non-Shielded, 1.0m
RJ12 Port	1	Non-Shielded, 1.0m
Earphone	1	N/A

2.10. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AYD5-I23I01** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.11. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is 165725.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

Applied Standard: FCC Part 15 Subpart C				
FCC Rules	Description of Test	Test Sample	Result	Remark
/	On Time and Duty Cycle	GTS20231018011-1-S0001-5#	/	/
§15.247(b)	Maximum Conducted Output Power	GTS20231018011-1-S0001-5#	Compliant	Appendix B
§15.247(e)	Power Spectral Density	GTS20231018011-1-S0001-5#	Compliant	Appendix B
§15.247(a)(2)	6dB Bandwidth	GTS20231018011-1-S0001-5#	Compliant	Appendix B
§2.1047	99% Occupied Bandwidth	GTS20231018011-1-S0001-5#	Compliant	Appendix B
§15.209, §15.247(d)	Conducted Spurious Emissions and Band Edges Test	GTS20231018011-1-S0001-5#	Compliant	Appendix B
§15.209, §15.247(d)	Radiated Spurious Emissions	GTS20231018011-1-S0001-5# GTS20231018011-1-S0001-6#	Compliant	Note 1
§15.205	Emissions at Restricted Band	GTS20231018011-1-S0001-5#	Compliant	Note 1
§15.207(a)	AC Conducted Emissions	GTS20231018011-1-S0001-6#	Compliant	Note 1
§15.203 §15.247(c)	Antenna Requirements	GTS20231018011-1-S0001-5#	Compliant	Note 1
§15.247(i)§2.1091	RF Exposure	/	Compliant	Note 2

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (MPE Report).
5. We tested all test mode and recorded worst case in report

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	CYBERTEK	EM5040A	E1850400105	2023/07/13	2024/07/12
LISN	R&S	ESH2-Z5	893606/008	2023/07/13	2024/07/12
EMI Test Receiver	R&S	ESPI3	101841-cd	2023/07/14	2024/07/13
EMI Test Receiver	R&S	ESCI7	101102	2023/07/13	2024/07/12
Spectrum Analyzer	Agilent	N9020A	MY48010425	2023/08/28	2024/08/27
Spectrum Analyzer	R&S	FSV40	100019	2023/07/13	2024/07/12
Vector Signal generator	Agilent	N5181A	MY49060502	2023/07/13	2024/07/12
Signal generator	Agilent	N5182A	3610AO1069	2023/07/13	2024/07/12
Climate Chamber	ESPEC	EL-10KA	A20120523	2023/07/13	2024/07/12
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2023/07/13	2024/07/12
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2023/07/13	2024/07/12
Bilog Antenna	Schwarzbeck	VULB9163	000976	2023/07/13	2024/07/12
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2023/07/13	2024/07/12
Antenna Tower	Suzhou Keletuo electronic Technology Co., LTD	BK-*AT-BS	N/A	N/A	N/A
Amplifier	Schwarzbeck	BBV 9743	#202	2023/07/14	2024/07/13
Amplifier	Schwarzbeck	BBV9179	9719-025	2023/07/14	2024/07/13
Amplifier	EMCI	EMC051845B	980355	2023/07/14	2024/07/13
Temperature/Humidity Meter	Gangxing	CTH-608	02	2023/07/13	2024/07/12
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2023/08/30	2024/08/29
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2023/08/30	2024/08/29
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2023/07/13	2024/07/12
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2023/07/13	2024/07/12
Data acquisition card	Agilent	U2531A	TW53323507	2023/07/13	2024/07/12
Power Sensor	Agilent	U2021XA	MY5365004	2023/07/13	2024/07/12
Test Control Unit	Tonscend	JS0806-1	178060067	2023/07/13	2024/07/12
Automated filter bank	Tonscend	JS0806-F	19F8060177	2023/07/13	2024/07/12
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: 1. The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

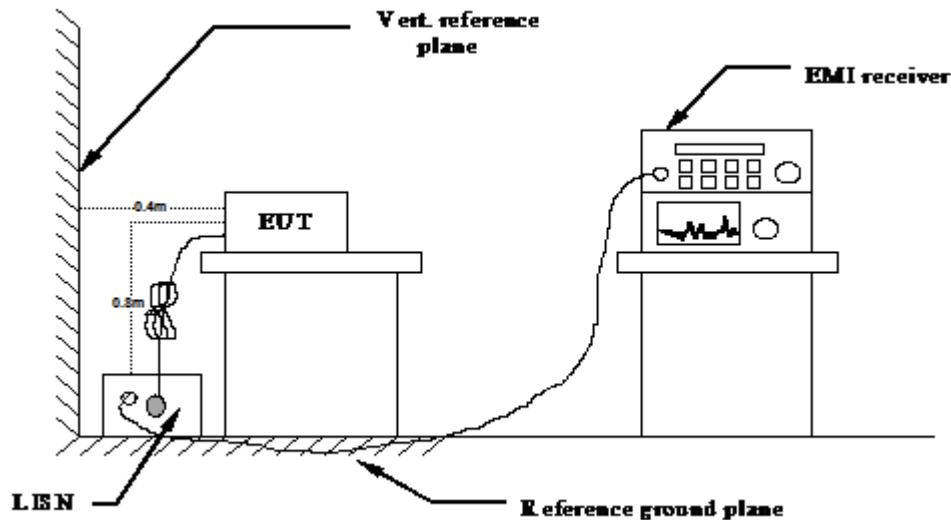

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020
- 4 The EUT received DC 24V power, the adapter received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

TEST RESULTS

Remark: We measured Conducted Emission at GFSK mode from 150 KHz to 30MHz in AC120V and the worst case was recorded.


Temperature	25°C	Humidity	60%
Test Engineer	Evan Ouyang	Configurations	BT

Version A:

Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

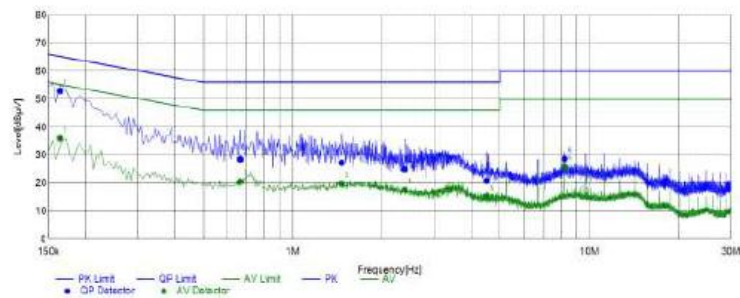

Final Data List


NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1639	43.08	26.12	9.92	53.00	36.04	65.26	55.26	12.26	19.22	L1	PASS
2	0.6650	18.89	10.86	9.67	28.56	20.53	56.00	46.00	27.44	25.47	L1	PASS
3	1.4610	17.60	10.06	9.70	27.30	19.76	56.00	46.00	28.70	26.24	L1	PASS
4	2.3804	15.21	7.87	9.74	24.95	17.61	56.00	46.00	31.05	28.39	L1	PASS
5	4.5000	11.02	5.26	9.80	20.82	15.06	56.00	46.00	35.18	30.94	L1	PASS
6	8.2435	19.03	16.22	9.71	28.74	25.93	60.00	50.00	31.26	24.07	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

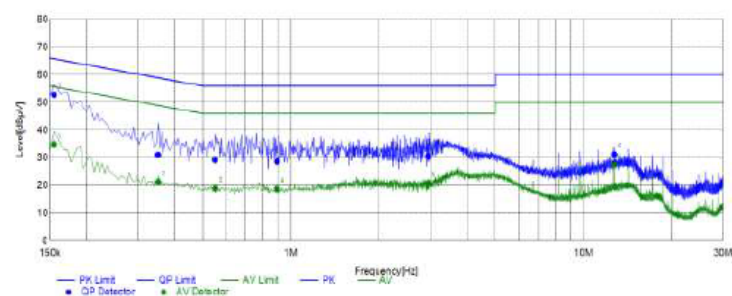

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1549	42.98	24.94	9.79	52.77	34.73	65.74	55.74	12.97	21.01	N	PASS
2	0.3513	21.34	11.49	9.68	31.02	21.17	58.93	48.93	27.91	27.76	N	PASS
3	0.5499	19.64	9.23	9.68	29.32	18.91	56.00	46.00	26.68	27.09	N	PASS
4	0.8975	19.06	9.03	9.66	28.72	18.69	56.00	46.00	27.28	27.31	N	PASS
5	2.9483	20.74	11.08	9.76	30.50	20.84	56.00	46.00	25.50	25.16	N	PASS
6	12.7418	21.78	17.92	9.42	31.20	27.34	60.00	50.00	28.80	22.66	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: SOY-2400250-332-A

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1502	44.93	27.40	9.96	54.89	37.36	65.99	55.99	11.10	18.63	L1	PASS
2	0.1723	41.27	24.68	9.89	51.16	34.57	64.85	54.85	13.69	20.28	L1	PASS
3	0.2212	33.83	18.78	9.78	43.61	28.56	62.77	52.77	19.16	24.21	L1	PASS
4	0.7083	19.96	13.66	9.67	29.63	23.33	56.00	46.00	26.37	22.67	L1	PASS
5	1.4203	17.86	10.14	9.69	27.55	19.83	56.00	46.00	28.45	26.17	L1	PASS
6	11.2520	16.88	12.39	9.52	26.40	21.91	60.00	50.00	33.60	28.09	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1544	42.49	24.87	9.79	52.28	34.66	65.76	55.76	13.48	21.30	N	PASS
2	0.1767	38.91	22.26	9.79	48.70	32.05	64.64	54.64	15.94	22.59	N	PASS
3	0.5084	19.78	9.36	9.68	29.46	19.04	56.00	46.00	26.54	26.96	N	PASS
4	0.8220	18.68	9.07	9.67	28.35	18.74	56.00	46.00	27.65	27.26	N	PASS
5	2.5422	19.04	10.93	9.74	28.78	20.67	56.00	46.00	27.22	25.33	N	PASS
6	11.2071	13.84	8.44	9.54	23.38	17.98	60.00	50.00	36.62	32.02	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: ADS-65HI-19A-1 24060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1502	43.84	25.54	9.96	53.80	35.50	65.99	55.99	12.19	20.49	L1	PASS
2	0.1717	40.69	23.65	9.89	50.58	33.54	64.88	54.88	14.30	21.34	L1	PASS
3	0.2257	32.68	17.29	9.78	42.46	27.07	62.61	52.61	20.15	25.54	L1	PASS
4	0.8445	18.04	8.82	9.68	27.72	18.50	56.00	46.00	28.28	27.50	L1	PASS
5	1.7510	16.34	9.94	9.71	26.05	19.65	56.00	46.00	29.95	26.35	L1	PASS
6	12.6025	11.50	6.30	9.41	20.91	15.71	60.00	50.00	39.09	34.29	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

N	AC 120V/60Hz	Polarization	N
---	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1544	41.93	23.91	9.79	51.72	33.70	65.76	55.76	14.04	22.06	N	PASS
2	0.1725	39.34	22.30	9.79	49.13	32.09	64.84	54.84	15.71	22.75	N	PASS
3	0.7672	20.86	9.49	9.66	30.52	19.15	56.00	46.00	25.48	26.85	N	PASS
4	1.4351	18.78	10.92	9.68	28.46	20.60	56.00	46.00	27.54	25.40	N	PASS
5	2.5304	18.71	10.91	9.74	28.45	20.65	56.00	46.00	27.55	25.35	N	PASS
6	13.2304	17.12	11.88	9.39	26.51	21.27	60.00	50.00	33.49	28.73	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version B:
Adapter: CYSE65-240250

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1505	43.67	25.42	9.96	53.63	35.38	65.97	55.97	12.34	20.59	L1	PASS
2	0.1630	42.10	25.70	9.92	52.02	35.62	65.31	55.31	13.29	19.69	L1	PASS
3	0.1998	36.36	20.72	9.81	46.17	30.53	63.62	53.62	17.45	23.09	L1	PASS
4	0.6664	18.67	11.05	9.67	28.34	20.72	56.00	46.00	27.66	25.28	L1	PASS
5	1.5192	17.05	10.03	9.69	26.74	19.72	56.00	46.00	29.26	26.28	L1	PASS
6	9.2625	14.58	10.20	9.66	24.24	19.86	60.00	50.00	35.76	30.14	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1542	42.15	24.41	9.79	51.94	34.20	65.77	55.77	13.83	21.57	N	PASS
2	0.1724	39.91	23.15	9.79	49.70	32.94	64.84	54.84	15.14	21.90	N	PASS
3	0.7669	20.45	9.51	9.66	30.11	19.17	56.00	46.00	25.89	26.83	N	PASS
4	1.2154	18.60	10.03	9.67	28.27	19.70	56.00	46.00	27.73	26.30	N	PASS
5	2.4749	18.87	11.31	9.74	28.61	21.05	56.00	46.00	27.39	24.95	N	PASS
6	14.3936	15.77	10.67	9.30	25.07	19.97	60.00	50.00	34.93	30.03	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: SOY-2400250-332-A

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1773	34.87	19.08	9.87	44.74	28.93	64.61	54.61	19.87	25.68	L1	PASS
2	0.3087	26.00	15.38	9.68	35.68	25.06	60.01	50.01	24.33	24.95	L1	PASS
3	0.7063	22.18	13.67	9.67	31.85	23.34	56.00	46.00	24.15	22.66	L1	PASS
4	1.5588	19.73	9.85	9.70	29.43	19.55	56.00	46.00	26.57	26.45	L1	PASS
5	8.1285	28.16	26.16	9.71	37.87	35.87	60.00	50.00	22.13	14.13	L1	PASS
6	11.0873	28.04	23.91	9.53	37.57	33.44	60.00	50.00	22.43	16.56	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1543	40.32	20.15	9.79	50.11	29.94	65.77	55.77	15.66	25.83	N	PASS
2	0.2078	33.42	16.37	9.79	43.21	26.16	63.29	53.29	20.08	27.13	N	PASS
3	0.7328	25.62	18.51	9.67	35.29	28.18	56.00	46.00	20.71	17.82	N	PASS
4	2.1187	20.88	11.39	9.73	30.61	21.12	56.00	46.00	25.39	24.88	N	PASS
5	3.6881	25.30	20.73	9.78	35.08	30.51	56.00	46.00	20.92	15.49	N	PASS
6	12.5528	32.17	28.60	9.45	41.62	38.05	60.00	50.00	18.38	11.95	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: ADS-65HI-19A-1 24060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1775	39.32	22.98	9.87	49.19	32.85	64.60	54.60	15.41	21.75	L1	PASS
2	0.2320	31.63	16.90	9.77	41.40	26.67	62.38	52.38	20.98	25.71	L1	PASS
3	0.6780	18.90	11.43	9.67	28.57	21.10	56.00	46.00	27.43	24.90	L1	PASS
4	0.9785	17.98	9.26	9.67	27.65	18.93	56.00	46.00	28.35	27.07	L1	PASS
5	2.7875	15.65	7.42	9.76	25.41	17.18	56.00	46.00	30.59	28.82	L1	PASS
6	8.2661	19.04	16.68	9.70	28.74	26.38	60.00	50.00	31.26	23.62	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1505	43.79	26.69	9.79	53.58	36.48	65.97	55.97	12.39	19.49	N	PASS
2	0.1632	41.02	24.03	9.79	50.81	33.82	65.30	55.30	14.49	21.48	N	PASS
3	0.5756	19.39	9.21	9.68	29.07	18.89	56.00	46.00	26.93	27.11	N	PASS
4	1.1115	18.91	9.68	9.67	28.58	19.35	56.00	46.00	27.42	26.65	N	PASS
5	2.7019	19.57	11.11	9.74	29.31	20.85	56.00	46.00	26.69	25.15	N	PASS
6	9.7641	20.58	17.92	9.65	30.23	27.57	60.00	50.00	29.77	22.43	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version C:
Adapter: CYSE65-240250


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

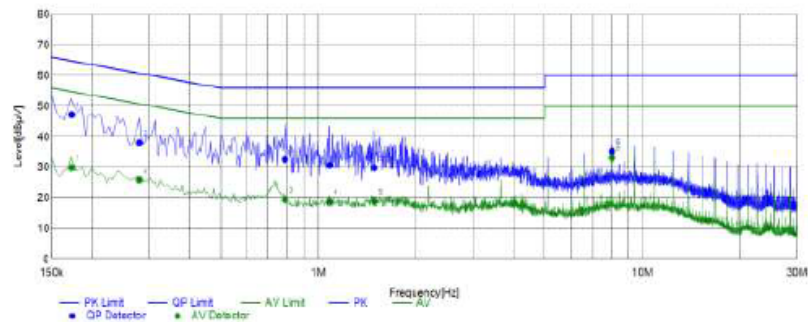

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1731	37.37	20.08	9.89	47.26	29.97	64.81	54.81	17.55	24.84	L1	PASS
2	0.2801	28.32	16.26	9.70	38.02	25.96	60.81	50.81	22.79	24.85	L1	PASS
3	0.7883	22.90	9.85	9.68	32.58	19.53	56.00	46.00	23.42	26.47	L1	PASS
4	1.0836	21.03	9.16	9.68	30.71	18.84	56.00	46.00	25.29	27.16	L1	PASS
5	1.4891	20.21	9.18	9.70	29.91	18.88	56.00	46.00	26.09	27.12	L1	PASS
6	8.0629	25.56	23.44	9.70	35.26	33.14	60.00	50.00	24.74	16.86	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

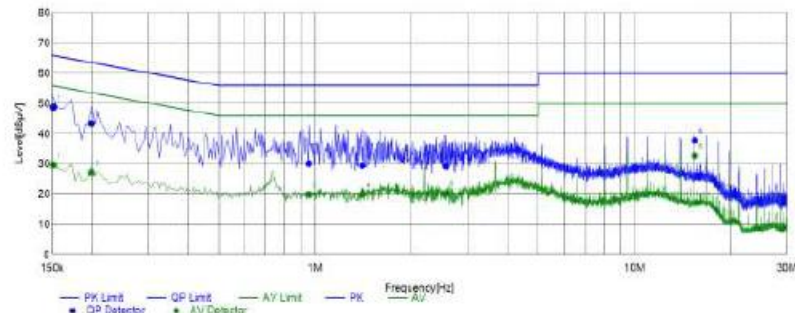

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1513	39.04	19.97	9.79	48.83	29.76	65.93	55.93	17.10	26.17	N	PASS
2	0.1991	33.87	17.35	9.80	43.47	27.15	63.65	53.65	20.18	26.50	N	PASS
3	0.9554	20.53	10.28	9.66	30.19	19.94	56.00	46.00	25.81	26.06	N	PASS
4	1.4031	19.91	10.18	9.68	29.59	19.86	56.00	46.00	26.41	26.14	N	PASS
5	2.5653	19.67	10.60	9.75	29.42	20.35	56.00	46.00	26.58	25.65	N	PASS
6	15.4301	28.57	23.52	9.23	37.80	32.75	60.00	50.00	22.20	17.25	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: SOY-2400250-332-A

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1673	36.91	19.62	9.90	46.81	29.52	65.09	55.09	18.28	25.57	L1	PASS
2	0.6797	21.79	11.57	9.67	31.46	21.24	56.00	46.00	24.54	24.76	L1	PASS
3	1.0773	20.54	9.26	9.68	30.22	18.94	56.00	46.00	25.78	27.06	L1	PASS
4	1.5656	19.57	9.58	9.70	29.27	19.28	56.00	46.00	26.73	26.72	L1	PASS
5	8.0983	28.25	26.76	9.70	37.95	36.46	60.00	50.00	22.05	13.54	L1	PASS
6	11.0405	28.58	25.50	9.55	38.13	35.05	60.00	50.00	21.87	14.95	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1727	35.80	17.95	9.79	45.59	27.74	64.83	54.83	19.24	27.09	N	PASS
2	0.2948	25.62	14.23	9.68	35.30	23.91	60.39	50.39	25.09	26.48	N	PASS
3	0.7376	23.98	16.70	9.67	33.65	26.37	56.00	46.00	22.35	19.63	N	PASS
4	1.5727	20.27	11.49	9.69	29.96	21.18	56.00	46.00	26.04	24.82	N	PASS
5	2.3046	19.89	11.24	9.73	29.62	20.97	56.00	46.00	26.38	25.03	N	PASS
6	12.4937	31.69	27.71	9.44	41.13	37.15	60.00	50.00	18.87	12.85	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: ADS-65HI-19A-1 24060F

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1672	36.54	19.52	9.90	46.44	29.42	65.10	55.10	18.66	25.68	L1	PASS
2	0.2728	27.77	16.31	9.72	37.49	26.03	61.03	51.03	23.54	25.00	L1	PASS
3	0.6749	22.09	11.50	9.67	31.76	21.17	56.00	46.00	24.24	24.83	L1	PASS
4	1.0663	20.34	9.20	9.68	30.02	18.88	56.00	46.00	25.98	27.12	L1	PASS
5	8.1094	28.27	26.65	9.70	37.97	36.35	60.00	50.00	22.03	13.65	L1	PASS
6	9.5852	28.95	26.75	9.66	38.61	36.41	60.00	50.00	21.39	13.59	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List


NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1592	39.62	19.28	9.79	49.41	29.07	65.50	55.50	16.09	26.43	N	PASS
2	0.3256	26.09	14.05	9.68	35.77	23.73	59.56	49.56	23.79	25.83	N	PASS
3	0.6209	23.27	12.24	9.67	32.94	21.91	56.00	46.00	23.06	24.09	N	PASS
4	2.4062	20.21	12.29	9.74	29.95	22.03	56.00	46.00	26.05	23.97	N	PASS
5	8.0964	27.82	26.22	9.71	37.53	35.93	60.00	50.00	22.47	14.07	N	PASS
6	15.4800	32.24	27.35	9.23	41.47	36.58	60.00	50.00	18.53	13.42	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

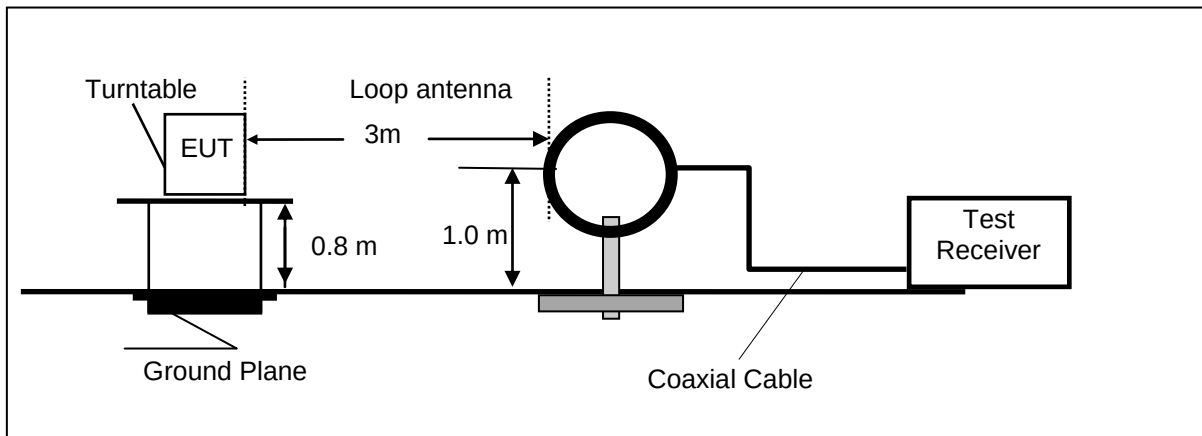

Frequency range 30MHz – 1000MHz

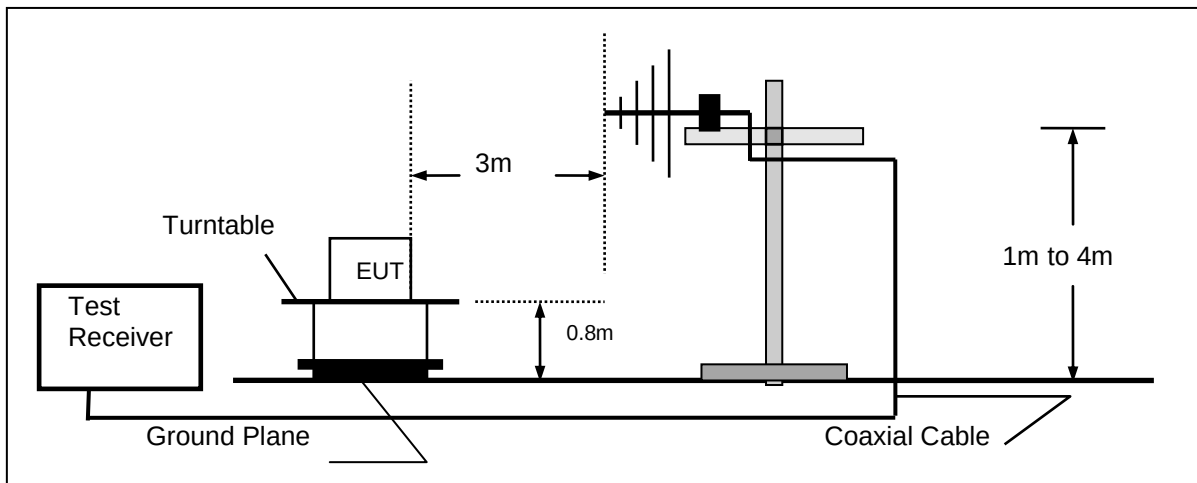

Frequency range above 1GHz-25GHz

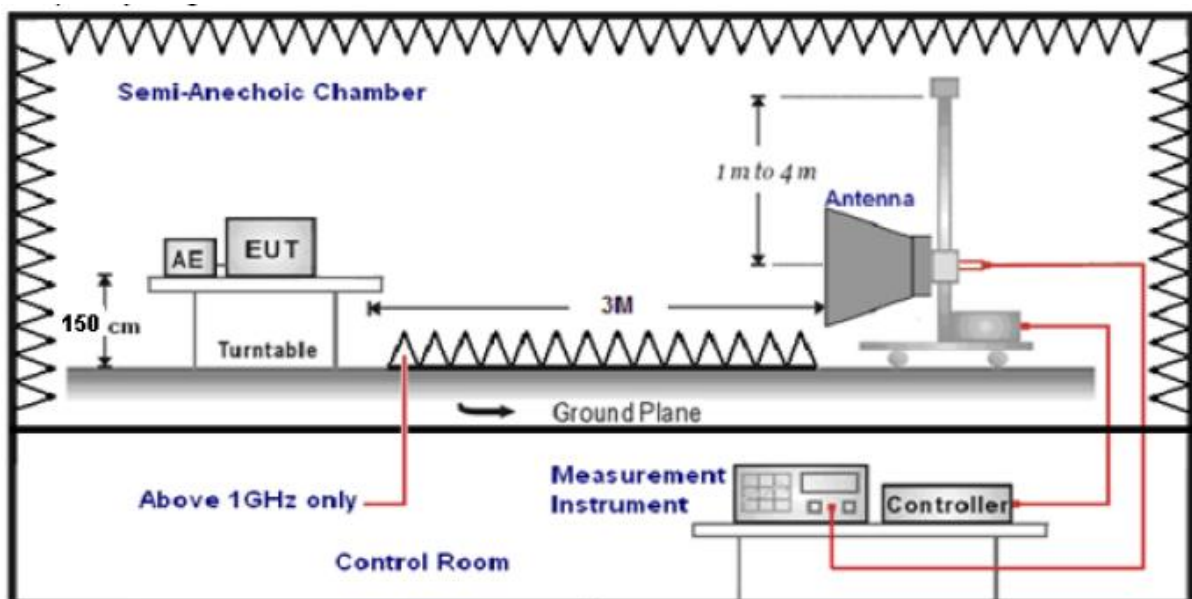

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 30MHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at GFSK mode from 9kHz to 25GHz in AC120V and the worst case was recorded.

Temperature	24°C	Humidity	58%
Test Engineer	Evan Ouyang	Configurations	BT

For 9 KHz~30MHz

Freq. (MHz)	Level (dBµV)	Over Limit (dB)	Over Limit (dBµV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBµV) + distance extrapolation factor.


For 30MHz to 1000MHz

Version A:

Adapter: CYSE65-240250

Horizontal

Test Graph

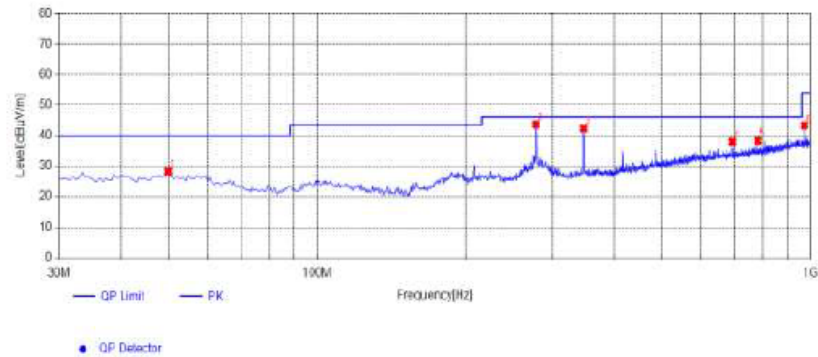

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	49.885	32.93	-4.68	28.25	40.00	11.75	100	245	PK	Horizontal	PASS
2	277.835	45.03	-1.36	43.67	46.00	2.33	100	212	PK	Horizontal	PASS
3	347.19	41.83	0.60	42.43	46.00	3.57	100	303	PK	Horizontal	PASS
4	694.935	29.80	8.25	38.05	46.00	7.95	100	30	PK	Horizontal	PASS
5	781.75	28.77	9.61	38.38	46.00	7.62	100	289	PK	Horizontal	PASS
6	972.84	30.76	12.55	43.31	54.00	10.69	100	232	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

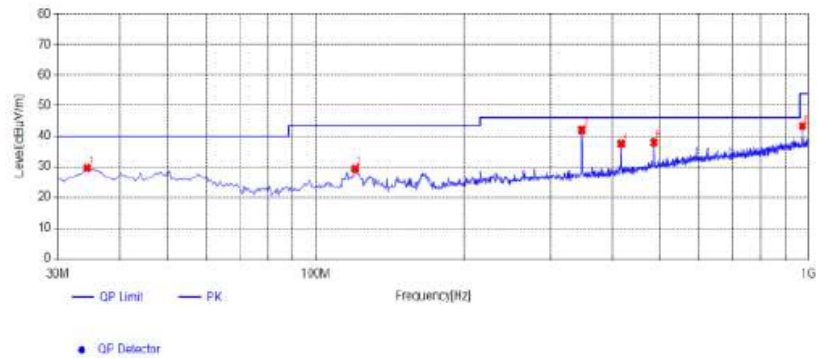

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	34.365	35.49	-5.84	29.65	40.00	10.35	100	5	PK	Vertical	PASS
2	120.21	35.46	-6.03	29.43	43.50	14.07	100	127	PK	Vertical	PASS
3	347.19	41.48	0.60	42.08	46.00	3.92	100	171	PK	Vertical	PASS
4	417.03	35.00	2.48	37.48	46.00	8.52	100	171	PK	Vertical	PASS
5	486.385	33.66	4.30	37.96	46.00	8.04	100	158	PK	Vertical	PASS
6	973.325	30.76	12.55	43.33	54.00	10.67	100	9	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: SOY-2400250-332-A

Horizontal

Test Graph

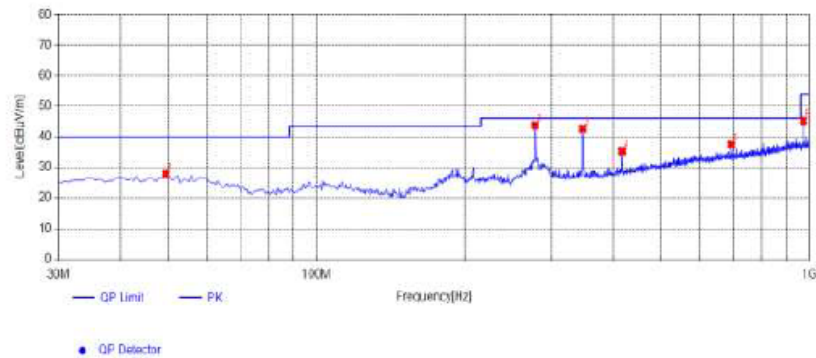

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	49.4	32.53	-4.70	27.83	40.00	12.17	100	304	PK	Horizontal	PASS
2	277.835	45.12	-1.36	43.76	46.00	2.24	100	186	PK	Horizontal	PASS
3	347.19	42.14	0.60	42.74	46.00	3.26	100	236	PK	Horizontal	PASS
4	417.03	32.88	2.48	35.36	46.00	10.64	100	118	PK	Horizontal	PASS
5	604.935	29.24	8.25	37.49	46.00	8.51	100	220	PK	Horizontal	PASS
6	973.325	32.67	12.55	45.22	54.00	8.78	100	141	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

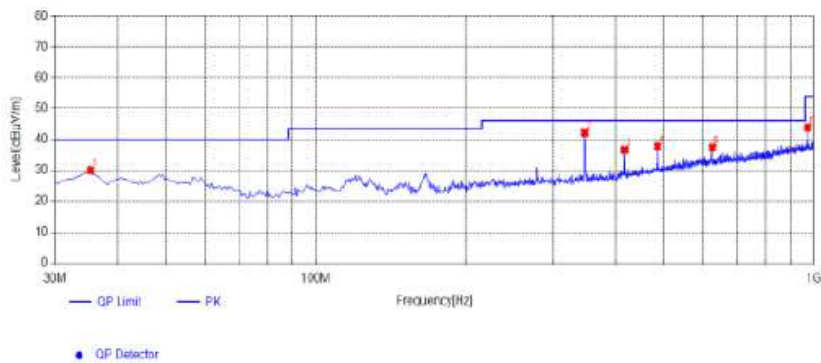

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	35.335	35.81	-5.78	30.03	40.00	9.97	100	64	PK	Vertical	PASS
2	347.19	41.65	0.60	42.25	46.00	3.75	100	164	PK	Vertical	PASS
3	417.03	34.22	2.48	36.70	46.00	9.30	100	178	PK	Vertical	PASS
4	486.385	33.48	4.30	37.78	46.00	8.22	100	229	PK	Vertical	PASS
5	625.58	30.17	7.26	37.43	46.00	8.57	100	236	PK	Vertical	PASS
6	972.84	31.27	12.55	43.82	54.00	10.18	100	215	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: ADS-65HI-19A-1 24060F

Horizontal

Test Graph

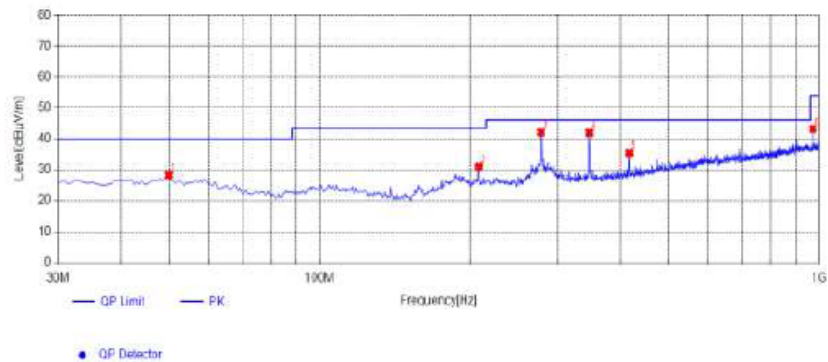

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	49.885	32.96	-4.68	28.28	40.00	11.72	100	80	PK	Horizontal	PASS
2	208.48	34.64	-3.70	30.94	43.50	12.56	100	30	PK	Horizontal	PASS
3	277.835	43.54	-1.36	42.18	46.00	3.82	100	219	PK	Horizontal	PASS
4	347.19	41.42	0.60	42.02	46.00	3.98	100	101	PK	Horizontal	PASS
5	417.03	33.02	2.48	35.50	46.00	10.50	100	128	PK	Horizontal	PASS
6	972.84	30.68	12.55	43.23	54.00	10.77	100	212	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

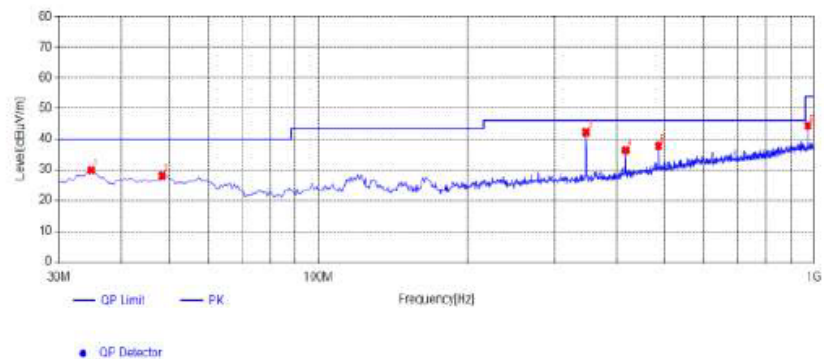

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	34.85	35.65	-5.79	29.86	40.00	10.14	100	53	PK	Vertical	PASS
2	48.43	32.72	-4.70	28.02	40.00	11.98	100	200	PK	Vertical	PASS
3	347.19	41.71	0.60	42.31	46.00	3.69	100	189	PK	Vertical	PASS
4	417.03	33.97	2.48	36.45	46.00	9.55	100	172	PK	Vertical	PASS
5	486.385	33.45	4.30	37.75	46.00	8.25	100	234	PK	Vertical	PASS
6	972.84	31.75	12.55	44.30	54.00	9.70	100	26	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version B:

Adapter: CYSE65-240250

Horizontal

Test Graph

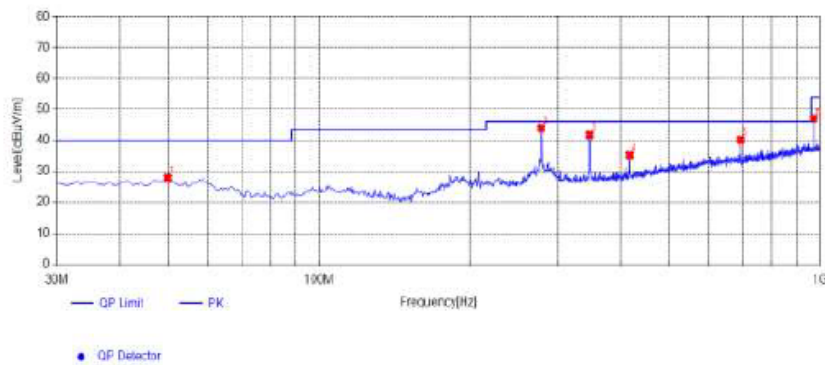

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	49.885	32.58	-4.68	27.90	40.00	12.10	100	174	PK	Horizontal	PASS
2	277.835	45.32	-1.36	43.96	46.00	2.04	100	205	PK	Horizontal	PASS
3	347.19	41.21	0.60	41.81	46.00	4.19	100	238	PK	Horizontal	PASS
4	417.03	32.83	2.48	35.31	46.00	10.69	100	208	PK	Horizontal	PASS
5	694.935	31.96	8.25	40.21	46.00	5.79	100	113	PK	Horizontal	PASS
6	972.84	34.43	12.55	46.98	54.00	7.02	100	137	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

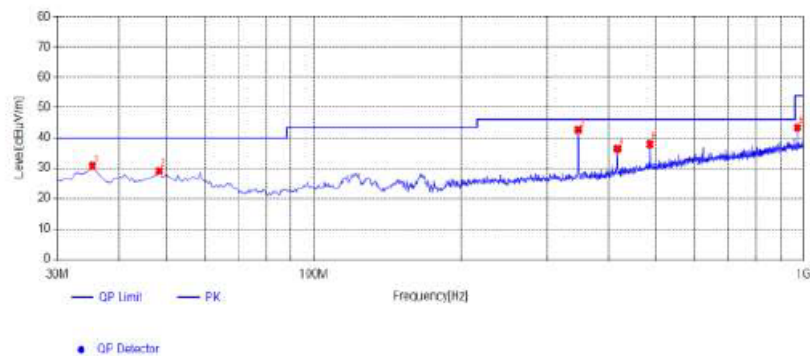

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	35.335	36.53	-5.78	30.75	40.00	9.25	100	340	PK	Vertical	PASS
2	48.43	33.90	-4.70	29.20	40.00	10.80	100	1	PK	Vertical	PASS
3	347.19	42.20	0.60	42.80	46.00	3.20	100	172	PK	Vertical	PASS
4	417.03	34.01	2.48	36.49	46.00	9.51	100	168	PK	Vertical	PASS
5	488.385	33.60	4.30	37.90	46.00	8.10	100	242	PK	Vertical	PASS
6	972.84	30.85	12.55	43.40	54.00	10.60	100	148	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: SOY-2400250-332-A

Horizontal

Test Graph

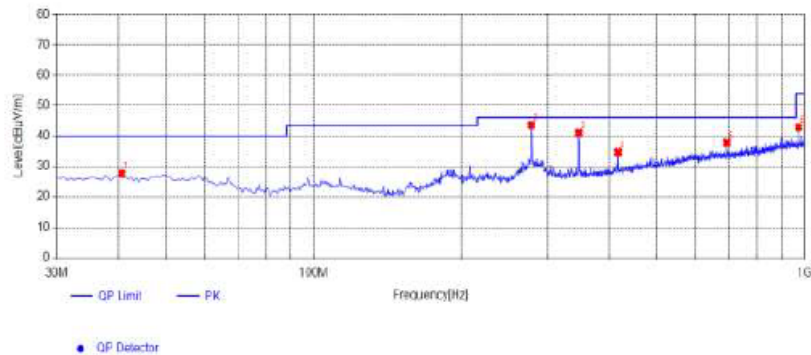

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	40.67	33.03	-5.40	27.63	40.00	12.37	100	233	PK	Horizontal	PASS
2	277.835	44.98	-1.36	43.62	46.00	2.38	100	213	PK	Horizontal	PASS
3	347.19	40.44	0.60	41.04	46.00	4.96	100	293	PK	Horizontal	PASS
4	417.03	32.14	2.48	34.62	46.00	11.38	100	112	PK	Horizontal	PASS
5	694.935	29.56	8.25	37.81	46.00	8.19	100	25	PK	Horizontal	PASS
6	973.325	30.39	12.55	42.94	54.00	11.06	100	223	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

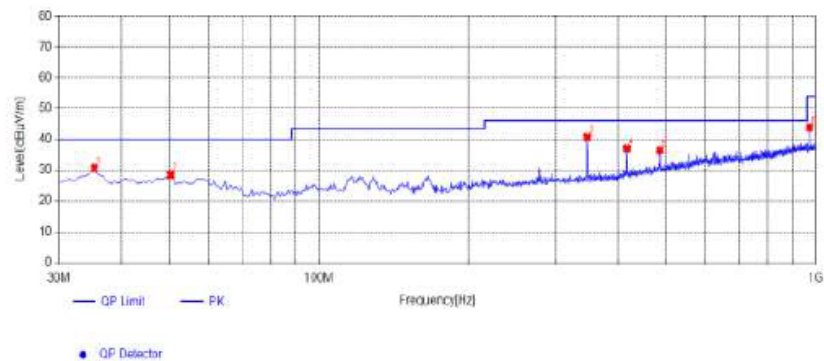

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	35.335	36.49	-5.78	30.71	40.00	9.29	100	87	PK	Vertical	PASS
2	50.37	33.17	-4.72	28.45	40.00	11.55	100	50	PK	Vertical	PASS
3	347.19	40.13	0.60	40.73	46.00	5.27	100	206	PK	Vertical	PASS
4	417.03	34.53	2.48	37.01	46.00	8.99	100	196	PK	Vertical	PASS
5	486.385	32.19	4.30	36.49	46.00	9.51	100	213	PK	Vertical	PASS
6	972.84	31.26	12.55	43.81	54.00	10.19	100	223	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: ADS-65HI-19A-1 24060F

Horizontal

Test Graph

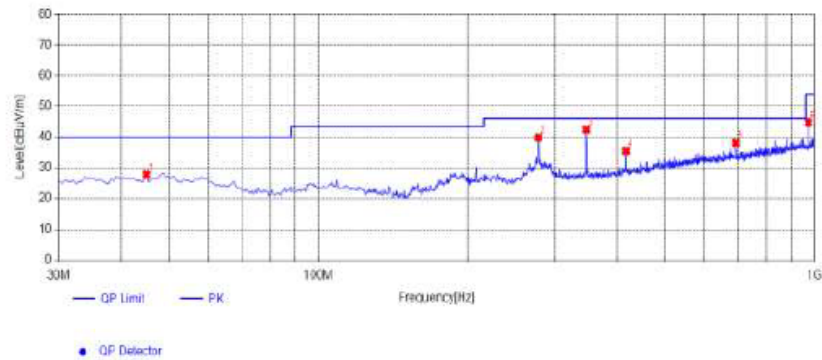

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	45.035	32.70	-4.86	27.84	40.00	12.16	100	26	PK	Horizontal	PASS
2	277.835	41.29	-1.36	39.93	46.00	6.07	100	165	PK	Horizontal	PASS
3	347.19	41.92	0.60	42.52	46.00	3.48	100	307	PK	Horizontal	PASS
4	417.03	33.05	2.48	35.53	46.00	10.47	100	124	PK	Horizontal	PASS
5	694.935	29.89	8.25	38.14	46.00	7.86	100	30	PK	Horizontal	PASS
6	972.84	32.25	12.55	44.80	54.00	9.20	100	135	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

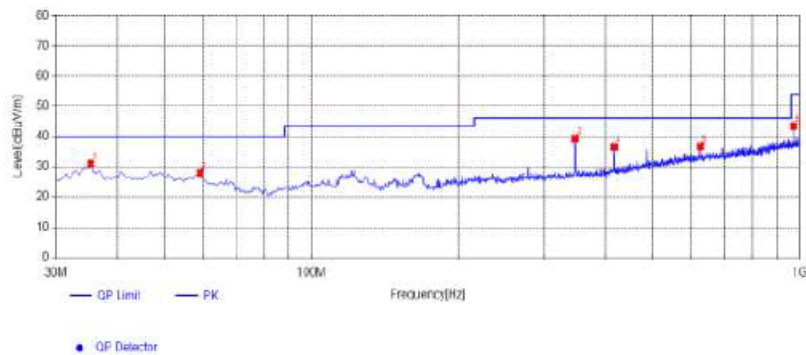

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	35.335	36.76	-5.78	30.98	40.00	9.02	100	250	PK	Vertical	PASS
2	59.1	32.73	-4.85	27.88	40.00	12.12	100	128	PK	Vertical	PASS
3	347.19	38.78	0.60	39.38	46.00	6.62	100	327	PK	Vertical	PASS
4	417.03	34.08	2.48	36.56	46.00	9.44	100	182	PK	Vertical	PASS
5	625.58	29.47	7.26	36.73	46.00	9.27	100	239	PK	Vertical	PASS
6	972.84	30.89	12.55	43.44	54.00	10.56	100	21	PK	Vertical	PASS

Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version C:

Adapter: CYSE65-240250

Horizontal

Test Graph

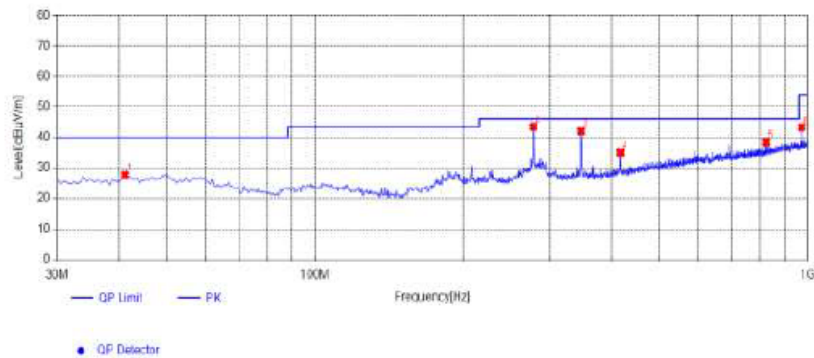

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	41.155	33.19	-5.46	27.73	40.00	12.27	100	135	PK	Horizontal	PASS
2	277.835	44.90	-1.36	43.54	46.00	2.46	100	192	PK	Horizontal	PASS
3	347.19	41.52	0.60	42.12	46.00	3.88	100	229	PK	Horizontal	PASS
4	417.03	32.58	2.48	35.06	46.00	10.94	100	121	PK	Horizontal	PASS
5	823.46	28.48	9.97	38.45	46.00	7.55	100	175	PK	Horizontal	PASS
6	973.325	30.76	12.55	43.31	54.00	10.69	100	215	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

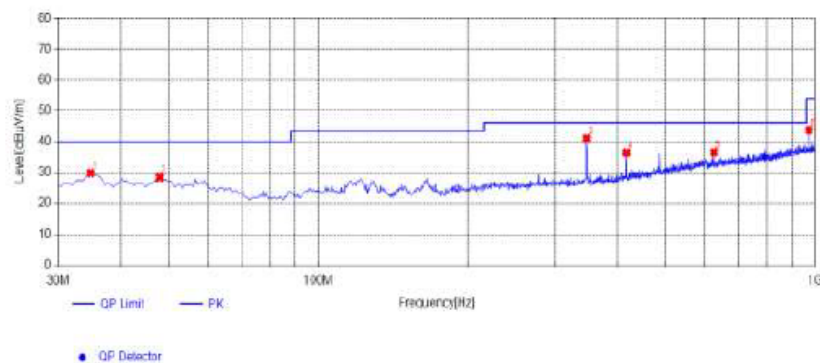

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	34.85	35.66	-5.79	29.87	40.00	10.13	100	26	PK	Vertical	PASS
2	47.945	33.11	-4.66	28.45	40.00	11.55	100	360	PK	Vertical	PASS
3	347.19	40.46	0.60	41.06	46.00	4.94	100	174	PK	Vertical	PASS
4	417.03	34.02	2.48	36.50	46.00	9.50	100	181	PK	Vertical	PASS
5	625.58	29.37	7.26	36.63	46.00	9.37	100	231	PK	Vertical	PASS
6	972.84	31.18	12.55	43.73	54.00	10.27	100	201	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: SOY-2400250-332-A

Horizontal

Test Graph

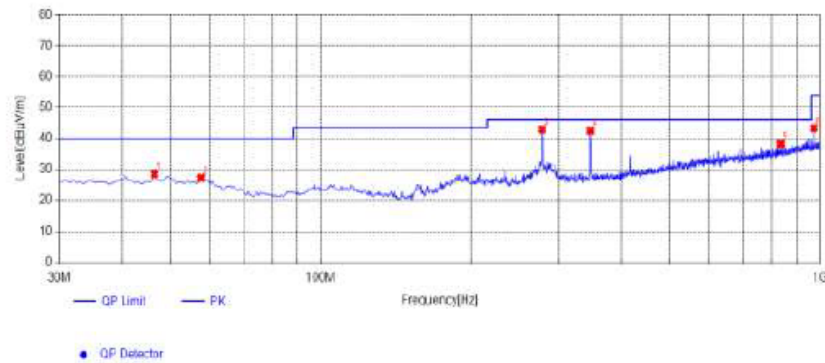

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	48.49	33.11	-4.58	28.53	40.00	11.47	100	67	PK	Horizontal	PASS
2	57.845	31.96	-4.71	27.25	40.00	12.75	100	258	PK	Horizontal	PASS
3	277.835	44.34	-1.36	42.98	46.00	3.02	100	221	PK	Horizontal	PASS
4	347.19	42.00	0.60	42.60	46.00	3.40	100	224	PK	Horizontal	PASS
5	834.13	28.07	10.19	38.26	46.00	7.74	100	144	PK	Horizontal	PASS
6	972.84	30.77	12.55	43.32	54.00	10.68	100	140	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

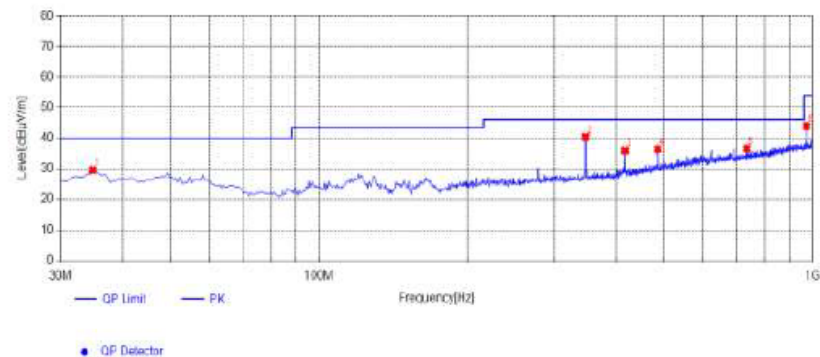

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	34.85	35.41	-5.79	29.62	40.00	10.38	100	106	PK	Vertical	PASS
2	347.19	39.84	0.60	40.44	46.00	5.56	100	160	PK	Vertical	PASS
3	417.03	33.58	2.48	36.06	46.00	9.94	100	154	PK	Vertical	PASS
4	486.385	32.15	4.30	36.45	46.00	9.55	100	244	PK	Vertical	PASS
5	736.645	27.80	8.86	36.66	46.00	9.34	100	254	PK	Vertical	PASS
6	972.84	31.35	12.55	43.90	54.00	10.10	100	9	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: ADS-65HI-19A-1 24060F

Horizontal

Test Graph

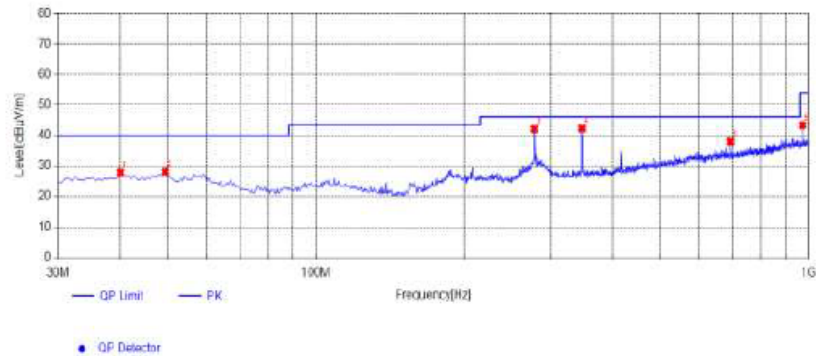

Suspected List


NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	40.185	33.17	-5.34	27.83	40.00	12.17	100	327	PK	Horizontal	PASS
2	49.4	32.75	-4.70	28.05	40.00	11.95	100	269	PK	Horizontal	PASS
3	277.835	43.55	-1.36	42.19	46.00	3.81	100	198	PK	Horizontal	PASS
4	347.19	41.83	0.60	42.43	46.00	3.57	100	198	PK	Horizontal	PASS
5	694.935	29.79	8.25	38.04	46.00	7.96	100	26	PK	Horizontal	PASS
6	973.325	30.82	12.55	43.37	54.00	10.63	100	148	PK	Horizontal	PASS

Note:1. Result (dBµV/m) = Reading(dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

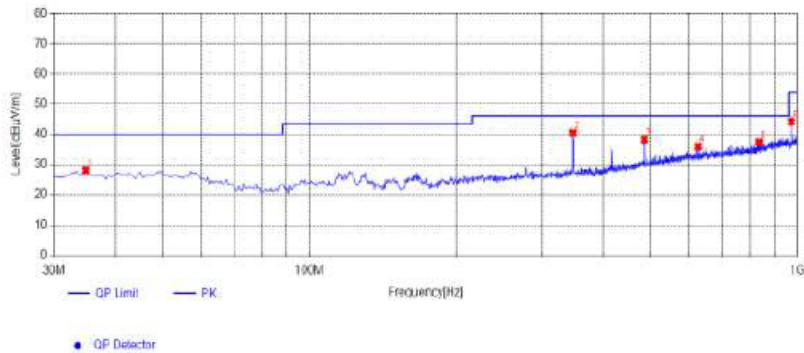

Suspected List

NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	34.85	33.87	-5.79	28.08	40.00	11.92	100	272	PK	Vertical	PASS
2	347.19	39.92	0.60	40.52	46.00	5.48	100	211	PK	Vertical	PASS
3	486.385	33.93	4.30	38.23	46.00	7.77	100	248	PK	Vertical	PASS
4	625.58	28.75	7.26	36.01	46.00	9.99	100	231	PK	Vertical	PASS
5	835.1	27.15	10.23	37.38	46.00	8.62	100	346	PK	Vertical	PASS
6	972.84	31.66	12.55	44.21	54.00	9.79	100	29	PK	Vertical	PASS

Note:1. Result (dBµV/m) = Reading(dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 25GHz

BT LE

Channel 0 / 2402 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	50.52	32.44	30.25	7.95	60.66	74.00	-13.34	Peak	Horizontal
4804.00	35.10	32.44	30.25	7.95	45.24	54.00	-8.76	Average	Horizontal
4804.00	54.36	32.44	30.25	7.95	64.50	74.00	-9.50	Peak	Vertical
4804.00	34.88	32.44	30.25	7.95	45.02	54.00	-8.98	Average	Vertical

Channel 19 / 2440 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.00	49.11	32.52	30.31	8.12	59.44	74.00	-14.56	Peak	Horizontal
4880.00	36.51	32.52	30.31	8.12	46.84	54.00	-7.16	Average	Horizontal
4880.00	52.69	32.52	30.31	8.12	63.02	74.00	-10.98	Peak	Vertical
4880.00	36.32	32.52	30.31	8.12	46.65	54.00	-7.35	Average	Vertical

Channel 39 / 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	50.98	32.68	30.27	7.88	61.27	74.00	-12.73	Peak	Horizontal
4960.00	35.63	32.68	30.27	7.88	45.92	54.00	-8.08	Average	Horizontal
4960.00	50.08	32.68	30.27	7.88	60.37	74.00	-13.63	Peak	Vertical
4960.00	31.70	32.68	30.27	7.88	41.99	54.00	-12.01	Average	Vertical


Notes:

- 1). Measuring frequencies from 9 KHz~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Measured= Reading- Pre. Fac.+ Ant. Fac.+ Cab. Loss
- 5). Margin = Measured- Limit

NOTE: All the modes have been tested and recorded worst mode in the report (Version A_Adapter: CYSE65-240250).

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 15.247 Measurement Guidance v05r02 Section 8.3.1 Maximum peak conducted output power, 8.3.1.3 The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.


TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.3.

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 3 kHz.
3. Set the VBW = 10 KHz.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8 dBm.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.4.

4.5. 99% and 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB 558074 D01 DTS Meas Guidance v05r02 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.1.


Please refer to Appendix B.2.

4.6. Conducted Spurious Emissions and Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

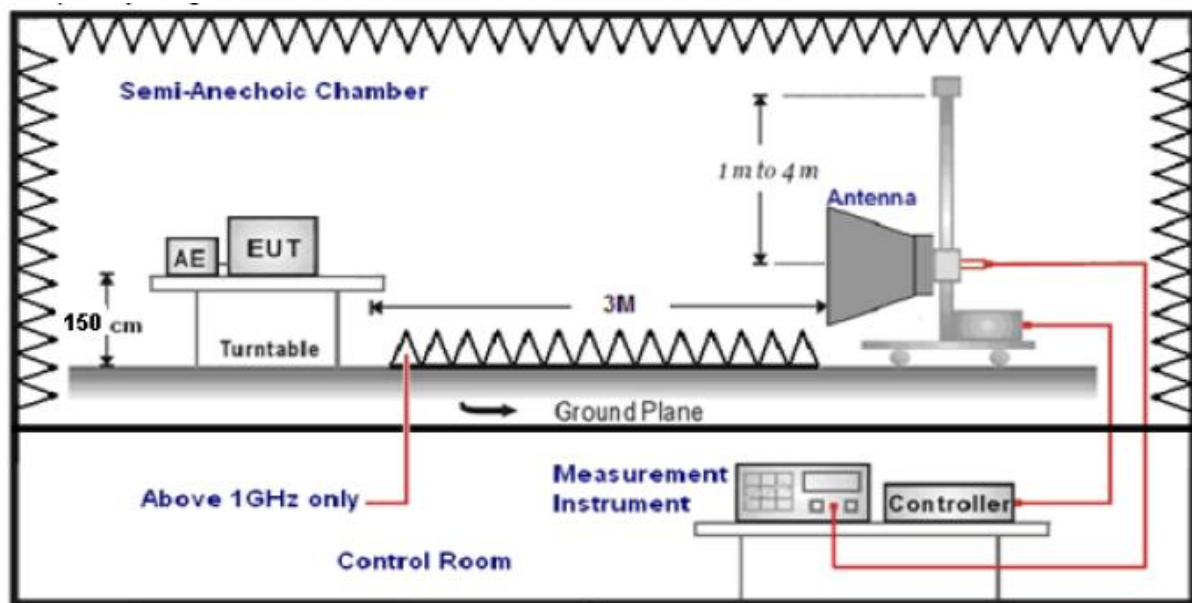

TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS**4.6.1 For Radiated Bandedge Measurement**

Temperature	23.8°C	Humidity	53.7%
Test Engineer	Evan Ouyang	Configurations	BT

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.26	PK	74.00	-27.74	1.50	59	51.57	27.49	3.32	36.12	-5.31
2390.00	35.28	AV	54.00	-18.72	1.50	59	40.59	27.49	3.32	36.12	-5.31
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	50.68	PK	74.00	-23.32	1.50	296	55.99	27.49	3.32	36.12	-5.31
2390.00	29.93	AV	54.00	-24.07	1.50	296	35.24	27.49	3.32	36.12	-5.31
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	46.58	PK	74.00	-27.42	1.50	178	52.30	27.45	3.38	36.55	-5.72
2483.50	33.36	AV	54.00	-20.64	1.50	178	39.08	27.45	3.38	36.55	-5.72
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	49.75	PK	74.00	-24.25	1.50	123	55.47	27.45	3.38	36.55	-5.72
2483.50	31.13	AV	54.00	-22.87	1.50	123	36.85	27.45	3.38	36.55	-5.72

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

NOTE: All the modes have been tested and recorded worst mode in the report (Version A_Adapter: CYSE65-240250).

4.6.2 For Conducted Bandedge Measurement

For reporting purpose only.

Please refer to Appendix B.5.

4.6.3 For Conducted Spurious Emissions Measurement

For reporting purpose only.

Please refer to Appendix B.6.

4.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The antenna used for this product is Internal Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.00dBi.

Reference to the Test Report: **GTS20231018011-1-85**.

5. TEST SETUP PHOTOS OF THE EUT

Reference to the Test Report: GTS20231018011-1-85.

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the Test Report: GTS20231018011-1-85.

.....End of Report.....