



FCC Test Report

Report No: FCS202011042W01

Issued for

Applicant:	PupPod Inc.
Address:	9727 NE Juanita Dr., #106, Kirkland, WA 98034 US
Product Name:	Puppod rocker with feeder
Brand Name:	Puppod
Model Name:	PupPod Rocker
Series Model:	N/A
FCC ID:	2AYEV-PUPPOD
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name.....: PupPod Inc.
Address.....: 9727 NE Juanita Dr., #106, Kirkland, WA 98034 US
Manufacture's Name.....: China Inspiration Ltd.
Address.....: Jiekou Industrial District, Changan, Dongguan, Guangdong, China

Product Description

Product Name.....: Puppod rocker with feeder
Brand Name: Puppod
Model Name.....: PupPod Rocker
Series Model.....: N/A
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 249
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: 18 Nov, 2020 ~ 07 Dec, 2020

Date of Issue.....: 07 Dec, 2020

Test Result.....: Pass

Tested by



(Scott Shen)

Reviewed by



(Duke Qian)

Approved by



(Kait Chen)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.4 EQUIPMENTS LIST	11
3 CONDUCTED EMISSION MEASUREMENT	
3.1 LIMIT	
3.2 TEST PROCEDURE	
3.3 TEST SETUP	
3.4 TEST RESULTS	
4. RADIATED EMISSION MEASUREMENT	12
4.1 LIMIT	12
4.2 TEST PROCEDURE	13
4.3 TEST SETUP	14
4.4 TEST RESULTS	15
5. BAND EDGE TEST	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	19
5.3 TEST SETUP	20
5.4 TEST RESULTS	21
6. 20 DB BANDWIDTH TEST	25
6.1 LIMIT	25
6.2 TEST PROCEDURE	25
6.3 TEST SETUP	25
6.4 TEST RESULTS	26
7. ANTENNA REQUIREMENT	28
7.1 STANDARD REQUIREMENT	28
7.2 EUT ANTENNA	28

Revision History

Rev.	Issue Date	Effect Page	Contents
00	07 Dec, 2020	All	Initial Issue

1. SUMMARY OF TEST RESULTS

FCC Part 15.249,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.205(a), 15.209(a), 15.249(a), 15.249(c)	Radiated Spurious Emission	PASS	--
15.209	Field strength of fundamental	PASS	
15.249(d)	Band Edge Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.98 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated(<1G) 30MHz-1000MHz	± 3.2 dB
6	All emissions, radiated (1GHz -18GHz)	± 3.66 dB
7	All emissions, radiated (18GHz -40GHz)	± 4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Puppod rocker with feeder
Trade Name	Puppod
Model Name	PupPod Rocker
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
BT	Frequency:2402-2480MHz Modulation: GFSK Data rate: 1Mbps Channel number: 40CH
Power Supply	D size battery x 2
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
...
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	NA	VYDH	Chip Antenna	N/A	1.0	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: FCC tool


The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model description
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note:

1. All the test modes can be supply by battery, only the result of the worst case recorded in the report. GFSK mode is worst mode.
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. The EUT used fully charge battery when tested.
4. During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

Configuration and peripherals

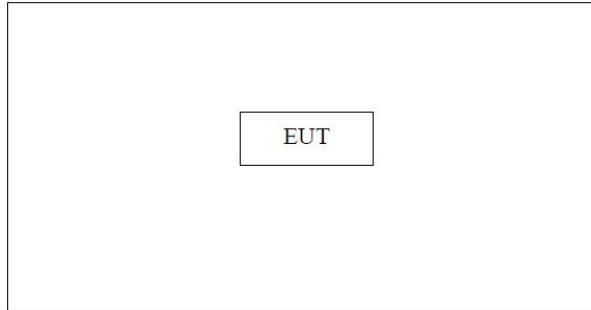

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2020. 06.26	2021. 06.25
Signal Analyzer	R&S	FSV40-N	FCS-E012	2020.06.05	2021.06.04
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2020.08.09	2021.08.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2020.08.26	2021.08.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2020.08.26	2021.08.25
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2020.06.26	2021.06.25
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2020.06.26	2021.06.25
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2020.06.03	2021.06.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2020.08.08	2021.08.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2020.08.26	2021.08.25

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2020.06.03	2021.06.02
LISN	R&S	ENV216	FCS-E007	2020.08.08	2021.08.07
LISN	ETS	3810/2NM	FCS-E009	2020.06.03	2021.06.02
Temperature & Humidity	HTC-1	victor	FCS-E008	2020.08.08	2021.08.07

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2020.06.03	2021.06.02
Spectrum Analyzer	Agilent	E4447A	MY50180039	2020.08.08	2021.08.07
Spectrum Analyzer	R&S	FSV-40	101499	2020.08.26	2021.08.25

3. RADIATED EMISSION MEASUREMENT

3.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
2400-2483.5	114	94

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz (Peak detector is for Both)

- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


For fundamental frequency ,RBW>20dB BW ,VBW>RBW,PK detector for PK value, RMS detector for AV value.

3.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

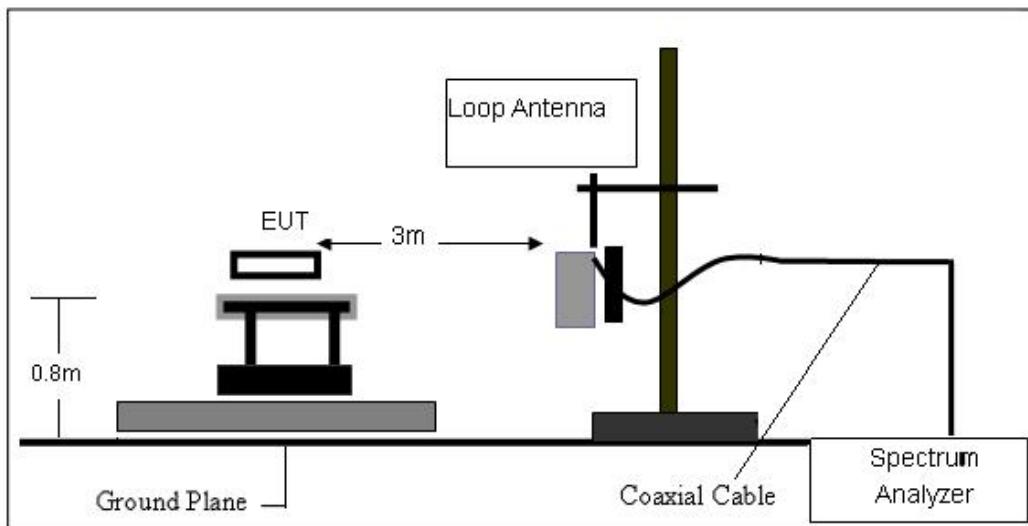

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

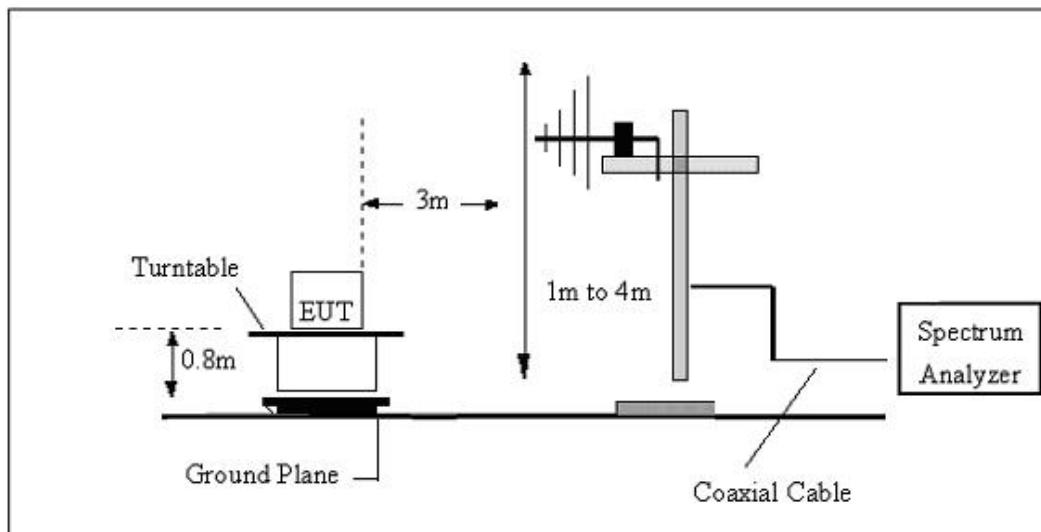

(C) Radiated Emission Test-Up Frequency Above 1GHz

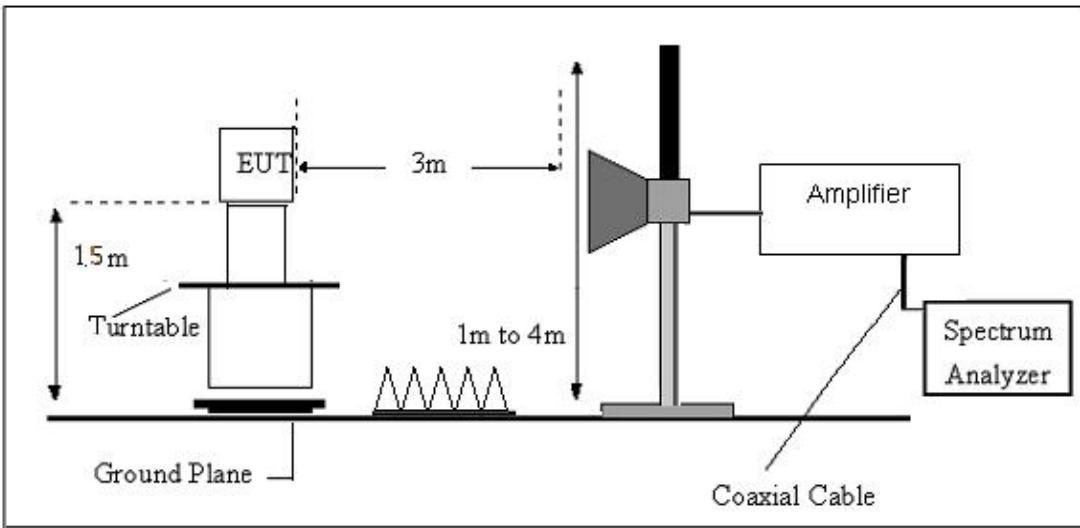

3.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	GFSK Mode	Test Voltage:	DC 3V

For field strength of the fundamental signal

Peak value

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	91.03	26.68	6.31	30.91	93.11	114	-20.89	Horizontal
2	2402	90.11	26.68	6.31	30.91	92.19	114	-21.81	Vertical
3	2440	91.04	26.38	6.43	30.68	93.18	114	-20.82	Horizontal
4	2440	90.66	26.38	6.43	30.68	92.79	114	-21.21	Vertical
5	2480	88.26	26.29	6.58	30.46	90.67	114	-23.33	Horizontal
6	2480	86.06	26.29	6.58	30.46	88.46	114	-25.54	Vertical

Average value

No.	Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	65.07	26.68	6.31	30.91	67.15	94	-26.85	Horizontal
2	2402	63.24	26.68	6.31	30.91	65.32	94	-28.58	Vertical
3	2440	62.06	26.38	6.43	30.68	67.19	94	-26.81	Horizontal
4	2440	66.36	26.38	6.43	30.68	68.49	94	-25.51	Vertical
5	2480	64.36	26.29	6.58	30.46	66.77	94	-27.23	Horizontal
6	2480	57.64	26.29	6.58	30.46	60.04	94	-33.96	Vertical

For spurious emission

(9KHz-30MHz)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.

(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 3V	Phase:	Horizontal
Test Mode:	GFSK		



No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	136.7000	35.38	-16.97	18.41	43.50	-25.09	QP
2	175.5000	38.92	-17.88	21.04	43.50	-22.46	QP
3	255.0400	46.80	-18.57	28.23	46.00	-17.77	QP
4	295.7800	44.17	-17.53	26.64	46.00	-19.36	QP
5	362.7100	45.99	-16.16	29.83	46.00	-16.17	QP
6	429.6400	37.14	-14.75	22.39	46.00	-23.61	QP

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3 V	Phase:	Vertical
Test Mode:	GFSK		



No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	74.6200	37.73	-20.22	17.51	40.00	-22.49	QP
2	146.4000	35.64	-16.40	19.24	43.50	-24.26	QP
3	244.3700	37.15	-18.83	18.32	46.00	-27.68	QP
4	284.1400	38.48	-17.87	20.61	46.00	-25.39	QP
5	312.2700	38.54	-17.22	21.32	46.00	-24.68	QP
6	362.7100	39.20	-16.25	22.95	46.00	-23.05	QP

Remarks:

1. Margin = Result (Result =Reading + Factor) - Limit

(1GHZ~25GHZ)

Frequency (MHz)	Read Level (dB μ V)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark	Comment
Low Channel (2402 MHz)-Above 1G									
4804.25	62.80	5.21	35.59	44.30	59.30	74.00	-14.70	Pk	Vertical
4804.25	40.94	5.21	35.59	44.30	37.44	54.00	-16.56	AV	Vertical
7206.02	60.10	6.48	36.27	44.60	58.25	74.00	-15.75	Pk	Vertical
7206.02	40.82	6.48	36.27	44.60	38.97	54.00	-15.03	AV	Vertical
4804.08	62.79	5.21	35.55	44.30	59.25	74.00	-14.75	Pk	Horizontal
4804.08	41.31	5.21	35.55	44.30	37.77	54.00	-16.23	AV	Horizontal
7206.12	60.83	6.48	36.27	44.52	59.06	74.00	-14.94	Pk	Horizontal
7206.12	40.27	6.48	36.27	44.52	38.50	54.00	-15.50	AV	Horizontal
Mid Channel (2440 MHz)-Above 1G									
4880.38	63.63	5.21	35.66	44.20	60.30	74.00	-13.70	Pk	Vertical
4880.38	43.94	5.21	35.66	44.20	40.61	54.00	-13.39	AV	Vertical
7320.18	64.24	7.10	36.50	44.43	63.41	74.00	-10.59	Pk	Vertical
7320.18	41.39	7.10	36.50	44.43	40.56	54.00	-13.44	AV	Vertical
4880.28	62.35	5.21	35.66	44.20	59.02	74.00	-14.98	Pk	Horizontal
4880.28	40.85	5.21	35.66	44.20	37.52	54.00	-16.48	AV	Horizontal
7320.14	60.32	7.10	36.50	44.43	59.49	74.00	-14.51	Pk	Horizontal
7320.14	43.22	7.10	36.50	44.43	42.39	54.00	-11.61	AV	Horizontal
High Channel (2480 MHz)- Above 1G									
4960.39	63.80	5.21	35.52	44.21	60.32	74.00	-13.68	Pk	Vertical
4960.39	41.47	5.21	35.52	44.21	37.99	54.00	-16.01	AV	Vertical
7440.04	63.77	7.10	36.53	44.60	62.80	74.00	-11.20	Pk	Vertical
7440.04	49.28	7.10	36.53	44.60	48.31	54.00	-5.69	AV	Vertical
4960.24	62.17	5.21	35.52	44.21	58.69	74.00	-15.31	Pk	Horizontal
4960.24	43.80	5.21	35.52	44.21	40.32	54.00	-13.68	AV	Horizontal
7440.11	64.75	7.10	36.53	44.60	63.78	74.00	-10.22	Pk	Horizontal
7440.11	45.36	7.10	36.53	44.60	44.39	54.00	-9.61	AV	Horizontal

Note:

- (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
- (2) All other emissions more than 20dB below the limit.

4. BAND EDGE TEST

4.1 LIMIT

According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

4.2 TEST PROCEDURE


- a. The EUT is placed on a turntable, which is 1.5m above ground plane.
- b. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
Use the following spectrum analyzer settings:
c. Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
- d. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with
- e. the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{duty cycle}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
Submit this data.

Note:

For fundamental frequency ,RBW>20dB BW ,VBW>RBW,PK detector for PK value, RMS detector for AV value.

4.3 TEST SETUP


Radiated Emission Test-Up Frequency Above 1GHz

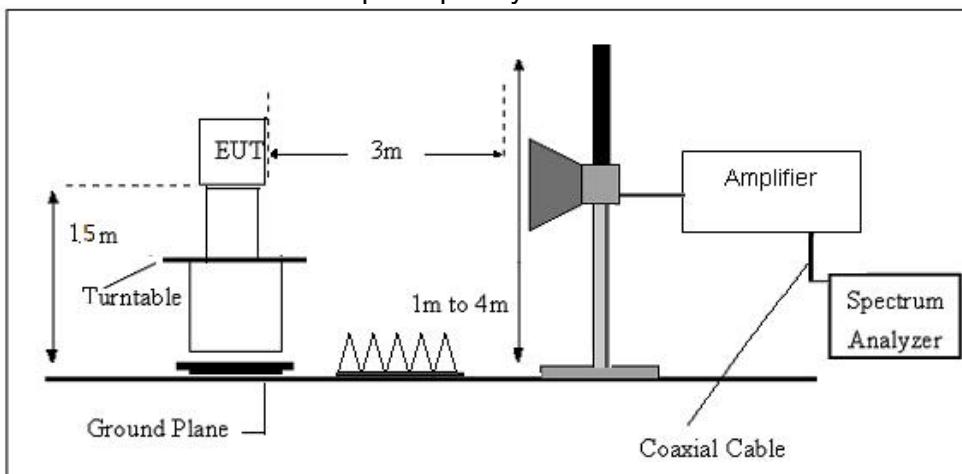

4.4 TEST RESULTS

Low CH (GFSK)

Horizontal

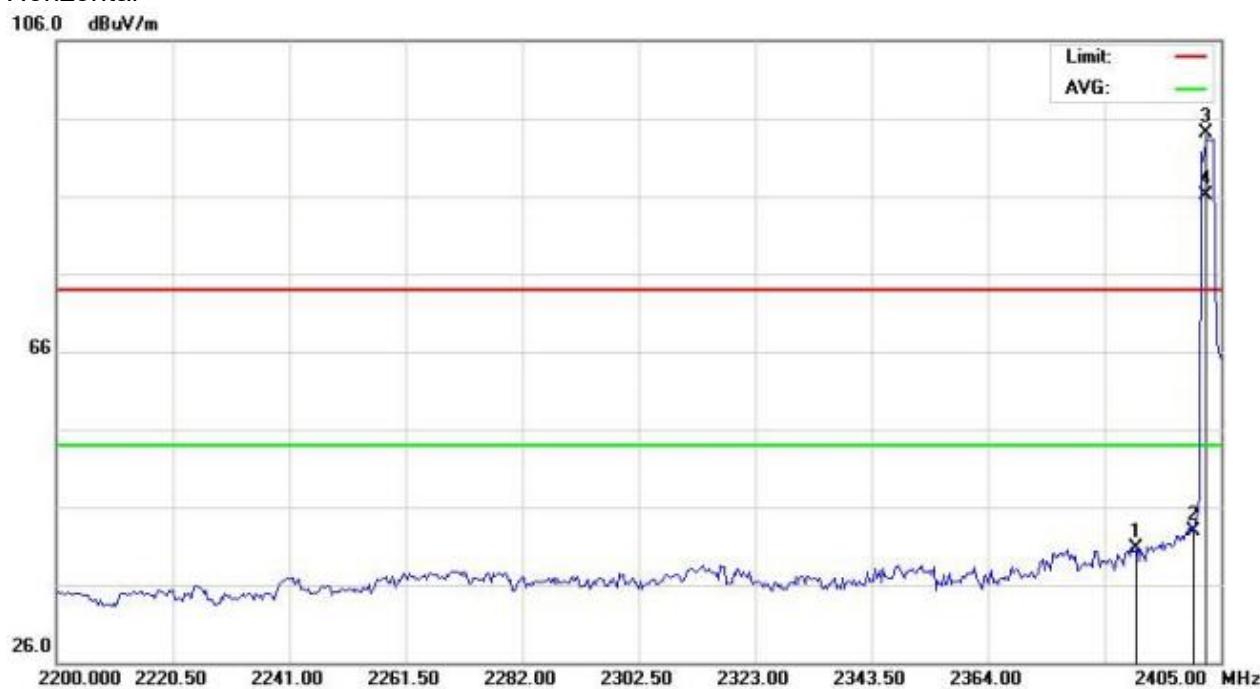

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2390.120	27.17	13.46	40.63	74.00	-33.37	peak	
2		2400.160	29.44	13.46	42.90	74.00	-31.10	peak	
3	X	2402.267	80.59	13.46	94.05	74.00	20.05	peak	
4	*	2402.267	72.63	13.46	86.09	54.00	32.09	AVG	

Vertical



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2390.560	25.19	13.46	38.65	74.00	-35.35	peak	
2		2400.340	29.44	13.46	42.90	74.00	-31.10	peak	
3	X	2402.267	79.59	13.46	93.05	74.00	19.05	peak	
4	*	2402.267	72.07	13.46	85.53	54.00	31.53	AVG	

High CH(GFSK)

Horizontal

106.0 dBuV/m



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	X	2480.200	83.83	14.11	97.94	74.00	23.94	peak	
2	*	2480.200	75.90	14.11	90.01	54.00	36.01	AVG	
3		2483.573	30.48	14.13	44.61	74.00	-29.39	peak	
4		2485.957	27.42	14.15	41.57	74.00	-32.43	peak	

Vertical

106.0 dBuV/m



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	X	2480.200	83.33	14.11	97.44	74.00	23.44	peak	
2	*	2480.200	75.06	14.11	89.17	54.00	35.17	AVG	
3		2483.353	28.32	14.13	42.45	74.00	-31.55	peak	
4		2486.030	24.58	14.15	38.73	74.00	-35.27	peak	

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

5. 20 DB BANDWIDTH TEST

5.1 LIMIT


According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

5.2 TEST PROCEDURE

Check the calibration of the measuring instrument using either an internal calibrator or a

- known signal from an external generator
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


5.3 TEST SETUP

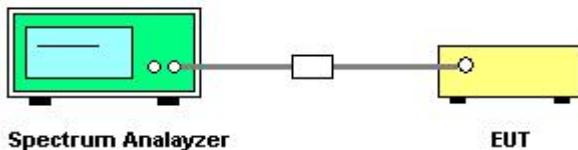

5.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 3V

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.079	PASS
2440 MHz	1.137	PASS
2480 MHz	1.095	PASS

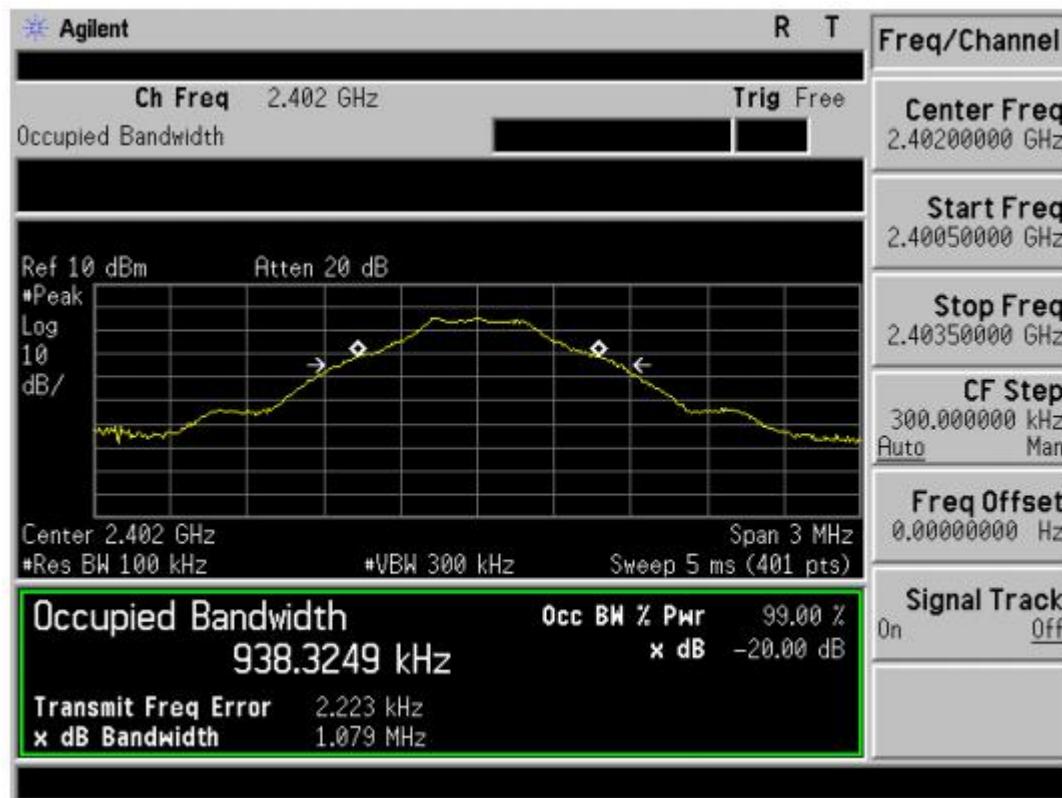



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The antennas used for this product are Chip antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

*****END OF THE REPORT*****