



Shenzhen Huatongwei International Inspection Co., Ltd.
Huatongwei 101, No.006, Keji south 12th Road, High-tech zone community, Yuehai Street,
Nanshan District, Shenzhen, Guangdong, China
Phone:86-755-26715499 E-mail: cs@szhtw.com.cn Website:http://www.szhtw.com.cn

TEST REPORT

For FCC Part15B



Report No.: CHTW24100055 Report verification:
Project No.: SHT2407073401W
FCC ID.....: 2AYEZ-MT-100
Applicant's name: Telo Communication (Shenzhen) Co., Ltd
Address.....: 13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Product Name: Smart LTE Terminal
Trade Mark: TELOX
Model No.: MT-100
Listed Model(s): MT-100L, MT-100M, MT-100X, MT-100P, MT-100K
Standard: FCC CFR Title 47 Part 15 Subpart B
Date of receipt of test sample.....: Aug. 15, 2024
Date of testing.....: Aug. 19, 2024- Aug. 29, 2024
Date of issue.....: Oct. 17, 2024
Result.....: Pass

Compiled by
(position+printed name+signature)....: File administrators Xiaodong Zhao

Xiaodong Zhao

Supervised by
(position+printed name+signature)....: Project Engineer Xiaodong Zhao

Xiaodong Zhao

Approved by
(position+printed name+signature)....: RF Manager Xu yang

Xu, Yang

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd.

Address.....: Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY.....</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Testing Laboratory Information	5
<u>4.</u>	<u>TEST CONFIGURATION.....</u>	<u>7</u>
4.1.	Descriptions of test mode	7
4.2.	Configuration of Tested System	7
4.3.	Support unit used in test configuration	8
4.4.	Environmental conditions	8
4.5.	Statement of the measurement uncertainty	8
4.6.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Conducted Emissions	10
5.2.	Radiated Emissions	13
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>18</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>19</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC CFR Title 47 Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2024-10-17	Original

2. TEST DESCRIPTION

Section	Test Item	Section in CFR 47	Result #1	Test Engineer
5.1	Conducted Emissions	15.107(a)	PASS	Yating Chen
5.2	Radiated Emissions	15.109(a)	PASS	Yifan Wang

Note:

#1: The test result does not include measurement uncertainty value

3. SUMMARY

3.1. Client Information

Applicant:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Manufacturer:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Factory:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China

3.2. Product Description

Main unit information:	
Product Name:	Smart LTE Terminal
Trade Mark:	TELOX
Model No.:	MT-100
Listed Model(s):	MT-100L, MT-100M, MT-100X, MT-100P, MT-100K
Power supply:	DC 3.87V from Battery
Hardware version:	V1.0
Software version:	MT100_US_V1P_20240531
Accessory unit information:	
Battery information:	3.87V 4000mAh 15.48Wh
	Model: TEB-4000T
	Limited Charge Voltage: 4.45V
Adapter information:	MODEL: MR-0502000US
	INPUT:100-240V~50/60Hz 0.3A
	OUTPUT:DC 5V 2.0A
	Shen zhen Mao Two Power Co., Ltd

3.3. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China
Connect information:	Tel: 86-755-26715499
	E-mail: cs@szhtw.com.cn

	http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION



4.1. Descriptions of test mode

Test mode	Description
Video Playing mode	Keep the EUT in Video Playing status
Data exchange mode	Keep the EUT in Data exchange with PC status

Pre-scan above all test mode, found below test mode which it was worse case mode, so only show the test data for worse case mode on the test report

Test Item	Test mode for worse case
Conducted Emissions	Video Playing mode
Radiated Emissions	Data exchange mode

4.2. Configuration of Tested System

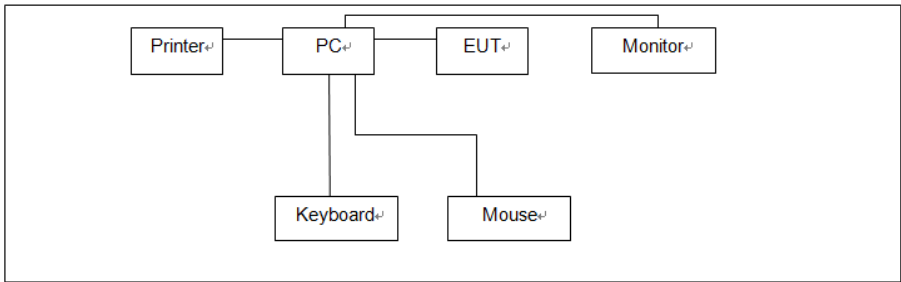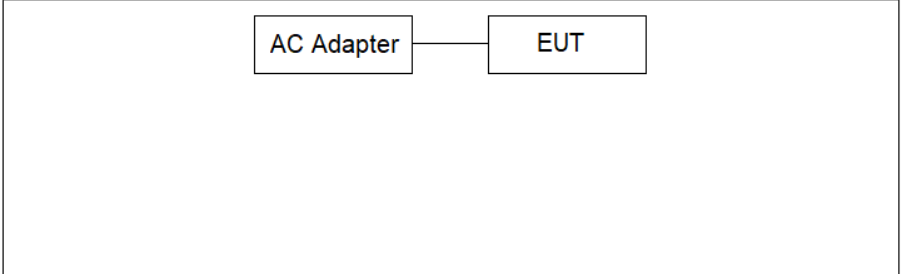Test mode	Configuration
Data exchange mode	
Other modes	

4.3. Support unit used in test configuration

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ Yes			
Item	Equipment	Trade Name	Model No.
1	PC	DELL	OptiPlex 3020 MT
2	Monitor	DELL	E1912Hf
3	Keyboard	DELL	SK8115
4	Mouse	DELL	MS111-T
5	Printer	EPSON	L101

4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.5. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Radiated Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.6. Equipments Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2024/08/12	2025/08/11
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2024/08/12	2025/08/11
●	Protection Network	SCHWARZBECK	HTWE0567	VTSD9561FN	00899	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0148	FCC-TLISN-T2-02	20371	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0150	FCC-TLISN-T8-02	20375	2024/08/12	2025/08/11
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission – 9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2024/04/08	2027/04/07
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission - 30MHz~1GHz 3M							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	/	2024/5/24	2025/5/23
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- Above 1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/04/17	2026/04/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2024/08/12	2025/08/11
●	Spectrum Analyzer	R&S	HTWE0385	N9020A	MY54486658	2024/08/12	2025/08/11
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/02/14	2026/02/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2024/06/06	2025/06/05
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2024/06/06	2025/06/05
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

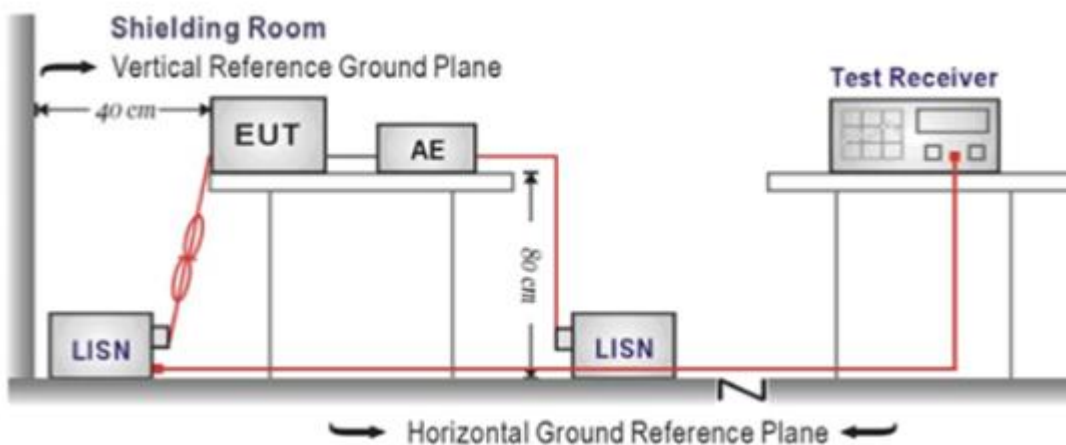

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:

L

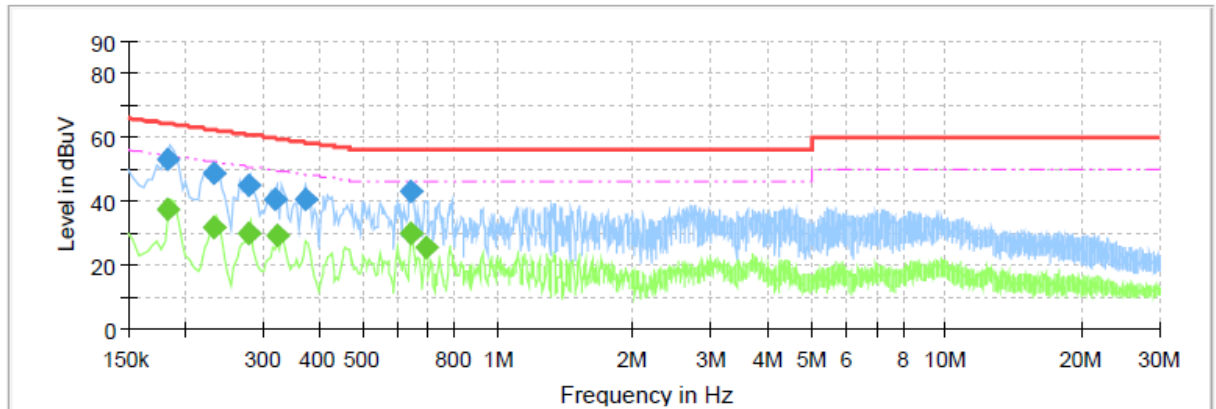


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1835	---	37.31	54.33	17.01	L1	10.9
0.1835	53.33	---	64.33	11.00	L1	10.9
0.2315	---	31.69	52.40	20.70	L1	10.9
0.2315	48.92	---	62.40	13.47	L1	10.9
0.2795	---	29.78	50.83	21.05	L1	10.9
0.2795	45.29	---	60.83	15.54	L1	10.9
0.3195	40.65	---	59.72	19.07	L1	10.9
0.3235	---	29.19	49.62	20.42	L1	10.9
0.3715	40.74	---	58.47	17.73	L1	10.9
0.6395	43.03	---	56.00	12.97	L1	11.0
0.6435	---	30.03	46.00	15.97	L1	11.0
0.6915	---	25.47	46.00	20.53	L1	11.0

Test Line:

N

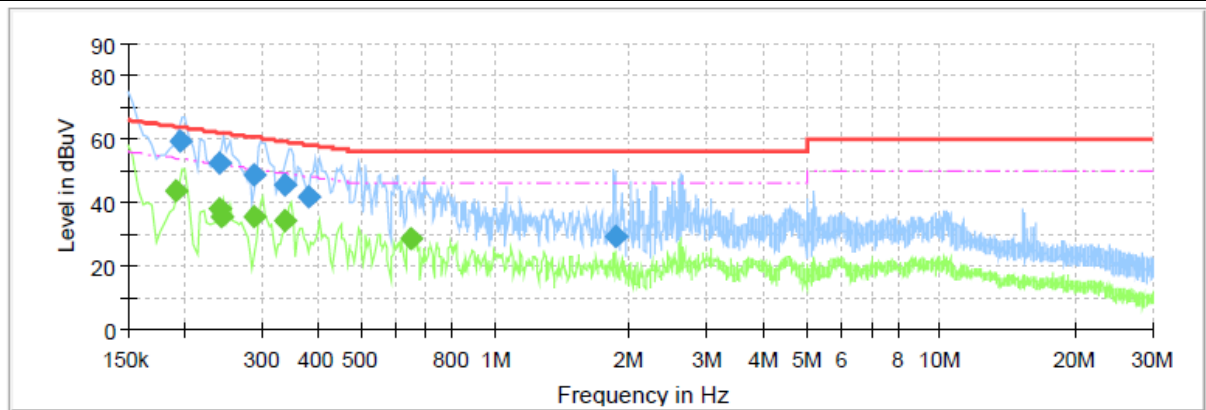

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1915	---	43.75	53.97	10.22	N	10.7
0.1955	59.31	---	63.80	4.49	N	10.7
0.2395	---	38.28	52.11	13.83	N	10.7
0.2395	52.64	---	62.11	9.48	N	10.7
0.2435	---	35.47	51.98	16.51	N	10.7
0.2875	48.88	---	60.60	11.72	N	10.7
0.2875	---	35.76	50.60	14.84	N	10.7
0.3355	45.82	---	59.31	13.50	N	10.7
0.3355	---	34.51	49.31	14.81	N	10.7
0.3795	41.61	---	58.29	16.68	N	10.7
0.6475	---	28.48	46.00	17.52	N	10.8
1.8635	29.32	---	56.00	26.68	N	10.8

5.2. Radiated Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

➤ 30MHz ~ 1GHz

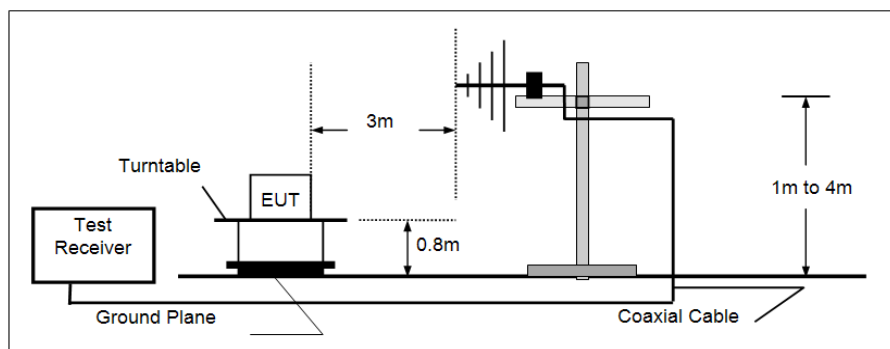

➤ Above 1GHz

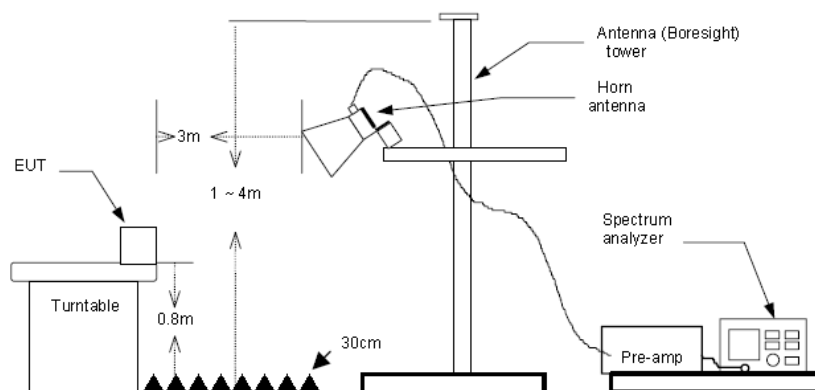

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz,
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**


Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
The emission levels of frequency above 6GHz are very lower than limit and not show in test report.

Polarization:


Horizontal

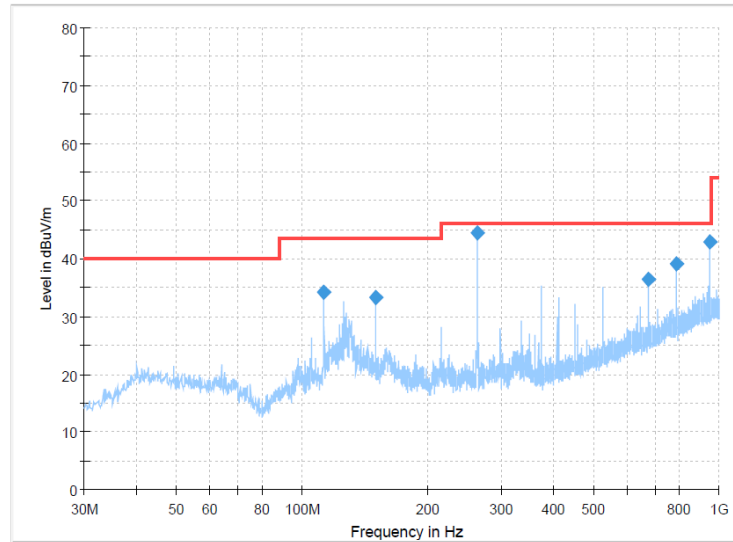**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
112.5713	34.22	43.50	9.28	300.0	H	101.0	-11.1
150.0375	33.22	43.50	10.28	100.0	H	151.0	-13.8
262.8000	44.38	46.00	1.62	100.0	H	81.0	-8.0
675.6563	36.47	46.00	9.53	100.0	H	209.0	2.4
788.2975	39.12	46.00	6.88	100.0	H	224.0	4.6
948.4688	42.87	46.00	3.13	300.0	H	346.0	7.5

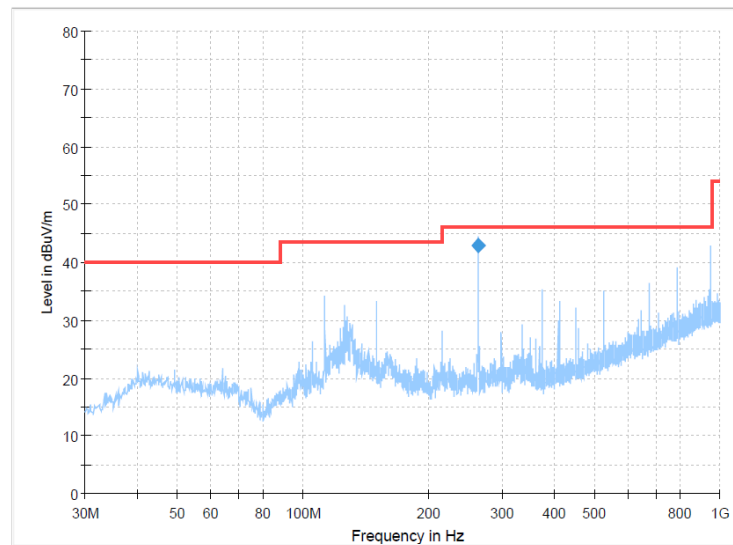**Final Result**

Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
262.7400	42.96	46.00	3.04	100.0	H	203.0	-8.0

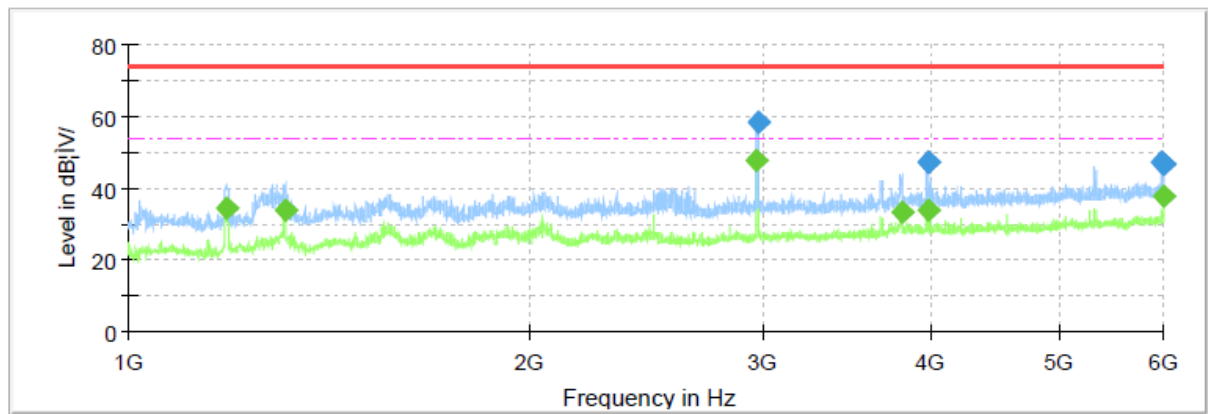


Final Result


Frequency (MHz)	MaxPeak (dB _i V/m)	Average (dB _i V/m)	Limit (dB _i V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1186.250000	---	34.26	54.00	19.74	150.0	H	247.0	-13.6
1311.250000	---	33.63	54.00	20.37	150.0	H	213.0	-12.6
2966.875000	---	47.82	54.00	6.18	150.0	H	224.0	-7.9
2975.625000	58.22	---	74.00	15.78	150.0	H	247.0	-7.9
3808.750000	---	33.45	54.00	20.55	150.0	H	347.0	-5.8
3988.750000	47.28	---	74.00	26.72	150.0	H	358.0	-5.1
3988.750000	---	33.83	54.00	20.17	150.0	H	358.0	-5.1
3992.500000	47.35	---	74.00	26.65	150.0	H	20.0	-5.1
5983.125000	46.97	---	74.00	27.03	150.0	H	0.0	-0.2
5993.125000	46.89	---	74.00	27.11	150.0	H	0.0	-0.1
5996.250000	46.88	---	74.00	27.12	150.0	H	0.0	-0.1
6000.000000	---	37.67	54.00	16.33	150.0	H	291.0	-0.1

Polarization:

Vertical

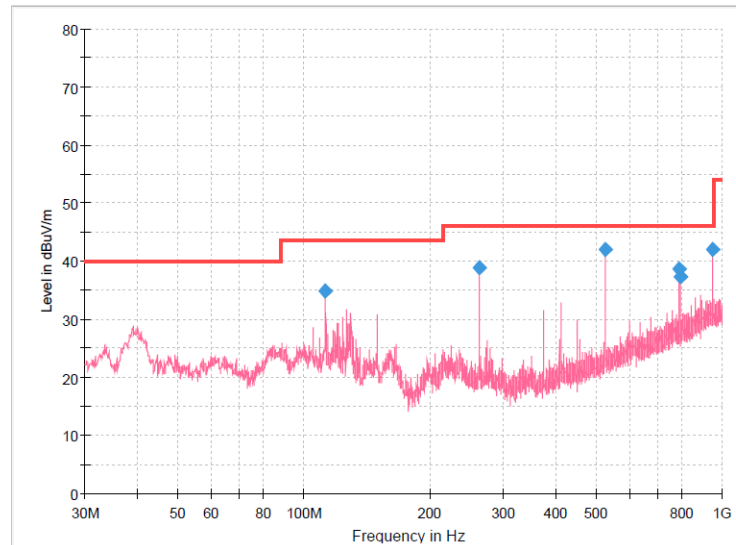**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
112.5713	34.80	43.50	8.70	100.0	V	68.0	-11.1
262.8000	38.99	46.00	7.01	100.0	V	0.0	-8.0
525.5488	41.98	46.00	4.02	100.0	V	84.0	-1.1
788.2975	38.62	46.00	7.38	100.0	V	192.0	4.6
796.0575	37.21	46.00	8.79	100.0	V	335.0	4.8
948.4688	41.94	46.00	4.06	100.0	V	235.0	7.5

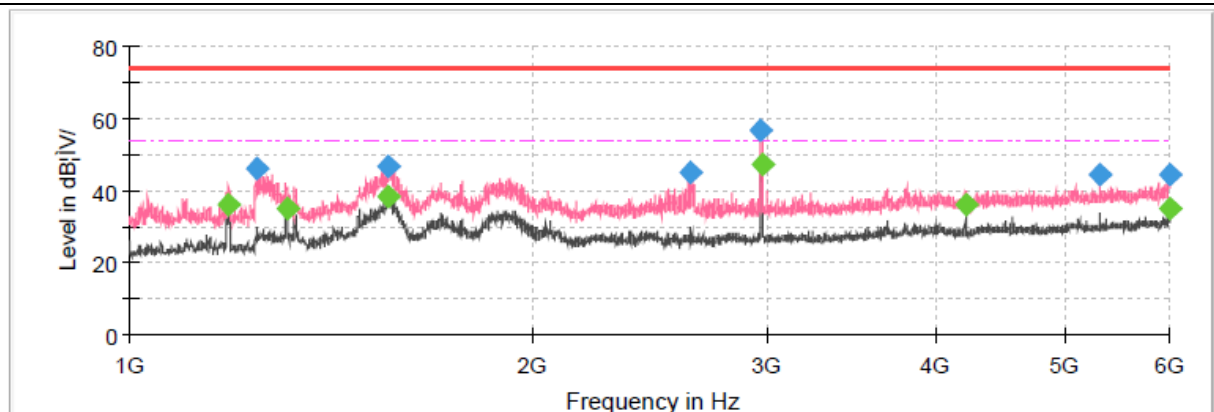**Final Result**

Frequency (MHz)	MaxPeak (dB _i V/m)	Average (dB _i V/m)	Limit (dB _i V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1185.625000	---	36.08	54.00	17.92	150.0	V	154.0	-13.6
1246.250000	45.87	---	74.00	28.13	150.0	V	165.0	-13.0
1311.875000	---	35.06	54.00	18.94	150.0	V	154.0	-12.6
1558.125000	---	38.16	54.00	15.84	150.0	V	131.0	-13.0
1560.625000	46.43	---	74.00	27.57	150.0	V	131.0	-13.0
2628.125000	45.20	---	74.00	28.80	150.0	V	234.0	-9.3
2966.875000	56.92	---	74.00	17.08	150.0	V	165.0	-7.9
2973.125000	---	47.49	54.00	6.51	150.0	V	246.0	-7.9
4217.500000	---	35.93	54.00	18.07	150.0	V	98.0	-4.7
5315.000000	44.63	---	74.00	29.37	150.0	V	271.0	-2.3
5995.625000	44.35	---	74.00	29.65	150.0	V	131.0	-0.1
6000.000000	---	34.91	54.00	19.09	150.0	V	143.0	-0.1

6. TEST SETUP PHOTOS OF THE EUT

Conducted Emissions (AC Mains)



Radiated Emissions (30MHz-1GHz)



Radiated Emissions (Above 1GHz)



7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refer to the test report No.: CHTW24100045

-----End of Report-----