

FCC

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
laptop

ISSUED TO
E&S International Enterprises, Inc.

7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

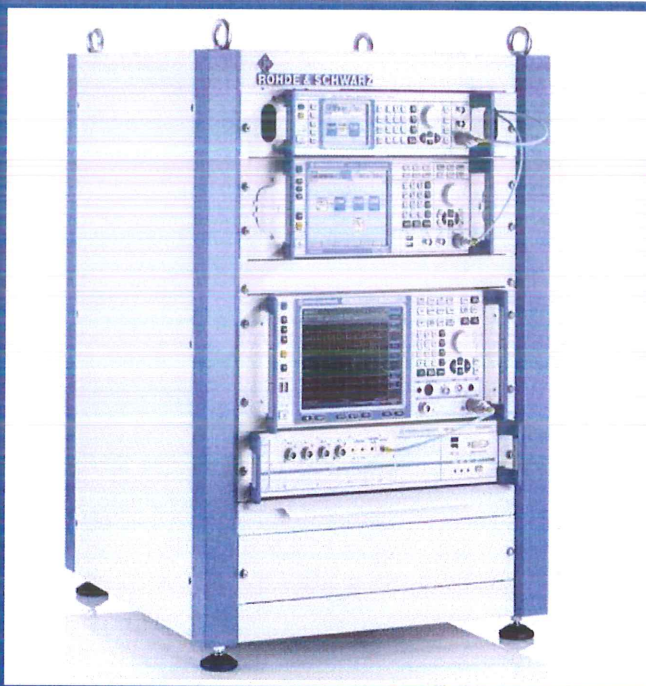

Tested by:
Ye Hongji

Date: Mar. 30, 2021

Approved by:
Wei Yanquan
(Chief Engineer)

Date: Mar. 30, 2021

Report No.: BL-SZ2130117-601

EUT Name: laptop

Model Name: GWTN156-9 (refer section 2.4)

Brand Name: Gateway

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2AYPE-GWTN156-TLK

Test conclusion: Pass

Test Date: Mar. 05, 2021 ~ Mar. 25, 2021

Date of Issue: Mar. 30, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Mar. 30, 2021</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Measurement Uncertainty	11
4.4	Description of Test Setup	12
4.4.1	For Antenna Port Test	12
4.4.2	For AC Power Supply Port Test	12
4.4.3	For Radiated Test (Below 30 MHz)	13
4.4.4	For Radiated Test (30 MHz-1 GHz)	13
4.4.5	For Radiated Test (Above 1 GHz)	14
4.5	Measurement Results Explanation Example	15
4.5.1	For conducted test items:	15
5	TEST ITEMS	16

5.1	Antenna Requirements.....	16
5.1.1	Relevant Standards.....	16
5.1.2	Antenna Anti-Replacement Construction	16
5.1.3	Antenna Gain	16
5.2	Frequency Hopping Systems	17
5.2.1	Relevant Standards.....	17
5.2.2	Description of the systems	17
5.3	Number of Hopping Frequencies	19
5.3.1	Limit.....	19
5.3.2	Test Setup.....	19
5.3.3	Test Procedure.....	19
5.3.4	Test Result	19
5.4	Peak Output Power and E.I.R.P.....	20
5.4.1	Test Limit.....	20
5.4.2	Test Setup.....	20
5.4.3	Test Procedure.....	20
5.4.4	Test Result	20
5.5	Occupied Bandwidth	21
5.5.1	Limit.....	21
5.5.2	Test Setup.....	21
5.5.3	Test Procedure.....	21
5.5.4	Test Result	21
5.6	Carrier Frequency Separation	22
5.6.1	Limit.....	22
5.6.2	Test Setup.....	22
5.6.3	Test Procedure.....	22
5.6.4	Test Result	22
5.7	Time of Occupancy (Dwell time)	23
5.7.1	Limit.....	23
5.7.2	Test Setup.....	23
5.7.3	Test Procedure.....	23
5.7.4	Test Result	24
5.8	Conducted Spurious Emission & Authorized-band band-edge	25

5.8.1	Limit.....	25
5.8.2	Test Setup	25
5.8.3	Test Procedure	25
5.8.4	Test Result	25
5.9	Conducted Emission	26
5.9.1	Limit.....	26
5.9.2	Test Setup	26
5.9.3	Test Procedure	26
5.9.4	Test Result	26
5.10	Radiated Spurious Emission	27
5.10.1	Limit.....	27
5.10.2	Test Setup	27
5.10.3	Test Procedure	27
5.10.4	Test Result	28
5.11	Band Edge (Restricted-band band-edge).....	29
5.11.1	Limit.....	29
5.11.2	Test Setup	29
5.11.3	Test Procedure	29
5.11.4	Test Result	29
ANNEX A	TEST RESULT	30
A.1	Number of Hopping Frequency	30
A.2	Peak Output Power	31
A.3	20 dB and 99% bandwidth	34
A.4	Hopping Frequency Separation.....	39
A.5	Average Time of Occupancy	40
A.6	Conducted Spurious Emissions & Authorized-band band-edge	43
A.7	Conducted Emissions.....	50
A.8	Radiated Spurious Emission	52
A.9	Band Edge (Restricted-band band-edge).....	70
ANNEX B	TEST SETUP PHOTOS	75
ANNEX C	EUT EXTERNAL PHOTOS	75
ANNEX D	EUT INTERNAL PHOTOS	75

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

2.2 Manufacturer Information

Manufacturer	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

2.3 Factory Information

Factory	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

2.4 General Description for Equipment under Test (EUT)

EUT Name	laptop
Model Name Under Test	GWTN156-9
Series Model Name	GWTN156-7, GWTN156-9BK, GWTN156-9BL, GWTN156-9RG, GWTN156-9GR, GWTN156-9SL, GWTN156-7BK, GWTN156-7BL, GWTN156-7RG, GWTN156-7GR, GWTN156-7SL, GWTN156-7PR
Description of Model name differentiation	Refer to the configuration table.
Serial Number	N/A
Hardware Version	N14TRB110
Software Version	20H2
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

Configuration Table:

Key parts	Configuration 1	Configuration 2
Model Name	GWTN156-9	GWTN156-7
Main board	The same	The same
CPU	I5-1135G7	I3-1115G4
eMMC	512 GB	256 GB
Memory	16 GB	8 GB

Note: GWTN156-9 and GWTN156-7 are color differences with BK, BL, RG, GR, SL.

Antenna Information:

Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)		
			2.4 GHz	5.15-5.25 GHz	5.725-5.85 GHz
N15TS9	kenhaitong	PIFA	2.25	2.53	2.98
W1576T	Xing Yuan Chuang	PIFA	1.21	1.60	2.09

Note: The report only shown the antenna which matches the antenna with the highest antenna gain.

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac U-NII-1/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	2.25 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.6 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	DRTU		
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	12-16
	CH39	2441	12-16
	CH78	2480	12-16
2DH5	CH0	2402	8-16
	CH39	2441	8-16
	CH78	2480	8-16
3DH5	CH0	2402	8-16
	CH39	2441	8-16
	CH78	2480	6-16

Run Software:

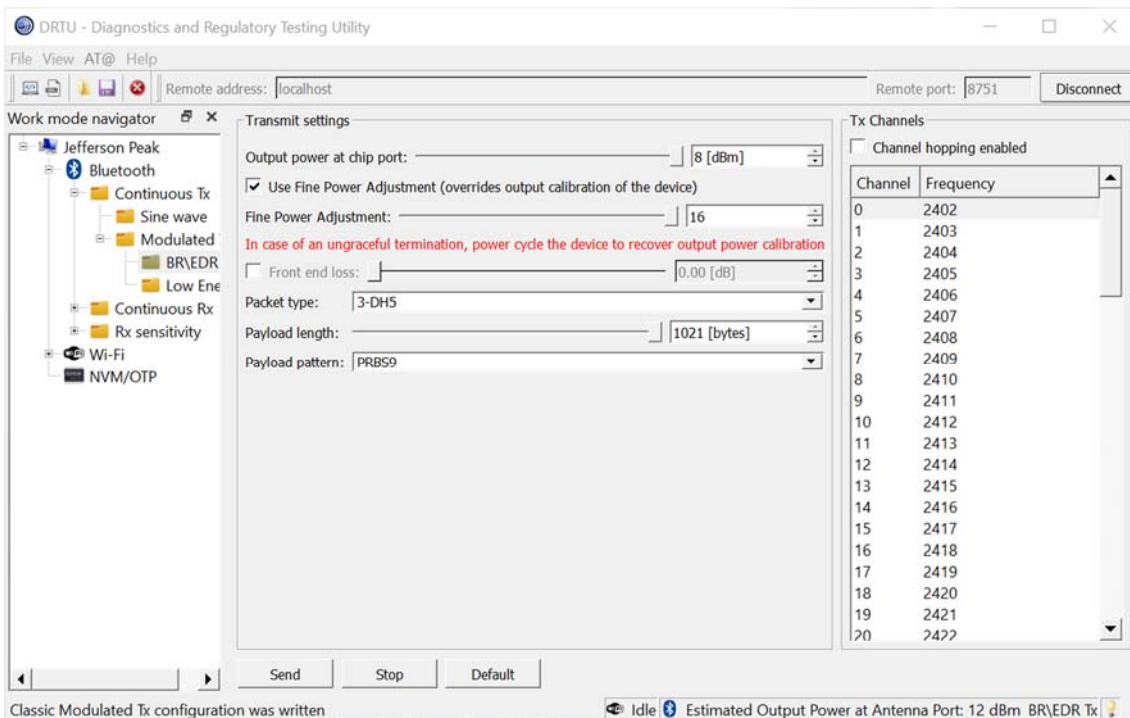

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	120 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW270	100607	2020.06.08	2021.06.07
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2021.02.18	2022.02.17
Power Amplifier	OPHIR RF	5273F	1016	2021.02.18	2022.02.17
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2020.10.23	2021.10.22
Ear Simulator	B&K	4192-L-001	3038758	2021.02.18	2022.02.17

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Audio analyzer	B&K	UPL 16	100129	2021.02.27	2022.02.26

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

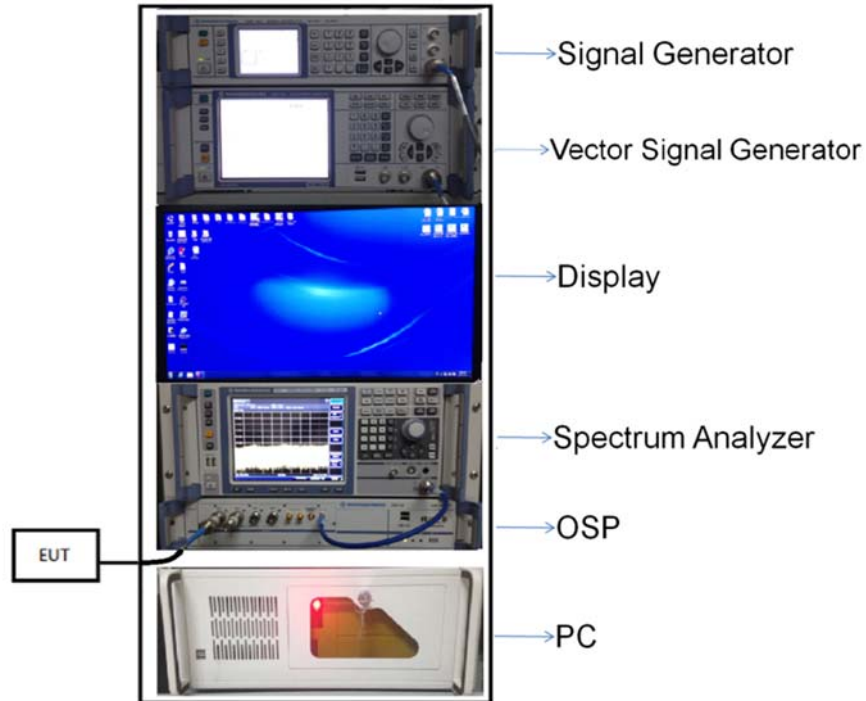


(Diagram 1)

4.4.2 For AC Power Supply Port Test

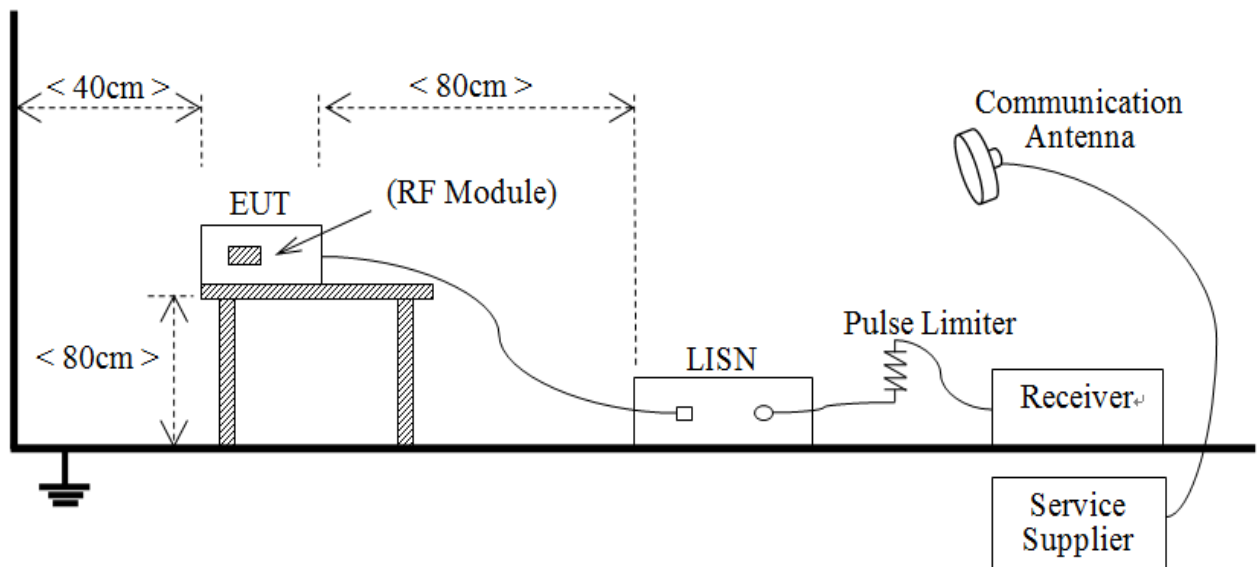


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

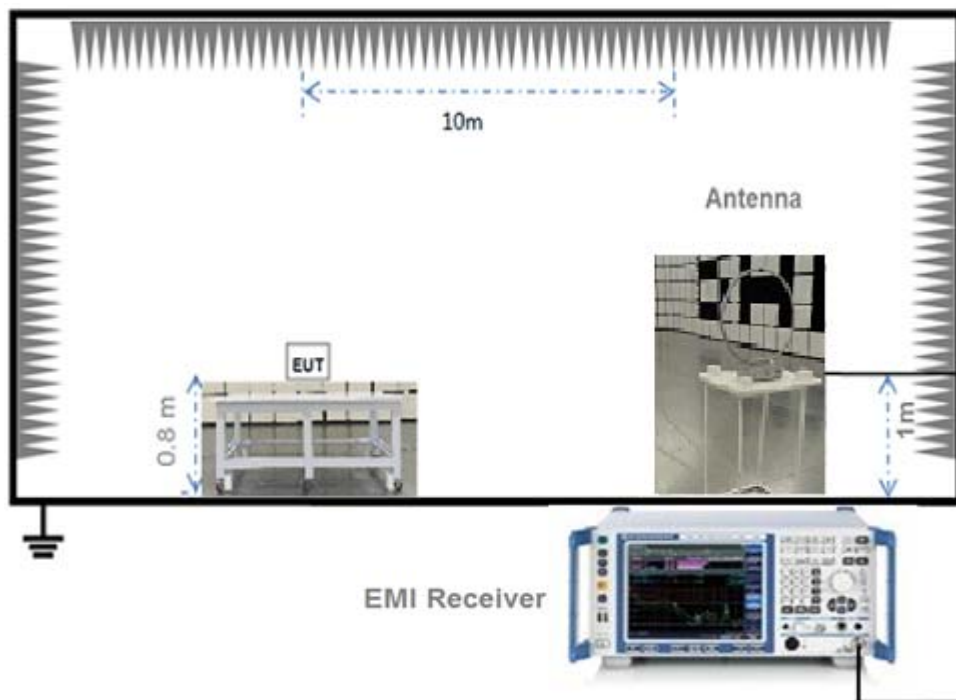


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

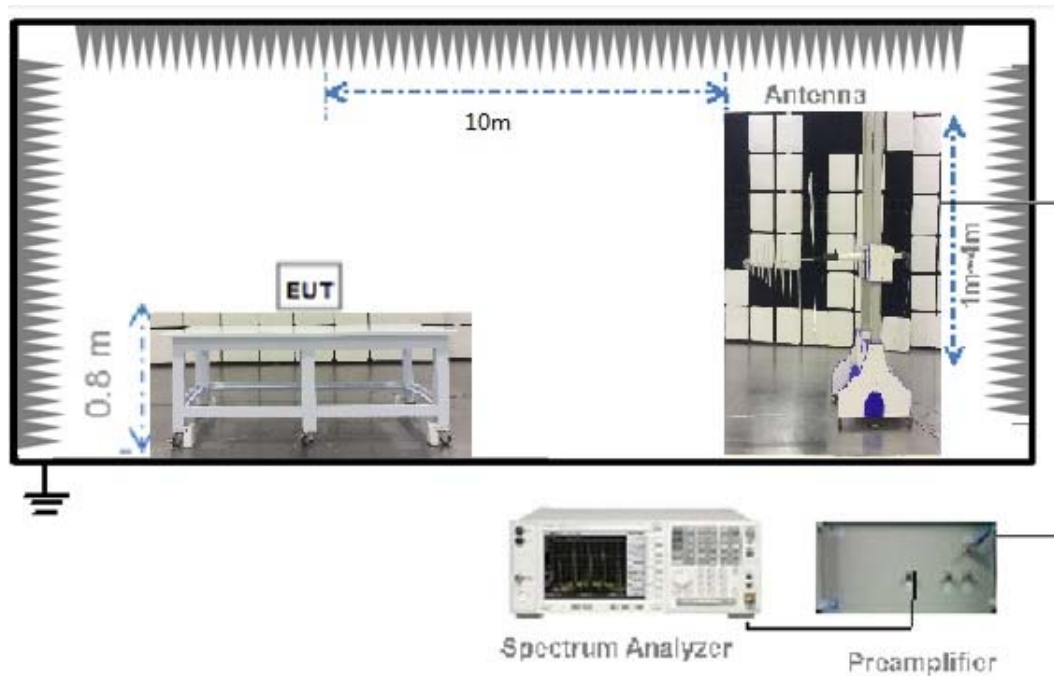

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

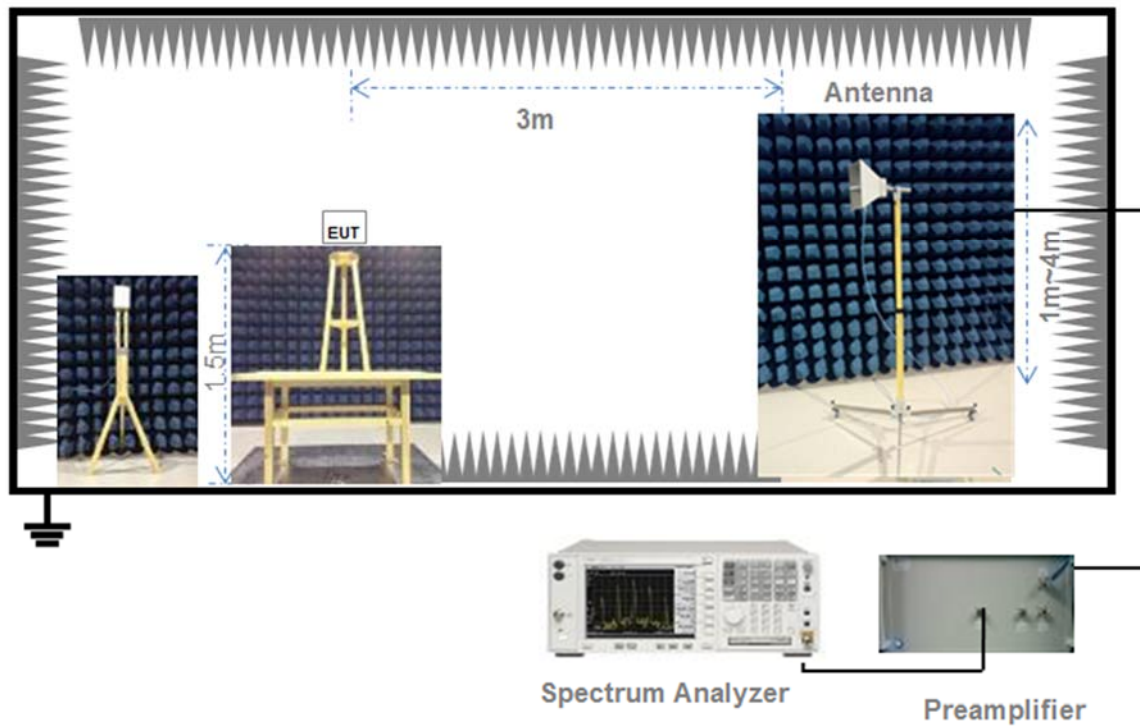

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

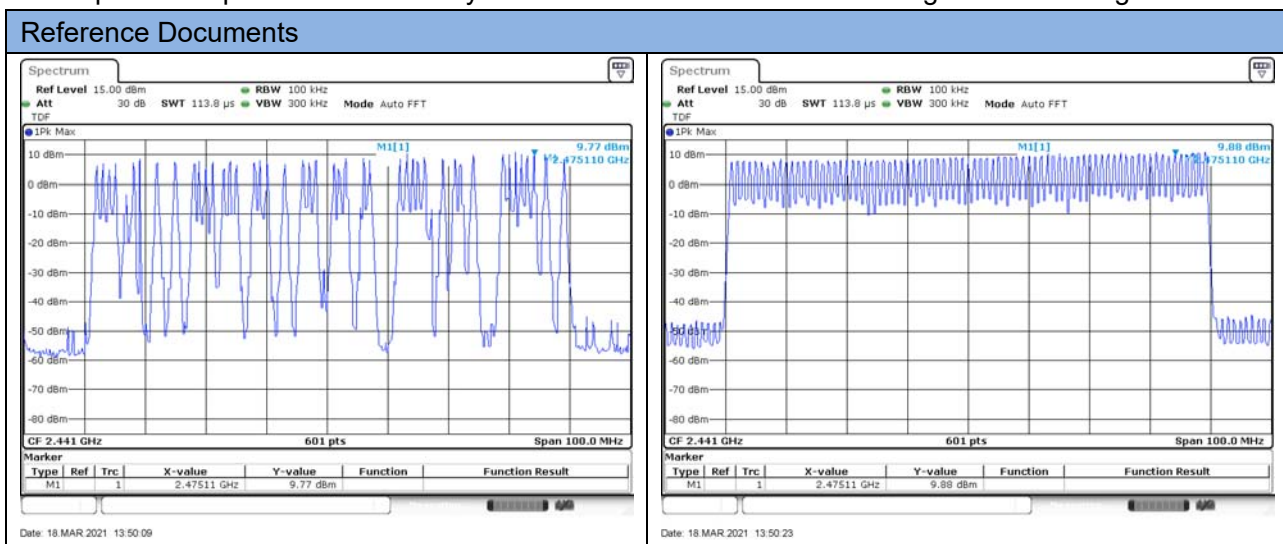

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power and E.I.R.P

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass


Test plots

GFSK 2.4 GHz ~ 2.4415 GHz

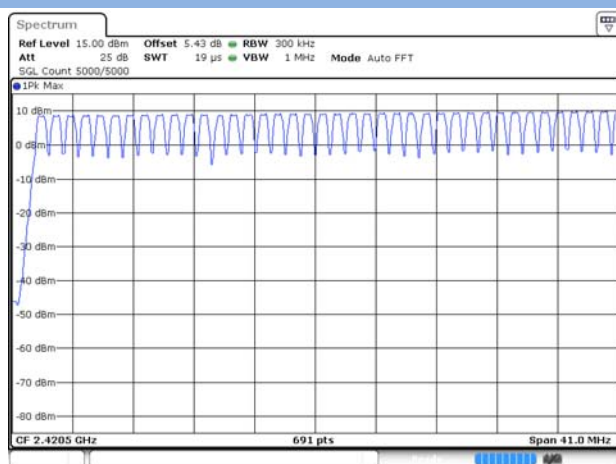


Date: 6 MAR 2021 03:19:12

GFSK 2.4415 GHz ~ 2.4835 GHz

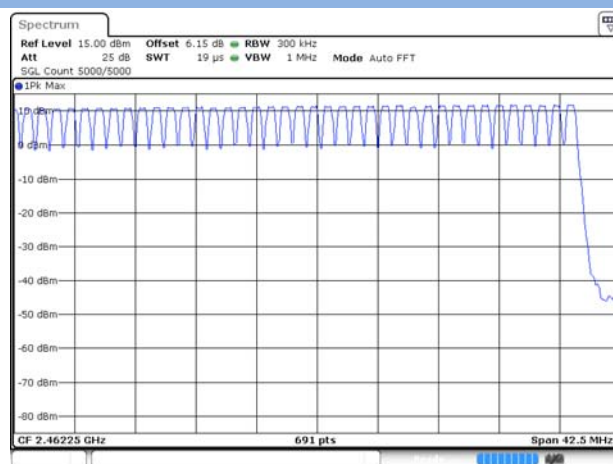


Date: 6 MAR 2021 03:19:41

8-DPSK 2.4 GHz ~ 2.4415 GHz

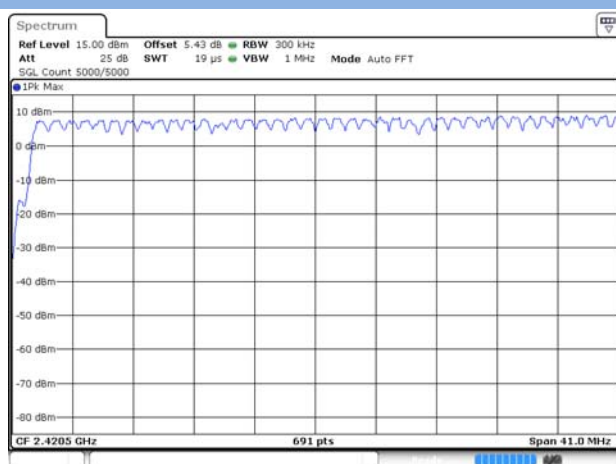

Date: 6 MAR 2021 03:26:16

8-DPSK 2.4415 GHz ~ 2.4835 GHz

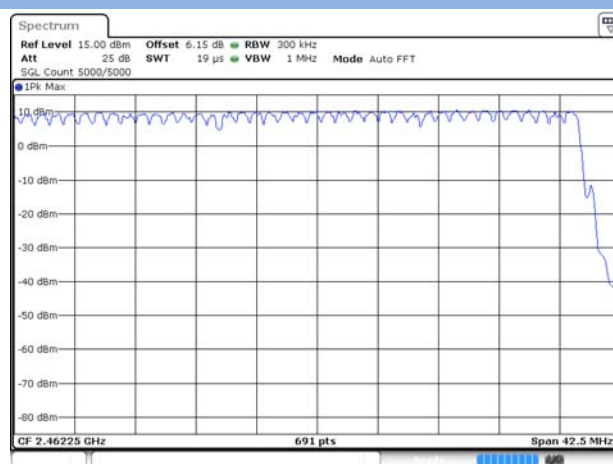

Date: 6 MAR 2021 03:26:46

A.2 Peak Output Power


Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	8.99	7.93	21	125	Pass
Middle	10.60	11.48			Pass
High	12.11	16.26			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	8.96	7.87	8.96	7.87	21	125	Pass
Middle	10.31	10.74	10.32	10.76			Pass
High	11.73	14.89	11.01	12.62			Pass


Test plots

GFSK LOW CHANNEL

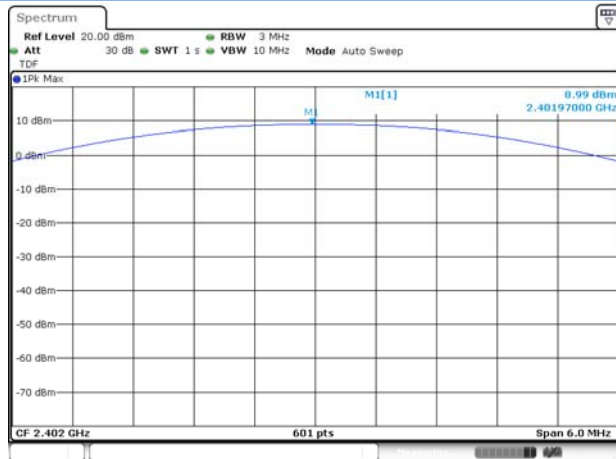


Date: 6 MAR 2021 02:50:44

GFSK MIDDLE CHANNEL

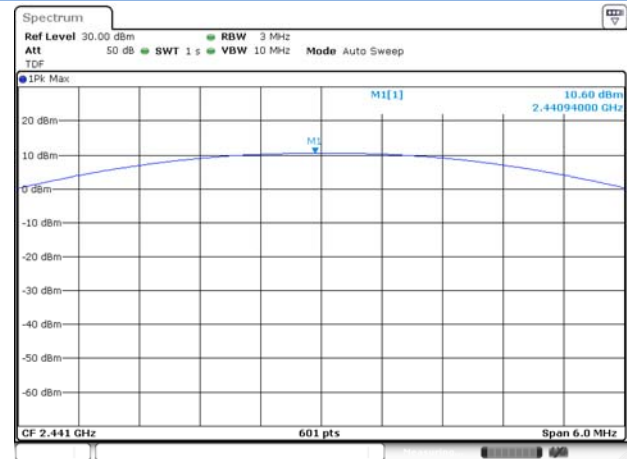


Date: 6 MAR 2021 02:53:35

GFSK HIGH CHANNEL

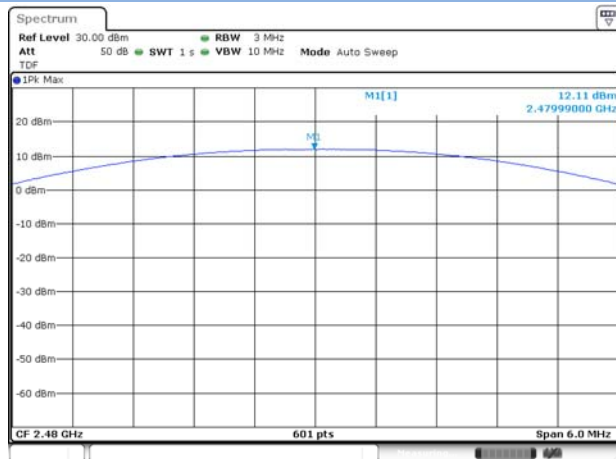


Date: 6 MAR 2021 02:55:55

$\pi/4$ -DQPSK LOW CHANNEL

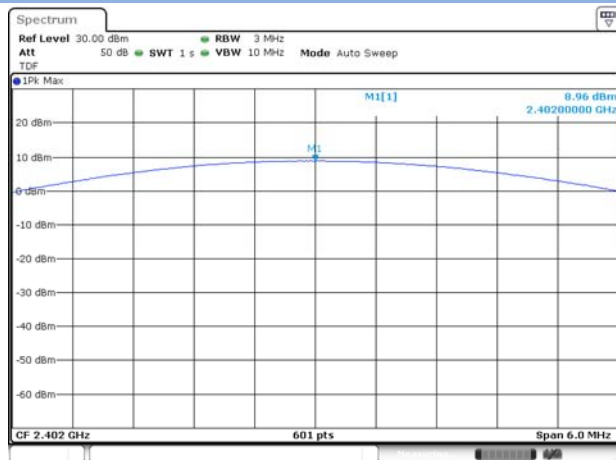


Date: 6 MAR 2021 03:00:55

$\pi/4$ -DQPSK MIDDLE CHANNEL

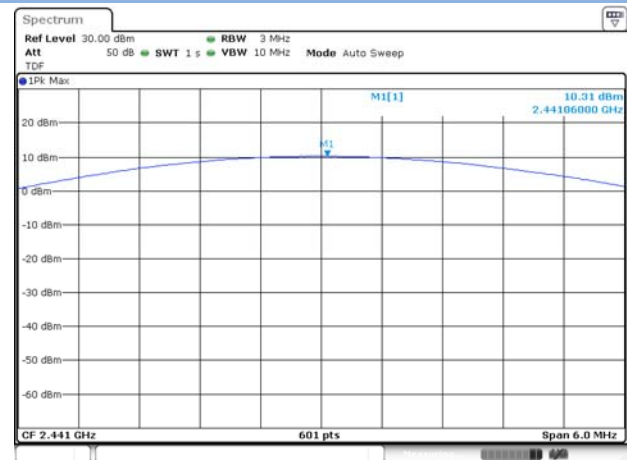


Date: 6 MAR 2021 03:03:55

$\pi/4$ -DQPSK HIGH CHANNEL

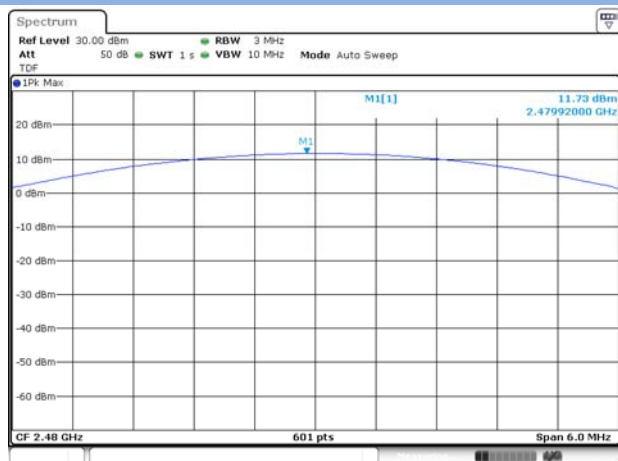


Date: 6 MAR 2021 03:06:00

8-DPSK LOW CHANNEL

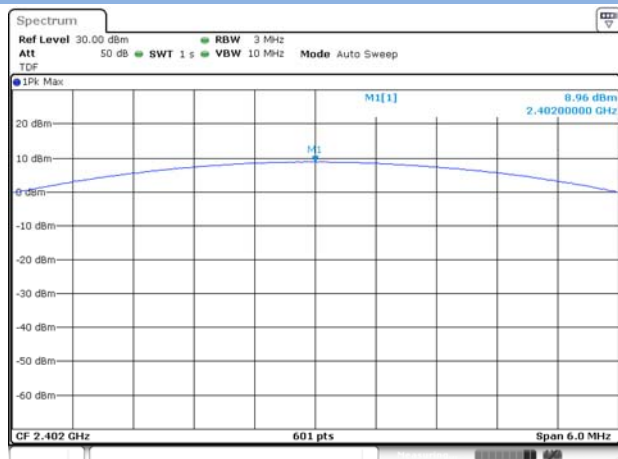


Date: 6 MAR 2021 03:09:14

8-DPSK MIDDLE CHANNEL

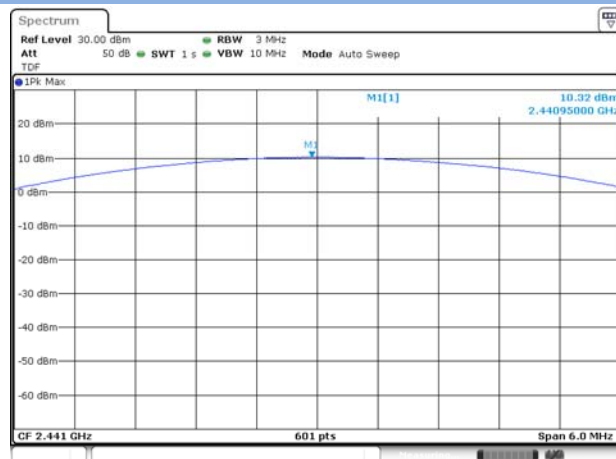

Date: 6 MAR 2021 03:12:13

8-DPSK HIGH CHANNEL

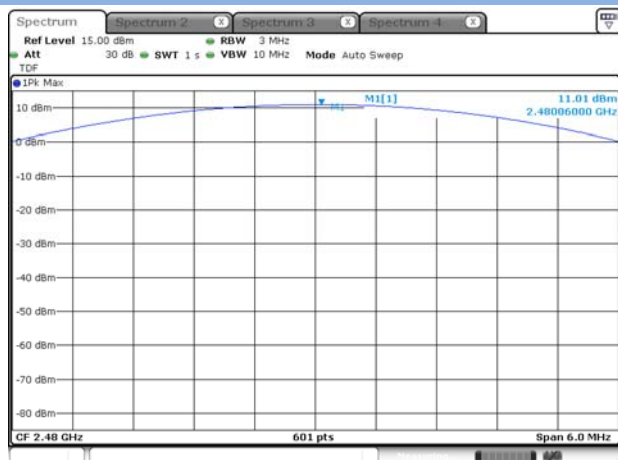

Date: 22 MAR 2021 15:04:37

A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.960937	0.872648
Middle	0.960937	0.881331
High	0.960937	0.881331
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.439209	1.506512
Middle	1.443604	1.497829
High	1.465332	1.376266
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.460937	1.502171
Middle	1.460937	1.502171
High	1.465332	1.354559

Test plots


20 dB Bandwidth

GFSK LOW CHANNEL

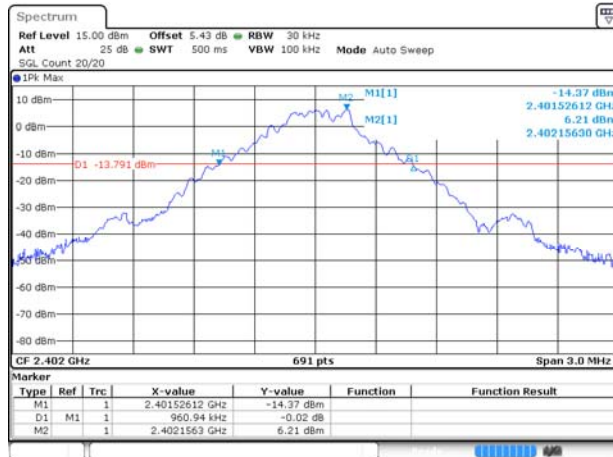


Date: 6 MAR 2021 02:51:00

GFSK MIDDLE CHANNEL

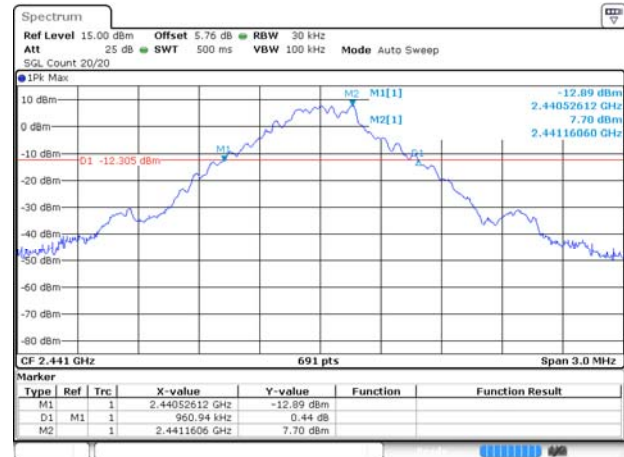

Date: 6 MAR 2021 02:53:51

GFSK HIGH CHANNEL

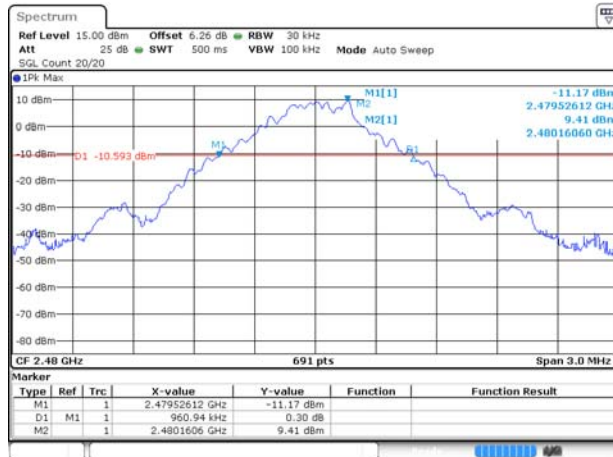

Date: 6 MAR 2021 02:56:11

$\pi/4$ -DQPSK LOW CHANNEL



Date: 6 MAR 2021 03:01:11

$\pi/4$ -DQPSK MIDDLE CHANNEL




Date: 6 MAR 2021 03:04:10

$\pi/4$ -DQPSK HIGH CHANNEL



Date: 6 MAR 2021 03:06:16

8-DPSK LOW CHANNEL

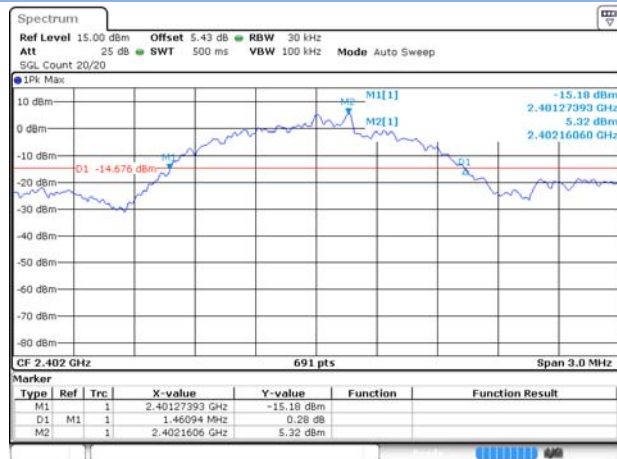


Date: 6 MAR 2021 03:09:30

8-DPSK MIDDLE CHANNEL



Date: 6 MAR 2021 03:12:29

8-DPSK HIGH CHANNEL

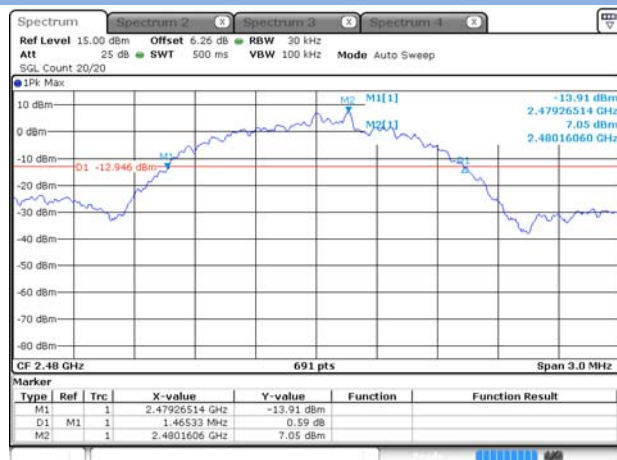

Date: 22 MAR 2021 15:04:52

99% Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



Date: 6 MAR 2021 03:06:32

8-DPSK LOW CHANNEL




Date: 6 MAR 2021 03:09:46

8-DPSK MIDDLE CHANNEL



Date: 6 MAR 2021 03:12:45

8-DPSK HIGH CHANNEL

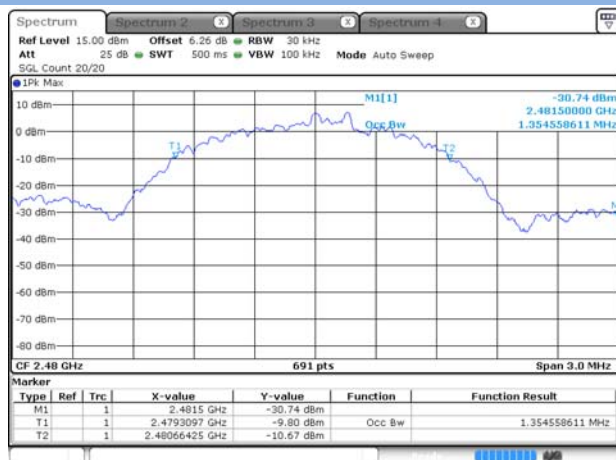

Date: 22 MAR 2021 15:05:08


A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.0033	0.640625	Pass
8-DPSK	1.0033	0.976888	Pass


Test Plots

GFSK

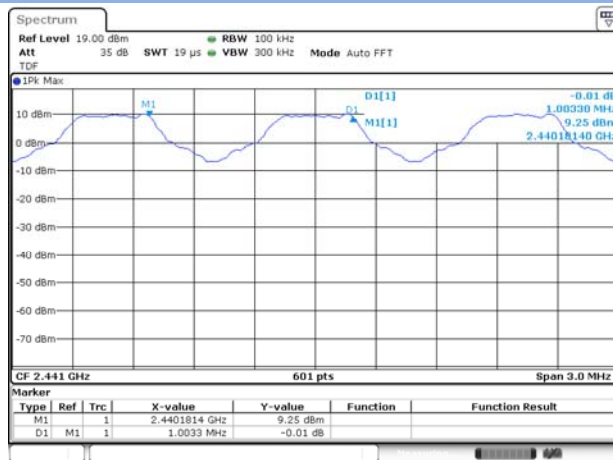

Date: 6 MAR 2021 03:20:18

8-DPSK

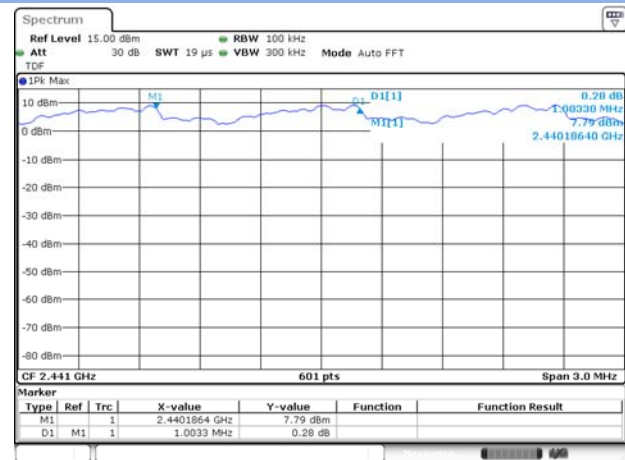

Date: 6 MAR 2021 03:28:34


A.5 Average Time of Occupancy

Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38127	122.006	0.4	Pass
DH 3	1.63683	261.893	0.4	Pass
DH 5	2.89130	308.405	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38793	124.138	0.4	Pass
DH 3	1.63883	262.213	0.4	Pass
DH 5	2.88700	307.947	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37852	60.563	0.4	Pass
DH 3	1.63457	130.766	0.4	Pass
DH 5	2.89700	154.507	0.4	Pass


Test Plots

GFSK DH1

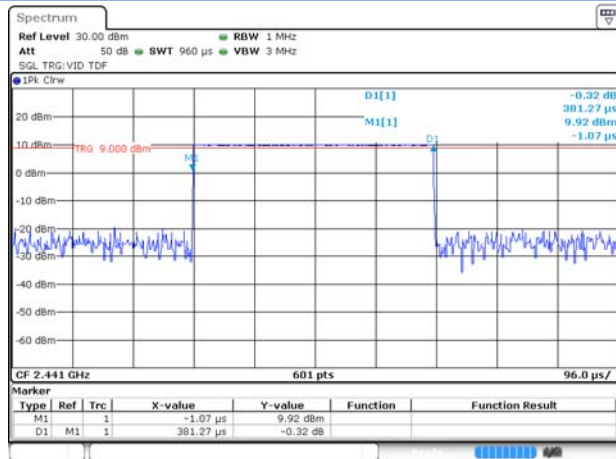


Date: 6 MAR 2021 03:33:08

GFSK DH3

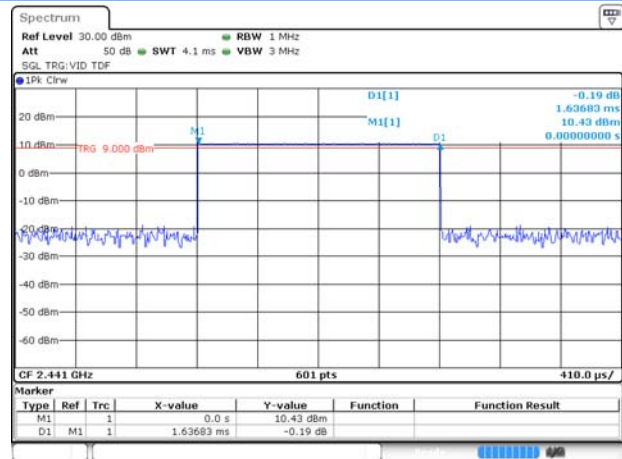


Date: 6 MAR 2021 03:34:21

GFSK DH5

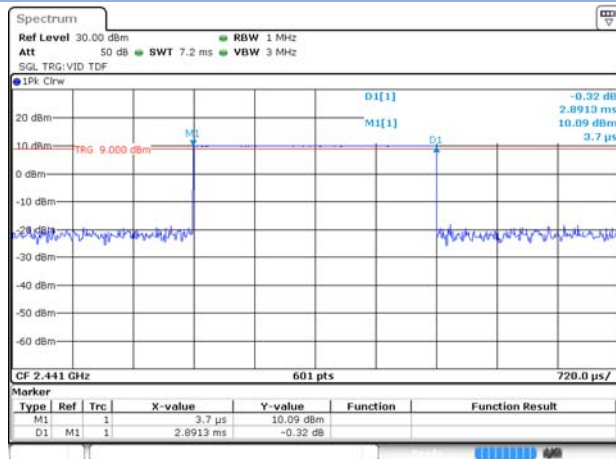


Date: 6 MAR 2021 03:35:01

8-DPSK DH1

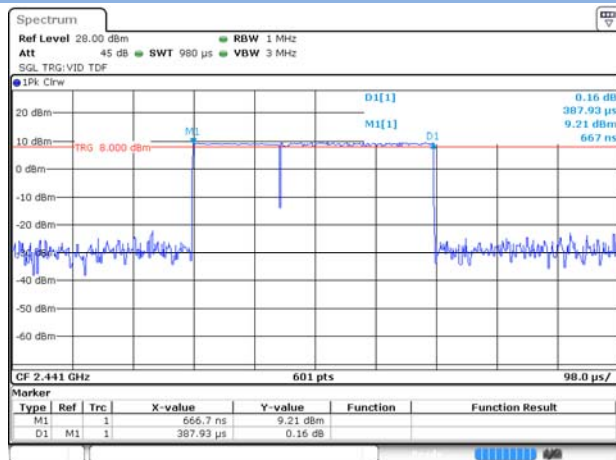


Date: 6 MAR 2021 03:40:47

8-DPSK DH3

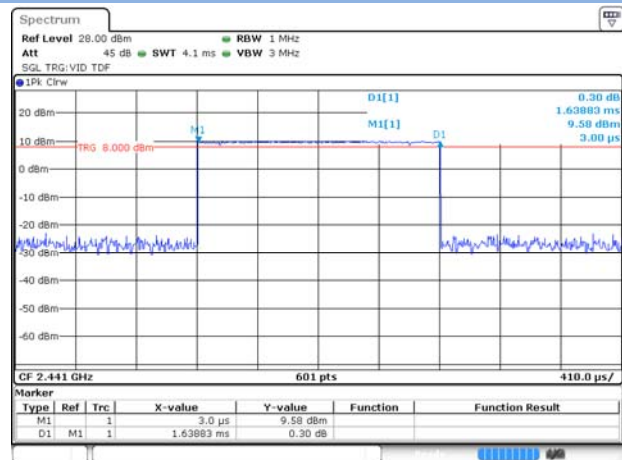


Date: 6 MAR 2021 03:42:00

8-DPSK DH5

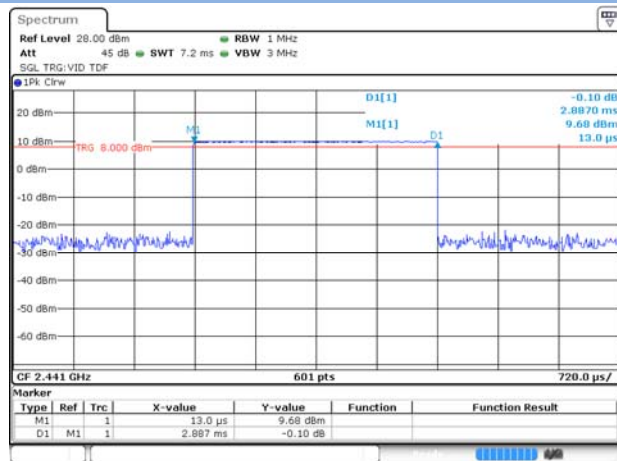


Date: 6 MAR 2021 03:42:53

AFH Mode DH1

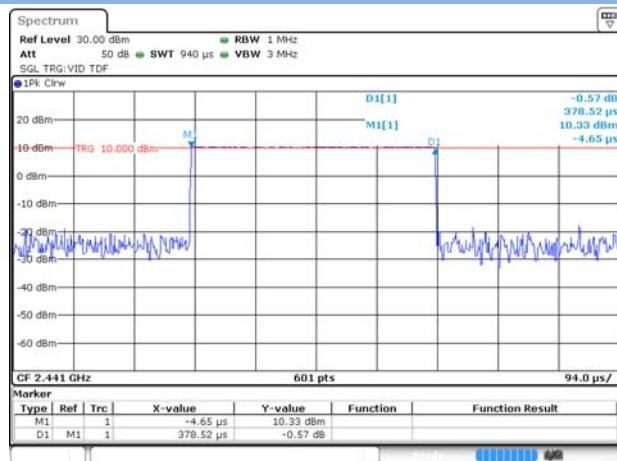


Date: 6 MAR 2021 03:36:31

AFH Mode DH3

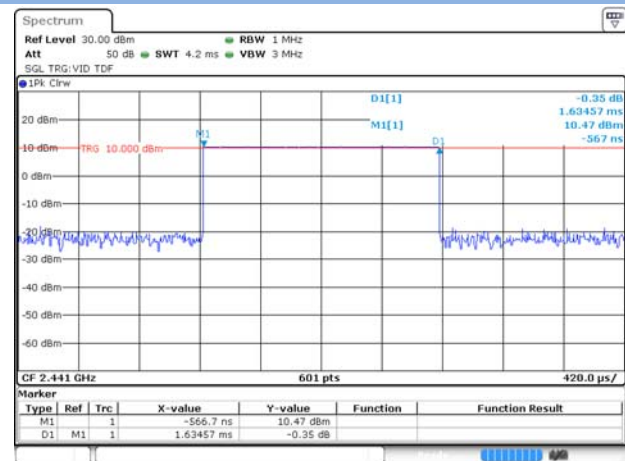

Date: 6 MAR 2021 03:37:07

AFH Mode DH5

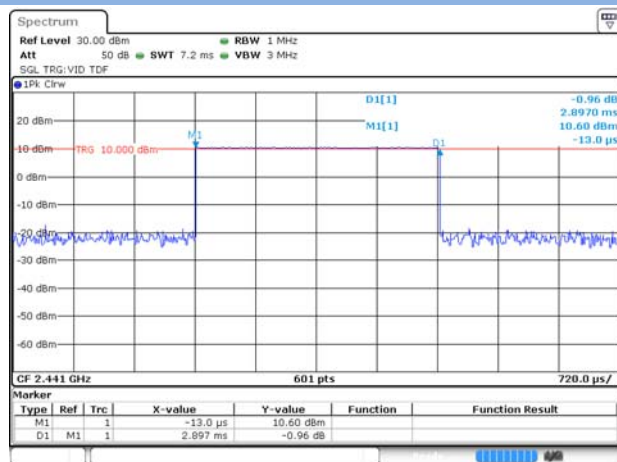

Date: 6 MAR 2021 03:37:52


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-33.80	8.62	-11.38	Pass
Middle	-33.29	10.21	-9.79	Pass
High	-34.04	11.92	-8.08	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-34.12	7.90	-12.10	Pass
Middle	-34.16	9.44	-10.56	Pass
High	-34.23	9.43	-10.57	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-34.21	11.45	-8.55	Pass
8-DPSK	-34.18	10.51	-9.49	Pass


Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

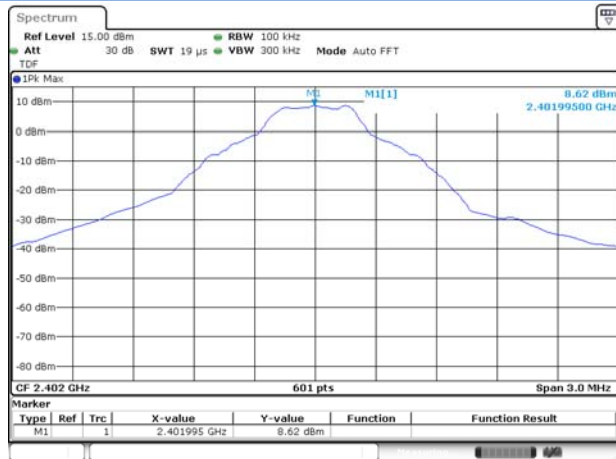


Date: 15.MAR.2021 22:02:00

GFSK LOW CHANNEL, BAND EDGE

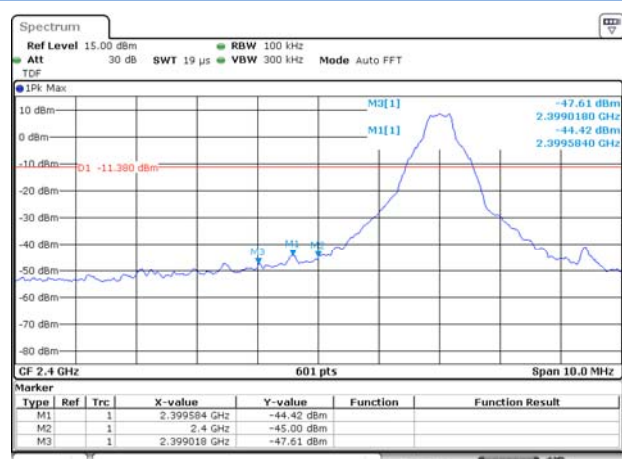


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

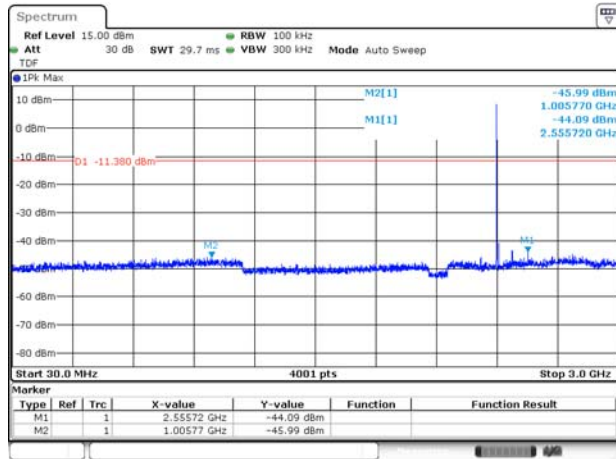


Date: 15.MAR.2021 22:03:06

GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

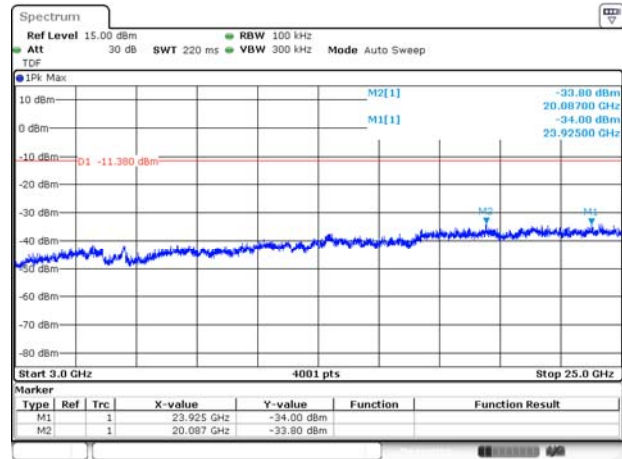


Date: 15.MAR.2021 22:03:19

GFSK MIDDLE CHANNEL, CARRIER LEVEL

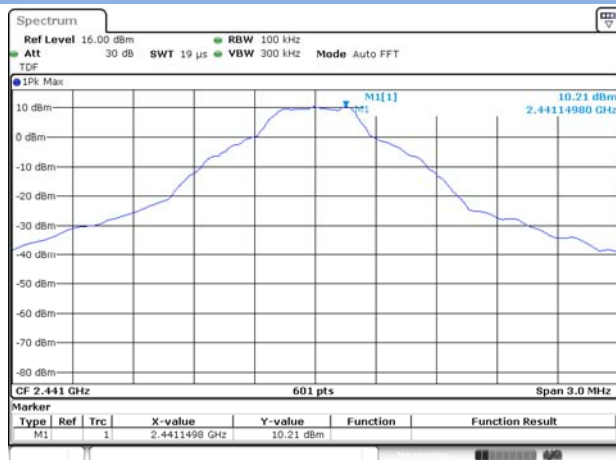


Date: 15.MAR.2021 22:05:15

GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

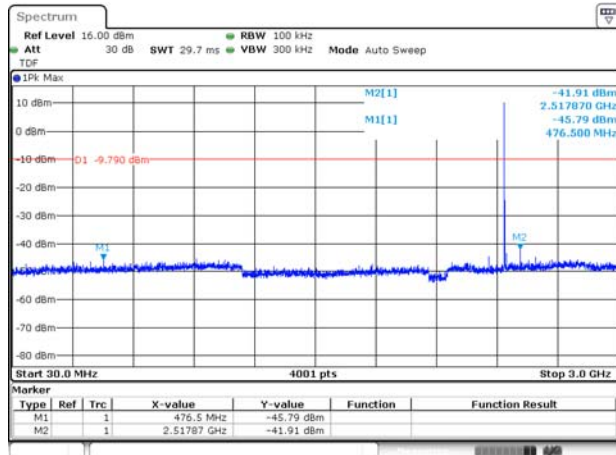


Date: 15.MAR.2021 22:05:50

GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

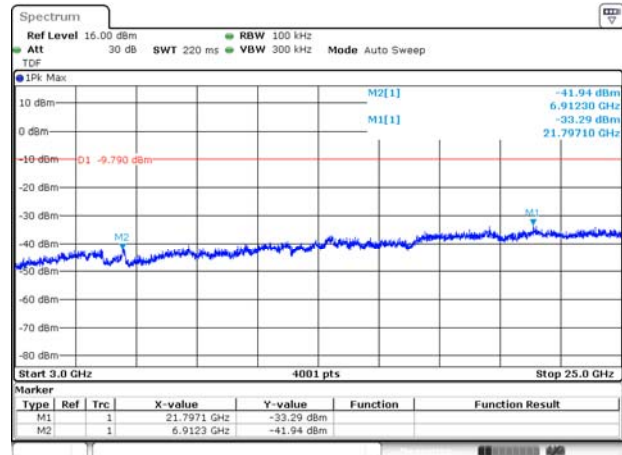


Date: 15.MAR.2021 22:06:09

GFSK HIGH CHANNEL, CARRIER LEVEL

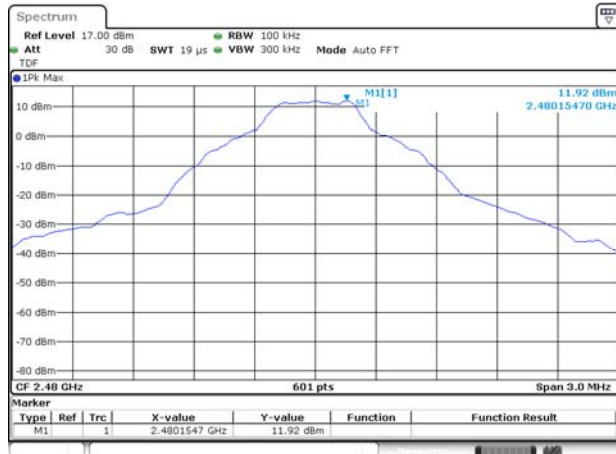


Date: 15.MAR.2021 22:06:44

GFSK HIGH CHANNEL, BAND EDGE

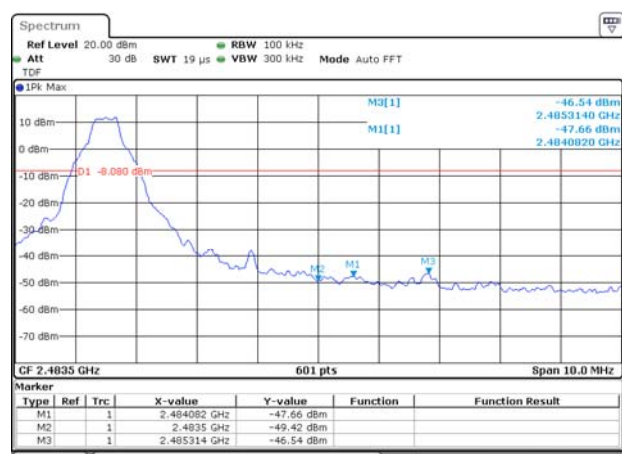


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

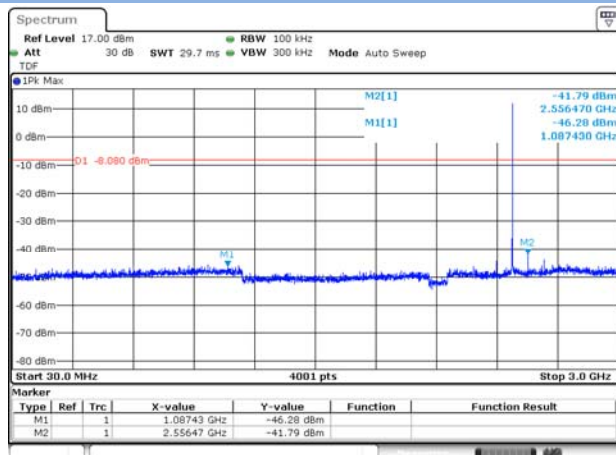


Date: 15.MAR.2021 22:07:22

GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

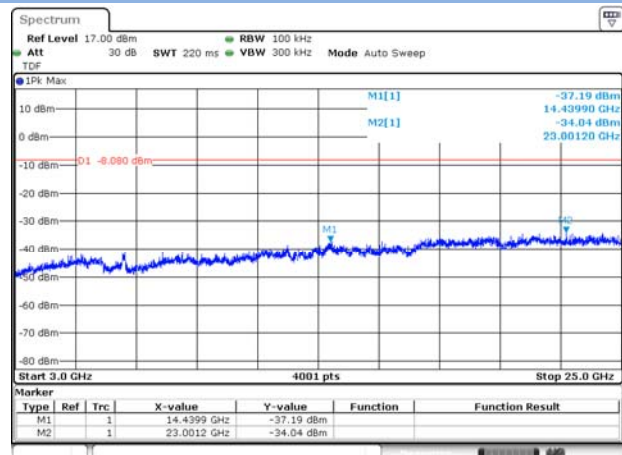


Date: 15.MAR.2021 22:07:35

8-DPSK LOW CHANNEL, CARRIER LEVEL

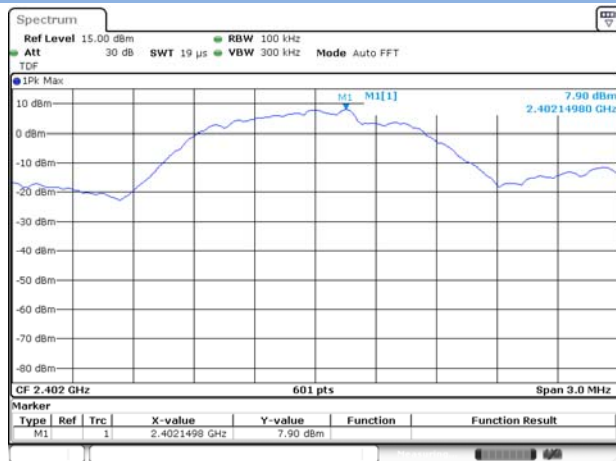


Date: 15 MAR 2021 22:12:28

8-DPSK LOW CHANNEL, BAND EDGE

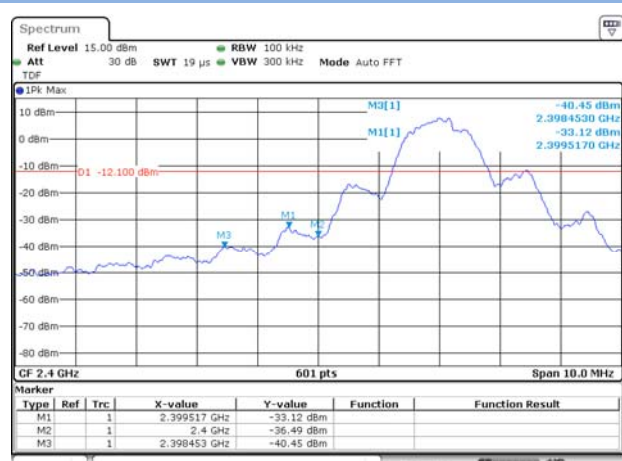


8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

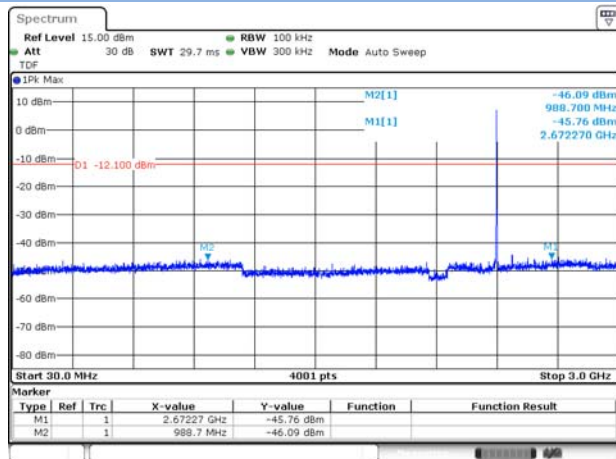


Date: 15 MAR 2021 22:12:53

8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

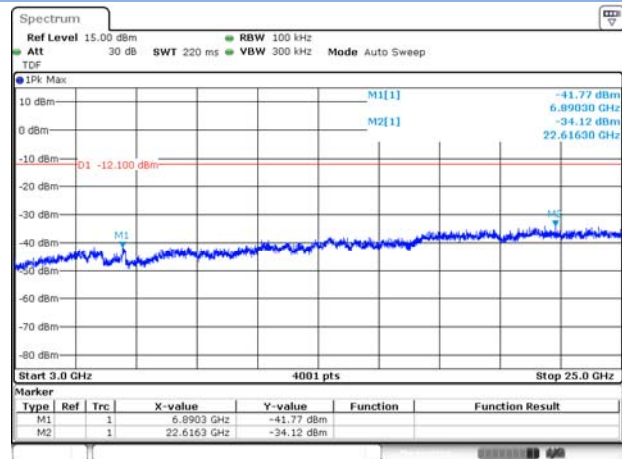


Date: 15 MAR 2021 22:13:07

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

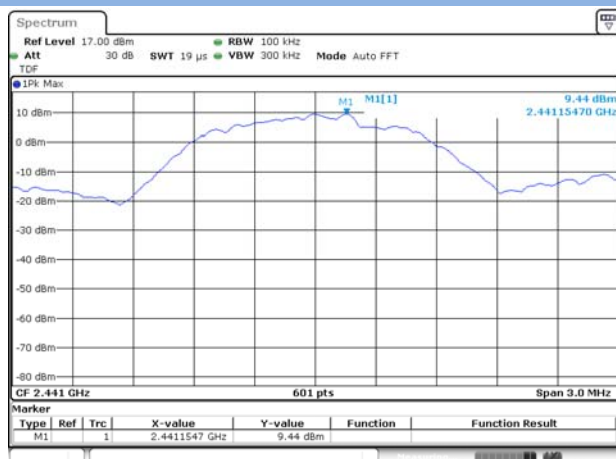


Date: 15 MAR 2021 22:13:37

8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

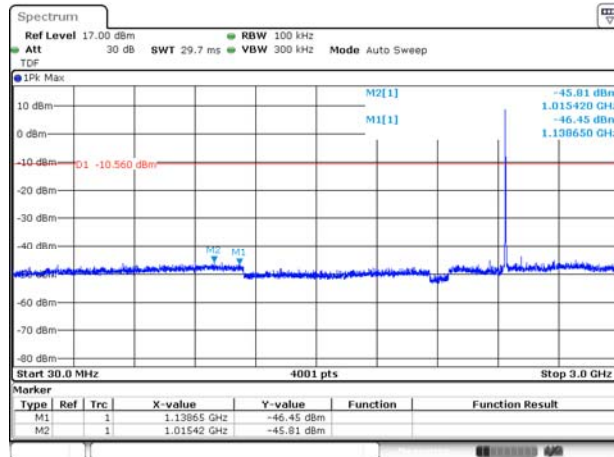


Date: 15 MAR 2021 22:14:23

8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

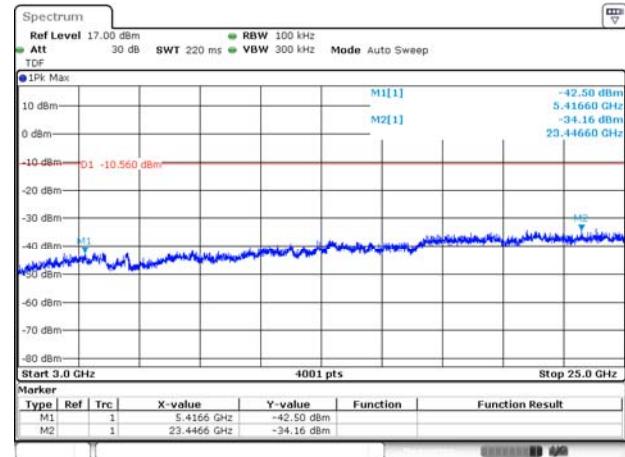

Date: 15 MAR 2021 22:14:35

8-DPSK HIGH CHANNEL, CARRIER LEVEL

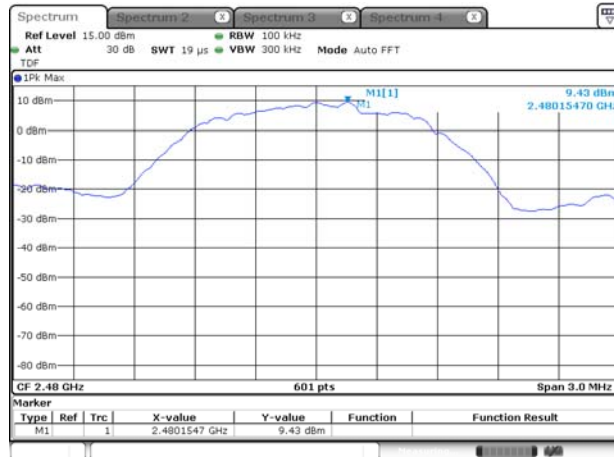


Date: 22 MAR 2021 15:08:54

8-DPSK HIGH CHANNEL, BAND EDGE




Date: 22 MAR 2021 15:10:54

8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

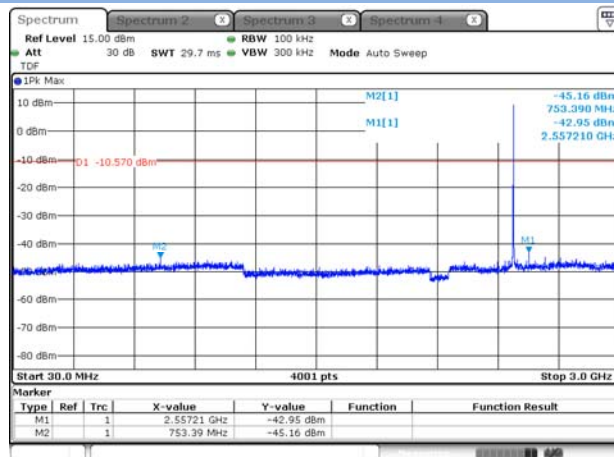


Date: 22 MAR 2021 15:10:02

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

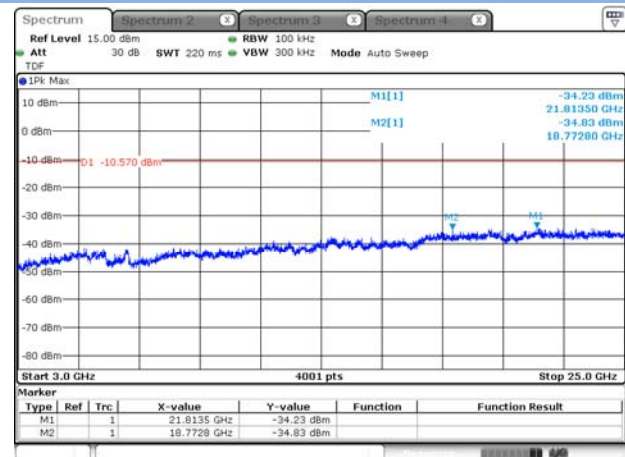

Date: 22 MAR 2021 15:10:19

GFSK HOPPING, CARRIER LEVEL

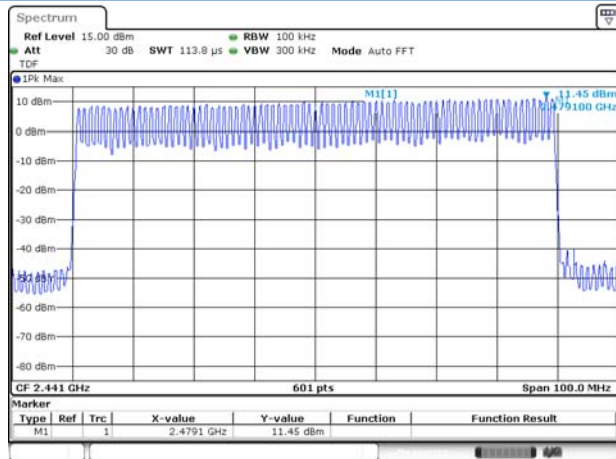


Date: 6 MAR 2021 03:21:20

GFSK HOPPING BAND EDGE (LOW)




Date: 6 MAR 2021 03:24:34

GFSK HOPPING BAND EDGE (HIGH)

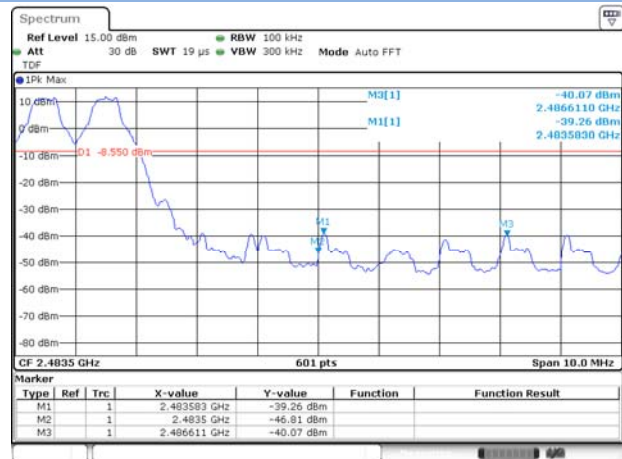


Date: 6 MAR 2021 03:25:03

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

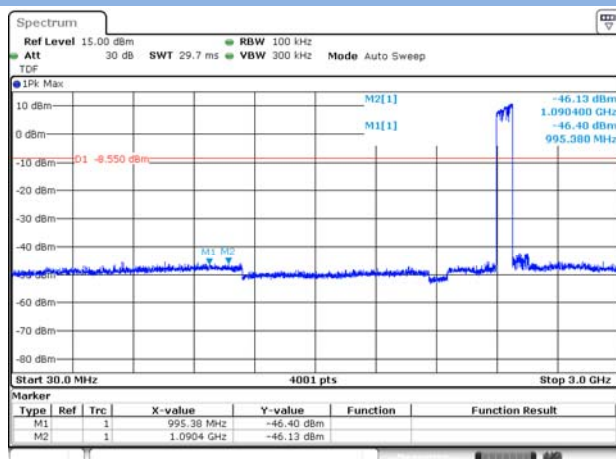


Date: 6 MAR 2021 03:22:36

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

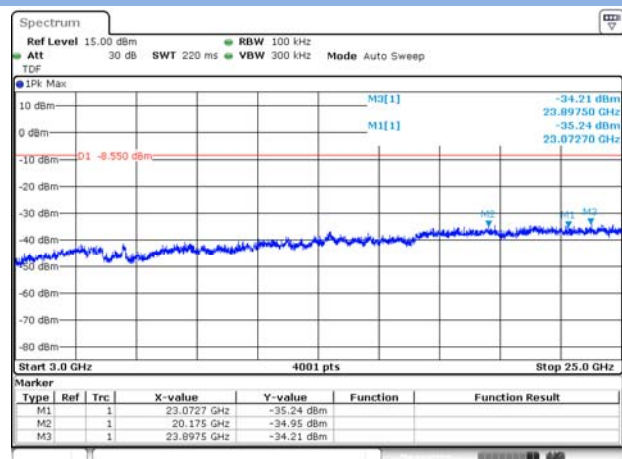


Date: 6 MAR 2021 03:22:55

8-DPSK HOPPING, CARRIER LEVEL

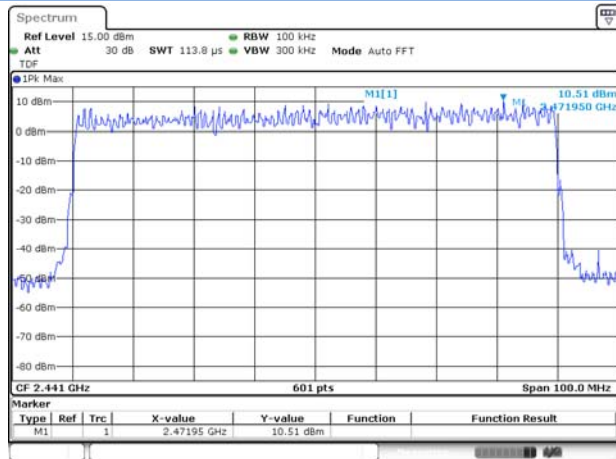

Date: 6 MAR 2021 03:29:03

8-DPSK Hopping BAND EDGE (LOW)

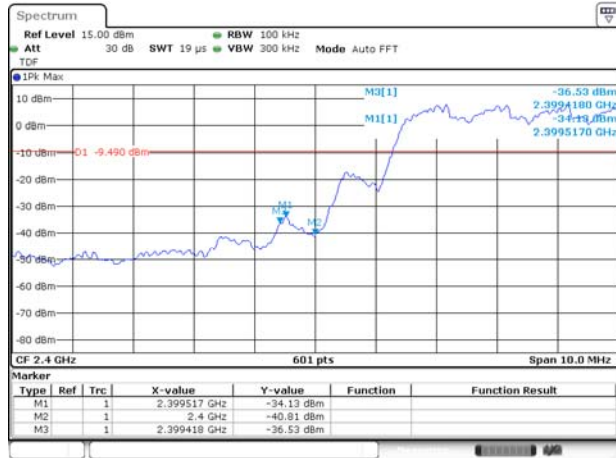


Date: 6 MAR 2021 03:30:47

8-DPSK Hopping BAND EDGE (HIGH)




Date: 6 MAR 2021 03:31:15

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

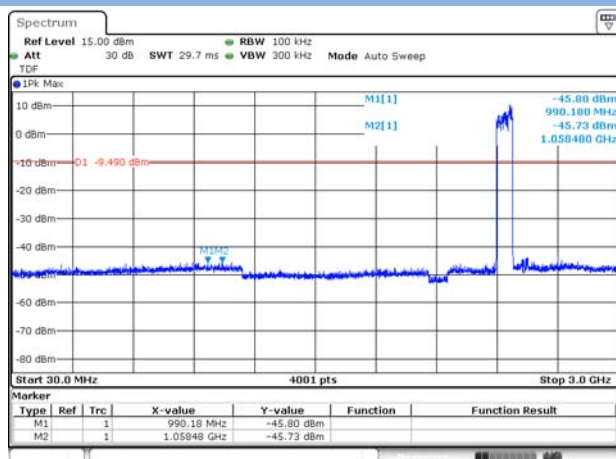

Date: 6 MAR 2021 03:30:01

8-DPSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

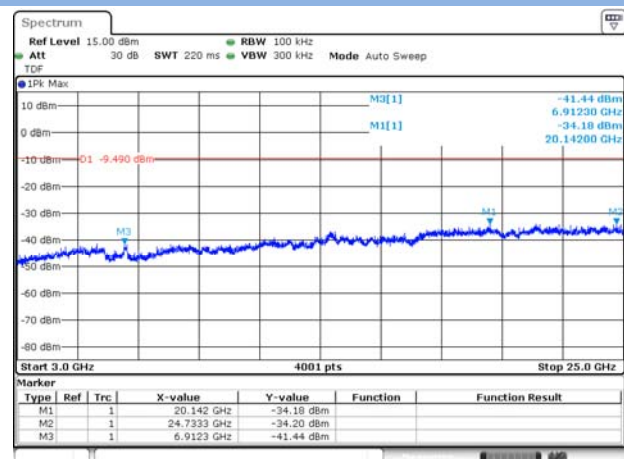

Date: 6 MAR 2021 03:30:21

A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

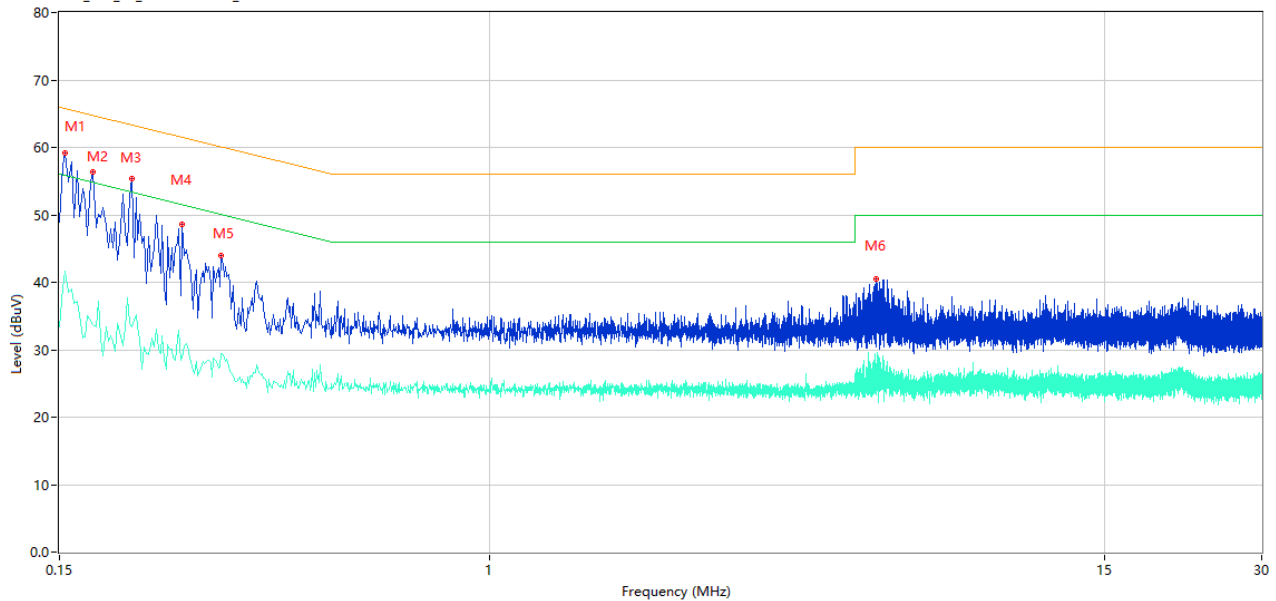

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	59.17	10.41	65.78	-6.61	Peak	L	Pass
1**	0.154	41.61	10.41	55.78	-14.17	AV	L	Pass
2	0.174	56.33	10.39	64.77	-8.44	Peak	L	Pass
2**	0.174	33.70	10.39	54.77	-21.07	AV	L	Pass
3	0.206	55.36	10.38	63.37	-8.01	Peak	L	Pass
3**	0.206	33.32	10.38	53.37	-20.05	AV	L	Pass
4	0.258	48.51	10.34	61.50	-12.99	Peak	L	Pass
4**	0.258	28.78	10.34	51.50	-22.72	AV	L	Pass
5	0.306	44.05	10.33	60.08	-16.03	Peak	L	Pass
5**	0.306	29.49	10.33	50.08	-20.59	AV	L	Pass
6	5.492	40.51	10.32	60.00	-19.49	Peak	L	Pass
6**	5.492	26.08	10.32	50.00	-23.92	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

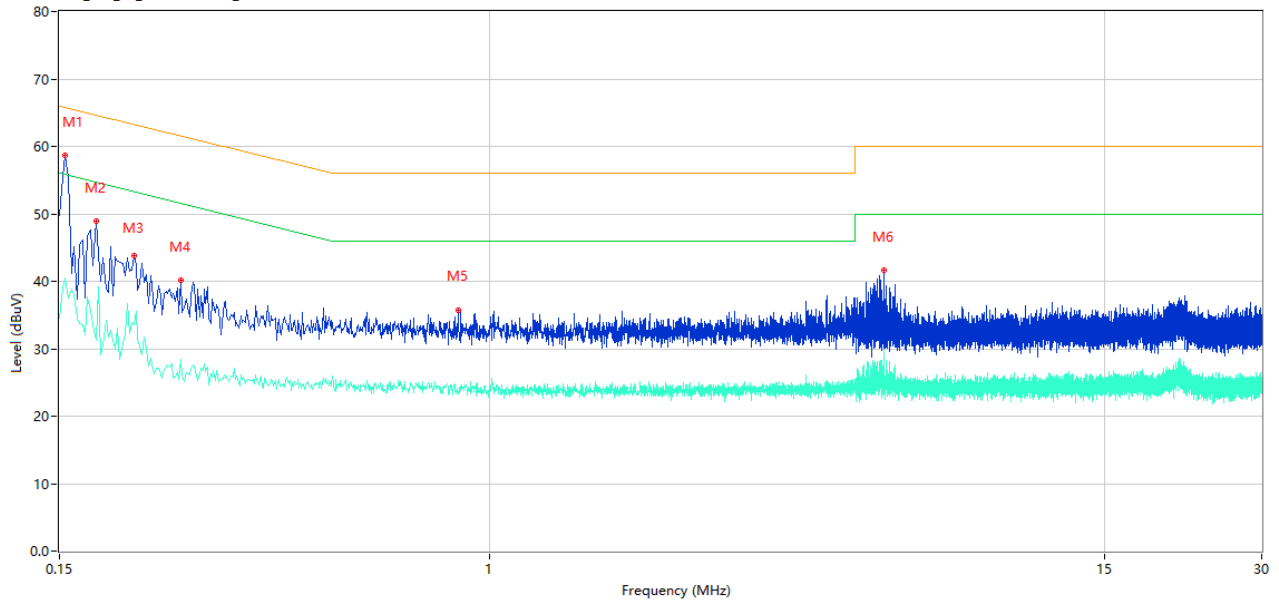

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	58.63	10.41	65.78	-7.15	Peak	N	Pass
1**	0.154	40.57	10.41	55.78	-15.21	AV	N	Pass
2	0.176	48.87	10.39	64.67	-15.80	Peak	N	Pass
2**	0.176	31.31	10.39	54.67	-23.36	AV	N	Pass
3	0.208	43.85	10.38	63.28	-19.43	Peak	N	Pass
3**	0.208	33.58	10.38	53.28	-19.70	AV	N	Pass
4	0.256	40.18	10.34	61.56	-21.38	Peak	N	Pass
4**	0.256	28.46	10.34	51.56	-23.10	AV	N	Pass
5	0.870	35.77	10.25	56.00	-20.23	Peak	N	Pass
5**	0.870	23.33	10.25	46.00	-22.67	AV	N	Pass
6	5.664	41.58	10.31	60.00	-18.42	Peak	N	Pass
6**	5.664	29.74	10.31	50.00	-20.26	AV	N	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of "--" in the table which means not application.


Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT H

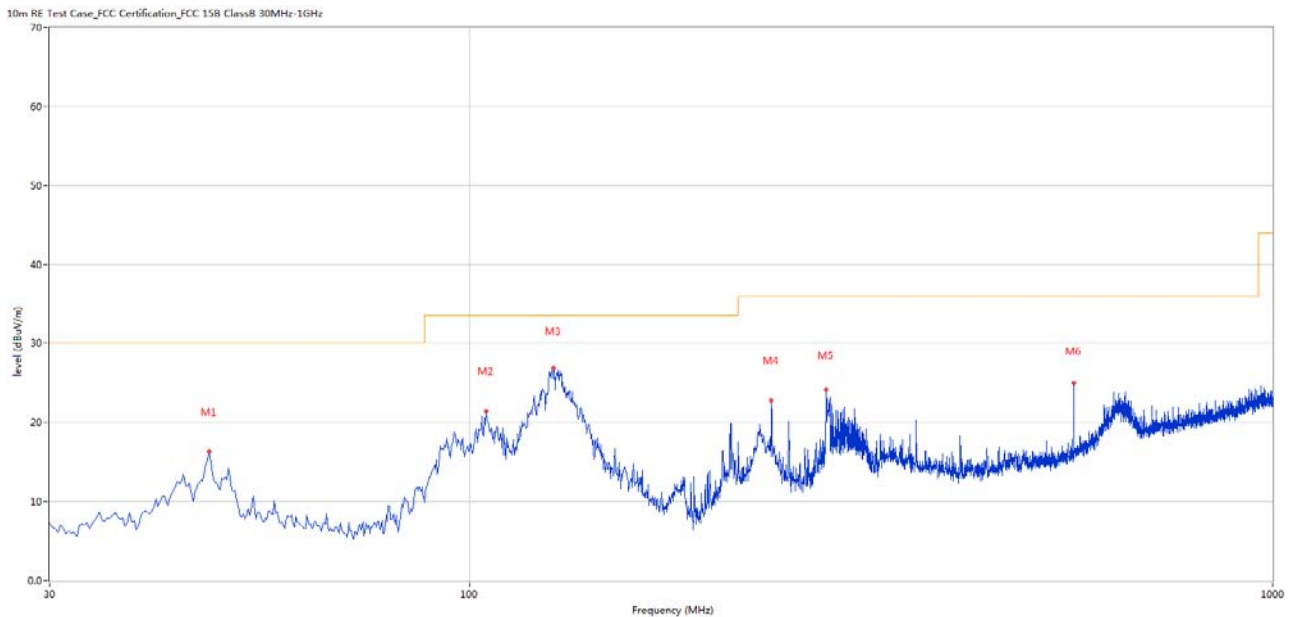

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.456	16.30	-27.09	30.0	-13.70	Peak	60.00	400	Horizontal	Pass
2	104.914	21.39	-29.67	33.5	-12.11	Peak	83.00	300	Horizontal	Pass
3	127.218	26.86	-27.39	33.5	-6.64	Peak	85.00	400	Horizontal	Pass
4	237.771	22.78	-27.95	36.0	-13.22	Peak	219.00	300	Horizontal	Pass
5	278.258	24.06	-26.37	36.0	-11.94	Peak	341.00	300	Horizontal	Pass
6	566.033	24.93	-19.12	36.0	-11.07	Peak	231.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

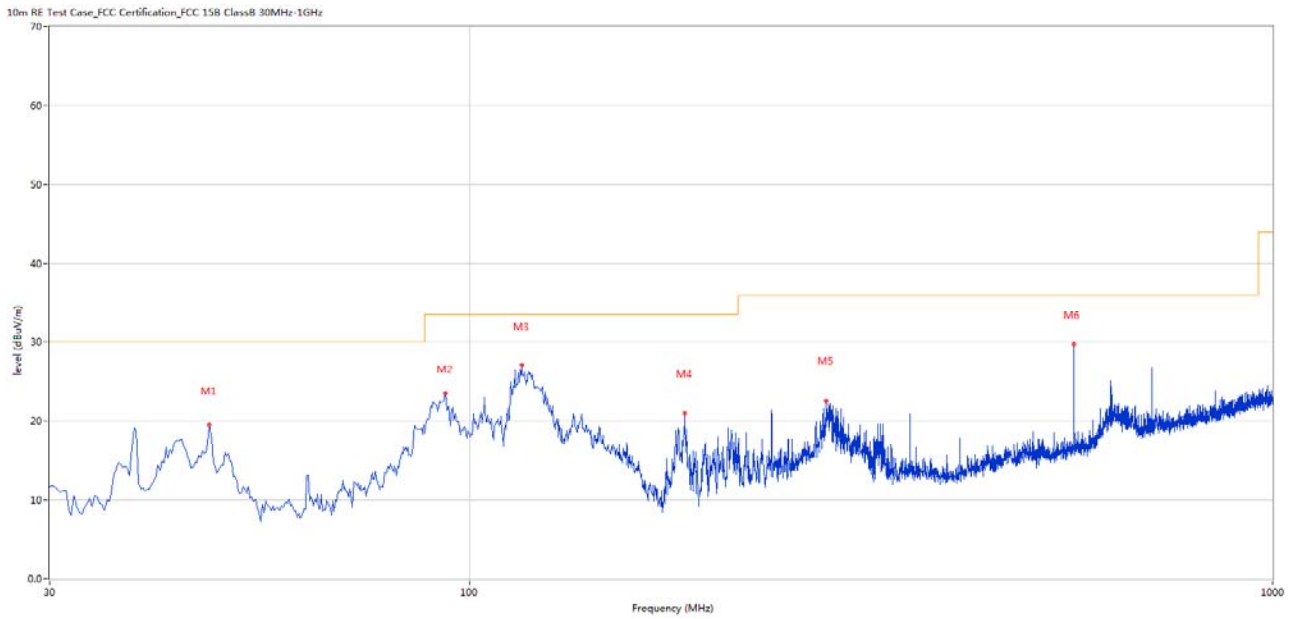

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.456	19.49	-27.09	30.0	-10.51	Peak	292.00	400	Vertical	Pass
2	93.277	23.44	-30.75	33.5	-10.06	Peak	342.00	200	Vertical	Pass
3	116.066	27.09	-28.25	33.5	-6.41	Peak	300.00	100	Vertical	Pass
4	185.161	20.94	-28.62	33.5	-12.56	Peak	280.00	100	Vertical	Pass
5	278.258	22.55	-26.37	36.0	-13.45	Peak	178.00	100	Vertical	Pass
6	566.033	29.67	-19.12	36.0	-6.33	Peak	1.00	300	Vertical	Pass


Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

Note 3: All the configurations were pre tested, only the worst configuration has been reported in this report.


GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

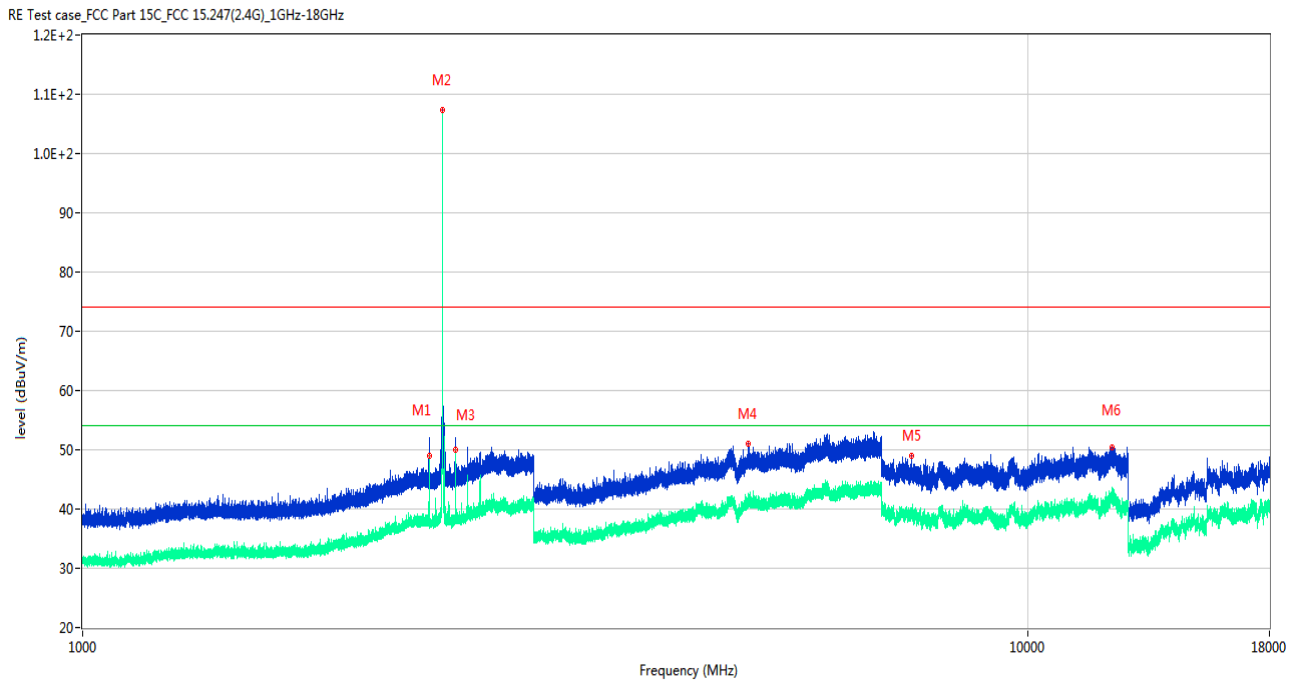

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2325.100	52.00	-13.76	74.0	-22.00	Peak	293.00	150	Horizontal	Pass
1**	2325.100	48.91	-13.76	54.0	-5.09	AV	293.00	150	Horizontal	Pass
2	2401.700	107.25	-13.33	74.0	33.25	Peak	308.00	150	Horizontal	N/A
2**	2401.700	105.73	-13.33	54.0	51.73	AV	308.00	150	Horizontal	N/A
3	2478.700	52.13	-13.33	74.0	-21.87	Peak	323.00	150	Horizontal	Pass
3**	2478.700	49.99	-13.33	54.0	-4.01	AV	323.00	150	Horizontal	Pass
4	5052.200	51.11	-3.69	74.0	-22.89	Peak	302.00	150	Horizontal	Pass
4**	5052.200	40.74	-3.69	54.0	-13.26	AV	302.00	150	Horizontal	Pass
5	7534.462	49.05	-4.30	74.0	-24.95	Peak	347.00	150	Horizontal	Pass
5**	7534.462	38.73	-4.30	54.0	-15.27	AV	347.00	150	Horizontal	Pass
6	12277.063	50.46	0.08	74.0	-23.54	Peak	347.00	150	Horizontal	Pass
6**	12277.063	41.33	0.08	54.0	-12.67	AV	347.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

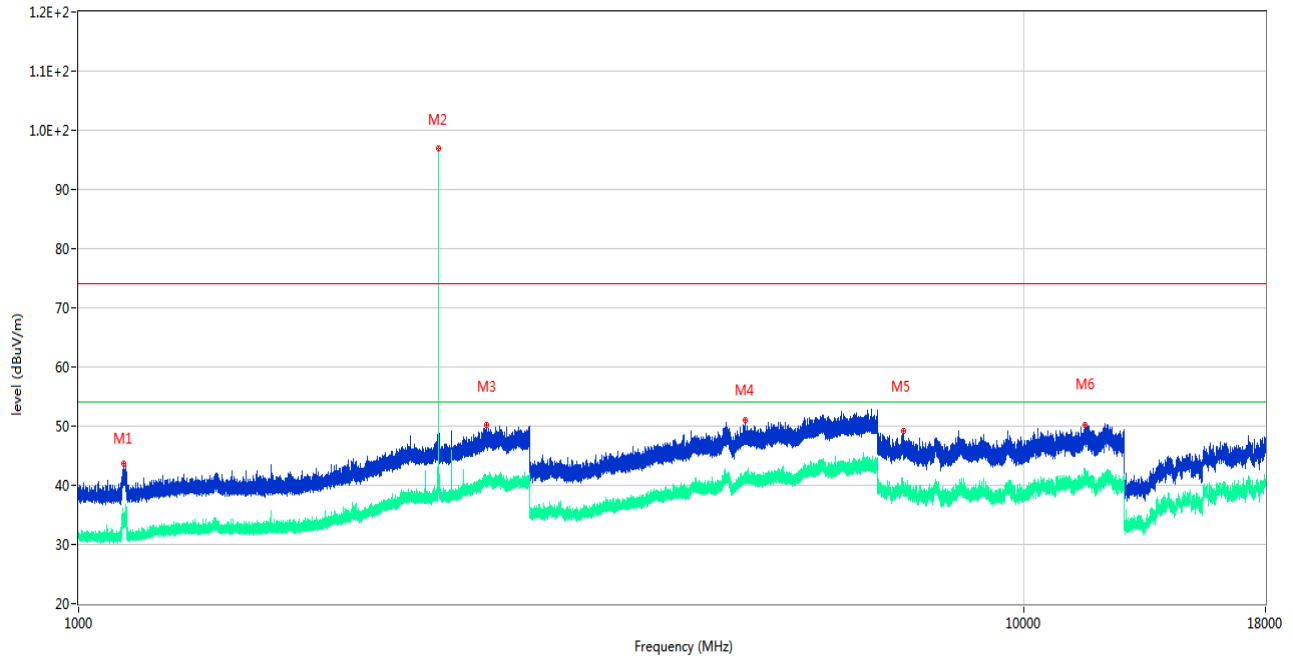

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1117.300	43.76	-18.53	74.0	-30.24	Peak	201.00	150	Vertical	Pass
1**	1117.300	32.94	-18.53	54.0	-21.06	AV	201.00	150	Vertical	Pass
2	2401.700	97.12	-13.33	74.0	23.12	Peak	175.00	150	Vertical	N/A
2**	2401.700	95.45	-13.33	54.0	41.45	AV	175.00	150	Vertical	N/A
3	2702.600	50.25	-11.51	74.0	-23.75	Peak	162.00	150	Vertical	Pass
3**	2702.600	40.36	-11.51	54.0	-13.64	AV	162.00	150	Vertical	Pass
4	5069.000	50.99	-3.44	74.0	-23.01	Peak	259.00	150	Vertical	Pass
4**	5069.000	41.30	-3.44	54.0	-12.70	AV	259.00	150	Vertical	Pass
5	7464.600	49.10	-4.58	74.0	-24.90	Peak	10.00	150	Vertical	Pass
5**	7464.600	38.46	-4.58	54.0	-15.54	AV	10.00	150	Vertical	Pass
6	11595.400	50.27	-0.11	74.0	-23.73	Peak	105.00	150	Vertical	Pass
6**	11595.400	41.86	-0.11	54.0	-12.14	AV	105.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

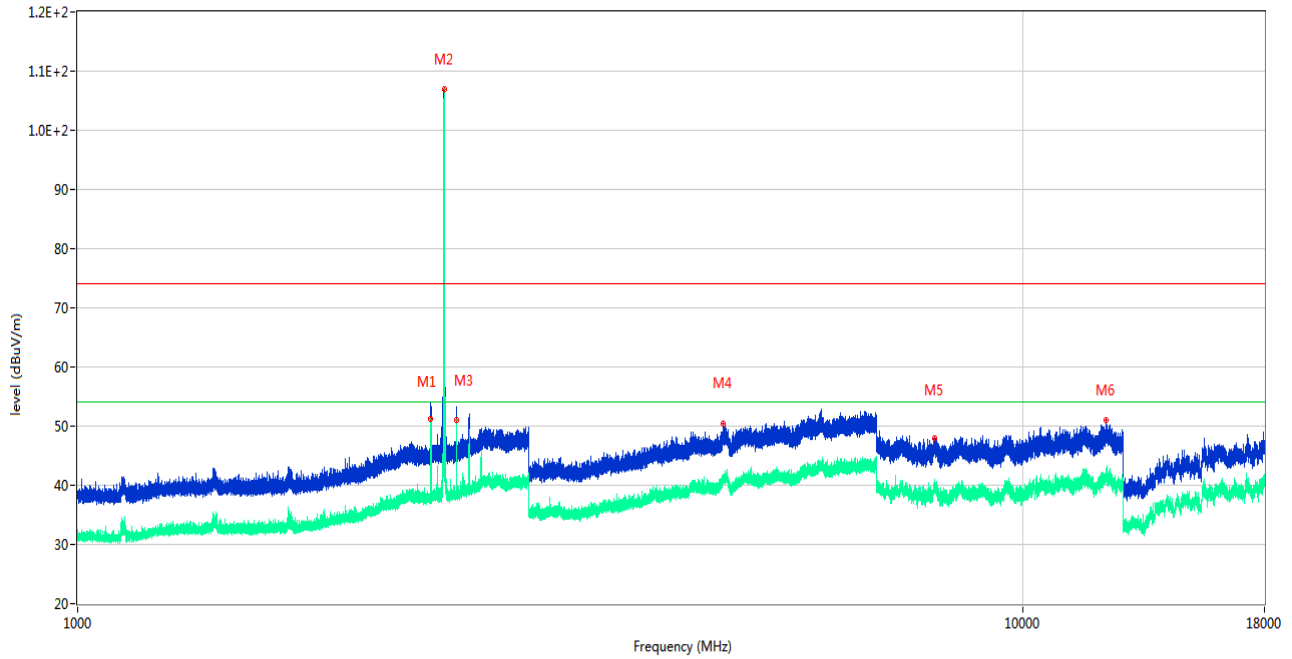

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2364.100	52.76	-13.81	74.0	-21.24	Peak	255.00	150	Horizontal	Pass
1**	2364.100	50.89	-13.81	54.0	-3.11	AV	255.00	150	Horizontal	Pass
2	2441.100	107.03	-13.43	74.0	33.03	Peak	302.00	150	Horizontal	N/A
2**	2441.100	106.90	-13.43	54.0	52.90	AV	302.00	150	Horizontal	N/A
3	2517.900	52.74	-13.61	74.0	-21.26	Peak	318.00	150	Horizontal	Pass
3**	2517.900	51.00	-13.61	54.0	-3.00	AV	318.00	150	Horizontal	Pass
4	4813.800	50.35	-3.94	74.0	-23.65	Peak	340.00	150	Horizontal	Pass
4**	4813.800	41.21	-3.94	54.0	-12.79	AV	340.00	150	Horizontal	Pass
5	8070.938	48.00	-3.38	74.0	-26.00	Peak	26.00	150	Horizontal	Pass
5**	8070.938	39.62	-3.38	54.0	-14.38	AV	26.00	150	Horizontal	Pass
6	12244.575	50.99	-0.22	74.0	-23.01	Peak	4.00	150	Horizontal	Pass
6**	12244.575	41.64	-0.22	54.0	-12.36	AV	4.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

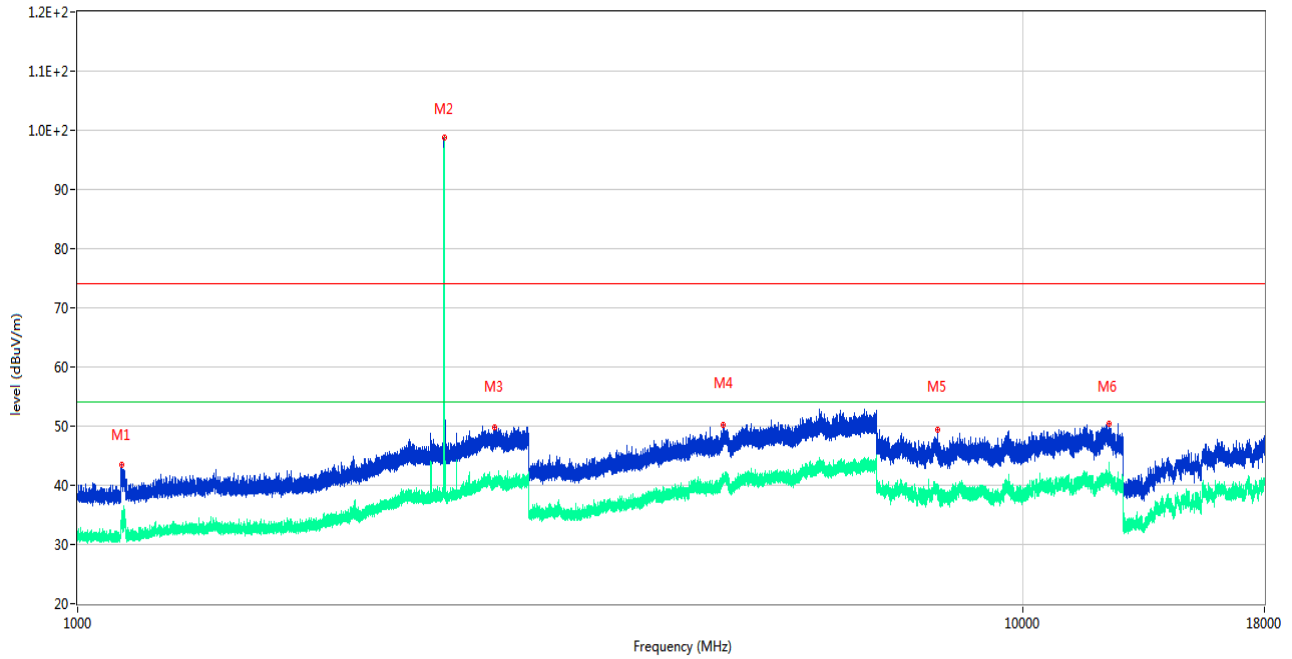

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.100	43.50	-18.63	74.0	-30.50	Peak	193.00	150	Vertical	Pass
1**	1114.100	35.72	-18.63	54.0	-18.28	AV	193.00	150	Vertical	Pass
2	2440.900	98.89	-13.43	74.0	24.89	Peak	163.00	150	Vertical	N/A
2**	2440.900	98.32	-13.43	54.0	44.32	AV	163.00	150	Vertical	N/A
3	2764.200	49.71	-11.52	74.0	-24.29	Peak	29.00	150	Vertical	Pass
3**	2764.200	40.58	-11.52	54.0	-13.42	AV	29.00	150	Vertical	Pass
4	4813.600	50.12	-3.93	74.0	-23.88	Peak	84.00	150	Vertical	Pass
4**	4813.600	40.66	-3.93	54.0	-13.34	AV	84.00	150	Vertical	Pass
5	8116.075	49.40	-3.56	74.0	-24.60	Peak	230.00	150	Vertical	Pass
5**	8116.075	39.20	-3.56	54.0	-14.80	AV	230.00	150	Vertical	Pass
6	12336.862	50.40	-0.88	74.0	-23.60	Peak	82.00	150	Vertical	Pass
6**	12336.862	41.77	-0.88	54.0	-12.23	AV	82.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

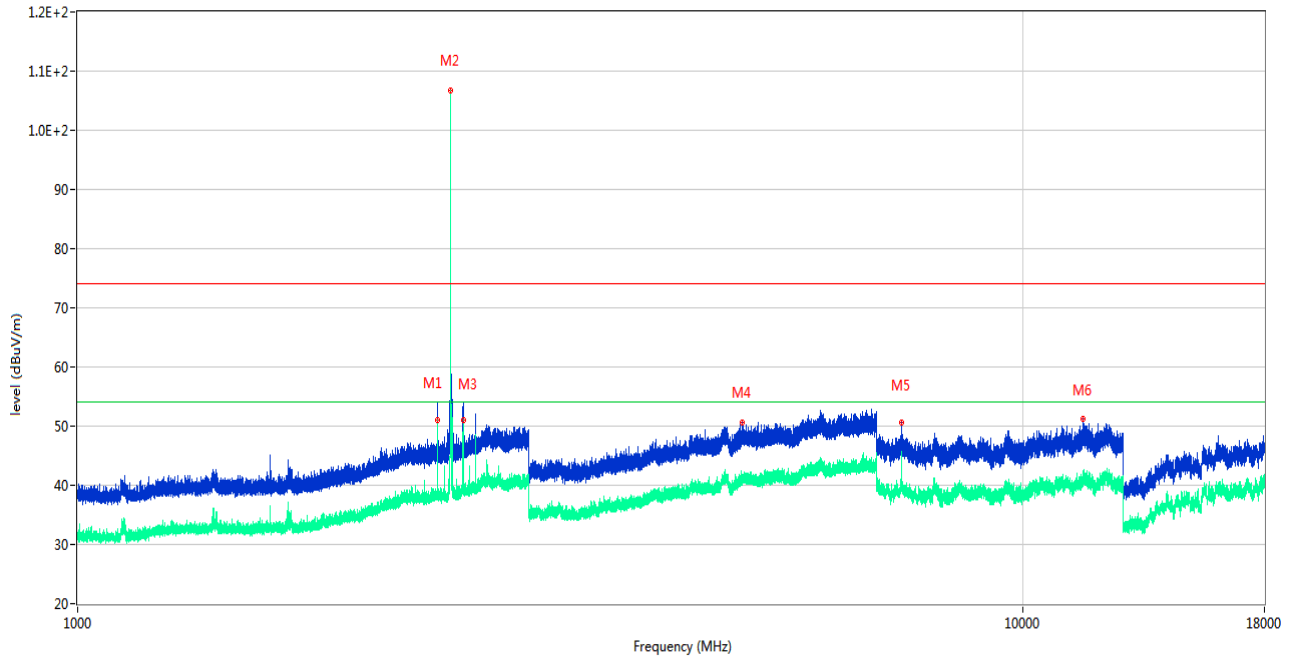

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2403.200	53.33	-13.31	74.0	-20.67	Peak	274.00	150	Horizontal	Pass
1**	2403.200	50.79	-13.31	54.0	-3.21	AV	274.00	150	Horizontal	Pass
2	2480.100	106.82	-13.17	74.0	32.82	Peak	320.00	150	Horizontal	N/A
2**	2480.100	106.68	-13.17	54.0	52.68	AV	320.00	150	Horizontal	N/A
3	2556.700	53.34	-12.62	74.0	-20.66	Peak	349.00	150	Horizontal	Pass
3**	2556.700	50.96	-12.62	54.0	-3.04	AV	349.00	150	Horizontal	Pass
4	5040.600	50.52	-4.00	74.0	-23.48	Peak	345.00	150	Horizontal	Pass
4**	5040.600	41.12	-4.00	54.0	-12.88	AV	345.00	150	Horizontal	Pass
5	7439.587	50.65	-4.38	74.0	-23.35	Peak	216.00	150	Horizontal	Pass
5**	7439.587	45.72	-4.38	54.0	-8.28	AV	216.00	150	Horizontal	Pass
6	11583.612	51.20	-0.01	74.0	-22.80	Peak	197.00	150	Horizontal	Pass
6**	11583.612	41.27	-0.01	54.0	-12.73	AV	197.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

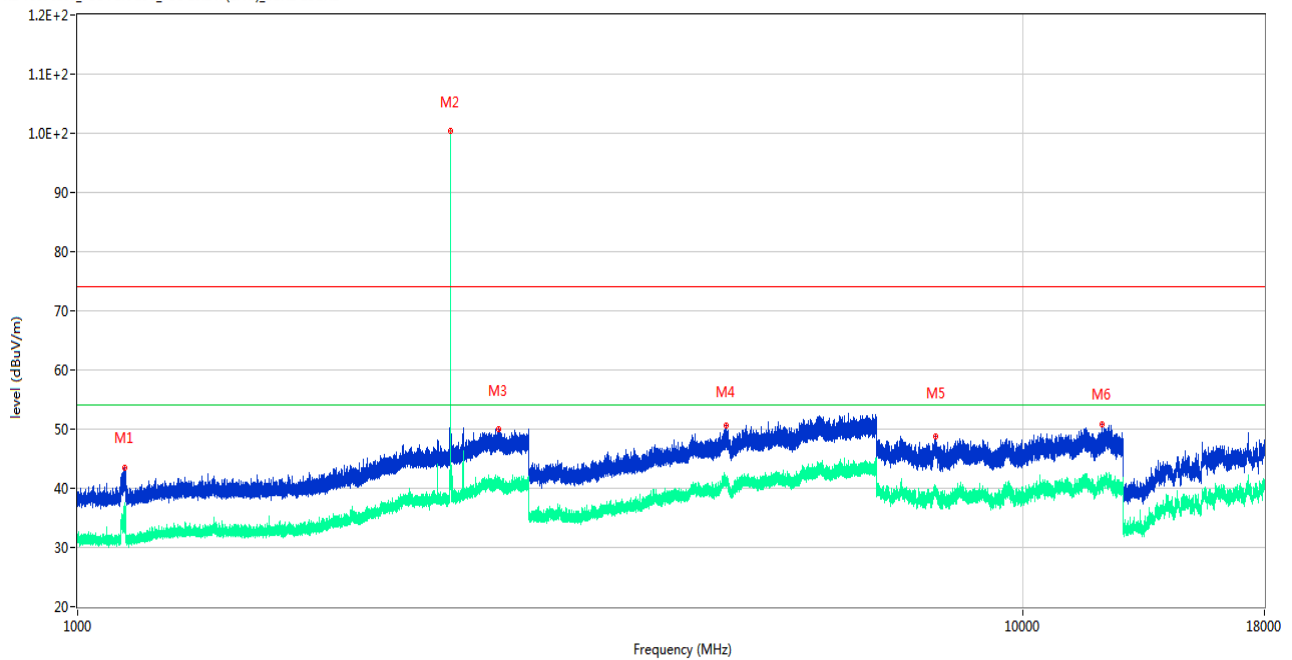

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1122.300	43.52	-18.68	74.0	-30.48	Peak	189.00	150	Vertical	Pass
1**	1122.300	35.10	-18.68	54.0	-18.90	AV	189.00	150	Vertical	Pass
2	2480.100	100.49	-13.17	74.0	26.49	Peak	173.00	150	Vertical	N/A
2**	2480.100	100.32	-13.17	54.0	46.32	AV	173.00	150	Vertical	N/A
3	2785.300	50.01	-11.23	74.0	-23.99	Peak	316.00	150	Vertical	Pass
3**	2785.300	40.64	-11.23	54.0	-13.36	AV	316.00	150	Vertical	Pass
4	4855.800	50.54	-3.63	74.0	-23.46	Peak	193.00	150	Vertical	Pass
4**	4855.800	40.99	-3.63	54.0	-13.01	AV	193.00	150	Vertical	Pass
5	8091.350	48.81	-3.57	74.0	-25.19	Peak	360.00	150	Vertical	Pass
5**	8091.350	39.83	-3.57	54.0	-14.17	AV	360.00	150	Vertical	Pass
6	12110.888	50.88	-0.83	74.0	-23.12	Peak	150.00	150	Vertical	Pass
6**	12110.888	41.14	-0.83	54.0	-12.86	AV	150.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

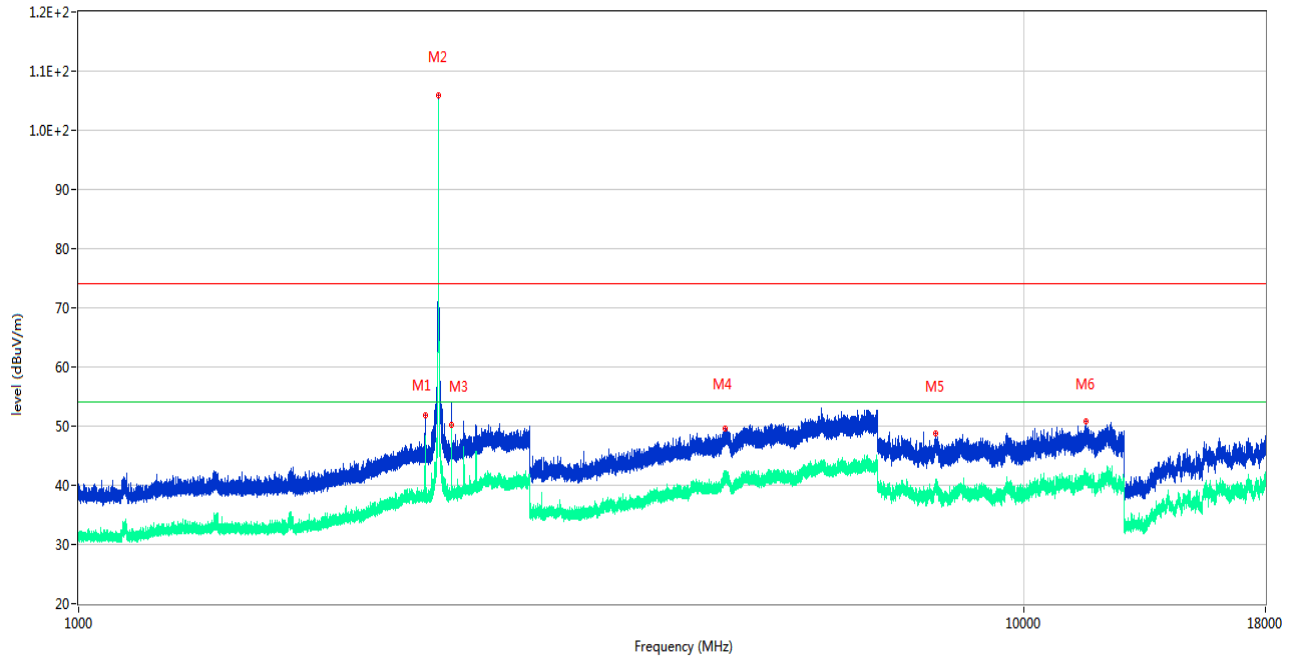

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2325.300	51.91	-13.76	74.0	-22.09	Peak	315.00	150	Horizontal	Pass
1**	2325.300	48.20	-13.76	54.0	-5.80	AV	315.00	150	Horizontal	Pass
2	2401.800	105.85	-13.33	74.0	31.85	Peak	267.00	150	Horizontal	N/A
2**	2401.800	104.43	-13.33	54.0	50.43	AV	267.00	150	Horizontal	N/A
3	2478.900	53.32	-13.31	74.0	-20.68	Peak	315.00	150	Horizontal	Pass
3**	2478.900	50.29	-13.31	54.0	-3.71	AV	315.00	150	Horizontal	Pass
4	4833.400	49.61	-4.19	74.0	-24.39	Peak	97.00	150	Horizontal	Pass
4**	4833.400	41.73	-4.19	54.0	-12.27	AV	97.00	150	Horizontal	Pass
5	8063.750	48.75	-3.38	74.0	-25.25	Peak	272.00	150	Horizontal	Pass
5**	8063.750	39.02	-3.38	54.0	-14.98	AV	272.00	150	Horizontal	Pass
6	11623.576	50.72	-0.20	74.0	-23.28	Peak	360.00	150	Horizontal	Pass
6**	11623.576	41.09	-0.20	54.0	-12.91	AV	360.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

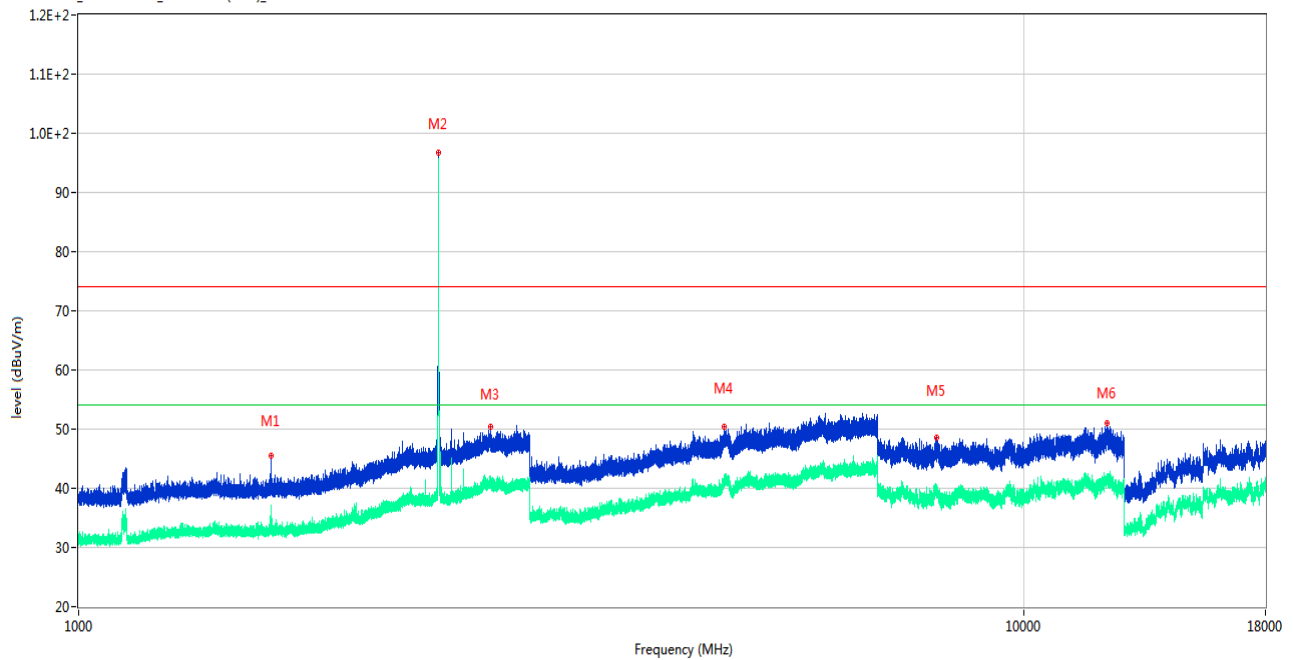

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1596.700	45.44	-17.85	74.0	-28.56	Peak	142.00	150	Vertical	Pass
1**	1596.700	32.90	-17.85	54.0	-21.10	AV	142.00	150	Vertical	Pass
2	2402.000	96.68	-13.32	74.0	22.68	Peak	182.00	150	Vertical	N/A
2**	2402.000	95.13	-13.32	54.0	41.13	AV	182.00	150	Vertical	N/A
3	2727.600	50.46	-10.79	74.0	-23.54	Peak	222.00	150	Vertical	Pass
3**	2727.600	41.75	-10.79	54.0	-12.25	AV	222.00	150	Vertical	Pass
4	4812.600	50.46	-3.86	74.0	-23.54	Peak	333.00	150	Vertical	Pass
4**	4812.600	41.37	-3.86	54.0	-12.63	AV	333.00	150	Vertical	Pass
5	8072.375	48.62	-3.42	74.0	-25.38	Peak	297.00	150	Vertical	Pass
5**	8072.375	38.68	-3.42	54.0	-15.32	AV	297.00	150	Vertical	Pass
6	12248.600	51.08	-0.12	74.0	-22.92	Peak	318.00	150	Vertical	Pass
6**	12248.600	41.72	-0.12	54.0	-12.28	AV	318.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

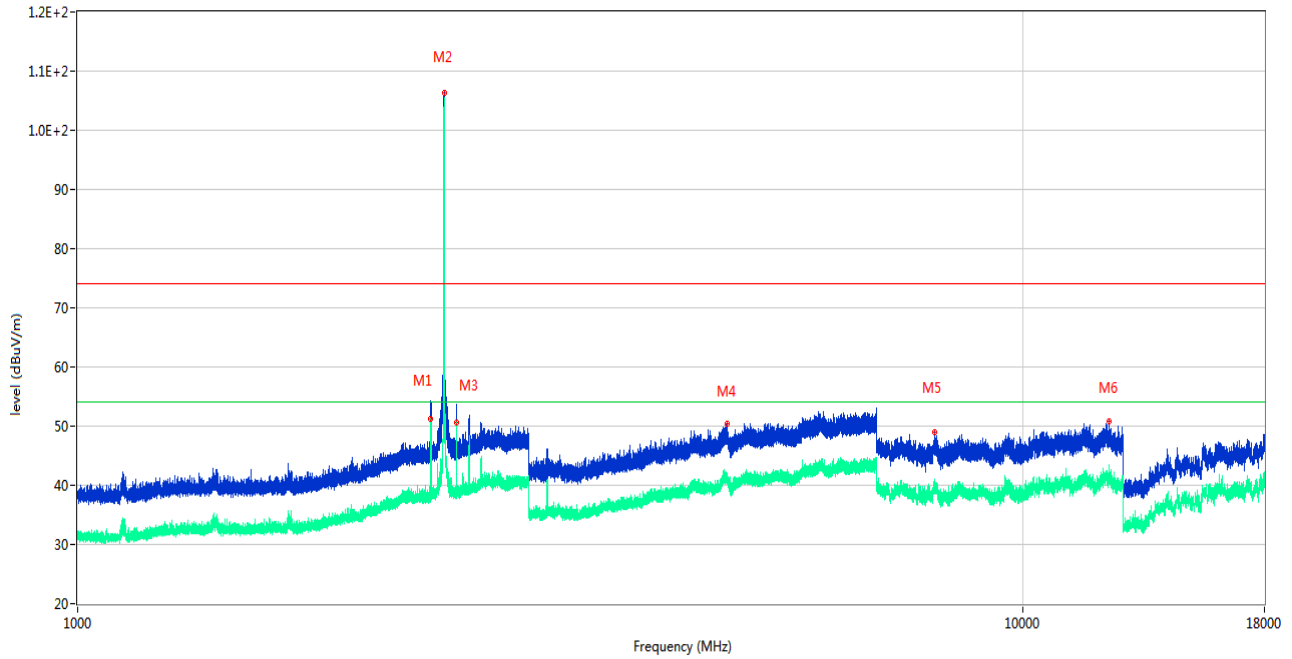

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2364.200	53.33	-13.80	74.0	-20.67	Peak	257.00	150	Horizontal	Pass
1**	2364.200	50.92	-13.80	54.0	-3.08	AV	257.00	150	Horizontal	Pass
2	2440.900	106.23	-13.43	74.0	32.23	Peak	299.00	150	Horizontal	N/A
2**	2440.900	104.74	-13.43	54.0	50.74	AV	299.00	150	Horizontal	N/A
3	2517.800	53.48	-13.61	74.0	-20.52	Peak	319.00	150	Horizontal	Pass
3**	2517.800	50.65	-13.61	54.0	-3.35	AV	319.00	150	Horizontal	Pass
4	4867.000	50.37	-3.76	74.0	-23.63	Peak	176.00	150	Horizontal	Pass
4**	4867.000	41.31	-3.76	54.0	-12.69	AV	176.00	150	Horizontal	Pass
5	8071.800	48.88	-3.40	74.0	-25.12	Peak	19.00	150	Horizontal	Pass
5**	8071.800	39.43	-3.40	54.0	-14.57	AV	19.00	150	Horizontal	Pass
6	12321.338	50.77	-0.43	74.0	-23.23	Peak	180.00	150	Horizontal	Pass
6**	12321.338	41.17	-0.43	54.0	-12.83	AV	180.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

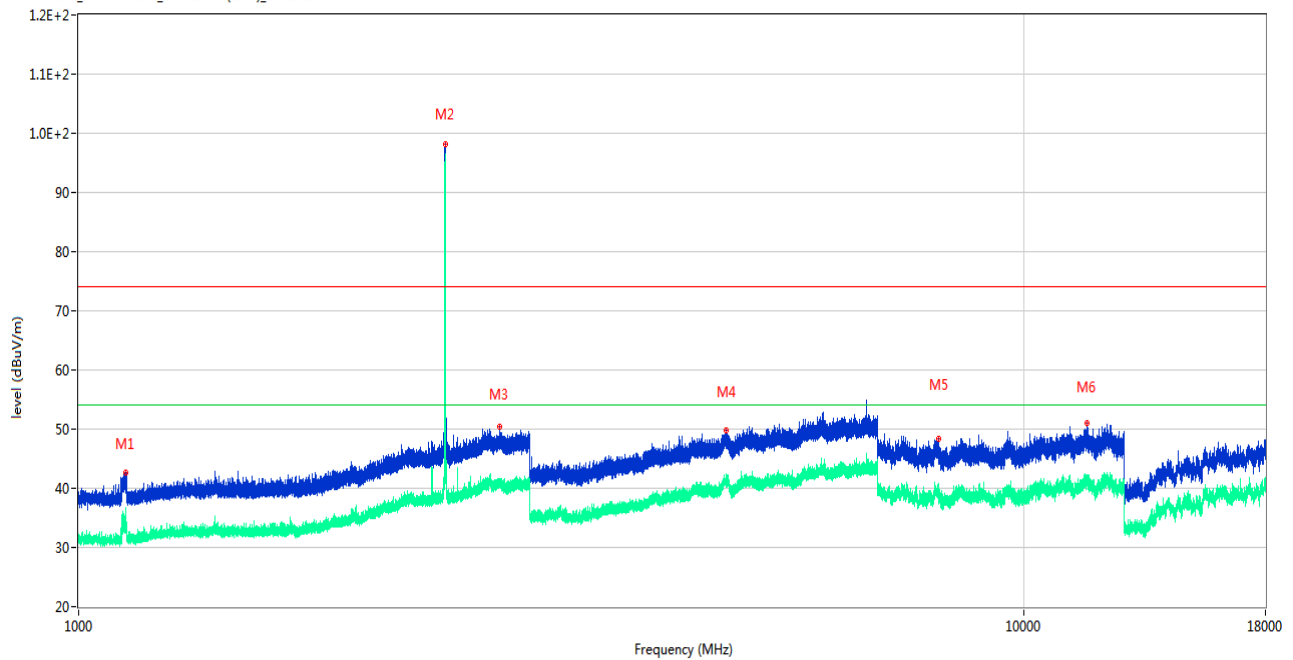

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1122.000	42.59	-18.67	74.0	-31.41	Peak	188.00	150	Vertical	Pass
1**	1122.000	33.99	-18.67	54.0	-20.01	AV	188.00	150	Vertical	Pass
2	2441.000	98.21	-13.43	74.0	24.21	Peak	167.00	150	Vertical	N/A
2**	2441.000	96.31	-13.43	54.0	42.31	AV	167.00	150	Vertical	N/A
3	2790.600	50.33	-11.10	74.0	-23.67	Peak	208.00	150	Vertical	Pass
3**	2790.600	41.04	-11.10	54.0	-12.96	AV	208.00	150	Vertical	Pass
4	4838.400	49.84	-3.96	74.0	-24.16	Peak	297.00	150	Vertical	Pass
4**	4838.400	41.21	-3.96	54.0	-12.79	AV	297.00	150	Vertical	Pass
5	8114.925	48.34	-3.52	74.0	-25.66	Peak	360.00	150	Vertical	Pass
5**	8114.925	39.47	-3.52	54.0	-14.53	AV	360.00	150	Vertical	Pass
6	11670.438	51.01	-0.73	74.0	-22.99	Peak	191.00	150	Vertical	Pass
6**	11670.438	42.19	-0.73	54.0	-11.81	AV	191.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

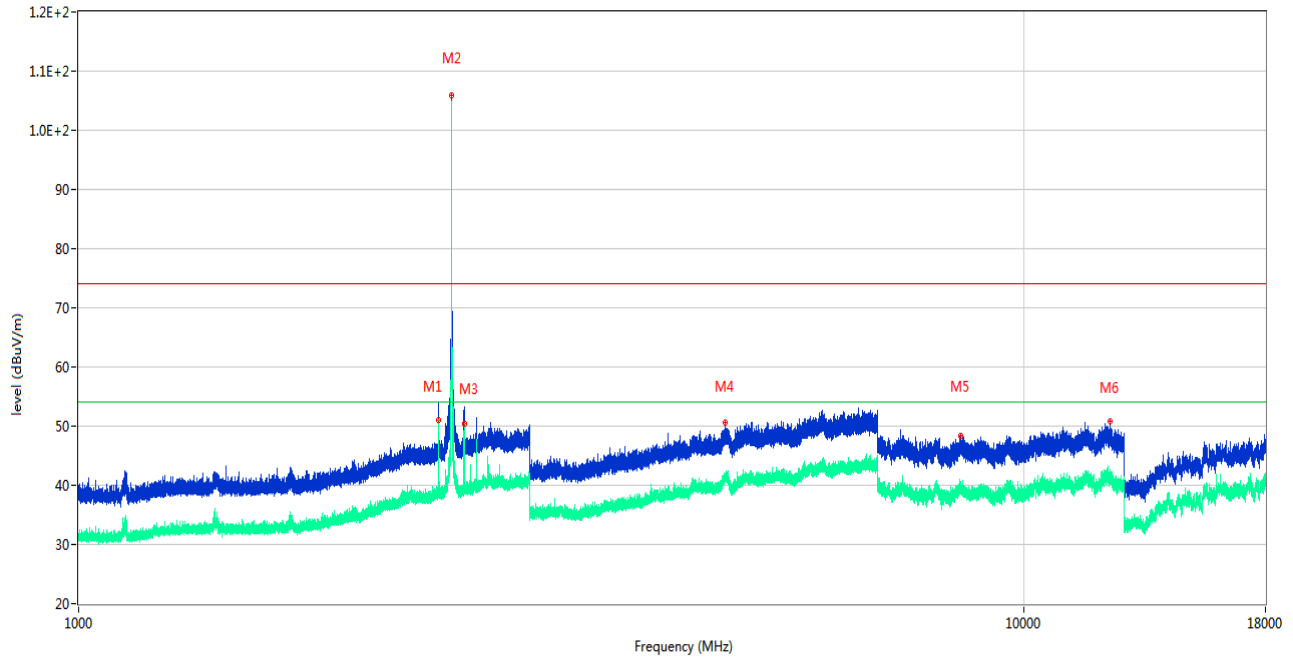

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2403.300	54.14	-13.31	74.0	-19.86	Peak	316.00	150	Horizontal	Pass
1**	2403.300	50.93	-13.31	54.0	-3.07	AV	316.00	150	Horizontal	Pass
2	2479.900	105.83	-13.19	74.0	31.83	Peak	316.00	150	Horizontal	N/A
2**	2479.900	104.69	-13.19	54.0	50.69	AV	316.00	150	Horizontal	N/A
3	2557.000	53.10	-12.62	74.0	-20.90	Peak	316.00	150	Horizontal	Pass
3**	2557.000	50.37	-12.62	54.0	-3.63	AV	316.00	150	Horizontal	Pass
4	4828.800	50.66	-4.13	74.0	-23.34	Peak	237.00	150	Horizontal	Pass
4**	4828.800	40.92	-4.13	54.0	-13.08	AV	237.00	150	Horizontal	Pass
5	8566.013	48.29	-3.06	74.0	-25.71	Peak	137.00	150	Horizontal	Pass
5**	8566.013	39.53	-3.06	54.0	-14.47	AV	137.00	150	Horizontal	Pass
6	12342.325	50.78	-1.03	74.0	-23.22	Peak	312.00	150	Horizontal	Pass
6**	12342.325	41.06	-1.03	54.0	-12.94	AV	312.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

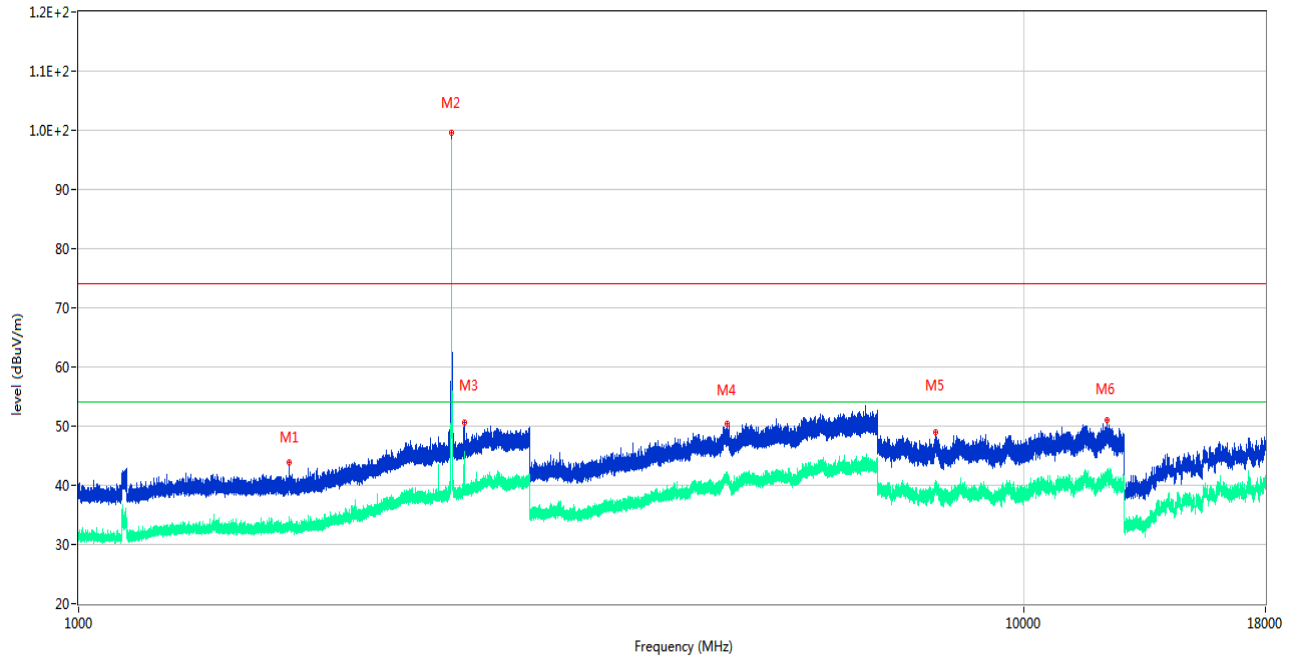


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1669.500	43.86	-17.80	74.0	-30.14	Peak	135.00	150	Vertical	Pass
1**	1669.500	32.60	-17.80	54.0	-21.40	AV	135.00	150	Vertical	Pass
2	2480.000	99.65	-13.18	74.0	25.65	Peak	156.00	150	Vertical	N/A
2**	2480.000	97.95	-13.18	54.0	43.95	AV	156.00	150	Vertical	N/A
3	2556.800	50.56	-12.62	74.0	-23.44	Peak	179.00	150	Vertical	Pass
3**	2556.800	44.79	-12.62	54.0	-9.21	AV	179.00	150	Vertical	Pass
4	4847.800	50.41	-3.77	74.0	-23.59	Peak	268.00	150	Vertical	Pass
4**	4847.800	40.82	-3.77	54.0	-13.18	AV	268.00	150	Vertical	Pass
5	8059.725	48.94	-3.32	74.0	-25.06	Peak	104.00	150	Vertical	Pass
5**	8059.725	39.09	-3.32	54.0	-14.91	AV	104.00	150	Vertical	Pass
6	12235.950	51.06	-0.31	74.0	-22.94	Peak	251.00	150	Vertical	Pass
6**	12235.950	41.33	-0.31	54.0	-12.67	AV	251.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

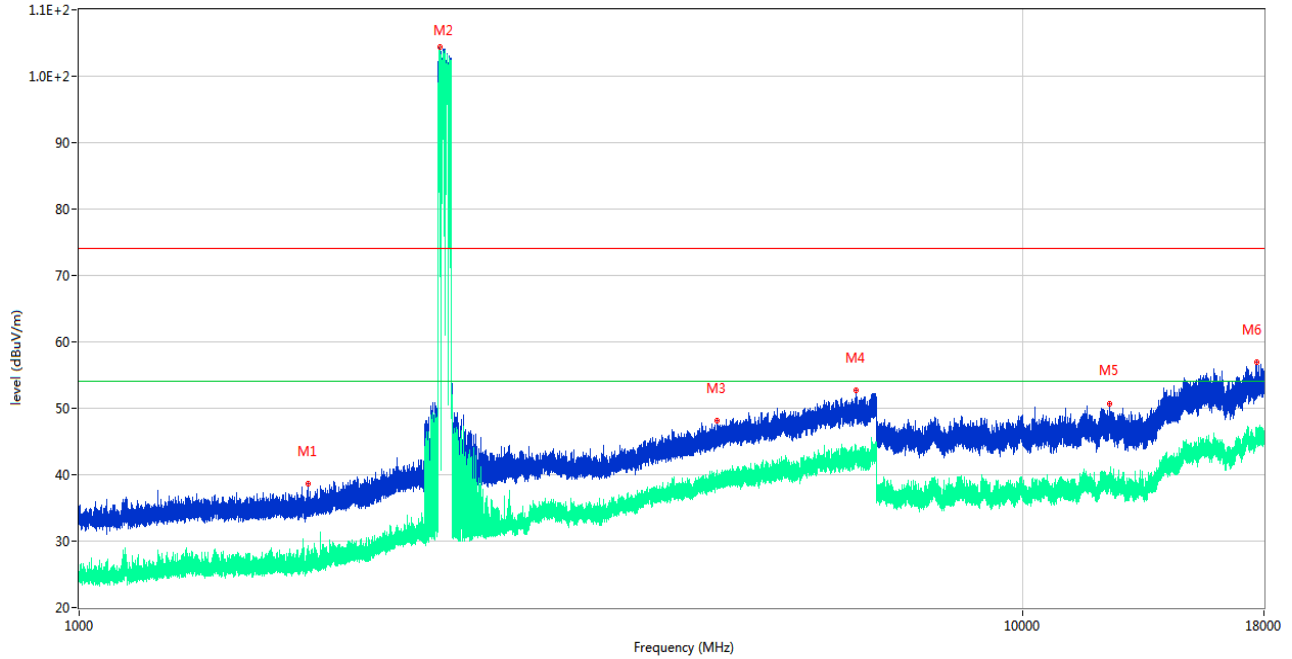

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1749.000	38.61	-14.99	74.0	-35.39	Peak	276.00	150	Horizontal	Pass
1**	1749.000	27.29	-14.99	54.0	-26.71	AV	276.00	150	Horizontal	Pass
2	2409.800	104.49	-10.43	74.0	30.49	Peak	118.00	150	Horizontal	N/A
2**	2409.800	102.02	-10.43	54.0	48.02	AV	118.00	150	Horizontal	N/A
3	4746.200	48.11	-1.87	74.0	-25.89	Peak	339.00	150	Horizontal	Pass
3**	4746.200	38.66	-1.87	54.0	-15.34	AV	339.00	150	Horizontal	Pass
4	6647.800	52.78	4.53	74.0	-21.22	Peak	86.00	150	Horizontal	Pass
4**	6647.800	42.48	4.53	54.0	-11.52	AV	86.00	150	Horizontal	Pass
5	12356.412	50.70	19.66	74.0	-23.30	Peak	320.00	150	Horizontal	Pass
5**	12356.412	38.86	19.66	54.0	-15.14	AV	320.00	150	Horizontal	Pass
6	17672.663	56.98	24.37	74.0	-17.02	Peak	103.00	150	Horizontal	Pass
6**	17672.663	45.16	24.37	54.0	-8.84	AV	103.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

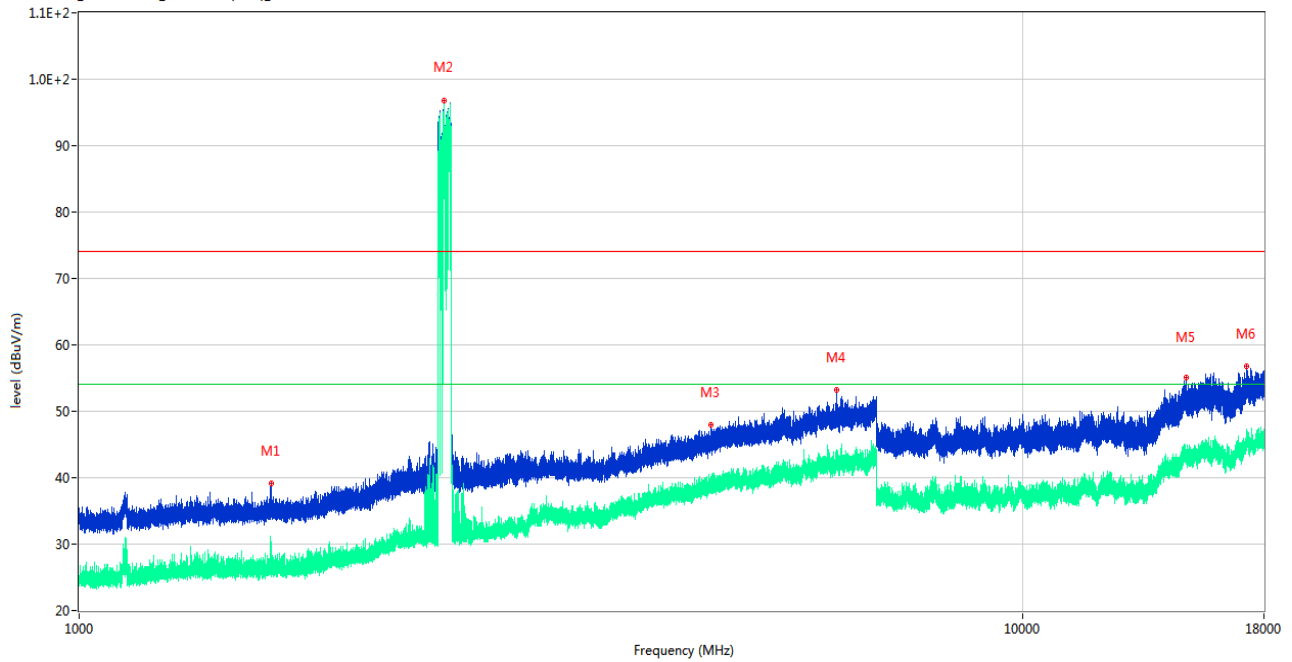

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1596.700	39.12	-15.15	74.0	-34.88	Peak	216.00	150	Vertical	Pass
1**	1596.700	26.35	-15.15	54.0	-27.65	AV	216.00	150	Vertical	Pass
2	2433.800	96.85	-10.46	74.0	22.85	Peak	196.00	150	Vertical	N/A
2**	2433.800	93.57	-10.46	54.0	39.57	AV	196.00	150	Vertical	N/A
3	4674.600	48.03	-2.25	74.0	-25.97	Peak	25.00	150	Vertical	Pass
3**	4674.600	40.20	-2.25	54.0	-13.80	AV	25.00	150	Vertical	Pass
4	6345.000	53.14	3.03	74.0	-20.86	Peak	328.00	150	Vertical	Pass
4**	6345.000	42.38	3.03	54.0	-11.62	AV	328.00	150	Vertical	Pass
5	14879.662	55.15	22.99	74.0	-18.85	Peak	300.00	150	Vertical	Pass
5**	14879.662	43.13	22.99	54.0	-10.87	AV	300.00	150	Vertical	Pass
6	17245.575	56.74	24.20	74.0	-17.26	Peak	144.00	150	Vertical	Pass
6**	17245.575	46.08	24.20	54.0	-7.92	AV	144.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

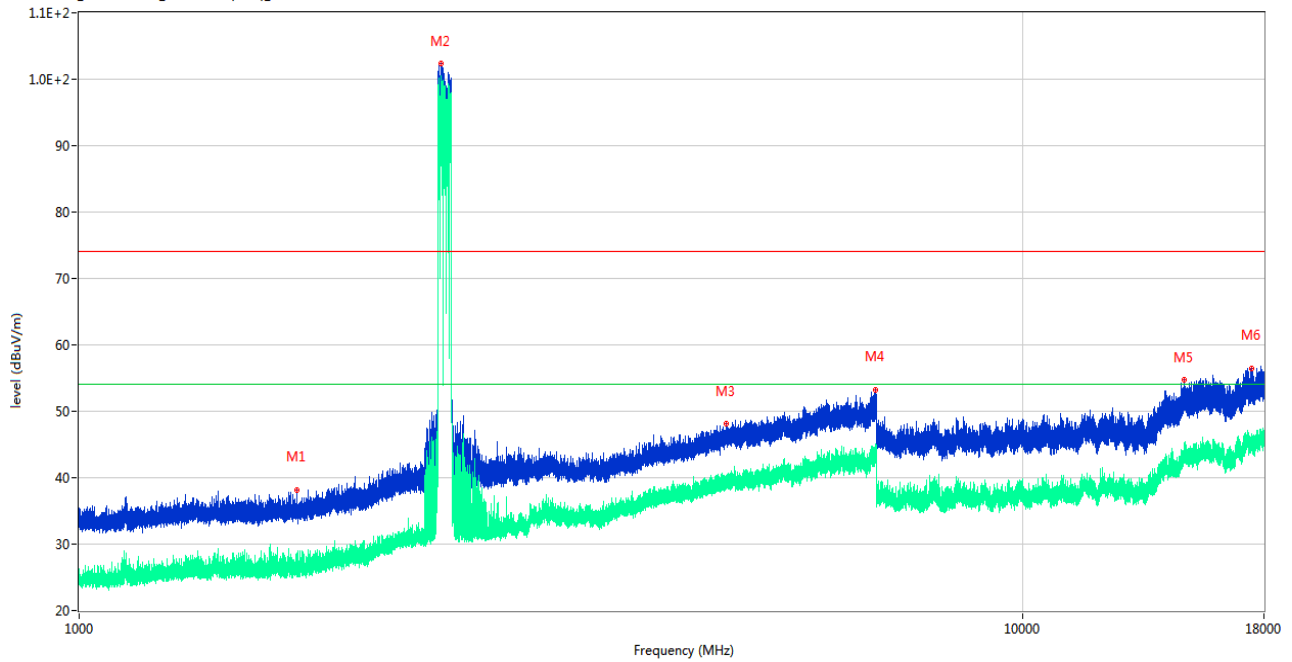

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1702.100	38.21	-15.11	74.0	-35.79	Peak	209.00	150	Horizontal	Pass
1**	1702.100	26.24	-15.11	54.0	-27.76	AV	209.00	150	Horizontal	Pass
2	2419.000	102.45	-9.98	74.0	28.45	Peak	129.00	150	Horizontal	N/A
2**	2419.000	100.59	-9.98	54.0	46.59	AV	129.00	150	Horizontal	N/A
3	4844.200	48.17	-1.26	74.0	-25.83	Peak	290.00	150	Horizontal	Pass
3**	4844.200	39.41	-1.26	54.0	-14.59	AV	290.00	150	Horizontal	Pass
4	6973.000	53.25	5.11	74.0	-20.75	Peak	85.00	150	Horizontal	Pass
4**	6973.000	44.10	5.11	54.0	-9.90	AV	85.00	150	Horizontal	Pass
5	14812.987	54.68	23.23	74.0	-19.32	Peak	350.00	150	Horizontal	Pass
5**	14812.987	43.18	23.23	54.0	-10.82	AV	350.00	150	Horizontal	Pass
6	17478.937	56.49	23.95	74.0	-17.51	Peak	89.00	150	Horizontal	Pass
6**	17478.937	45.79	23.95	54.0	-8.21	AV	89.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

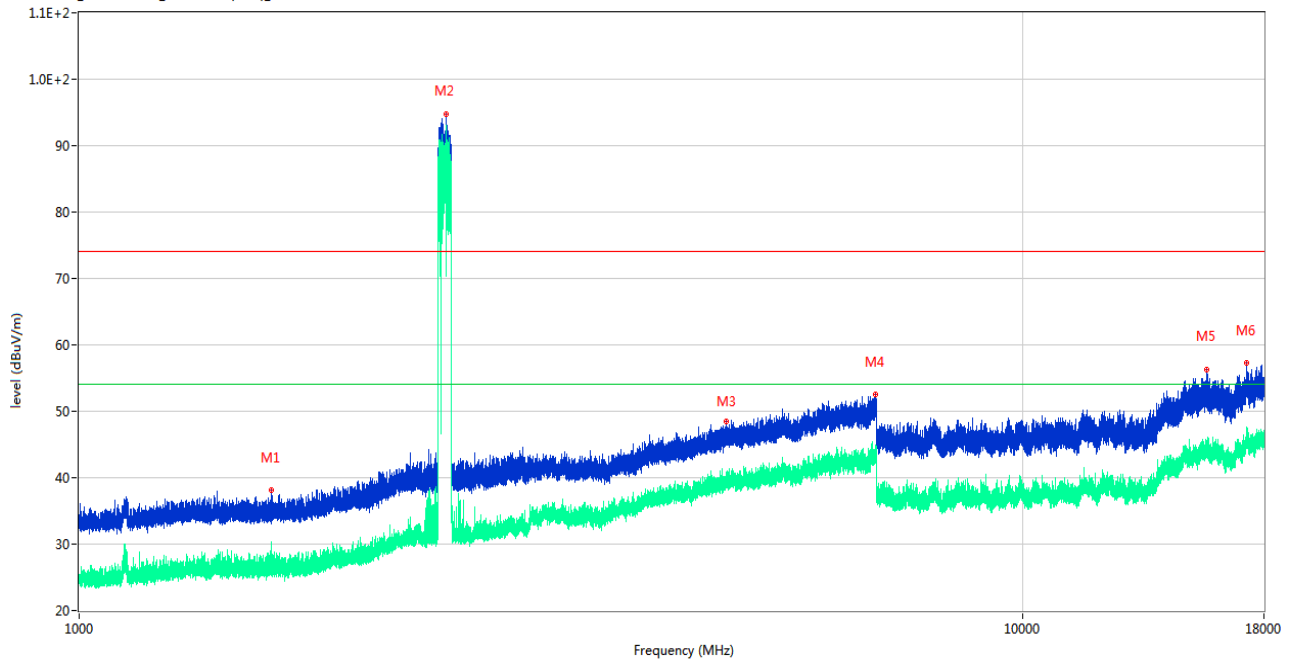

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1596.400	38.06	-15.11	74.0	-35.94	Peak	177.00	150	Vertical	Pass
1**	1596.400	28.17	-15.11	54.0	-25.83	AV	177.00	150	Vertical	Pass
2	2445.800	94.74	-10.38	74.0	20.74	Peak	203.00	150	Vertical	N/A
2**	2445.800	90.38	-10.38	54.0	36.38	AV	203.00	150	Vertical	N/A
3	4843.200	48.41	-1.28	74.0	-25.59	Peak	0.00	150	Vertical	Pass
3**	4843.200	39.57	-1.28	54.0	-14.43	AV	0.00	150	Vertical	Pass
4	6977.200	52.50	5.10	74.0	-21.50	Peak	81.00	150	Vertical	Pass
4**	6977.200	43.34	5.10	54.0	-10.66	AV	81.00	150	Vertical	Pass
5	15666.375	56.31	23.50	74.0	-17.69	Peak	142.00	150	Vertical	Pass
5**	15666.375	44.04	23.50	54.0	-9.96	AV	142.00	150	Vertical	Pass
6	17273.401	57.34	24.41	74.0	-16.66	Peak	25.00	150	Vertical	Pass
6**	17273.401	46.51	24.41	54.0	-7.49	AV	25.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	54.902	32.61	74	19.098	PEAK	Pass
		2390.00	47.797	32.61	54	6.203	AVERAGE	Pass
GFSK	HIGH	2483.50	60.940	32.54	74	13.060	PEAK	Pass
		2483.50	46.605	32.54	54	7.395	AVERAGE	Pass
8-DPSK	Low	2390.00	57.011	32.61	74	16.989	PEAK	Pass
		2390.00	44.563	32.61	54	9.437	AVERAGE	Pass
8-DPSK	HIGH	2483.50	59.861	32.54	74	14.139	PEAK	Pass
		2483.50	50.006	32.54	54	3.994	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	55.651	32.61	74	18.349	PEAK	Pass
		2390.00	44.886	32.61	54	9.114	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	53.557	32.54	74	20.443	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	54.200	32.61	74	19.800	PEAK	Pass
		2390.00	44.077	32.61	54	9.923	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	55.106	32.54	74	18.894	PEAK	Pass
		2483.50	43.899	32.54	54	10.101	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL, PEAK

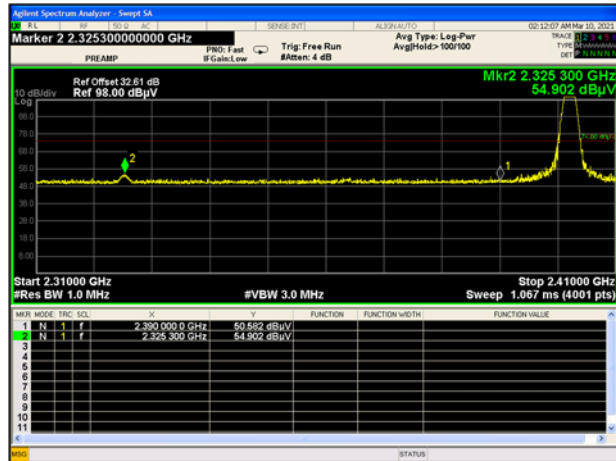


GFSK HIGH CHANNEL, PEAK

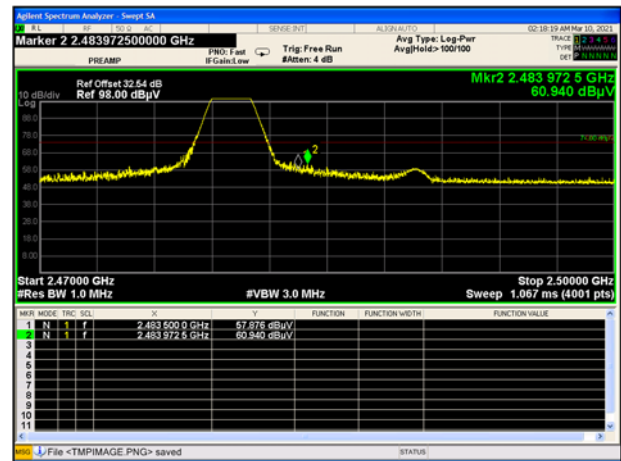


GFSK LOW CHANNEL, AV

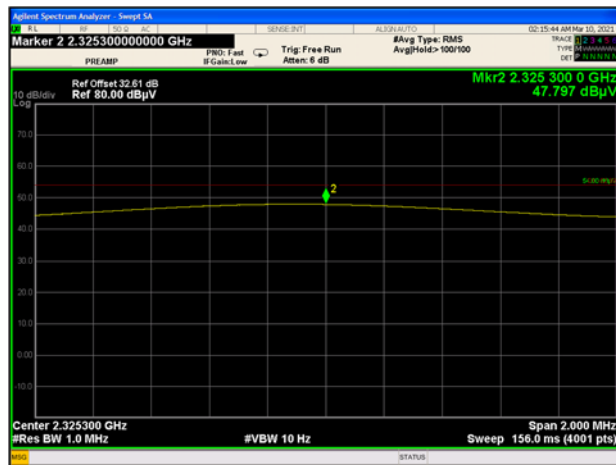


GFSK HIGH CHANNEL, AV

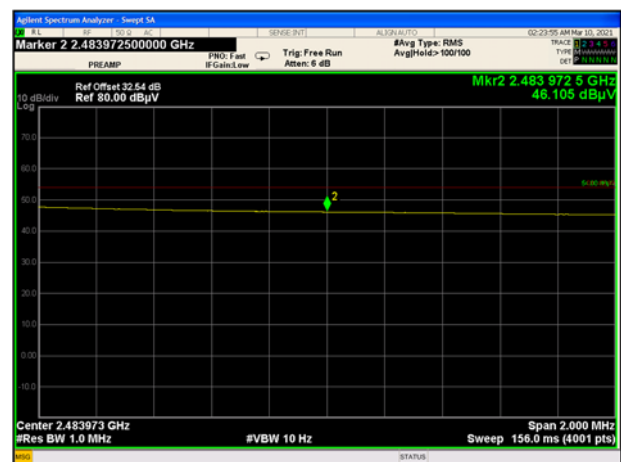


8-DPSK LOW CHANNEL, PEAK

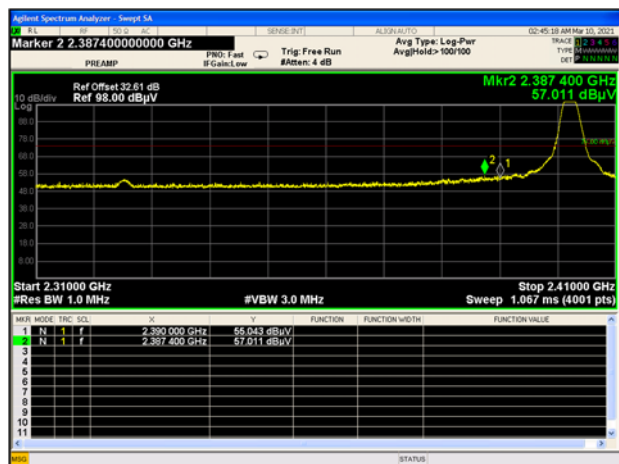


8-DPSK HIGH CHANNEL, PEAK

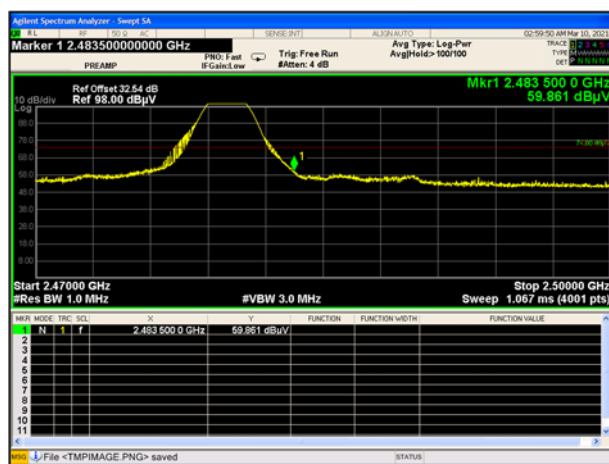

8-DPSK LOW CHANNEL, AV

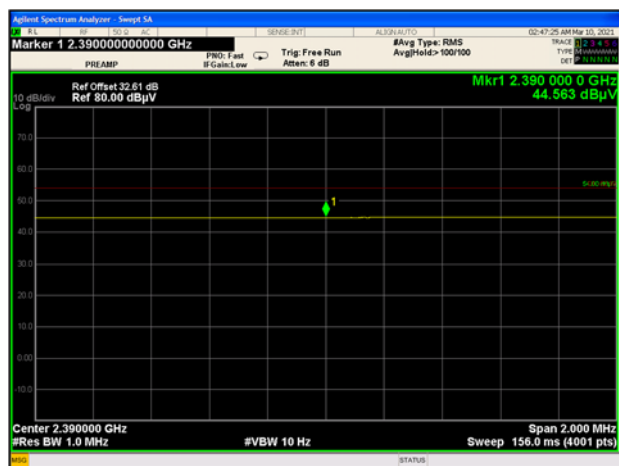

8-DPSK LOW CHANNEL, AV

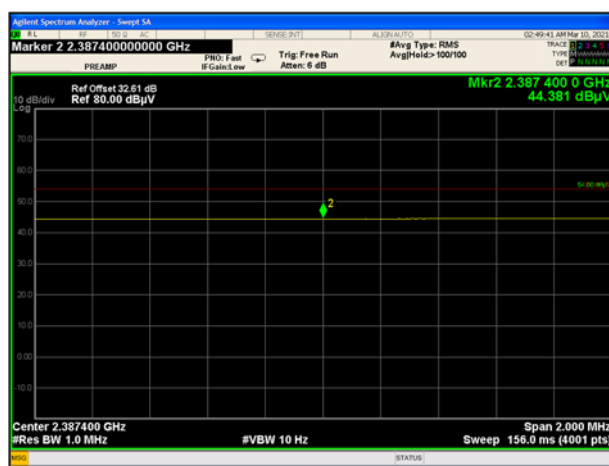


8-DPSK HIGH CHANNEL, AV




Hopping Mode:


GFSK LOW FREQUENCY BAND, PEAK

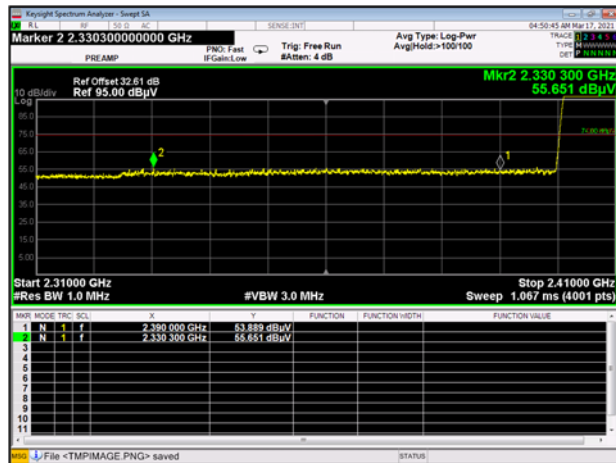


GFSK HIGH FREQUENCY BAND, PEAK

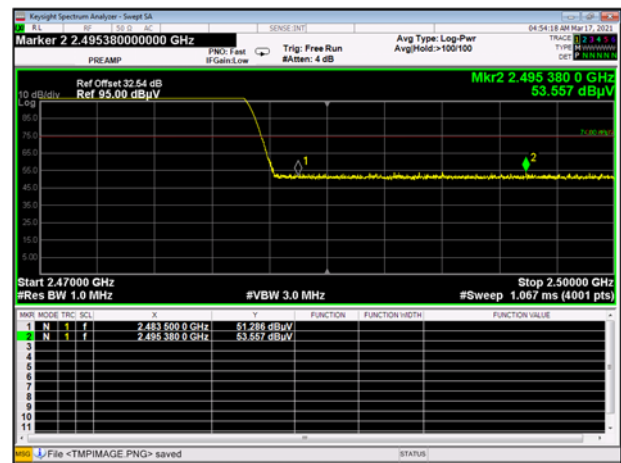


GFSK HIGH FREQUENCY BAND, AV

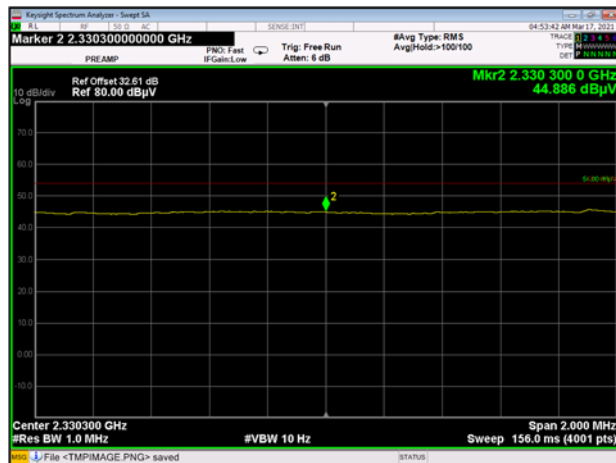


8-DPSK LOW FREQUENCY BAND, PEAK

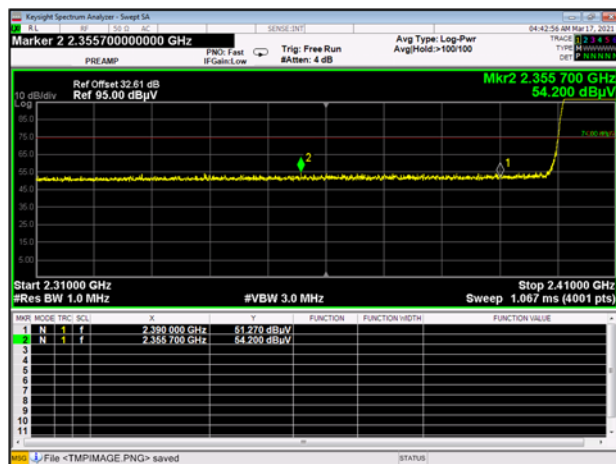


8-DPSK HIGH FREQUENCY BAND, PEAK

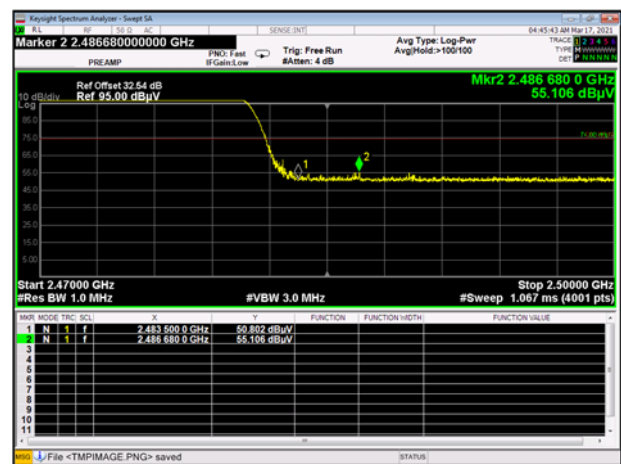

8-DPSK LOW FREQUENCY BAND, AV

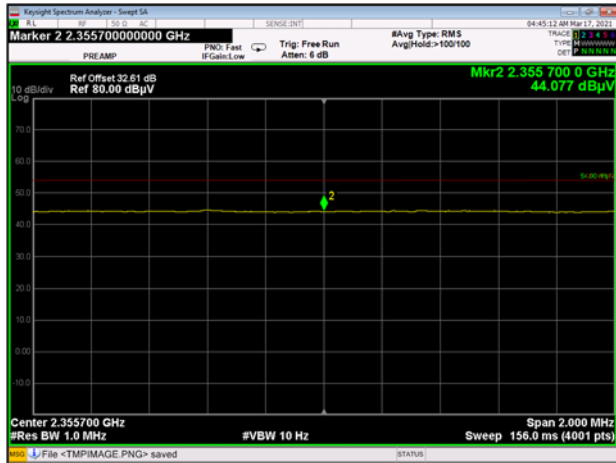

8-DPSK HIGH FREQUENCY BAND, AV

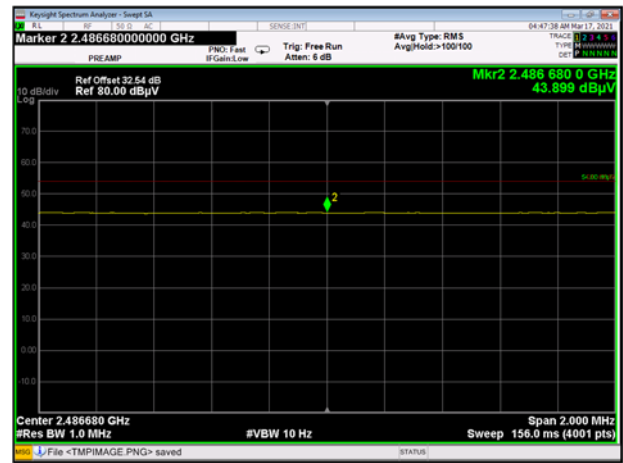

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2130117-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2130117-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2130117-AI.PDF".

--END OF REPORT--